

Shenzhen CTL Testing Technology Co., Ltd. Tel: +86-755-89486194 Fax: +86-755-26636041

Nice Nong

FCC PART 15 SUBPART C TEST REPORT

Part 15.247

Report Reference No...... CTL1508142325-WF

Compiled by

(position+printed name+signature) .: File administrators Happy Guo

Name of the organization performing

the tests

Test Engineer Nice Nong

(position+printed name+signature) .:

Approved by

(position+printed name+signature) .: Manager Tracy Qi

Date of issue...... Aug. 25, 2015

Test Laboratory Name Shenzhen CTL Testing Technology Co., Ltd.

Address Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,

Nanshan District, Shenzhen, China 518055

Applicant's name...... Hanya Star Culture & Technology Co.,Ltd.

Guanghua Road, Chaoyang District, Beijing, China

Test specification:

Standard FCC Part 15.247: Operation within the bands 902–928 MHz, 2400–

2483.5 MHz, and 5725-5850 MHz.

TRF Originator...... Shenzhen CTL Testing Technology Co., Ltd.

Master TRF...... Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Broadcasting Platform & Terminal

FCC ID..... 2AFYB15D3C6

Trade Mark: N/A

Model/Type reference HYJ6, HY_J6

Work Frequency Range 802.11b/g/n(20MHz): 2412~2462MHz

802.11n(40MHz): 2422~2452

Antenna Type External
Antenna Gain 2dBi

Result Positive

TEST REPORT

Test Report No. :	CTL1508142325-WF	Aug. 25, 2015
	C1L1300142323-VVI	Date of issue

Equipment under Test : Qiao Ai Si Hai Chinese Education & Heritage Interactive

Broadcasting Platform & Terminal

Model /Type : HYJ6

Listed Models : HY_J6

Difference Description : Only the color and model's name is different

Applicant : Hanya Star Culture & Technology Co.,Ltd.

Address : Room 1201-1202, Building A, Guanghua Road SOHO2, No. 9

Guanghua Road, Chaoyang District, Beijing, China

Manufacturer : Hanya Star Culture & Technology Co.,Ltd.

Address : Room 1201-1202, Building A, Guanghua Road SOHO2, No. 9

Guanghua Road, Chaoyang District, Beijing, China

Test Result according to the	Positive
standards on page 4:	

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

SUMMARY	<u></u>
General Remarks	
Equipment Under Test	
Short description of the Equipment under Test (EUT)	
EUT operation mode	
EUT configuration NOTE	
Related Submittal(s) / Grant (s)	
Modifications	
TEST ENVIRONMENT	<u></u>
14 14	
Address of the test laboratory	
Test Facility	
Environmental conditions	
Configuration of Tested System	
Duty Cycle Statement of the measurement uncertainty	-
Equipments Used during the Test	
Summary of Test Result	
	9
TEST CONDITIONS AND RESULTS	
Conducted Emissions Test	0
Radiated Emission and Bandedge Test	
6dB Bandwidth Measurement	
Maximum Peak Output Power	\ /
Power Spectral Density Measurement	5
Spurious RF Conducted Emission and bandedge	
Antenna Requirement	
X WIII	
TEST SETUP PHOTOS OF THE EUT	

V1.0 Page 4 of 69 Report No.: CTL1508142325-WF

1. TEST STANDARDS

The tests were performed according to following standards:

<u>FCC Part 15.247:</u>2014 Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB Publication No. 558074 D01 v03r02 Guidance on Measurements for Digital Transmission Systems



V1.0 Page 5 of 69 Report No.: CTL1508142325-WF

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Aug. 14, 2015
Testing commenced on	:	Aug. 14, 2015
Testing concluded on	:	Aug. 25, 2015

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	• •	•	120V / 60 Hz	0	115V / 60Hz
		0	12 V DC	0	24 V DC
		0	Other (specified in blank bel	ow)	

Description of the test mode

IEEE 802.11b/g/n(HT20): Thirteen channels are provided to the EUT, but only eleven channels used for USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11 17	2462
5	2432	1112	
6	2437		
7	2442		

IEEE 802.11n (HT40): Nine channels are provided to the EUT, but only seven channels used for USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
3	2422	8	2447
4	2427	9	2452
5	2432		
6	2437		
7	2442		

2.3. Short description of the Equipment under Test (EUT)

Qiao Ai Si Hai Chinese Education & Heritage Interactive Broadcasting Platform & Terminal, support 802.11b/g/n.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

V1.0 Page 6 of 69 Report No.: CTL1508142325-WF

2.4. EUT operation mode

Test Mode:

1. The EUT has been tested under normal operating condition.

2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel low (2412MHz), mid (2437MHz) and high (2462MHz) for 802.11b/g/n(HT20) and Channel low (2422MHz), mid (2437MHz) and high (2452MHz) for 802.11 n HT40 with highest data rate are chosen for full testing.

3. Test Mode:

Test Mode(TM)	Description	Remark
1	Transmitting	802.11 b
		2412MHz, 2437MHz, 2462MHz
2	Transmitting	802.11 g
		2412MHz, 2437MHz, 2462MHz
3	Transmitting	802.11 n HT20
		2412MHz, 2437MHz, 2462MHz
4	Transmitting	802.11 n HT40
	_	2422MHz, 2437MHz, 2452MHz

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

O - supplied by the manufacturer

supplied by the lab

O AC adapter

Manufacturer:

Shenzhen Fujia Appliance Co., Ltd

Model:

FJ-SW1203000E

2.6. NOTE

1. The EUT is a Qiao Ai Si Hai Chinese Education & Heritage Interactive Broadcasting Platform & Terminal ,The functions of the EUT listed as below:

	Test Standards	Reference Report
WLAN 802.11b/g, 802.11n	FCC Part 15 Subpart C (Section15.247) FCC Per 47 CFR 2.1091(b)	CTL1508142325-WF CTL1508142325-WM

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.11b	\checkmark	_	_	_
802.11g	\checkmark	_	_	_
802.11n(20MHz)	\checkmark	_	_	_
802.11n(40MHz)	\checkmark	_	_	_

3. The EUT incorporates a SISO function, Physically,the EUT provides one completed transmitter and one completed receivers.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX
802.11n (20MHz)	1TX
802.11n (40MHz)	1TX

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCCID: 2AFYB15D3C6 filing to comply with of the FCC part15.247 Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.



V1.0 Page 8 of 69 Report No.: CTL1508142325-WF

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd. Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 (2013) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.


3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

15-35 ° C Temperature: Humidity: 30-60 % 950-1050mbar Atmospheric pressure:

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

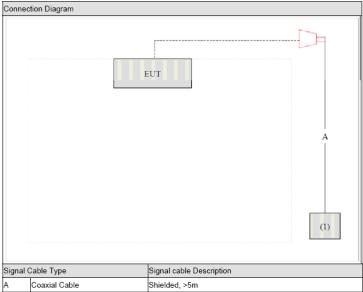

V1.0 Page 9 of 69 Report No.: CTL1508142325-WF

3.5. Duty Cycle

Operated Mode for Worst Duty Cycle						
Operated normally mode for worst duty cycle						
Operated test n	Operated test mode for worst duty cycle					
Mode Duty Cycle (%) Duty Factor (dB)						
11b 100 0						
11g 100 0						
11n HT20 100 0						
11n HT40 100 0						

3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes	
Radiated Emission	30~1000MHz	4.10dB	(1)	
Radiated Emission	1~12.75GHz	4.32dB	(1)	
Radiated Emission	12.75GHz-25 GHz	4.68dB	(1)	
Conducted Disturbance	0.15~30MHz	3.20dB	(1)	

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Technolo

3.7. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
ULTRA-ROADBAND ANTENNA	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	Daze	ZN30900A	N/A	2015/05/19	2016/05/18
LISN	R&S	ENV216	3560.6550.12	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
ISN	FCC	F-071115- 1057-1-09	11229	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Transient Limiter	SCHWARZCECK	VTSD 9561F	9666	2015/06/02	2016/06/01
Radio Communication Tester	R&S	CMU200	115419	2015/05/22	2016/05/21
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
SIGNAL GENERATOR	Agilent	E4421B	US40051744	2015/05/20	2016/05/19
Wideband Peak Power Meter	Anritsu	ML2495A	220.23.35	2015/05/20	2016/05/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10- 2700/X12750 -O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10- 1375/U12750 -O/O	N/A	2015/05/20	2016/05/19
RF Cable	HUBER+SUHNER	RG214	N/A	2015/05/20	2016/05/19

3.8. Summary of Test Result

FCC PART 15		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Remark: The measurement uncertainty is not included in the test result.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
AC Power Conducted Emission	Normal Link	11 Mbps	1
34	11b/DSSS	11 Mbps	1/6/11
Maximum Peak Conducted Output Power Power Spectral Density	11g/OFDM	54 Mbps	1/6/11
6dB Bandwidth Spurious RF conducted emission	11n(20MHz)/OFDM	65Mbps	1/6/11
	11n(40MHz)/OFDM	150Mbps	3/6/9
3 37	11b/DSSS	11 Mbps	1/6/11
N N	11g/OFDM	54 Mbps	1/6/11
Radiated Emission 30MHz~1GHz	11n(20MHz)/OFDM	65Mbps	1/6/11
	11n(40MHz)/OFDM	150Mbps	3/6/9
Cx	11b/DSSS	11 Mbps	1/6/11
	11g/OFDM	54 Mbps	1/6/11
Radiated Emission 1GHz~10th Harmonic	11n(20MHz)/OFDM	65Mbps	1/6/11
	11n(40MHz)/OFDM	150Mbps	3/6/9
	11b/DSSS	11 Mbps	1/11
	11g/OFDM	54 Mbps	1/11
Band Edge Compliance of RF Emission	11n(20MHz)/OFDM	65Mbps	1/11
	11n(40MHz)/OFDM	150Mbps	3/9


Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

V1.0 Page 12 of 69 Report No.: CTL1508142325-WF

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

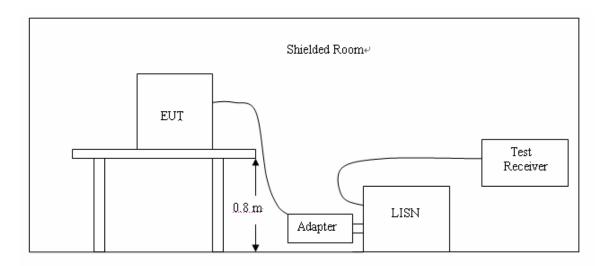

TEST PROCEDURE

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Fraguenav		Maximum RF Line Voltage (dBμv)					
Frequency (MHz)	CLA	SS A	CLASS B				
(**************************************	Q.P.	Ave.	Q.P.	Ave.			
0.15 - 0.50	79	66	66-56*	56-46*			
0.50 - 5.00	73	60	56	46			
5.00 - 30.0	73	60	60	50			

^{*} Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

- 1. Please follow the guidelines in ANSI C63.10-2013.
- 2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 4. All the support units are connecting to the other LISN.
- 5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 7. Both sides of AC line were checked for maximum conducted interference.
- 8. The frequency range from 150 kHz to 30 MHz was searched.
- 9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

The RBW/VBW for 150KHz to 30MHz: 9KHz


V1.0 Page 13 of 69 Report No.: CTL1508142325-WF

TEST RESULTS

120V/60Hz:

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

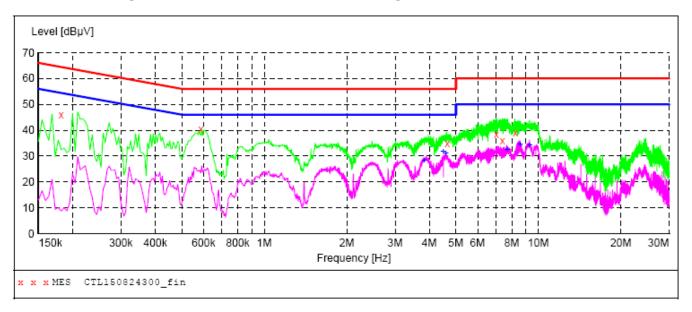

MEASUREMENT RESULT: "CTL150824300_fin"


8/24/2	015 9:1	2AM						
Fre	quency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.	181501	46.10	10.2	64	18.3	QP	N	GND
0.	586501	40.50	10.2	56	15.5	QP	N	GND
4.	650001	34.90	10.4	56	21.1	QP	N	GND
7.	021501	38.40	10.4	60	21.6	QP	N	GND
7.	386001	35.90	10.5	60	24.1	QP	N	GND
8.	236501	39.20	10.5	60	20.8	QP	N	GND

MEASUREMENT RESULT: "CTL150824300 fin2"

8/24/2015 9 Frequency MHz	Level	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
3.840001	28.30	10.4	46	17.7	AV	N	GND
4.501501	31.60	10.4	46	14.4	AV	N	GND
4.600501	31.00	10.4	46	15.0	AV	N	GND
7.687501	32.30	10.5	50	17.7	AV	N	GND
8.574001	34.50	10.6	50	15.5	AV	N	GND
9.307501	34.30	10.6	50	15.7	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

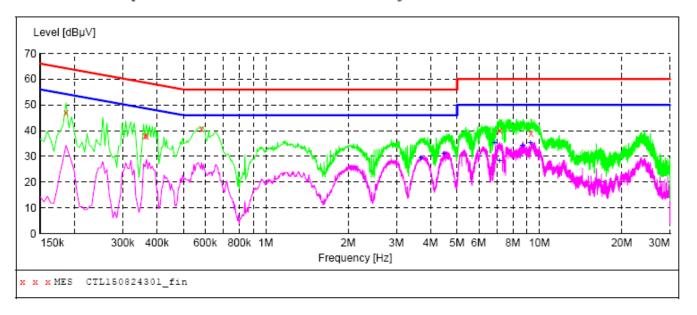

MEASUREMENT RESULT: "CTL150824301_fin"

8/24/2015	9:15AM						
Frequen M	cy Leve Hz dBµ'		Limit dBµV	Margin dB	Detector	Line	PE
0.1860	01 46.9	0 10.2	64	17.3	QP	L1	GND
0.3615	01 38.0	0 10.2	59	20.7	QP	L1	GND
0.3660	01 37.9	0 10.2	59	20.7	QP	L1	GND
0.5820	01 40.6	0 10.2	56	15.4	QP	L1	GND
7.1745	01 40.2	0 10.4	60	19.8	QP	L1	GND
9.3120	01 39.0	0 10.6	60	21.0	QP	L1	GND


MEASUREMENT RESULT: "CTL150824301_fin2"

8/24/2015 9:15AM								
Frequenc M	cy Level Hz dBµV		Limit dBµV	Margin dB	Detector	Line	PE	
3.69150	29.30	10.4	46	16.7	AV	L1	GND	
4.47900	31.10	10.4	46	14.9	AV	L1	GND	
6.87300	35.10	10.4	50	14.9	AV	L1	GND	
7.15200	28.40	10.4	50	21.6	AV	L1	GND	
8.66850	34.20	10.6	50	15.8	AV	L1	GND	
9.28050	35.30	10.6	50	14.7	AV	L1	GND	

AC 240V/60Hz:

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

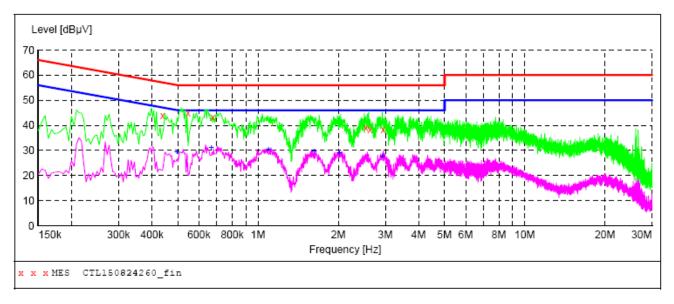

MEASUREMENT RESULT: "CTL150824260_fin"


8/	24/2015 1:4 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.438001	43.90	10.2	57	13.2	QP	L1	GND
	0.546001	44.80	10.2	56	11.2	QP	L1	GND
	0.676501	43.30	10.2	56	12.7	QP	L1	GND
	2.535001	39.10	10.4	56	16.9	QP	L1	GND
	2.625001	38.30	10.4	56	17.7	QP	L1	GND
	2.940001	38.40	10.4	56	17.6	QP	L1	GND

MEASUREMENT RESULT: "CTL150824260_fin2"

8	/24/2015 1:4	1PM						
	Frequency	Level	Transd	Limit	Margin	Detector	Line	PΕ
	MHz	dΒμV	dB	dΒμV	dB			
	0.406501	00.40	10.0	4.6	16.7		- 1	COLD
	0.496501	29.40	10.2	46	16.7	AV	L1	GND
	0.667501	31.20	10.2	46	14.8	AV	L1	GND
	1.095001	30.30	10.3	46	15.7	AV	L1	GND
	1.626001	29.50	10.3	46	16.5	AV	L1	GND
	2.017501	28.90	10.4	46	17.1	AV	L1	GND
	2.926501	27.70	10.4	46	18.3	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

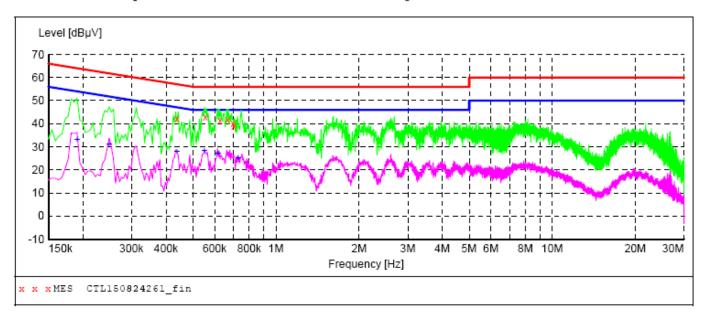

MEASUREMENT RESULT: "CTL150824261_fin"

8/24/2015 1 Frequency MHz	Level	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.438001	42.20	10.2	57	14.9	QP	N	GND
0.555001	43.00	10.2	56	13.0	QP	N	GND
0.627001	41.30	10.2	56	14.7	QP	N	GND
0.667501	41.70	10.2	56	14.3	QP	N	GND
0.699001	40.30	10.2	56	15.7	QP	N	GND
0.703501	38.90	10.2	56	17.1	QP	N	GND

MEASUREMENT RESULT: "CTL150824261_fin2"


8,	/24/2015 1:4							
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.190501	33.10	10.2	54	20.9	AV	N	GND
	0.249001	30.90	10.2	52	20.9	AV	N	GND
	0.438001	27.80	10.2	47	19.3	AV	N	GND
	0.550501	28.20	10.2	46	17.8	AV	N	GND
	0.618001	27.20	10.2	46	18.8	AV	N	GND
	0.730501	25.20	10.2	46	20.8	AV	N	GND

V1.0 Page 17 of 69 Report No.: CTL1508142325-WF


4.2. Radiated Emission and Bandedge Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

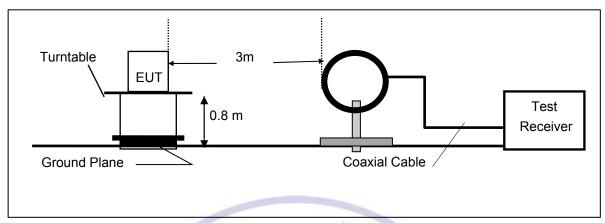

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

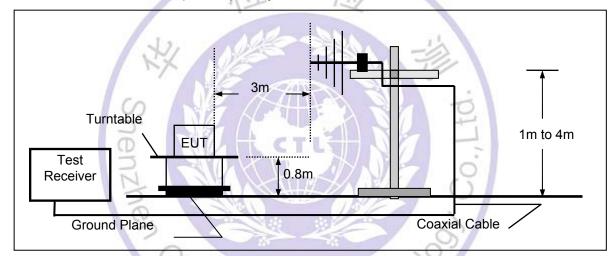

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

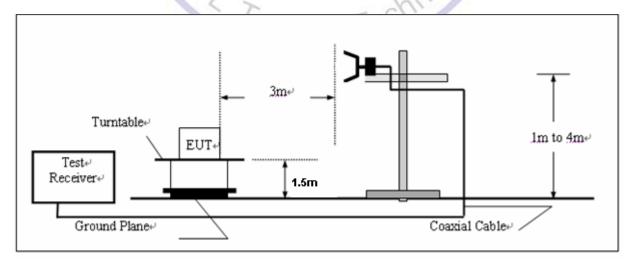

V1.0 Page 18 of 69 Report No.: CTL1508142325-WF

FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)		
RA = Reading Amplitude	AG = Amplifier Gain		
AF = Antenna Factor			

TEST PROCEDURE

- 1. The testing follows FCC KDB Publication No. 558074 D01 v03r02 (Measurement Guidelines of DTS).
- 2. The EUT was placed on a turn table which is 0.8m above ground plane.
- 3. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- 4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5. Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for f >1 GHz, 100 kHz for f < 1 GHz; VBW ≧ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
- 6. Repeat above procedures until all frequency measurements have been completed.

Note:

When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the "cone of radiation" of EUT. The 3dB beamwidth is 60 degrees for H-plane and 90 degrees for E-plane.

LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (μV/m)
30-88	/63Stine	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

V1.0 Page 19 of 69 Report No.: CTL1508142325-WF

TEST RESULTS

9KHz-30MHz:

Freq.	Level	Over Limit	Limit Line	Remark
(MHz)	(dBuV)	(dB)	(dBuV)	
-	-	-	-	See Note


Note: The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Dstance extrapolation factor= 40 log (specific distance/ test distance) (dB); Limit line= specific limits (dBuV) + distance extrapolation factor.

Below 1GHz:

The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.

SWEEP TABLE: "test (30M-1G)"
Short Description: Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

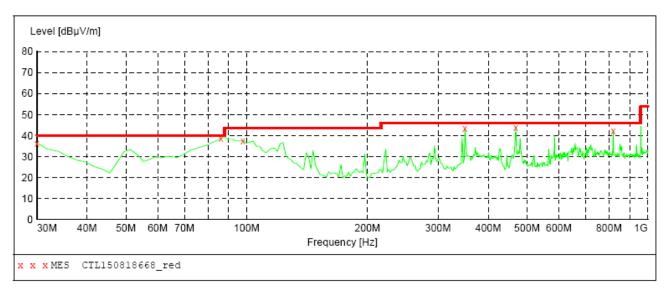

MEASUREMENT RESULT: "CTL150818668 red"


8/18/2015 9:	48PM							
Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	36.30	21.1	40.0	3.7		0.0	0.00	VERTICAL
86.260000	38.70	9.3	40.0	1.3		0.0	0.00	VERTICAL
97.900000	37.50	11.1	43.5	6.0		0.0	0.00	VERTICAL
350.100000	43.50	16.9	46.0	2.5		0.0	0.00	VERTICAL
468.440000	43.80	19.8	46.0	2.2		0.0	0.00	VERTICAL
819.580000	42.10	25.0	46.0	3.9		0.0	0.00	VERTICAL

SWEEP TABLE: "test (30M-1G)"

Short Description: Start Stop Field Strength

Detector Meas. IF Transducer

Time Bandw. Frequency Frequency

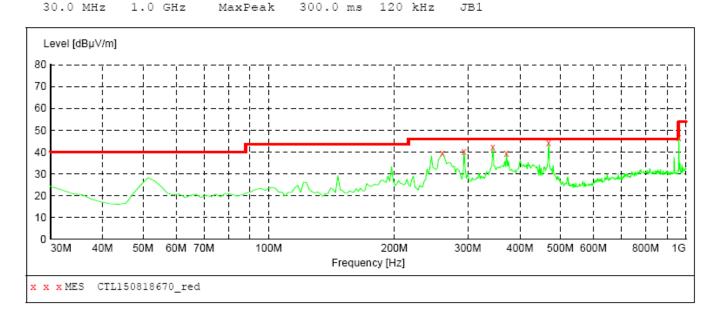

MEASUREMENT RESULT: "CTL150818670 red"

8/18/2015 9:51PM

Frequency MHz	Level dBµV/m		Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
260.860000	39.40	15.0	46.0	6.6		0.0	0.00	HORIZONTAL
293.840000	40.20	15.4	46.0	5.8		0.0	0.00	HORIZONTAL
344.280000	42.10	16.7	46.0	3.9		0.0	0.00	HORIZONTAL
371.440000	39.30	17.7	46.0	6.7		0.0	0.00	HORIZONTAL
468.440000	44.40	19.8	46.0	1.6		0.0	0.00	HORIZONTAL
961.200000	46.60	26.8	53.9	7.3		0.0	0.00	HORIZONTAL



Above 1GHz:

802.11b

СН	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	V	2412	80.0	30.8	110.8	Fundamental	1	PK
	V	3200	14.0	31.1	45.1	54(note3)	8.9	PK
	V	2390	35.5	32.2	67.7	74	6.3	PK
	V	2390	16.4	32.2	48.6	54	5.4	AV
1	V	2400	39.4	32.1	71.5	74	2.5	PK
' '	V	2400	18.7	32.1	50.8	54	3.2	AV
	V	4824	6.8	42.6	49.4	54(note3)	4.6	PK
	V	7236	22.6	46.5	69.1	74	4.9	PK
	V	7236	0.7	46.5	47.2	54	6.8	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK
	V	2437	80.0	31.2	111.2	Fundamental	/	PK
	V	3200	7.8	31.1	38.9	54(note3)	15.1	PK
6	V	4876	17.4	32.8	50.2	54(note3)	3.8	PK
"	V	7311	21.4	46.8	68.2	74	5.8	PK
	V	7311	3.0	46.1	49.1	54	4.9	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK
	V	2462	79.6	30.9	110.5	Fundamental	P	PK
	V	3200	9.2	31.1	40.3	54(note3)	13.7	PK
	V	2483.5	37.5	30.2	67.7	74	6.3	PK
11	V	2483.5	17.9	30.2	48.1	54	5.9	AV
''	V	4927	17.9	32.5	50.4	54(note3)	3.6	PK
	V	7386	22.6	46.3	68.9	74	5.1	PK
	V	7386	3.2	46.3	49.5	54	4.5	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK

Note: 1. Measure Level = Reading Level + Factor.

^{2.} The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

^{3.} This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11g

СН	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	V	2411.9	78.9	30.8	109.7	Fundamental	1	PK
	V	3200	8.3	31.1	39.4	54(note3)	14.6	PK
	V	2390	35.5	32.2	67.7	74	6.3	PK
	V	2390	16.6	32.2	48.8	54	5.2	AV
1	V	2400	40.1	32.1	72.2	74	1.8	PK
'	V	2400	18.2	32.1	50.3	54	3.7	AV
	V	4824	6.9	42.6	49.5	54(note3)	4.5	PK
	V	7236	22.8	46.5	69.3	74	4.7	PK
	V	7236	1.9	46.5	48.4	54	5.6	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK
	V	2437	78.9	31.2	110.1	Fundamental	1	PK
	V	3200	11.0	31.1	42.1	54(note3)	11.9	PK
6	V	4876	17.5	32.8	50.3	54(note3)	3.7	PK
6	V	7311	21.4	46.8	68.2	74	5.8	PK
	V	7311	2.6	46.1	48.7	54	5.3	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK
	V	2462.3	78.5	30.9	109.4	Fundamental	1	PK
	V	3200	15.7	31.1	46.8	54(note3)	7.2	PK
	V	2483.5	37.5	30.2	67.7	74	6.3	PK
11	V	2483.5	19.1	30.2	49.3	54	4.7	AV
	V	4927	17.6	32.5	50.1	54(note3)	3.9	PK
	V	7386	23.3	46.3	69.6	74	4.4	PK
	V	7386	2.1	46.3	48.4	54	5.6	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK

Note: 1. Measure Level = Reading Level + Factor.

^{2.} The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

^{3.} This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11n(20MHz)

СН	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	V	2411.9	78.1	30.8	108.9	Fundamental	/	PK
	V	3200	8.5	31.1	39.6	54(note3)	14.4	PK
	V	2390	34.0	32.2	66.2	74	7.8	PK
	V	2390	15.0	32.2	47.2	54	6.8	AV
1	V	2400	38.4	32.1	70.5	74	3.5	PK
'	V	2400	19.3	32.1	51.4	54	2.6	AV
	V	4824	7.8	42.6	50.4	54(note3)	3.6	PK
	V	7236	21.6	46.5	68.1	74	5.9	PK
	V	7236	1.2	46.5	47.7	54	6.3	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK
	V	2437	77.8	31.2	109.0	Fundamental	1	PK
	V	3200	9.0	31.1	40.1	54(note3)	13.9	PK
6	V	4876	18.9	32.8	51.7	54(note3)	2.3	PK
6	V	7311	20.2	46.8	67.0	74	7.0	PK
	V	7311	3.4	46.1	49.5	54	4.5	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK
	V	2462.3	79.3	30.9	110.2	Fundamental	1/2/	PK
	V	3200	9.2	31.1	40.3	54(note3)	13.7	PK
	V	2483.5	35.3	30.2	65.5	74	8.5	PK
11	V	2483.5	16.9	30.2	47.1	54	6.9	AV
''	V	4927	18.7	32.5	51.2	54(note3)	2.8	PK
	V	7386	20.6	46.3	66.9	74	7.1	PK
	V	7386	2.1	46.3	48.4	54	5.6	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK

Note: 1. Measure Level = Reading Level + Factor.

^{2.} The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

^{3.} This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

802.11n(40MHz)

СН	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	V	2422	81.6	30.8	112.4	Fundamental	1	PK
	V	3200	16.0	31.1	47.1	54(note3)	6.9	PK
	V	2390	36.3	32.2	68.5	74	5.5	PK
	V	2390	17.4	32.2	49.6	54	4.4	AV
3	V	2400	38.4	32.1	70.5	74	3.5	PK
3	V	2400	19.3	32.1	51.4	54	2.6	AV
	V	4844	7.6	42.9	50.5	54(note3)	3.5	PK
	V	7266	21.9	46.8	68.7	74	5.3	PK
	V	7266	2.8	46.8	49.6	54	4.4	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK
	V	2437	80.7	31.2	111.9	Fundamental	1	PK
	V	3200	12.3	31.1	43.4	54(note3)	10.6	PK
6	V	4876	18.6	32.8	51.4	54(note3)	2.6	PK
"	V	7311	19.4	46.8	66.2	74	7.8	PK
	V	7311	3.7	46.1	49.8	54	4.2	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK
	V	2452	80.3	30.9	111.2	Fundamental	1	PK
	V	3200	8.8	31.1	39.9	54(note3)	14.1	PK
	V	2483.5	35.9	30.2	66.1	74	7.9	PK
9	V	2483.5	18.5	30.2	48.7	54	5.3	AV
ן פ	V	4967	18.1	32.5	50.6	54(note3)	3.4	PK
	V	7356	20.4	46.1	66.5	74	7.5	PK
	V	7356	3.0	46.1	49.1	54	4.9	AV
	Н	24000	11.7	38.9	50.6	54	3.4	PK

Note: 1. Measure Level = Reading Level + Factor.

^{2.} The test results which are attenuated more than 20 dB below the permissible value limit (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

^{3.} This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

V1.0 Page 25 of 69 Report No.: CTL1508142325-WF

4.3. 6dB Bandwidth Measurement

TEST CONFIGURATION



TEST PROCEDURE

- 1. The testing follows FCC KDB Publication No. 558074 D01 v03r02 (Measurement Guidelines of DTS).
- 2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
- 4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

LIMIT


For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS


Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE						
		BROADCASTING PLATFORM & TERMINAL						
Test Item		6dB Occupied Bandwidth						
Test Mode : Mode 1: Transmit by 802.11b								

Channel No.	Frequency	Occupied Bandwidth	Limit	Result
	(MHz)	(kHz)	(kHz)	
01	2412	9676	500	Pass
06	2437	9629	500	Pass
11	2462	8366	500	Pass


Channel 01 (2412MHz)

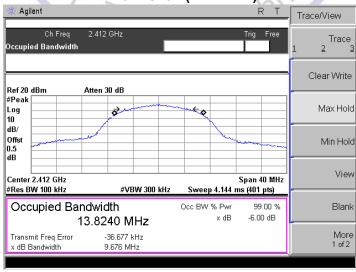

Channel 06 (2437MHz)

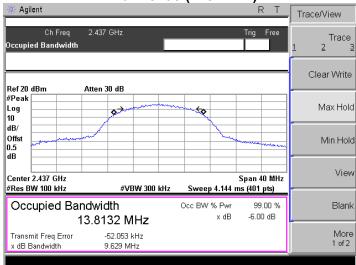


Channel 11 (2462MHz)

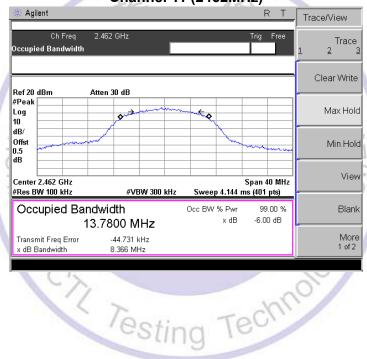


Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE			
		BROADCASTING PLATFORM & TERMINAL			
Test Item	:	6dB Occupied Bandwidth			
Test Mode	:	Mode 2: Transmit by 802.11g			

Channel No.	Frequency	Occupied Bandwidth	Limit	Result
	(MHz)	(kHz)	(kHz)	
01	2412	16152	500	Pass
06	2437	16399	500	Pass
11	2462	16319	500	Pass

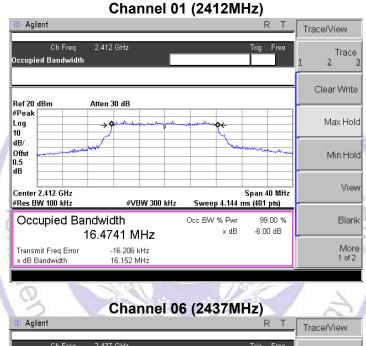

Trace Occupied Bandwidth Clear Write Ref 20 dBm #Peak Log Atten 30 dB Max Hold dB/ Offst 0.5 dB Min Hold View Span 40 MHz #VBW 300 kHz #Res BW 100 kHz Sweep 4.144 ms (401 pts) Occupied Bandwidth Blank Occ BW % Pwr 99.00 % -6.00 dB x dB 16.4754 MHz Transmit Freq Error -28.588 kHz More 1 of 2 x dB Bandwidth 16.399 MHz


Channel 11 (2462MHz)

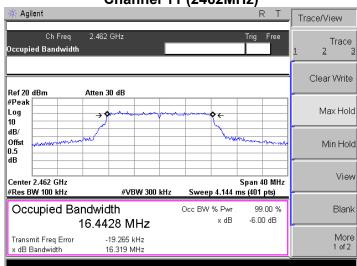




Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE			
		BROADCASTING PLATFORM & TERMINAL			
Test Item		6dB Occupied Bandwidth			
Test Mode		Mode 3: Transmit by 802.11n (20MHz)			

Channel No.	Frequency	Occupied Bandwidth	Limit	Result
	(MHz)	(kHz)	(kHz)	
01	2412	17670	500	Pass
06	2437	17706	500	Pass
11	2462	17241	500	Pass

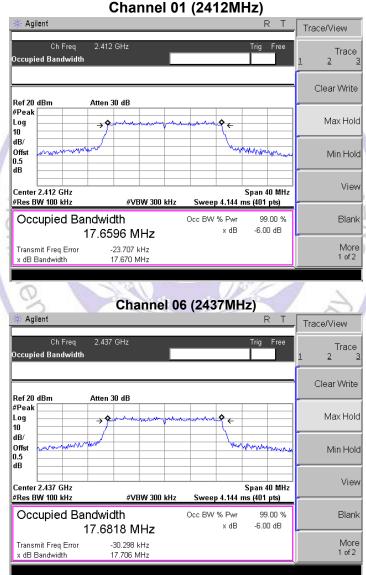


Channel 11 (2462MHz)

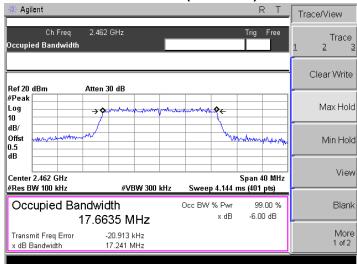




Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE			
		BROADCASTING PLATFORM & TERMINAL			
Test Item	:	6dB Occupied Bandwidth			
Test Mode	:	Mode 4: Transmit by 802.11n (40MHz)			

Channel No.	Frequency	Occupied Bandwidth	Limit	Result
	(MHz)	(kHz)	(kHz)	
03	2422	36574	500	Pass
06	2437	36529	500	Pass
09	2452	36517	500	Pass

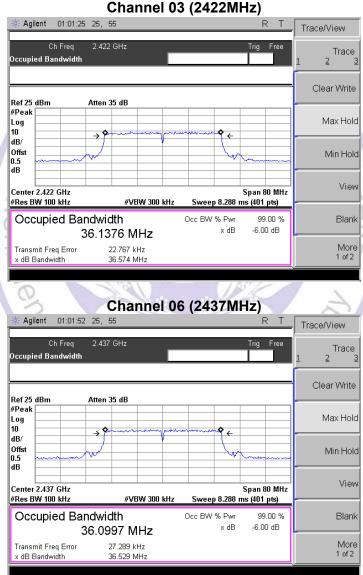

Channel 09 (2452MHz)

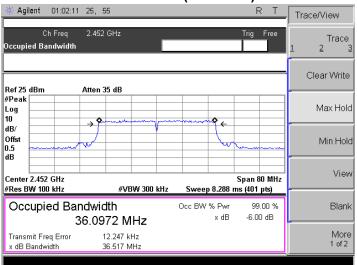



V1.0 Page 33 of 69 Report No.: CTL1508142325-WF

4.4. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to C63.10 -2013 and KDB558074 D01 v03r02, The EUT was directly connected to the power meter / spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

Use the wideband power meter to test peak power and record the result.

LIMIT

The Peak Output Power Measurement limits are 30dBm.

TEST RESULTS

Product	:	QIAO AI SI HAI CHINESE EDUCATION &	
		HERITAGE INTERACTIVE BROADCASTING	
		PLATFORM & TERMINAL	
Test Item	:	Power Output	
Test Mode	:	Mode 1: Transmit by 802.11b	

Channel No.	Frequency	Measurement Power Output	Limit	Result
	(MHz)	(dBm)	(dBm)	
1	2412	16.58	30.00	Pass
6	2437	16.13	30.00	Pass
11	2462	16.34	30.00	Pass

Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE
		INTERACTIVE BROADCASTING PLATFORM &
		TERMINAL
Test Item	• •	Power Output
Test Mode		Mode 2: Transmit by 802.11g

Channel No.	Frequency	Measurement Power Output	Limit	Result
	(MHz)	(dBm)	(dBm)	
1	2412	15.87	30.00	Pass
6	2437	15.44	30.00	Pass
11	2462	15.91	30.00	Pass

Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE			
		INTERACTIVE BROADCASTING PLATFORM &			
		TERMINAL			
Test Item	:	Power Output			
Test Mode	:	Mode 3: Transmit by 802.11n(20MHz)			

Channel No.	Frequency	Measurement Power Output	Limit	Result
	(MHz)	(dBm)	(dBm)	
1	2412	15.47	30.00	Pass
6	2437	15.28	30.00	Pass
11	2462	15.35	30.00	Pass


Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE		
		INTERACTIVE BROADCASTING PLATFORM &		
		TERMINAL		
Test Item	:	Power Output		
Test Mode	:	Mode 4: Transmit by 802.11n(40MHz)		

Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
2422	17.10	30.00	Pass
2437	17.02	30.00	Pass
2452	16.94	30.00	Pass
1	0	30.00	1 433
	resting	Tech	
	(MHz) 2422 2437 2452	(MHz) (dBm) 2422 17.10 2437 17.02 2452 16.94 results including the cable lose.	(MHz) (dBm) (dBm) 2422 17.10 30.00 2437 17.02 30.00 2452 16.94 30.00 Pesults including the cable lose.

V1.0 Page 35 of 69 Report No.: CTL1508142325-WF

4.5. Power Spectral Density Measurement

TEST CONFIGURATION



TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r02 for compliance to FCC 47CFR 15.247 and requirements. Set RBW= 3 kHz, VBW≥10KHz, SPAN to 1.5 times greater than the EBW,.

LIMIT


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS


	. 1 40				
Product	: QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE				
	BROADCASTING PLATFORM & TERMINAL				
Test Item	Power Spectral Density				
Test Mode	Mode 1: Transmit by 802.11b				


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
01	2412	-7.143	8	Pass
06	2437	-7.643	8	Pass
11	2462	-7.084	8	Pass

Channel 01 (2412MHz)

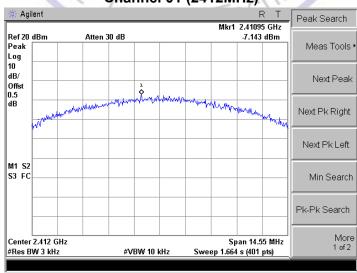

Channel 06 (2437MHz)

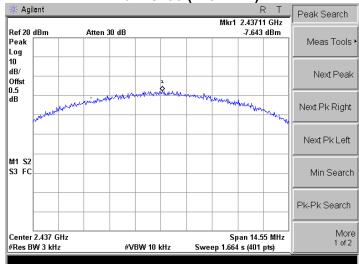









Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE
		BROADCASTING PLATFORM & TERMINAL
Test Item	:	Power Spectral Density
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
01	2412	-9.806	8	Pass
06	2437	-9.831	8	Pass
11	2462	-10.53	8	Pass



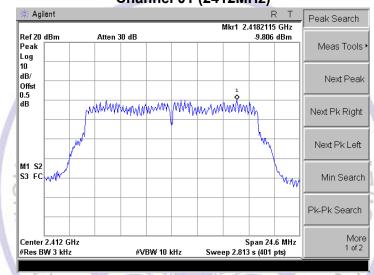

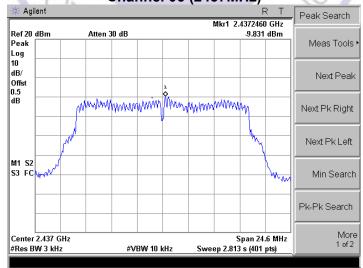

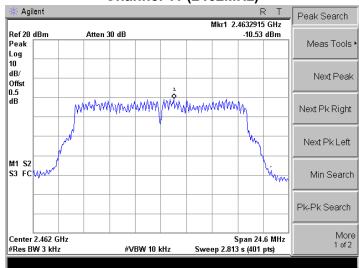






Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE
		BROADCASTING PLATFORM & TERMINAL
Test Item	:	Power Spectral Density
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
01	2412	-11.53	8	Pass
06	2437	-10.72	8	Pass
11	2462	-12.01	8	Pass

Channel 01 (2412MHz)

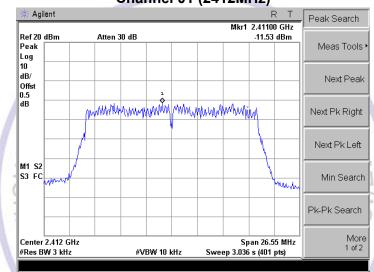

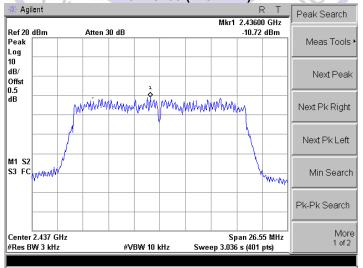


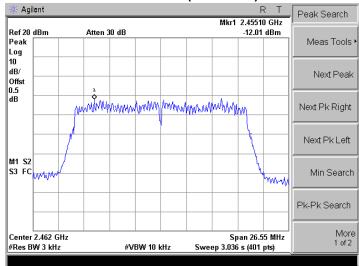





Product	1:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE
		BROADCASTING PLATFORM & TERMINAL
Test Item	:	Power Spectral Density
Test Mode		Mode 4: Transmit by 802.11n (40MHz)


Channel No.	Frequency (MHz)	Measurement PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
03	2422	-19.51	8	Pass
06	2437	-14.04	8	Pass
09	2452	-14.73	8	Pass



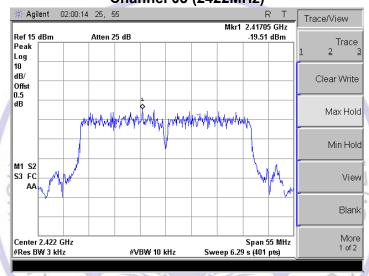

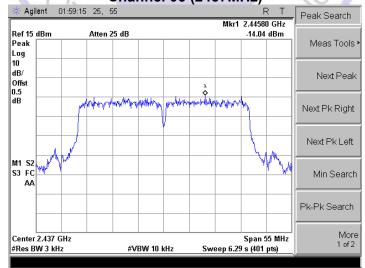

Channel 09 (2452MHz)

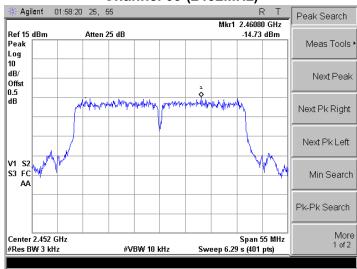



V1.0 Page 43 of 69 Report No.: CTL1508142325-WF

4.6. Spurious RF Conducted Emission and bandedge

TEST CONFIGURATION



TEST PROCEDURE

The EUT was tested according to KDB558074 D01 v03r02 for compliance to FCC 47CFR 15.247 requirements.

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength, and measure frequeny range from 30MHz to 26.5GHz.


LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


TEST RESULTS


Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE
		BROADCASTING PLATFORM & TERMINAL
Test Item		RF Antenna Conducted Spurious
Test Mode	-	Mode 1: Transmit by 802.11b


Channel 01 (2412MHz)

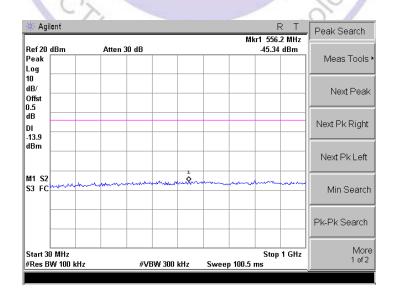


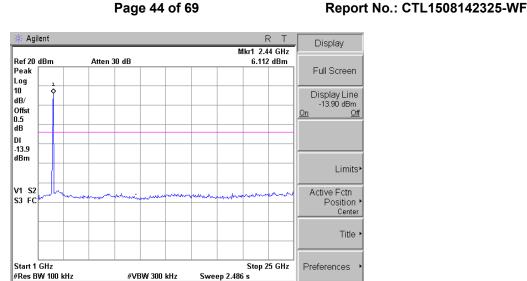


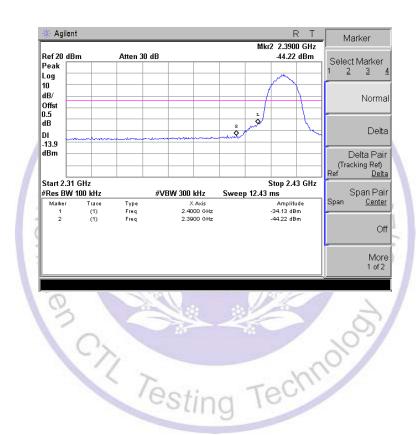


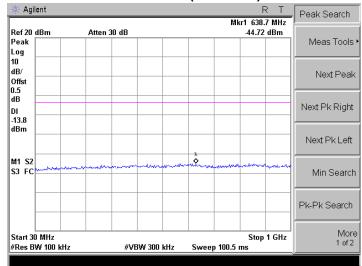

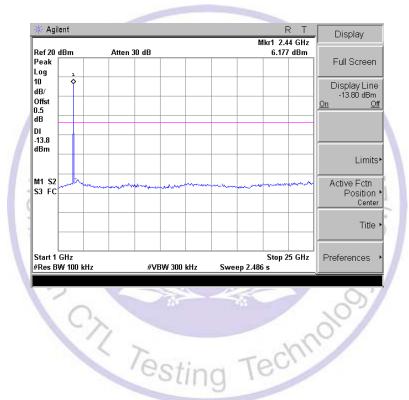

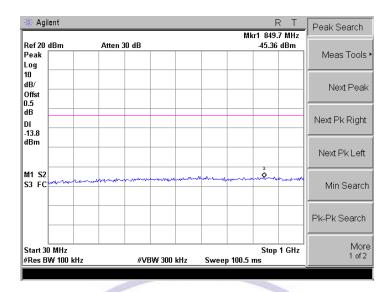


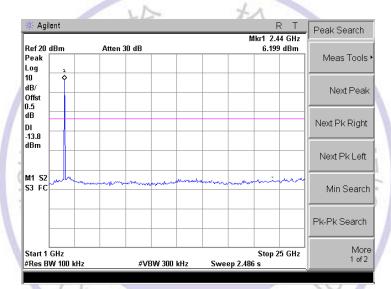


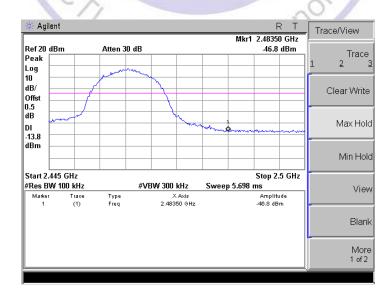


Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE
		BROADCASTING PLATFORM & TERMINAL
Test Item	• •	RF Antenna Conducted Spurious
Test Mode	:	Mode 2: Transmit by 802.11g

Channel 01 (2412MHz)

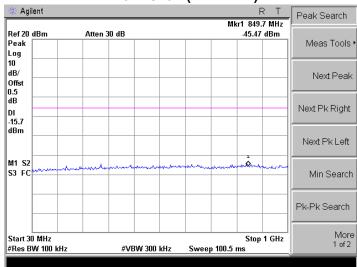


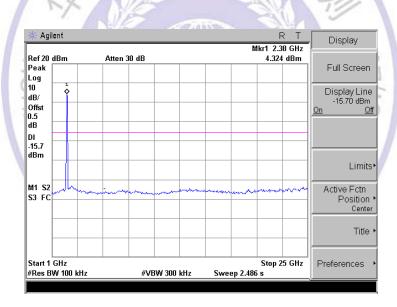


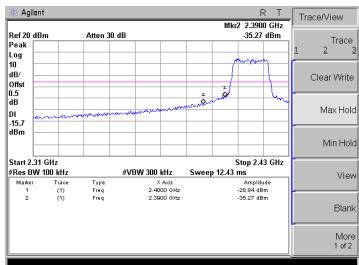






Channel 06 (2437MHz)

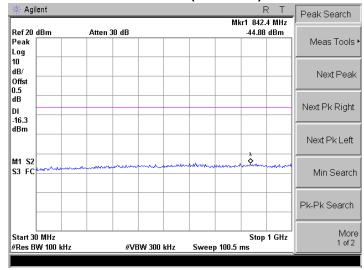

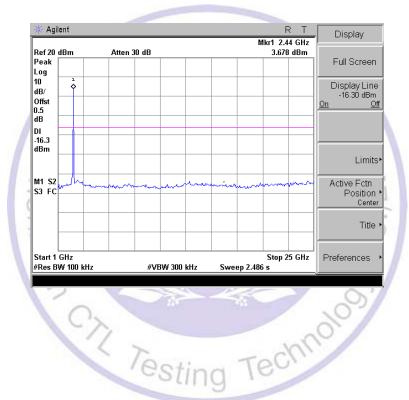

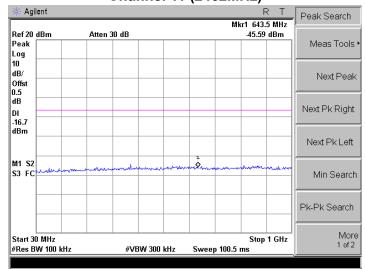


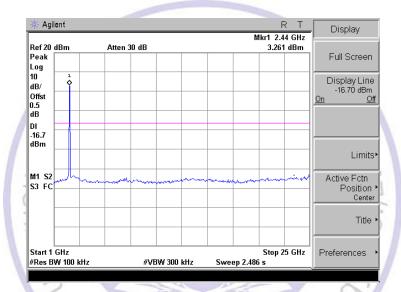


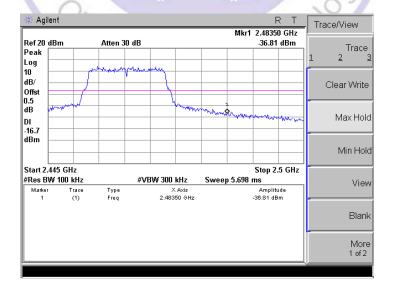


Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE
		BROADCASTING PLATFORM & TERMINAL
Test Item		RF Antenna Conducted Spurious
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz)

Channel 01 (2412MHz)

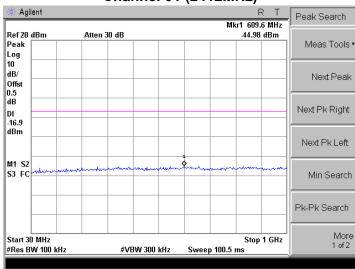


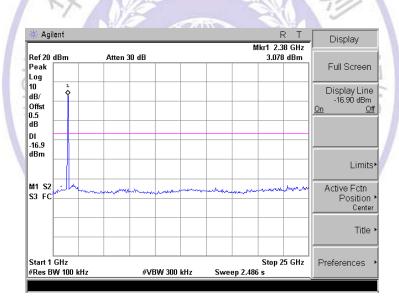





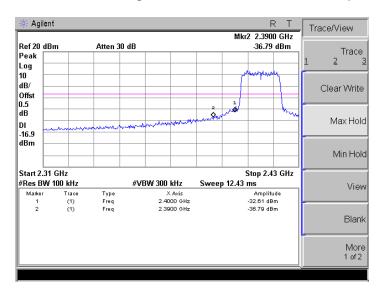





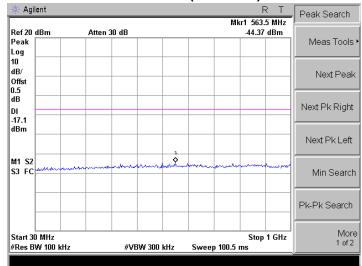

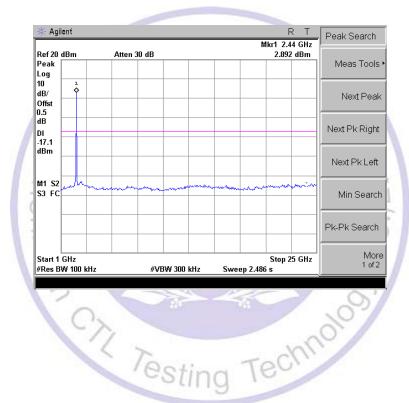

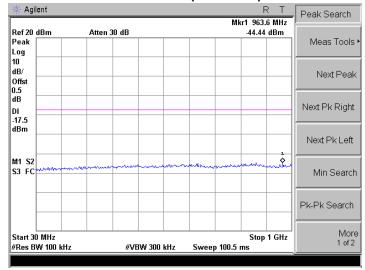


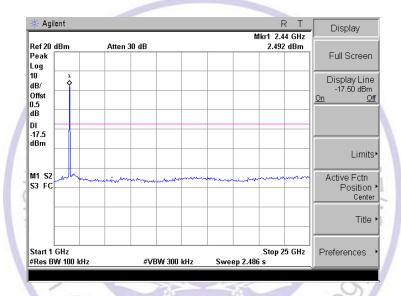


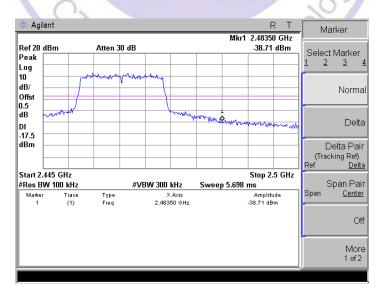


Product	:	QIAO AI SI HAI CHINESE EDUCATION & HERITAGE INTERACTIVE
		BROADCASTING PLATFORM & TERMINAL
Test Item	• •	RF Antenna Conducted Spurious
Test Mode		Mode 4: Transmit by 802.11n (40MHz)

Channel 03 (2422MHz)

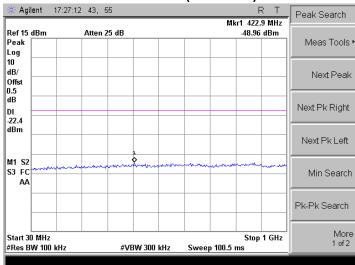


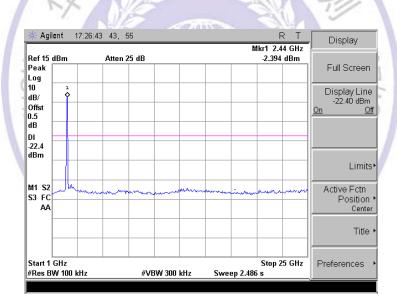


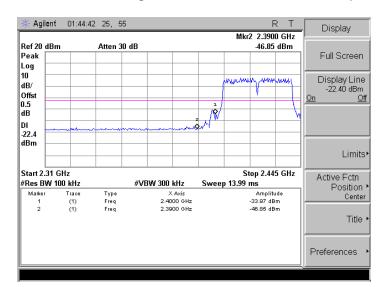





Channel 06 (2437MHz)

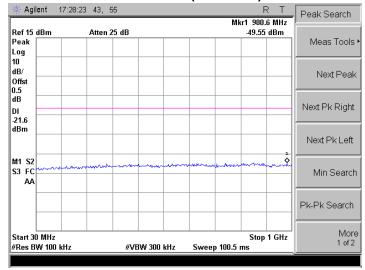


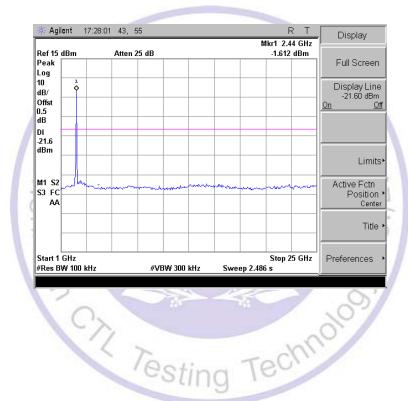

Channel 09 (2452MHz)

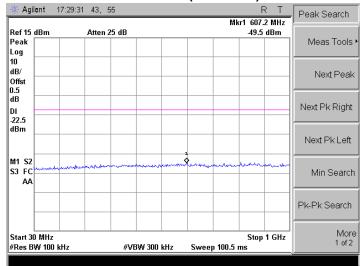

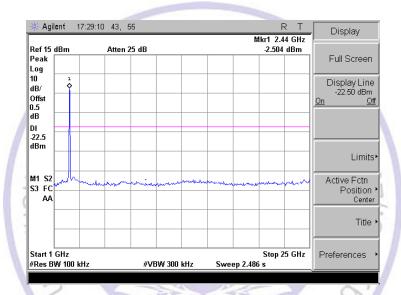

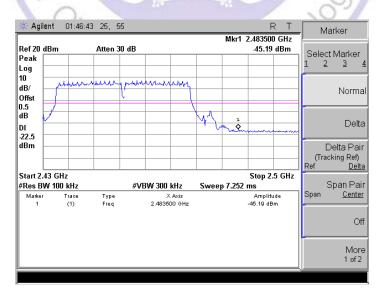

V1.0 Page 59 of 69 Report No.: CTL1508142325-WF

4.8. Antenna Requirement

STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

ANTENNA CONNECTED CONSTRUCTION

The directional gains of antenna used for transmitting is 2 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.




V1.0 Page 60 of 69 Report No.: CTL1508142325-WF

5. Test Setup Photos of the EUT





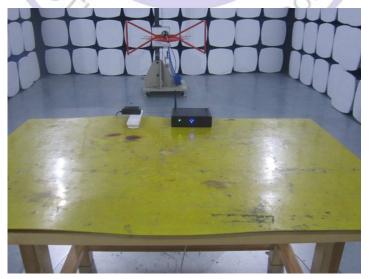







V1.0 Page 62 of 69 Report No.: CTL1508142325-WF

6. External and Internal Photos of the EUT

External Photos of EUT

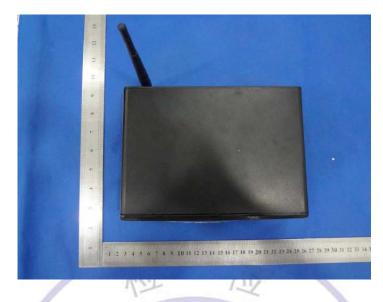

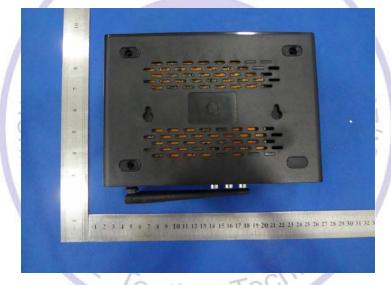







V1.0 Page 64 of 69 Report No.: CTL1508142325-WF

Internal Photos of EUT











