



FCC Part 15E Test Report

FCC ID: 2AFZ6TX2000

Product Name:	Dark Tower
Trademark:	Movcam
Model Name :	TX2000 TX024G, TX058G, TX3000
Prepared For :	Movcam Tech. Co., Ltd
Address :	Fl4, Bld2, Guole Science Park, Longhua New District, Shenzhen.
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Jul. 15, 2019 - Aug. 02, 2019
Date of Report :	Aug. 02, 2019
Report No.:	BCTC-FY190502991-1E



TEST RESULT CERTIFICATION

Applicant's name : **Movcam Tech. Co., Ltd**

Address : FI4, Bld2, Guole Science Park, Longhua New District, Shenzhen..

Manufacture's Name : **Movcam Tech. Co., Ltd**

Address : FI4, Bld2, Guole Science Park, Longhua New District, Shenzhen..

Product description

Product name : Dark Tower

Trademark : Movcam

Model and/or type reference : TX2000
TX024G, TX058G, TX3000

Standards : FCC Part15.407
ANSI C63.10-2013

KDB789033 D02 General U-NII Test Procedures New Rules
v02r01

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Cai Fang Zhong

Cai Fang Zhong

Reviewer(Supervisor): Eric Yang



Approved(Manager): Zero Zhou



Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.1.2 TEST PROCEDURE	12
3.1.3 DEVIATION FROM TEST STANDARD	12
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.2 RADIATED EMISSION MEASUREMENT	13
3.2.1 APPLICABLE STANDARD	13
3.2.2 CONFORMANCE LIMIT	13
3.2.3 MEASURING INSTRUMENTS	13
3.2.4 TEST CONFIGURATION	14
3.2.5 TEST PROCEDURE	15
3.2.6 TEST RESULTS (9KHZ – 30 MHZ)	16
3.2.7 TEST RESULTS (30MHZ – 1GHZ)	17
3.2.8 TEST RESULTS (1GHZ-40GHZ)	19
4 . POWER SPECTRAL DENSITY TEST	21
4.1 APPLIED PROCEDURES / LIMIT	21
4.2 TEST PROCEDURE	22
4.3 DEVIATION FROM STANDARD	22
4.4 TEST SETUP	22
4.5 EUT OPERATION CONDITIONS	22
4.6 TEST RESULTS	23
5 . 6DB & 99% EMISSION BANDWIDTH	26
5.1 APPLIED PROCEDURES / LIMIT	26
5.2 TEST PROCEDURE	26
5.3 EUT OPERATION CONDITIONS	27
5.4 TEST RESULTS	28
6 . MAXIMUM CONDUCTED OUTPUT POWER	32
6.1 APPLIED PROCEDURES / LIMIT	32
6.2 TEST PROCEDURE	32
6.3 DEVIATION FROM STANDARD	34
6.4 TEST SETUP	34



Table of Contents

	Page
6.5 EUT OPERATION CONDITIONS	34
6.6 TEST RESULTS	35
7 . OUT OF BAND EMISSIONS	37
7.1 APPLICABLE STANDARD	37
7.2 TEST PROCEDURE	37
7.3 DEVIATION FROM STANDARD	37
7.4 TEST SETUP	37
7.5 EUT OPERATION CONDITIONS	37
7.6 TEST RESULTS	38
8. SPURIOUS RF CONDUCTED EMISSIONS	40
8.1 CONFORMANCE LIMIT	40
8.2 MEASURING INSTRUMENTS	40
8.3 TEST SETUP	40
8.4 TEST PROCEDURE	40
8.5 TEST RESULTS	40
9. FREQUENCY STABILITY MEASUREMENT	45
9.1 LIMIT	45
9.2 TEST PROCEDURES	45
9.3 TEST SETUP LAYOUT	45
9.4 EUT OPERATION DURING TEST	45
9.5 TEST RESULTS	46
10. ANTENNA REQUIREMENT	50
10.1 STANDARD REQUIREMENT	50
10.2 EUT ANTENNA	50
11. EUT TEST PHOTO	51
12. EUT PHOTO	53



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3) 15.1049	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Outsourcing: The 26G-40G Spurious Radiated Emissions in this test were outsourced to the Shenzhen Academy of Metrology & Quality Inspection



1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** , providing a level of confidence of approximately **95 %** 。

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59°C



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Dark Tower				
Trade Name	Movcam				
Model Name	TX2000 TX024G, TX058G, TX3000				
Model Difference	All the model are the same circuit and RF module, except model names.				
Product Description	Modulation	OFDM			
	Operating Frequency Range	5190-5230MHz, 5755-5795MHz			
	Number of Channels	2 channels for 5190-5230MHz band ; 2 channels for 5755-5795MHz band ;			
	Antenna Type	External antenna			
	Antenna Gain	2.0dBi			
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.					
Channel List	Please refer to the Note 2.				
Ratings	DC 11.2-17V (from battery)				
Connecting I/O Port(s)	Please refer to the User's Manual				

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
01	5190	02	5230-	03	5755	04	5795

Antenna A gain: 2dBi, Antenna B gain: 2dBi,
For MIMO mode, Directional gain=[10log(GA+ G B)] dbi =5.01dbi

Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
ANT1	N/A	N/A	R-SMA antenna	2.0	
ANT2	N/A	N/A	R-SMA antenna	2.0	



2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	CH01/CH02/CH03/CH04
Mode 2	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 2	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01/CH02/CH03/CH04


Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.



2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Dark Tower	Movcam	TX2000	N/A	EUT
E-2	Battery	N/A	BCTC-001	N/A	Lab.Provide

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.5M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	Jun. 13, 2019	Jun. 12, 2020
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	Jun. 13, 2019	Jun. 12, 2020
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	VULB9163-942	Jun. 22, 2019	Jun. 21, 2020
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	Jun. 22, 2019	Jun. 21, 2020
5	Horn Antenna (18GHz-40GHz)	SCHWARZBECK	BBHA9170	822	Jun. 22, 2019	Jun. 21, 2020
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	Jun. 25, 2019	Jun. 24, 2020
7	Amplifier (0.5GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	Jun. 25, 2019	Jun. 24, 2020
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	Jun. 17, 2019	Jun. 16, 2020
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	014	Jul. 02, 2019	Jul. 01, 2020
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 25, 2019	Jun. 24, 2020
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	Jun. 25, 2019	Jun. 24, 2020
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	Jun. 25, 2019	Jun. 24, 2020
13	Power Meter	Keysight	E4419	\	Jun. 17, 2019	Jun. 16, 2020
14	Power Sensor (AV)	Keysight	E9 300A	\	Jun. 17, 2019	Jun. 16, 2020
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	Jun. 13, 2019	Jun. 12, 2020
16	Spectrum Analyzer 9kHz-40GHz	Aglient	FSP40	100363	Jun. 13, 2019	Jun. 12, 2020
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun. 12, 2020
2	LISN	SCHWARZBECK	NSLK8127	8127739	Jun. 13, 2019	Jun. 12, 2020
3	LISN	R&S	ENV216	101375	Jun. 13, 2019	Jun. 12, 2020
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 25, 2019	Jun. 24, 2020
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC/ RSS-247
0.50 -5.0	56.00	46.00	FCC/ RSS-247
5.0 -30.0	60.00	50.00	FCC/ RSS-247

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

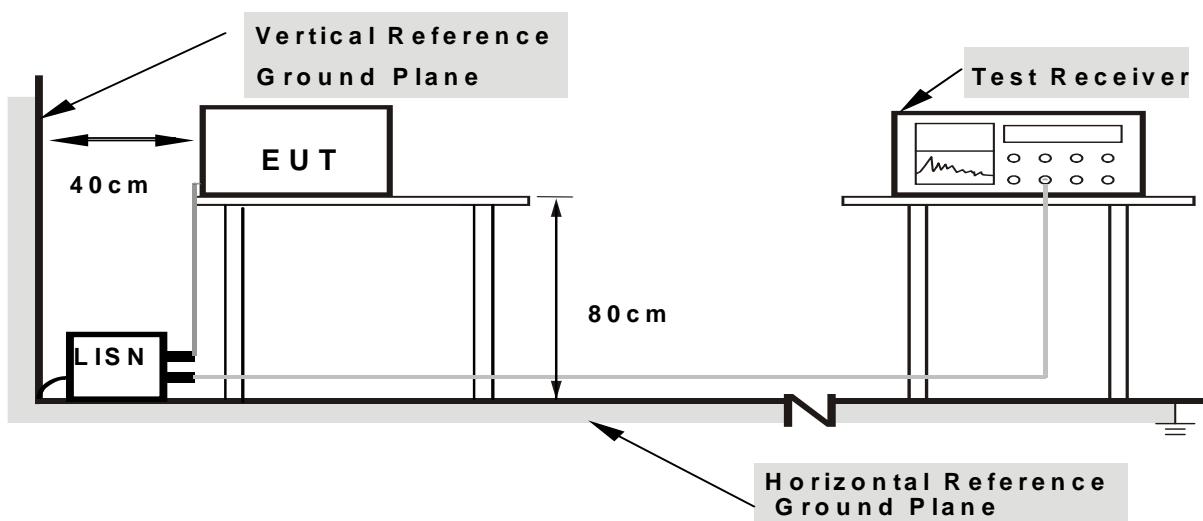

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 Test Result

NOTE: This EUT is powered by the battery only, this test item is not applicable.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μ V/m)	Field Strength ($\text{dB}\mu$ V/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (μ V/m)	300
0.490~1.705	2400/F(KHz)	20 log (μ V/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B ($\text{dB}\mu$ V/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in $\text{dB}\mu$ V/m=20 log (μ V/m)


2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
Limit line=Specific limits($\text{dB}\mu$ V) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

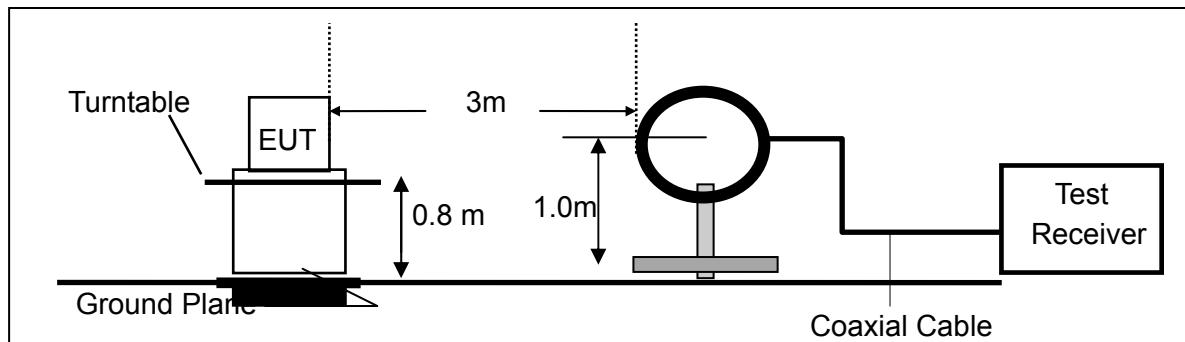

(b) For radiated emissions from 30MHz to 1000MHz

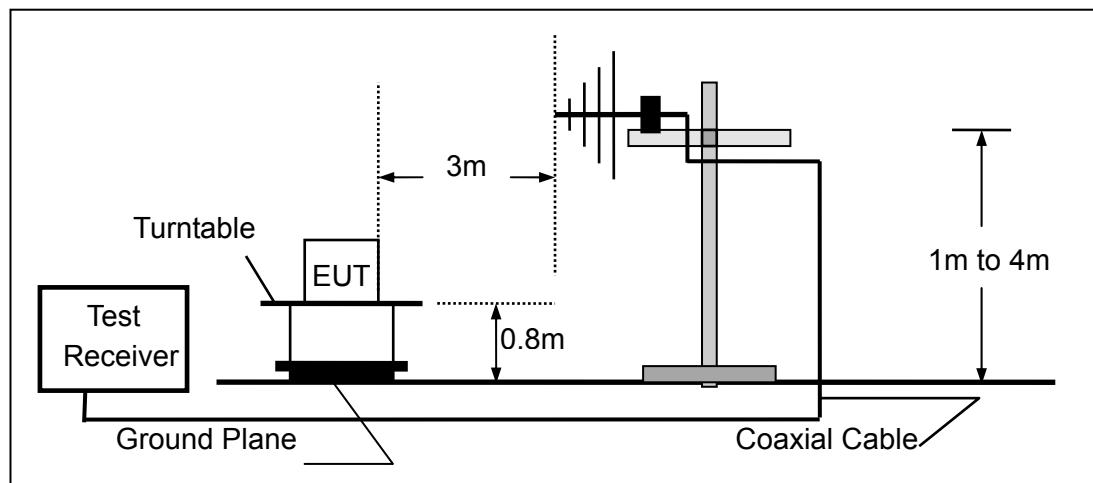

(c) For radiated emissions above 1000MHz

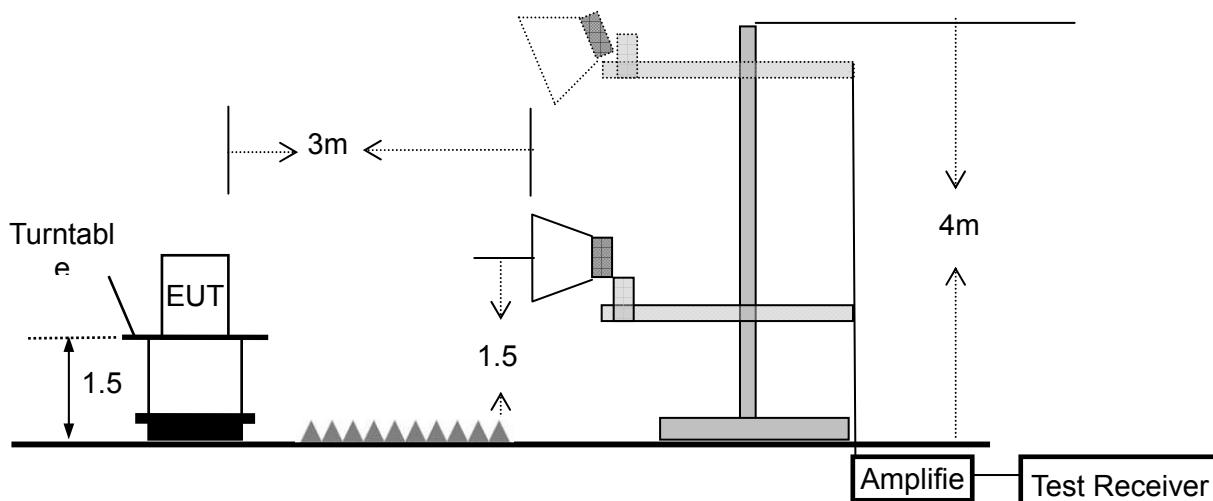



3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.



3.2.6 TEST RESULTS (9KHZ – 30 MHZ)

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	---
Test Mode :	Link Mode	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);
Limit line = specific limits(dBuV) + distance extrapolation factor.



3.2.7 TEST RESULTS (30MHZ – 1GHZ)

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 14.8V		
Test Mode :	Link Mode		

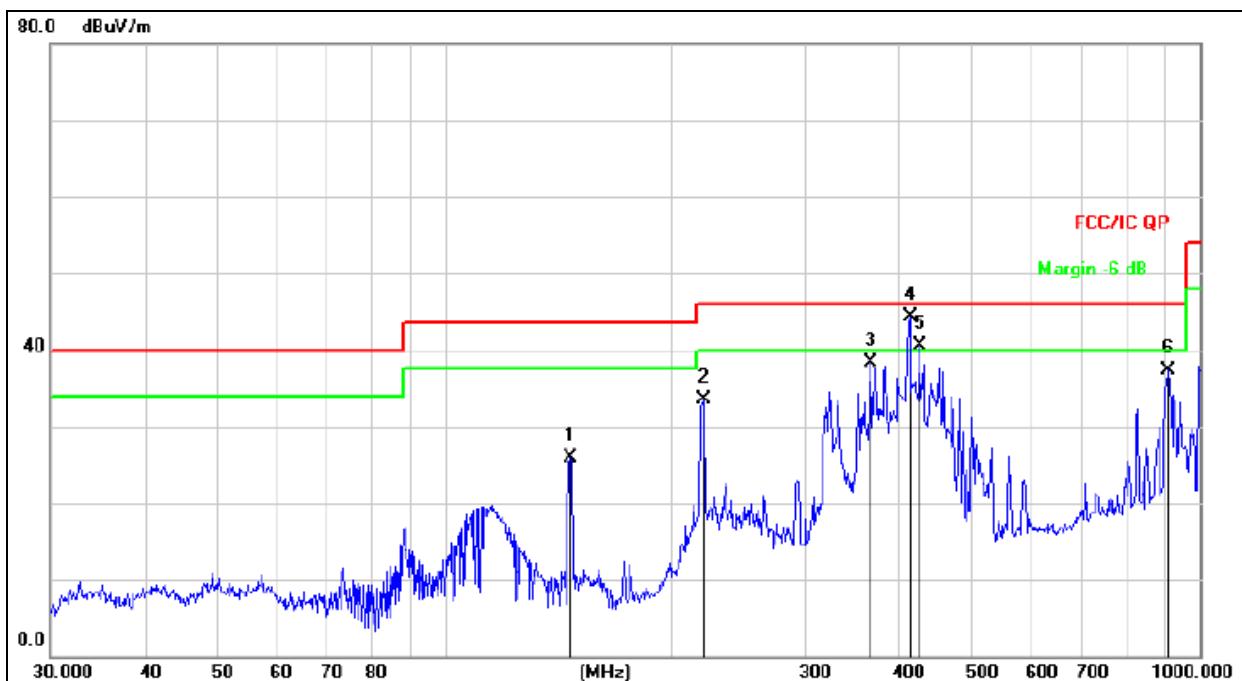


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		146.3735	45.25	-19.27	25.98	43.50	-17.52	QP
2		219.8448	49.37	-15.84	33.53	46.00	-12.47	QP
3		366.8231	50.21	-11.85	38.36	46.00	-7.64	QP
4	*	413.2706	55.00	-10.79	44.21	46.00	-1.79	QP
5	!	425.0280	51.02	-10.53	40.49	46.00	-5.51	QP
6		909.6666	38.70	-1.42	37.28	46.00	-8.72	QP



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	DC 14.8V		
Test Mode :	Link Mode		

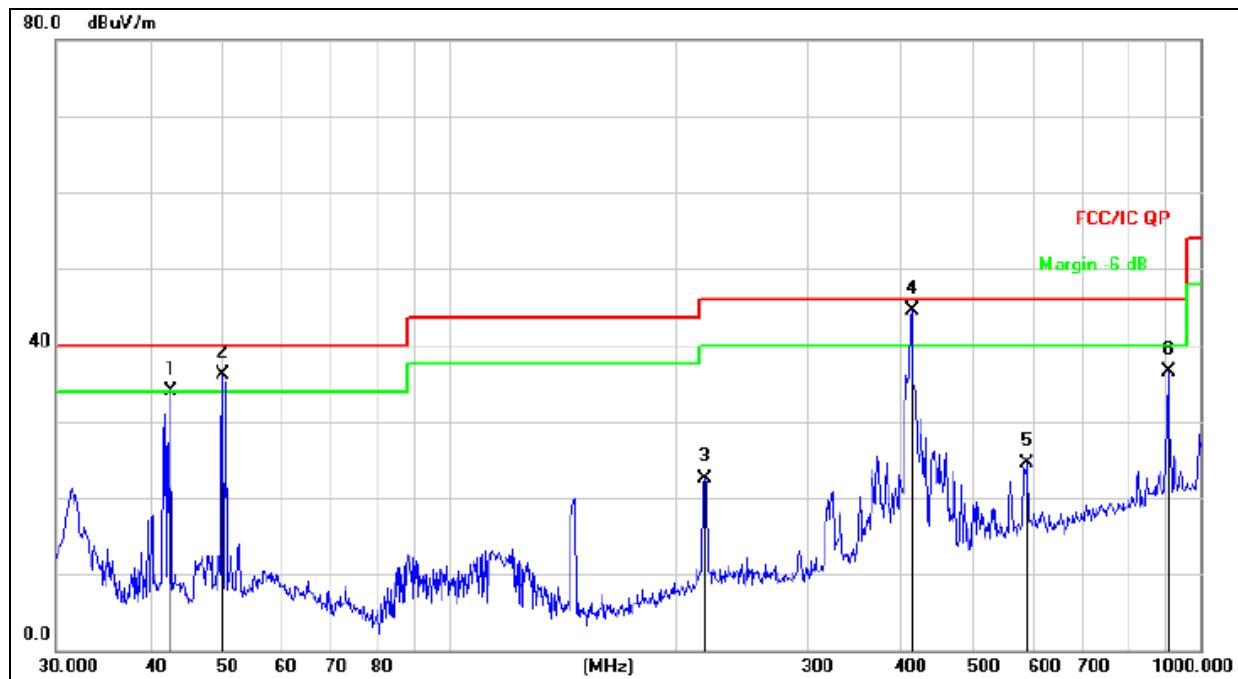

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
1		42.6000	49.24	-15.26	33.98	40.00	-6.02 QP
2	!	50.0566	50.99	-14.86	36.13	40.00	-3.87 QP
3		219.0752	38.33	-15.86	22.47	46.00	-23.53 QP
4	*	413.2706	55.26	-10.79	44.47	46.00	-1.53 QP
5		588.9050	31.28	-6.78	24.50	46.00	-21.50 QP
6		906.4823	38.02	-1.45	36.57	46.00	-9.43 QP



3.2.8 TEST RESULTS (1GHz-40GHz)

Test Mode : TX(5.2G)

Polar	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G									
Vertical	4434.157	62.26	5.94	35.40	44.00	59.6	74.00	-14.4	Pk
Vertical	4434.157	46.53	5.94	35.40	44.00	43.87	54.00	-10.13	AV
Vertical	10380.362	60.44	8.46	39.75	44.50	64.15	74.00	-9.85	Pk
Vertical	10380.362	42.93	8.46	39.75	44.50	46.64	54.00	-7.36	AV
Vertical	15570.196	61.43	10.12	38.80	44.10	66.25	74.00	-7.75	Pk
Vertical	15570.196	37.53	10.12	38.80	42.70	43.75	54.00	-10.25	AV
Horizontal	4434.521	66.59	5.94	35.18	44.00	63.71	74.00	-10.29	Pk
Horizontal	4434.521	44.11	5.94	35.18	44.00	41.23	54.00	-12.77	AV
Horizontal	10380.362	58.96	8.46	38.71	44.50	61.63	74.00	-12.37	Pk
Horizontal	10380.362	41.04	8.46	38.71	44.50	43.71	54.00	-10.29	AV
Horizontal	15570.196	56.98	10.12	38.38	44.10	61.38	74.00	-12.62	Pk
Horizontal	15570.196	38.82	10.12	38.38	44.10	43.22	54.00	-10.78	AV
High Channel (5230 MHz)-Above 1G									
Vertical	4739.246	61.29	7.10	37.24	43.50	62.13	74.00	-11.87	Pk
Vertical	4739.246	44.44	7.10	37.24	43.50	45.28	54.00	-8.72	AV
Vertical	10460.371	60.58	8.46	37.68	44.50	62.22	74.00	-11.78	Pk
Vertical	10460.371	40.32	8.46	37.68	44.50	41.96	54.00	-12.04	AV
Vertical	15690.359	61.78	10.12	38.8	44.10	66.6	74.00	-7.4	Pk
Vertical	15690.359	39.63	10.12	38.8	42.70	45.85	54.00	-8.15	AV
Horizontal	4739.352	62.28	7.10	37.24	43.50	63.12	74.00	-10.88	Pk
Horizontal	4739.352	43.22	7.10	37.24	43.50	44.06	54.00	-9.94	AV
Horizontal	10460.371	62.57	8.46	38.57	44.50	65.1	74.00	-8.9	Pk
Horizontal	10460.371	43.37	8.46	38.57	44.50	45.9	54.00	-8.1	AV
Horizontal	15690.359	60.72	10.12	38.38	44.10	65.12	74.00	-8.88	Pk
Horizontal	15690.359	42.23	10.12	38.38	44.10	46.63	54.00	-7.37	AV

Note: The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode : TX (5.8G)

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G									
Vertical	4679.195	59.95	5.94	35.40	44.00	57.29	74.00	-16.71	Pk
Vertical	4679.195	39.62	5.94	35.40	44.00	36.96	54.00	-17.04	AV
Vertical	11510.364	59.56	8.46	39.75	44.50	63.27	74.00	-10.73	Pk
Vertical	11510.364	42.13	8.46	39.75	44.50	45.84	54.00	-8.16	AV
Vertical	17265.101	55.57	10.12	38.80	44.10	60.39	74.00	-13.61	Pk
Vertical	17265.101	38.63	10.12	38.80	42.70	44.85	54.00	-9.15	AV
Horizontal	4679.332	57.97	5.94	35.18	44.00	55.09	74.00	-18.91	Pk
Horizontal	4679.332	44.52	5.94	35.18	44.00	41.64	54.00	-12.36	AV
Horizontal	11510.364	56.67	8.46	38.71	44.50	59.34	74.00	-14.66	Pk
Horizontal	11510.364	40.13	8.46	38.71	44.50	42.8	54.00	-11.2	AV
Horizontal	17265.101	58.68	10.12	38.38	44.10	63.08	74.00	-10.92	Pk
Horizontal	17265.101	42.25	10.12	38.38	44.10	46.65	54.00	-7.35	AV
High Channel (5795 MHz)-Above 1G									
Vertical	6039.199	57.68	7.10	37.24	43.50	58.52	74.00	-15.48	Pk
Vertical	6039.199	42.23	7.10	37.24	43.50	43.07	54.00	-10.93	AV
Vertical	11590.562	58.98	8.46	37.68	44.50	60.62	74.00	-13.38	Pk
Vertical	11590.562	41.14	8.46	37.68	44.50	42.78	54.00	-11.22	AV
Vertical	17385.128	58.58	10.12	38.8	44.10	63.4	74.00	-10.6	Pk
Vertical	17385.128	40.33	10.12	38.8	42.70	46.55	54.00	-7.45	AV
Horizontal	6039.232	59.98	7.10	37.24	43.50	60.82	74.00	-13.18	Pk
Horizontal	6039.232	43.33	7.10	37.24	43.50	44.17	54.00	-9.83	AV
Horizontal	11590.562	52.23	8.46	38.57	44.50	54.76	74.00	-19.24	Pk
Horizontal	11590.562	40.14	8.46	38.57	44.50	42.67	54.00	-11.33	AV
Horizontal	17385.128	57.77	10.12	38.38	44.10	62.17	74.00	-11.83	Pk
Horizontal	17385.128	40.33	10.12	38.38	44.10	44.73	54.00	-9.27	AV

Note: The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



4.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set RBW $\geq 1/T$, where T is defined in section II.B.I.a).
- b) Set VBW ≥ 3 RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

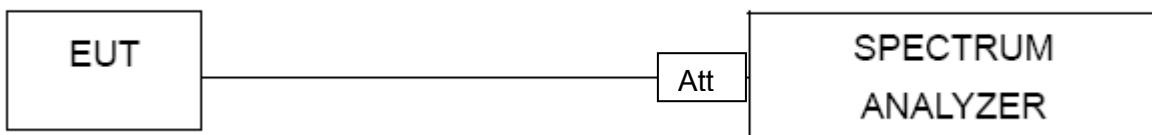

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



4.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 14.8V
Test Mode :	TX		

Antenna A gain: 2dBi, Antenna B gain: 2dBi, Directional gain=[10log(GA+ G B)] dbi =5.01dbi

Frequency	Measured Power Density (dBm)			Limit (dBm)	Result
	ANT A	ANT B	Total		
5190 MHz	11.454	10.741	14.12	17	PASS
5230 MHz	11.430	10.548	14.02	17	PASS




ANT1 PSD plot on channel 01




ANT2 PSD plot on channel 01



ANT1 PSD plot on channel 02

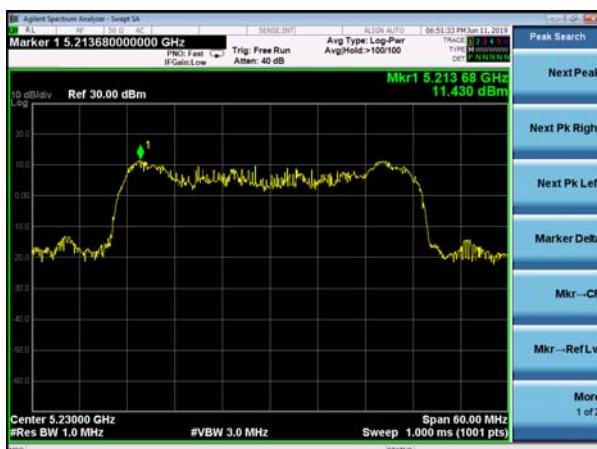

ANT2 PSD plot on channel 02

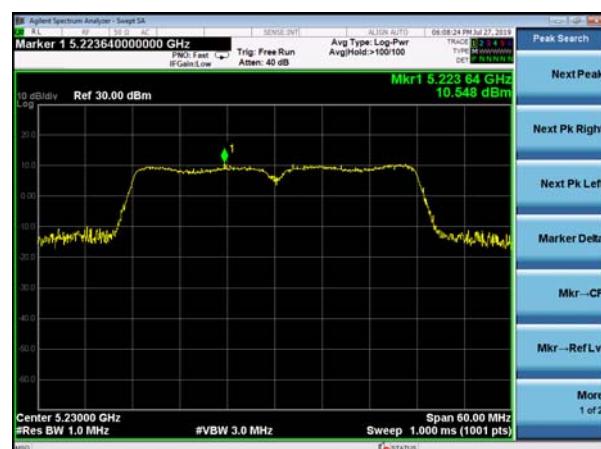



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 14.8V
Test Mode :	TX		


Antenna A gain: 2dBi, Antenna B gain: 2dBi, Directional gain=[10log(GA+ G B)] dbi =5.01dbi

Frequency	Measured Power			Limit (dBm)	Result		
	Density (dBm)						
	ANT A	ANT B	Total				
5755 MHz	2.237	3.048	5.67	30	PASS		
5795 MHz	2.604	3.276	5.96	30	PASS		

ANT1 PSD plot on channel 03




ANT2 PSD plot on channel 03

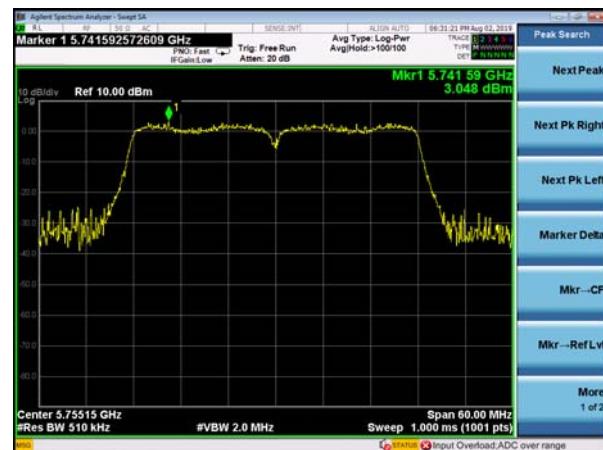

ANT1 PSD plot on channel 04



ANT2 PSD plot on channel 04

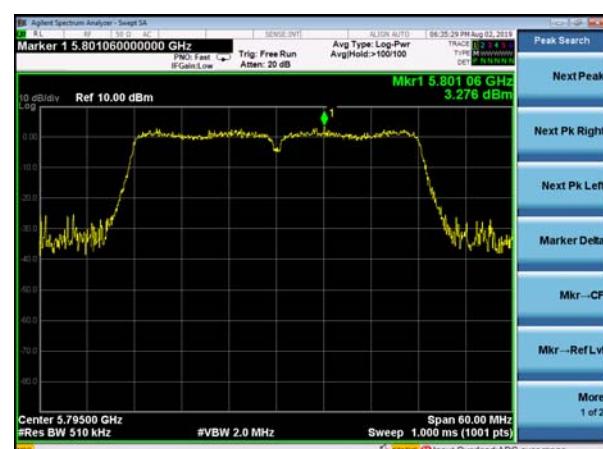



5. 6DB & 99% EMISSION BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

5.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

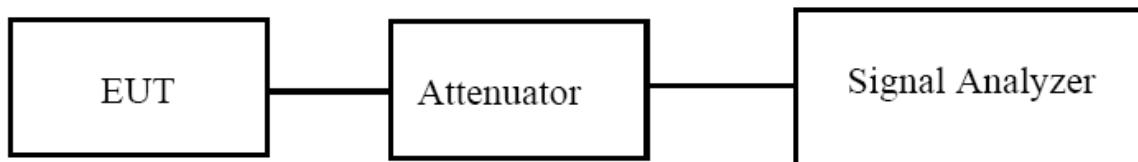



5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.4 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 14.8V
Test Mode :	TX		


Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Limit MHz	Result
		ANT A	ANT A		
CH 01	5190	36.972	35.41	≥500	Pass
CH 02	5230	36.953	35.45	≥500	Pass

Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Limit MHz	Result
		ANT B	ANT B		
CH 01	5190	36.206	35.28	≥500	Pass
CH 02	5230	36.172	36.31	≥500	Pass




Test plot


ANT1 6dB&99%Bandwidth plot on channel 01

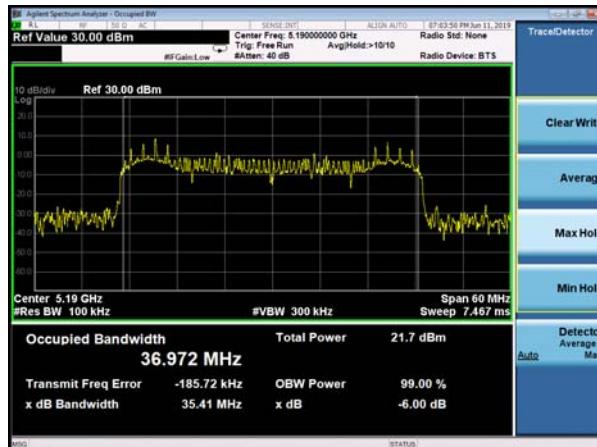


ANT2 6dB&99%Bandwidth plot on channel 01

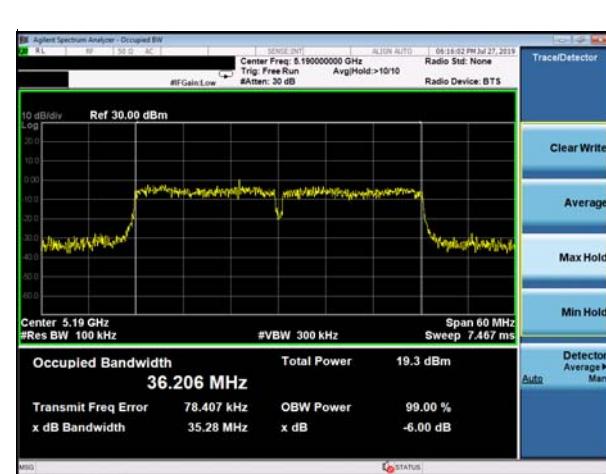

ANT1 6dB&99%Bandwidth plot on channel 02

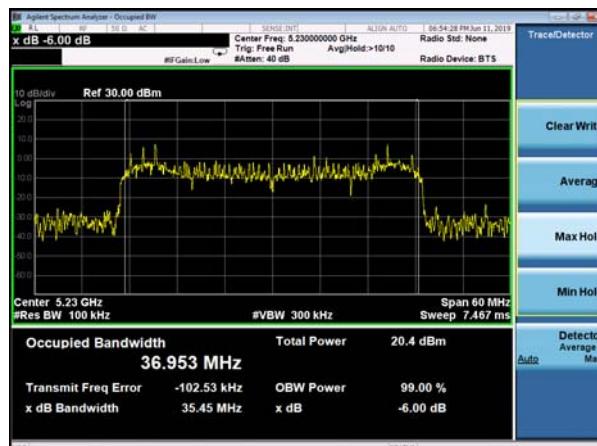

ANT2 6dB&99%Bandwidth plot on channel 02

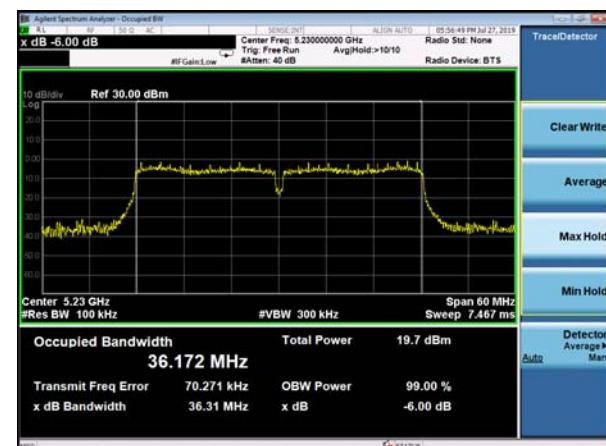



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 14.8V
Test Mode :	TX		


Channel	Frequency (MHz)	99%	6dB bandwidth (MHz)	Limit MHz	Result
		bandwidth(MHz)	ANT A		
CH03	5755	36.158	36.32	≥500	Pass
CH04	5795	36.099	36.33	≥500	≥500

Channel	Frequency (MHz)	99%	6dB bandwidth (MHz)	Limit MHz	Result
		bandwidth(MHz)	ANT B		
CH03	5755	36.117	36.29	≥500	Pass
CH04	5795	36.123	36.34	≥500	Pass




Test plot


ANT1 6dB&99%Bandwidth plot on channel 03

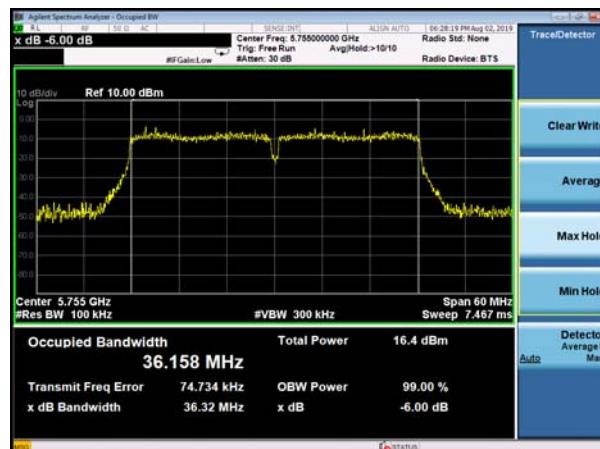


ANT2 6dB&99%Bandwidth plot on channel 03

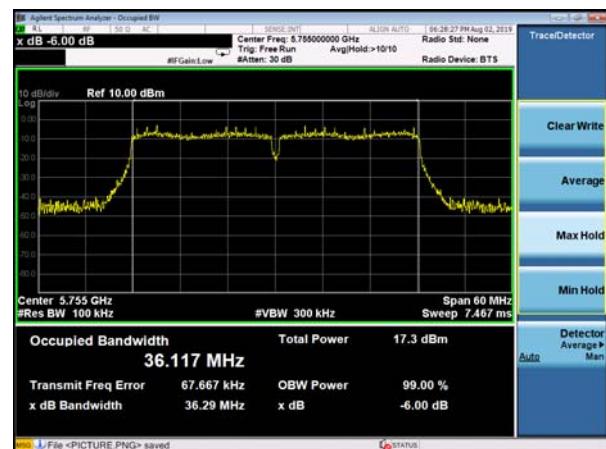

ANT1 6dB&99%Bandwidth plot on channel 04

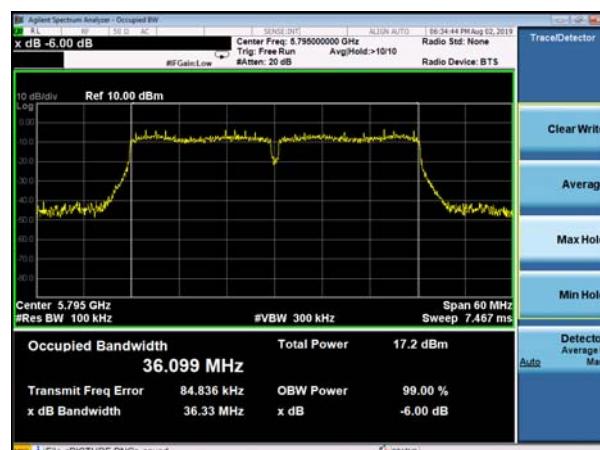

ANT2 (6dB&99%Bandwidth plot on channel 04

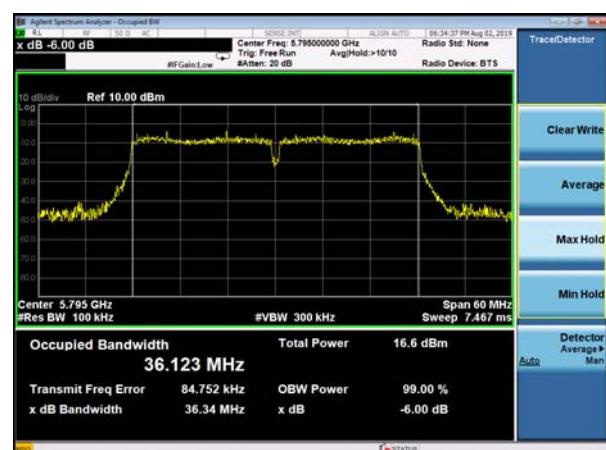



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

The maximum e.i.r.p should not exceed:

Frequency Band(MHz)	Limit
5150~5250	200mW or 10dBm +10logB whichever is less
5725~5850	N/A

Note: Where "B" is the 99% emission bandwidth in MHz

6.2 TEST PROCEDURE

· Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).



a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle \geq 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW \geq 3 MHz.

(iv) Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle $<$ 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum



6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 14.8V
Test Mode :	TX		

Antenna A gain: 2dBi, Antenna B gain: 2dBi, Directional gain=[10log(GA+ G B)] dbi =5.01dbi

Test Channel	Frequency (MHz)	Maximum output power. Antenna port (PK)		Total Power (PK) dBm	LIMIT dBm	Result
		ANT A(dBm)	ANT B(dBm)			
CH01	5190	15.214	14.124	17.71	23.98	Pass
CH02	5230	15.080	15.403	18.25	23.98	Pass



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 14.8V
Test Mode :	TX		

Antenna A gain: 2dBi, Antenna B gain: 2dBi, Directional gain=[10log(GA+ G B)] dbi =5.01dbi

Test Channel	Frequency (MHz)	Maximum output power. Antenna port (PK)		Total Power (PK) dBm	LIMIT dBm	Result
		ANT A(dBm)	ANT B(dBm)			
CH 03	5755	13.125	13.176	16.16	30	Pass
CH 04	5795	13.162	13.105	16.14	30	Pass



7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

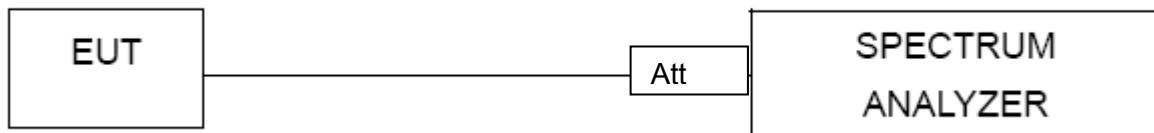

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 14.8V

5.15~5.25 GHz

ANT1 Band Edge, Left Side



ANT2 Band Edge, Left Side



ANT1 Band Edge, Right Side




ANT2 Band Edge, Right Side





5.75~5.85 GHz

ANT1 Band Edge, Left Side

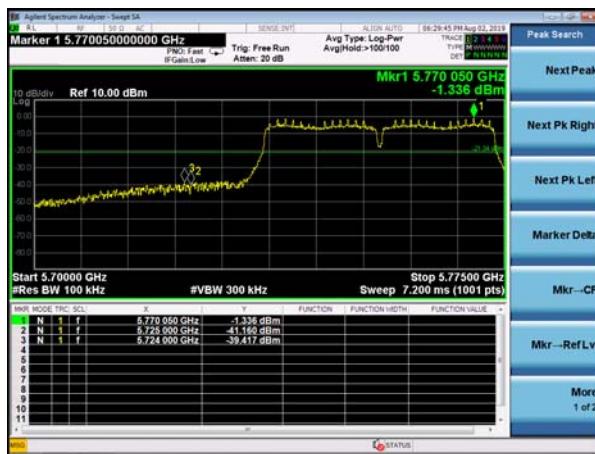

ANT2 Band Edge, Left Side



ANT1 Band Edge, Right Side



ANT2 Band Edge, Right Side





8.SPURIOUS RF CONDUCTED EMISSIONS

8.1 CONFORMANCE LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

8.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

8.3 TEST SETUP

Please refer to Section 6.1 of this test report.

8.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 9KHz to 26.5GHz.


8.5 TEST RESULTS

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.




ANT1 Test Plot


Channel 01

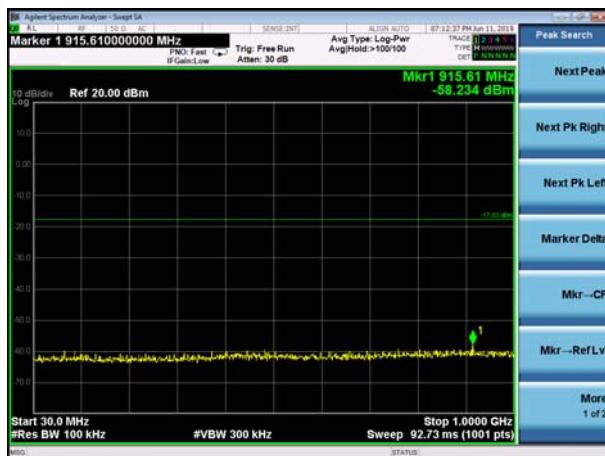


Channel 02

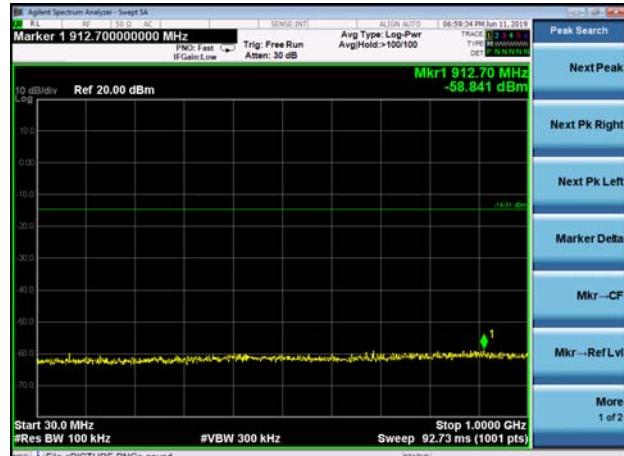

Channel 01

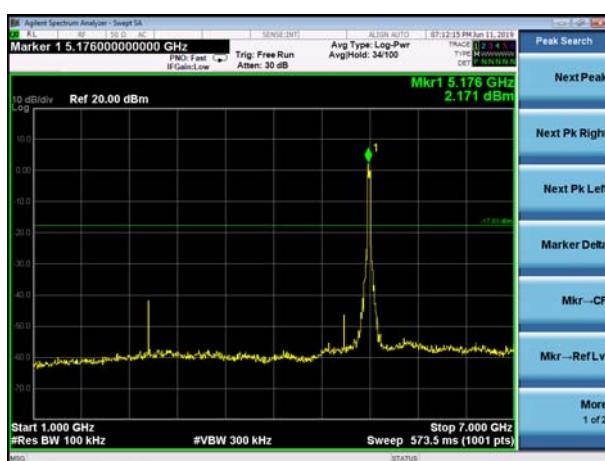

Channel 02

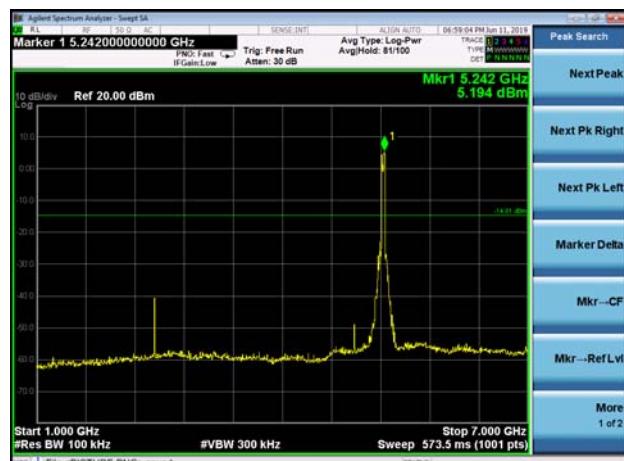

Channel 01




Channel 02






ANT2 Test Plot


Channel 01

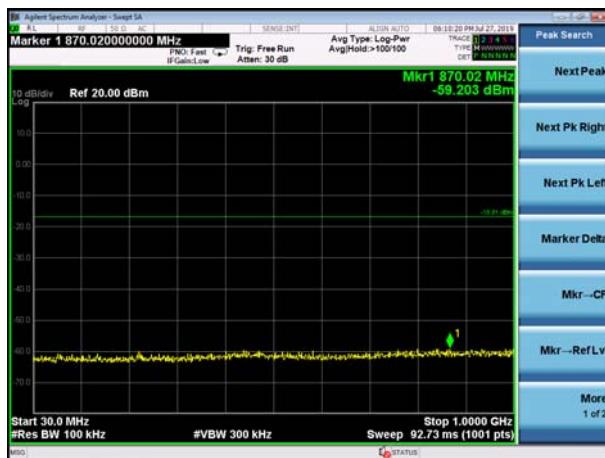


Channel 02

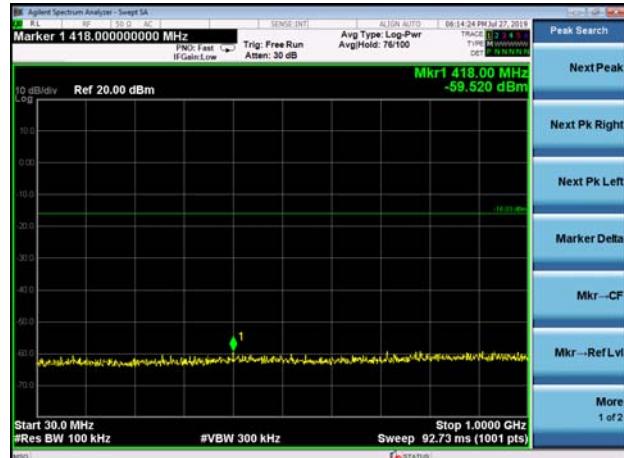

Channel 01

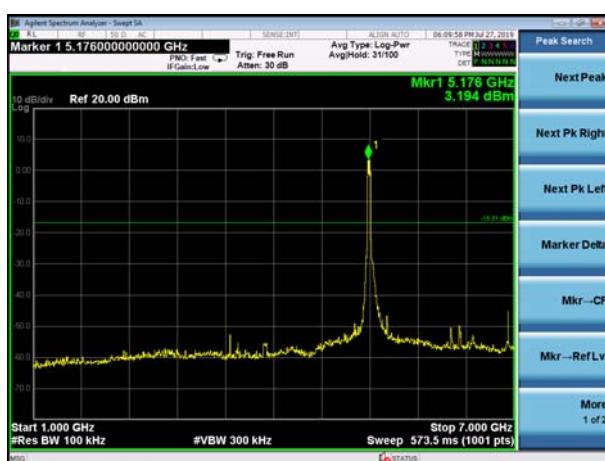

Channel 02

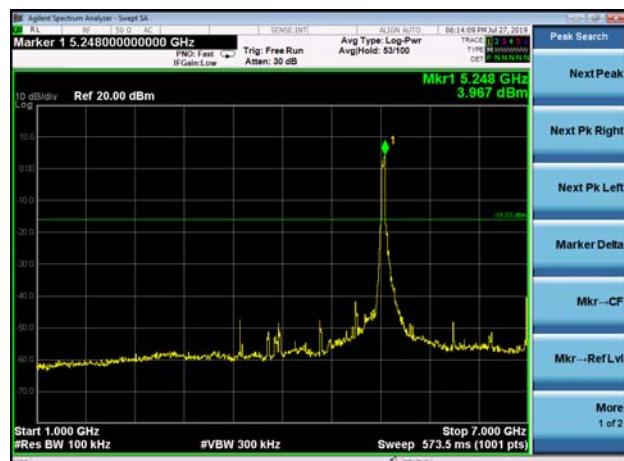

Channel 01




Channel 02






ANT1 Test Plot


Channel 03

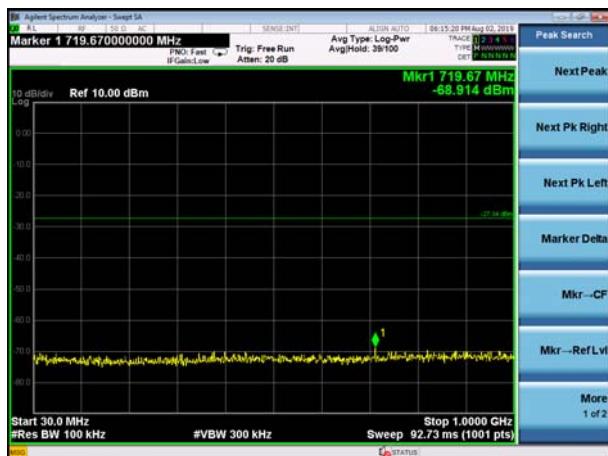

Channel 04

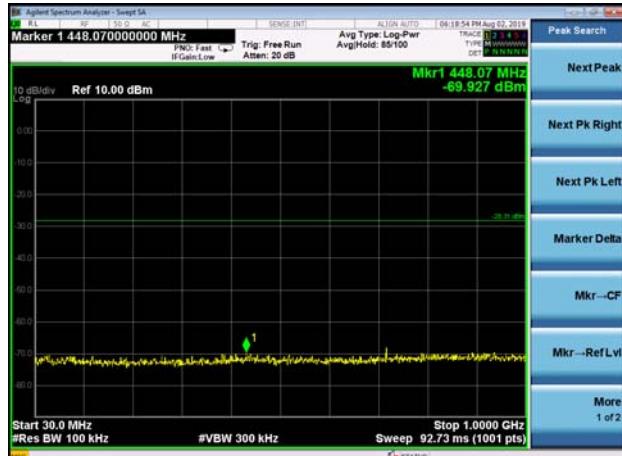

Channel 03

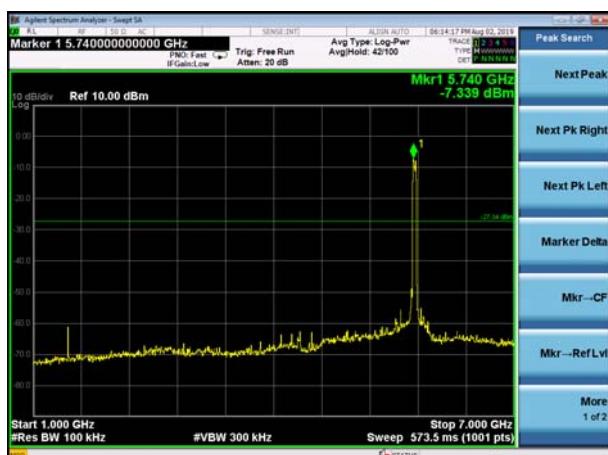

Channel 04



Channel 03




Channel 04





ANT2 Test Plot

Channel 03

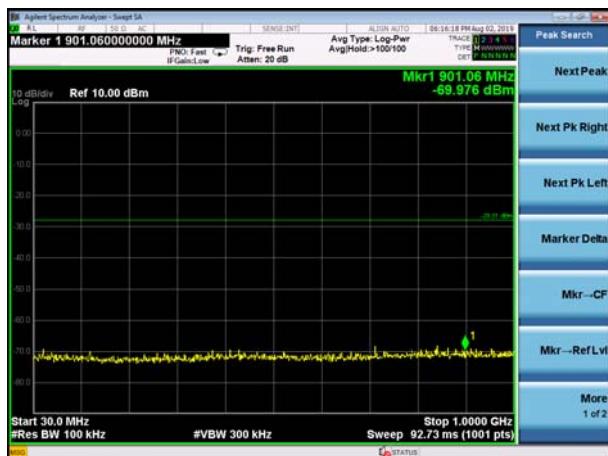

Channel 04



Channel 03



Channel 04



Channel 03



Channel 04





9. Frequency Stability Measurement

9.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band

9.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 10^6$ ppm and the limit is less than ± 20 ppm
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

9.3 TEST SETUP LAYOUT

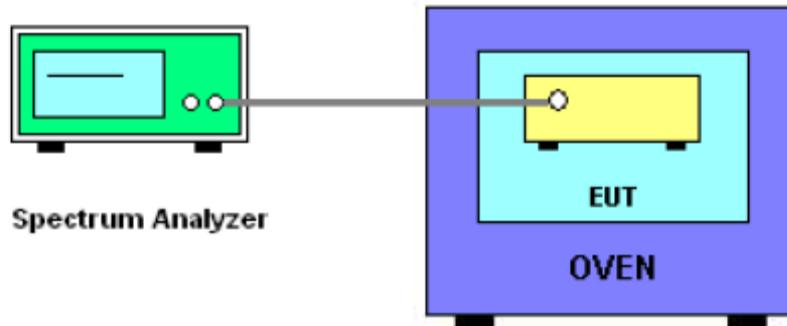

9.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.



9.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 14.8V
Test Mode :	TX Frequency(5190-5230MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS			Reference Frequency: 5190MHz				
			f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
T nom (°C)	20	V nom (V)	14.80	5190.0522	5190	0.0522	-10.0578
		V max (V)	17.02	5190.0328	5190	0.0328	-6.3198
		V min (V)	12.58	5190.0241	5190	0.0241	-4.6435
Limits			± 20 ppm				
Result			Complies				

Temperature vs. Frequency Stability

TEST CONDITIONS			Reference Frequency: 5190MHz				
			f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
V nom (V)	14.8	T (°C)	-20	5190.0056	5190	0.0056	-1.0790
		T (°C)	-10	5190.0103	5190	0.0103	-1.9846
		T (°C)	0	5190.0329	5190	0.0329	-6.3391
		T (°C)	10	5190.0382	5190	0.0382	-7.3603
		T (°C)	20	5190.0292	5190	0.0292	-5.6262
		T (°C)	30	5190.0211	5190	0.0211	-4.0655
		T (°C)	40	5190.0128	5190	0.0128	-2.4663
		T (°C)	50	5190.0091	5190	0.0091	-1.7534
		T (°C)	60	5190.0415	5190	0.0415	-7.9961
		T (°C)	70	5190.0690	5190	0.0690	-13.2948
Limits			± 20 ppm				
Result			Complies				



Voltage vs. Frequency Stability

TEST CONDITIONS			Reference Frequency: 5230MHz				
			f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
T nom (°C)	20	V nom (V)	14.80	5230.0254	5230	0.0254	-4.8566
		V max (V)	17.02	5230.0427	5230	0.0427	-8.1644
		V min (V)	12.58	5230.0699	5230	0.0699	-13.3652
Limits			± 20 ppm				
Result			Complies				

Temperature vs. Frequency Stability

TEST CONDITIONS			Reference Frequency: 5230MHz				
			f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
V nom (V)	14.8	T (°C)	-20	5230.0631	5230	0.0631	-12.0650
		T (°C)	-10	5230.0527	5230	0.0527	-10.0765
		T (°C)	0	5230.0433	5230	0.0433	-8.2792
		T (°C)	10	5230.0926	5230	0.0926	-17.7055
		T (°C)	20	5230.0631	5230	0.0631	-12.0650
		T (°C)	30	5230.0128	5230	0.0128	-2.4474
		T (°C)	40	5230.0732	5230	0.0732	-13.9962
		T (°C)	50	5230.0418	5230	0.0418	-7.9924
		T (°C)	60	5230.0321	5230	0.0321	-6.1377
		T (°C)	70	5230.0421	5230	0.0421	-8.0497
Limits			± 20 ppm				
Result			Complies				



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 14.8V
Test Mode :	TX Frequency(5755-5795MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS			Reference Frequency: 5755MHz				
			f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
T nom (°C)	20	V nom (V)	14.80	5755.0138	5755	0.0138	-2.3979
		V max (V)	17.02	5755.0412	5755	0.0412	-7.1590
		V min (V)	12.58	5755.0093	5755	0.0093	-1.6160
Limits			± 20 ppm				
Result			Complies				

Temperature vs. Frequency Stability

TEST CONDITIONS			Reference Frequency: 5755MHz				
			f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
V nom (V)	14.8	T (°C)	-20	5755.0094	5755	0.0094	-1.6334
		T (°C)	-10	5755.0032	5755	0.0032	-0.5560
		T (°C)	0	5755.0145	5755	0.0145	-2.5195
		T (°C)	10	5755.0851	5755	0.0851	-14.7871
		T (°C)	20	5755.0116	5755	0.0116	-2.0156
		T (°C)	30	5755.0124	5755	0.0124	-2.1546
		T (°C)	40	5755.0067	5755	0.0067	-1.1642
		T (°C)	50	5755.0079	5755	0.0079	-1.3727
		T (°C)	60	5755.0052	5755	0.0052	-0.9036
		T (°C)	70	5755.0103	5755	0.0103	-1.7897
Limits			± 20 ppm				
Result			Complies				



Voltage vs. Frequency Stability

TEST CONDITIONS			Reference Frequency: 5795MHz				
			f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
T nom (°C)	20	V nom (V)	14.80	5795.01030	5795	0.01030	-1.7774
		V max (V)	17.02	5795.00117	5795	0.00117	-0.2013
		V min (V)	12.58	5795.01105	5795	0.01105	-1.9067
Limits			± 20 ppm				
Result			Complies				

Temperature vs. Frequency Stability

TEST CONDITIONS			Reference Frequency: 5795MHz				
			f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)	
V nom (V)	14.8	T (°C)	-20	5795.00671	5795	0.00671	-1.1578
		T (°C)	-10	5795.00901	5795	0.00901	-1.5546
		T (°C)	0	5795.01331	5795	0.01331	-2.2975
		T (°C)	10	5795.00504	5795	0.00504	-0.8705
		T (°C)	20	5795.00133	5795	0.00133	-0.2295
		T (°C)	30	5795.00228	5795	0.00228	-0.3935
		T (°C)	40	5795.00102	5795	0.00102	-0.1767
		T (°C)	50	5795.00470	5795	0.00470	-0.8107
		T (°C)	60	5795.00887	5795	0.00887	-1.5312
		T (°C)	70	5795.00362	5795	0.00362	-0.6243
Limits			± 20 ppm				
Result			Complies				



10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


10.2 EUT ANTENNA


The EUT antenna is R-SMA antenna. It comply with the standard requirement.



11. EUT TEST PHOTO

Radiated Measurement Photos

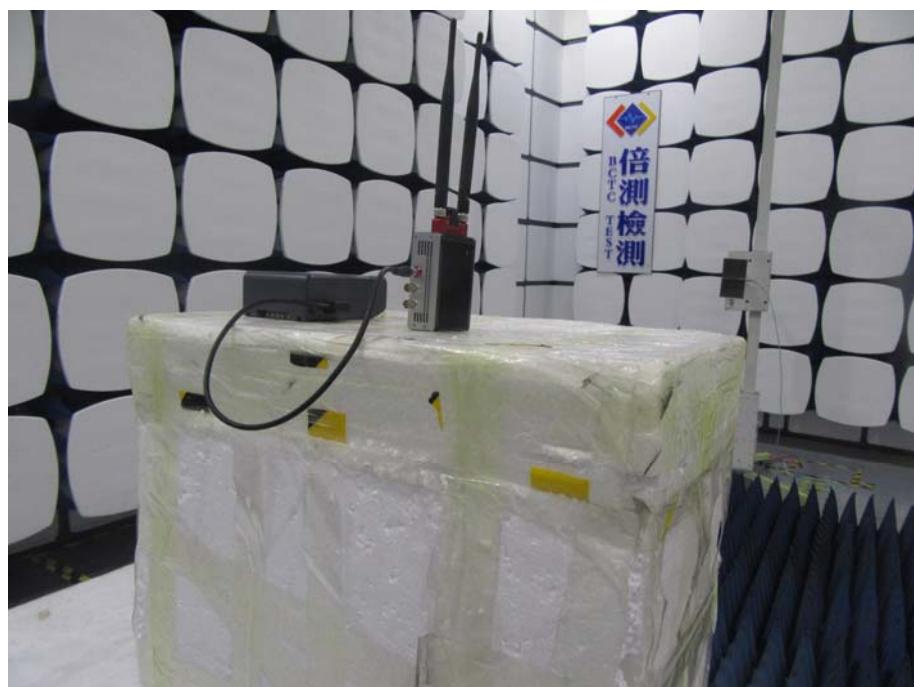

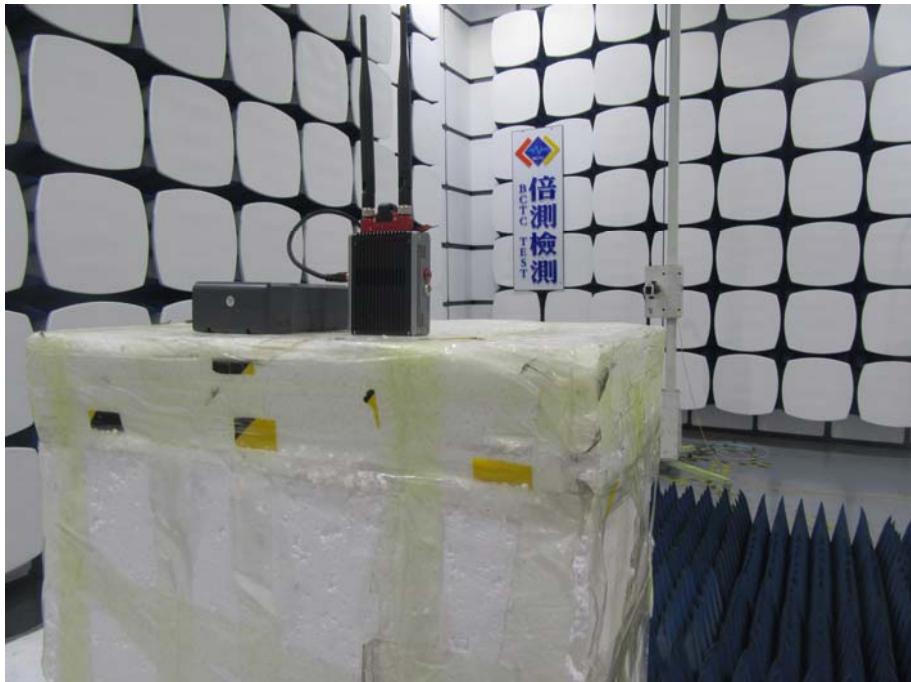



12. EUT PHOTO



***** END OF REPORT *****