



# FCC RF Test Report

**APPLICANT** : Xiaomi Communications Co., Ltd.  
**EQUIPMENT** : Mobile Phone  
**BRAND NAME** : MI  
**FCC ID** : 2AFZZ-RSG138  
**STANDARD** : 47 CFR Part 2, 22(H), 27(L), 27(M)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Dec. 14, 2016 and completely tested on Feb. 04, 2017. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



TABLE OF CONTENTS

REVISION HISTORY.....3
SUMMARY OF TEST RESULT .....4
1 GENERAL DESCRIPTION .....5
1.1 Applicant .....5
1.2 Manufacturer .....5
1.3 Product Feature of Equipment Under Test.....5
1.4 Product Specification of Equipment Under Test.....6
1.5 Ancillary Equipment Used During the Test.....6
1.6 Modification of EUT .....6
1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....7
1.8 Testing Location .....8
1.9 Applicable Standards.....8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....9
2.1 Test Mode .....9
2.2 Connection Diagram of Test System .....11
2.3 Support Unit used in test configuration and system .....12
2.4 Measurement Results Explanation Example.....12
2.5 Frequency List of Low/Middle/High Channels .....13
3 CONDUCTED TEST ITEMS .....15
3.1 Measuring Instruments .....15
3.2 Test Setup .....15
3.3 Test Result of Conducted Test .....15
3.4 Conducted Output Power and ERP/EIRP .....16
3.5 Peak-to-Average Ratio .....17
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....18
3.7 Conducted Band Edge .....19
3.8 Conducted Spurious Emission .....21
3.9 Frequency Stability .....22
4 RADIATED TEST ITEMS .....23
4.1 Measuring Instruments .....23
4.2 Test Setup .....23
4.3 Test Result of Radiated Test .....23
4.4 Radiated Spurious Emission .....24
5 LIST OF MEASURING EQUIPMENT .....25
6 UNCERTAINTY OF EVALUATION .....27
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS





**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 7)( Band 38)	EIRP < 2Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	PASS	-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	99% Occupied Bandwidth and 26dB Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §27.53(h)	Conducted Band Edge Measurement (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7) (Band 38)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §27.53(h)	Conducted Spurious Emission (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7) (Band 38)	< 55+10log <sub>10</sub> (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm	PASS	-
	§2.1055 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §27.53(h)	Radiated Spurious Emission (Band 4) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 27.93 dB at 7584.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7) (Band 38)	< 55+10log <sub>10</sub> (P[Watts])		



# 1 General Description

## 1.1 Applicant

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO. 68, Qinghe Middle Street, Haidian District, Beijing, China

## 1.2 Manufacturer

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO. 68, Qinghe Middle Street, Haidian District, Beijing, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	MI
FCC ID	2AFZZ-RSG138
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+ (16QAM uplink is not supported)/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/Bluetooth v4.1 LE
IMEI Code	Conducted: 863674030024408/863674030024416 for LTE Band 4 / 5 / 7 863674030024820/863674030024838 for LTE Band 38 Radiation: 863674030023442/863674030023459 for LTE Band 4 / 5 863674030022907/863674030022915 for LTE Band 7 863674030025405/863674030025413 for LTE Band 38
HW Version	A
SW Version	MIUI 8
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz
<b>Rx Frequency</b>	LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz
<b>Bandwidth</b>	LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz
<b>Maximum Output Power to Antenna</b>	LTE Band 4 : 23.18 dBm LTE Band 5 : 22.96 dBm LTE Band 7 : 23.95 dBm LTE Band 38 : 23.37 dBm
<b>Antenna Gain</b>	LTE Band 4 : -0.25 dBi LTE Band 5 : -3.80 dBi LTE Band 7 : -0.82 dBi LTE Band 38 : -1.50 dBi
<b>Type of Modulation</b>	QPSK / 16QAM

## 1.5 Ancillary Equipment Used During the Test

Specification of Accessory				
<b>AC Adapter</b>	<b>Brand Name</b>	MI	<b>Model Name</b>	MDY-08-EZ
	<b>Power Rating</b>	I/P: 100 - 240 Vac, 350 mA, O/P: 5 Vdc, 1.2 - 2 A		
<b>Battery</b>	<b>Brand Name</b>	MI	<b>Model Name</b>	BM47
	<b>Power Rating</b>	0.385 Vdc, 4000 mAh	<b>Type</b>	Li-ion
<b>USB Cable</b>	<b>Brand Name</b>	MI	<b>Model Name</b>	KLC-2468
	<b>Signal Line Type</b>	0.8m shielded cable without core		
<b>Car Charger</b>	<b>Brand Name</b>	Xiaomi	<b>Model Name</b>	CZCDQ01ZM
	<b>Power Rating</b>	I/P: 12 - 24 Vac O/P: 5 Vdc, 2.4 A x2 (Max 3.6A)		
<b>Earphone</b>	<b>Brand Name</b>	Xiaomi	<b>Model Name</b>	QTER01JY
	<b>Signal Line Type</b>	1.25m unshielded cable without core		
<b>Bluetooth Earphone</b>	<b>Brand Name</b>	Xiaomi	<b>Model Name</b>	LYEJ02LM

## 1.6 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.7 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M10G7D	-	0.1879	1M10W7D	-	0.1483
3	1711.5 ~ 1753.5	2M72G7D	-	0.1837	2M73W7D	-	0.1496
5	1712.5 ~ 1752.5	4M50G7D	-	0.1884	4M51W7D	-	0.1374
10	1715.0 ~ 1750.0	9M03G7D	0.0028	0.1811	9M05W7D	-	0.1452
15	1717.5 ~ 1747.5	13M4G7D	-	0.1888	13M4W7D	-	0.1596
20	1720.0 ~ 1745.0	18M4G7D	-	0.1963	18M4W7D	-	0.1560
LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M09G7D	-	0.0499	1M09W7D	-	0.0412
3	825.5 ~ 847.5	2M73G7D	-	0.0502	2M73W7D	-	0.0369
5	826.5 ~ 846.5	4M49G7D	-	0.0499	4M50W7D	-	0.0382
10	829.0 ~ 844.0	9M11G7D	0.0026	0.0491	9M05W7D	-	0.0369
LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M50G7D	-	0.2056	4M49W7D	-	0.1535
10	2505.0 ~ 2565.0	9M05G7D	0.0015	0.1972	9M05W7D	-	0.1462
15	2507.5 ~ 2562.5	13M5G7D	-	0.1959	13M5W7D	-	0.1560
20	2510.0 ~ 2560.0	18M4G7D	-	0.2042	18M5W7D	-	0.1435
LTE Band 38		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2572.5 ~ 2617.5	4M51G7D	-	0.1476	4M50W7D	-	0.1211
10	2575.0 ~ 2615.0	9M07G7D	0.0008	0.1493	9M01W7D	-	0.1127
15	2577.5 ~ 2612.5	13M5G7D	-	0.1538	13M4W7D	-	0.1208
20	2580.0 ~ 2610.0	18M5G7D	-	0.1493	18M4W7D	-	0.1127



### 1.8 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	TH01-KS	03CH02-KS	418269
		03CH03-KS	306251

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 27(L), 27(M)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.


Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	4	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	5	Y	Y	Y	Y	-	-	Y	Y	Y	Y	Y	Y	Y	Y
	7	-	-	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	38	-	-	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Peak-to-Average Ratio	4						Y	Y	Y	Y		Y	Y	Y	Y
	5				Y	-	-	Y	Y	Y		Y	Y	Y	Y
	7	-	-				Y	Y	Y	Y		Y	Y	Y	Y
	38	-	-				Y	Y	Y	Y		Y	Y	Y	Y
26dB and 99% Bandwidth	4	Y	Y	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
	5	Y	Y	Y	Y	-	-	Y	Y			Y	Y	Y	Y
	7	-	-	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
	38	-	-	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
Conducted Band Edge	4	Y	Y	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y
	5	Y	Y	Y	Y	-	-	Y	Y	Y		Y	Y		Y
	7	-	-	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y
	38	-	-	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y




Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	4	√	√	√	√	√	√	√	√	√			√	√	√
	5	√	√	√	√	-	-	√	√	√			√	√	√
	7	-	-	√	√	√	√	√	√	√			√	√	√
	38	-	-	√	√	√	√	√	√	√			√	√	√
Frequency Stability	4				√			√				√		√	
	5				√	-	-	√				√		√	
	7	-	-		√			√				√		√	
	38	-	-		√			√				√		√	
E.R.P/ E.I.R.P.	4	√	√	√	√	√	√	√	√	√			√	√	√
	5	√	√	√	√	-	-	√	√	√			√	√	√
	7	-	-	√	√	√	√	√	√	√			√	√	√
	38	-	-	√	√	√	√	√	√	√			√	√	√
Radiated Spurious Emission	4	√	√	√	√	√	√	√		√				√	
	5	√	√	√	√	-	-	√		√				√	
	7	-	-	√	√	√	√	√		√				√	
	38	-	-	√	√	√	√	√		√				√	
Note	<p>1. The mark "√" means that this configuration is chosen for testing</p> <p>2. The mark "-" means that this bandwidth is not supported.</p> <p>3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</p>														

## 2.2 Connection Diagram of Test System

### LTE Band 4 / 5 / 38

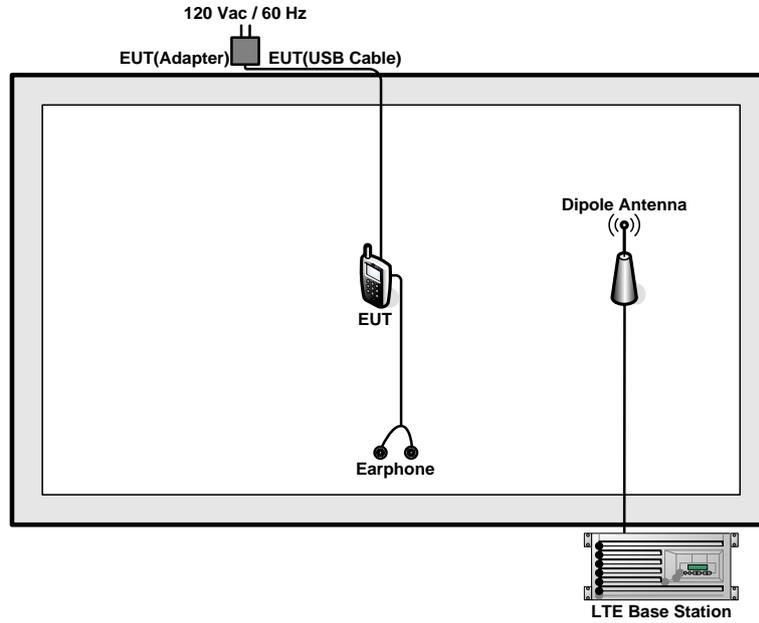

### LTE Band 7

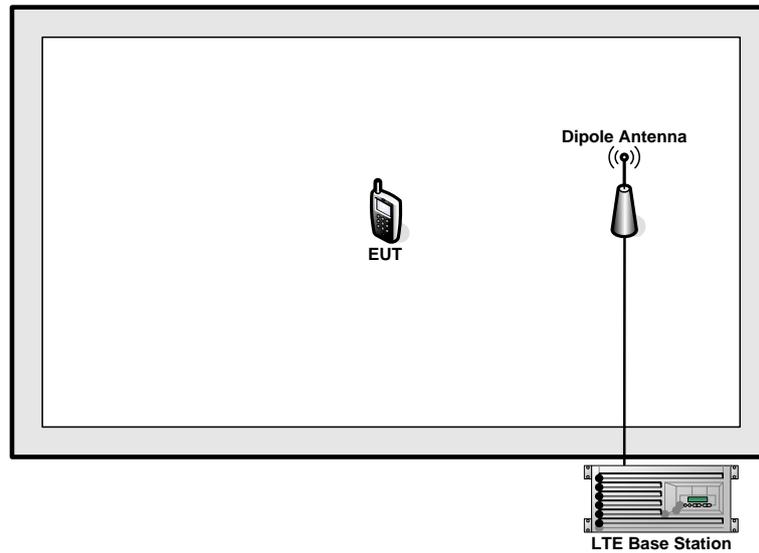



### 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

### 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 4.8 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 4.8 \text{ (dB)} \end{aligned}$$



## 2.5 Frequency List of Low/Middle/High Channels

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3



LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

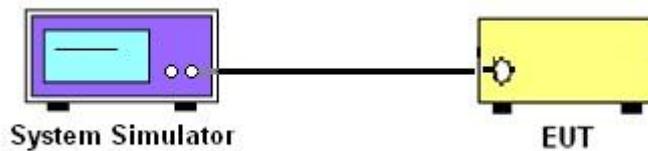

##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

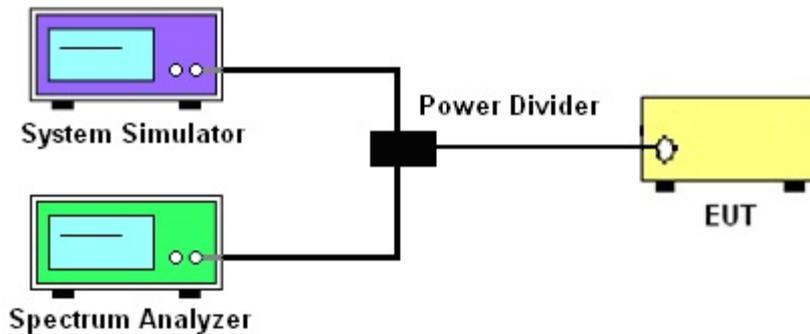

##### 3.2.3 Frequency Stability

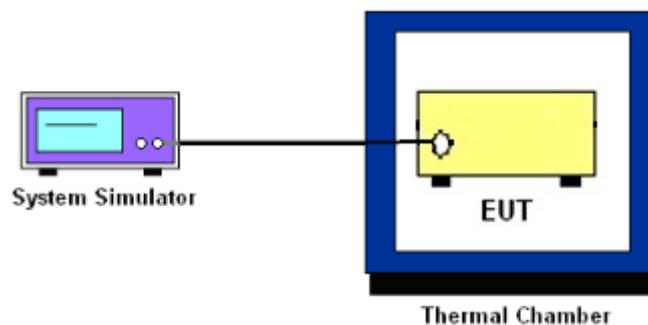

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



### 3.4 Conducted Output Power and ERP/EIRP

#### 3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The EIRP of mobile transmitters must not exceed 2 Watts for Band 7 and Band 38.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



### 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



### 3.7 Conducted Band Edge

#### 3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



### 3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
= P(W)- [43 + 10log(P)] (dB)  
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.

9. For LTE Band 7, 38, the other 40 dB, and 55 dB have additionally applied same calculation above.



### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7, 38:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$ dBm.
11. For Band 7, 38  
The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [55 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[55 + 10\log(P)]$  (dB)  
 $= -25$ dBm.



### 3.9 Frequency Stability

#### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

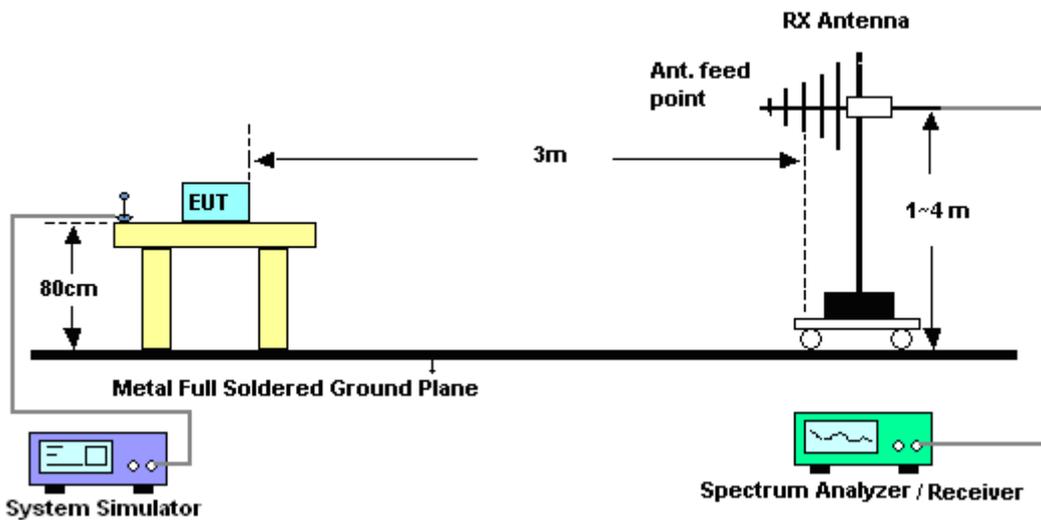

#### 4.2.2 For radiated test above 1GHz

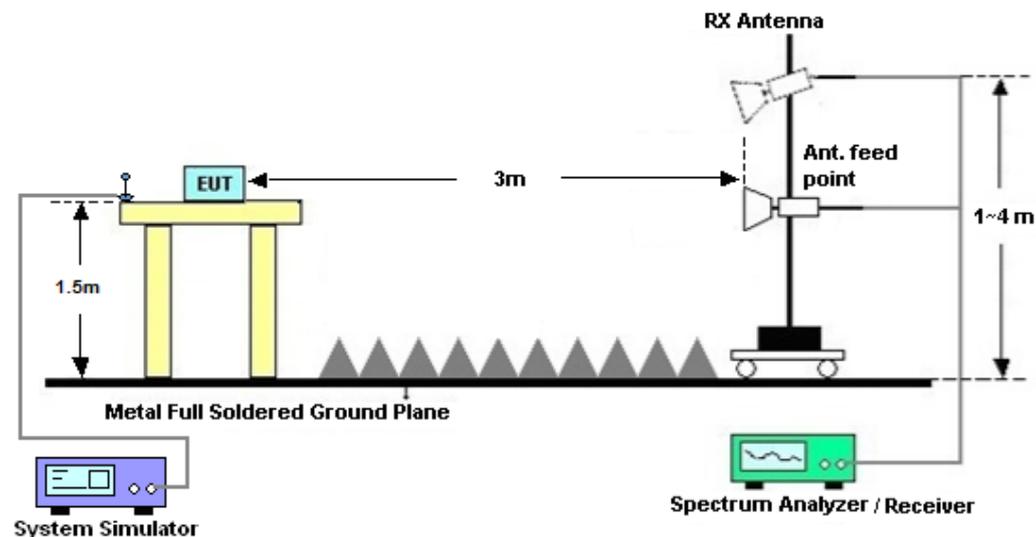

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7, 38

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

13. For Band 7, 38:

The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$   
 $ERP \text{ (dBm)} = EIRP - 2.15$



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Jan. 10, 2017~ Feb. 04, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Radio Communicatio	Anritsu	MT8820C	6201300652	2G/3G/4G/ CDMA	Aug. 08, 2016	Jan. 10, 2017~ Feb. 04, 2017	Aug. 07, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Jan. 10, 2017~ Feb. 04, 2017	Oct. 12, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 09, 2016	Jan. 11, 2017	Aug. 08, 2017	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz, MAX 30dB	Apr. 22, 2016	Jan. 11, 2017	Apr. 21, 2017	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Aug. 20, 2016	Jan. 11, 2017	Aug. 19, 2017	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 22, 2016	Jan. 11, 2017	Oct. 21, 2017	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 03, 2016	Jan. 11, 2017	Mar. 02, 2017	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	Apr. 22, 2016	Jan. 11, 2017	Apr. 21, 2017	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1	1943529	1GHz~18GHz	Jan. 20, 2016	Jan. 11, 2017	Jan. 19, 2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1~26.5GHz Gain 30dB	Oct. 13, 2016	Jan. 11, 2017	Oct. 12, 2017	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35 -HG	1887435	18GHz~40GHz	Jan. 20, 2016	Jan. 11, 2017	Jan. 19, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jan. 11, 2017	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 11, 2017	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 11, 2017	NCR	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Jan. 11, 2017~ Feb. 04, 2017	Apr. 21, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Jan. 11, 2017~ Feb. 04, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Jan. 11, 2017~ Feb. 04, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 03, 2016	Jan. 11, 2017~ Feb. 04, 2017	Mar. 02, 2017	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Jan. 11, 2017~ Feb. 04, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1	1889560	100MHz~18GHz	Aug. 09, 2016	Jan. 11, 2017~ Feb. 04, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Jan. 11, 2017~ Feb. 04, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35 -HG	1887435	18GHz~40GHz	Oct. 13, 2016	Jan. 11, 2017~ Feb. 04, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 11, 2017~ Feb. 04, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 11, 2017~ Feb. 04, 2017	NCR	Radiation (03CH03-KS)



Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 11, 2017~ Feb. 04, 2017	NCR	Radiation (03CH03-KS)
--------------	---------	-----------	----------	---------	-----	---------------------------------	-----	--------------------------

NCR: No Calibration Required



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) for 03CH02-KS

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz) for 03CH02-KS

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5dB
---	-------

### Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz) for 03CH02-KS

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (25 MHz ~ 1000 MHz) for 03CH03-KS

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz) for 03CH03-KS

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.3dB
---	-------



## **Appendix A. Test Results of Conducted Test**

### **Conducted Output Power(Average power)**



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.03	23.18	23.05
20	1	49		22.68	22.78	22.90
20	1	99		22.50	22.81	22.52
20	50	0		21.82	21.92	21.85
20	50	24		21.77	21.58	21.79
20	50	50		21.78	21.59	21.71
20	100	0		21.72	21.78	21.76
20	1	0	16-QAM	22.18	21.24	21.65
20	1	49		21.75	21.49	21.80
20	1	99		21.63	21.31	20.91
20	50	0		20.68	21.08	20.78
20	50	24		20.81	20.72	20.76
20	50	50		20.66	20.63	20.82
20	100	0		20.76	20.72	20.81
15	1	0	QPSK	23.01	22.58	22.91
15	1	37		22.92	22.97	22.52
15	1	74		22.93	22.51	22.71
15	36	0		21.76	21.86	21.69
15	36	20		21.89	21.87	21.60
15	36	39		21.84	21.87	21.61
15	75	0		21.80	21.91	21.68
15	1	0	16-QAM	21.75	21.67	21.20
15	1	37		21.23	21.31	21.33
15	1	74		21.57	22.28	20.88
15	36	0		20.87	20.85	20.84
15	36	20		20.82	20.82	20.75
15	36	39		20.90	20.80	20.77
15	75	0		20.85	20.79	20.74



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.83	22.62	22.66
10	1	25		22.61	22.58	22.66
10	1	49		22.62	22.66	22.68
10	25	0		21.82	21.86	21.69
10	25	12		21.77	21.83	21.67
10	25	25		21.82	21.74	21.64
10	50	0		21.77	21.83	21.61
10	1	0	16-QAM	21.47	21.57	21.87
10	1	25		21.33	21.76	21.49
10	1	49		21.59	21.52	21.32
10	25	0		20.87	20.96	20.76
10	25	12		21.03	20.87	20.74
10	25	25		20.78	20.83	20.52
10	50	0		20.82	20.92	20.68
5	1	0	QPSK	22.48	22.60	22.42
5	1	12		23.00	22.87	22.80
5	1	24		22.56	22.58	22.65
5	12	0		21.85	21.88	21.59
5	12	7		21.76	21.87	21.66
5	12	13		21.73	21.83	21.73
5	25	0		21.92	21.80	21.61
5	1	0	16-QAM	21.51	21.57	21.47
5	1	12		21.24	21.58	21.15
5	1	24		21.27	21.49	21.63
5	12	0		20.74	20.80	20.63
5	12	7		20.72	20.75	20.63
5	12	13		20.69	20.80	20.71
5	25	0		20.95	20.83	20.54



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.89	22.73	22.43
3	1	8		22.58	22.72	22.57
3	1	14		22.64	22.78	22.60
3	8	0		21.79	21.77	21.49
3	8	4		21.77	21.82	21.58
3	8	7		21.67	21.77	21.57
3	15	0		21.77	21.74	21.46
3	1	0	16-QAM	21.68	22.00	21.33
3	1	8		21.43	21.77	21.30
3	1	14		21.65	21.97	21.39
3	8	0		20.63	20.61	20.39
3	8	4		20.92	20.68	20.71
3	8	7		20.68	20.62	20.85
3	15	0		20.62	20.82	20.44
1.4	1	0	QPSK	22.59	22.73	22.44
1.4	1	3		22.80	22.71	22.72
1.4	1	5		22.49	22.64	22.62
1.4	3	0		22.93	22.87	22.73
1.4	3	1		22.90	22.99	22.70
1.4	3	3		22.84	22.69	22.78
1.4	6	0		21.75	21.75	21.58
1.4	1	0	16-QAM	21.72	21.79	21.44
1.4	1	3		21.60	21.74	21.57
1.4	1	5		21.67	21.58	21.56
1.4	3	0		21.82	21.52	21.93
1.4	3	1		21.78	21.79	21.96
1.4	3	3		21.91	21.86	21.95
1.4	6	0		20.68	20.69	20.53



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.54	22.43	22.68
10	1	25		22.72	22.86	22.67
10	1	49		22.73	22.53	22.53
10	25	0		21.83	21.85	21.84
10	25	12		21.83	21.80	21.78
10	25	25		21.81	21.77	21.77
10	50	0		21.79	21.83	21.78
10	1	0	16-QAM	21.54	21.55	21.50
10	1	25		21.61	21.50	21.55
10	1	49		21.45	21.62	21.46
10	25	0		21.10	20.86	20.84
10	25	12		21.11	20.80	21.04
10	25	25		20.87	20.83	20.83
10	50	0		20.88	20.77	20.85
5	1	0	QPSK	22.39	22.57	22.32
5	1	12		22.93	22.91	22.89
5	1	24		22.44	22.46	22.45
5	12	0		21.85	21.79	21.79
5	12	7		21.80	21.81	21.81
5	12	13		21.87	21.76	21.73
5	25	0		21.80	21.77	21.71
5	1	0	16-QAM	21.49	21.49	21.35
5	1	12		21.57	21.77	21.45
5	1	24		21.50	21.49	21.47
5	12	0		20.85	20.77	20.73
5	12	7		20.87	20.79	20.74
5	12	13		20.84	20.83	20.81
5	25	0		20.88	20.75	20.90



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.87	22.57	22.57
3	1	8		22.96	22.76	22.80
3	1	14		22.71	22.71	22.47
3	8	0		21.84	21.83	21.88
3	8	4		21.85	21.82	21.86
3	8	7		21.82	21.78	21.83
3	15	0		21.84	21.76	21.77
3	1	0	16-QAM	21.37	21.28	21.62
3	1	8		21.53	21.46	21.59
3	1	14		21.42	21.42	21.45
3	8	0		20.87	20.95	20.85
3	8	4		20.94	20.77	20.78
3	8	7		20.95	20.90	20.92
3	15	0		20.87	20.84	20.76
1.4	1	0	QPSK	22.54	22.75	22.65
1.4	1	3		22.85	22.83	22.61
1.4	1	5		22.84	22.73	22.56
1.4	3	0		22.81	22.78	22.93
1.4	3	1		22.90	22.93	22.78
1.4	3	3		22.85	22.90	22.83
1.4	6	0		21.86	21.76	21.84
1.4	1	0	16-QAM	21.63	21.60	21.68
1.4	1	3		21.65	21.54	21.65
1.4	1	5		21.94	21.52	21.44
1.4	3	0		22.06	21.75	21.67
1.4	3	1		22.02	21.82	21.81
1.4	3	3		22.10	21.84	21.78
1.4	6	0		20.90	20.71	20.63



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.92	22.84	22.98
20	1	49		23.70	23.92	23.82
20	1	99		23.13	23.18	23.04
20	50	0		22.35	22.45	22.43
20	50	24		22.42	22.55	22.46
20	50	50		22.27	22.54	22.44
20	100	0		22.35	22.52	22.42
20	1	0	16-QAM	22.10	22.12	21.69
20	1	49		22.16	22.39	22.24
20	1	99		22.11	22.24	22.22
20	50	0		21.41	21.62	21.54
20	50	24		21.34	21.63	21.51
20	50	50		21.34	21.64	21.52
20	100	0		21.42	21.48	21.57
15	1	0	QPSK	23.19	23.53	23.45
15	1	37		23.66	23.74	23.70
15	1	74		23.35	23.46	23.50
15	36	0		22.33	22.55	22.43
15	36	20		22.43	22.52	22.48
15	36	39		22.41	22.58	22.47
15	75	0		22.42	22.56	22.47
15	1	0	16-QAM	22.23	22.53	22.23
15	1	37		22.14	22.75	22.50
15	1	74		22.23	22.26	22.34
15	36	0		21.32	21.52	21.49
15	36	20		21.39	21.60	21.56
15	36	39		21.45	21.67	21.54
15	75	0		21.48	21.65	21.59



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.01	23.31	23.26
10	1	25		23.62	23.64	23.77
10	1	49		23.06	23.21	23.29
10	25	0		22.44	22.57	22.48
10	25	12		22.38	22.56	22.52
10	25	25		22.36	22.60	22.45
10	50	0		22.36	22.59	22.51
10	1	0	16-QAM	22.08	22.47	22.22
10	1	25		22.12	22.35	22.23
10	1	49		22.15	21.96	22.30
10	25	0		21.42	21.52	21.65
10	25	12		21.36	21.77	21.81
10	25	25		21.62	21.81	21.53
10	50	0		21.43	21.66	21.60
5	1	0	QPSK	23.05	23.46	23.05
5	1	12		23.68	23.95	23.53
5	1	24		23.14	23.35	23.13
5	12	0		22.29	22.47	22.46
5	12	7		22.41	22.58	22.44
5	12	13		22.37	22.49	22.43
5	25	0		22.39	22.50	22.45
5	1	0	16-QAM	22.06	22.34	22.19
5	1	12		22.14	22.68	22.27
5	1	24		22.05	22.32	22.14
5	12	0		21.45	21.46	21.33
5	12	7		21.43	21.46	21.61
5	12	13		21.31	21.71	21.50
5	25	0		21.18	21.55	21.33



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.14	23.24	23.18
20	1	49		23.05	23.11	23.07
20	1	99		23.13	23.03	22.98
20	50	0		22.16	22.17	22.12
20	50	24		22.15	22.11	22.07
20	50	50		22.07	22.03	22.07
20	100	0		22.01	22.23	22.09
20	1	0	16-QAM	22.02	21.38	21.33
20	1	49		21.91	21.92	21.86
20	1	99		21.88	21.68	21.67
20	50	0		21.22	21.17	21.05
20	50	24		21.23	21.25	21.28
20	50	50		21.31	21.08	21.22
20	100	0		21.20	21.05	21.04
15	1	0	QPSK	23.10	23.10	23.05
15	1	37		23.37	23.27	23.30
15	1	74		23.13	22.91	22.93
15	36	0		22.14	22.12	22.09
15	36	20		22.15	22.09	22.15
15	36	39		22.09	21.98	22.10
15	75	0		22.13	22.01	21.97
15	1	0	16-QAM	21.84	21.88	21.77
15	1	37		22.32	22.27	22.10
15	1	74		21.83	21.53	21.49
15	36	0		21.03	21.28	21.07
15	36	20		21.40	21.17	21.24
15	36	39		21.46	21.18	21.23
15	75	0		21.17	21.13	21.38



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.11	23.14	23.20
10	1	25		23.01	23.24	23.05
10	1	49		23.13	23.14	22.93
10	25	0		22.21	22.03	21.83
10	25	12		22.06	22.12	21.89
10	25	25		22.12	22.01	22.08
10	50	0		22.26	22.14	21.86
10	1	0	16-QAM	21.58	21.59	21.83
10	1	25		22.02	21.83	21.57
10	1	49		21.61	21.32	21.38
10	25	0		21.15	21.35	21.29
10	25	12		21.36	21.41	21.21
10	25	25		21.32	21.23	21.22
10	50	0		21.19	21.02	21.01
5	1	0	QPSK	22.99	22.93	22.67
5	1	12		23.19	23.17	23.10
5	1	24		22.85	22.76	22.85
5	12	0		22.09	21.99	21.81
5	12	7		22.11	22.01	21.82
5	12	13		22.14	21.95	21.88
5	25	0		22.15	21.92	21.86
5	1	0	16-QAM	21.52	21.80	21.49
5	1	12		22.33	22.07	21.44
5	1	24		21.61	21.69	21.63
5	12	0		21.00	20.98	20.81
5	12	7		21.42	20.98	21.01
5	12	13		21.42	21.06	21.01
5	25	0		21.36	20.98	21.23



**ERP/EIRP**

LTE Band 4 (G <sub>T</sub> - L <sub>C</sub> = -0.25 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
(MHz)									
Conducted Power (dBm)	22.90	22.99	22.70	22.89	22.73	22.43	23.00	22.87	22.80
Conducted Power (Watts)	0.1950	0.1991	0.1862	0.1945	0.1875	0.1750	0.1995	0.1936	0.1905
EIRP(dBm)	22.65	22.74	22.45	22.64	22.48	22.18	22.75	22.62	22.55
EIRP(Watts)	0.1841	0.1879	0.1758	0.1837	0.1770	0.1652	0.1884	0.1828	0.1799

LTE Band 4 (G <sub>T</sub> - L <sub>C</sub> = -0.25 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
(MHz)									
Conducted Power (dBm)	22.83	22.62	22.66	23.01	22.58	22.91	23.03	23.18	23.05
Conducted Power (Watts)	0.1919	0.1828	0.1845	0.2000	0.1811	0.1954	0.2009	0.2080	0.2018
EIRP(dBm)	22.58	22.37	22.41	22.76	22.33	22.66	22.78	22.93	22.80
EIRP(Watts)	0.1811	0.1726	0.1742	0.1888	0.1710	0.1845	0.1897	0.1963	0.1905



LTE Band 4 (G <sub>T</sub> - L <sub>C</sub> = -0.25 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
Conducted Power (dBm)	21.78	21.79	21.96	21.68	22.00	21.33	21.27	21.49	21.63
Conducted Power (Watts)	0.1507	0.1510	0.1570	0.1472	0.1585	0.1358	0.1340	0.1409	0.1455
EIRP(dBm)	21.53	21.54	21.71	21.43	21.75	21.08	21.02	21.24	21.38
EIRP(Watts)	0.1422	0.1426	0.1483	0.1390	0.1496	0.1282	0.1265	0.1330	0.1374

LTE Band 4 (G <sub>T</sub> - L <sub>C</sub> = -0.25 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
Conducted Power (dBm)	21.47	21.57	21.87	21.57	22.28	20.88	22.18	21.24	21.65
Conducted Power (Watts)	0.1403	0.1435	0.1538	0.1435	0.1690	0.1225	0.1652	0.13	0.15
EIRP(dBm)	21.22	21.32	21.62	21.32	22.03	20.63	21.93	20.99	21.40
EIRP(Watts)	0.1324	0.1355	0.1452	0.1355	0.1596	0.1156	0.1560	0.1256	0.1380



LTE Band 5 ( $G_T - L_C = -3.80$ dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	22.81	22.78	22.93	22.96	22.76	22.80	22.93	22.91	22.89
Conducted Power (Watts)	0.1910	0.1897	0.1963	0.1977	0.1888	0.1905	0.1963	0.1954	0.1945
ERP(dBm)	16.86	16.83	16.98	17.01	16.81	16.85	16.98	16.96	16.94
ERP(Watts)	0.0485	0.0482	0.0499	0.0502	0.0480	0.0484	0.0499	0.0497	0.0494

LTE Band 5 ( $G_T - L_C = -3.80$ dB) QPSK			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency	829	836.5	844
(MHz)			
Conducted Power (dBm)	22.72	22.86	22.67
Conducted Power (Watts)	0.1871	0.1932	0.1849
ERP(dBm)	16.77	16.91	16.72
ERP(Watts)	0.0475	0.0491	0.0470



LTE Band 5 ( $G_T - L_C = -3.80$ dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	22.10	21.84	21.78	21.37	21.28	21.62	21.57	21.77	21.45
Conducted Power (Watts)	0.1622	0.1528	0.1507	0.1371	0.1343	0.1452	0.1435	0.1503	0.1396
ERP(dBm)	16.15	15.89	15.83	15.42	15.33	15.67	15.62	15.82	15.50
ERP(Watts)	0.0412	0.0388	0.0383	0.0348	0.0341	0.0369	0.0365	0.0382	0.0355

LTE Band 5 ( $G_T - L_C = -3.80$ dB) 16QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency	829	836.5	844
(MHz)			
Conducted Power (dBm)	21.45	21.62	21.46
Conducted Power (Watts)	0.1396	0.1452	0.1400
ERP(dBm)	15.50	15.67	15.51
ERP(Watts)	0.0355	0.0369	0.0356



LTE Band 7 (G <sub>T</sub> - L <sub>C</sub> = -0.82 dB) QPSK									
Bandwidth	5M			10M			15M		
Channel	20775	21100	21425	20800	21100	21400	20825	21100	21375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2502.5	2535	2567.5	2505	2535	2565	2507.5	2535	2562.5
Conducted Power (dBm)	23.68	23.95	23.53	23.62	23.64	23.77	23.66	23.74	23.70
Conducted Power (Watts)	0.2333	0.2483	0.2254	0.2301	0.2312	0.2382	0.2323	0.2366	0.2344
EIRP(dBm)	22.86	23.13	22.71	22.80	22.82	22.95	22.84	22.92	22.88
EIRP(Watts)	0.1932	0.2056	0.1866	0.1905	0.1914	0.1972	0.1923	0.1959	0.1941

LTE Band 7 (G <sub>T</sub> - L <sub>C</sub> = -0.82 dB) QPSK			
Bandwidth	20M		
Channel	20850	21100	21350
	(Low)	(Mid)	(High)
Frequency (MHz)	2510	2535	2560
Conducted Power (dBm)	23.70	23.92	23.82
Conducted Power (Watts)	0.2344	0.2466	0.2410
EIRP(dBm)	22.88	23.10	23.00
EIRP(Watts)	0.1941	0.2042	0.1995



LTE Band 7 ( $G_T - L_C = -0.82$ dB) 16QAM									
Bandwidth	5M			10M			15M		
Channel	20775	21100	21425	20800	21100	21400	20825	21100	21375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2502.5	2535	2567.5	2505	2535	2565	2507.5	2535	2562.5
Conducted Power (dBm)	22.14	22.68	22.27	22.08	22.47	22.22	22.14	22.75	22.50
Conducted Power (Watts)	0.1637	0.1854	0.1687	0.1614	0.1766	0.1667	0.1637	0.1884	0.1778
EIRP(dBm)	21.32	21.86	21.45	21.26	21.65	21.40	21.32	21.93	21.68
EIRP(Watts)	0.1355	0.1535	0.1396	0.1337	0.1462	0.1380	0.1355	0.1560	0.1472

LTE Band 7 ( $G_T - L_C = -0.82$ dB) 16QAM			
Bandwidth	20M		
Channel	20850	21100	21350
	(Low)	(Mid)	(High)
Frequency (MHz)	2510	2535	2560
Conducted Power (dBm)	22.16	22.39	22.24
Conducted Power (Watts)	0.1644	0.1734	0.1675
EIRP(dBm)	21.34	21.57	21.42
EIRP(Watts)	0.1361	0.1435	0.1387



LTE Band 38 ( $G_T - L_C = -1.50$ dB) QPSK									
Bandwidth	5M			10M			15M		
Channel	37775	38000	38225	37800	38000	38200	37825	38000	38175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2572.5	2595	2617.5	2575	2595	2615	2577.5	2595	2612.5
(MHz)									
Conducted Power (dBm)	23.19	23.17	23.10	23.01	23.24	23.05	23.37	23.27	23.30
Conducted Power (Watts)	0.2084	0.2075	0.2042	0.2000	0.2109	0.2018	0.2173	0.2123	0.2138
EIRP(dBm)	21.69	21.67	21.60	21.51	21.74	21.55	21.87	21.77	21.80
EIRP(Watts)	0.1476	0.1469	0.1445	0.1416	0.1493	0.1429	0.1538	0.1503	0.1514

LTE Band 38 ( $G_T - L_C = -1.50$ dB) QPSK			
Bandwidth	20M		
Channel	37850	38000	38150
	(Low)	(Mid)	(High)
Frequency	2580	2595	2610
(MHz)			
Conducted Power (dBm)	23.14	23.24	23.18
Conducted Power (Watts)	0.2061	0.2109	0.2080
EIRP(dBm)	21.64	21.74	21.68
EIRP(Watts)	0.1459	0.1493	0.1472



LTE Band 38 (G <sub>T</sub> - L <sub>C</sub> = -1.50 dB) 16QAM									
Bandwidth	5M			10M			15M		
Channel	37775	38000	38225	37800	38000	38200	37825	38000	38175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2572.5	2595	2617.5	2575	2595	2615	2577.5	2595	2612.5
(MHz)									
Conducted Power (dBm)	22.33	22.07	21.44	22.02	21.83	21.57	22.32	22.27	22.10
Conducted Power (Watts)	0.1710	0.1611	0.1393	0.1592	0.1524	0.1435	0.1706	0.1687	0.1622
EIRP(dBm)	20.83	20.57	19.94	20.52	20.33	20.07	20.82	20.77	20.60
EIRP(Watts)	0.1211	0.1140	0.0986	0.1127	0.1079	0.1016	0.1208	0.1194	0.1148

LTE Band 38 (G <sub>T</sub> - L <sub>C</sub> = -1.50 dB) 16QAM			
Bandwidth	20M		
Channel	37850	38000	38150
	(Low)	(Mid)	(High)
Frequency	2580	2595	2610
(MHz)			
Conducted Power (dBm)	22.02	21.38	21.33
Conducted Power (Watts)	0.1592	0.1374	0.1358
EIRP(dBm)	20.52	19.88	19.83
EIRP(Watts)	0.1127	0.0973	0.0962



### Peak-to-Average Ratio

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.70	4.61	5.45	5.68	PASS
Middle CH	3.57	4.26	4.49	5.33	
Highest CH	3.62	4.61	4.29	5.71	

Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.29	5.10	5.07	6.00	PASS
Middle CH	4.23	4.84	5.33	5.68	
Highest CH	4.29	4.70	5.01	5.68	


Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.94	4.26	4.84	5.04	PASS
Middle CH	3.33	4.29	4.12	5.25	
Highest CH	3.86	4.43	4.96	5.10	

Mode	LTE Band 38 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	6.14	5.57	5.25	5.71	PASS
Middle CH	4.96	5.65	5.22	5.51	
Highest CH	4.49	4.43	4.75	5.65	



LTE Band 4 / 20MHz / QPSK

Lowest Channel / 1RB

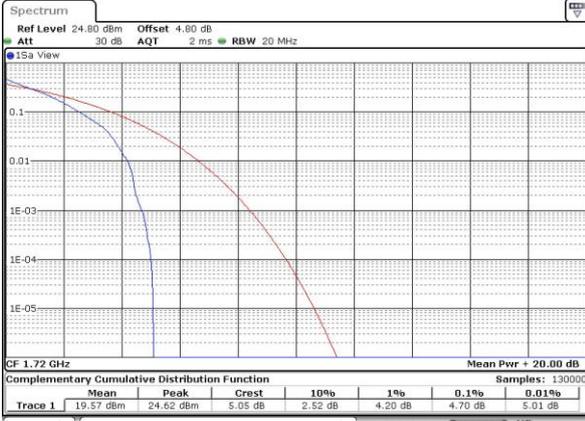

Date: 10 JAN 2017 12:01:34

Lowest Channel / Full RB




Date: 10 JAN 2017 12:01:22

Middle Channel / 1RB



Date: 10 JAN 2017 12:01:46

Middle Channel / Full RB

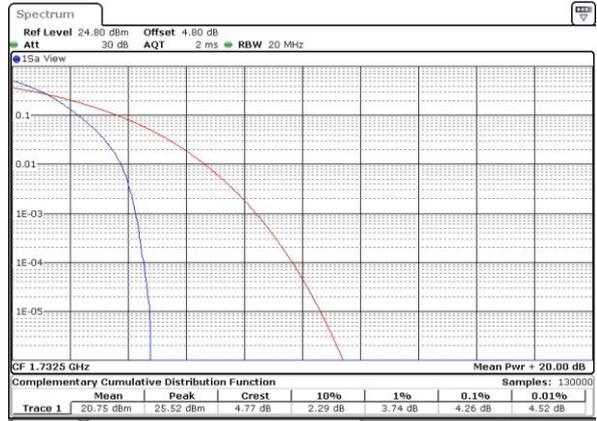

Date: 10 JAN 2017 12:01:57

Highest Channel / 1RB



Date: 10 JAN 2017 12:02:21

Highest Channel / Full RB



Date: 10 JAN 2017 12:02:09



LTE Band 4 / 20MHz / 16QAM

Lowest Channel / 1RB



Date: 10 JAN 2017 11:59:42

Lowest Channel / Full RB



Date: 10 JAN 2017 11:59:52

Middle Channel / 1RB



Date: 10 JAN 2017 12:00:11

Middle Channel / Full RB



Date: 10 JAN 2017 12:00:16

Highest Channel / 1RB



Date: 10 JAN 2017 12:00:29

Highest Channel / Full RB



Date: 10 JAN 2017 12:00:39



LTE Band 5 / 10MHz / QPSK

Lowest Channel / 1RB



Date: 10 JAN 2017 15:52:40

Lowest Channel / Full RB



Date: 10 JAN 2017 15:52:52

Middle Channel / 1RB



Date: 10 JAN 2017 15:53:15

Middle Channel / Full RB




Date: 10 JAN 2017 15:53:04

Highest Channel / 1RB



Date: 10 JAN 2017 15:53:27

Highest Channel / Full RB

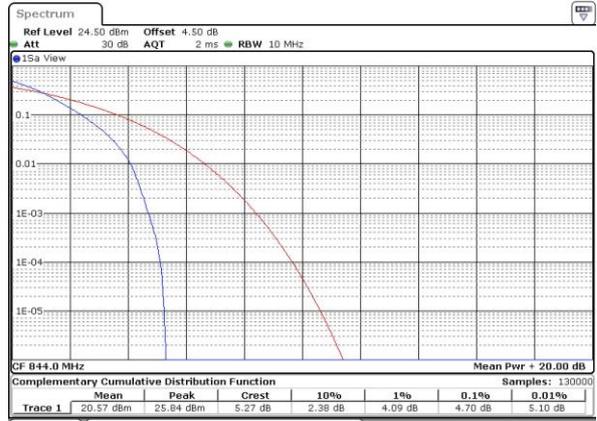

Date: 10 JAN 2017 15:53:39



LTE Band 5 / 10MHz / 16QAM

Lowest Channel / 1RB




Date: 10 JAN 2017 15:51:08

Lowest Channel / Full RB




Date: 10 JAN 2017 15:51:18

Middle Channel / 1RB

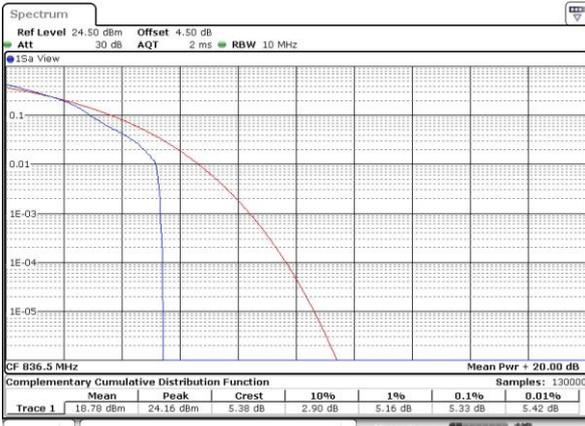

Date: 10 JAN 2017 15:51:27

Middle Channel / Full RB

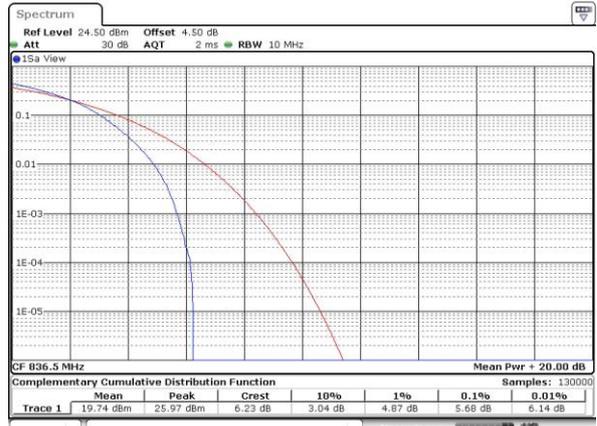

Date: 10 JAN 2017 15:51:36

Highest Channel / 1RB



Date: 10 JAN 2017 15:51:46

Highest Channel / Full RB



Date: 10 JAN 2017 15:51:55




LTE Band 7 / 20MHz / QPSK

Lowest Channel / 1RB



Date: 10 JAN 2017 18:47:53

Lowest Channel / Full RB

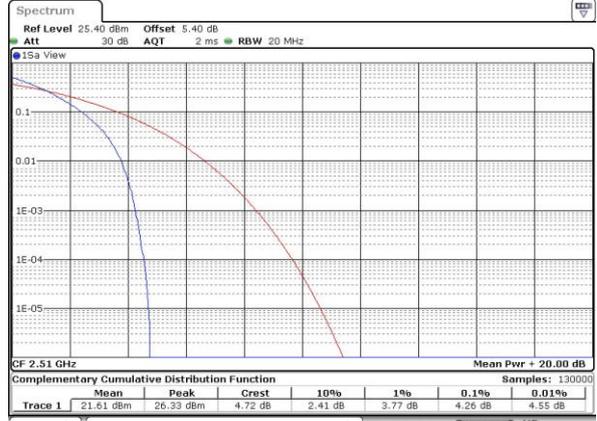

Date: 10 JAN 2017 18:48:03

Middle Channel / 1RB



Date: 10 JAN 2017 18:48:41

Middle Channel / Full RB



Date: 10 JAN 2017 18:48:31

Highest Channel / 1RB



Date: 10 JAN 2017 18:49:10

Highest Channel / Full RB



Date: 10 JAN 2017 18:49:44



LTE Band 7 / 20MHz / 16QAM

Lowest Channel / 1RB



Date: 10 JAN 2017 18:47:44

Lowest Channel / Full RB



Date: 10 JAN 2017 18:48:13

Middle Channel / 1RB



Date: 10 JAN 2017 18:48:50

Middle Channel / Full RB




Date: 10 JAN 2017 18:48:22

Highest Channel / 1RB



Date: 10 JAN 2017 18:49:00

Highest Channel / Full RB

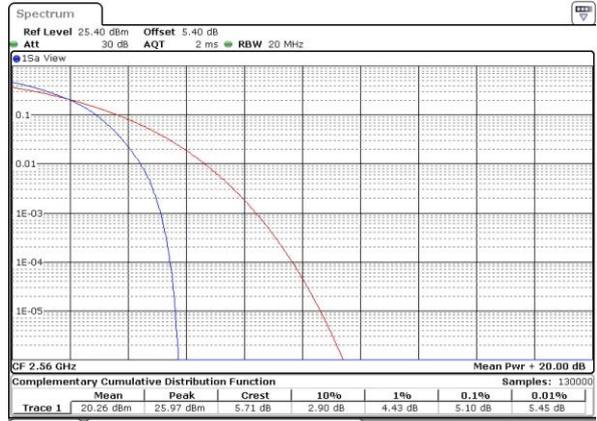


Date: 10 JAN 2017 18:50:17



LTE Band 38 / 20MHz / QPSK

Lowest Channel / 1RB

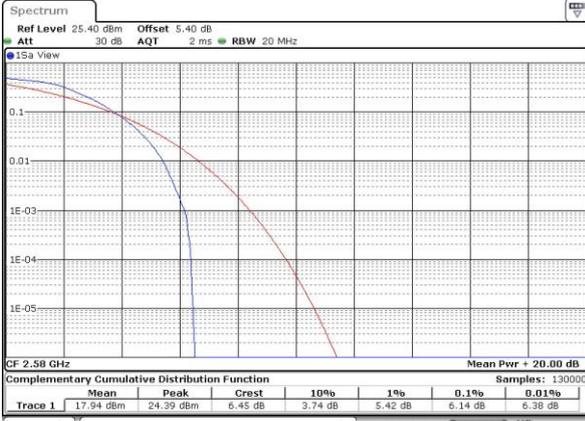

Date: 4 FEB 2017 15:40:12

Lowest Channel / Full RB



Date: 4 FEB 2017 15:40:47

Middle Channel / 1RB




Date: 4 FEB 2017 15:41:52

Middle Channel / Full RB



Date: 4 FEB 2017 15:42:11

Highest Channel / 1RB

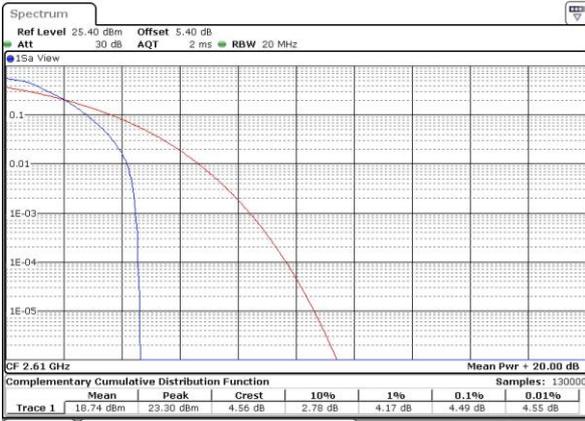

Date: 4 FEB 2017 15:43:25

Highest Channel / Full RB




Date: 4 FEB 2017 15:43:03




LTE Band 38 / 20MHz / 16QAM

Lowest Channel / 1RB

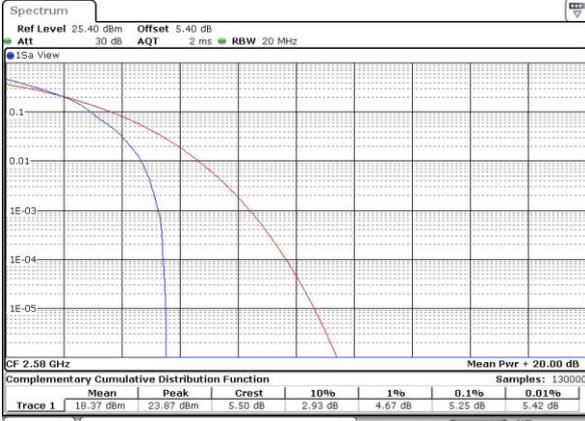


Date: 4 FEB 2017 15:39:51

Lowest Channel / Full RB

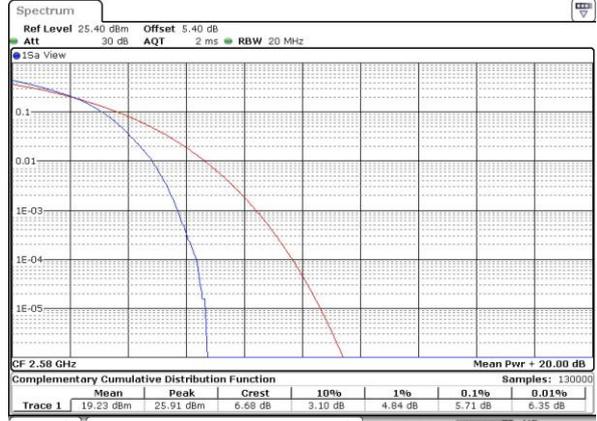

Date: 4 FEB 2017 15:41:01

Middle Channel / 1RB

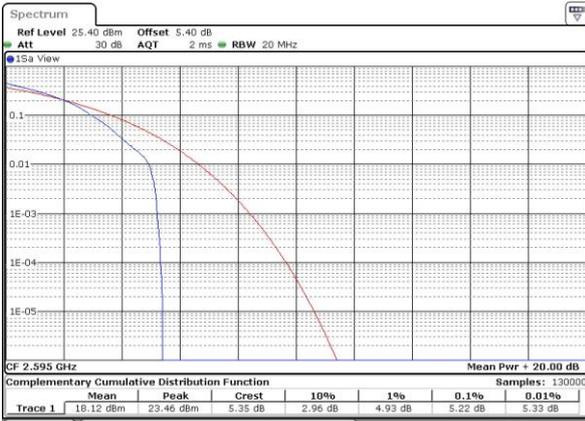

Date: 4 FEB 2017 15:41:39

Middle Channel / Full RB




Date: 4 FEB 2017 15:42:25

Highest Channel / 1RB



Date: 4 FEB 2017 15:43:49

Highest Channel / Full RB

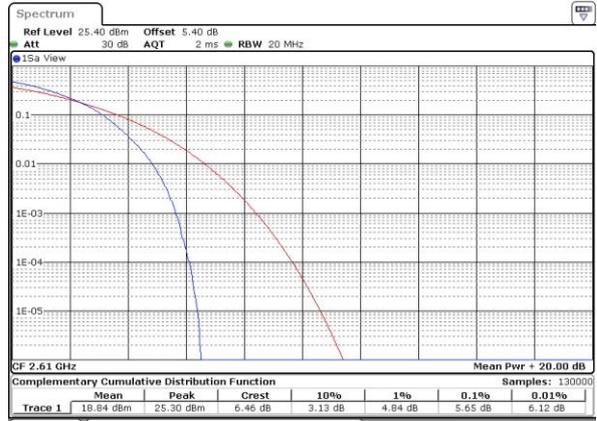

Date: 4 FEB 2017 15:42:45



**26dB Bandwidth**

Mode	LTE Band 4 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.27	1.30	3.03	3.03	4.90	4.97	9.75	9.81	14.30	14.54	20.14	20.30
Middle CH	1.26	1.29	3.03	2.97	4.93	4.90	9.87	9.63	14.42	14.63	20.30	20.02
Highest CH	1.26	1.28	3.03	2.99	4.93	4.92	9.81	9.89	14.51	14.51	20.10	20.14

Mode	LTE Band 5 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.27	1.27	3.00	3.05	4.96	4.87	9.93	9.81	-	-	-	-
Middle CH	1.25	1.23	3.01	3.01	4.94	4.91	9.99	9.83	-	-	-	-
Highest CH	1.28	1.28	3.04	3.02	4.93	4.88	9.91	9.91	-	-	-	-


Mode	LTE Band 7 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.94	4.91	9.73	9.73	14.57	14.48	20.26	20.26
Middle CH	-	-	-	-	5.00	4.88	9.69	9.75	14.39	14.72	20.22	20.30
Highest CH	-	-	-	-	4.99	4.76	9.89	9.69	14.27	14.42	20.30	20.18

Mode	LTE Band 38 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.93	4.87	9.79	9.71	14.45	14.39	19.94	20.18
Middle CH	-	-	-	-	4.89	4.86	9.67	9.71	14.30	14.75	20.18	19.98
Highest CH	-	-	-	-	4.95	4.99	9.77	9.75	14.30	14.42	20.06	20.18




LTE Band 4

Lowest Channel / 1.4MHz / QPSK

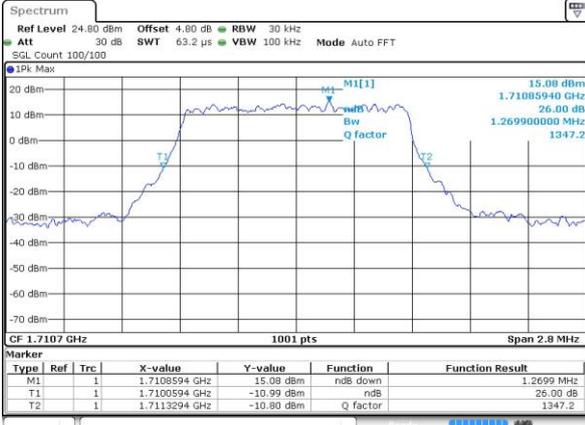


Date: 10 JAN 2017 10:20:21

Lowest Channel / 1.4MHz / 16QAM

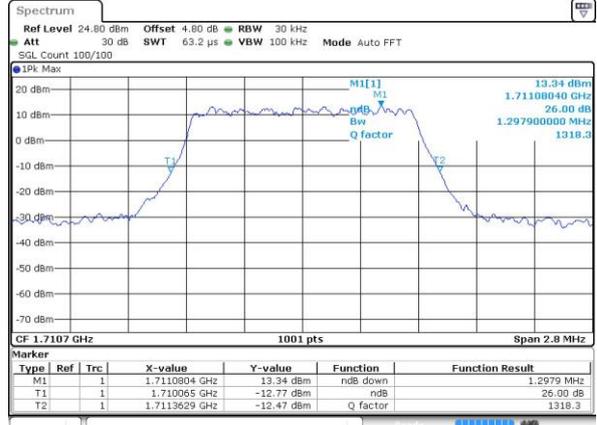


Date: 10 JAN 2017 12:03:07

Middle Channel / 1.4MHz / QPSK

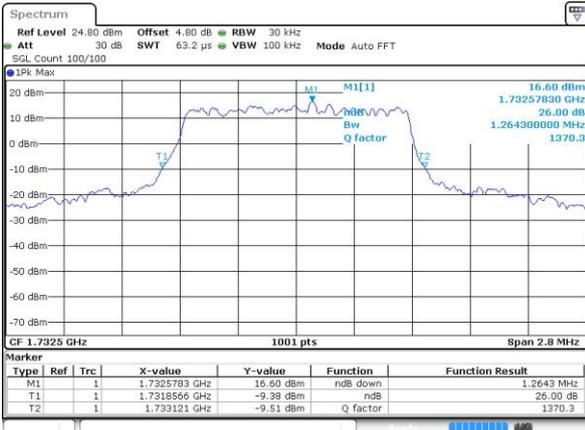


Date: 10 JAN 2017 10:27:24

Middle Channel / 1.4MHz / 16QAM

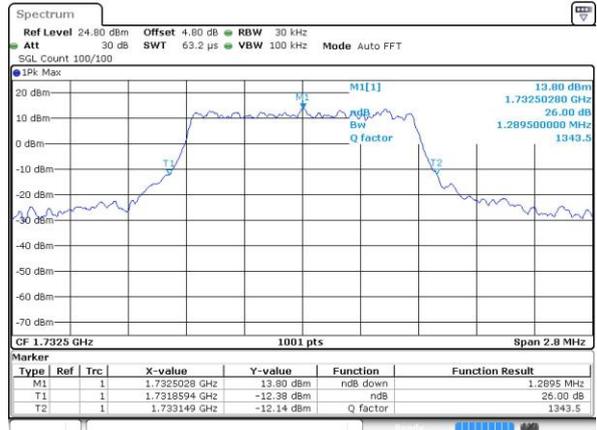

Date: 10 JAN 2017 12:03:31

Highest Channel / 1.4MHz / QPSK

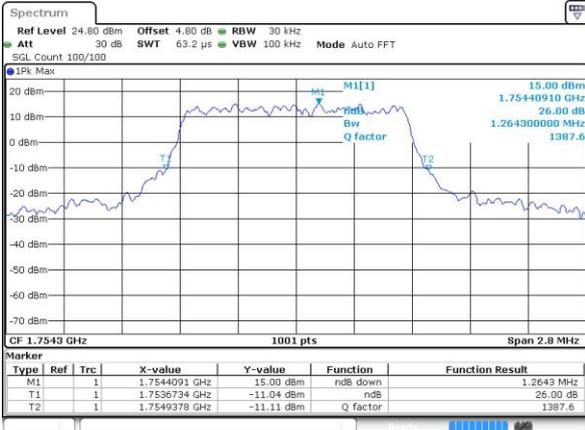

Date: 10 JAN 2017 10:29:55

Highest Channel / 1.4MHz / 16QAM




Date: 10 JAN 2017 10:30:05




LTE Band 4

Lowest Channel / 3MHz / QPSK

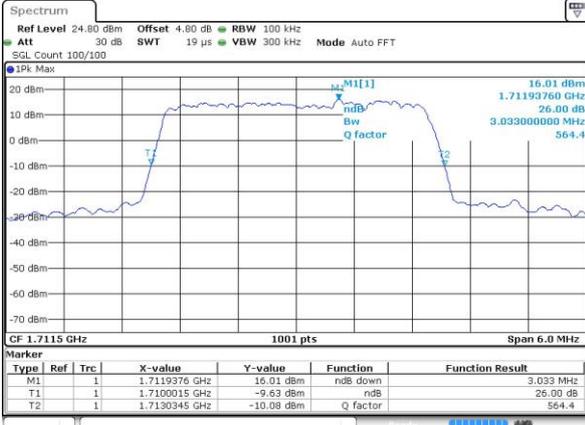


Date: 10 JAN 2017 10:36:57

Lowest Channel / 3MHz / 16QAM

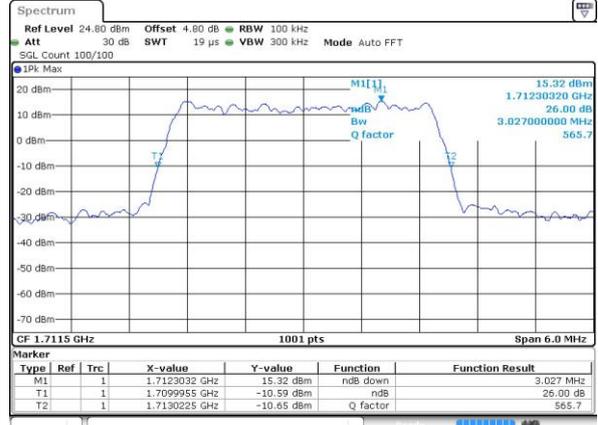


Date: 10 JAN 2017 10:37:07

Middle Channel / 3MHz / QPSK

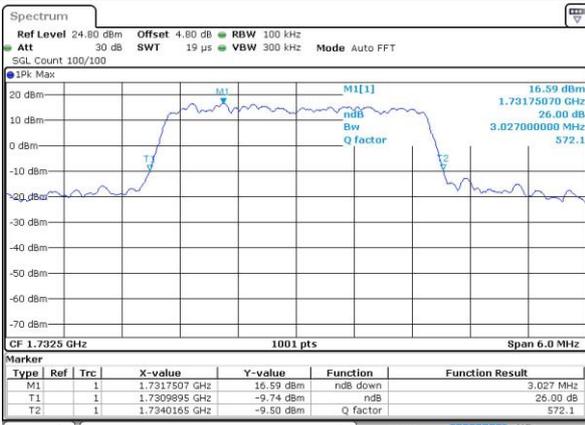


Date: 10 JAN 2017 10:43:59

Middle Channel / 3MHz / 16QAM

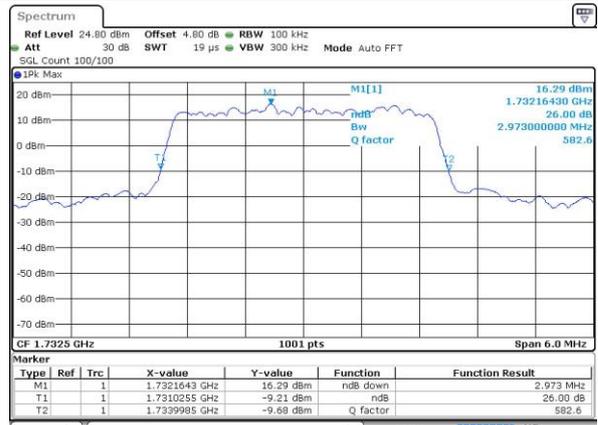


Date: 10 JAN 2017 10:44:10

Highest Channel / 3MHz / QPSK

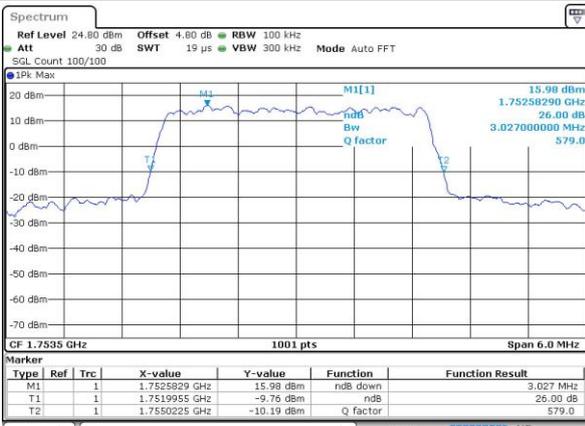

Date: 10 JAN 2017 10:46:31

Highest Channel / 3MHz / 16QAM

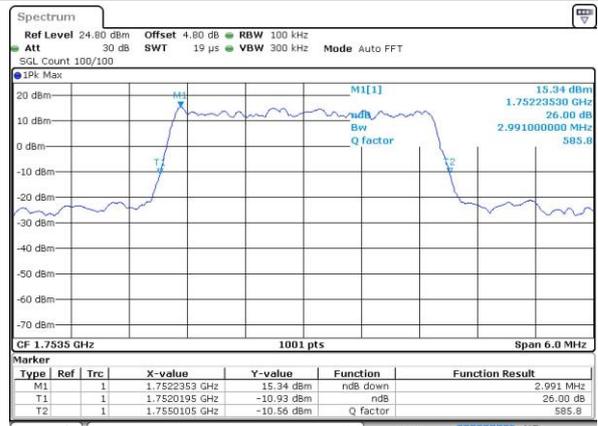


Date: 10 JAN 2017 10:46:41




LTE Band 4

Lowest Channel / 5MHz / QPSK

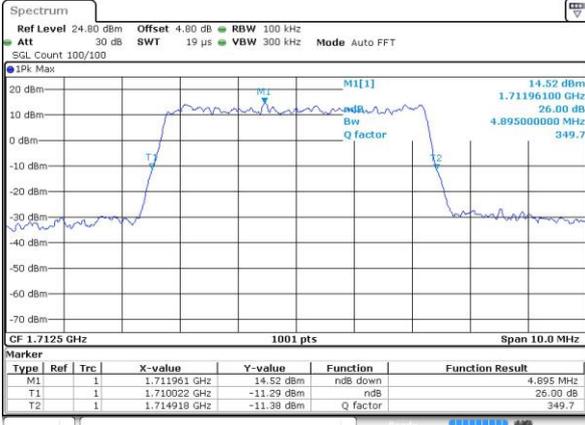


Date: 10 JAN 2017 10:53:33

Lowest Channel / 5MHz / 16QAM

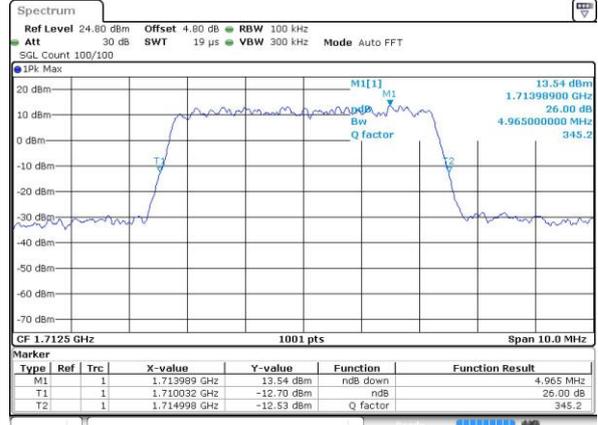


Date: 10 JAN 2017 10:53:44

Middle Channel / 5MHz / QPSK

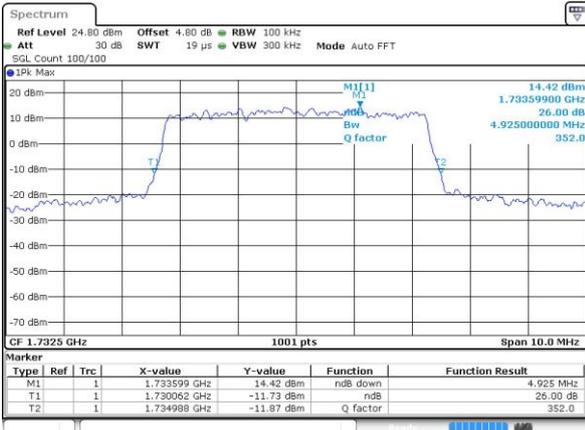


Date: 10 JAN 2017 11:00:36

Middle Channel / 5MHz / 16QAM

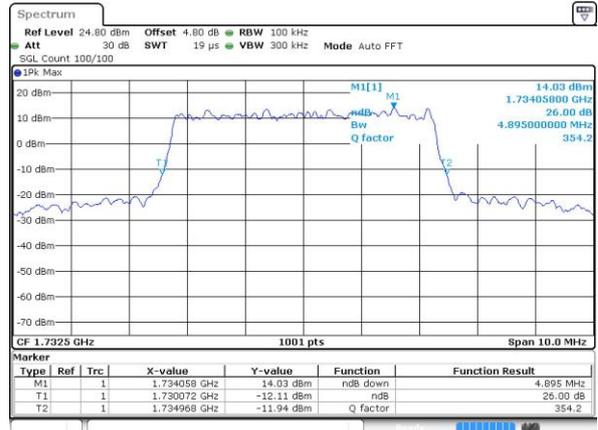


Date: 10 JAN 2017 11:00:46

Highest Channel / 5MHz / QPSK

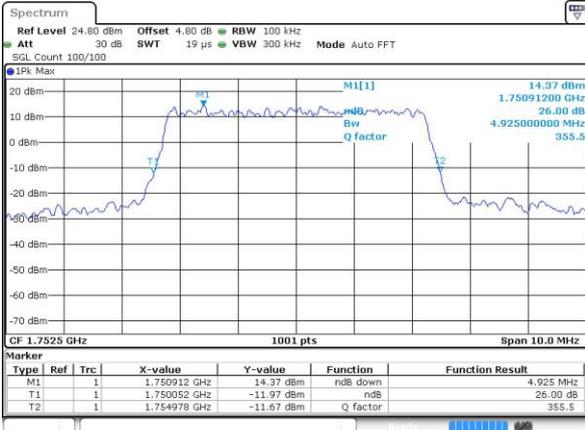

Date: 10 JAN 2017 11:03:07

Highest Channel / 5MHz / 16QAM

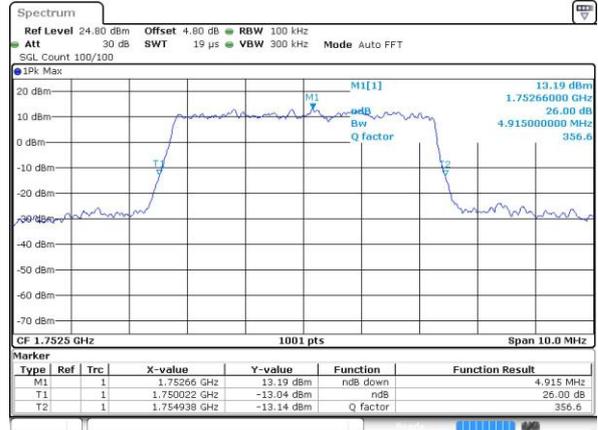


Date: 10 JAN 2017 11:03:17




LTE Band 4

Lowest Channel / 10MHz / QPSK

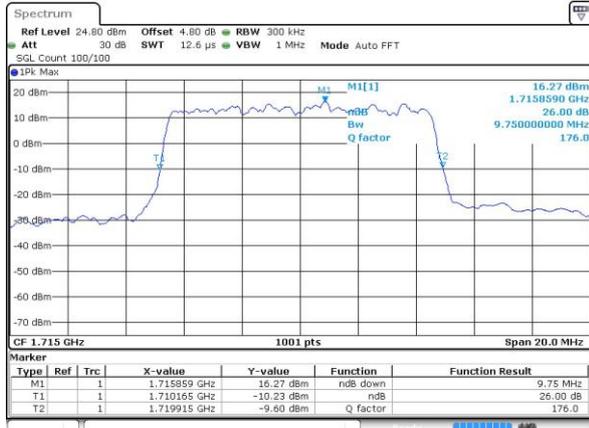


Date: 10 JAN 2017 12:05:31

Lowest Channel / 10MHz / 16QAM

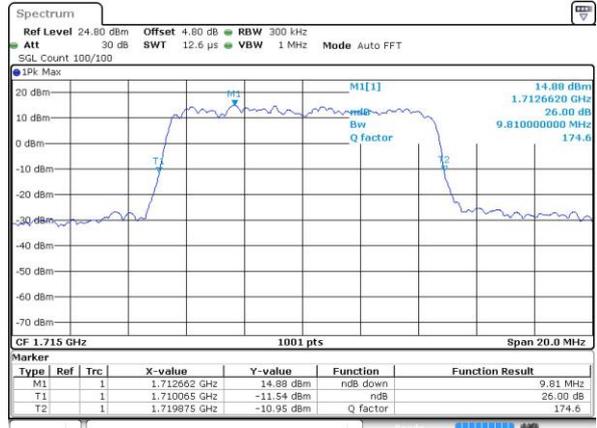


Date: 10 JAN 2017 11:10:20

Middle Channel / 10MHz / QPSK

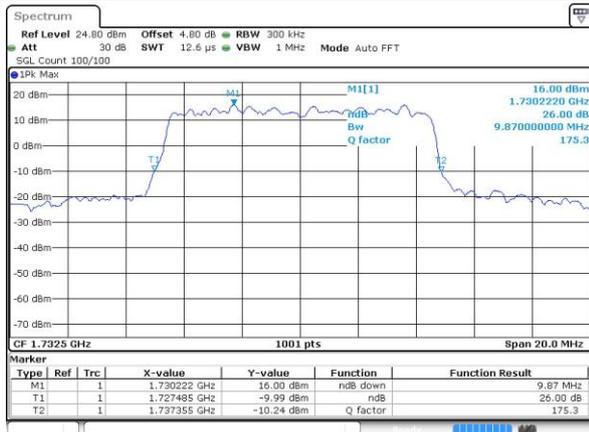


Date: 10 JAN 2017 11:17:11

Middle Channel / 10MHz / 16QAM

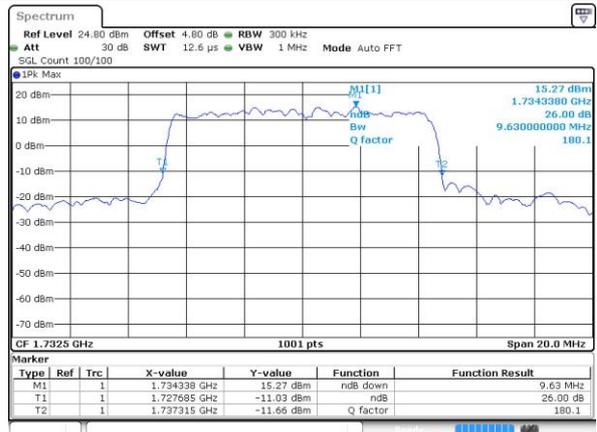


Date: 10 JAN 2017 11:17:22

Highest Channel / 10MHz / QPSK

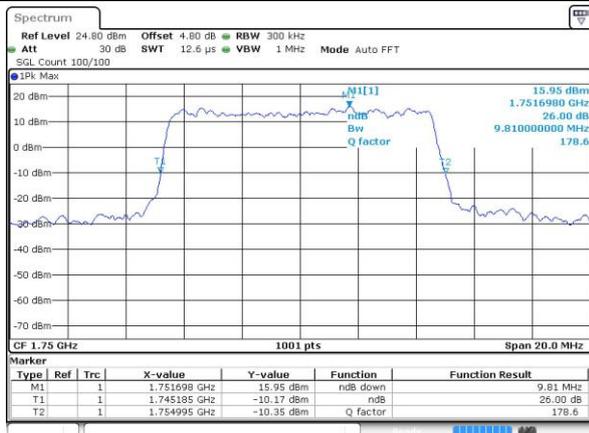

Date: 10 JAN 2017 11:19:43

Highest Channel / 10MHz / 16QAM

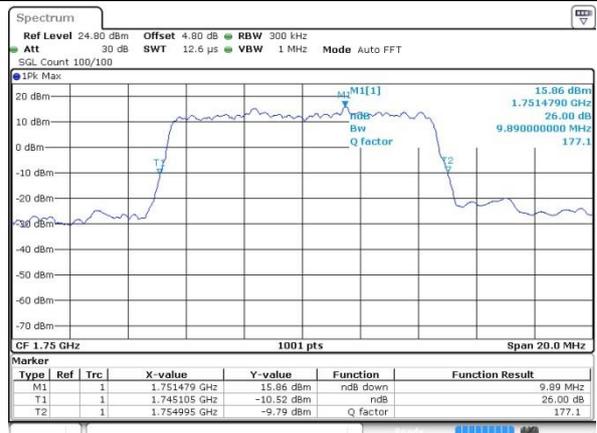

Date: 10 JAN 2017 14:17:02