



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : MI
MODEL NAME : M1803D5XA
FCC ID : 2AFZZ-XMSD5X
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Feb. 08, 2018 and testing was completed on Mar. 30, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI/TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.

**No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335
China**



TABLE OF CONTENTS

- 1 GENERAL DESCRIPTION 5**
 - 1.1 Applicant..... 5
 - 1.2 Manufacturer 5
 - 1.3 Product Feature of Equipment Under Test 5
 - 1.4 Product Specification of Equipment Under Test 6
 - 1.5 Modification of EUT 7
 - 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator 7
 - 1.7 Testing Location 8
 - 1.8 Applicable Standards 8
- 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9**
 - 2.1 Test Mode..... 9
 - 2.2 Connection Diagram of Test System 10
 - 2.3 Support Unit used in test configuration 10
 - 2.4 Measurement Results Explanation Example 10
 - 2.5 Frequency List of Low/Middle/High Channels..... 11
- 3 CONDUCTED TEST RESULT 12**
 - 3.1 Measuring Instruments..... 12
 - 3.2 Test Setup 12
 - 3.3 Test Result of Conducted Test..... 12
 - 3.4 Conducted Output Power and ERP/EIRP 13
 - 3.5 Peak-to-Average Ratio 14
 - 3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 15
 - 3.7 Conducted Band Edge 16
 - 3.8 Conducted Spurious Emission 17
 - 3.9 Frequency Stability..... 18
- 4 RADIATED TEST ITEMS 19**
 - 4.1 Measuring Instruments..... 19
 - 4.2 Test Setup 19
 - 4.3 Test Result of Radiated Test..... 19
 - 4.4 Field Strength of Spurious Radiation Measurement 20
- 5 LIST OF MEASURING EQUIPMENT 21**
- 6 UNCERTAINTY OF EVALUATION 22**
- APPENDIX A. TEST RESULTS OF CONDUCTED TEST**
- APPENDIX B. TEST RESULTS OF RADIATED TEST**
- APPENDIX C. TEST SETUP PHOTOGRAPHS**



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b) §27.53(g)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22H	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 22.17 dB at 3759.000 MHz



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68,Qinghe Middle Street, Haidian District, Beijing, China

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68,Qinghe Middle Street, Haidian District, Beijing, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	MI
Model Name	M1803D5XA
FCC ID	2AFZZ-XMSD5X
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/ Bluetooth v4.1 LE/Bluetooth v4.2 LE/Bluetooth v5.0 LE
IMEI Code	Conducted: 867601030223652/867601030223660 Radiation: 867601030222613/867601030222621
HW Version	P3.0
SW Version	MIUI 9
EUT Stage	Pre-Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples are only for Flash, sample 1 is 6GB+64GB, sample 2 is 6GB+128GB. According to the difference, choose sample 1 to perform full tests.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	<p>GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz</p> <p>WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz</p> <p>CDMA2000: BC0: 824.70 MHz ~ 848.31 MHz BC1: 1851.25 MHz ~ 1908.75 MHz</p>
Rx Frequency	<p>GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz</p> <p>WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz</p> <p>CDMA2000: BC0: 869.70 MHz ~ 893.31 MHz BC1: 1931.25 MHz ~ 1988.75 MHz</p>
Maximum Output Power to Antenna	<p>GSM/GPRS/EDGE: 850: 32.83 dBm 1900: 29.76 dBm</p> <p>WCDMA: Band V: 24.10 dBm Band II: 24.44 dBm Band IV: 24.32 dBm</p> <p>CDMA2000: BC0: 23.80 dBm BC1: 24.11 dBm</p>
Antenna Type	LDS Antenna
Antenna Gain	Cellular Band: 0.37 dBi PCS Band: 1.61 dBi AWS Band: 0.15 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM DC-HSDPA : 64QAM CDMA2000 1xRTT: QPSK CDMA2000 1xEV-DO: QPSK/8PSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22H	GSM850 GSM	GMSK	1.2735	0.0203 ppm	243KGXW
Part 22H	GSM850 EDGE class 8	8PSK	0.3097	0.0275 ppm	245KG7W
Part 22H	CDMA2000 BC0 1xRTT	QPSK	0.1592	0.0251 ppm	1M28F9W
Part 22H	WCDMA Band V RMC 12.2Kbps	BPSK	0.1706	0.0359 ppm	4M13F9W
Part 24E	GSM1900 GSM	GMSK	1.3709	0.0133 ppm	244KGXW
Part 24E	GSM1900 EDGE class 8	8PSK	0.5248	0.0181 ppm	250KG7W
Part 24E	CDMA2000 BC1 1xRTT	QPSK	0.3733	0.0133 ppm	1M27F9W
Part 24E	WCDMA Band II RMC 12.2Kbps	BPSK	0.4027	0.0165 ppm	4M13F9W
Part 27L	WCDMA Band IV RMC 12.2Kbps	BPSK	0.3917	0.0150 ppm	4M13F9W



1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.		FCC Test Firm Registration No.
	TH01-KS	03CH03-KS	630927

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V and CDMA BC0.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II and CDMA BC1.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link 	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link
GSM 1900	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link 	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link
WCDMA Band V	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
WCDMA Band II	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
WCDMA Band IV	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
CDMA BC0	<ul style="list-style-type: none"> ■ 1xRTT Link 	<ul style="list-style-type: none"> ■ 1xRTT Link
CDMA BC1	<ul style="list-style-type: none"> ■ 1xRTTLink 	<ul style="list-style-type: none"> ■ 1xRTT Link

2.2 Connection Diagram of Test System

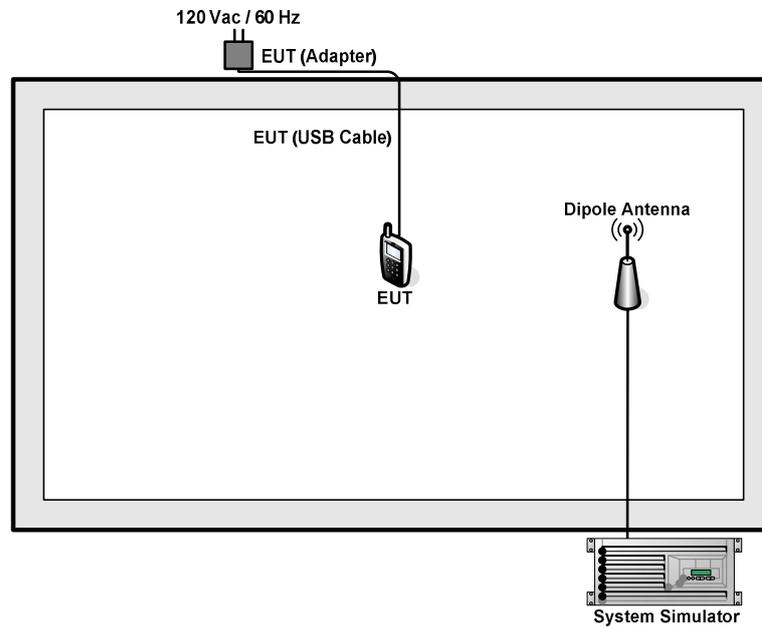

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTRON	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

The following shows an offset computation example with RF cable loss 4.4 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.4 + 10 = 14.4 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6
CDMA2000 BC0	Channel	1013	384	777
	Frequency	824.7	836.52	848.31
CDMA2000 BC1	Channel	25	600	1175
	Frequency	1851.25	1880.0	1908.75

3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

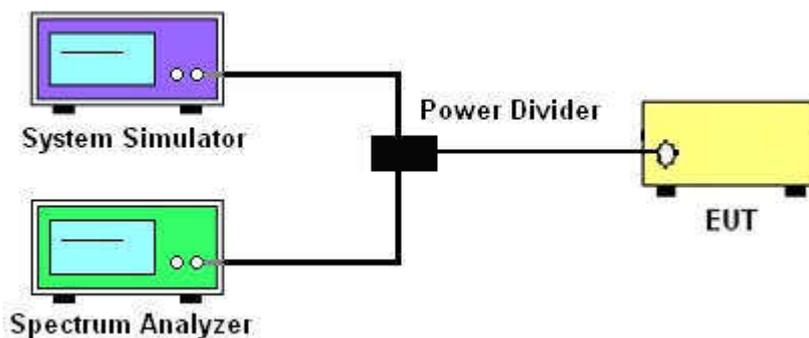

3.2.3 Frequency Stability

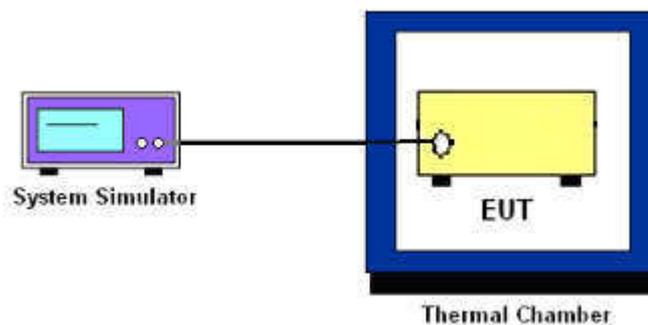

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V and CDMA BC0.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II and CDMA BC1.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v03 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
Record the maximum PAPR level associated with a probability of 0.1%.



3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v03 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v03 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v03 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v03 Section 9.0.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

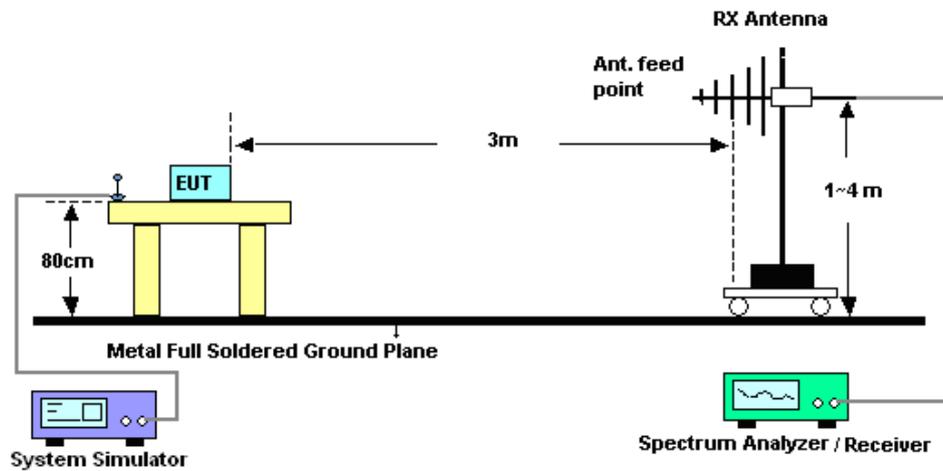

4.2.2 For radiated test above 1GHz

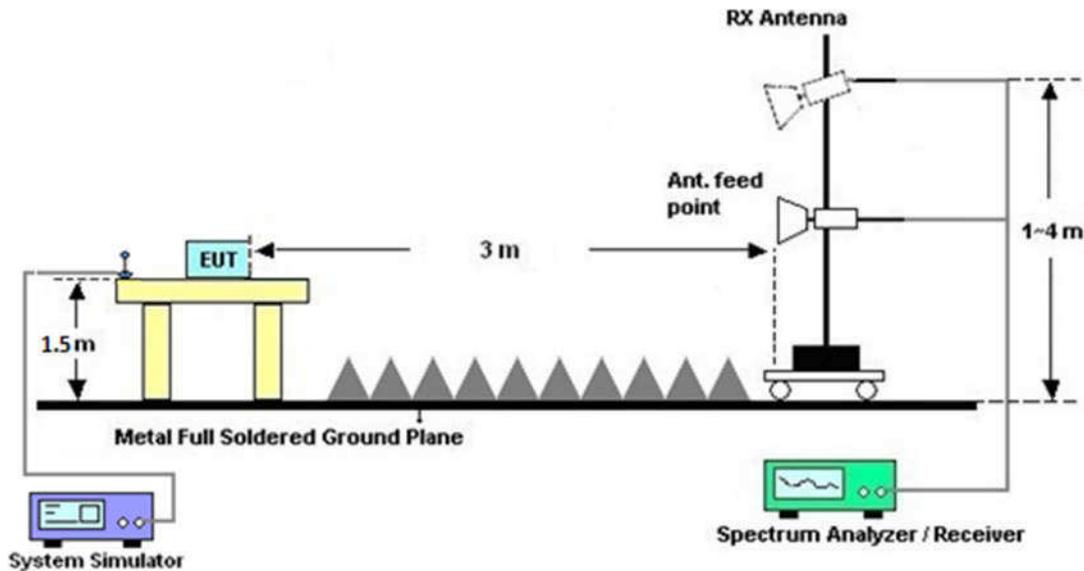

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v03 Section 5.8 and ANSI/TIA-603-E Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 08, 2017	Feb. 28, 2018~ Mar. 27, 2018	Aug. 07, 2018	Conducted (TH01-KS)
Radio communication analyzer	Anritsu	MT8820C	6201300652	2G/3G/LTE_ full band	Aug. 08, 2017	Feb. 28, 2018~ Mar. 27, 2018	Aug. 07, 2018	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct.12, 2017	Feb. 28, 2018~ Mar. 27, 2018	Oct. 11, 2018	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2017	Mar. 27, 2018~ Mar. 30, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	Mar. 27, 2018~ Mar. 30, 2018	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2017	Mar. 27, 2018~ Mar. 30, 2018	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 07, 2018	Mar. 27, 2018~ Mar. 30, 2018	Feb. 06, 2019	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr. 18, 2017	Mar. 27, 2018~ Mar. 30, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35 -HG	1887435	18~40GHz	Oct. 12, 2017	Mar. 27, 2018~ Mar. 30, 2018	Oct. 11, 2018	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1	2025788	1Ghz-18Ghz	Apr. 18, 2017	Mar. 27, 2018~ Mar. 30, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 12, 2017	Mar. 27, 2018~ Mar. 30, 2018	Oct. 11, 2018	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 27, 2018~ Mar. 30, 2018	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 27, 2018~ Mar. 30, 2018	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 27, 2018~ Mar. 30, 2018	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.83	32.80	32.79	29.70	29.61	29.76
GPRS class 8	32.82	32.79	32.78	29.68	29.60	29.75
GPRS class 10	32.52	32.50	32.53	29.52	29.45	29.66
GPRS class 11	32.20	32.13	32.10	29.36	29.27	29.53
GPRS class 12	31.77	31.71	31.75	29.08	29.04	29.36
EGPRS class 8	26.60	26.63	26.69	25.59	25.32	25.45
EGPRS class 10	26.38	26.38	26.46	25.40	25.13	25.28
EGPRS class 11	26.13	26.10	26.15	25.19	24.91	25.11
EGPRS class 12	25.79	25.82	25.87	24.95	24.68	24.85

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
AMR 12.2K	24.02	24.07	24.08	24.36	24.27	24.42	24.10	24.28	24.30
RMC 12.2K	24.05	24.08	24.10	24.38	24.29	24.44	24.11	24.30	24.32
HSDPA Subtest-1	22.35	22.23	22.14	22.76	22.84	22.74	22.13	22.18	22.12
HSDPA Subtest-2	22.37	22.74	22.21	22.71	22.68	22.45	22.14	22.23	22.15
HSDPA Subtest-3	21.78	21.77	21.71	21.80	21.76	21.65	21.64	21.73	21.68
HSDPA Subtest-4	21.79	21.62	21.69	21.76	21.45	21.65	21.65	21.68	21.65
DC-HSDPA Subtest-1	21.78	21.83	21.86	22.13	22.29	22.18	21.56	21.48	21.67
DC-HSDPA Subtest-2	21.79	21.80	21.79	22.10	22.18	22.15	21.49	21.46	21.69
DC-HSDPA Subtest-3	21.28	21.30	21.15	21.35	21.28	21.08	21.15	21.08	21.18
DC-HSDPA Subtest-4	21.27	21.19	21.16	21.36	21.37	21.09	21.08	21.08	21.15
HSUPA Subtest-1	22.51	22.21	22.24	22.52	22.37	22.69	22.11	22.17	22.15
HSUPA Subtest-2	20.43	20.29	20.31	20.53	20.42	20.67	20.10	20.17	20.22
HSUPA Subtest-3	21.46	21.24	21.28	21.51	21.32	21.63	21.13	21.17	21.18
HSUPA Subtest-4	20.47	20.20	20.26	20.51	20.44	20.58	20.13	20.17	20.18
HSUPA Subtest-5	22.50	22.19	22.30	22.50	22.40	22.60	22.10	22.10	22.20
HSPA+ (16QAM) Subtest-1	20.64	20.36	20.28	20.56	20.67	20.75	20.23	20.37	20.45



Conducted Power (*Unit: dBm)						
Band	CDMA 2000 BC0			CDMA 2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	23.80	23.76	23.77	24.06	23.80	23.72
1xRTT RC3 SO55	23.77	23.79	23.77	24.05	23.76	23.73
1xRTT RC3 SO32 (+ F-SCH)	23.75	23.74	23.75	24.11	23.77	23.69
1xRTT RC3 SO32 (+SCH)	23.75	23.76	23.74	24.09	23.77	23.70
1xEVDO RTAP 153.6Kbps	23.37	23.25	23.37	23.82	23.59	23.63
1xEVDO RETAP 4096Bits	23.27	23.16	23.36	23.81	23.58	23.61



ERP/EIRP

GSM850 (G_T - L_C = 0.37dB)			
Channel	128	189	251
	(Low)	(Mid)	(High)
Frequency	824.2	836.4	848.8
(MHz)			
Conducted Power (dBm)	32.83	32.80	32.79
Conducted Power (Watts)	1.9187	1.9055	1.9011
ERP(dBm)	31.05	31.02	31.01
ERP(Watts)	1.2735	1.2647	1.2618

EDGE850 (G_T - L_C = 0.37dB)			
Channel	128	189	251
	(Low)	(Mid)	(High)
Frequency	824.2	836.4	848.8
(MHz)			
Conducted Power (dBm)	26.60	26.63	26.69
Conducted Power (Watts)	0.4571	0.4603	0.4667
ERP(dBm)	24.82	24.85	24.91
ERP(Watts)	0.3034	0.3055	0.3097

CDMA 2000 BC0 (G_T - L_C = 0.37dB)			
Channel	1013	384	777
	(Low)	(Mid)	(High)
Frequency	824.7	836.52	848.31
(MHz)			
Conducted Power (dBm)	23.80	23.76	23.77
Conducted Power (Watts)	0.2399	0.2377	0.2382
ERP(dBm)	22.02	21.98	21.99
ERP(Watts)	0.1592	0.1578	0.1581



GSM1900 (G _T - L _C = 1.61dB)			
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency	1850.2	1880	1909.8
(MHz)			
Conducted Power (dBm)	29.70	29.61	29.76
Conducted Power (Watts)	0.9333	0.9141	0.9462
EIRP(dBm)	31.31	31.22	31.37
EIRP(Watts)	1.3521	1.3243	1.3709

EDGE1900 (G _T - L _C = 1.61dB)			
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency	1850.2	1880	1909.8
(MHz)			
Conducted Power (dBm)	25.59	25.32	25.45
Conducted Power (Watts)	0.3622	0.3404	0.3508
EIRP(dBm)	27.2	26.93	27.06
EIRP(Watts)	0.5248	0.4932	0.5082

CDMA 2000 BC1 (G _T - L _C = 1.61dB)			
Channel	25	600	1175
	(Low)	(Mid)	(High)
Frequency	1851.25	1880	1908.75
(MHz)			
Conducted Power (dBm)	24.11	23.77	23.69
Conducted Power (Watts)	0.2576	0.2382	0.2339
EIRP(dBm)	25.72	25.38	25.3
EIRP(Watts)	0.3733	0.3451	0.3388



WCDMA Band V ($G_T - L_C = 0.37\text{dB}$)			
Channel	4132	4182	4233
	(Low)	(Mid)	(High)
Frequency	826.4	836.4	846.6
(MHz)			
Conducted Power (dBm)	24.05	24.08	24.10
Conducted Power (Watts)	0.2541	0.2559	0.2570
ERP(dBm)	22.27	22.30	22.32
ERP(Watts)	0.1687	0.1698	0.1706

WCDMA Band II ($G_T - L_C = 1.61\text{dB}$)			
Channel	9262	9400	9538
	(Low)	(Mid)	(High)
Frequency	1852.4	1880	1907.6
(MHz)			
Conducted Power (dBm)	24.38	24.29	24.44
Conducted Power (Watts)	0.2742	0.2685	0.2780
EIRP(dBm)	25.99	25.9	26.05
EIRP(Watts)	0.3972	0.3890	0.4027

WCDMA Band IV ($G_T - L_C = 0.15\text{dB}$)			
Channel	1312	1413	1513
	(Low)	(Mid)	(High)
Frequency	1712.4	1732.6	1752.6
(MHz)			
Conducted Power (dBm)	24.11	24.30	24.32
Conducted Power (Watts)	0.2576	0.2692	0.2704
EIRP(dBm)	25.72	25.91	25.93
EIRP(Watts)	0.3733	0.3899	0.3917



Peak-to-Average Ratio

Mode	GSM850(dB)		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.14	0.17	PASS
Middle CH	0.17	0.17	
Highest CH	0.14	0.23	

Mode	GSM1900(dB)		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.14	0.20	PASS
Middle CH	0.17	0.17	
Highest CH	0.17	0.20	


Mode	WCDMA Band V(dB)	WCDMA Band II(dB)	WCDMA Band IV(dB)	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.13	3.07	3.10	PASS
Middle CH	3.13	3.10	3.19	
Highest CH	3.10	3.13	3.01	

Mode	CDMA BC0(dB)	CDMA BC1(dB)	Limit: 13dB
Mod.	1xRTT	1xRTT	Result
Lowest CH	4.49	3.97	PASS
Middle CH	4.55	4.09	
Highest CH	4.17	3.3	



GSM850 (GSM)


Lowest Channel

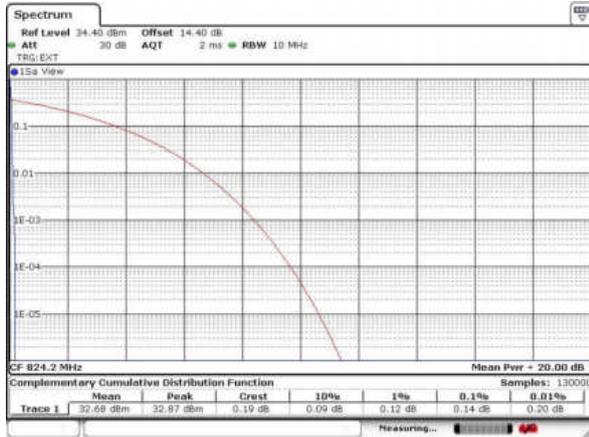

Date: 1 MAR 2018 00:09:52

GSM850 (EDGE class 8)

Lowest Channel

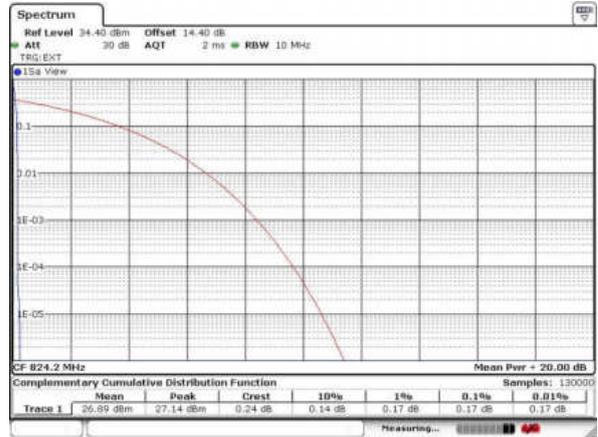


Date: 1 MAR 2018 00:32:19

Middle Channel




Date: 1 MAR 2018 00:10:31

Middle Channel

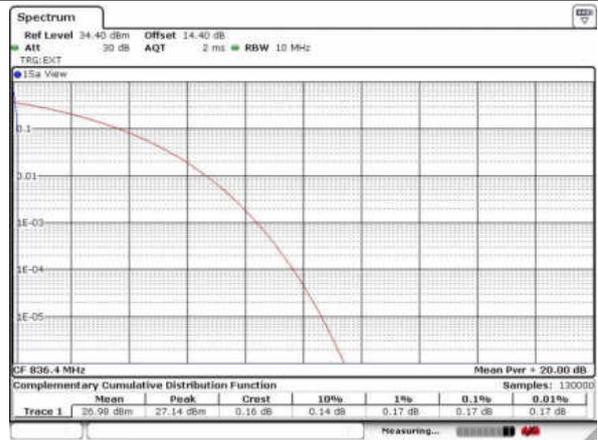


Date: 1 MAR 2018 00:32:30

Highest Channel

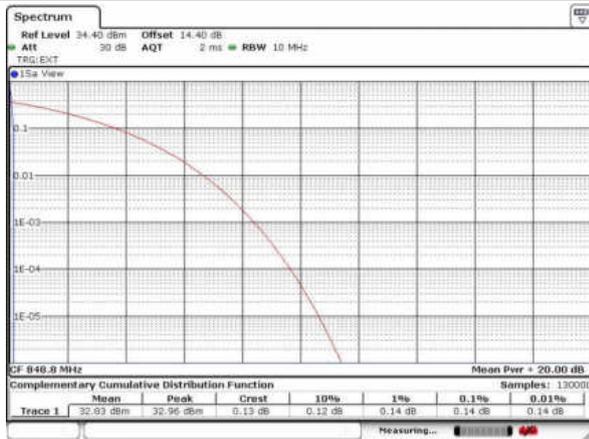


Date: 1 MAR 2018 00:10:41

Highest Channel

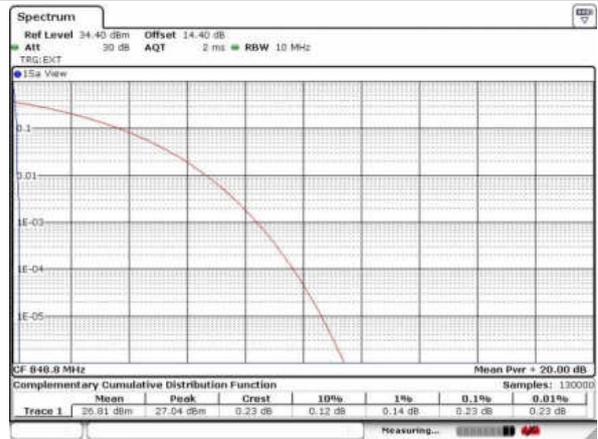


Date: 1 MAR 2018 00:32:42

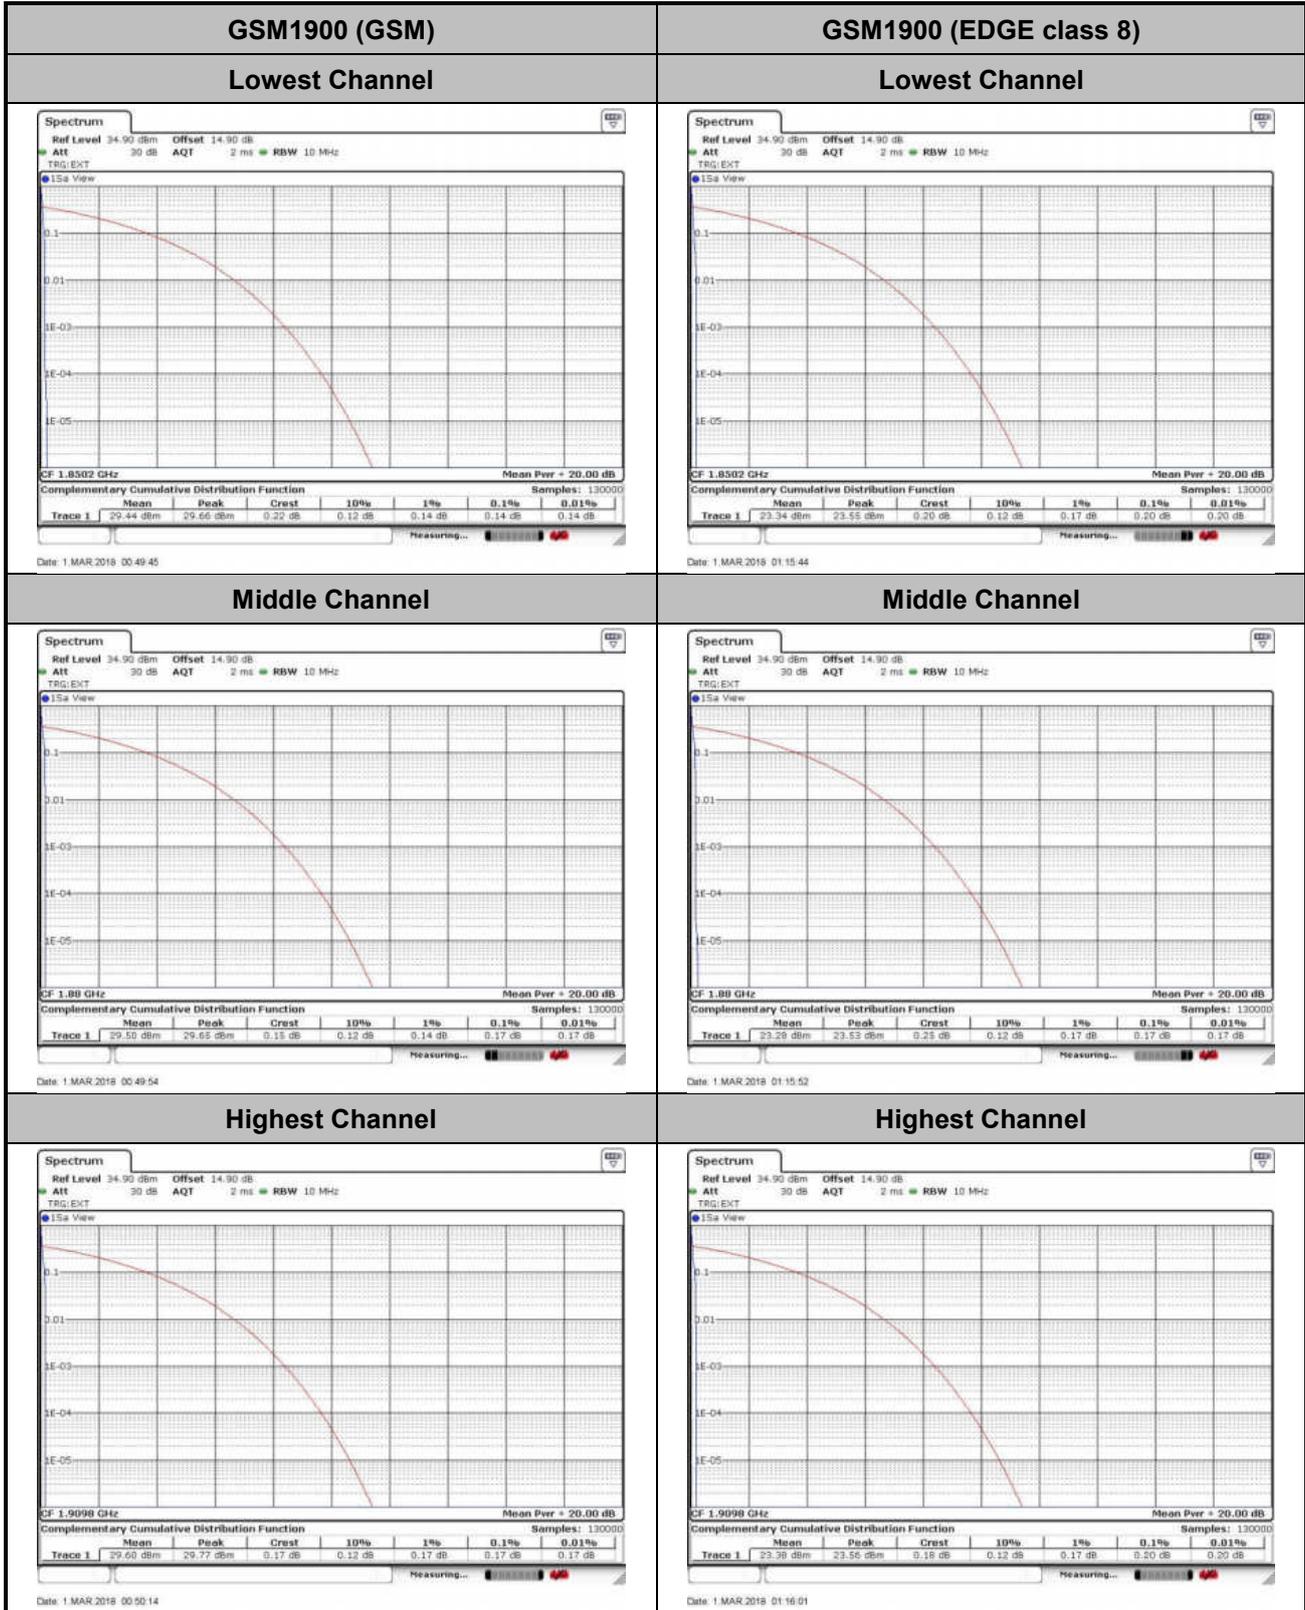



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

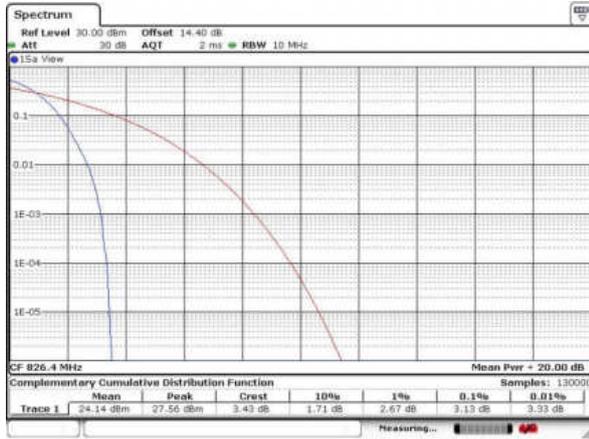

Date: 5 MAR 2016 22:43:59


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

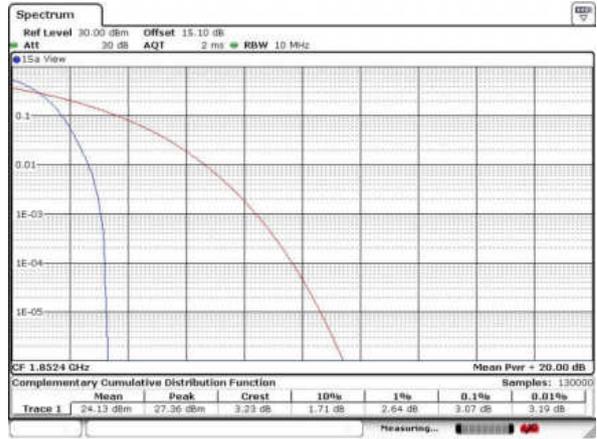


Date: 5 MAR 2016 23:25:12

Middle Channel

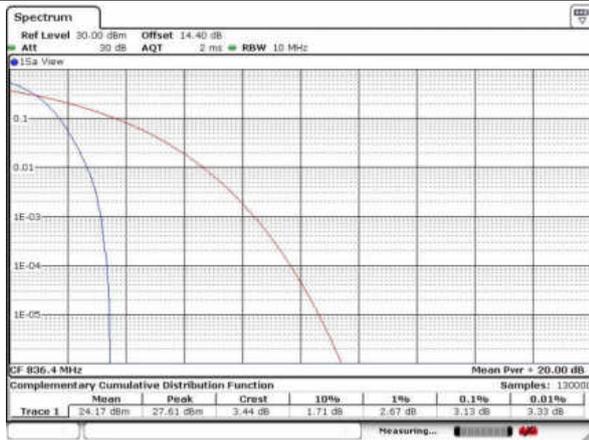


Date: 5 MAR 2016 22:44:12

Middle Channel

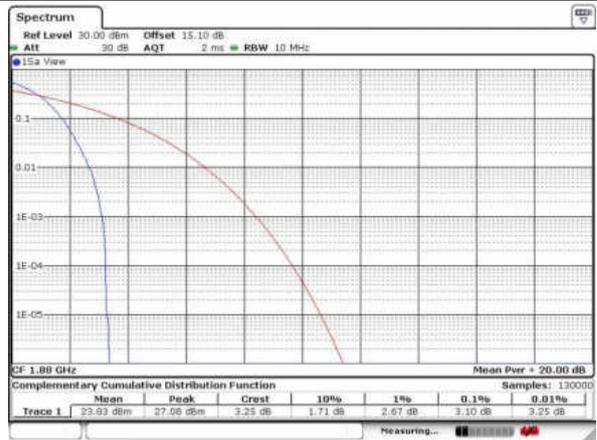


Date: 5 MAR 2016 23:25:38

Highest Channel

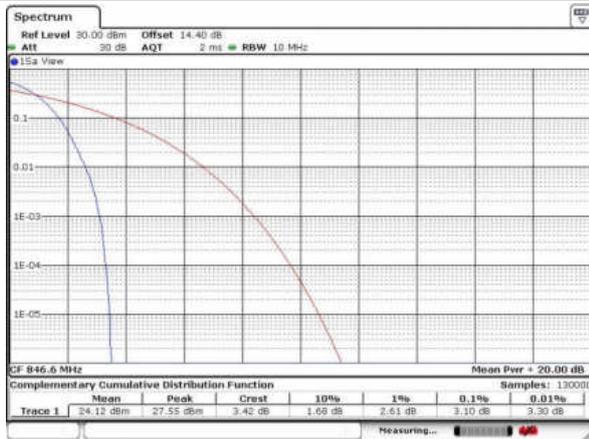

Date: 5 MAR 2016 22:44:32

Highest Channel

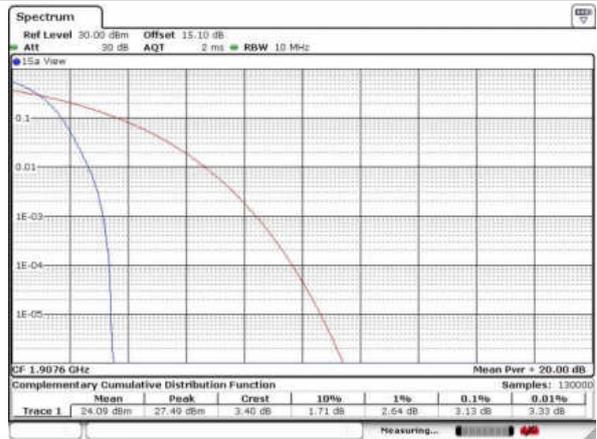


Date: 5 MAR 2016 23:26:06




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

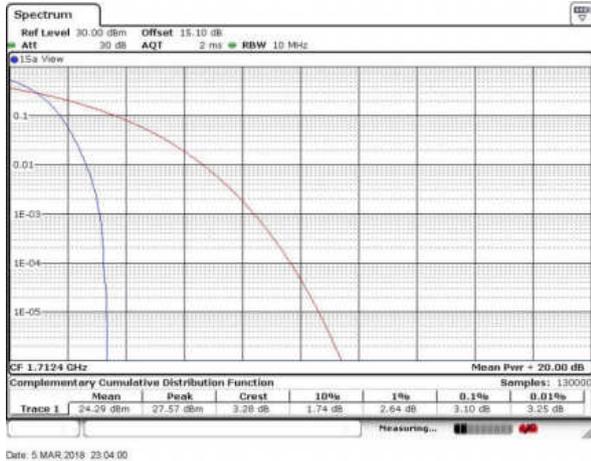

Middle Channel

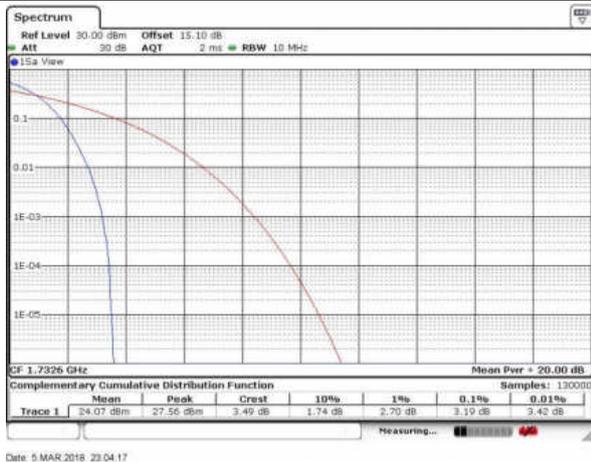


Highest Channel

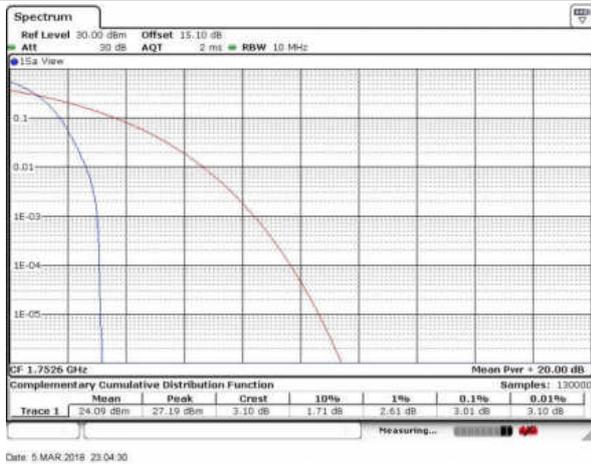



CDMA BC0 (1xRTT)

Lowest Channel

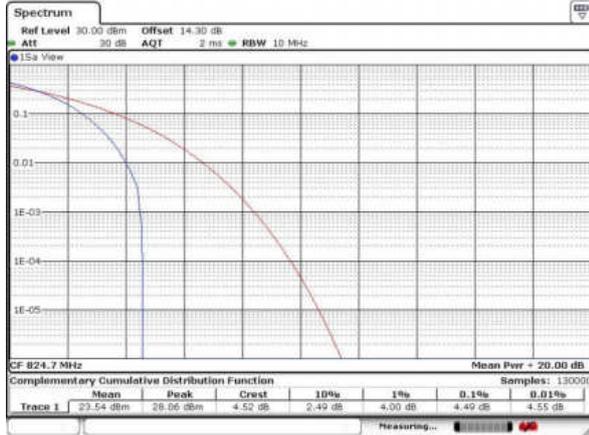

Date: 27 MAR 2016 09:49:17


CDMA BC1 (1xRTT)

Lowest Channel



Date: 27 MAR 2016 10:38:17

Middle Channel

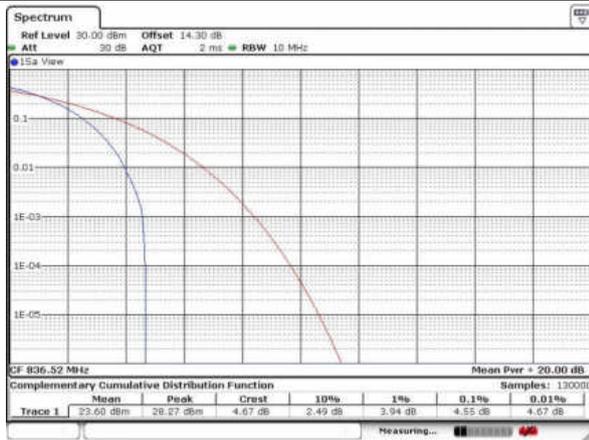


Date: 27 MAR 2016 09:49:29

Middle Channel




Date: 27 MAR 2016 10:38:23

Highest Channel

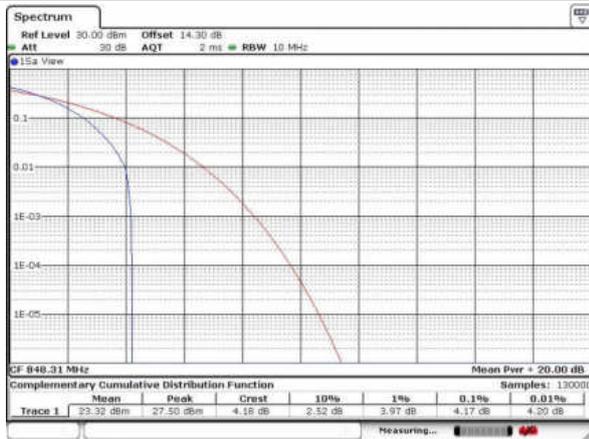

Date: 27 MAR 2016 09:49:49

Highest Channel

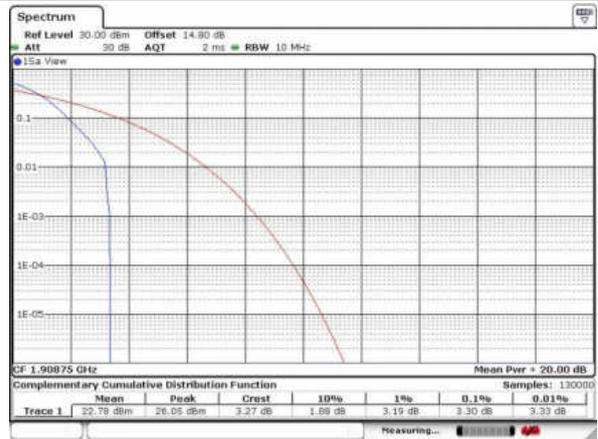

Date: 27 MAR 2016 10:38:32



26dB Bandwidth

Mode	GSM850(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.318	0.313
Middle CH	0.314	0.314
Highest CH	0.317	0.313

Mode	GSM1900(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.311	0.314
Middle CH	0.315	0.312
Highest CH	0.315	0.317


Mode	WCDMA Band V(MHz)	WCDMA Band II(MHz)	WCDMA Band IV(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.71	4.72	4.71
Middle CH	4.72	4.71	4.71
Highest CH	4.71	4.72	4.71

Mode	CDMA BC0(MHz)	CDMA BC1(MHz)
Mod.	1xRTT	1xRTT
Lowest CH	1.427	1.421
Middle CH	1.423	1.427
Highest CH	1.433	1.427



GSM850 (GSM)

Lowest Channel

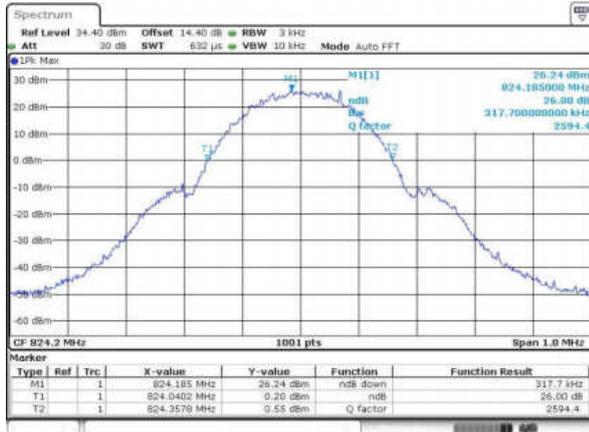

Date: 28 FEB 2018 22:39:32

GSM850 (EDGE class 8)

Lowest Channel




Date: 1 MAR 2018 00:13:58

Middle Channel




Date: 28 FEB 2018 22:40:00

Middle Channel

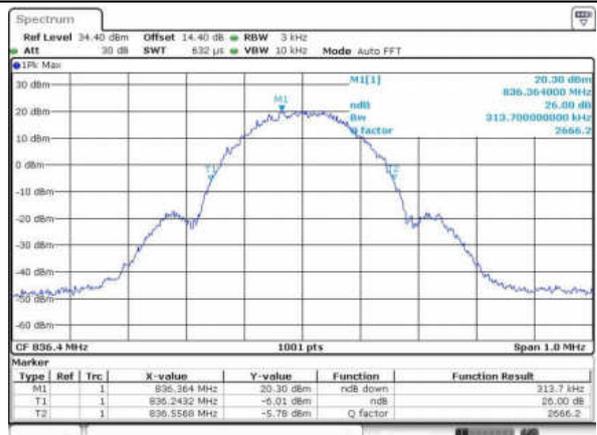


Date: 1 MAR 2018 00:14:47

Highest Channel

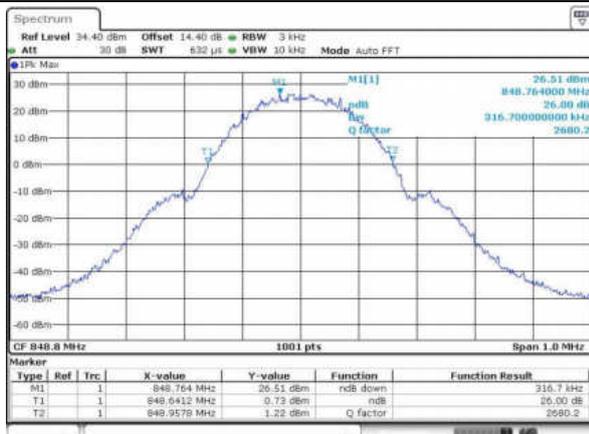

Date: 28 FEB 2018 22:40:29

Highest Channel

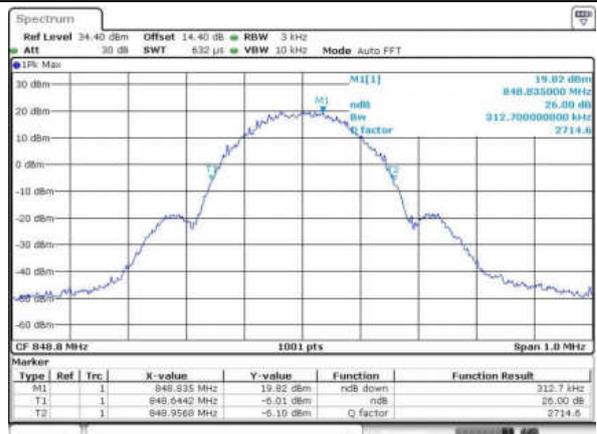


Date: 1 MAR 2018 00:15:18



GSM1900 (GSM)


Lowest Channel

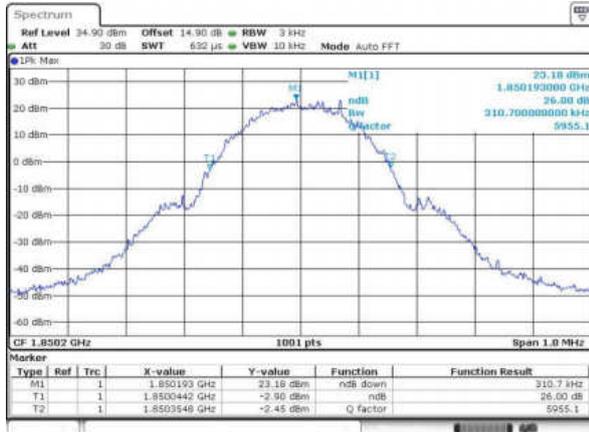

Date: 1 MAR 2018 00:36:15

GSM1900 (EDGE class 8)

Lowest Channel

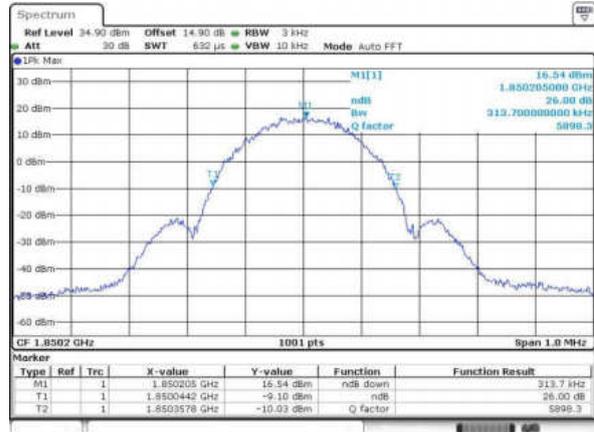

Date: 1 MAR 2018 00:53:02

Middle Channel



Date: 1 MAR 2018 00:36:44

Middle Channel




Date: 1 MAR 2018 00:53:33

Highest Channel



Date: 1 MAR 2018 00:37:12

Highest Channel

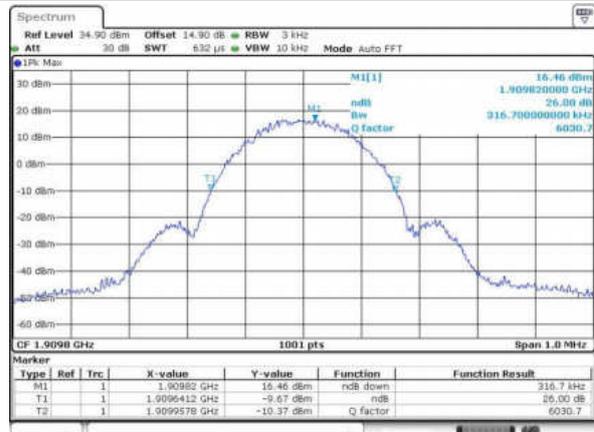


Date: 1 MAR 2018 00:59:08



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

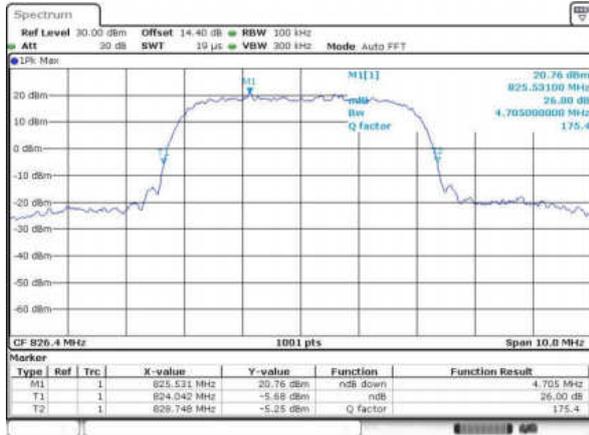

Date: 5 MAR 2016 22:21:34


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

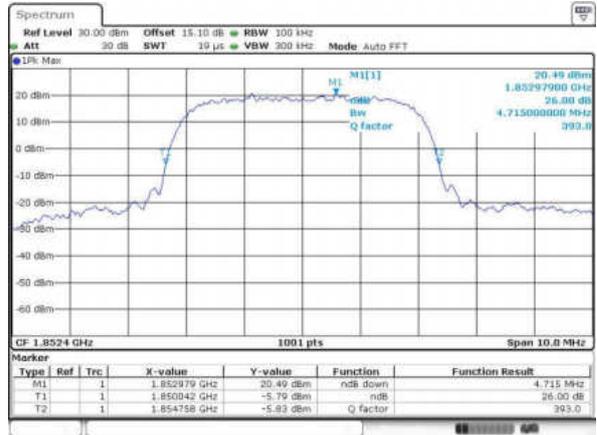


Date: 5 MAR 2016 23:06:21

Middle Channel

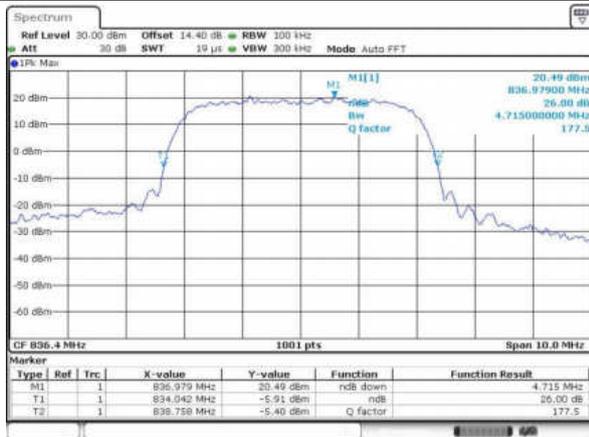


Date: 5 MAR 2016 22:22:11

Middle Channel

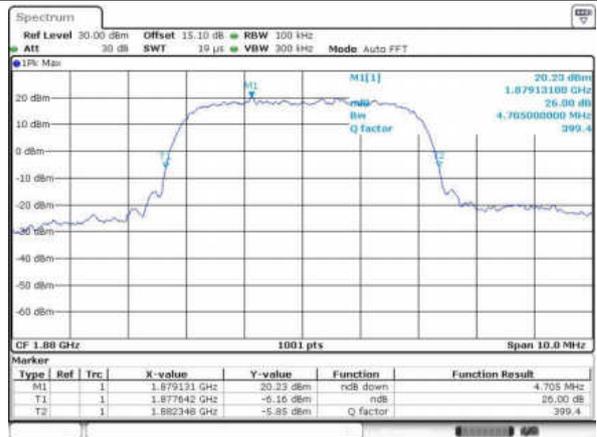


Date: 5 MAR 2016 23:07:06

Highest Channel

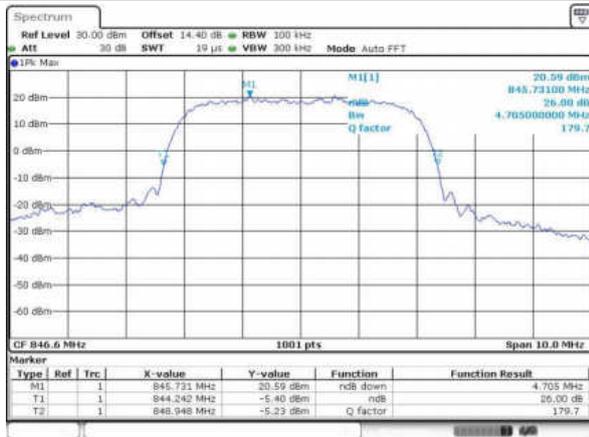

Date: 5 MAR 2016 22:23:06

Highest Channel

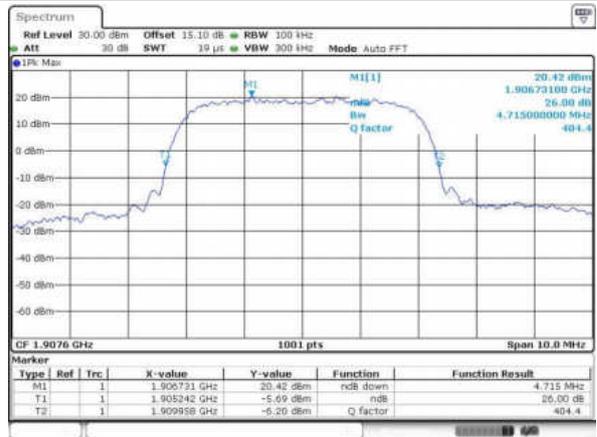


Date: 5 MAR 2016 23:07:45




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

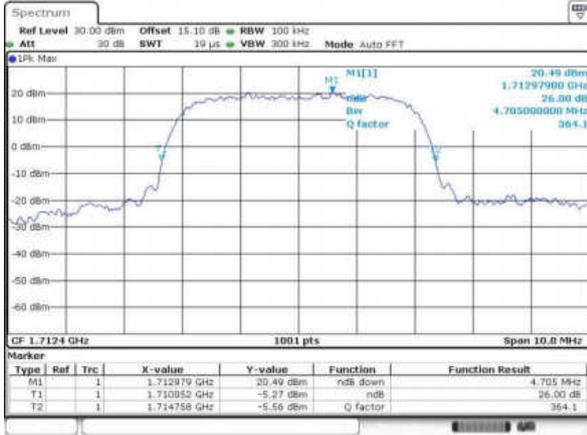


Date: 5 MAR 2016 22:48:58

Middle Channel

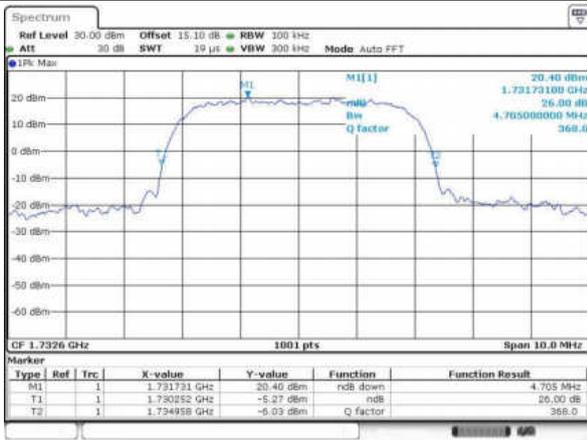

Date: 5 MAR 2016 22:47:35

Highest Channel

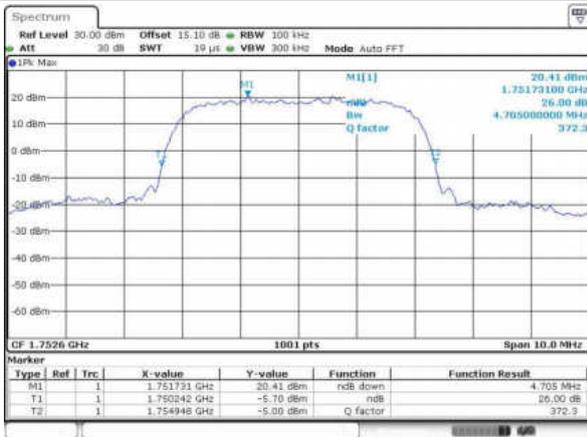


Date: 5 MAR 2016 22:48:12



CDMA BC0 (1xRTT)


Lowest Channel

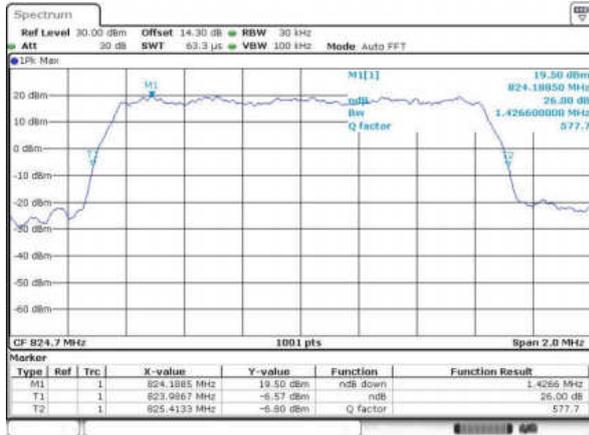

Date: 27 MAR 2018 09:31:31


CDMA BC1 (1xRTT)

Lowest Channel

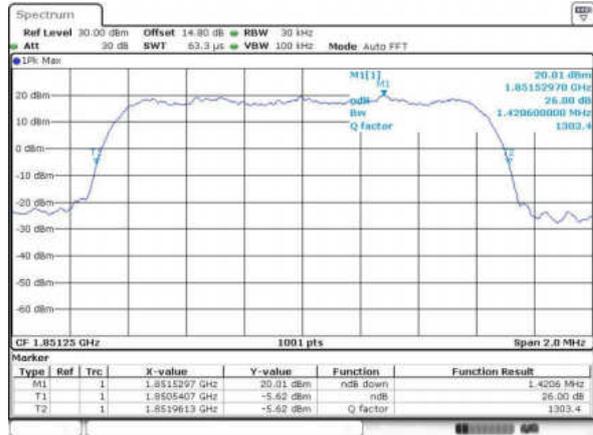


Date: 27 MAR 2018 10:20:32

Middle Channel

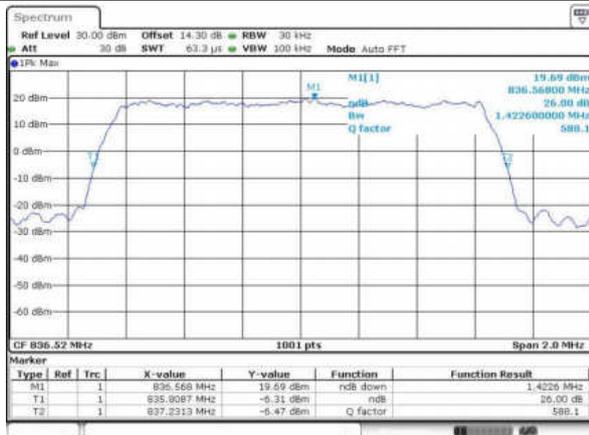


Date: 27 MAR 2018 09:32:10

Middle Channel

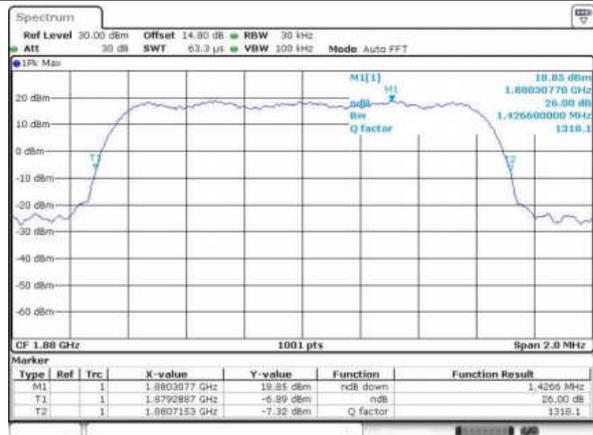


Date: 27 MAR 2018 10:21:25

Highest Channel

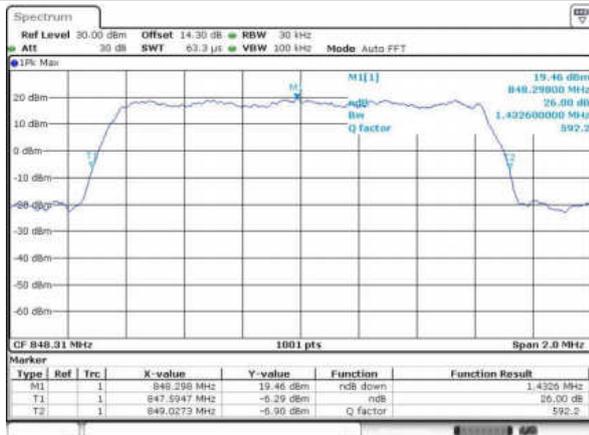

Date: 27 MAR 2018 09:32:39

Highest Channel

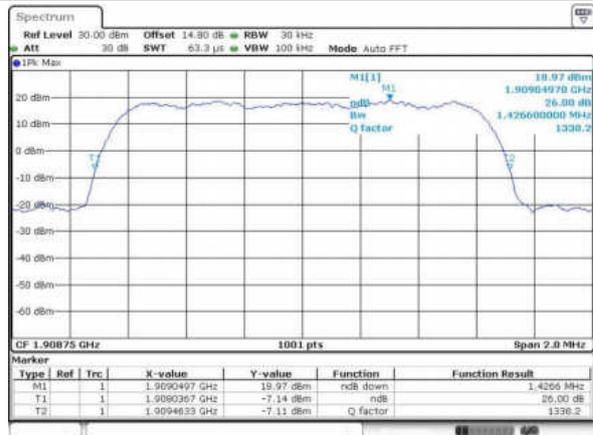

Date: 27 MAR 2018 10:22:02



Occupied Bandwidth

Mode	GSM850(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.242	0.244
Middle CH	0.243	0.245
Highest CH	0.243	0.244

Mode	GSM1900(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.242	0.250
Middle CH	0.244	0.245
Highest CH	0.239	0.246


Mode	WCDMA Band V(MHz)	WCDMA Band II(MHz)	WCDMA Band IV(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.12	4.12	4.12
Middle CH	4.13	4.13	4.13
Highest CH	4.13	4.13	4.12

Mode	CDMA BC0(MHz)	CDMA BC1(MHz)
Mod.	1xRTT	1xRTT
Lowest CH	1.27	1.27
Middle CH	1.28	1.27
Highest CH	1.28	1.27



GSM850 (GSM)


Lowest Channel

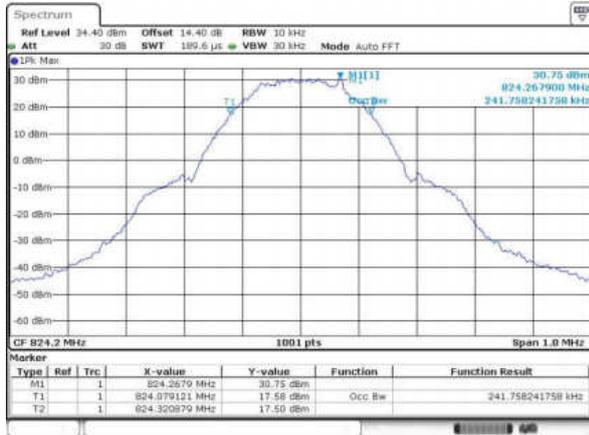

Date: 28 FEB 2018 23 03 00


GSM850 (EDGE class 8)

Lowest Channel

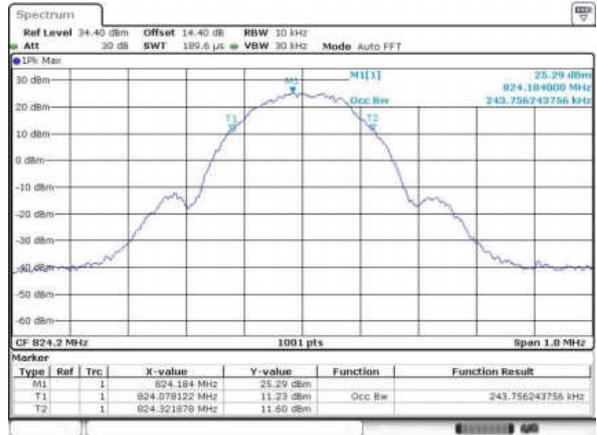

Date: 1 MAR 2018 00 17 57

Middle Channel

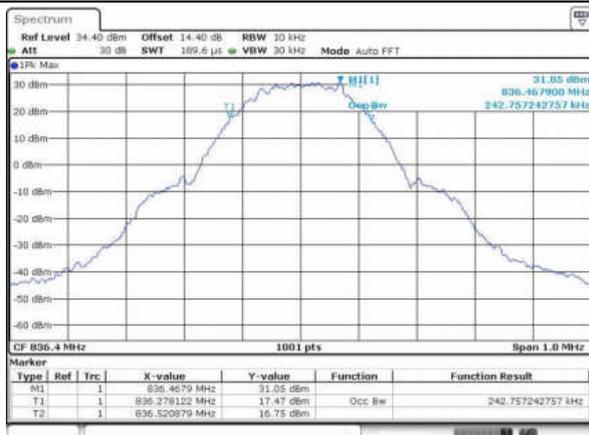


Date: 28 FEB 2018 23 04 18

Middle Channel




Date: 1 MAR 2018 00 18 28

Highest Channel

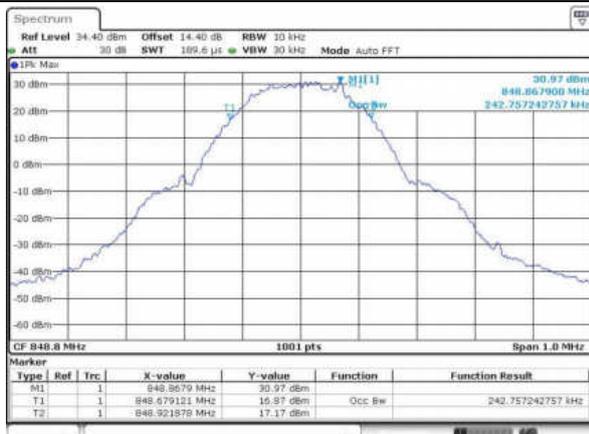

Date: 28 FEB 2018 23 04 47

Highest Channel

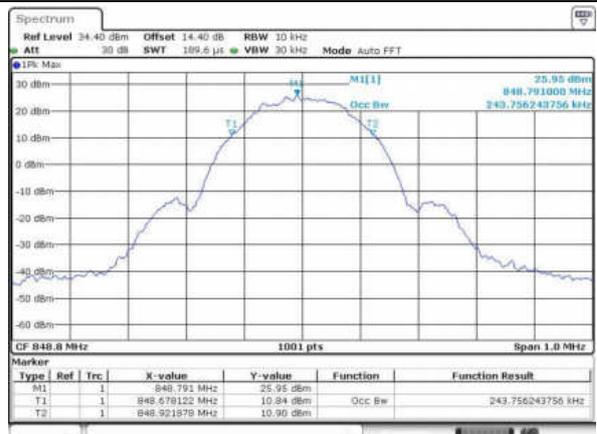

Date: 1 MAR 2018 00 19 05



GSM1900 (GSM)

Lowest Channel



Date: 1 MAR 2018 00:41:41

GSM1900 (EDGE class 8)

Lowest Channel




Date: 8 MAR 2019 10:37:11

Middle Channel



Date: 1 MAR 2018 00:42:10

Middle Channel

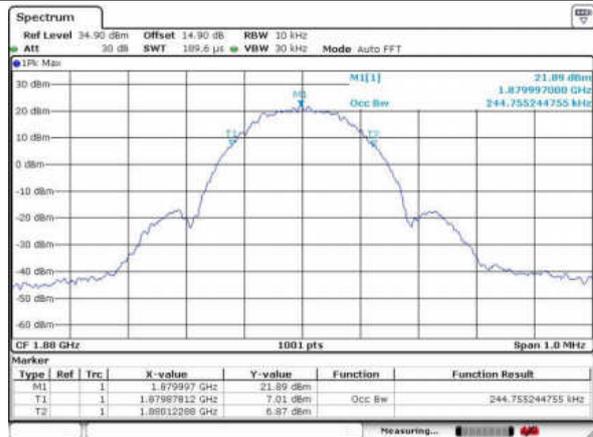


Date: 8 MAR 2019 10:36:43

Highest Channel




Date: 1 MAR 2018 00:42:38

Highest Channel

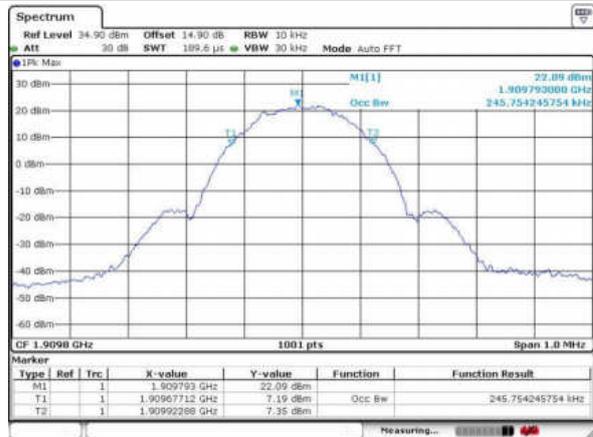


Date: 8 MAR 2019 10:36:03

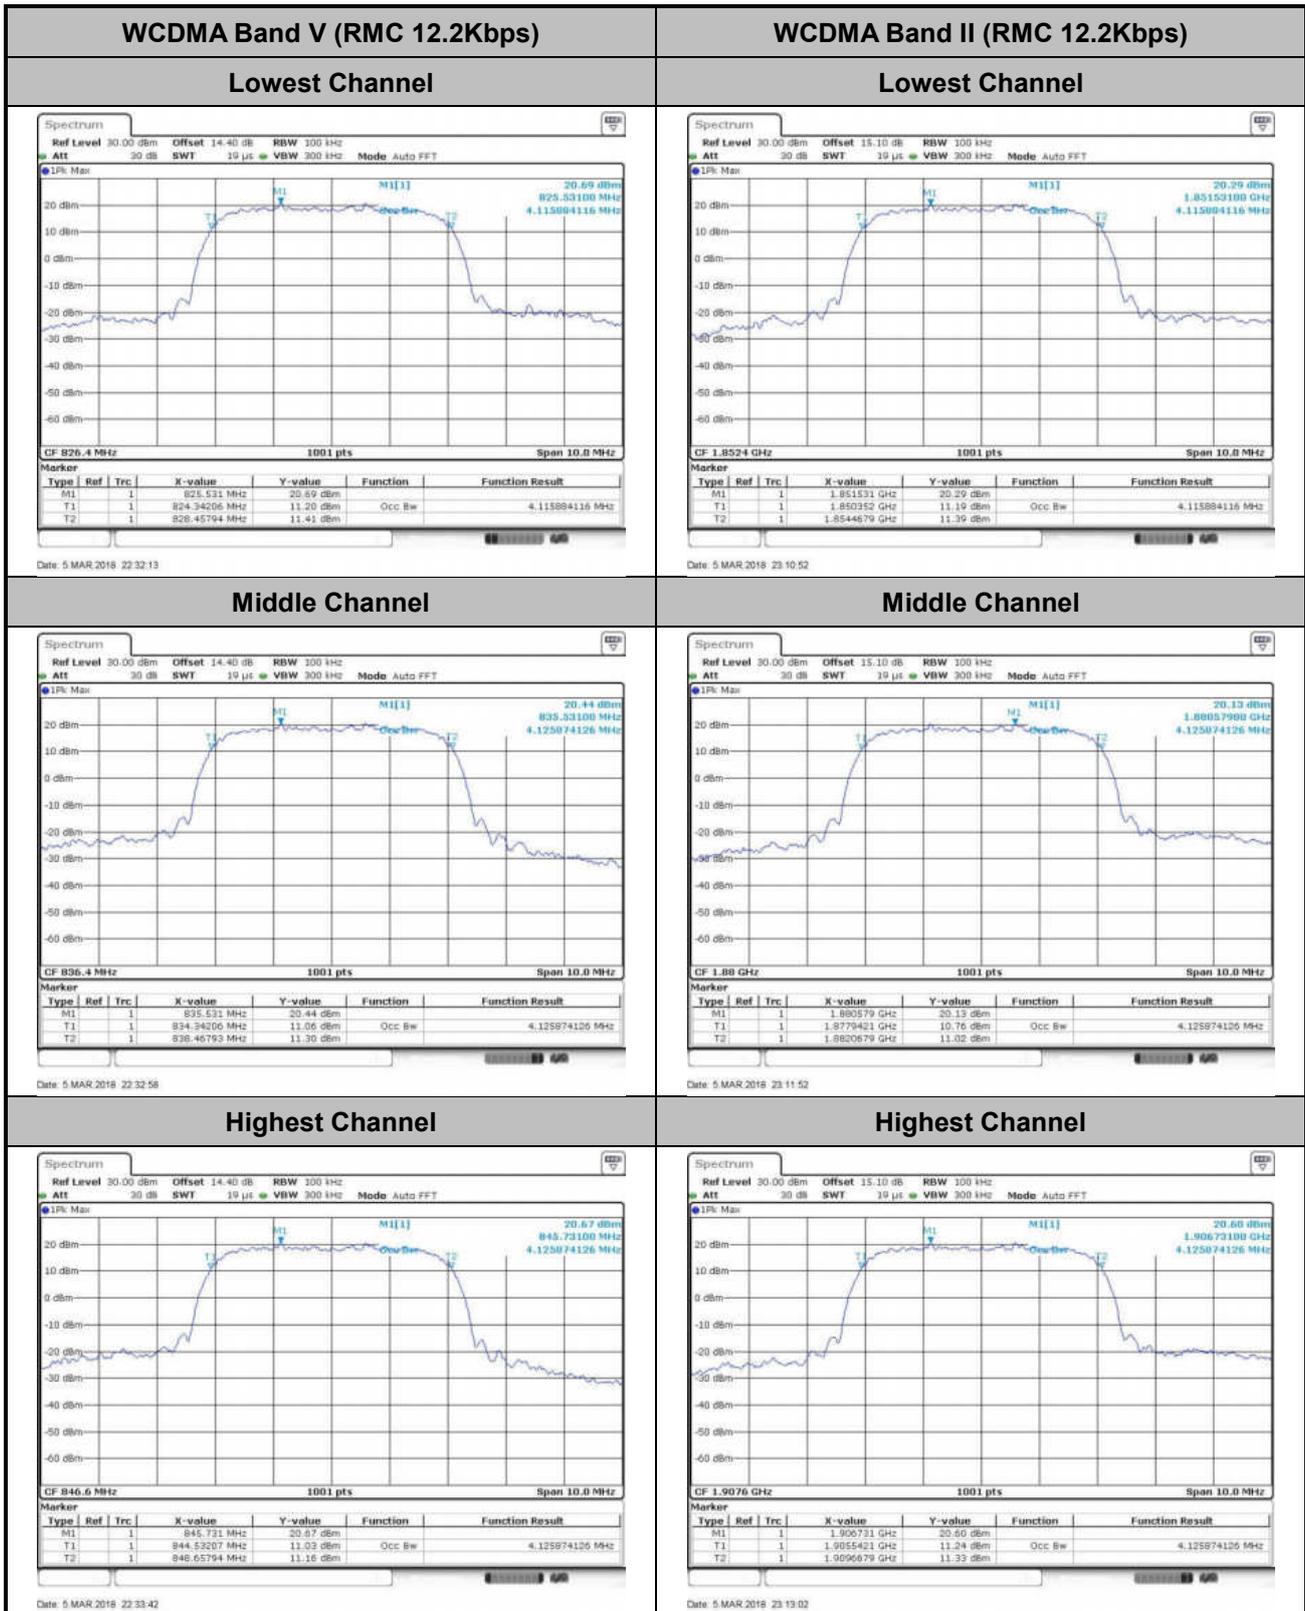




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

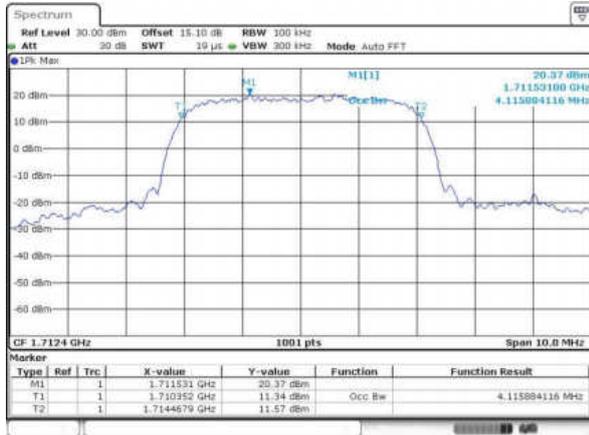


Date: 5 MAR 2016 22:51:57

Middle Channel

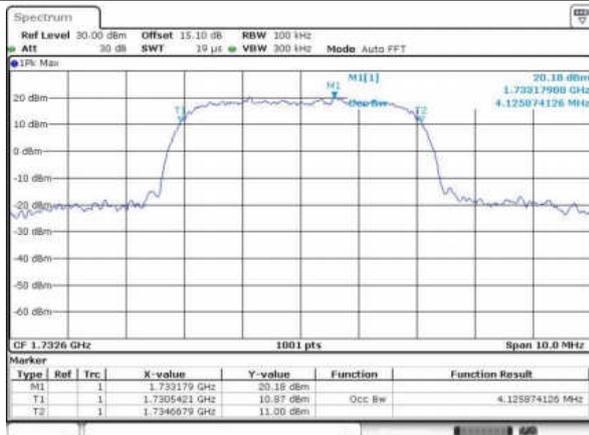

Date: 5 MAR 2016 22:52:33

Highest Channel

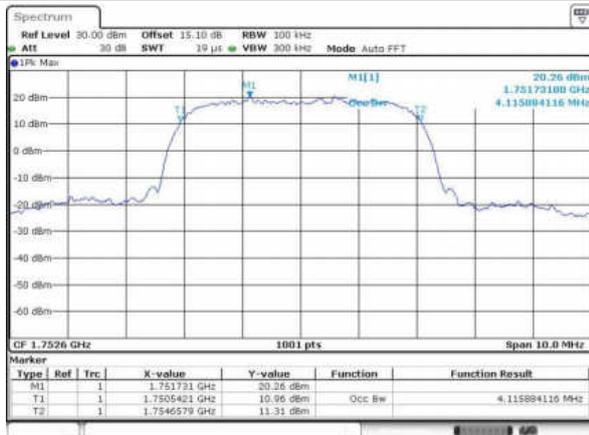


Date: 5 MAR 2016 22:53:09



CDMA BC0 (1xRTT)


Lowest Channel

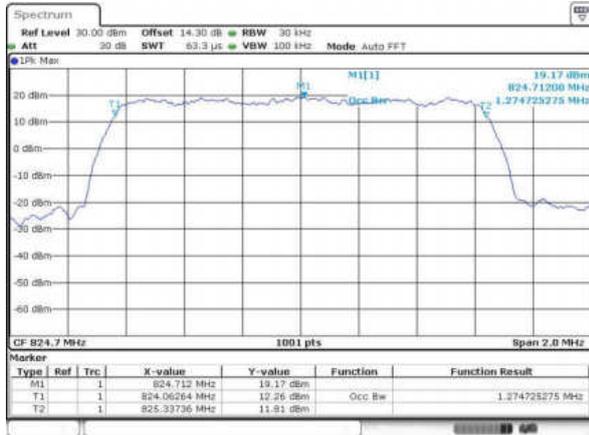

Date: 27 MAR 2018 09:36:17


CDMA BC1 (1xRTT)

Lowest Channel

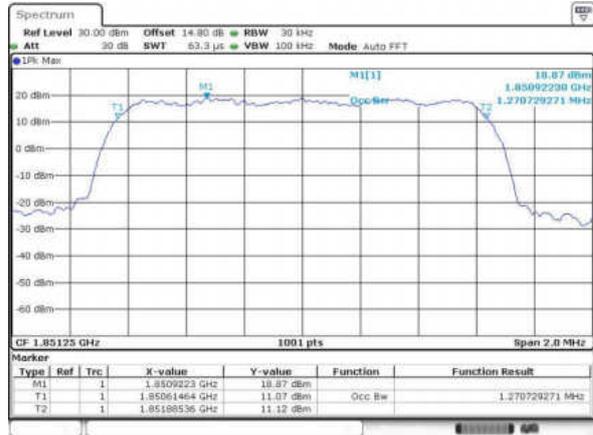


Date: 27 MAR 2018 10:22:38

Middle Channel

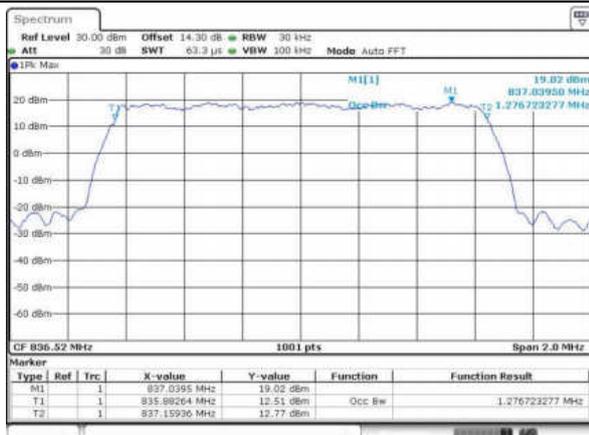


Date: 27 MAR 2018 09:36:51

Middle Channel

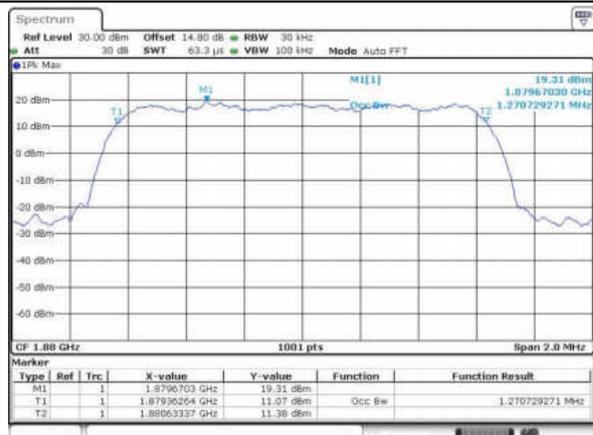


Date: 27 MAR 2018 10:23:11

Highest Channel

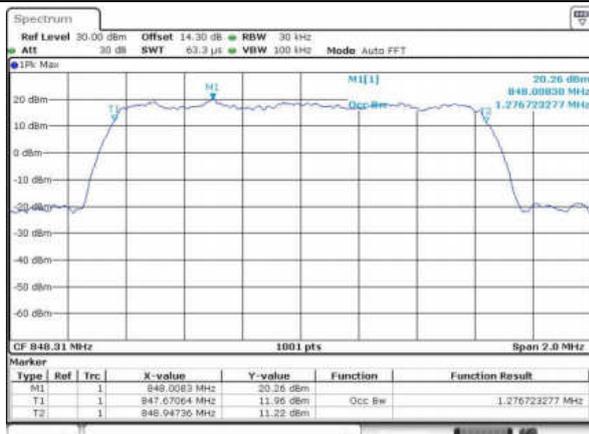

Date: 27 MAR 2018 09:37:24


Highest Channel


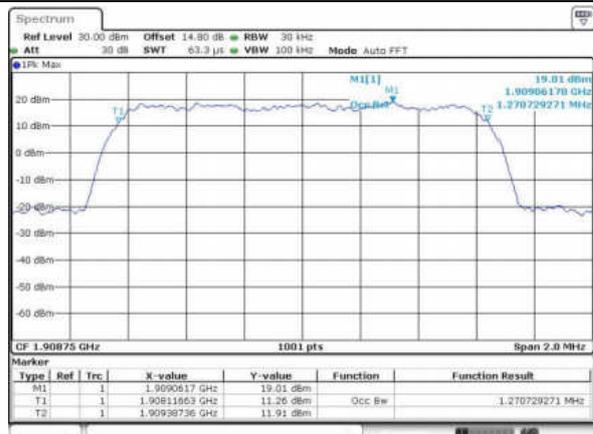


Date: 27 MAR 2018 10:23:46



Conducted Band Edge

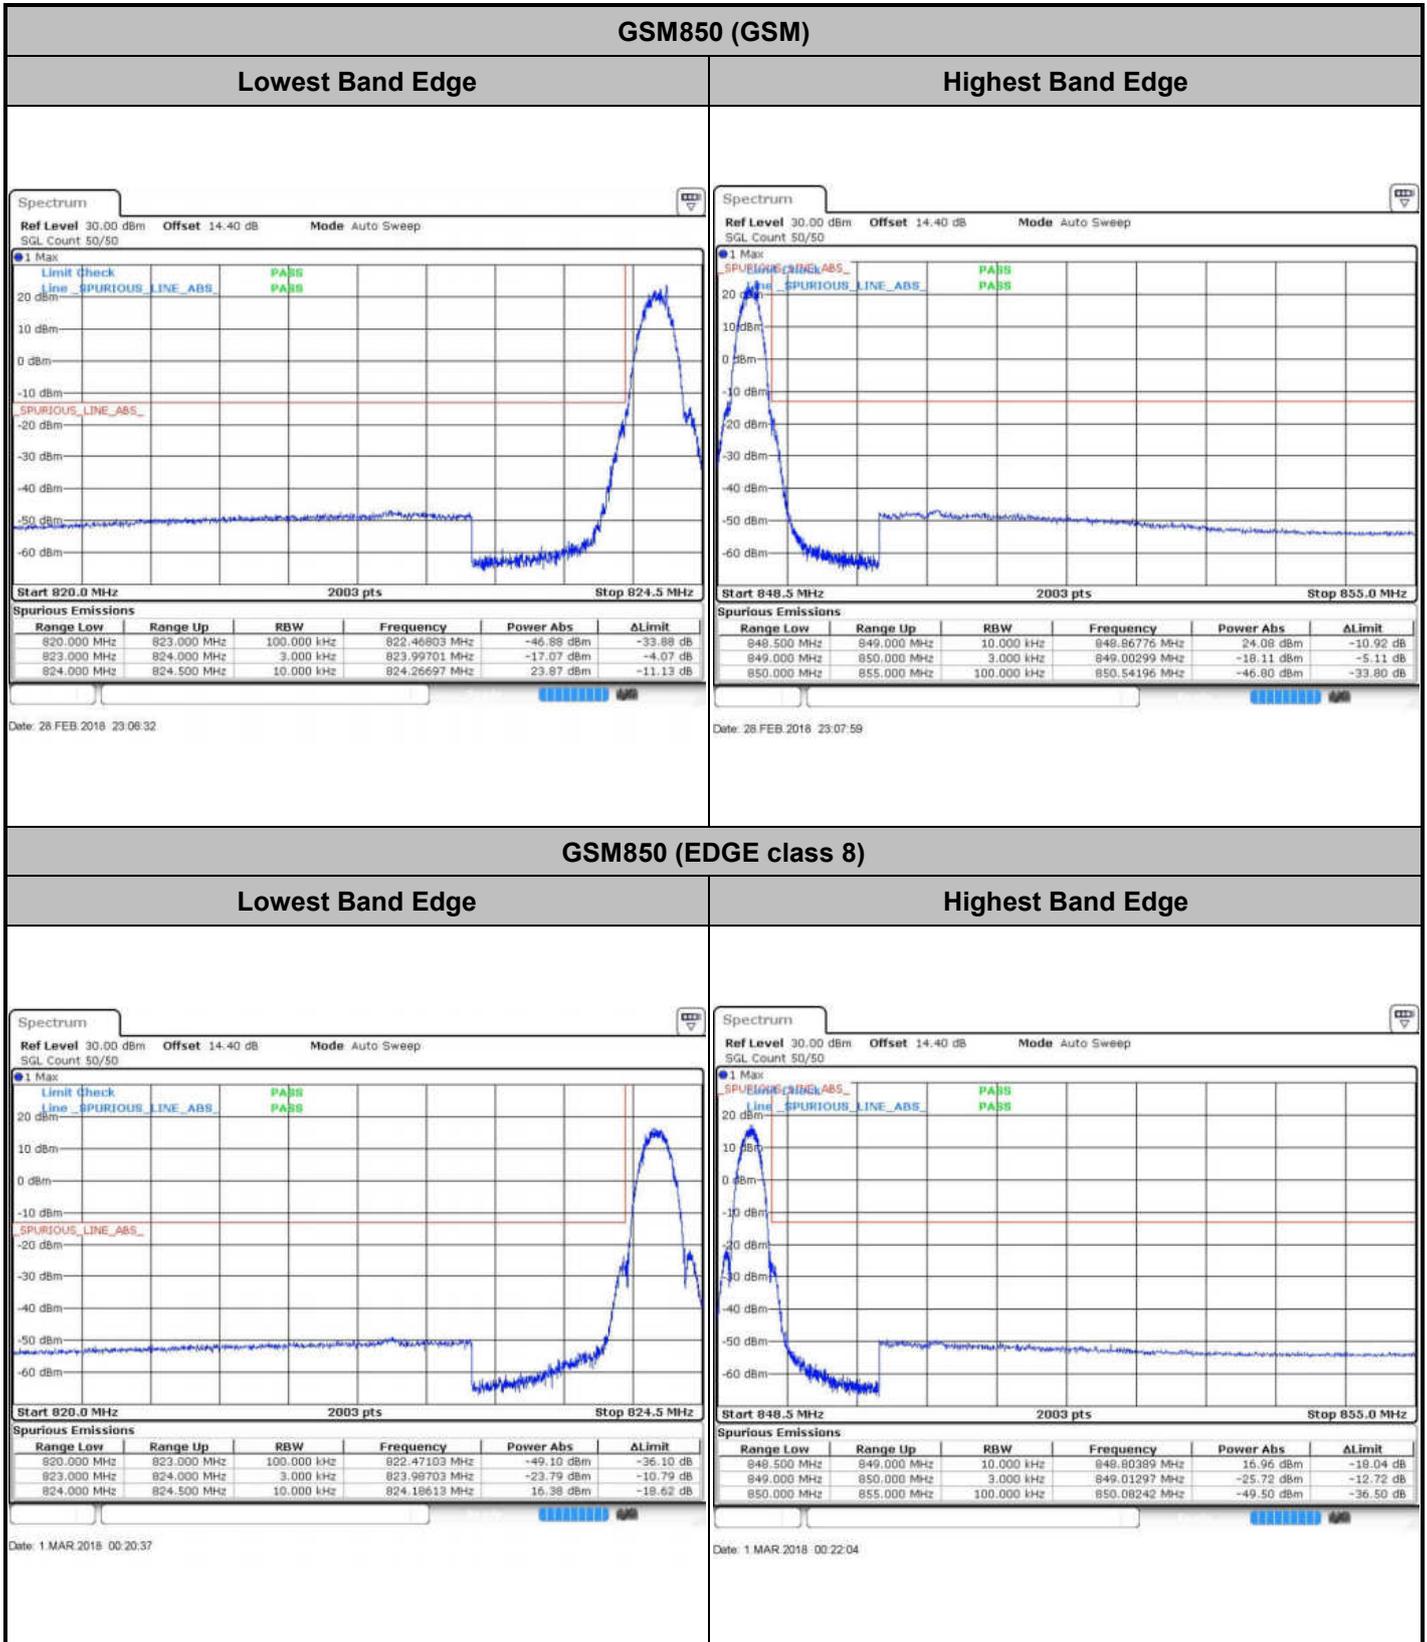

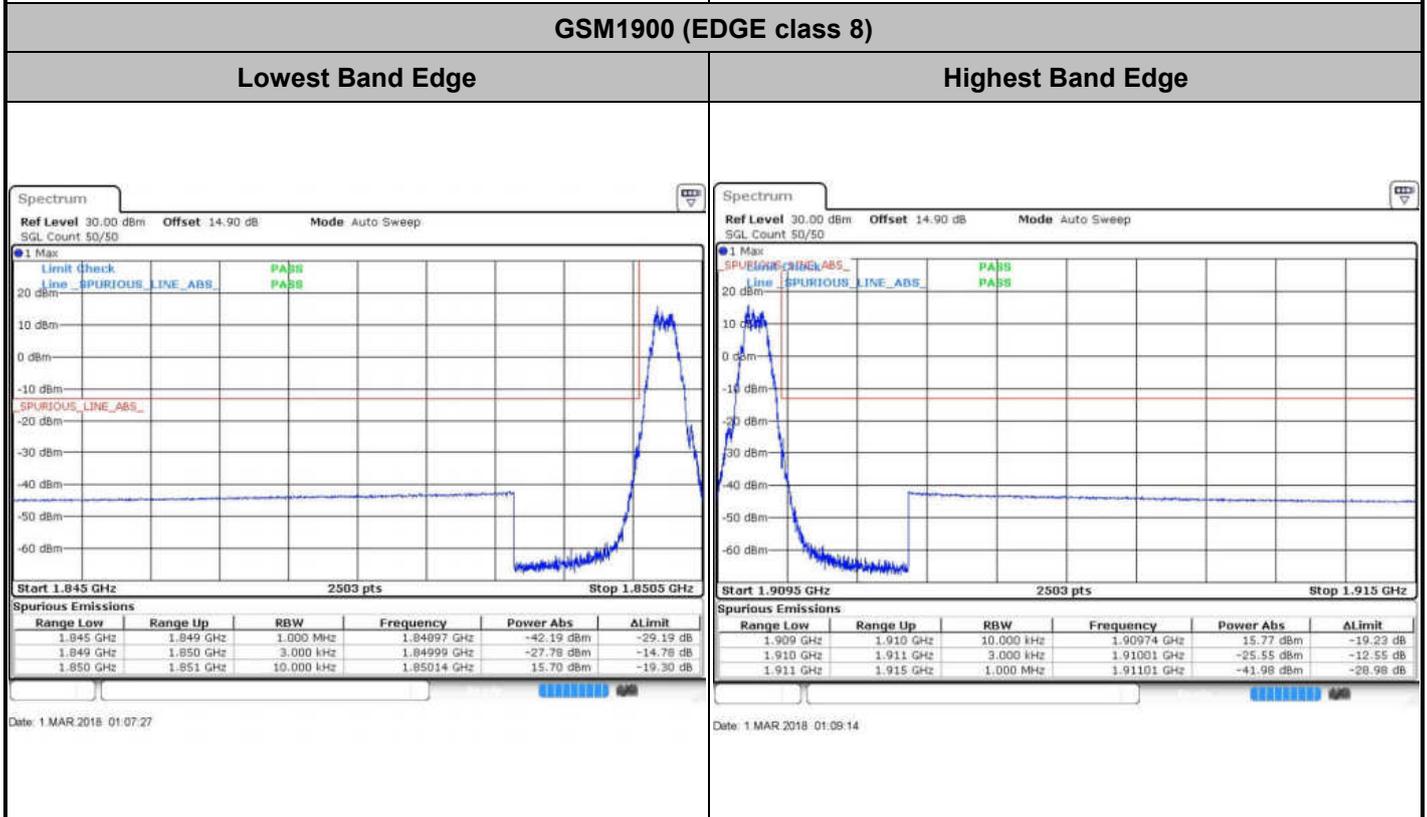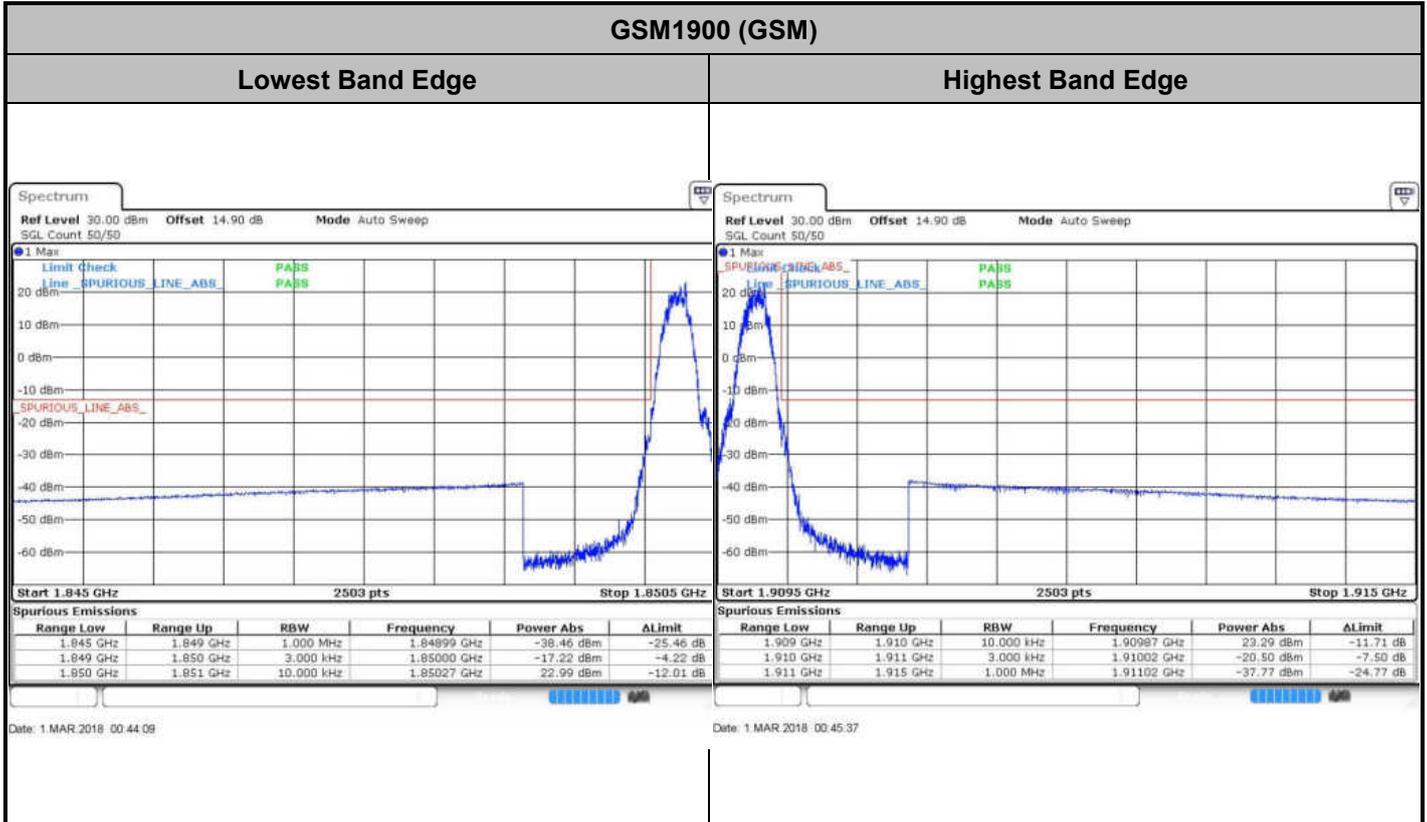




WCDMA Band V (RMC 12.2Kbps)




WCDMA Band II (RMC 12.2Kbps)




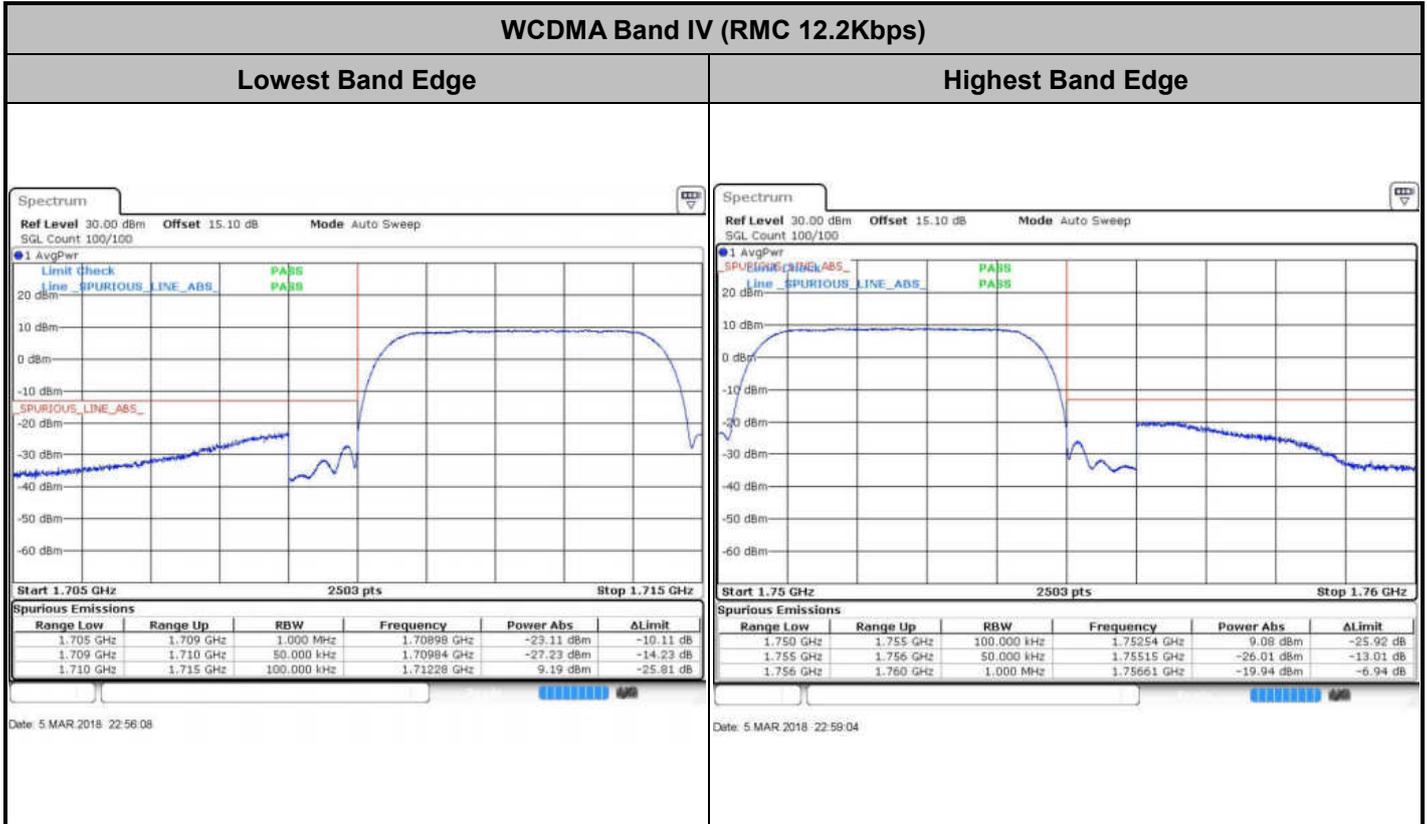




CDMA BC0 (1xRTT)

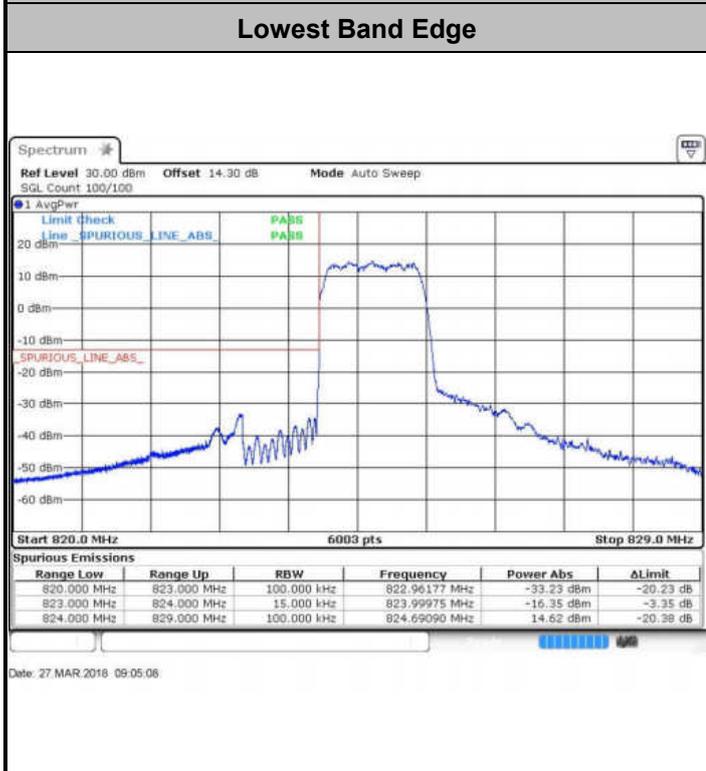


CDMA BC1 (1xRTT)

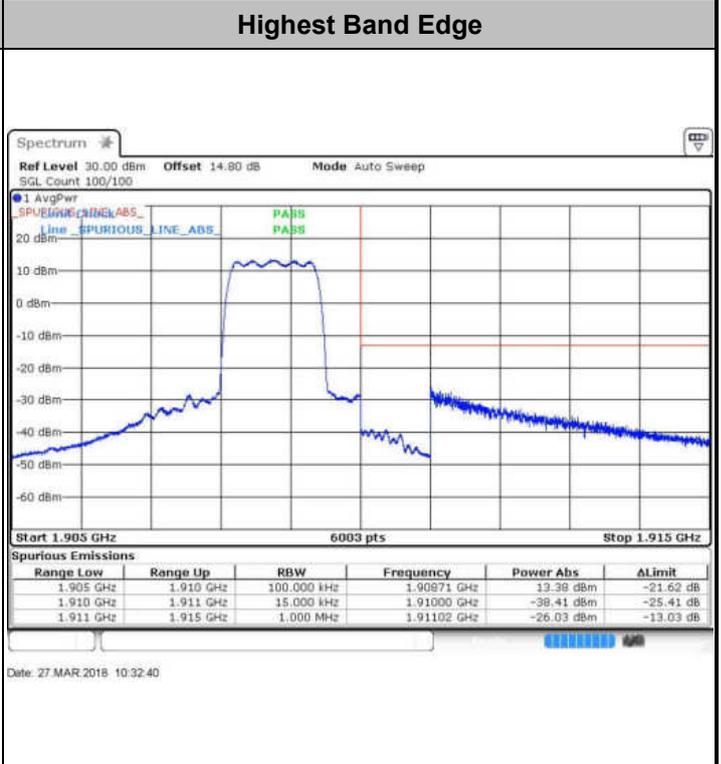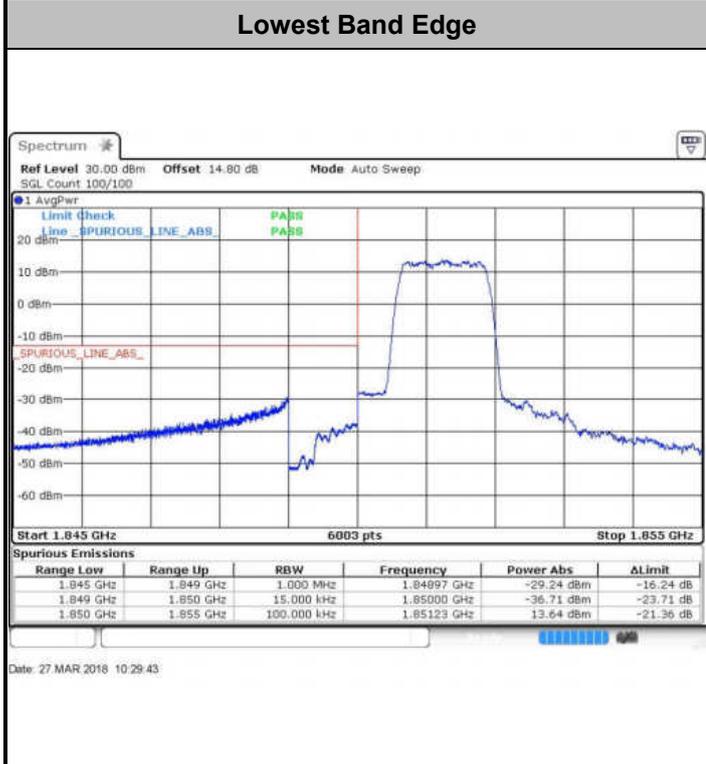




Conducted Spurious Emission

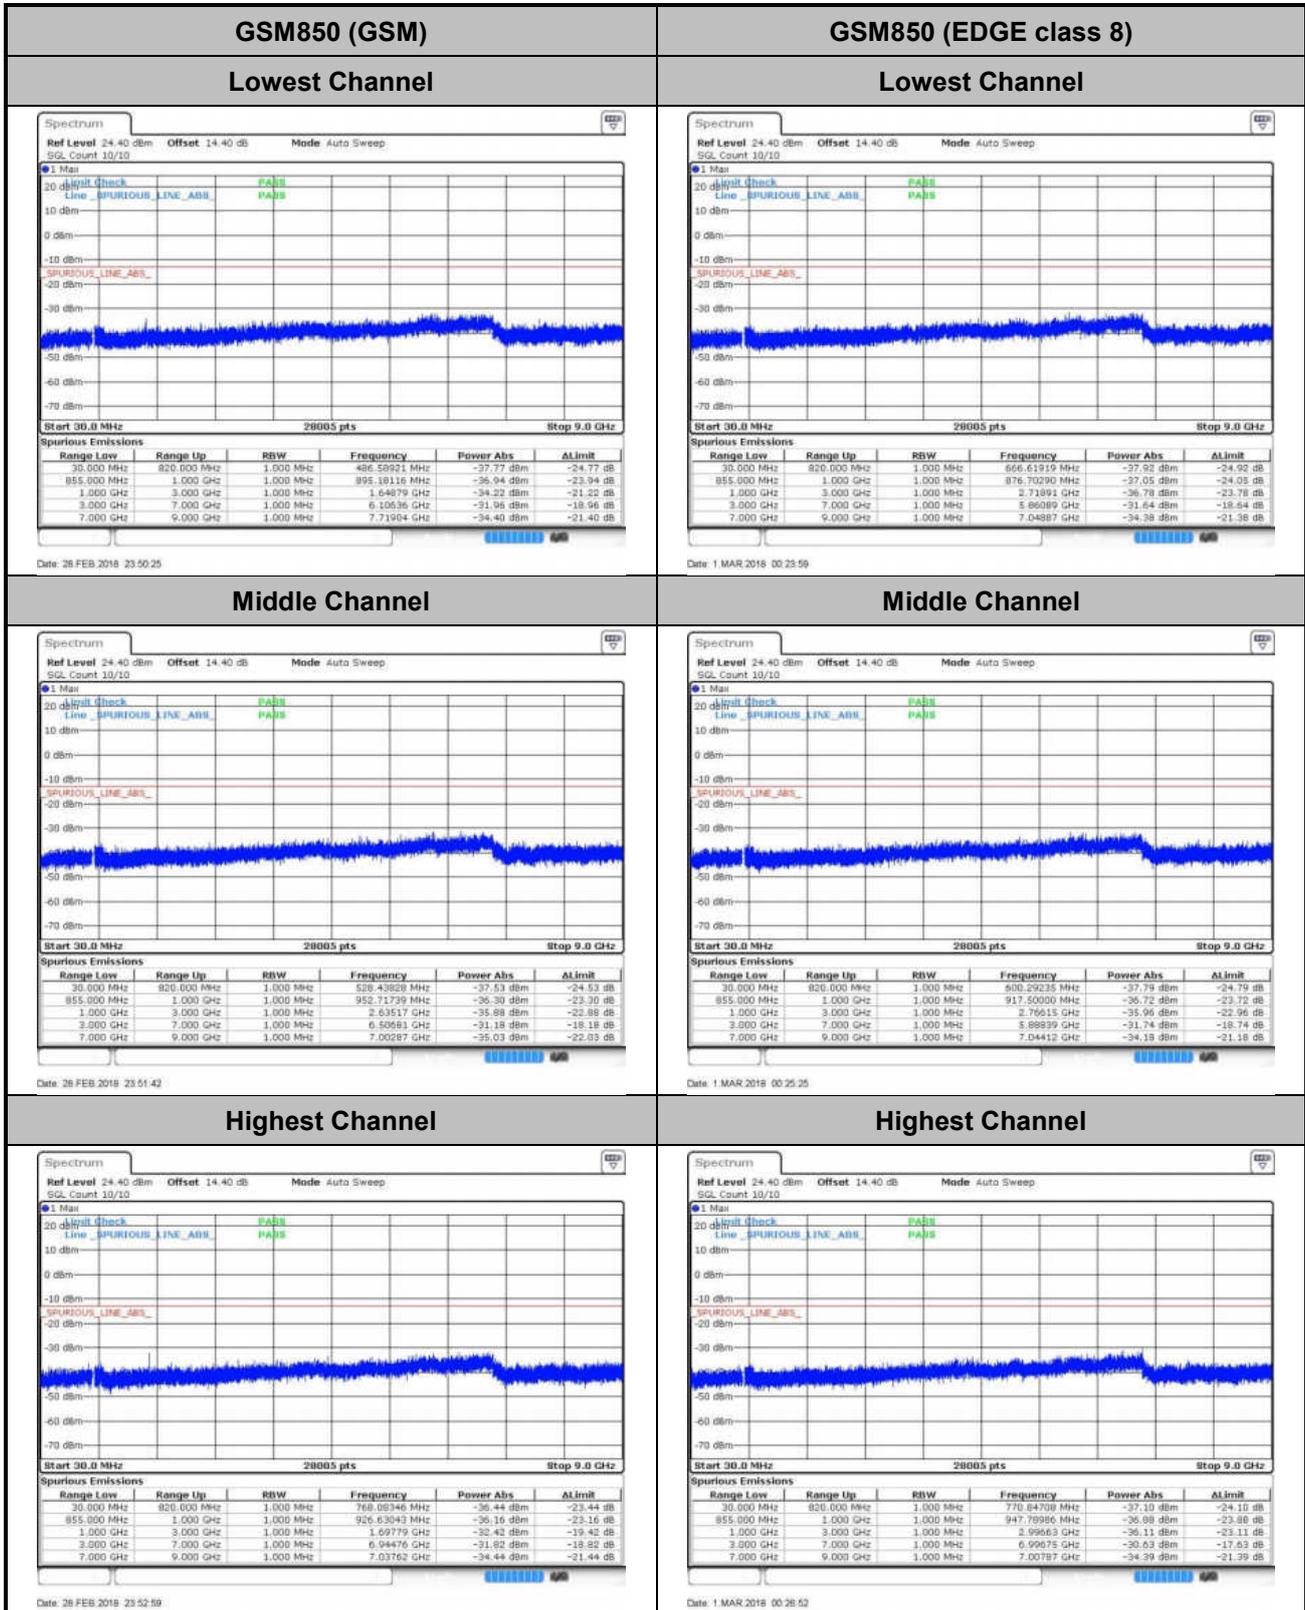



GSM1900 (GSM)


Lowest Channel

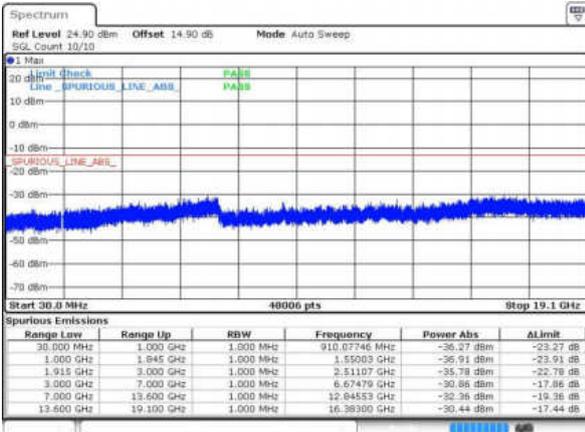

Date: 1 MAR 2018 00:47:10


GSM1900 (EDGE class 8)

Lowest Channel

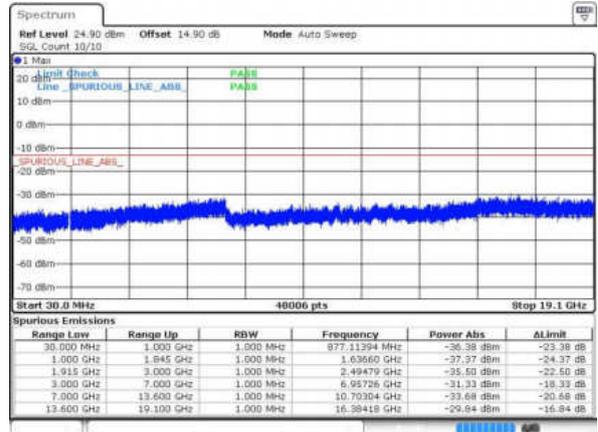


Date: 1 MAR 2018 01:10:41

Middle Channel

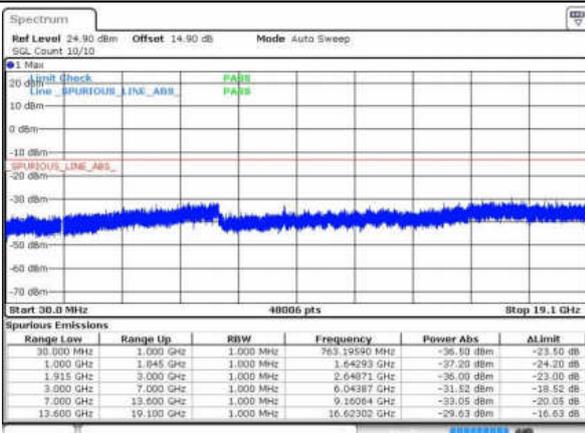


Date: 1 MAR 2018 00:48:27

Middle Channel

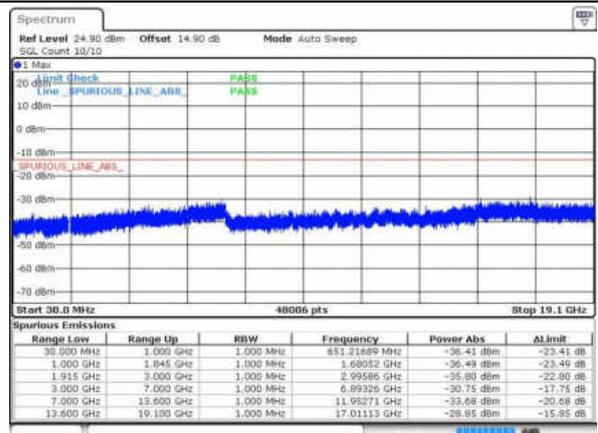


Date: 1 MAR 2018 01:12:18

Highest Channel

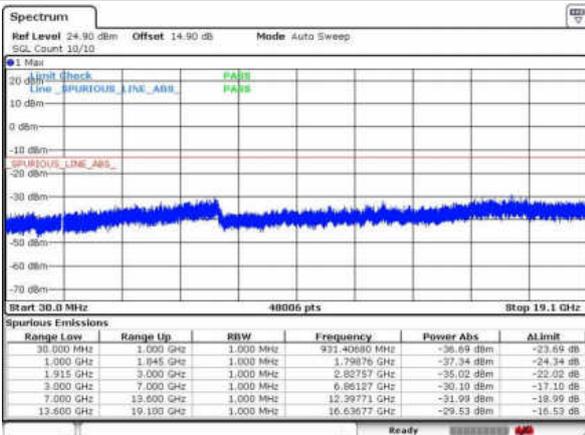

Date: 2 MAR 2018 03:05:24

Highest Channel

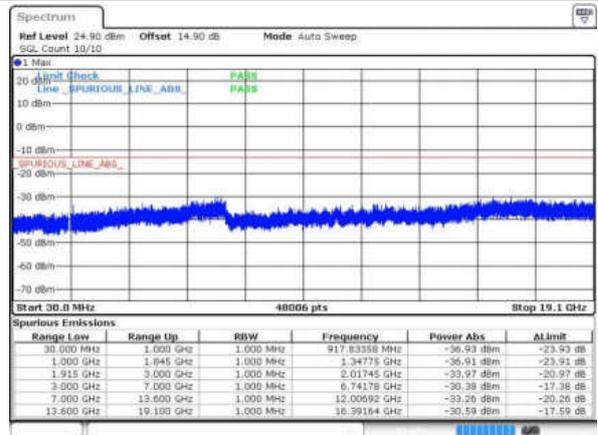


Date: 1 MAR 2018 01:13:47



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

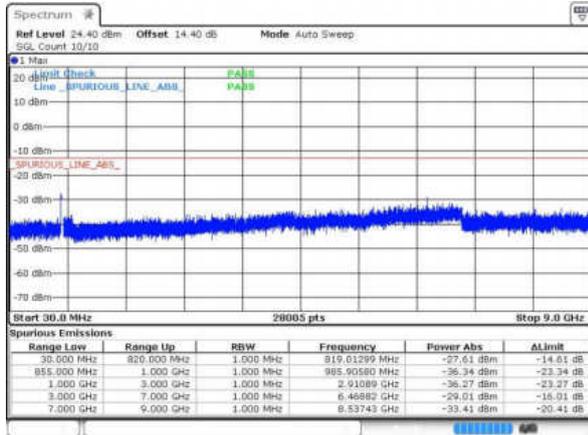

Date: 5 MAR 2016 22:40:51


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

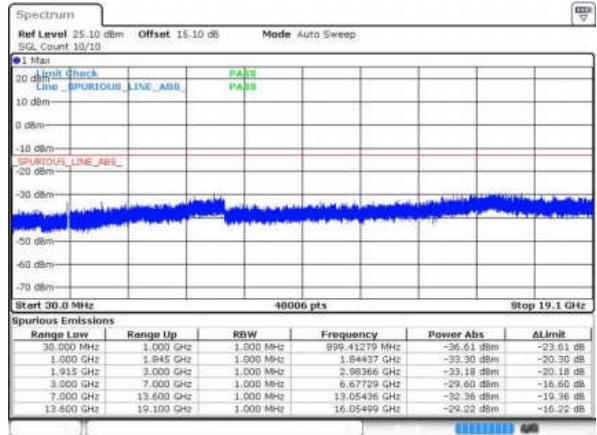


Date: 5 MAR 2016 23:21:21

Middle Channel

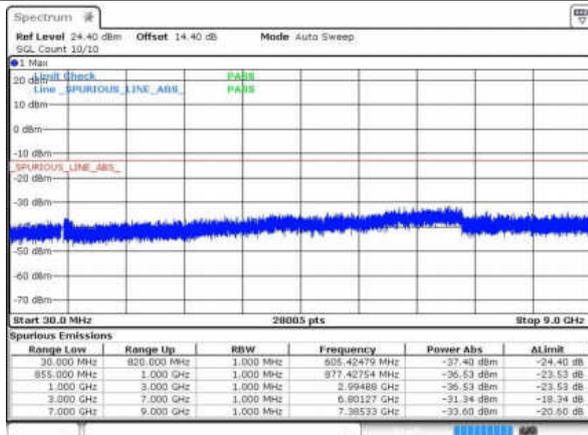


Date: 5 MAR 2016 22:42:19

Middle Channel

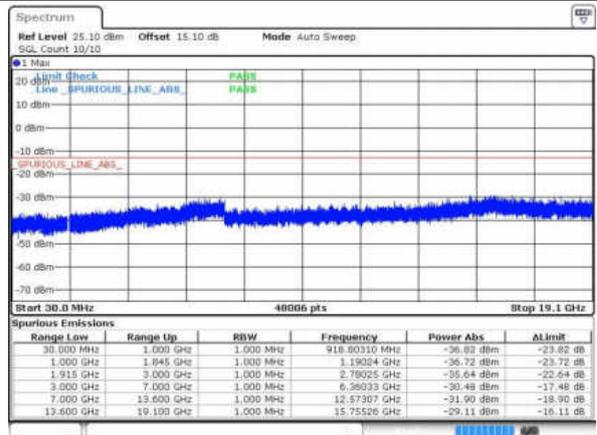


Date: 5 MAR 2016 23:22:48

Highest Channel

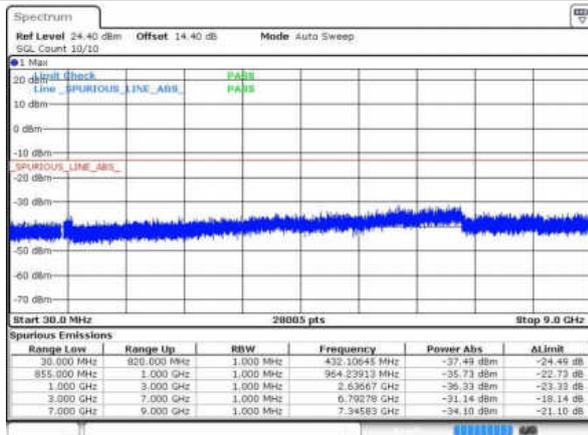

Date: 5 MAR 2016 22:43:41

Highest Channel

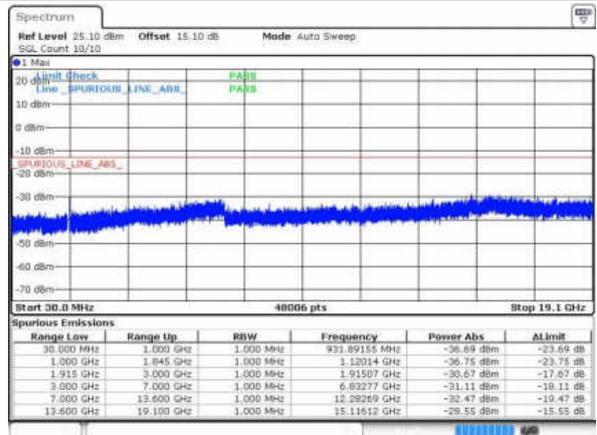


Date: 5 MAR 2016 23:24:35




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

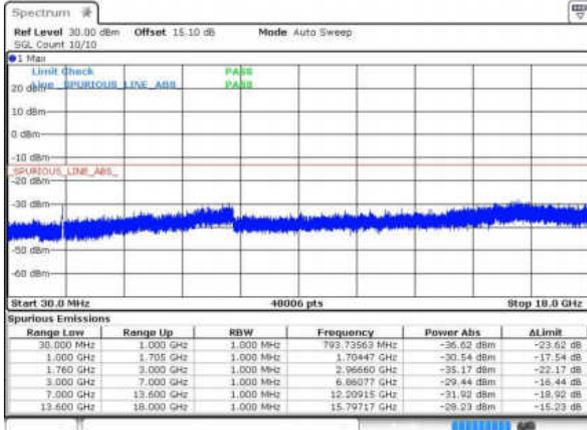


Date: 5 MAR 2018 23:00:40

Middle Channel

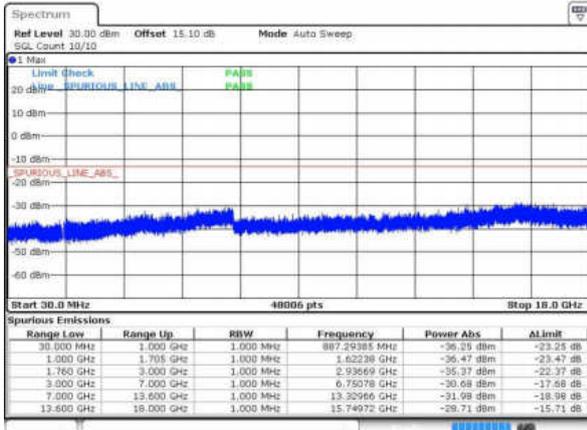

Date: 5 MAR 2018 23:02:13

Highest Channel

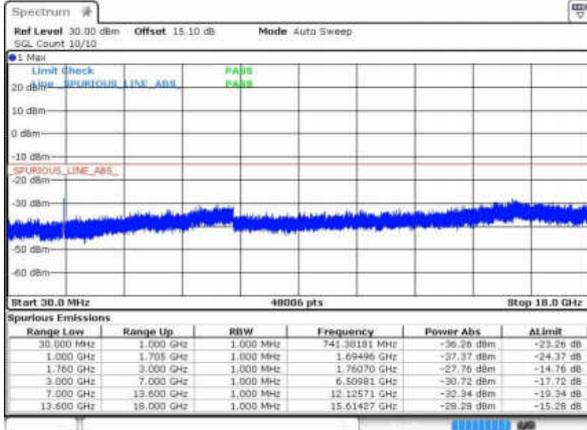


Date: 5 MAR 2018 23:03:39



CDMA BC0 (1xRTT)


Lowest Channel

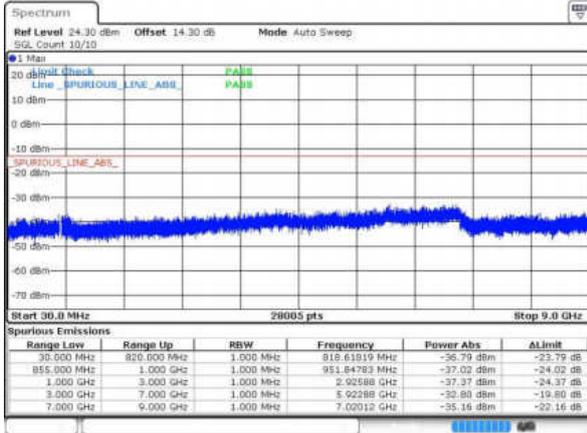

Date: 27 MAR 2018 09:38:49


CDMA BC1 (1xRTT)

Lowest Channel

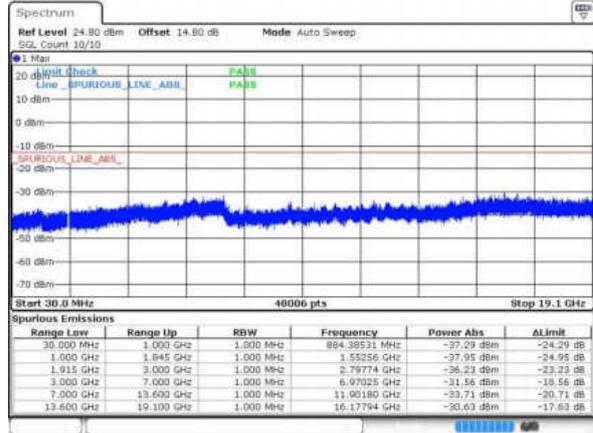


Date: 27 MAR 2018 10:34:48

Middle Channel

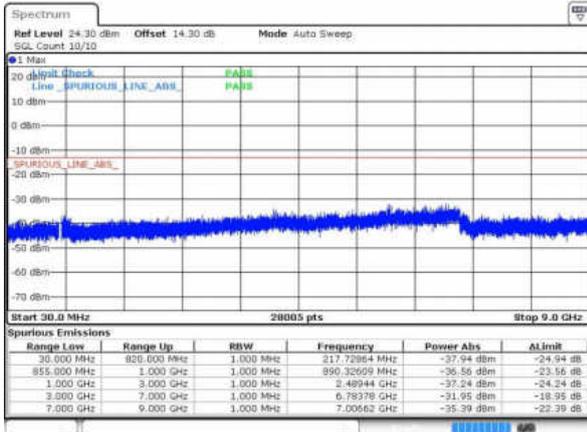


Date: 27 MAR 2018 09:40:11

Middle Channel

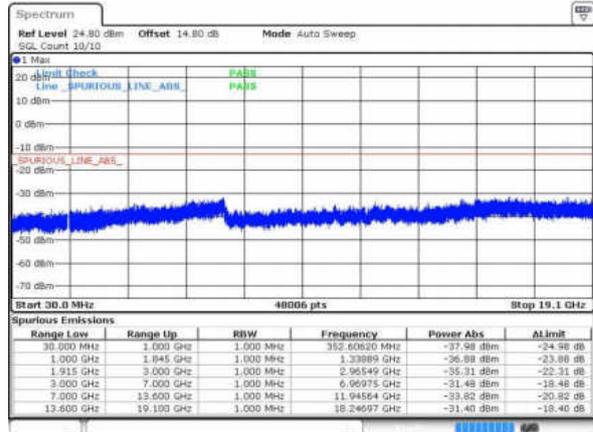


Date: 27 MAR 2018 10:38:09

Highest Channel

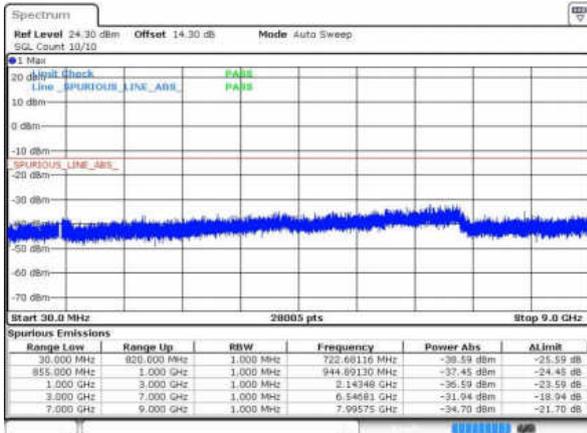

Date: 27 MAR 2018 09:41:28

Highest Channel

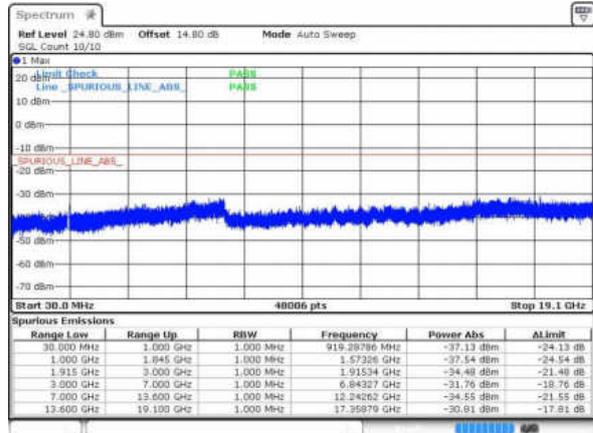

Date: 27 MAR 2018 10:37:31



Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0108	0.0275	PASS
40	Normal Voltage	0.0036	0.0239	
30	Normal Voltage	0.0132	0.0084	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0167	0.0167	
0	Normal Voltage	0.0072	0.0167	
-10	Normal Voltage	0.0203	0.0227	
-20	Normal Voltage	0.0155	0.0060	
-30	Normal Voltage	0.0143	0.0108	
20	Maximum Voltage	0.0096	0.0132	
20	Normal Voltage	0.0120	0.0203	
20	Battery End Point	0.0191	0.0036	

Note: Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.7 V. ; Maximum Voltage =4.4 V



Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0053	0.0181	PASS
40	Normal Voltage	0.0005	0.0133	
30	Normal Voltage	0.0117	0.0027	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0133	0.0106	
0	Normal Voltage	0.0106	0.0149	
-10	Normal Voltage	0.0090	0.0170	
-20	Normal Voltage	0.0027	0.0122	
-30	Normal Voltage	0.0128	0.0117	
20	Maximum Voltage	0.0069	0.0021	
20	Normal Voltage	0.0016	0.0138	
20	Battery End Point	0.0128	0.0027	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.7 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0084	PASS
40	Normal Voltage	0.0287	
30	Normal Voltage	0.0024	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0359	
0	Normal Voltage	0.0251	
-10	Normal Voltage	0.0060	
-20	Normal Voltage	0.0299	
-30	Normal Voltage	0.0036	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0239	
20	Battery End Point	0.0263	

Note: Normal Voltage = 3.85V. : Battery End Point (BEP) = 3.7 V. : Maximum Voltage =4.4 V



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0005	PASS
40	Normal Voltage	0.0101	
30	Normal Voltage	0.0112	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0165	
0	Normal Voltage	0.0048	
-10	Normal Voltage	0.0122	
-20	Normal Voltage	0.0154	
-30	Normal Voltage	0.0021	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0096	
20	Battery End Point	0.0032	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.7 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0035	PASS
40	Normal Voltage	0.0029	
30	Normal Voltage	0.0150	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0023	
0	Normal Voltage	0.0127	
-10	Normal Voltage	0.0035	
-20	Normal Voltage	0.0144	
-30	Normal Voltage	0.0046	
20	Maximum Voltage	0.0017	
20	Normal Voltage	0.0133	
20	Battery End Point	0.0035	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.7 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	CDMA BC0 (1xRTT)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0012	PASS
40	Normal Voltage	0.0155	
30	Normal Voltage	0.0072	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0048	
0	Normal Voltage	0.0215	
-10	Normal Voltage	0.0048	
-20	Normal Voltage	0.0179	
-30	Normal Voltage	0.0251	
20	Maximum Voltage	0.0024	
20	Normal Voltage	0.0084	
20	Battery End Point	0.0191	

Note: Normal Voltage = 3.85V. : Battery End Point (BEP) = 3.7 V. : Maximum Voltage =4.4 V



Test Conditions	Middle Channel	CDMA BC1 (1xRTT)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0037	PASS
40	Normal Voltage	0.0027	
30	Normal Voltage	0.0011	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0064	
0	Normal Voltage	0.0085	
-10	Normal Voltage	0.0005	
-20	Normal Voltage	0.0096	
-30	Normal Voltage	0.0128	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0133	
20	Battery End Point	0.0011	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.7 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

GSM850 (GSM)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-46.87	-13	-33.87	-48.78	1.14	5.20	H
	2510	-50.28	-13	-37.28	-52.91	1.12	5.90	H
	3345	-64.69	-13	-51.69	-67.90	1.34	6.70	H
	1672	-48.56	-13	-35.56	-50.47	1.14	5.20	V
	2508	-54.69	-13	-41.69	-57.32	1.12	5.90	V
	3345	-64.67	-13	-51.67	-67.88	1.34	6.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE class 8)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-60.86	-13	-47.86	-62.77	1.14	5.20	H
	2510	-61.94	-13	-48.94	-64.57	1.12	5.90	H
	3345	-64.39	-13	-51.39	-67.60	1.34	6.70	H
	1672	-62.26	-13	-49.26	-64.17	1.14	5.20	V
	2510	-64.09	-13	-51.09	-66.72	1.12	5.90	V
	3345	-65.11	-13	-52.11	-68.32	1.34	6.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3759	-40.47	-13	-27.47	-45.64	1.83	7.00	H
	5640	-54.08	-13	-41.08	-61.70	2.18	9.80	H
	7521	-53.56	-13	-40.56	-63.23	2.53	12.20	H
	3759	-35.17	-13	-22.17	-40.34	1.83	7.00	V
	5640	-54.80	-13	-41.80	-62.42	2.18	9.80	V
	7521	-53.42	-13	-40.42	-63.09	2.53	12.20	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (EDGE class 8)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3759	-60.67	-13	-47.67	-65.84	1.83	7.00	H
	5640	-57.88	-13	-44.88	-65.50	2.18	9.80	H
	7521	-54.21	-13	-41.21	-63.88	2.53	12.20	H
	3759	-60.53	-13	-47.53	-65.70	1.83	7.00	V
	5640	-59.43	-13	-46.43	-67.05	2.18	9.80	V
	7521	-54.12	-13	-41.12	-63.79	2.53	12.20	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-66.70	-13	-53.70	-68.61	1.14	5.20	H
	2510	-64.56	-13	-51.56	-67.19	1.12	5.90	H
	3345	-64.33	-13	-51.33	-67.54	1.34	6.70	H
	1672	-66.93	-13	-53.93	-68.84	1.14	5.20	V
	2510	-64.76	-13	-51.76	-67.39	1.12	5.90	V
	3345	-64.81	-13	-51.81	-68.02	1.34	6.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II(RMC 12.2Kbps)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3759	-63.76	-13	-50.76	-68.93	1.83	7.00	H
	5640	-59.91	-13	-46.91	-67.53	2.18	9.80	H
	7521	-53.36	-13	-40.36	-63.03	2.53	12.20	H
	3759	-63.38	-13	-50.38	-68.55	1.83	7.00	V
	5640	-59.99	-13	-46.99	-67.61	2.18	9.80	V
	7521	-53.97	-13	-40.97	-63.64	2.53	12.20	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band IV(RMC 12.2Kbps)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465	-63.94	-13	-50.94	-69.08	1.81	6.95	H
	5198	-60.26	-13	-47.26	-67.33	2.23	9.30	H
	6930	-56.36	-13	-43.36	-64.64	2.60	10.88	H
	3465	-64.35	-13	-51.35	-69.49	1.81	6.95	V
	5198	-60.89	-13	-47.89	-67.96	2.23	9.30	V
	6930	-57.18	-13	-44.18	-65.46	2.6	10.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



CDMA BC0(1xRTT)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-64.76	-13	-51.76	-66.67	1.14	5.20	H
	2510	-59.48	-13	-46.48	-62.11	1.12	5.90	H
	3345	-64.19	-13	-51.19	-67.40	1.34	6.70	H
	1674	-62.39	-13	-49.39	-64.30	1.14	5.20	V
	2510	-57.32	-13	-44.32	-59.95	1.12	5.90	V
	3345	-64.59	-13	-51.59	-67.80	1.34	6.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

CDMA BC1(1xRTT)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3759	-58.48	-13	-45.48	-63.65	1.83	7.00	H
	5640	-59.27	-13	-46.27	-66.89	2.18	9.80	H
	7521	-53.21	-13	-40.21	-62.88	2.53	12.20	H
	3759	-55.82	-13	-42.82	-60.99	1.83	7.00	V
	5640	-59.82	-13	-46.82	-67.44	2.18	9.80	V
	7521	-54.17	-13	-41.17	-63.84	2.53	12.20	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.