



FCC SAR Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : MI
MODEL NAME : M1803D5XA
FCC ID : 2AFZZ-XMSD5X
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Approved by: Mark Qu / Manager



Sporton International (Kunshan) Inc.
No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information..... 6
4.1 General Information 6
4.2 General LTE SAR Test and Reporting Considerations 8
5. Proximity Sensor Triggering Test.....11
5.1 Proximity sensor triggering distances(Per KDB616217§6.2) 11
5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4)..... 15
6. RF Exposure Limits.....16
6.1 Uncontrolled Environment.....16
6.2 Controlled Environment.....16
7. Specific Absorption Rate (SAR).....17
7.1 Introduction17
7.2 SAR Definition.....17
8. System Description and Setup18
8.1 E-Field Probe19
8.2 Data Acquisition Electronics (DAE)19
8.3 Phantom.....20
8.4 Device Holder.....21
9. Measurement Procedures22
9.1 Spatial Peak SAR Evaluation22
9.2 Power Reference Measurement.....23
9.3 Area Scan23
9.4 Zoom Scan.....24
9.5 Volume Scan Procedures.....24
9.6 Power Drift Monitoring.....24
10. Test Equipment List.....25
11. System Verification26
11.1 Tissue Simulating Liquids26
11.2 Tissue Verification27
11.3 System Performance Check Results28
12. RF Exposure Positions29
12.1 Ear and handset reference point29
12.2 Definition of the cheek position30
12.3 Definition of the tilt position31
12.4 Body Worn Accessory32
12.5 Product Specific 10g SAR Exposure33
12.6 Wireless Router.....33
13. Conducted RF Output Power (Unit: dBm).....34
14. Antenna Location101
15. SAR Test Results103
15.1 Head SAR106
15.2 Hotspot SAR111
15.3 Body Worn Accessory SAR.....117
15.4 Product specific 10g SAR121
15.5 Repeated SAR Measurement122
16. Simultaneous Transmission Analysis.....123
16.1 Head Exposure Conditions125
16.2 Hotspot Exposure Conditions.....127
16.3 Body-Worn Accessory Exposure Conditions131
16.4 SPLSR Evaluation and Analysis.....133
17. Uncertainty Assessment143
18. References144
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, M1803D5XA**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 10mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.63	0.80	0.80	1.59
		GSM1900	0.51	0.84	0.45	
	WCDMA	Band V	0.26	0.41	0.41	
		Band IV	0.15	1.05	0.55	
		Band II	0.13	0.67	0.36	
	CDMA2000	BC10	0.21	0.39	0.38	
		BC0	0.22	0.44	0.42	
		BC1	0.15	0.47	0.32	
	LTE	Band 12/Band 17	0.14	0.32	0.32	
		Band 13	0.13	0.29	0.29	
		Band 26/Band 5	0.17	0.39	0.39	
		Band 4	0.17	0.97	0.49	
		Band 25/Band 2	0.18	0.99	0.47	
		Band 30	0.12	1.15	0.58	
	Band 7	0.15	0.48	0.48		
	Band 41/Band 38	<0.10	0.57	0.57		
DTS	WLAN	2.4GHz WLAN	0.95	0.67	0.34	1.51
NII		5GHz WLAN	0.58	1.16	1.16	1.59
DSS	Bluetooth	2.4GHz Bluetooth		0.12	<0.10	1.59
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			
NII	WLAN	5GHz WLAN	2.77			
Date of Testing:			2018/2/27 ~ 2018/3/20			
Remark: This device supports LTE B2 / B5 / B17 / B38 and B25 / B26 / B12 / B41. Since the supported frequency span for LTE B2 / B5 / B17 / B38 falls completely within the supports frequency span for LTE B25 / B26 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25 / B26 / B12 / B41.						

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Testing Laboratory	
Test Site	Sporton International (Kunshan) Inc.
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

Manufacturer	
Company Name	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	MI
Model Name	M1803D5XA
FCC ID	2AFZZ-XMSD5X
IMEI Code	SIM1: 867601030224860 SIM2: 867601030226093
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR, Bluetooth v4.0 LE, Bluetooth v4.1 LE, Bluetooth v4.2 LE, Bluetooth v5.0 LE NFC
HW Version	P3.0
SW Version	MIUI 9
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Pre-Production Unit



Remark:

1. This device supports VoIP in GPRS, EGPRS, CDMA, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 33.
5. The device employs proximity sensors and when the sensor detects a user is touching the device on or near to the antenna the device reduces the maximum allowed output power. When detected the presence of the user's body at the front or back or bottom side faces of the device, GSM850/1900, WCDMA B2 / B4, CDMA2000 BC1 and LTE B2 / B4 / B7 / B25 reduced power will be active. So for head SAR, we always use full power level to perform head SAR testing, For hotspot SAR, sensor on reduced power will be active at front/back/bottom side faces for above WWAN bands, other WWAN bands are all full power mode. For body-worn SAR, sensor on reduced power will be active at front/back side faces for above WWAN bands, others are all full power mode. Detailed descriptions of the proximity sensor trigger power reduction mechanism are included in the operational description.
6. There are two types of EUT sample 1 and sample 2, the differences between two samples are only for Flash, sample 1 is 6GB+64GB, sample 2 is 6GB+128GB. Since it has no effect on SAR distribution, so we only evaluate sample 1 for full test.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	2AFZZ-XMSD5X																																																														
Equipment Name	Mobile Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R12, Cat13																																																														
CA Support	Yes, Uplink and Downlink																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes The device employs proximity sensors that detect the presence of the user's body at the front or back or bottom side faces of the device. When front or back or bottom side condition is detected, LTE B2 / B4 / B7 / B25 reduced power will be active.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 13.																																																														
LTE Carrier Aggregation Additional Information	(1) This device supports LTE Carrier Aggregation (CA) in the uplink for LTE B7 / B38 / B41 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. (2) This device supports maximum of 3 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									




LTE Band 17												
	Bandwidth 5 MHz						Bandwidth 10 MHz					
	Channel #		Freq.(MHz)				Channel #		Freq. (MHz)			
L	23755		706.5				23780		709			
M	23790		710				23790		710			
H	23825		713.5				23800		711			
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz						Bandwidth 10 MHz					
	Channel #		Freq.(MHz)				Channel #		Freq.(MHz)			
L	27685		2307.5				27710		2310			
M	27710		2310									
H	27735		2312.5									
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				

5. Proximity Sensor Triggering Test



5.1 Proximity sensor triggering distances(Per KDB616217§6.2)



1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (850MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front, back or bottom side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, GSM850/1900, WCDMA B2 / B4, CDMA2000 BC1 and LTE B2 / B4 / B7 / B25 reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the front, back or bottom side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).


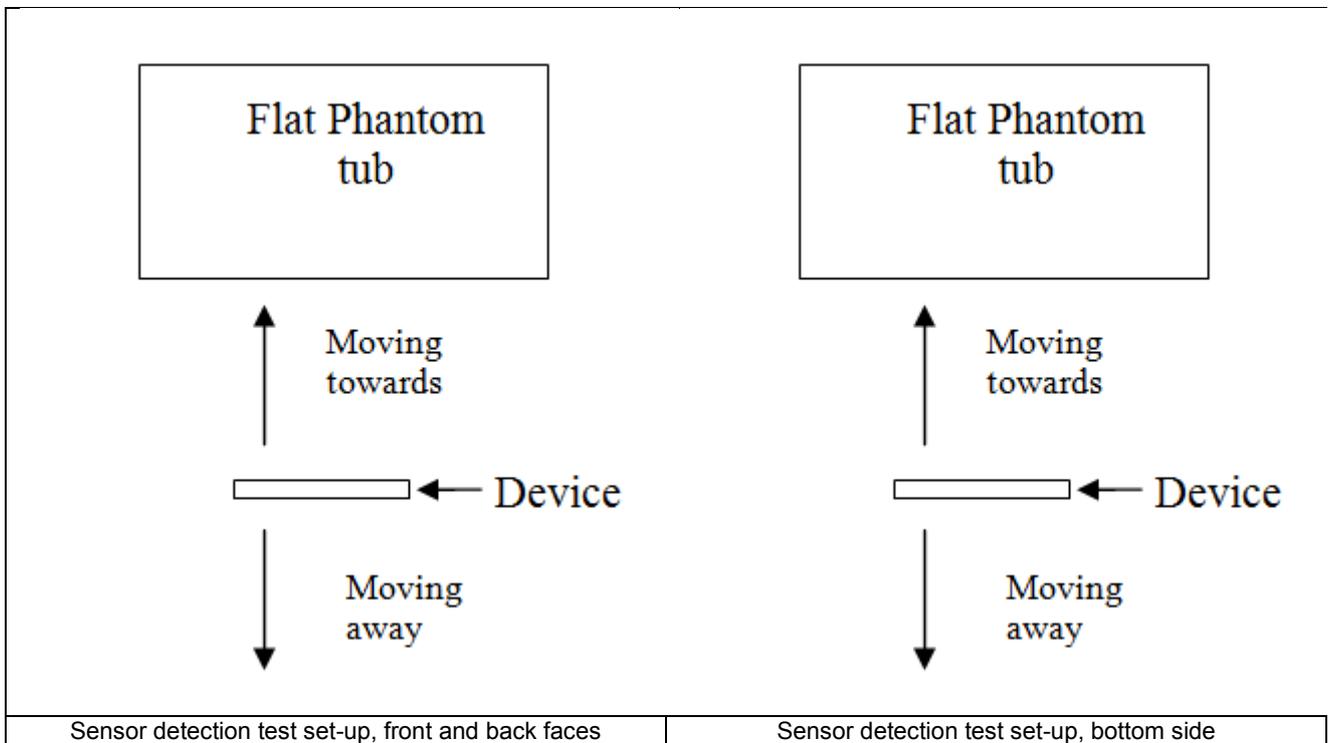


Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	17	17	18	18	18	18

<Sensor Trigger Distance and Measured Power>

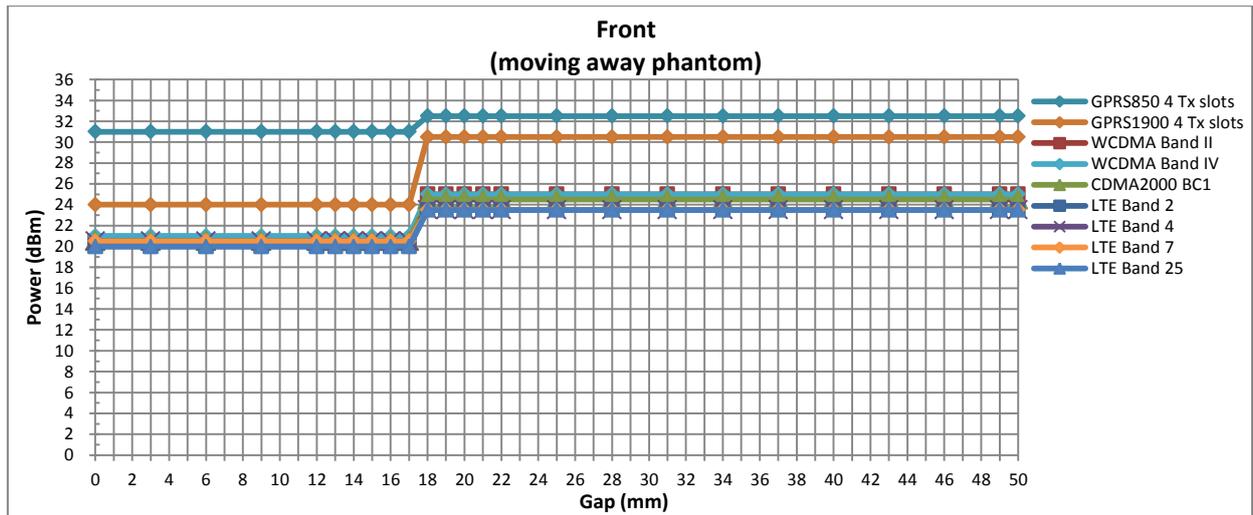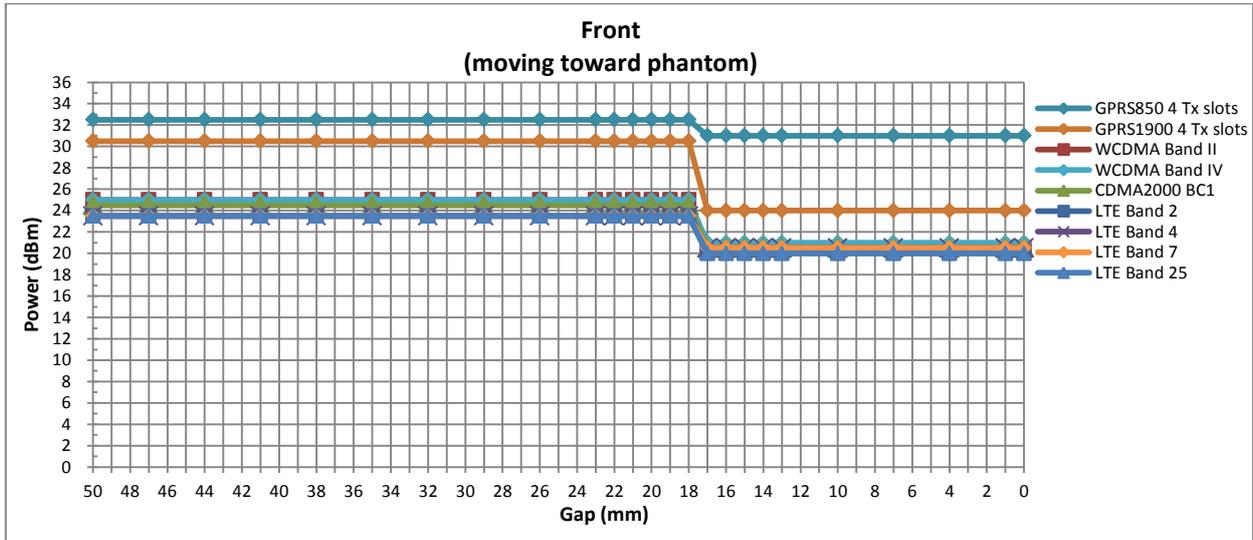


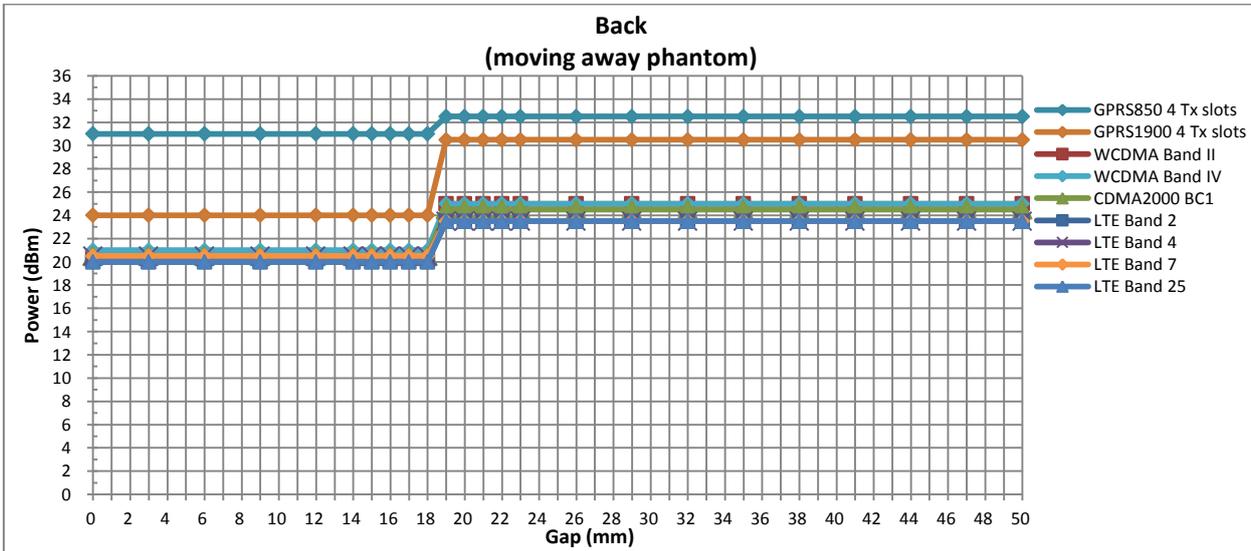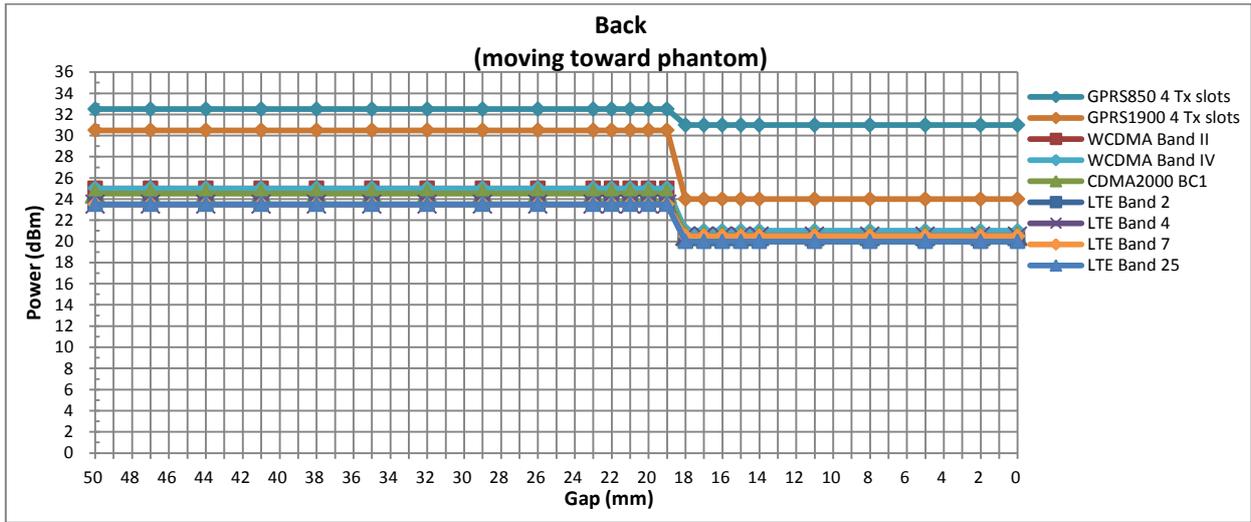

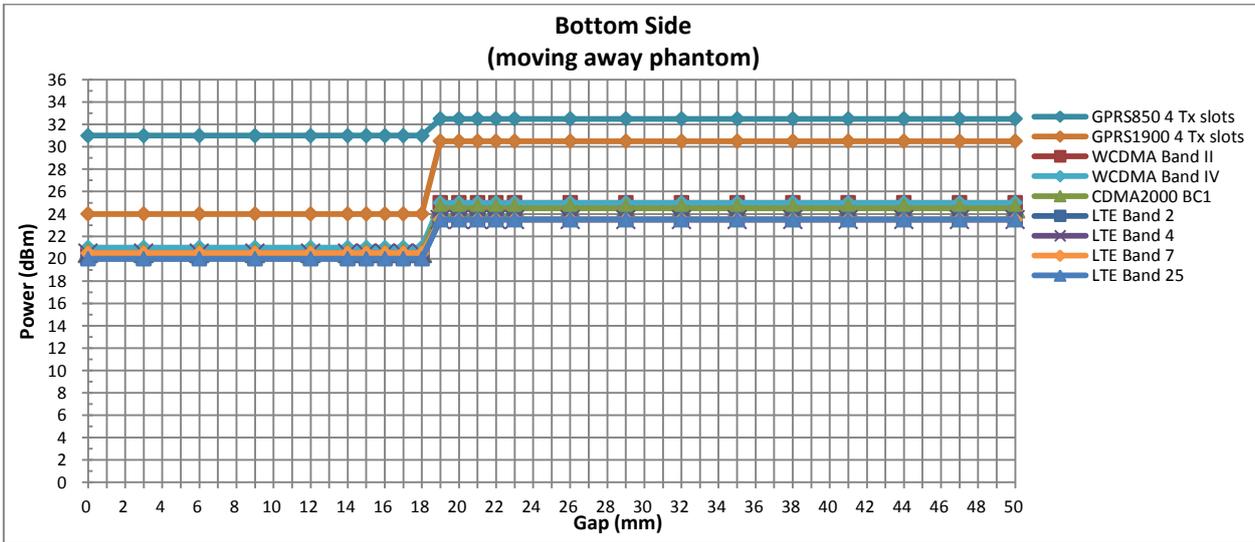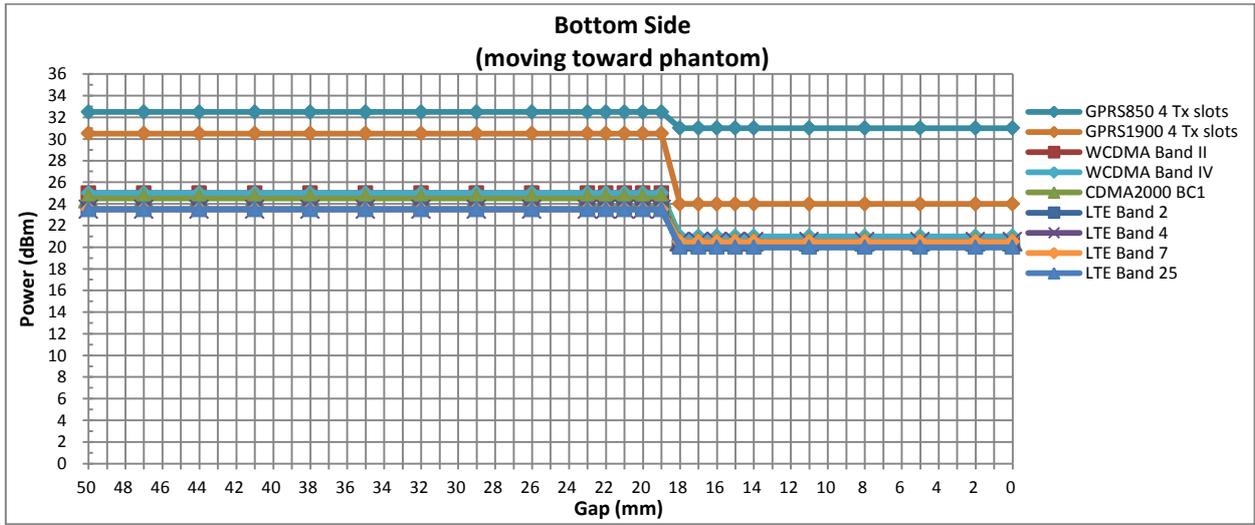

5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with bottom side parallel to the base of the flat phantom for each band. The EUT was rotated about bottom side for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

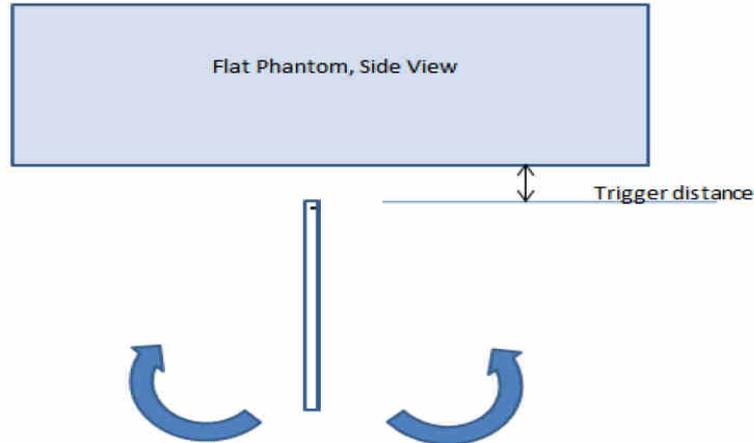

Proximity Sensor Coverage Assesment(Bottom Side)

Table: Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Bottom Side)

Main ant Band(MHz)	Minimum trigger distance at which power reduction was maintained over ±45°	Power Reduction Status											
		-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°	
GSM850	18mm	on	on	on	on	on	on	on	on	on	on	on	on
GSM1900	18mm	on	on	on	on	on	on	on	on	on	on	on	on
WCDMA Band II	18mm	on	on	on	on	on	on	on	on	on	on	on	on
WCDMA Band IV	18mm	on	on	on	on	on	on	on	on	on	on	on	on
CDMA2000 BC1	18mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 2	18mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 4	18mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 7	18mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 25	18mm	on	on	on	on	on	on	on	on	on	on	on	on

Conclusion: As is shown from the validation data, it can be ensured that the proximity sensor can be valid triggered for the DUT tilt coverage exposure condition.

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

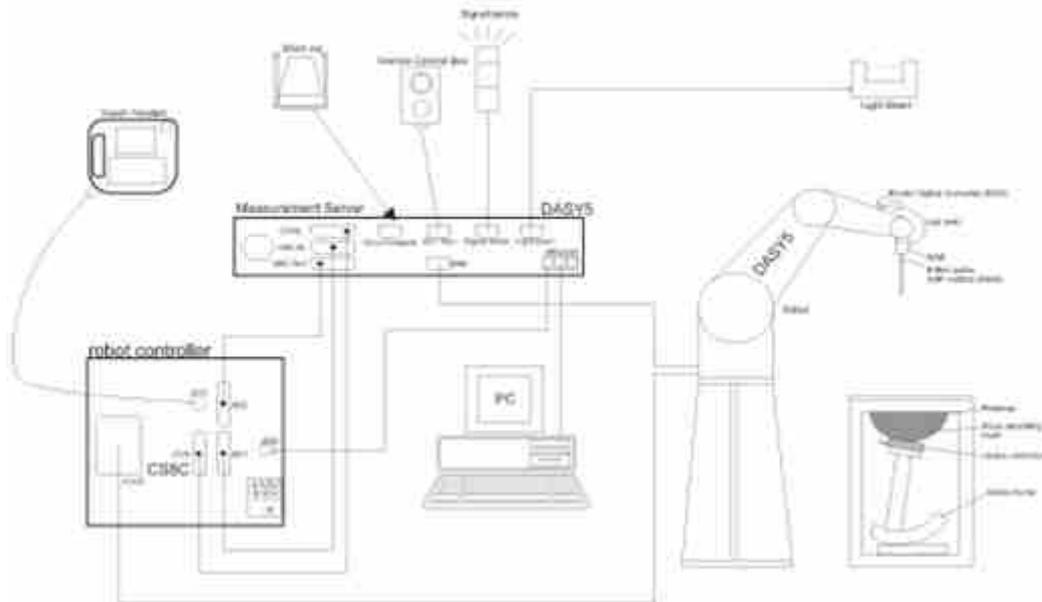

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm



The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1065	2017/12/4	2018/12/3
SPEAG	835MHz System Validation Kit	D835V2	4d091	2017/12/5	2018/12/4
SPEAG	1750MHz System Validation Kit	D1750V2	1069	2017/12/5	2018/12/4
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	2017/12/6	2018/12/5
SPEAG	2300MHz System Validation Kit	D2300V2	1055	2017/8/30	2018/8/29
SPEAG	2450MHz System Validation Kit	D2450V2	840	2017/12/7	2018/12/6
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2017/12/7	2018/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1006	2017/9/26	2018/9/25
SPEAG	Data Acquisition Electronics	DAE4	1279	2018/1/3	2019/1/2
SPEAG	Data Acquisition Electronics	DAE4	1210	2017/5/25	2018/5/24
SPEAG	Dosimetric E-Field Probe	EX3DV4	3753	2017/5/5	2018/5/4
SPEAG	Dosimetric E-Field Probe	EX3DV4	3642	2017/9/25	2018/9/24
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2017/5/26	2018/5/25
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1842	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1542	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1839	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1479	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201563814	2018/1/18	2019/1/17
Anritsu	Radio communication analyzer	MT8821C	6201692204	2017/3/29	2018/3/28
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2017/4/18	2018/4/17
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2017/4/18	2018/4/17
SPEAG	DAK Kit	DAK3.5	1146	2017/7/18	2018/7/17
R&S	Signal Generator	SMR40	100455	2018/1/18	2019/1/17
Anritsu	Power Meter	ML2495A	1419002	2017/5/15	2018/5/14
Anritsu	Power Sensor	MA2411B	1339124	2017/5/15	2018/5/14
Anritsu	Power Meter	ML2495A	1218006	2017/10/6	2018/10/5
Anritsu	Power Sensor	MA2411B	1207363	2017/10/6	2018/10/5
R&S	CBT BLUETOOTH TESTER	CBT	100783	2017/8/8	2018/8/7
EXA	Spectrum Analyzer	N9010A	MY55150244	2017/4/18	2018/4/17
WISEWIND	Hygrometer	WISEWIND 0905	0905	2017/4/20	2018/4/19
JM	DIGITAC THERMOMETER	JM222	AA1207166	2017/4/19	2018/4/18
ARRA	Power Divider	A3200-2	N/A		Note
Agilent	Dual Directional Coupler	778D	50422		Note
PASTERNAK	Dual Directional Coupler	PE2214-10	N/A		Note
MCL	Attenuation1	BW-S10W5+	N/A		Note
MCL	Attenuation2	BW-S10W5+	N/A		Note
MCL	Attenuation3	BW-S10W5+	N/A		Note
AR	Amplifier	5S1G4	333096		Note
mini-circuits	Amplifier	ZVE-3W-83+	162601250		Note

Note:

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR

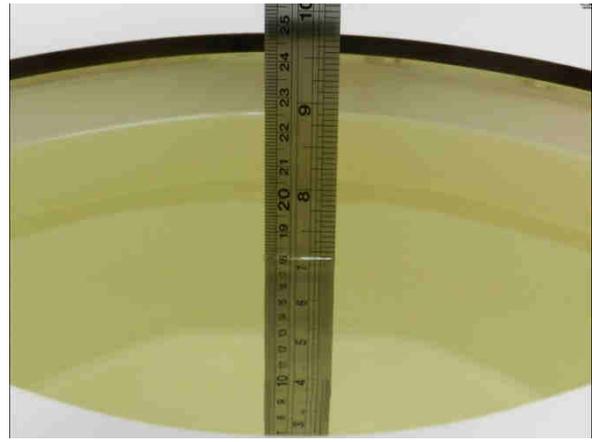


Fig 10.2 Photo of Liquid Height for Body SAR



11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ε _r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.7	0.901	42.431	0.89	41.90	1.24	1.27	±5	2018/3/5
835	Head	22.8	0.911	41.630	0.90	41.50	1.22	0.31	±5	2018/3/6
1750	Head	22.7	1.388	40.932	1.37	40.10	1.31	2.07	±5	2018/3/4
1900	Head	22.9	1.413	38.719	1.40	40.00	0.93	-3.20	±5	2018/3/5
2300	Head	22.8	1.685	39.244	1.67	39.50	0.90	-0.65	±5	2018/3/3
2450	Head	22.8	1.851	38.977	1.80	39.20	2.83	-0.57	±5	2018/3/1
2600	Head	22.8	2.051	38.046	1.96	39.00	4.64	-2.45	±5	2018/3/3
5250	Head	22.8	4.865	37.109	4.71	35.90	3.29	3.37	±5	2018/3/20
5600	Head	22.8	5.207	36.587	5.07	35.50	2.70	3.06	±5	2018/3/20
5750	Head	22.8	5.361	36.365	5.22	35.40	2.70	2.73	±5	2018/3/20
750	Body	22.8	0.967	55.673	0.96	55.50	0.73	0.31	±5	2018/2/28
835	Body	22.8	0.986	54.083	0.97	55.20	1.65	-2.02	±5	2018/2/27
1750	Body	22.8	1.499	53.528	1.49	53.40	0.60	0.24	±5	2018/3/10
1900	Body	22.8	1.516	52.758	1.52	53.30	-0.26	-1.02	±5	2018/3/8
2300	Body	22.8	1.814	53.271	1.81	52.90	0.22	0.70	±5	2018/2/28
2450	Body	22.6	2.026	52.750	1.95	52.70	3.90	0.09	±5	2018/3/2
2600	Body	22.5	2.239	52.243	2.16	52.50	3.66	-0.49	±5	2018/2/28
5250	Body	22.7	5.506	47.956	5.36	48.90	2.72	-1.93	±5	2018/3/18
5600	Body	22.7	5.954	47.367	5.77	48.50	3.19	-2.34	±5	2018/3/19
5750	Body	22.7	6.154	47.115	5.94	48.30	3.60	-2.45	±5	2018/3/19

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2018/3/5	750	Head	250	1065	3753	1279	2.20	8.33	8.80	5.64
2018/3/6	835	Head	250	4d091	3753	1279	2.40	9.48	9.60	1.27
2018/3/4	1750	Head	250	1069	3753	1279	9.43	37.00	37.72	1.95
2018/3/5	1900	Head	250	5d118	3753	1279	9.95	39.70	39.80	0.25
2018/3/3	2300	Head	250	1055	3642	1279	12.70	49.30	50.80	3.04
2018/3/1	2450	Head	250	840	3753	1279	12.40	52.60	49.60	-5.70
2018/3/3	2600	Head	250	1061	3642	1279	13.60	58.20	54.40	-6.53
2018/3/20	5250	Head	100	1006	3857	1210	7.70	78.30	77.00	-1.66
2018/3/20	5600	Head	100	1006	3857	1210	8.04	85.00	80.40	-5.41
2018/3/20	5750	Head	100	1006	3857	1210	7.55	78.50	75.50	-3.82
2018/2/28	750	Body	250	1065	3753	1279	2.27	8.72	9.08	4.13
2018/2/27	835	Body	250	4d091	3753	1279	2.38	9.72	9.52	-2.06
2018/3/10	1750	Body	250	1069	3642	1279	9.05	38.00	36.20	-4.74
2018/3/8	1900	Body	250	5d118	3642	1279	9.82	40.40	39.28	-2.77
2018/2/28	2300	Body	250	1055	3857	1210	13.30	48.90	53.20	8.79
2018/3/2	2450	Body	250	840	3753	1279	12.30	51.90	49.20	-5.20
2018/2/28	2600	Body	250	1061	3753	1279	14.20	56.40	56.80	0.71
2018/3/18	5250	Body	100	1006	3857	1210	7.12	77.00	71.20	-7.53
2018/3/19	5600	Body	100	1006	3857	1210	7.69	80.10	76.90	-4.00
2018/3/19	5750	Body	100	1006	3857	1210	6.92	75.10	69.20	-7.86

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2018/3/19	5600	Body	100	1006	3857	1210	2.13	22.40	21.3	-4.91
2018/3/19	5750	Body	100	1006	3857	1210	1.92	20.80	19.2	-7.69

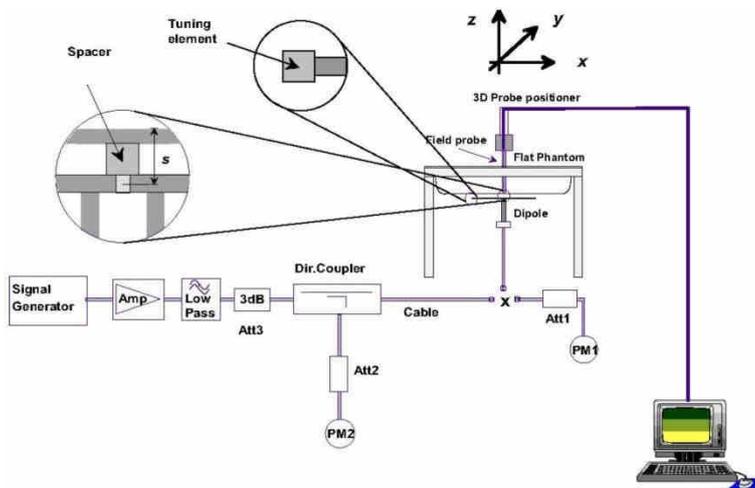


Fig 10.3.1 System Performance Check Setup



Fig 10.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 11.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 11.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 11.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 11.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

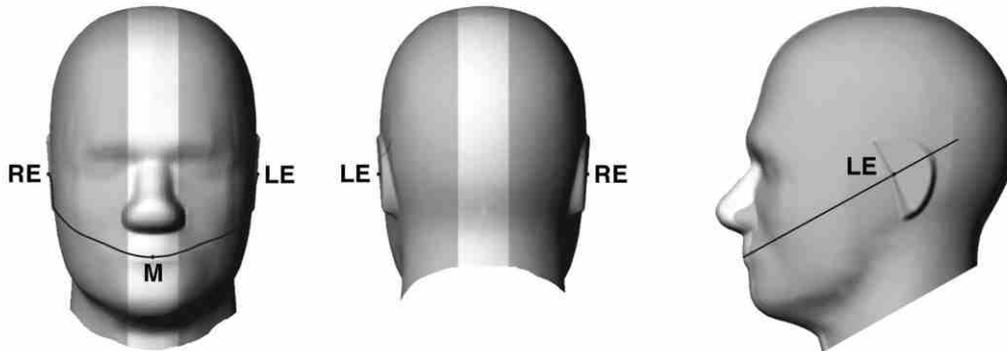


Fig 11.1.1 Front, back, and side views of SAM twin phantom

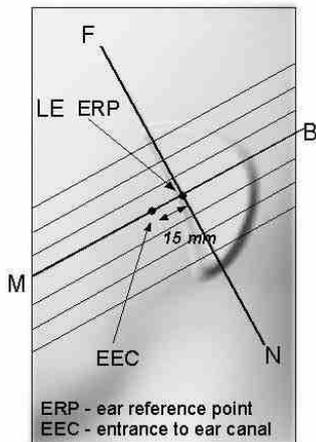


Fig 11.1.2 Close-up side view of phantom showing the ear region.

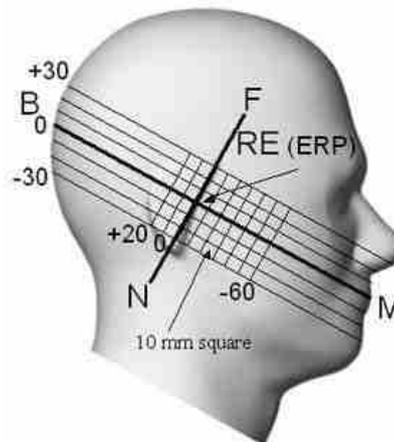


Fig 11.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 11.2.1 and Figure 11.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 11.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 11.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 11.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 11.2.3. The actual rotation angles should be documented in the test report.

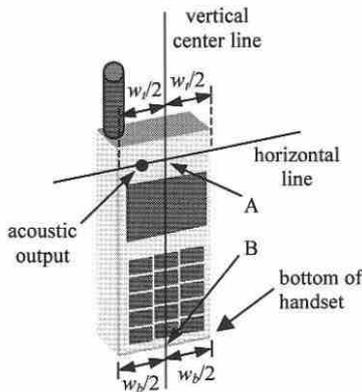


Fig 11.2.1 Handset vertical and horizontal reference lines—“fixed case”

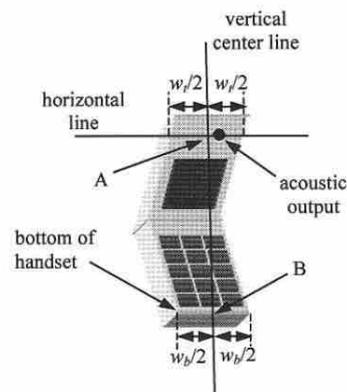


Fig 11.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

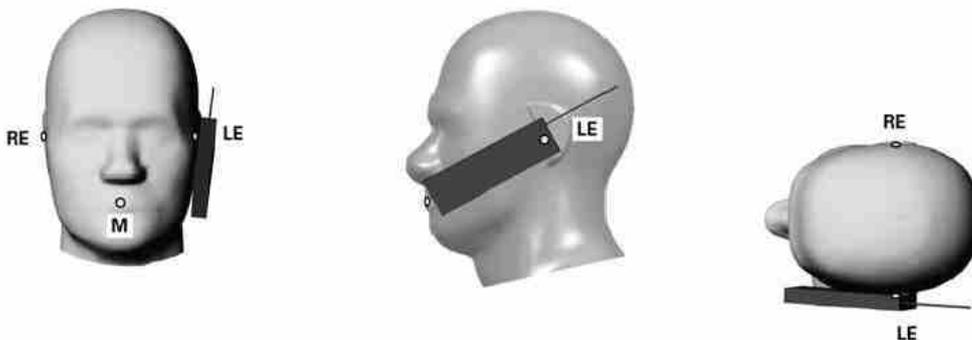


Fig 11.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 11.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

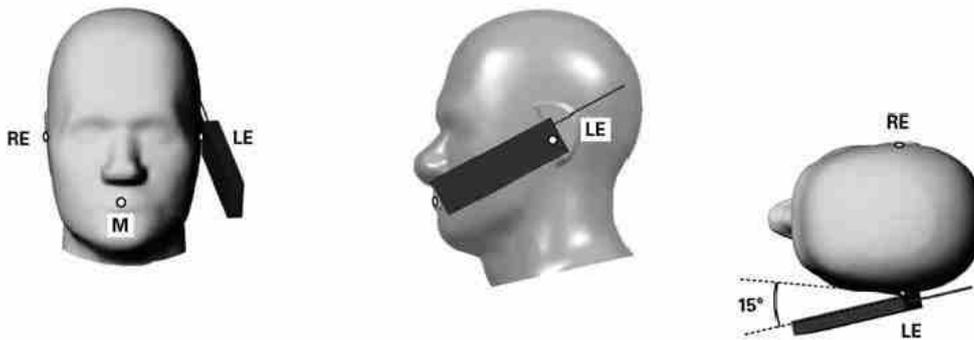


Fig 11.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

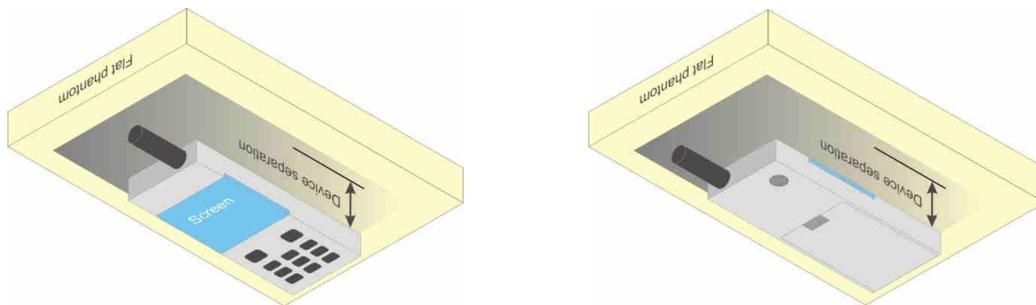


Fig 11.4 Body Worn Position



12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
4. Power reduction which is triggered by p-sensor on is implemented in GSM850/GSM1900 band, for SAR testing EUT was set in reduced power mode and GPRS 4Tx slots due to its highest frame-average power.

<Maximum Average RF Power (Proximity Sensor Off)>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.83	32.80	32.79	33.50	23.83	23.80	23.79	24.50
GPRS 1 Tx slot	32.82	32.79	32.78	33.50	23.82	23.79	23.78	24.50
GPRS 2 Tx slots	32.52	32.50	32.53	33.00	26.52	26.50	26.53	27.00
GPRS 3 Tx slots	32.20	32.13	32.10	33.00	27.94	27.87	27.84	28.74
GPRS 4 Tx slots	31.77	31.71	31.75	32.50	28.77	28.71	28.75	29.50
EDGE 1 Tx slot	26.60	26.63	26.69	27.50	17.60	17.63	17.69	18.50
EDGE 2 Tx slots	26.38	26.38	26.46	27.00	20.38	20.38	20.46	21.00
EDGE 3 Tx slots	26.13	26.10	26.15	27.00	21.87	21.84	21.89	22.74
EDGE 4 Tx slots	25.79	25.82	25.87	26.50	22.79	22.82	22.87	23.50
GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.70	29.61	29.76	30.50	20.70	20.61	20.76	21.50
GPRS 1 Tx slot	29.68	29.60	29.75	30.50	20.68	20.60	20.75	21.50
GPRS 2 Tx slots	29.52	29.45	29.66	30.50	23.52	23.45	23.66	24.50
GPRS 3 Tx slots	29.36	29.27	29.53	30.50	25.10	25.01	25.27	26.24
GPRS 4 Tx slots	29.08	29.04	29.36	30.50	26.08	26.04	26.36	27.50
EDGE 1 Tx slot	25.59	25.32	25.45	26.50	16.59	16.32	16.45	17.50
EDGE 2 Tx slots	25.40	25.13	25.28	26.50	19.40	19.13	19.28	20.50
EDGE 3 Tx slots	25.19	24.91	25.11	26.00	20.93	20.65	20.85	21.74
EDGE 4 Tx slots	24.95	24.68	24.85	25.50	21.95	21.68	21.85	22.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB



<Maximum Average RF Power (Proximity Sensor On)>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.57	32.16	32.55	33.00	23.57	23.16	23.55	24.00
GPRS 1 Tx slot	32.55	32.15	32.55	33.00	23.55	23.15	23.55	24.00
GPRS 2 Tx slots	32.36	31.88	32.19	33.00	26.36	25.88	26.19	27.00
GPRS 3 Tx slots	31.98	31.46	31.96	32.00	27.72	27.20	27.70	27.74
GPRS 4 Tx slots	30.80	30.43	30.65	31.00	27.80	27.43	27.65	28.00
EDGE 1 Tx slot	26.60	26.63	26.69	27.50	17.60	17.63	17.69	18.50
EDGE 2 Tx slots	26.38	26.38	26.46	27.00	20.38	20.38	20.46	21.00
EDGE 3 Tx slots	26.13	26.10	26.15	27.00	21.87	21.84	21.89	22.74
EDGE 4 Tx slots	25.79	25.82	25.87	26.50	22.79	22.82	22.87	23.50
GSM1900								
	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	28.35	28.52	28.79	29.00	19.35	19.52	19.79	20.00
GPRS 1 Tx slot	28.32	28.50	28.75	29.00	19.32	19.50	19.75	20.00
GPRS 2 Tx slots	24.95	25.26	25.31	26.00	18.95	19.26	19.31	20.00
GPRS 3 Tx slots	23.71	24.10	24.20	24.50	19.45	19.84	19.94	20.24
GPRS 4 Tx slots	23.35	23.27	23.40	24.00	20.35	20.27	20.40	21.00
EDGE 1 Tx slot	25.59	25.32	25.45	26.50	16.59	16.32	16.45	17.50
EDGE 2 Tx slots	25.40	25.13	25.28	26.50	19.40	19.13	19.28	20.50
EDGE 3 Tx slots	24.10	24.33	24.45	24.50	19.84	20.07	20.19	20.24
EDGE 4 Tx slots	23.86	23.85	23.95	24.00	20.86	20.85	20.95	21.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{DC}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{HS} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

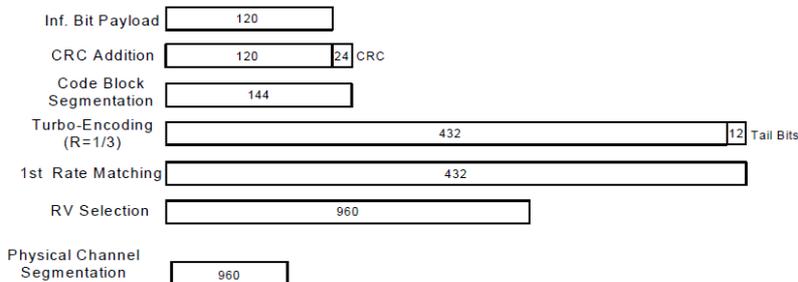


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Parmes
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCl is equal to the target E-TFCl of 105 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCl (Note 5)	E-TFCl (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<Maximum Average RF Power (Proximity Sensor Off)>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	24.36	24.27	24.42	25.00	24.10	24.28	24.30	25.00	24.02	24.07	24.08	24.50
3GPP Rel 99	RMC 12.2Kbps	24.38	24.29	24.44	25.00	24.11	24.30	24.32	25.00	24.05	24.08	24.10	24.50
3GPP Rel 6	HSDPA Subtest-1	22.76	22.84	22.74	23.00	22.13	22.18	22.12	23.00	22.35	22.23	22.14	23.00
3GPP Rel 6	HSDPA Subtest-2	22.71	22.68	22.45	23.00	22.14	22.23	22.15	23.00	22.37	22.74	22.21	23.00
3GPP Rel 6	HSDPA Subtest-3	21.80	21.76	21.65	22.50	21.64	21.73	21.68	22.50	21.78	21.77	21.71	22.50
3GPP Rel 6	HSDPA Subtest-4	21.76	21.45	21.65	22.50	21.65	21.68	21.65	22.50	21.79	21.62	21.69	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.13	22.29	22.18	23.00	21.56	21.48	21.67	23.00	21.78	21.83	21.86	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.10	22.18	22.15	23.00	21.49	21.46	21.69	23.00	21.79	21.80	21.79	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.35	21.28	21.08	22.50	21.15	21.08	21.18	22.50	21.28	21.30	21.15	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.36	21.37	21.09	22.50	21.08	21.08	21.15	22.50	21.27	21.19	21.16	22.50
3GPP Rel 6	HSUPA Subtest-1	22.52	22.37	22.69	23.50	22.11	22.17	22.15	23.00	22.51	22.21	22.24	23.50
3GPP Rel 6	HSUPA Subtest-2	20.53	20.42	20.67	21.50	20.10	20.17	20.22	21.00	20.43	20.29	20.31	21.50
3GPP Rel 6	HSUPA Subtest-3	21.51	21.32	21.63	22.50	21.13	21.17	21.18	22.00	21.46	21.24	21.28	22.50
3GPP Rel 6	HSUPA Subtest-4	20.51	20.44	20.58	21.50	20.13	20.17	20.18	21.00	20.47	20.20	20.26	21.50
3GPP Rel 6	HSUPA Subtest-5	22.50	22.40	22.60	23.50	22.10	22.10	22.20	23.00	22.50	22.19	22.30	23.50
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	20.56	20.67	20.75	21.50	20.23	20.37	20.45	21.00	20.64	20.36	20.28	21.50



<Maximum Average RF Power (Proximity Sensor On)>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	20.06	19.86	20.18	20.50	20.29	20.50	20.54	21.00
3GPP Rel 99	RMC 12.2Kbps	20.08	19.88	20.19	20.50	20.30	20.52	20.56	21.00
3GPP Rel 6	HSDPA Subtest-1	19.23	19.12	19.24	20.00	19.54	19.77	19.69	20.00
3GPP Rel 6	HSDPA Subtest-2	19.26	19.10	19.26	20.00	19.55	19.77	19.75	20.00
3GPP Rel 6	HSDPA Subtest-3	18.65	18.63	18.79	19.50	18.97	19.28	19.22	19.50
3GPP Rel 6	HSDPA Subtest-4	18.67	18.63	18.77	19.50	18.94	19.31	19.23	19.50
3GPP Rel 8	DC-HSDPA Subtest-1	18.86	18.78	18.79	20.00	19.01	19.23	19.15	20.00
3GPP Rel 8	DC-HSDPA Subtest-2	18.80	18.76	18.70	20.00	18.98	19.18	19.10	20.00
3GPP Rel 8	DC-HSDPA Subtest-3	18.15	18.09	18.24	19.50	18.52	18.78	18.65	19.50
3GPP Rel 8	DC-HSDPA Subtest-4	18.09	18.08	18.20	19.50	18.49	18.79	18.66	19.50
3GPP Rel 6	HSUPA Subtest-1	19.25	19.14	19.30	20.00	19.43	19.71	19.69	20.00
3GPP Rel 6	HSUPA Subtest-2	17.26	17.13	17.32	18.00	17.37	17.73	17.68	18.00
3GPP Rel 6	HSUPA Subtest-3	18.20	18.11	18.36	19.00	18.39	18.70	18.64	19.00
3GPP Rel 6	HSUPA Subtest-4	17.25	17.11	17.24	18.00	17.44	17.77	17.69	18.00
3GPP Rel 6	HSUPA Subtest-5	19.20	19.10	19.20	20.00	19.40	19.80	19.70	20.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	17.56	17.35	17.48	18.00	17.49	17.95	17.84	18.00



<CDMA2000 Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

<Maximum Average RF Power (Proximity Sensor Off)>

Band	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)	CDMA2000 BC10			Tune-up Limit (dBm)
	Tx Channel	1013	384		777	25	600		1175	476	580	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75		817.9	820.5	823.1	
RC1 SO55	23.80	23.76	23.77	24.50	24.06	23.80	23.72	24.50	23.91	23.75	23.79	24.50
RC3 SO55	23.77	23.79	23.77	24.50	24.05	23.76	23.73	24.50	23.78	23.77	23.81	24.50
RC3 SO32 (F+SCH)	23.75	23.74	23.75	24.50	24.11	23.77	23.69	24.50	23.89	23.87	23.85	24.50
RC3 SO32 (+SCH)	23.75	23.76	23.74	24.50	24.09	23.77	23.70	24.50	23.88	23.88	23.83	24.50
RTAP 153.6Kbps	23.37	23.25	23.37	24.50	23.82	23.59	23.63	24.50	23.90	23.86	23.84	24.50
RETAP 4096Bits	23.27	23.16	23.36	24.50	23.81	23.58	23.61	24.50	23.90	23.86	23.83	24.50


<Maximum Average RF Power (Proximity Sensor On)>

Band	CDMA2000 BC1			Tune-up Limit (dBm)
Tx Channel	25	600	1175	
Frequency (MHz)	1851.25	1880	1908.75	
RC1 SO55	20.05	19.73	20.00	20.50
RC3 SO55	20.21	19.71	19.86	20.50
RC3 SO32 (F+SCH)	20.12	19.81	19.96	20.50
RC3 SO32 (+SCH)	20.16	19.76	19.85	20.50
RTAP 153.6Kbps	20.22	19.98	20.01	20.50
RETAP 4096Bits	20.19	19.95	20.00	20.50


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B17 / B2 / B5 / B38 SAR test was covered by B12 / B25 / B26 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64QAM and 16QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

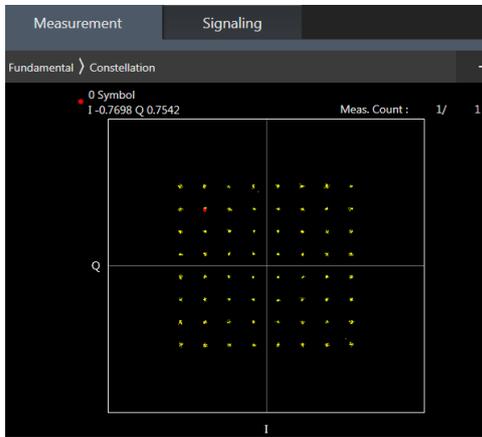

64QAM

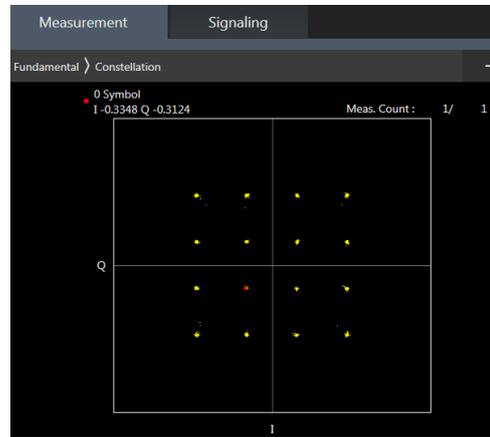

16QAM



11. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
12. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

<Maximum Average RF Power (Proximity Sensor Off)>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.76	22.63	22.90	23.5	0
20	QPSK	1	49	22.58	22.48	22.75		
20	QPSK	1	99	22.27	22.40	22.67		
20	QPSK	50	0	21.74	21.58	21.82	22.5	1
20	QPSK	50	24	21.66	21.52	21.74		
20	QPSK	50	50	21.51	21.46	21.70		
20	QPSK	100	0	21.56	21.54	21.76	22.5	1
20	16QAM	1	0	22.12	21.97	22.18		
20	16QAM	1	49	21.99	21.81	22.11		
20	16QAM	1	99	21.69	21.74	22.04	21.5	2
20	16QAM	50	0	20.84	20.71	20.89		
20	16QAM	50	24	20.77	20.66	20.86		
20	16QAM	50	50	20.61	20.60	20.82	21.5	2
20	16QAM	100	0	20.66	20.65	20.87		
20	64QAM	1	0	21.05	20.91	21.12		
20	64QAM	1	49	20.81	20.73	21.01	21.5	2
20	64QAM	1	99	20.59	20.68	20.91		
20	64QAM	50	0	19.85	19.72	19.91		
20	64QAM	50	24	19.78	19.66	19.87	20.5	3
20	64QAM	50	50	19.60	19.57	19.83		
20	64QAM	100	0	19.68	19.66	19.88		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.69	22.65	22.83	23.5	0
15	QPSK	1	37	22.64	22.50	22.68		
15	QPSK	1	74	22.47	22.47	22.70		
15	QPSK	36	0	21.61	21.56	21.79	22.5	1
15	QPSK	36	20	21.58	21.52	21.75		
15	QPSK	36	39	21.50	21.50	21.75		
15	QPSK	75	0	21.57	21.56	21.78	22.5	1
15	16QAM	1	0	22.05	22.01	22.19		
15	16QAM	1	37	21.97	21.85	22.04		
15	16QAM	1	74	21.82	21.81	22.05	22.5	1
15	16QAM	36	0	20.72	20.70	20.86		
15	16QAM	36	20	20.66	20.64	20.84		
15	16QAM	36	39	20.58	20.58	20.81	21.5	2
15	16QAM	75	0	20.66	20.61	20.85		
15	64QAM	1	0	20.95	20.91	21.13		
15	64QAM	1	37	20.87	20.78	20.99	21.5	2
15	64QAM	1	74	20.70	20.76	20.99		
15	64QAM	36	0	19.73	19.70	19.90		
15	64QAM	36	20	19.67	19.65	19.87	20.5	3
15	64QAM	36	39	19.62	19.64	19.83		
15	64QAM	75	0	19.67	19.60	19.84		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.64	22.56	22.89	23.5	0
10	QPSK	1	25	22.62	22.49	22.73		
10	QPSK	1	49	22.47	22.48	22.73		
10	QPSK	25	0	21.60	21.57	21.80	22.5	1
10	QPSK	25	12	21.58	21.55	21.78		
10	QPSK	25	25	21.53	21.49	21.78		
10	QPSK	50	0	21.59	21.57	21.77	22.5	1
10	16QAM	1	0	21.95	21.98	22.24		
10	16QAM	1	25	22.01	21.89	22.06		
10	16QAM	1	49	21.85	21.81	22.07	21.5	2
10	16QAM	25	0	20.71	20.70	20.90		
10	16QAM	25	12	20.69	20.67	20.87		
10	16QAM	25	25	20.63	20.61	20.85	21.5	2
10	16QAM	50	0	20.69	20.64	20.85		
10	64QAM	1	0	20.84	20.81	21.13		
10	64QAM	1	25	20.86	20.73	20.99	21.5	2
10	64QAM	1	49	20.71	20.71	21.01		
10	64QAM	25	0	19.72	19.68	19.88		
10	64QAM	25	12	19.70	19.68	19.89	20.5	3
10	64QAM	25	25	19.65	19.64	19.86		
10	64QAM	50	0	19.69	19.67	19.90		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.56	22.52	22.77	23.5	0
5	QPSK	1	12	22.53	22.51	22.72		
5	QPSK	1	24	22.58	22.47	22.74		
5	QPSK	12	0	21.58	21.56	21.77	22.5	1
5	QPSK	12	7	21.61	21.55	21.80		
5	QPSK	12	13	21.57	21.50	21.76		
5	QPSK	25	0	21.52	21.55	21.74	22.5	1
5	16QAM	1	0	21.93	21.89	22.09		
5	16QAM	1	12	21.90	21.88	22.09		
5	16QAM	1	24	21.95	21.83	22.06	21.5	2
5	16QAM	12	0	20.70	20.66	20.87		
5	16QAM	12	7	20.68	20.68	20.90		
5	16QAM	12	13	20.61	20.63	20.84	21.5	2
5	16QAM	25	0	20.64	20.63	20.85		
5	64QAM	1	0	20.83	20.85	21.04		
5	64QAM	1	12	20.83	20.80	21.00	21.5	2
5	64QAM	1	24	20.83	20.75	20.99		
5	64QAM	12	0	19.69	19.71	19.92		
5	64QAM	12	7	19.75	19.70	19.96	20.5	3
5	64QAM	12	13	19.68	19.66	19.92		
5	64QAM	25	0	19.66	19.61	19.87		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.53	22.51	22.74	23.5	0
3	QPSK	1	8	22.62	22.61	22.84		
3	QPSK	1	14	22.49	22.49	22.73		
3	QPSK	8	0	21.58	21.54	21.74	22.5	1
3	QPSK	8	4	21.60	21.56	21.79		
3	QPSK	8	7	21.56	21.52	21.73		
3	QPSK	15	0	21.57	21.49	21.76		
3	16QAM	1	0	21.89	21.88	22.05	22.5	1
3	16QAM	1	8	22.00	21.98	22.22		
3	16QAM	1	14	21.87	21.86	22.03		
3	16QAM	8	0	20.69	20.70	20.88	21.5	2
3	16QAM	8	4	20.74	20.69	20.92		
3	16QAM	8	7	20.70	20.68	20.88		
3	16QAM	15	0	20.67	20.63	20.86		
3	64QAM	1	0	20.83	20.76	21.04	21.5	2
3	64QAM	1	8	20.49	20.80	20.86		
3	64QAM	1	14	20.83	20.45	20.99		
3	64QAM	8	0	19.69	19.71	19.76	20.5	3
3	64QAM	8	4	19.67	19.53	19.76		
3	64QAM	8	7	19.78	19.66	19.92		
3	64QAM	15	0	19.66	19.61	19.87		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.48	22.44	22.66	23.5	0
1.4	QPSK	1	3	22.51	22.51	22.75		
1.4	QPSK	1	5	22.45	22.40	22.65		
1.4	QPSK	3	0	22.50	22.46	22.70		
1.4	QPSK	3	1	22.52	22.50	22.73		
1.4	QPSK	3	3	22.47	22.46	22.71	22.5	1
1.4	QPSK	6	0	21.48	21.43	21.68	22.5	1
1.4	16QAM	1	0	21.81	21.79	21.96		
1.4	16QAM	1	3	21.90	21.88	22.08		
1.4	16QAM	1	5	21.80	21.79	21.97		
1.4	16QAM	3	0	21.59	21.59	21.79		
1.4	16QAM	3	1	21.66	21.63	21.81		
1.4	16QAM	3	3	21.59	21.56	21.76	21.5	2
1.4	16QAM	6	0	20.65	20.62	20.84	21.5	2
1.4	64QAM	1	0	20.72	20.75	20.92		
1.4	64QAM	1	3	20.82	20.81	21.01		
1.4	64QAM	1	5	20.69	20.71	20.94		
1.4	64QAM	3	0	20.70	20.69	20.91		
1.4	64QAM	3	1	20.78	20.73	20.98		
1.4	64QAM	3	3	20.71	20.70	20.93		
1.4	64QAM	6	0	19.57	19.53	19.79	20.5	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.76	22.93	23.09	23.5	0
20	QPSK	1	49	22.75	22.67	22.82		
20	QPSK	1	99	22.62	22.73	22.77		
20	QPSK	50	0	21.91	21.88	22.00	22.5	1
20	QPSK	50	24	21.87	21.87	21.89		
20	QPSK	50	50	21.80	21.81	21.82		
20	QPSK	100	0	21.85	21.87	21.93	22.5	1
20	16QAM	1	0	22.11	22.21	22.44		
20	16QAM	1	49	22.13	22.06	22.18		
20	16QAM	1	99	21.97	22.09	22.12	21.5	2
20	16QAM	50	0	21.01	20.95	21.10		
20	16QAM	50	24	20.93	20.95	21.01		
20	16QAM	50	50	20.89	20.90	20.95	21.5	2
20	16QAM	100	0	20.93	20.96	20.99		
20	64QAM	1	0	21.04	21.11	21.32		
20	64QAM	1	49	20.98	20.95	21.12	21.5	2
20	64QAM	1	99	20.80	20.97	21.08		
20	64QAM	50	0	20.02	19.98	20.09		
20	64QAM	50	24	19.95	19.99	20.03	20.5	3
20	64QAM	50	50	19.88	19.92	19.97		
20	64QAM	100	0	19.95	20.00	20.02		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.73	22.87	23.02	23.5	0
15	QPSK	1	37	22.76	22.80	22.95		
15	QPSK	1	74	22.76	22.80	22.81		
15	QPSK	36	0	21.79	21.81	21.94	22.5	1
15	QPSK	36	20	21.84	21.85	21.91		
15	QPSK	36	39	21.77	21.78	21.84		
15	QPSK	75	0	21.84	21.85	21.89	22.5	1
15	16QAM	1	0	22.10	22.16	22.40		
15	16QAM	1	37	22.13	22.15	22.31		
15	16QAM	1	74	22.02	22.12	22.18	21.5	2
15	16QAM	36	0	20.90	20.92	21.05		
15	16QAM	36	20	20.93	20.95	20.99		
15	16QAM	36	39	20.84	20.91	20.96	21.5	2
15	16QAM	75	0	20.93	20.97	21.01		
15	64QAM	1	0	21.00	21.09	21.35		
15	64QAM	1	37	21.04	21.08	21.24	21.5	2
15	64QAM	1	74	20.94	21.02	21.11		
15	64QAM	36	0	19.95	19.97	20.09		
15	64QAM	36	20	19.96	20.00	20.04	20.5	3
15	64QAM	36	39	19.89	19.94	19.97		
15	64QAM	75	0	19.92	19.94	20.01		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.66	22.67	22.92	23.5	0
10	QPSK	1	25	22.65	22.66	22.91		
10	QPSK	1	49	22.73	22.72	22.78		
10	QPSK	25	0	21.76	21.77	21.90	22.5	1
10	QPSK	25	12	21.71	21.81	21.90		
10	QPSK	25	25	21.76	21.80	21.85		
10	QPSK	50	0	21.80	21.82	21.89	22.5	1
10	16QAM	1	0	22.00	21.94	22.27		
10	16QAM	1	25	21.99	22.04	22.28		
10	16QAM	1	49	22.07	22.05	22.15	21.5	2
10	16QAM	25	0	20.83	20.88	21.00		
10	16QAM	25	12	20.82	20.92	20.99		
10	16QAM	25	25	20.85	20.87	20.92	21.5	2
10	16QAM	50	0	20.89	20.96	20.96		
10	64QAM	1	0	20.95	20.93	21.18		
10	64QAM	1	25	20.95	20.96	21.18	21.5	2
10	64QAM	1	49	21.01	21.02	21.05		
10	64QAM	25	0	19.84	19.89	20.01		
10	64QAM	25	12	19.82	19.96	19.99	20.5	3
10	64QAM	25	25	19.89	19.89	19.94		
10	64QAM	50	0	19.89	19.95	19.96		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.58	22.74	22.98	23.5	0
5	QPSK	1	12	22.63	22.79	22.84		
5	QPSK	1	24	22.62	22.77	22.81		
5	QPSK	12	0	21.70	21.73	21.89	22.5	1
5	QPSK	12	7	21.71	21.82	21.89		
5	QPSK	12	13	21.67	21.80	21.83		
5	QPSK	25	0	21.67	21.81	21.83	22.5	1
5	16QAM	1	0	21.95	22.11	22.37		
5	16QAM	1	12	22.00	22.19	22.21		
5	16QAM	1	24	22.01	22.16	22.18	21.5	2
5	16QAM	12	0	20.82	20.85	20.97		
5	16QAM	12	7	20.82	20.93	20.99		
5	16QAM	12	13	20.76	20.89	20.96	21.5	2
5	16QAM	25	0	20.75	20.90	20.96		
5	64QAM	1	0	20.87	21.04	21.22		
5	64QAM	1	12	20.94	21.05	21.12	21.5	2
5	64QAM	1	24	20.91	21.05	21.07		
5	64QAM	12	0	19.87	19.89	20.01		
5	64QAM	12	7	19.88	19.99	20.03	20.5	3
5	64QAM	12	13	19.83	19.95	20.00		
5	64QAM	25	0	19.80	19.91	19.98		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.54	22.68	22.83	23.5	0
3	QPSK	1	8	22.62	22.79	22.83		
3	QPSK	1	14	22.59	22.74	22.79		
3	QPSK	8	0	21.70	21.80	21.82	22.5	1
3	QPSK	8	4	21.67	21.83	21.87		
3	QPSK	8	7	21.64	21.77	21.84		
3	QPSK	15	0	21.66	21.78	21.80		
3	16QAM	1	0	21.88	22.05	22.16	22.5	1
3	16QAM	1	8	22.01	22.18	22.19		
3	16QAM	1	14	21.96	22.13	22.21		
3	16QAM	8	0	20.84	20.93	20.98	21.5	2
3	16QAM	8	4	20.84	20.99	21.02		
3	16QAM	8	7	20.83	20.92	20.98		
3	16QAM	15	0	20.77	20.90	20.95		
3	64QAM	1	0	20.82	20.97	21.12	21.5	2
3	64QAM	1	8	20.87	21.08	21.09		
3	64QAM	1	14	20.91	21.04	21.06		
3	64QAM	8	0	19.84	19.95	19.99	20.5	3
3	64QAM	8	4	19.85	19.96	20.01		
3	64QAM	8	7	19.81	19.96	19.98		
3	64QAM	15	0	19.79	19.91	19.95		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.46	22.59	22.76	23.5	0
1.4	QPSK	1	3	22.51	22.79	22.85		
1.4	QPSK	1	5	22.43	22.66	22.71		
1.4	QPSK	3	0	22.52	22.63	22.82		
1.4	QPSK	3	1	22.51	22.77	22.82		
1.4	QPSK	3	3	22.47	22.74	22.78	22.5	1
1.4	QPSK	6	0	21.49	21.74	21.78	22.5	1
1.4	16QAM	1	0	21.82	21.98	22.10		
1.4	16QAM	1	3	21.89	22.14	22.19		
1.4	16QAM	1	5	21.80	22.06	22.09		
1.4	16QAM	3	0	21.59	21.78	21.91		
1.4	16QAM	3	1	21.63	21.90	21.95		
1.4	16QAM	3	3	21.59	21.86	21.88	21.5	2
1.4	16QAM	6	0	20.63	20.90	20.92	21.5	2
1.4	64QAM	1	0	20.73	20.93	21.05		
1.4	64QAM	1	3	20.78	21.08	21.09		
1.4	64QAM	1	5	20.69	21.00	21.00		
1.4	64QAM	3	0	20.72	20.85	21.02		
1.4	64QAM	3	1	20.79	21.02	21.07		
1.4	64QAM	3	3	20.73	20.96	21.03		
1.4	64QAM	6	0	19.58	19.82	19.86	20.5	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.67	22.56	22.62	23.5	0
10	QPSK	1	25	22.50	22.45	22.51		
10	QPSK	1	49	22.62	22.51	22.54		
10	QPSK	25	0	21.59	21.51	21.55	22.5	1
10	QPSK	25	12	21.62	21.51	21.53		
10	QPSK	25	25	21.63	21.46	21.48		
10	QPSK	50	0	21.68	21.50	21.56	22.5	1
10	16QAM	1	0	21.98	21.91	21.92		
10	16QAM	1	25	21.86	21.71	21.78		
10	16QAM	1	49	21.97	21.80	21.90	21.5	2
10	16QAM	25	0	20.72	20.62	20.68		
10	16QAM	25	12	20.68	20.61	20.66		
10	16QAM	25	25	20.75	20.55	20.58	21.5	2
10	16QAM	50	0	20.76	20.60	20.62		
10	64QAM	1	0	20.90	20.81	20.82		
10	64QAM	1	25	20.78	20.66	20.74	21.5	2
10	64QAM	1	49	20.87	20.72	20.77		
10	64QAM	25	0	19.71	19.60	19.64		
10	64QAM	25	12	19.69	19.61	19.66	20.5	3
10	64QAM	25	25	19.74	19.55	19.62		
10	64QAM	50	0	19.77	19.60	19.62		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.63	22.50	22.63	23.5	0
5	QPSK	1	12	22.54	22.45	22.65		
5	QPSK	1	24	22.56	22.41	22.62		
5	QPSK	12	0	21.65	21.50	21.61	22.5	1
5	QPSK	12	7	21.61	21.49	21.61		
5	QPSK	12	13	21.60	21.46	21.68		
5	QPSK	25	0	21.62	21.46	21.59	22.5	1
5	16QAM	1	0	21.88	21.87	21.97		
5	16QAM	1	12	21.85	21.74	22.01		
5	16QAM	1	24	21.89	21.73	22.00	21.5	2
5	16QAM	12	0	20.67	20.56	20.75		
5	16QAM	12	7	20.70	20.59	20.71		
5	16QAM	12	13	20.68	20.53	20.78	21.5	2
5	16QAM	25	0	20.68	20.56	20.69		
5	64QAM	1	0	20.87	20.71	20.83		
5	64QAM	1	12	20.87	20.66	20.92	21.5	2
5	64QAM	1	24	20.80	20.65	20.87		
5	64QAM	12	0	19.77	19.61	19.72		
5	64QAM	12	7	19.76	19.62	19.77	20.5	3
5	64QAM	12	13	19.72	19.60	19.84		
5	64QAM	25	0	19.68	19.59	19.66		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.57	22.42	22.66	23.5	0
3	QPSK	1	8	22.44	22.43	22.64		
3	QPSK	1	14	22.51	22.41	22.62		
3	QPSK	8	0	21.61	21.49	21.68	22.5	1
3	QPSK	8	4	21.51	21.48	21.72		
3	QPSK	8	7	21.57	21.43	21.69		
3	QPSK	15	0	21.59	21.47	21.67		
3	16QAM	1	0	21.83	21.71	22.01	22.5	1
3	16QAM	1	8	21.70	21.71	22.00		
3	16QAM	1	14	21.86	21.73	21.95		
3	16QAM	8	0	20.72	20.60	20.85	21.5	2
3	16QAM	8	4	20.63	20.60	20.85		
3	16QAM	8	7	20.68	20.56	20.82		
3	16QAM	15	0	20.69	20.56	20.78		
3	64QAM	1	0	20.80	20.64	20.93	21.5	2
3	64QAM	1	8	20.67	20.66	20.85		
3	64QAM	1	14	20.84	20.65	20.89		
3	64QAM	8	0	19.73	19.61	19.81	20.5	3
3	64QAM	8	4	19.61	19.64	19.84		
3	64QAM	8	7	19.69	19.55	19.82		
3	64QAM	15	0	19.70	19.57	19.80		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.48	22.34	22.55	23.5	0
1.4	QPSK	1	3	22.56	22.41	22.63		
1.4	QPSK	1	5	22.36	22.32	22.53		
1.4	QPSK	3	0	22.53	22.38	22.59		
1.4	QPSK	3	1	22.54	22.42	22.62		
1.4	QPSK	3	3	22.52	22.38	22.59	22.5	1
1.4	16QAM	6	0	21.54	21.39	21.61	22.5	1
1.4	16QAM	1	0	21.76	21.62	21.92		
1.4	16QAM	1	3	21.84	21.70	22.00		
1.4	16QAM	1	5	21.63	21.62	21.92		
1.4	16QAM	3	0	21.57	21.45	21.64		
1.4	16QAM	3	1	21.60	21.52	21.71		
1.4	16QAM	3	3	21.61	21.45	21.67	21.5	2
1.4	16QAM	6	0	20.69	20.54	20.78	21.5	2
1.4	64QAM	1	0	20.75	20.59	20.75		
1.4	64QAM	1	3	20.78	20.70	20.84		
1.4	64QAM	1	5	20.63	20.55	20.75		
1.4	64QAM	3	0	20.71	20.57	20.81		
1.4	64QAM	3	1	20.76	20.64	20.85		
1.4	64QAM	3	3	20.71	20.57	20.79		
1.4	64QAM	6	0	19.61	19.47	19.71	20.5	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.64	22.70	22.84	23.5	0
20	QPSK	1	49	22.37	22.55	22.64		
20	QPSK	1	99	22.41	22.62	22.60		
20	QPSK	50	0	21.48	21.69	21.72	22.5	1
20	QPSK	50	24	21.45	21.66	21.62		
20	QPSK	50	50	21.43	21.61	21.62		
20	QPSK	100	0	21.50	21.63	21.58	22.5	1
20	16QAM	1	0	21.99	22.03	22.14		
20	16QAM	1	49	21.75	21.91	21.95		
20	16QAM	1	99	21.78	21.91	21.92	21.5	2
20	16QAM	50	0	20.59	20.76	20.79		
20	16QAM	50	24	20.56	20.76	20.68		
20	16QAM	50	50	20.54	20.68	20.69	21.5	2
20	16QAM	100	0	20.54	20.73	20.71		
20	64QAM	1	0	20.92	20.98	21.07		
20	64QAM	1	49	20.70	20.83	20.92	21.5	2
20	64QAM	1	99	20.73	20.87	20.82		
20	64QAM	50	0	19.62	19.81	19.81		
20	64QAM	50	24	19.58	19.76	19.70	20.5	3
20	64QAM	50	50	19.54	19.71	19.73		
20	64QAM	100	0	19.61	19.76	19.69		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.61	22.68	22.70	23.5	0
15	QPSK	1	37	22.38	22.59	22.57		
15	QPSK	1	74	22.42	22.63	22.58		
15	QPSK	36	0	21.44	21.68	21.64	22.5	1
15	QPSK	36	20	21.49	21.66	21.67		
15	QPSK	36	39	21.38	21.60	21.54		
15	QPSK	75	0	21.46	21.62	21.67	22.5	1
15	16QAM	1	0	21.92	22.04	22.08		
15	16QAM	1	37	21.72	21.93	21.92		
15	16QAM	1	74	21.74	22.01	21.91	21.5	2
15	16QAM	36	0	20.58	20.75	20.76		
15	16QAM	36	20	20.55	20.77	20.76		
15	16QAM	36	39	20.51	20.72	20.64	21.5	2
15	16QAM	75	0	20.54	20.72	20.77		
15	64QAM	1	0	20.93	20.98	20.95		
15	64QAM	1	37	20.69	20.88	20.82	21.5	2
15	64QAM	1	74	20.69	20.93	20.83		
15	64QAM	36	0	19.60	19.82	19.75		
15	64QAM	36	20	19.62	19.79	19.80	20.5	3
15	64QAM	36	39	19.56	19.75	19.72		
15	64QAM	75	0	19.54	19.75	19.78		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)		
Frequency (MHz)				2505	2535	2565				
10	QPSK	1	0	22.52	22.73	22.69	23.5	0		
10	QPSK	1	25	22.48	22.58	22.66				
10	QPSK	1	49	22.33	22.65	22.58				
10	QPSK	25	0	21.55	21.65	21.64	22.5	1		
10	QPSK	25	12	21.46	21.66	21.63				
10	QPSK	25	25	21.41	21.58	21.62				
10	QPSK	50	0	21.44	21.60	21.59	22.5	1		
10	16QAM	1	0	21.88	22.07	22.02				
10	16QAM	1	25	21.82	21.94	22.02				
10	16QAM	1	49	21.69	21.98	21.93	21.5	2		
10	16QAM	25	0	20.63	20.74	20.78				
10	16QAM	25	12	20.54	20.73	20.72				
10	16QAM	25	25	20.50	20.68	20.74	21.5	2		
10	16QAM	50	0	20.54	20.74	20.69				
10	64QAM	1	0	20.84	21.02	20.89				
10	64QAM	1	25	20.77	20.89	20.89	21.5	2		
10	64QAM	1	49	20.65	20.86	20.77				
10	64QAM	25	0	19.62	19.73	19.74				
10	64QAM	25	12	19.53	19.77	19.73	20.5	3		
10	64QAM	25	25	19.52	19.69	19.75				
10	64QAM	25	25	19.52	19.72	19.74				
10	64QAM	50	0	19.52	19.72	19.74	20.5	3		
Channel				20775	21100	21425			Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5				
5	QPSK	1	0	22.48	22.71	22.66	23.5	0		
5	QPSK	1	12	22.46	22.57	22.64				
5	QPSK	1	24	22.47	22.54	22.59				
5	QPSK	12	0	21.49	21.62	21.70	22.5	1		
5	QPSK	12	7	21.56	21.68	21.68				
5	QPSK	12	13	21.48	21.63	21.66				
5	QPSK	25	0	21.51	21.65	21.65	22.5	1		
5	16QAM	1	0	21.83	22.00	22.03				
5	16QAM	1	12	21.83	21.95	21.96				
5	16QAM	1	24	21.76	21.91	21.90	21.5	2		
5	16QAM	12	0	20.61	20.70	20.78				
5	16QAM	12	7	20.65	20.72	20.79				
5	16QAM	12	13	20.58	20.70	20.71	21.5	2		
5	16QAM	25	0	20.59	20.70	20.72				
5	64QAM	1	0	20.80	20.97	20.98				
5	64QAM	1	12	20.73	20.87	20.90	21.5	2		
5	64QAM	1	24	20.70	20.83	20.85				
5	64QAM	12	0	19.67	19.80	19.84				
5	64QAM	12	7	19.70	19.84	19.83	20.5	3		
5	64QAM	12	13	19.66	19.80	19.78				
5	64QAM	25	0	19.59	19.71	19.74				



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.50	22.48	22.66	23.5	0
10	QPSK	1	25	22.53	22.50	22.58		
10	QPSK	1	49	22.53	22.50	22.67		
10	QPSK	25	0	21.62	21.57	21.63	22.5	1
10	QPSK	25	12	21.62	21.57	21.63		
10	QPSK	25	25	21.54	21.52	21.59		
10	QPSK	50	0	21.58	21.55	21.61	22.5	1
10	16QAM	1	0	21.87	21.87	21.92		
10	16QAM	1	25	21.87	21.81	21.93		
10	16QAM	1	49	21.90	21.90	21.97	21.5	2
10	16QAM	25	0	20.69	20.66	20.68		
10	16QAM	25	12	20.71	20.64	20.71		
10	16QAM	25	25	20.63	20.63	20.69	21.5	2
10	16QAM	50	0	20.68	20.65	20.72		
10	64QAM	1	0	20.77	20.79	20.91		
10	64QAM	1	25	20.76	20.68	20.86	21.5	2
10	64QAM	1	49	20.75	20.80	20.97		
10	64QAM	25	0	19.72	19.66	19.74		
10	64QAM	25	12	19.72	19.66	19.72	20.5	3
10	64QAM	25	25	19.67	19.64	19.71		
10	64QAM	50	0	19.68	19.67	19.70		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.49	22.45	22.56	23.5	0
5	QPSK	1	12	22.47	22.49	22.55		
5	QPSK	1	24	22.57	22.51	22.63		
5	QPSK	12	0	21.51	21.56	21.59	22.5	1
5	QPSK	12	7	21.51	21.55	21.61		
5	QPSK	12	13	21.62	21.52	21.57		
5	QPSK	25	0	21.59	21.52	21.58	22.5	1
5	16QAM	1	0	21.85	21.73	21.91		
5	16QAM	1	12	21.76	21.76	21.89		
5	16QAM	1	24	21.85	21.81	21.94	21.5	2
5	16QAM	12	0	20.60	20.65	20.67		
5	16QAM	12	7	20.63	20.65	20.71		
5	16QAM	12	13	20.70	20.62	20.65	21.5	2
5	16QAM	25	0	20.68	20.64	20.69		
5	64QAM	1	0	20.74	20.69	20.86		
5	64QAM	1	12	20.68	20.71	20.85	21.5	2
5	64QAM	1	24	20.76	20.80	20.91		
5	64QAM	12	0	19.67	19.71	19.73		
5	64QAM	12	7	19.67	19.71	19.78	20.5	3
5	64QAM	12	13	19.73	19.66	19.73		
5	64QAM	25	0	19.71	19.64	19.68		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.46	22.39	22.53	23.5	0
3	QPSK	1	8	22.45	22.47	22.51		
3	QPSK	1	14	22.46	22.49	22.60		
3	QPSK	8	0	21.50	21.55	21.55	22.5	1
3	QPSK	8	4	21.50	21.53	21.59		
3	QPSK	8	7	21.49	21.53	21.54		
3	QPSK	15	0	21.48	21.54	21.55		
3	16QAM	1	0	21.82	21.71	21.92	22.5	1
3	16QAM	1	8	21.78	21.77	21.84		
3	16QAM	1	14	21.76	21.83	21.96		
3	16QAM	8	0	20.63	20.64	20.71	21.5	2
3	16QAM	8	4	20.68	20.69	20.68		
3	16QAM	8	7	20.62	20.63	20.68		
3	16QAM	15	0	20.59	20.63	20.65		
3	64QAM	1	0	20.75	20.62	20.81	21.5	2
3	64QAM	1	8	20.73	20.71	20.77		
3	64QAM	1	14	20.70	20.76	20.87		
3	64QAM	8	0	19.63	19.65	19.67	20.5	3
3	64QAM	8	4	19.66	19.71	19.69		
3	64QAM	8	7	19.61	19.69	19.69		
3	64QAM	15	0	19.59	19.62	19.68		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.39	22.40	22.44	23.5	0
1.4	QPSK	1	3	22.46	22.47	22.61		
1.4	QPSK	1	5	22.37	22.38	22.51		
1.4	QPSK	3	0	22.44	22.43	22.47		
1.4	QPSK	3	1	22.48	22.51	22.50		
1.4	QPSK	3	3	22.44	22.43	22.58	22.5	1
1.4	16QAM	6	0	21.43	21.46	21.45	22.5	1
1.4	16QAM	1	0	21.77	21.69	21.72		
1.4	16QAM	1	3	21.87	21.76	21.87		
1.4	16QAM	1	5	21.78	21.73	21.88		
1.4	16QAM	3	0	21.53	21.46	21.53		
1.4	16QAM	3	1	21.58	21.53	21.56		
1.4	16QAM	3	3	21.53	21.47	21.65	21.5	2
1.4	16QAM	6	0	20.58	20.63	20.61	21.5	2
1.4	64QAM	1	0	20.64	20.63	20.65		
1.4	64QAM	1	3	20.70	20.78	20.83		
1.4	64QAM	1	5	20.62	20.61	20.78		
1.4	64QAM	3	0	20.66	20.61	20.69		
1.4	64QAM	3	1	20.73	20.68	20.73		
1.4	64QAM	3	3	20.64	20.64	20.74		
1.4	64QAM	6	0	19.52	19.55	19.56	20.5	3



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		22.54		23.5	0
10	QPSK	1	25		22.50			
10	QPSK	1	49		22.61			
10	QPSK	25	0		21.61		22.5	1
10	QPSK	25	12		21.58			
10	QPSK	25	25		21.51			
10	QPSK	50	0		21.58		22.5	1
10	16QAM	1	0		21.87			
10	16QAM	1	25		21.85			
10	16QAM	1	49		21.92		21.5	2
10	16QAM	25	0		20.68			
10	16QAM	25	12		20.63			
10	16QAM	25	25		20.60		21.5	2
10	16QAM	50	0		20.64			
10	64QAM	1	0		20.81			
10	64QAM	1	25		20.76		21.5	2
10	64QAM	1	49		20.82			
10	64QAM	25	0		19.72			
10	64QAM	25	12		19.69		20.5	3
10	64QAM	25	25		19.65			
10	64QAM	50	0		19.65			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.52	22.58	22.53	23.5	0
5	QPSK	1	12	22.45	22.51	22.60		
5	QPSK	1	24	22.52	22.51	22.59		
5	QPSK	12	0	21.54	21.57	21.56	22.5	1
5	QPSK	12	7	21.64	21.57	21.55		
5	QPSK	12	13	21.59	21.54	21.61		
5	QPSK	25	0	21.58	21.54	21.53	22.5	1
5	16QAM	1	0	21.88	21.92	21.83		
5	16QAM	1	12	21.84	21.88	21.90		
5	16QAM	1	24	21.88	21.83	21.88	21.5	2
5	16QAM	12	0	20.60	20.65	20.63		
5	16QAM	12	7	20.73	20.68	20.66		
5	16QAM	12	13	20.70	20.63	20.71	21.5	2
5	16QAM	25	0	20.69	20.64	20.60		
5	64QAM	1	0	20.79	20.83	20.80		
5	64QAM	1	12	20.72	20.76	20.82	21.5	2
5	64QAM	1	24	20.80	20.72	20.80		
5	64QAM	12	0	19.65	19.75	19.68		
5	64QAM	12	7	19.78	19.71	19.69	20.5	3
5	64QAM	12	13	19.75	19.69	19.74		
5	64QAM	25	0	19.70	19.64	19.60		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.47	22.46	22.69	23.5	0
10	QPSK	1	25	22.51	22.48	22.57		
10	QPSK	1	49	22.53	22.50	22.60		
10	QPSK	25	0	21.54	21.52	21.64	22.5	1
10	QPSK	25	12	21.56	21.54	21.63		
10	QPSK	25	25	21.50	21.52	21.62		
10	QPSK	50	0	21.54	21.56	21.63	22.5	1
10	16QAM	1	0	21.79	21.78	21.99		
10	16QAM	1	25	21.78	21.77	21.96		
10	16QAM	1	49	21.81	21.80	21.91	21.5	2
10	16QAM	25	0	20.67	20.62	20.71		
10	16QAM	25	12	20.65	20.61	20.74		
10	16QAM	25	25	20.62	20.58	20.67	21.5	2
10	16QAM	50	0	20.63	20.61	20.69		
10	64QAM	1	0	20.71	20.76	20.89		
10	64QAM	1	25	20.74	20.76	20.80	21.5	2
10	64QAM	1	49	20.73	20.80	20.83		
10	64QAM	25	0	19.66	19.61	19.72		
10	64QAM	25	12	19.65	19.65	19.72	20.5	3
10	64QAM	25	25	19.61	19.60	19.71		
10	64QAM	50	0	19.64	19.62	19.74		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.68	22.52	22.59	23.5	0
5	QPSK	1	12	22.63	22.49	22.55		
5	QPSK	1	24	22.65	22.50	22.55		
5	QPSK	12	0	21.66	21.51	21.60	22.5	1
5	QPSK	12	7	21.66	21.52	21.61		
5	QPSK	12	13	21.64	21.52	21.58		
5	QPSK	25	0	21.66	21.52	21.58	22.5	1
5	16QAM	1	0	21.99	21.85	21.90		
5	16QAM	1	12	21.96	21.85	21.84		
5	16QAM	1	24	21.91	21.86	21.85	21.5	2
5	16QAM	12	0	20.78	20.61	20.67		
5	16QAM	12	7	20.76	20.62	20.72		
5	16QAM	12	13	20.74	20.63	20.64	21.5	2
5	16QAM	25	0	20.76	20.60	20.66		
5	64QAM	1	0	20.95	20.76	20.87		
5	64QAM	1	12	20.89	20.79	20.79	21.5	2
5	64QAM	1	24	20.85	20.75	20.79		
5	64QAM	12	0	19.82	19.65	19.75		
5	64QAM	12	7	19.85	19.67	19.76	20.5	3
5	64QAM	12	13	19.79	19.64	19.71		
5	64QAM	25	0	19.75	19.61	19.68		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.87	22.74	22.90	23.5	0
20	QPSK	1	49	22.62	22.57	22.70		
20	QPSK	1	99	22.48	22.47	22.71		
20	QPSK	50	0	21.76	21.71	21.81	22.5	1
20	QPSK	50	24	21.71	21.65	21.76		
20	QPSK	50	50	21.60	21.56	21.73		
20	QPSK	100	0	21.70	21.63	21.78	22.5	1
20	16QAM	1	0	22.24	22.13	22.29		
20	16QAM	1	49	21.97	21.97	22.09		
20	16QAM	1	99	21.87	21.91	22.10	21.5	2
20	16QAM	50	0	20.88	20.82	20.92		
20	16QAM	50	24	20.84	20.77	20.88		
20	16QAM	50	50	20.74	20.71	20.85	21.5	2
20	16QAM	100	0	20.79	20.75	20.88		
20	64QAM	1	0	21.22	20.97	21.20		
20	64QAM	1	49	20.93	20.83	21.00	21.5	2
20	64QAM	1	99	20.84	20.74	21.00		
20	64QAM	50	0	19.87	19.82	19.95		
20	64QAM	50	24	19.81	19.76	19.90	20.5	3
20	64QAM	50	50	19.73	19.70	19.85		
20	64QAM	100	0	19.83	19.78	19.89		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.89	22.73	22.85	23.5	0
15	QPSK	1	37	22.63	22.59	22.71		
15	QPSK	1	74	22.59	22.55	22.73		
15	QPSK	36	0	21.75	21.69	21.81	22.5	1
15	QPSK	36	20	21.68	21.64	21.76		
15	QPSK	36	39	21.61	21.61	21.75		
15	QPSK	75	0	21.67	21.63	21.76	22.5	1
15	16QAM	1	0	22.26	22.09	22.22		
15	16QAM	1	37	22.02	21.96	22.06		
15	16QAM	1	74	21.95	21.91	22.09	21.5	2
15	16QAM	36	0	20.86	20.77	20.92		
15	16QAM	36	20	20.79	20.76	20.88		
15	16QAM	36	39	20.76	20.68	20.84	21.5	2
15	16QAM	75	0	20.80	20.76	20.87		
15	64QAM	1	0	21.18	21.05	21.12		
15	64QAM	1	37	20.96	20.91	20.99	21.5	2
15	64QAM	1	74	20.91	20.88	20.97		
15	64QAM	36	0	19.89	19.84	19.96		
15	64QAM	36	20	19.83	19.78	19.92	20.5	3
15	64QAM	36	39	19.77	19.76	19.87		
15	64QAM	75	0	19.80	19.75	19.87		



Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.77	22.63	22.79	23.5	0
10	QPSK	1	25	22.70	22.53	22.71		
10	QPSK	1	49	22.56	22.49	22.71		
10	QPSK	25	0	21.77	21.61	21.78	22.5	1
10	QPSK	25	12	21.66	21.60	21.74		
10	QPSK	25	25	21.61	21.59	21.74		
10	QPSK	50	0	21.64	21.61	21.76		
10	16QAM	1	0	22.11	21.98	22.17	22.5	1
10	16QAM	1	25	22.06	21.92	22.09		
10	16QAM	1	49	21.91	21.88	22.07		
10	16QAM	25	0	20.89	20.74	20.86	21.5	2
10	16QAM	25	12	20.79	20.71	20.86		
10	16QAM	25	25	20.72	20.68	20.82		
10	16QAM	50	0	20.75	20.73	20.85		
10	64QAM	1	0	21.09	20.93	21.03	21.5	2
10	64QAM	1	25	21.02	20.89	20.96		
10	64QAM	1	49	20.86	20.82	20.93		
10	64QAM	25	0	19.89	19.74	19.87	20.5	3
10	64QAM	25	12	19.79	19.72	19.89		
10	64QAM	25	25	19.72	19.68	19.86		
10	64QAM	50	0	19.77	19.73	19.88		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.62	22.59	22.79	23.5	0
5	QPSK	1	12	22.61	22.56	22.73		
5	QPSK	1	24	22.56	22.52	22.73		
5	QPSK	12	0	21.66	21.62	21.76	22.5	1
5	QPSK	12	7	21.65	21.64	21.78		
5	QPSK	12	13	21.64	21.61	21.72		
5	QPSK	25	0	21.61	21.55	21.74		
5	16QAM	1	0	21.97	21.94	22.11	22.5	1
5	16QAM	1	12	21.95	21.92	22.10		
5	16QAM	1	24	21.93	21.90	22.06		
5	16QAM	12	0	20.78	20.72	20.87	21.5	2
5	16QAM	12	7	20.77	20.73	20.88		
5	16QAM	12	13	20.73	20.70	20.85		
5	16QAM	25	0	20.73	20.69	20.85		
5	64QAM	1	0	20.92	20.88	21.04	21.5	2
5	64QAM	1	12	20.88	20.85	21.03		
5	64QAM	1	24	20.87	20.81	21.01		
5	64QAM	12	0	19.81	19.76	19.91	20.5	3
5	64QAM	12	7	19.82	19.78	19.94		
5	64QAM	12	13	19.79	19.74	19.91		
5	64QAM	25	0	19.73	19.71	19.87		



Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.61	22.57	22.74	23.5	0
3	QPSK	1	8	22.58	22.54	22.70		
3	QPSK	1	14	22.60	22.53	22.69		
3	QPSK	8	0	21.64	21.58	21.72	22.5	1
3	QPSK	8	4	21.64	21.59	21.76		
3	QPSK	8	7	21.63	21.57	21.72		
3	QPSK	15	0	21.61	21.56	21.75		
3	16QAM	1	0	21.95	21.88	22.08	22.5	1
3	16QAM	1	8	21.99	21.94	22.07		
3	16QAM	1	14	21.92	21.90	22.01		
3	16QAM	8	0	20.81	20.76	20.87	21.5	2
3	16QAM	8	4	20.83	20.75	20.90		
3	16QAM	8	7	20.78	20.73	20.85		
3	16QAM	15	0	20.76	20.68	20.85		
3	64QAM	1	0	20.88	20.85	20.96	21.5	2
3	64QAM	1	8	20.86	20.85	20.98		
3	64QAM	1	14	20.90	20.81	20.98		
3	64QAM	8	0	19.81	19.77	19.89	20.5	3
3	64QAM	8	4	19.82	19.77	19.92		
3	64QAM	8	7	19.79	19.76	19.91		
3	64QAM	15	0	19.77	19.71	19.87		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.52	22.51	22.65	23.5	0
1.4	QPSK	1	3	22.61	22.54	22.73		
1.4	QPSK	1	5	22.52	22.48	22.64		
1.4	QPSK	3	0	22.56	22.50	22.70		
1.4	QPSK	3	1	22.59	22.55	22.73		
1.4	QPSK	3	3	22.55	22.50	22.70	22.5	1
1.4	QPSK	6	0	21.54	21.49	21.71	22.5	1
1.4	16QAM	1	0	21.91	21.88	21.98		
1.4	16QAM	1	3	21.96	21.94	22.09		
1.4	16QAM	1	5	21.88	21.87	22.01		
1.4	16QAM	3	0	21.69	21.62	21.80		
1.4	16QAM	3	1	21.71	21.67	21.84		
1.4	16QAM	3	3	21.66	21.61	21.80	21.5	2
1.4	16QAM	6	0	20.72	20.68	20.85	21.5	2
1.4	64QAM	1	0	20.80	20.71	20.91		
1.4	64QAM	1	3	20.90	20.83	20.97		
1.4	64QAM	1	5	20.77	20.79	20.88		
1.4	64QAM	3	0	20.82	20.75	20.92		
1.4	64QAM	3	1	20.85	20.81	20.96		
1.4	64QAM	3	3	20.82	20.77	20.90		
1.4	64QAM	6	0	19.66	19.60	19.80	20.5	3



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.96	22.96	22.98	23.5	0
15	QPSK	1	37	22.45	22.43	22.45		
15	QPSK	1	74	22.96	22.92	22.92		
15	QPSK	36	0	21.74	21.69	21.59	22.5	1
15	QPSK	36	20	21.53	21.56	21.55		
15	QPSK	36	39	21.73	21.59	21.56		
15	QPSK	75	0	21.63	21.62	21.60	22.5	1
15	16QAM	1	0	22.28	22.28	22.33		
15	16QAM	1	37	21.82	21.76	21.78		
15	16QAM	1	74	22.27	22.25	22.24	21.5	2
15	16QAM	36	0	20.81	20.78	20.72		
15	16QAM	36	20	20.62	20.62	20.62		
15	16QAM	36	39	20.80	20.68	20.68	21.5	2
15	16QAM	75	0	20.71	20.72	20.72		
15	64QAM	1	0	21.20	21.21	21.21		
15	64QAM	1	37	20.76	20.72	20.70	21.5	2
15	64QAM	1	74	21.19	21.18	21.14		
15	64QAM	36	0	19.83	19.83	19.72		
15	64QAM	36	20	19.67	19.66	19.64	20.5	3
15	64QAM	36	39	19.84	19.70	19.68		
15	64QAM	75	0	19.74	19.75	19.73		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.47	22.41	22.55	23.5	0
10	QPSK	1	25	22.45	22.43	22.50		
10	QPSK	1	49	22.43	22.48	22.46		
10	QPSK	25	0	21.53	21.49	21.52	22.5	1
10	QPSK	25	12	21.49	21.51	21.48		
10	QPSK	25	25	21.47	21.43	21.50		
10	QPSK	50	0	21.50	21.43	21.48	22.5	1
10	16QAM	1	0	21.79	21.79	21.90		
10	16QAM	1	25	21.81	21.78	21.83		
10	16QAM	1	49	21.78	21.87	21.80	21.5	2
10	16QAM	25	0	20.61	20.60	20.60		
10	16QAM	25	12	20.61	20.61	20.57		
10	16QAM	25	25	20.55	20.54	20.60	21.5	2
10	16QAM	50	0	20.56	20.54	20.54		
10	64QAM	1	0	20.70	20.67	20.81		
10	64QAM	1	25	20.69	20.67	20.75	21.5	2
10	64QAM	1	49	20.69	20.73	20.70		
10	64QAM	25	0	19.63	19.62	19.57		
10	64QAM	25	12	19.61	19.57	19.55	20.5	3
10	64QAM	25	25	19.56	19.53	19.61		
10	64QAM	50	0	19.60	19.59	19.57		



Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.41	22.48	22.55	23.5	0
5	QPSK	1	12	22.38	22.44	22.47		
5	QPSK	1	24	22.46	22.42	22.45		
5	QPSK	12	0	21.41	21.44	21.54	22.5	1
5	QPSK	12	7	21.45	21.45	21.52		
5	QPSK	12	13	21.40	21.43	21.51		
5	QPSK	25	0	21.52	21.45	21.51		
5	16QAM	1	0	21.75	21.81	21.87	22.5	1
5	16QAM	1	12	21.73	21.79	21.82		
5	16QAM	1	24	21.84	21.79	21.81		
5	16QAM	12	0	20.54	20.59	20.62	21.5	2
5	16QAM	12	7	20.53	20.61	20.66		
5	16QAM	12	13	20.49	20.55	20.60		
5	16QAM	25	0	20.59	20.54	20.61		
5	64QAM	1	0	20.68	20.75	20.77	21.5	2
5	64QAM	1	12	20.66	20.69	20.78		
5	64QAM	1	24	20.75	20.68	20.70		
5	64QAM	12	0	19.58	19.64	19.67	20.5	3
5	64QAM	12	7	19.58	19.61	19.66		
5	64QAM	12	13	19.55	19.59	19.64		
5	64QAM	25	0	19.60	19.59	19.61		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.39	22.42	22.49	23.5	0
3	QPSK	1	8	22.35	22.42	22.46		
3	QPSK	1	14	22.36	22.38	22.46		
3	QPSK	8	0	21.43	21.45	21.51	22.5	1
3	QPSK	8	4	21.43	21.48	21.51		
3	QPSK	8	7	21.41	21.43	21.48		
3	QPSK	15	0	21.39	21.42	21.48		
3	16QAM	1	0	21.66	21.76	21.81	22.5	1
3	16QAM	1	8	21.66	21.73	21.82		
3	16QAM	1	14	21.65	21.72	21.79		
3	16QAM	8	0	20.54	20.57	20.62	21.5	2
3	16QAM	8	4	20.56	20.62	20.66		
3	16QAM	8	7	20.54	20.59	20.62		
3	16QAM	15	0	20.51	20.52	20.61		
3	64QAM	1	0	20.63	20.66	20.75	21.5	2
3	64QAM	1	8	20.64	20.67	20.72		
3	64QAM	1	14	20.63	20.66	20.69		
3	64QAM	8	0	19.53	19.61	19.64	20.5	3
3	64QAM	8	4	19.58	19.57	19.65		
3	64QAM	8	7	19.52	19.56	19.63		
3	64QAM	15	0	19.52	19.53	19.62		



Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.30	22.33	22.39	23.5	0
1.4	QPSK	1	3	22.37	22.41	22.45		
1.4	QPSK	1	5	22.29	22.31	22.36		
1.4	QPSK	3	0	22.36	22.39	22.45		
1.4	QPSK	3	1	22.39	22.42	22.46		
1.4	QPSK	3	3	22.37	22.36	22.42		
1.4	QPSK	6	0	21.35	21.37	21.41	22.5	1
1.4	16QAM	1	0	21.63	21.67	21.70	22.5	1
1.4	16QAM	1	3	21.73	21.74	21.76		
1.4	16QAM	1	5	21.62	21.64	21.69		
1.4	16QAM	3	0	21.45	21.47	21.52		
1.4	16QAM	3	1	21.49	21.49	21.54		
1.4	16QAM	3	3	21.43	21.44	21.51	21.5	2
1.4	16QAM	6	0	20.51	20.53	20.58		
1.4	64QAM	1	0	20.58	20.60	20.65		
1.4	64QAM	1	3	20.66	20.69	20.75		
1.4	64QAM	1	5	20.54	20.59	20.65		
1.4	64QAM	3	0	20.56	20.61	20.64		
1.4	64QAM	3	1	20.59	20.63	20.68		
1.4	64QAM	3	3	20.57	20.59	20.65	20.5	3
1.4	64QAM	6	0	19.46	19.46	19.52		



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710			23.5	0
Frequency (MHz)				2310				
10	QPSK	1	0		22.80		23.5	0
10	QPSK	1	25		22.62			
10	QPSK	1	49		22.55			
10	QPSK	25	0		21.76		22.5	1
10	QPSK	25	12		21.71			
10	QPSK	25	25		21.65			
10	QPSK	50	0		21.71		22.5	1
10	16QAM	1	0		22.15			
10	16QAM	1	25		21.99			
10	16QAM	1	49		21.91		21.5	2
10	16QAM	25	0		20.86			
10	16QAM	25	12		20.77			
10	16QAM	25	25		20.70		21.5	2
10	16QAM	50	0		20.77			
10	64QAM	1	0		21.06			
10	64QAM	1	25		20.88		21.5	2
10	64QAM	1	49		20.81			
10	64QAM	25	0		19.86			
10	64QAM	25	12		19.82		20.5	3
10	64QAM	25	25		19.73			
10	64QAM	50	0		19.79			
Channel				27685	27710	27735	23.5	0
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	22.73	22.70	22.70	23.5	0
5	QPSK	1	12	22.63	22.64	22.60		
5	QPSK	1	24	22.59	22.59	22.57		
5	QPSK	12	0	21.73	21.70	21.66	22.5	1
5	QPSK	12	7	21.68	21.70	21.64		
5	QPSK	12	13	21.65	21.67	21.64		
5	QPSK	25	0	21.68	21.65	21.63	22.5	1
5	16QAM	1	0	22.13	22.09	22.07		
5	16QAM	1	12	22.02	21.97	21.97		
5	16QAM	1	24	21.92	21.96	21.94	21.5	2
5	16QAM	12	0	20.81	20.82	20.78		
5	16QAM	12	7	20.79	20.80	20.77		
5	16QAM	12	13	20.77	20.74	20.73	21.5	2
5	16QAM	25	0	20.77	20.75	20.73		
5	64QAM	1	0	21.05	20.99	20.95		
5	64QAM	1	12	20.93	20.91	20.88	21.5	2
5	64QAM	1	24	20.90	20.88	20.81		
5	64QAM	12	0	19.88	19.85	19.79		
5	64QAM	12	7	19.84	19.82	19.81	20.5	3
5	64QAM	12	13	19.80	19.76	19.77		
5	64QAM	25	0	19.80	19.78	19.73		



<Maximum Average RF Power (Proximity Sensor On)>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.49	19.40	19.83	20	0
20	QPSK	1	49	19.35	19.31	19.74		
20	QPSK	1	99	19.08	19.25	19.68		
20	QPSK	50	0	18.50	18.49	18.82	19	1
20	QPSK	50	24	18.46	18.39	18.76		
20	QPSK	50	50	18.31	18.41	18.75		
20	QPSK	100	0	18.35	18.44	18.78	19	1
20	16QAM	1	0	18.81	18.77	18.95		
20	16QAM	1	49	18.60	18.62	18.93		
20	16QAM	1	99	18.35	18.64	18.97	18	2
20	16QAM	50	0	17.64	17.57	17.86		
20	16QAM	50	24	17.56	17.51	17.86		
20	16QAM	50	50	17.41	17.46	17.81	18	2
20	16QAM	100	0	17.44	17.54	17.83		
20	64QAM	1	0	17.69	17.61	17.86		
20	64QAM	1	49	17.59	17.60	17.95	18	2
20	64QAM	1	99	17.32	17.48	17.92		
20	64QAM	50	0	16.61	16.57	16.88		
20	64QAM	50	24	16.57	16.52	16.85	18	2
20	64QAM	50	50	16.39	16.48	16.85		
20	64QAM	100	0	16.46	16.49	16.86		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	19.41	19.45	19.76	20	0
15	QPSK	1	37	19.34	19.34	19.66		
15	QPSK	1	74	19.25	19.32	19.71		
15	QPSK	36	0	18.39	18.43	18.77	19	1
15	QPSK	36	20	18.34	18.41	18.79		
15	QPSK	36	39	18.32	18.40	18.76		
15	QPSK	75	0	18.32	18.40	18.80	19	1
15	16QAM	1	0	18.74	18.78	18.94		
15	16QAM	1	37	18.63	18.65	19.00		
15	16QAM	1	74	18.54	18.67	18.97	18	2
15	16QAM	36	0	17.47	17.52	17.86		
15	16QAM	36	20	17.44	17.51	17.85		
15	16QAM	36	39	17.39	17.47	17.83	18	2
15	16QAM	75	0	17.43	17.47	17.85		
15	64QAM	1	0	17.68	17.68	17.89		
15	64QAM	1	37	17.59	17.56	17.87	18	2
15	64QAM	1	74	17.47	17.60	17.92		
15	64QAM	36	0	16.49	16.54	16.88		
15	64QAM	36	20	16.46	16.52	16.89	18	2
15	64QAM	36	39	16.42	16.50	16.87		
15	64QAM	75	0	16.42	16.48	16.84		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	19.30	19.33	19.82	20	0
10	QPSK	1	25	19.30	19.27	19.64		
10	QPSK	1	49	19.18	19.26	19.67		
10	QPSK	25	0	18.33	18.37	18.80	19	1
10	QPSK	25	12	18.30	18.41	18.77		
10	QPSK	25	25	18.26	18.35	18.75		
10	QPSK	50	0	18.30	18.35	18.76	19	1
10	16QAM	1	0	18.63	18.64	18.95		
10	16QAM	1	25	18.58	18.59	18.96		
10	16QAM	1	49	18.47	18.63	18.99	18	2
10	16QAM	25	0	17.41	17.46	17.81		
10	16QAM	25	12	17.40	17.48	17.83		
10	16QAM	25	25	17.36	17.43	17.85	18	2
10	16QAM	50	0	17.39	17.45	17.85		
10	64QAM	1	0	17.54	17.51	17.86		
10	64QAM	1	25	17.53	17.53	17.85	18	2
10	64QAM	1	49	17.38	17.44	17.91		
10	64QAM	25	0	16.40	16.47	16.86		
10	64QAM	25	12	16.41	16.49	16.84	18	2
10	64QAM	25	25	16.36	16.42	16.84		
10	64QAM	50	0	16.40	16.45	16.85		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	19.25	19.29	19.72	20	0
5	QPSK	1	12	19.21	19.27	19.67		
5	QPSK	1	24	19.27	19.28	19.70		
5	QPSK	12	0	18.28	18.36	18.76	19	1
5	QPSK	12	7	18.29	18.37	18.79		
5	QPSK	12	13	18.25	18.37	18.77		
5	QPSK	25	0	18.24	18.35	18.76	19	1
5	16QAM	1	0	18.52	18.64	18.76		
5	16QAM	1	12	18.56	18.58	18.98		
5	16QAM	1	24	18.53	18.61	19.00	18	2
5	16QAM	12	0	17.36	17.42	17.83		
5	16QAM	12	7	17.36	17.45	17.86		
5	16QAM	12	13	17.33	17.41	17.83	18	2
5	16QAM	25	0	17.34	17.42	17.81		
5	64QAM	1	0	17.47	17.54	17.97		
5	64QAM	1	12	17.41	17.53	17.93	18	2
5	64QAM	1	24	17.51	17.49	17.93		
5	64QAM	12	0	16.37	16.47	16.89		
5	64QAM	12	7	16.40	16.51	16.91	18	2
5	64QAM	12	13	16.36	16.46	16.86		
5	64QAM	25	0	16.34	16.42	16.85		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	19.24	19.29	19.68	20	0
3	QPSK	1	8	19.34	19.38	19.76		
3	QPSK	1	14	19.19	19.27	19.68		
3	QPSK	8	0	18.27	18.34	18.77	19	1
3	QPSK	8	4	18.30	18.37	18.78		
3	QPSK	8	7	18.26	18.36	18.76		
3	QPSK	15	0	18.25	18.32	18.75		
3	16QAM	1	0	18.48	18.56	18.98	19	1
3	16QAM	1	8	18.63	18.69	18.86		
3	16QAM	1	14	18.53	18.56	18.92		
3	16QAM	8	0	17.41	17.45	17.84	18	2
3	16QAM	8	4	17.39	17.46	17.90		
3	16QAM	8	7	17.37	17.46	17.89		
3	16QAM	15	0	17.34	17.42	17.82		
3	64QAM	1	0	17.48	17.56	17.98	18	2
3	64QAM	1	8	17.63	17.69	17.98		
3	64QAM	1	14	17.53	17.56	17.92		
3	64QAM	8	0	16.41	16.45	16.84	18	2
3	64QAM	8	4	16.39	16.46	16.90		
3	64QAM	8	7	16.37	16.46	16.89		
3	64QAM	15	0	16.34	16.42	16.82		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	19.14	19.19	19.60	20	0
1.4	QPSK	1	3	19.18	19.26	19.66		
1.4	QPSK	1	5	19.14	19.22	19.61		
1.4	QPSK	3	0	19.17	19.23	19.63		
1.4	QPSK	3	1	19.22	19.28	19.66		
1.4	QPSK	3	3	19.22	19.28	19.69	19	1
1.4	16QAM	6	0	18.18	18.28	18.68	19	1
1.4	16QAM	1	0	18.47	18.51	18.90		
1.4	16QAM	1	3	18.53	18.61	18.96		
1.4	16QAM	1	5	18.46	18.51	18.87		
1.4	16QAM	3	0	18.27	18.32	18.72		
1.4	16QAM	3	1	18.30	18.35	18.72		
1.4	16QAM	3	3	18.31	18.38	18.74	18	2
1.4	16QAM	6	0	17.31	17.41	17.79	18	2
1.4	64QAM	1	0	17.47	17.51	17.90		
1.4	64QAM	1	3	17.53	17.61	17.96		
1.4	64QAM	1	5	17.46	17.51	17.87		
1.4	64QAM	3	0	17.27	17.32	17.72		
1.4	64QAM	3	1	17.30	17.35	17.72		
1.4	64QAM	3	3	17.31	17.38	17.74		
1.4	64QAM	6	0	16.31	16.41	16.79		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	20.26	20.32	20.45	20.5	0
20	QPSK	1	49	20.22	20.05	20.18		
20	QPSK	1	99	20.01	20.10	20.15		
20	QPSK	50	0	19.37	19.27	19.38	20.5	0
20	QPSK	50	24	19.30	19.27	19.31		
20	QPSK	50	50	19.24	19.21	19.23		
20	QPSK	100	0	19.31	19.29	19.32	20.5	0
20	16QAM	1	0	19.62	19.75	19.84		
20	16QAM	1	49	19.57	19.37	19.60		
20	16QAM	1	99	19.36	19.45	19.54	18.5	2
20	16QAM	50	0	18.48	18.39	18.47		
20	16QAM	50	24	18.40	18.39	18.40		
20	16QAM	50	50	18.34	18.32	18.33	18.5	2
20	16QAM	100	0	18.38	18.38	18.40		
20	64QAM	1	0	19.51	19.64	19.71		
20	64QAM	1	49	19.50	19.29	19.45	20	0.5
20	64QAM	1	99	19.27	19.35	19.46		
20	64QAM	50	0	18.48	18.37	18.46		
20	64QAM	50	24	18.37	18.36	18.38	18.5	2
20	64QAM	50	50	18.32	18.29	18.31		
20	64QAM	100	0	18.37	18.39	18.39		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.22	20.29	20.40	20.5	0
15	QPSK	1	37	20.19	20.19	20.31		
15	QPSK	1	74	20.18	20.14	20.14		
15	QPSK	36	0	19.24	19.24	19.34	20.5	0
15	QPSK	36	20	19.29	19.26	19.28		
15	QPSK	36	39	19.22	19.22	19.22		
15	QPSK	75	0	19.28	19.27	19.27	20.5	0
15	16QAM	1	0	19.57	19.72	19.75		
15	16QAM	1	37	19.58	19.51	19.66		
15	16QAM	1	74	19.56	19.49	19.56	18.5	2
15	16QAM	36	0	18.32	18.32	18.41		
15	16QAM	36	20	18.40	18.39	18.38		
15	16QAM	36	39	18.35	18.29	18.33	18.5	2
15	16QAM	75	0	18.36	18.33	18.38		
15	64QAM	1	0	19.46	19.60	19.67		
15	64QAM	1	37	19.49	19.42	19.51	20	0.5
15	64QAM	1	74	19.40	19.41	19.45		
15	64QAM	36	0	18.32	18.35	18.40		
15	64QAM	36	20	18.39	18.36	18.38	18.5	2
15	64QAM	36	39	18.32	18.31	18.34		
15	64QAM	75	0	18.37	18.35	18.38		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.13	20.08	20.30	20.5	0
10	QPSK	1	25	20.09	20.05	20.23		
10	QPSK	1	49	20.13	20.10	20.11		
10	QPSK	25	0	19.19	19.21	19.27	20.5	0
10	QPSK	25	12	19.19	19.23	19.22		
10	QPSK	25	25	19.21	19.21	19.20		
10	QPSK	50	0	19.23	19.25	19.20		
10	16QAM	1	0	19.45	19.44	19.63	20.5	0
10	16QAM	1	25	19.39	19.38	19.57		
10	16QAM	1	49	19.48	19.46	19.51		
10	16QAM	25	0	18.28	18.27	18.34	18.5	2
10	16QAM	25	12	18.27	18.31	18.33		
10	16QAM	25	25	18.32	18.29	18.28		
10	16QAM	50	0	18.31	18.31	18.31		
10	64QAM	1	0	19.32	19.33	19.54	20	0.5
10	64QAM	1	25	19.30	19.28	19.46		
10	64QAM	1	49	19.38	19.36	19.42		
10	64QAM	25	0	18.28	18.26	18.46	18.5	2
10	64QAM	25	12	18.24	18.30	18.35		
10	64QAM	25	25	18.26	18.26	18.39		
10	64QAM	50	0	18.34	18.31	18.44		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.08	20.12	20.47	20.5	0
5	QPSK	1	12	20.10	20.17	20.26		
5	QPSK	1	24	20.06	20.16	20.24		
5	QPSK	12	0	19.16	19.15	19.37	20.5	0
5	QPSK	12	7	19.19	19.24	19.34		
5	QPSK	12	13	19.13	19.22	19.33		
5	QPSK	25	0	19.12	19.21	19.33		
5	16QAM	1	0	19.42	19.50	19.82	20.5	0
5	16QAM	1	12	19.41	19.53	19.54		
5	16QAM	1	24	19.42	19.50	19.55		
5	16QAM	12	0	18.27	18.23	18.41	18.5	2
5	16QAM	12	7	18.24	18.32	18.43		
5	16QAM	12	13	18.21	18.27	18.40		
5	16QAM	25	0	18.24	18.31	18.41		
5	64QAM	1	0	19.27	19.37	19.68	20	0.5
5	64QAM	1	12	19.32	19.41	19.48		
5	64QAM	1	24	19.33	19.48	19.46		
5	64QAM	12	0	18.23	18.25	18.43	18.5	2
5	64QAM	12	7	18.23	18.30	18.41		
5	64QAM	12	13	18.20	18.26	18.38		
5	64QAM	25	0	18.22	18.27	18.42		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.16	20.15	20.22	20.5	0
3	QPSK	1	8	20.12	20.31	20.29		
3	QPSK	1	14	20.10	20.18	20.18		
3	QPSK	8	0	19.11	19.27	19.27	20.5	0
3	QPSK	8	4	19.11	19.29	19.30		
3	QPSK	8	7	19.08	19.27	19.25		
3	QPSK	15	0	19.07	19.28	19.28		
3	16QAM	1	0	19.31	19.50	19.52	20.5	0
3	16QAM	1	8	19.47	19.63	19.66		
3	16QAM	1	14	19.35	19.52	19.51		
3	16QAM	8	0	18.22	18.41	18.41	18.5	2
3	16QAM	8	4	18.23	18.42	18.42		
3	16QAM	8	7	18.18	18.38	18.39		
3	16QAM	15	0	18.20	18.37	18.38		
3	64QAM	1	0	18.31	18.50	18.52	20	0.5
3	64QAM	1	8	18.47	18.63	18.66		
3	64QAM	1	14	18.35	18.52	18.51		
3	64QAM	8	0	17.22	17.41	17.41	18.5	2
3	64QAM	8	4	17.23	17.42	17.42		
3	64QAM	8	7	17.18	17.38	17.39		
3	64QAM	15	0	17.20	17.37	17.38		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	19.81	20.00	19.98	20.5	0
1.4	QPSK	1	3	19.88	19.96	20.08		
1.4	QPSK	1	5	19.80	19.99	19.96		
1.4	QPSK	3	0	19.86	19.94	20.04		
1.4	QPSK	3	1	19.90	20.07	20.07		
1.4	QPSK	3	3	19.89	20.07	20.08	20.5	0
1.4	QPSK	6	0	18.86	19.04	19.02	20.5	0
1.4	16QAM	1	0	19.17	19.26	19.33	20.5	0
1.4	16QAM	1	3	19.24	19.33	19.42		
1.4	16QAM	1	5	19.13	19.33	19.32		
1.4	16QAM	3	0	18.94	19.05	19.15		
1.4	16QAM	3	1	19.00	19.20	19.18		
1.4	16QAM	3	3	18.98	19.16	19.16	18.5	2
1.4	16QAM	6	0	18.01	18.20	18.19	20	0.5
1.4	64QAM	1	0	18.17	18.26	18.33		
1.4	64QAM	1	3	18.24	18.33	18.42		
1.4	64QAM	1	5	18.13	18.33	18.32		
1.4	64QAM	3	0	18.23	18.05	18.15		
1.4	64QAM	3	1	18.00	18.20	18.18		
1.4	64QAM	3	3	18.16	18.16	18.16		
1.4	64QAM	6	0	17.01	17.20	17.19	18.5	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	20.23	20.29	20.38	20.5	0
20	QPSK	1	49	19.97	20.14	20.19		
20	QPSK	1	99	19.98	20.20	20.14		
20	QPSK	50	0	19.10	19.27	19.30	20.5	0
20	QPSK	50	24	19.04	19.24	19.20		
20	QPSK	50	50	18.99	19.17	19.19		
20	QPSK	100	0	19.08	19.23	19.24	20.5	0
20	16QAM	1	0	19.62	19.67	19.76		
20	16QAM	1	49	19.36	19.52	19.60		
20	16QAM	1	99	19.37	19.57	19.53	19.5	1
20	16QAM	50	0	18.22	18.41	18.41		
20	16QAM	50	24	18.17	18.37	18.30		
20	16QAM	50	50	18.14	18.29	18.28	19.5	1
20	16QAM	100	0	18.14	18.35	18.26		
20	64QAM	1	0	18.56	18.56	18.69		
20	64QAM	1	49	18.29	18.47	18.51	19.5	1
20	64QAM	1	99	18.28	18.54	18.44		
20	64QAM	50	0	17.24	17.43	17.42		
20	64QAM	50	24	17.19	17.38	17.30	18.5	2
20	64QAM	50	50	17.14	17.30	17.30		
20	64QAM	100	0	17.20	17.36	17.30		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	20.22	20.26	20.30	20.5	0
15	QPSK	1	37	19.93	20.16	20.17		
15	QPSK	1	74	19.96	20.26	20.18		
15	QPSK	36	0	19.09	19.29	19.22	20.5	0
15	QPSK	36	20	19.03	19.24	19.26		
15	QPSK	36	39	18.99	19.21	19.20		
15	QPSK	75	0	19.02	19.24	19.28	20.5	0
15	16QAM	1	0	19.62	19.63	19.64		
15	16QAM	1	37	19.35	19.53	19.58		
15	16QAM	1	74	19.35	19.67	19.52	19.5	1
15	16QAM	36	0	18.19	18.40	18.32		
15	16QAM	36	20	18.16	18.38	18.38		
15	16QAM	36	39	18.13	18.35	18.28	19.5	1
15	16QAM	75	0	18.16	18.35	18.35		
15	64QAM	1	0	18.52	18.57	18.61		
15	64QAM	1	37	18.23	18.47	18.38	19.5	1
15	64QAM	1	74	18.27	18.55	18.37		
15	64QAM	36	0	17.26	17.43	17.27		
15	64QAM	36	20	17.21	17.44	17.32	18.5	2
15	64QAM	36	39	17.17	17.36	17.25		
15	64QAM	75	0	17.18	17.35	17.27		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	20.01	20.21	20.14	20.5	0
10	QPSK	1	25	19.94	20.06	20.12		
10	QPSK	1	49	19.77	20.14	20.03		
10	QPSK	25	0	19.02	19.12	19.13	20.5	0
10	QPSK	25	12	18.93	19.16	19.08		
10	QPSK	25	25	18.87	19.07	19.11		
10	QPSK	50	0	18.90	19.09	19.12	20.5	0
10	16QAM	1	0	19.38	19.58	19.52		
10	16QAM	1	25	19.36	19.41	19.52		
10	16QAM	1	49	19.17	19.47	19.40	19.5	1
10	16QAM	25	0	18.15	18.25	18.26		
10	16QAM	25	12	18.05	18.23	18.22		
10	16QAM	25	25	18.00	18.22	18.25	19.5	1
10	16QAM	50	0	18.03	18.24	18.17		
10	64QAM	1	0	18.38	18.58	18.52		
10	64QAM	1	25	18.36	18.41	18.52	19.5	1
10	64QAM	1	49	18.17	18.47	18.40		
10	64QAM	25	0	17.15	17.25	17.26		
10	64QAM	25	12	17.05	17.23	17.22	18.5	2
10	64QAM	25	25	17.00	17.22	17.25		
10	64QAM	50	0	17.03	17.24	17.17		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	19.95	20.16	20.15	20.5	0
5	QPSK	1	12	19.90	20.03	20.10		
5	QPSK	1	24	19.88	20.01	20.06		
5	QPSK	12	0	19.02	19.10	19.17	20.5	0
5	QPSK	12	7	19.02	19.12	19.20		
5	QPSK	12	13	18.99	19.09	19.12		
5	QPSK	25	0	18.97	19.07	19.13	20.5	0
5	16QAM	1	0	19.31	19.52	19.47		
5	16QAM	1	12	19.29	19.41	19.41		
5	16QAM	1	24	19.23	19.38	19.37	19.5	1
5	16QAM	12	0	18.15	18.23	18.26		
5	16QAM	12	7	18.15	18.27	18.26		
5	16QAM	12	13	18.11	18.23	18.24	19.5	1
5	16QAM	25	0	18.11	18.21	18.25		
5	64QAM	1	0	18.28	18.50	18.40		
5	64QAM	1	12	18.23	18.38	18.38	19.5	1
5	64QAM	1	24	18.21	18.31	18.31		
5	64QAM	12	0	17.21	17.29	17.34		
5	64QAM	12	7	17.21	17.31	17.34	18.5	2
5	64QAM	12	13	17.16	17.29	17.27		
5	64QAM	25	0	17.11	17.22	17.24		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	19.25	19.20	19.56	20	0
20	QPSK	1	49	19.03	19.08	19.33		
20	QPSK	1	99	18.93	19.05	19.40		
20	QPSK	50	0	18.17	18.21	18.46	19	1
20	QPSK	50	24	18.14	18.17	18.44		
20	QPSK	50	50	18.07	18.13	18.44		
20	QPSK	100	0	18.09	18.20	18.45	19	1
20	16QAM	1	0	18.57	18.57	18.86		
20	16QAM	1	49	18.32	18.44	18.72		
20	16QAM	1	99	18.29	18.41	18.85	18	2
20	16QAM	50	0	17.28	17.32	17.57		
20	16QAM	50	24	17.23	17.29	17.53		
20	16QAM	50	50	17.17	17.27	17.50	18	2
20	16QAM	100	0	17.21	17.28	17.53		
20	64QAM	1	0	17.55	17.42	17.69		
20	64QAM	1	49	17.34	17.39	17.56	18	2
20	64QAM	1	99	17.29	17.27	17.69		
20	64QAM	50	0	16.27	16.33	16.55		
20	64QAM	50	24	16.22	16.30	16.54	18	2
20	64QAM	50	50	16.17	16.25	16.54		
20	64QAM	100	0	16.21	16.29	16.55		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	19.23	19.20	19.50	20	0
15	QPSK	1	37	19.04	19.08	19.38		
15	QPSK	1	74	18.99	19.12	19.44		
15	QPSK	36	0	18.12	18.21	18.46	19	1
15	QPSK	36	20	18.09	18.16	18.46		
15	QPSK	36	39	18.04	18.14	18.46		
15	QPSK	75	0	18.10	18.16	18.46	19	1
15	16QAM	1	0	18.56	18.57	18.83		
15	16QAM	1	37	18.31	18.44	18.70		
15	16QAM	1	74	18.27	18.47	18.84	18	2
15	16QAM	36	0	17.24	17.31	17.57		
15	16QAM	36	20	17.21	17.27	17.56		
15	16QAM	36	39	17.17	17.26	17.55	18	2
15	16QAM	75	0	17.19	17.26	17.54		
15	64QAM	1	0	17.52	17.52	17.71		
15	64QAM	1	37	17.31	17.41	17.61	18	2
15	64QAM	1	74	17.25	17.41	17.71		
15	64QAM	36	0	16.26	16.33	16.60		
15	64QAM	36	20	16.25	16.31	16.59	18	2
15	64QAM	36	39	16.18	16.26	16.60		
15	64QAM	75	0	16.19	16.25	16.56		



Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	19.12	19.08	19.43	20	0
10	QPSK	1	25	19.05	19.05	19.39		
10	QPSK	1	49	18.94	19.03	19.41		
10	QPSK	25	0	18.16	18.13	18.46	19	1
10	QPSK	25	12	18.05	18.13	18.43		
10	QPSK	25	25	18.01	18.10	18.42		
10	QPSK	50	0	18.03	18.12	18.43		
10	16QAM	1	0	18.46	18.49	18.77	19	1
10	16QAM	1	25	18.38	18.44	18.66		
10	16QAM	1	49	18.20	18.44	18.68		
10	16QAM	25	0	17.27	17.25	17.54	18	2
10	16QAM	25	12	17.17	17.24	17.54		
10	16QAM	25	25	17.09	17.21	17.51		
10	16QAM	50	0	17.13	17.24	17.52		
10	64QAM	1	0	17.36	17.39	17.67	18	2
10	64QAM	1	25	17.28	17.31	17.61		
10	64QAM	1	49	17.13	17.28	17.62		
10	64QAM	25	0	16.26	16.26	16.53	18	2
10	64QAM	25	12	16.18	16.23	16.53		
10	64QAM	25	25	16.11	16.22	16.56		
10	64QAM	50	0	16.17	16.23	16.57		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	18.98	19.10	19.46	20	0
5	QPSK	1	12	18.96	19.06	19.43		
5	QPSK	1	24	18.97	19.08	19.45		
5	QPSK	12	0	18.06	18.12	18.47	19	1
5	QPSK	12	7	18.07	18.17	18.49		
5	QPSK	12	13	18.03	18.15	18.46		
5	QPSK	25	0	18.04	18.13	18.47		
5	16QAM	1	0	18.32	18.43	18.72	19	1
5	16QAM	1	12	18.35	18.41	18.84		
5	16QAM	1	24	18.26	18.38	18.82		
5	16QAM	12	0	17.18	17.24	17.53	18	2
5	16QAM	12	7	17.16	17.25	17.56		
5	16QAM	12	13	17.13	17.22	17.57		
5	16QAM	25	0	17.12	17.23	17.54		
5	64QAM	1	0	17.26	17.40	17.71	18	2
5	64QAM	1	12	17.26	17.33	17.81		
5	64QAM	1	24	17.21	17.29	17.78		
5	64QAM	12	0	16.20	16.27	16.62	18	2
5	64QAM	12	7	16.17	16.30	16.63		
5	64QAM	12	13	16.16	16.27	16.61		
5	64QAM	25	0	16.12	16.20	16.57		



Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	19.01	19.13	19.45	20	0
3	QPSK	1	8	19.09	19.22	19.56		
3	QPSK	1	14	18.95	19.09	19.44		
3	QPSK	8	0	18.06	18.13	18.47	19	1
3	QPSK	8	4	18.06	18.15	18.50		
3	QPSK	8	7	18.04	18.13	18.48		
3	QPSK	15	0	18.06	18.13	18.47		
3	16QAM	1	0	18.37	18.49	18.76	19	1
3	16QAM	1	8	18.47	18.58	18.86		
3	16QAM	1	14	18.31	18.46	18.73		
3	16QAM	8	0	17.20	17.26	17.59	18	2
3	16QAM	8	4	17.23	17.28	17.64		
3	16QAM	8	7	17.20	17.27	17.62		
3	16QAM	15	0	17.13	17.22	17.57		
3	64QAM	1	0	17.24	17.39	17.70	18	2
3	64QAM	1	8	17.38	17.49	17.79		
3	64QAM	1	14	17.23	17.37	17.69		
3	64QAM	8	0	16.19	16.27	16.61	18	2
3	64QAM	8	4	16.22	16.30	16.65		
3	64QAM	8	7	16.16	16.29	16.64		
3	64QAM	15	0	16.17	16.25	16.60		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	18.98	19.11	19.46	20	0
1.4	QPSK	1	3	19.07	19.17	19.53		
1.4	QPSK	1	5	19.01	19.09	19.47		
1.4	QPSK	3	0	19.03	19.13	19.51		
1.4	QPSK	3	1	19.10	19.16	19.54		
1.4	QPSK	3	3	19.08	19.19	19.54	19	1
1.4	16QAM	6	0	18.06	18.15	18.52	19	1
1.4	16QAM	1	0	18.31	18.42	18.75		
1.4	16QAM	1	3	18.43	18.50	18.82		
1.4	16QAM	1	5	18.35	18.42	18.77		
1.4	16QAM	3	0	18.16	18.27	18.56		
1.4	16QAM	3	1	18.18	18.30	18.59		
1.4	16QAM	3	3	18.18	18.31	18.56	18	2
1.4	16QAM	6	0	17.23	17.31	17.67	18	2
1.4	64QAM	1	0	17.33	17.39	17.71		
1.4	64QAM	1	3	17.32	17.37	17.70		
1.4	64QAM	1	5	17.32	17.40	17.72		
1.4	64QAM	3	0	17.17	17.24	17.60		
1.4	64QAM	3	1	17.16	17.28	17.61		
1.4	64QAM	3	3	17.18	17.24	17.61		
1.4	64QAM	6	0	17.18	17.25	17.61		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

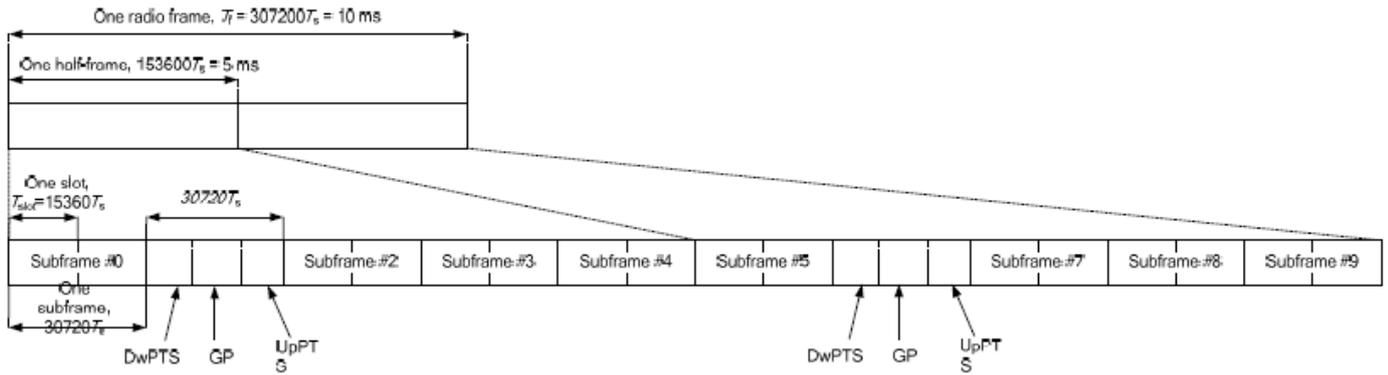


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts
1	19760 · Ts			20480 · Ts		
2	21952 · Ts			23040 · Ts		
3	24144 · Ts			25600 · Ts		
4	26336 · Ts			7680 · Ts	4384 · Ts	5120 · Ts
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts		
6	19760 · Ts			23040 · Ts		
7	21952 · Ts			12800 · Ts		
8	24144 · Ts			-	-	-
9	13168 · Ts			-	-	-

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<Maximum Average RF Power (Proximity Sensor Off)>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.89	22.78	22.80	23.5	0
20	QPSK	1	49	22.57	22.66	22.70		
20	QPSK	1	99	22.60	22.68	22.70		
20	QPSK	50	0	21.82	21.84	21.73	22.5	1
20	QPSK	50	24	21.76	21.75	21.77		
20	QPSK	50	50	21.67	21.69	21.68		
20	QPSK	100	0	21.73	21.75	21.77	22.5	1
20	16QAM	1	0	22.02	21.90	21.92		
20	16QAM	1	49	21.68	21.76	21.82		
20	16QAM	1	99	21.73	21.77	21.80	21.5	2
20	16QAM	50	0	20.89	20.91	20.87		
20	16QAM	50	24	20.85	20.87	20.87		
20	16QAM	50	50	20.75	20.78	20.76	21.5	2
20	16QAM	100	0	20.80	20.83	20.87		
20	64QAM	1	0	20.73	20.69	20.72		
20	64QAM	1	49	20.46	20.56	20.58	21.5	2
20	64QAM	1	99	20.43	20.57	20.55		
20	64QAM	50	0	19.90	19.91	19.85		
20	64QAM	50	24	19.83	19.83	19.89	20.5	3
20	64QAM	50	50	19.77	19.75	19.79		
20	64QAM	100	0	19.82	19.86	19.88		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.84	22.74	22.88	23.5	0
15	QPSK	1	37	22.56	22.67	22.70		
15	QPSK	1	74	22.65	22.74	22.71		
15	QPSK	36	0	21.76	21.78	21.81	22.5	1
15	QPSK	36	20	21.64	21.74	21.77		
15	QPSK	36	39	21.65	21.64	21.63		
15	QPSK	75	0	21.72	21.72	21.78	22.5	1
15	16QAM	1	0	21.95	21.84	21.98		
15	16QAM	1	37	21.69	21.77	21.79		
15	16QAM	1	74	21.73	21.84	21.83	21.5	2
15	16QAM	36	0	20.79	20.84	20.84		
15	16QAM	36	20	20.72	20.79	20.78		
15	16QAM	36	39	20.74	20.70	20.72	21.5	2
15	16QAM	75	0	20.81	20.82	20.84		
15	64QAM	1	0	20.70	20.60	20.72		
15	64QAM	1	37	20.44	20.56	20.54	21.5	2
15	64QAM	1	74	20.55	20.60	20.60		
15	64QAM	36	0	19.83	19.88	19.92		
15	64QAM	36	20	19.77	19.84	19.85	20.5	3
15	64QAM	36	39	19.73	19.76	19.77		
15	64QAM	75	0	19.83	19.78	19.85		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.75	22.67	22.80	23.5	0
10	QPSK	1	25	22.59	22.66	22.72		
10	QPSK	1	49	22.53	22.63	22.75		
10	QPSK	25	0	21.70	21.73	21.77	22.5	1
10	QPSK	25	12	21.65	21.73	21.74		
10	QPSK	25	25	21.58	21.66	21.68		
10	QPSK	50	0	21.74	21.72	21.75	22.5	1
10	16QAM	1	0	21.89	21.81	21.94		
10	16QAM	1	25	21.70	21.80	21.82		
10	16QAM	1	49	21.63	21.74	21.81	21.5	2
10	16QAM	25	0	20.82	20.84	20.89		
10	16QAM	25	12	20.74	20.82	20.84		
10	16QAM	25	25	20.68	20.78	20.79	21.5	2
10	16QAM	50	0	20.81	20.82	20.83		
10	64QAM	1	0	20.65	20.56	20.67		
10	64QAM	1	25	20.43	20.55	20.58	21.5	2
10	64QAM	1	49	20.38	20.47	20.58		
10	64QAM	25	0	19.86	19.89	19.89		
10	64QAM	25	12	19.76	19.86	19.89	20.5	3
10	64QAM	25	25	19.72	19.82	19.80		
10	64QAM	50	0	19.83	19.82	19.82		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.70	22.69	22.71	23.5	0
5	QPSK	1	12	22.58	22.66	22.71		
5	QPSK	1	24	22.51	22.61	22.68		
5	QPSK	12	0	21.72	21.70	21.74	22.5	1
5	QPSK	12	7	21.74	21.74	21.73		
5	QPSK	12	13	21.62	21.70	21.69		
5	QPSK	25	0	21.70	21.71	21.69	22.5	1
5	16QAM	1	0	21.81	21.80	21.80		
5	16QAM	1	12	21.67	21.79	21.78		
5	16QAM	1	24	21.67	21.73	21.84	21.5	2
5	16QAM	12	0	20.77	20.77	20.77		
5	16QAM	12	7	20.81	20.80	20.77		
5	16QAM	12	13	20.67	20.73	20.75	21.5	2
5	16QAM	25	0	20.81	20.84	20.81		
5	64QAM	1	0	20.58	20.58	20.59		
5	64QAM	1	12	20.46	20.52	20.54	21.5	2
5	64QAM	1	24	20.44	20.52	20.61		
5	64QAM	12	0	19.84	19.84	19.84		
5	64QAM	12	7	19.83	19.83	19.83	20.5	3
5	64QAM	12	13	19.73	19.81	19.79		
5	64QAM	25	0	19.85	19.85	19.82		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	22.73	22.72	22.91	22.85	22.56	23.5	0
20	QPSK	1	49	22.49	22.61	22.71	22.57	22.40		
20	QPSK	1	99	22.46	22.56	22.64	22.61	22.19		
20	QPSK	50	0	21.72	21.78	21.88	21.78	21.48	22.5	1
20	QPSK	50	24	21.58	21.70	21.81	21.65	21.47		
20	QPSK	50	50	21.54	21.65	21.72	21.57	21.37		
20	QPSK	100	0	21.56	21.69	21.80	21.63	21.32	22.5	1
20	16QAM	1	0	21.87	21.86	22.05	21.96	20.71		
20	16QAM	1	49	21.64	21.75	21.83	21.69	21.52		
20	16QAM	1	99	21.56	21.66	21.75	21.75	21.31	21.5	2
20	16QAM	50	0	20.78	20.86	20.96	20.82	20.53		
20	16QAM	50	24	20.69	20.81	20.90	20.78	20.56		
20	16QAM	50	50	20.65	20.74	20.81	20.64	20.44	21.5	2
20	16QAM	100	0	20.67	20.81	20.87	20.74	20.42		
20	64QAM	1	0	20.63	20.59	20.79	20.73	20.44		
20	64QAM	1	49	20.37	20.49	20.55	20.44	20.28	21.5	2
20	64QAM	1	99	20.29	20.41	20.51	20.48	20.06		
20	64QAM	50	0	19.79	19.84	19.97	19.85	19.59		
20	64QAM	50	24	19.70	19.77	19.87	19.74	19.55	20.5	3
20	64QAM	50	50	19.64	19.77	19.81	19.66	19.43		
20	64QAM	100	0	19.68	19.80	19.89	19.74	19.46		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	22.71	22.67	22.89	22.80	22.56	23.5	0
15	QPSK	1	37	22.44	22.61	22.72	22.57	22.35		
15	QPSK	1	74	22.46	22.57	22.66	22.57	22.27		
15	QPSK	36	0	21.57	21.74	21.82	21.71	21.51	22.5	1
15	QPSK	36	20	21.62	21.70	21.78	21.61	21.48		
15	QPSK	36	39	21.48	21.60	21.69	21.52	21.42		
15	QPSK	75	0	21.60	21.70	21.78	21.62	21.43	22.5	1
15	16QAM	1	0	21.80	21.82	22.00	21.86	21.63		
15	16QAM	1	37	21.55	21.74	21.81	21.67	21.47		
15	16QAM	1	74	21.52	21.71	21.78	21.65	21.38	21.5	2
15	16QAM	36	0	20.62	20.77	20.88	20.73	20.52		
15	16QAM	36	20	20.66	20.76	20.83	20.69	20.56		
15	16QAM	36	39	20.52	20.68	20.75	20.57	20.46	21.5	2
15	16QAM	75	0	20.68	20.75	20.86	20.72	20.50		
15	64QAM	1	0	20.58	20.54	20.75	20.64	20.42		
15	64QAM	1	37	20.30	20.49	20.60	20.43	20.22	21.5	2
15	64QAM	1	74	20.29	20.47	20.51	20.43	20.13		
15	64QAM	36	0	19.68	19.84	19.91	19.79	19.59		
15	64QAM	36	20	19.65	19.75	19.85	19.73	19.58	20.5	3
15	64QAM	36	39	19.57	19.72	19.79	19.62	19.51		
15	64QAM	75	0	19.69	19.77	19.86	19.66	19.51		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	22.62	22.61	22.80	22.71	22.64	23.5	0
10	QPSK	1	25	22.51	22.61	22.73	22.56	22.36		
10	QPSK	1	49	22.47	22.58	22.68	22.59	22.40		
10	QPSK	25	0	21.56	21.69	21.76	21.62	21.51	22.5	1
10	QPSK	25	12	21.50	21.67	21.78	21.63	21.43		
10	QPSK	25	25	21.53	21.60	21.73	21.57	21.40		
10	QPSK	50	0	21.62	21.67	21.78	21.61	21.46	22.5	1
10	16QAM	1	0	21.75	21.72	21.95	21.80	21.76		
10	16QAM	1	25	21.57	21.74	21.84	21.69	21.47		
10	16QAM	1	49	21.59	21.69	21.76	21.67	21.47	21.5	2
10	16QAM	25	0	20.65	20.81	20.90	20.75	20.63		
10	16QAM	25	12	20.62	20.76	20.87	20.72	20.53		
10	16QAM	25	25	20.65	20.70	20.83	20.67	20.48	21.5	2
10	16QAM	50	0	20.70	20.77	20.85	20.71	20.55		
10	64QAM	1	0	20.53	20.49	20.71	20.58	20.52		
10	64QAM	1	25	20.35	20.49	20.61	20.45	20.21	21.5	2
10	64QAM	1	49	20.34	20.45	20.54	20.42	20.23		
10	64QAM	25	0	19.71	19.83	19.92	19.77	19.64		
10	64QAM	25	12	19.68	19.84	19.93	19.74	19.56	20.5	3
10	64QAM	25	25	19.68	19.78	19.87	19.67	19.51		
10	64QAM	50	0	19.72	19.73	19.87	19.70	19.56		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	22.55	22.54	22.74	22.59	22.40	23.5	0
5	QPSK	1	12	22.47	22.62	22.71	22.64	22.33		
5	QPSK	1	24	22.39	22.57	22.64	22.56	22.23		
5	QPSK	12	0	21.54	21.67	21.78	21.60	21.40	22.5	1
5	QPSK	12	7	21.56	21.68	21.77	21.69	21.41		
5	QPSK	12	13	21.50	21.63	21.74	21.70	21.38		
5	QPSK	25	0	21.51	21.66	21.75	21.60	21.39	22.5	1
5	16QAM	1	0	21.64	21.66	21.83	21.70	21.49		
5	16QAM	1	12	21.61	21.73	21.82	21.72	21.42		
5	16QAM	1	24	21.55	21.72	21.78	21.69	21.40	21.5	2
5	16QAM	12	0	20.60	20.71	20.81	20.64	20.47		
5	16QAM	12	7	20.59	20.73	20.84	20.75	20.46		
5	16QAM	12	13	20.54	20.70	20.79	20.69	20.41	21.5	2
5	16QAM	25	0	20.62	20.77	20.85	20.68	20.46		
5	64QAM	1	0	20.43	20.43	20.40	20.45	20.26		
5	64QAM	1	12	20.37	20.49	20.58	20.52	20.22	21.5	2
5	64QAM	1	24	20.32	20.48	20.56	20.47	20.17		
5	64QAM	12	0	19.67	19.78	19.86	19.69	19.51		
5	64QAM	12	7	19.62	19.80	19.87	19.80	19.52	20.5	3
5	64QAM	12	13	19.58	19.73	19.80	19.75	19.44		
5	64QAM	25	0	19.66	19.77	19.88	19.71	19.51		



<LTE Carrier Aggregation>

General Note:

This device supports Carrier Aggregation on downlink for inter and intra band, on uplink for intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.

<Inter-Band for Two Carrier Combination>

E-UTRA CA configuration / Bandwidth combination set										
E-UTRA CA Configuration	Uplink CA configurations	E- UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_2A-5A	-	2			Yes	Yes	Yes	Yes	30	0
		5			Yes	Yes				
		2			Yes	Yes			20	1
		5			Yes	Yes				
CA_2A-12A	-	2			Yes	Yes	Yes	Yes	30	0
		12			Yes	Yes				
		2			Yes	Yes	Yes	Yes	30	1
		12		Yes	Yes	Yes				
		2			Yes	Yes			20	2
12			Yes	Yes						
CA_2A-13A	-	2			Yes	Yes	Yes	Yes	30	0
		13				Yes				
		2			Yes	Yes			20	1
13				Yes						
CA_2A-17A	-	2			Yes	Yes			20	0
		17			Yes	Yes				
CA_2A-29A	-	2			Yes	Yes			20	0
		29		Yes	Yes	Yes				
		2			Yes	Yes			20	1
		29			Yes	Yes				
		2			Yes	Yes	Yes	Yes	30	2
29			Yes	Yes						
CA_4A-5A	-	4			Yes	Yes			20	0
		5			Yes	Yes				
		4			Yes	Yes	Yes	Yes	30	0
		5			Yes	Yes				
CA_4A-12A	-	4	Yes	Yes	Yes	Yes			20	0
		12			Yes	Yes				
		4	Yes	Yes	Yes	Yes	Yes	Yes	30	1
		12			Yes	Yes				
		4			Yes	Yes	Yes	Yes	30	2
		12		Yes	Yes	Yes				
		4			Yes	Yes			20	3
		12			Yes	Yes				
		4			Yes	Yes	Yes	Yes	30	4
		12			Yes	Yes				
4			Yes	Yes	Yes		20	5		
12			Yes							
CA_4A-13A	-	4			Yes	Yes	Yes	Yes	30	0
		13				Yes				
		4			Yes	Yes			20	1
13				Yes						
CA_4A-17A	-	4			Yes	Yes			20	0
		17			Yes	Yes				



E-UTRA CA configuration / Bandwidth combination set										
E-UTRA CA Configuration	Uplink CA configurations	E- UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_4A-29A	-	4			Yes	Yes			20	0
		29		Yes	Yes	Yes				
		4			Yes	Yes			20	1
		29			Yes	Yes				
		4			Yes	Yes	Yes	Yes	30	2
29			Yes	Yes						
CA_5A-7A	-	5	Yes	Yes	Yes	Yes			30	0
		7				Yes	Yes	Yes		
		5			Yes	Yes			30	1
		7				Yes	Yes	Yes		
CA_5A-30A	-	5			Yes	Yes		20	0	
30			Yes	Yes						
CA_12A-30A	-	12			Yes	Yes			20	0
		30			Yes	Yes				
CA_25A-26A	-	25		Yes	Yes	Yes	Yes	Yes	35	0
		26	Yes	Yes	Yes	Yes	Yes			
		25		Yes	Yes	Yes			20	1
		26		Yes	Yes	Yes				
		25			Yes	Yes			20	2
26			Yes	Yes						
CA_26A-41A	-	26			Yes	Yes	Yes		35	0
		41			Yes	Yes	Yes	Yes		
CA_30A-29A	-	30			Yes	Yes			20	0
		29			Yes	Yes				

<Inter-Band for Three Carrier Combination>

E-UTRA CA configuration / Bandwidth combination set										
E-UTRA CA Configuration	Uplink CA configurations	E- UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_2A-12B	-	2			Yes	Yes	Yes	Yes	35	0
		12	See CA_12B Bandwidth Combination Set 0 in Table 5.6A.1-1							
CA_4A-12B	-	4			Yes	Yes	Yes	Yes	35	0
		12	See CA_12B Bandwidth Combination Set 0 in Table 5.6A.1-1							

<Intra-Band Carrier Combination> (Contiguous)

E-UTRA CA configuration / Bandwidth combination set							
E-UTRA CA configuration	Uplink CA configurations	Component carriers in order of increasing carrier frequency				Maximum aggregated bandwidth [MHz]	Bandwidth combination set
		Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]		
CA_2C	-	5	20			40	0
		10	15, 20				
		15	10, 15, 20				
		20	5, 10, 15, 20				
CA_4C	-	5	20			40	0
		10	15, 20				
		15	10, 15, 20				
		20	5, 10, 15, 20				
CA_7B	-	15	5			20	0
CA_7C	CA_7C	15	15			40	0
		20	20				
		10	20			40	1
		15	15, 20				
		20	10, 15, 20			40	2
		15	10, 15				
CA_12B	-	5	5, 10			15	0
CA_38C	CA_38C	15	15			40	0
		20	20				
CA_41C	CA_41C	10	20			40	0
		15	15, 20				
		20	10, 15, 20				
		5, 10	20			40	1
		15	15, 20				
		20	5, 10, 15, 20			40	2
		10	15, 20				
		15	10, 15, 20				
		20	10, 15, 20			40	3
		10	20				
20	20						
CA_41D	-	10	20	15		60	0
		10	15, 20	20			
		15	20	10, 15			
		15	10, 15, 20	20			
		20	15, 20	10			
		20	10, 15, 20	15, 20			

E-UTRA CA configuration / Bandwidth combination set							
E-UTRA CA configuration	Uplink CA configurations	Component carriers in order of increasing carrier frequency				Maximum aggregated bandwidth [MHz]	Bandwidth combination set
		Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]		
CA_2A-2A	-	5, 10, 15, 20	5, 10, 15, 20			40	0
CA_4A-4A	-	5, 10, 15, 20	5, 10, 15, 20			40	0
		5, 10	5, 10			20	1
CA_7A-7A	-	5	15			40	0
		10	10, 15				
		15	15, 20				
		20	20			40	1
		5, 10, 15, 20	5, 10, 15, 20				
		5, 10, 15, 20	5, 10				
CA_41A-41A	-	10, 15, 20	10, 15, 20			40	0
		5, 10, 15, 20	5, 10, 15, 20			40	1
CA_41A-41C	-	5, 10, 15, 20	See CA_41C Bandwidth Combination Set 1 in Table 5.6A.1-1		60	0	
		See CA_41C Bandwidth Combination Set 1 in Table 5.6A.1-1		5, 10, 15, 20			



<DL CA power measurement>

General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.

Index	2CC	Restriction	Completely Covered by Measurement Superset	Index	3CC	Restriction	Completely Covered by Measurement Superset
2CC #1	CA_2A-5A		No	3CC #1	CA_2A-12B		No
2CC #2	CA_2A-12A		No	3CC #2	CA_4A-12B		No
2CC #3	CA_2A-13A		No	3CC #3	CA_41D		No
2CC #4	CA_2A-17A		No	3CC #4	CA_41A-41C		No
2CC #5	CA_2A-29A	B29 SCC Only	No				No
2CC #6	CA_4A-5A		No				No
2CC #7	CA_4A-12A		No				No
2CC #8	CA_4A-13A		No				No
2CC #9	CA_4A-17A		No				No
2CC #10	CA_4A-29A	B29 SCC Only	No				No
2CC #11	CA_5A-7A		No				No
2CC #12	CA_5A-30A		No				No
2CC #13	CA_12A-30A		No				No
2CC #14	CA_25A-26A		No				No
2CC #15	CA_26A-41A	B41 SCC Only	No				No
2CC #16	CA_30A-29A	B29 SCC Only	No				No
2CC #17	CA_2C		No				No
2CC #18	CA_4C		No				No
2CC #19	CA_7B		No				No
2CC #20	CA_7C		No				No
2CC #21	CA_12B		No				No
2CC #22	CA_38C		No				No
2CC #23	CA_41C		No				No
2CC #24	CA_2A-2A		No				No
2CC #25	CA_4A-4A		No				No
2CC #26	CA_7A-7A		No				No
2CC #27	CA_41A-41A		No				No

LTE Carrier Aggregation Conducted Power (Downlink)

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink carrier aggregation only. Uplink carrier aggregation is not supported. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Maximum Average RF Power (Proximity Sensor Off)>

<Two Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)	
Inter-Band	CA_2A-5A	Band 2	20M	1900	19100	QPSK	1	0	Band 5	10M	881.5	2525	22.87	22.90	
		Band 5	10M	829	20450	QPSK	1	0	Band 2	20M	1960	900	22.64	22.67	
	CA_2A-12A	Band 2	20M	1900	19100	QPSK	1	0	Band 12	10M	737.5	5095	22.86	22.90	
		Band 12	10M	711	23130	QPSK	1	49	Band 2	20M	1960	900	22.62	22.67	
	CA_2A-13A	Band 2	20M	1900	19100	QPSK	1	0	Band 13	10M	751	5230	22.87	22.90	
		Band 13	10M	782	23230	QPSK	1	49	Band 2	20M	1960	900	22.59	22.61	
	CA_2A-17A	Band 2	10M	1905	19150	QPSK	1	0	Band 17	10M	740	5790	22.87	22.89	
		Band 17	10M	711	23800	QPSK	1	0	Band 2	10M	1960	900	22.68	22.69	
	CA_2A-29A	Band 2	20M	1900	19100	QPSK	1	0	Band 29	10M	722.5	9715	22.85	22.90	
	CA_4A-5A	Band 4	20M	1745	20300	QPSK	1	0	Band 5	10M	881.5	2525	23.01	23.09	
		Band 5	10M	829	20450	QPSK	1	0	Band 4	20M	2132.5	2175	22.65	22.67	
	CA_4A-12A	Band 4	20M	1745	20300	QPSK	1	0	Band 12	10M	737.5	5095	23.02	23.09	
		Band 12	10M	711	23130	QPSK	1	49	Band 4	20M	2132.5	2175	22.64	22.67	
	CA_4A-13A	Band 4	20M	1745	20300	QPSK	1	0	Band 13	10M	751	5230	23.02	23.09	
		Band 13	10M	782	23230	QPSK	1	49	Band 4	20M	2132.5	2175	22.56	22.61	
	CA_4A-17A	Band 4	10M	1750	20350	QPSK	1	0	Band 17	10M	740	5790	22.90	22.92	
		Band 17	10M	711	23800	QPSK	1	0	Band 4	10M	2132.5	2175	22.65	22.69	
	CA_4A-29A	Band 4	20M	1745	20300	QPSK	1	0	Band 29	10M	722.5	9715	23.02	23.09	
	CA_5A-7A	Band 5	10M	829	20450	QPSK	1	0	Band 7	20M	2655	3100	22.63	22.67	
		Band 7	20M	2560	21350	QPSK	1	0	Band 5	10M	881.5	2525	22.84	22.84	
CA_5A-30A	Band 5	10M	829	20450	QPSK	1	0	Band 30	10M	2355	9820	22.64	22.67		
	Band 30	10M	2310	27710	QPSK	1	0	Band 5	10M	881.5	2525	22.78	22.80		
CA_12A-30A	Band 12	10M	711	23130	QPSK	1	49	Band 30	10M	2355	9820	22.56	22.67		
	Band 30	10M	2310	27710	QPSK	1	0	Band 12	10M	737.5	5095	22.78	22.80		
CA_25A-26A	Band 25	20M	1905	26590	QPSK	1	0	Band 26	15M	876.5	8865	22.85	22.90		
	Band 26	15M	841.5	26965	QPSK	1	0	Band 25	20M	1962.5	8365	22.96	22.98		
CA_26A-41A	Band 26	15M	841.5	26965	QPSK	1	0	Band 41	20M	2593	40620	22.95	22.98		
CA_30A-29A	Band 30	10M	2310	27710	QPSK	1	0	Band 29	10M	722.5	9715	22.78	22.80		
Intra-Band	Contiguous	CA_2C	Band 2	20M	1900	19100	QPSK	1	0	Band 2	20M	1960.2	902	22.85	22.90
		CA_4C	Band 4	20M	1745	20300	QPSK	1	0	Band 4	20M	2125.2	2102	23.02	23.09
		CA_7B	Band 7	15M	2562.5	21375	QPSK	1	0	Band 7	5M	2673.2	3282	22.65	22.70
		CA_7C	Band 7	20M	2560	21350	QPSK	1	0	Band 7	20M	2660.2	3152	22.78	22.84
		CA_12B	Band 12	5M	713.5	23155	QPSK	1	24	Band 12	10M	733.8	5058	22.61	22.63
		CA_38C	Band 38	20M	2580	37850	QPSK	1	0	Band 38	20M	2599.8	38048	22.85	22.89
		CA_41C	Band 41	20M	2593	40620	QPSK	1	0	Band 41	20M	2573.2	40422	22.89	22.91
Non-Contiguous	CA_2A-2A	Band 2	20M	1900	19100	QPSK	1	0	Band 2	5M	1932.5	625	22.87	22.90	
	CA_4A-4A	Band 4	20M	1745	20300	QPSK	1	0	Band 4	5M	2112.5	1975	23.02	23.09	
	CA_7A-7A	Band 7	20M	2560	21350	QPSK	1	0	Band 7	5M	2622.5	2775	22.78	22.84	
	CA_41A-41A	Band 41	20M	2593	40620	QPSK	1	0	Band 41	5M	2687.5	41565	22.85	22.91	

<Three Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC1				SCC2				Power			
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)		
Inter-Band	CA_2A-12B	Band 2	20M	1900	19100	QPSK	1	0	Band 12	5M	737.5	5095	Band 12	10M	744.7	5167	22.85	22.90		
		Band 12	5M	713.5	23155	QPSK	1	24	Band 12	10M	733.8	5058	Band 2	20M	1960	900	22.61	22.63		
	CA_4A-12B	Band 4	20M	1745	20300	QPSK	1	0	Band 12	5M	737.5	5095	Band 12	10M	744.7	5167	23.01	23.09		
		Band 12	5M	713.5	23155	QPSK	1	24	Band 12	10M	733.8	5058	Band 4	20M	2132.5	2175	22.62	22.63		
Intra-Band	Contiguous	CA_41D	Band 41	20M	2593	40620	QPSK	1	0	Band 41	20M	2612.8	40818	Band 41	20M	2632.6	41016	22.89	22.91	
		Non-Contiguous	CA_41A-41C	Band 41	20M	2593	40620	QPSK	1	0	Band 41	5M	2687.5	41565	Band 41	20M	2675.8	41448	22.87	22.91
				Band 41	20M	2593	40620	QPSK	1	0	Band 41	20M	2612.8	40818	Band 41	5M	2498.5	39675	22.89	22.91

<Maximum Average RF Power (Proximity Sensor On)>

<Two Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)	
Inter-Band	CA_2A-5A	Band 2	20M	1900	19100	QPSK	1	0	Band 5	10M	881.5	2525	19.81	19.83	
		Band 5	10M	829	20450	QPSK	1	0	Band 2	20M	1960	900	22.64	22.67	
	CA_2A-12A	Band 2	20M	1900	19100	QPSK	1	0	Band 12	10M	737.5	5095	19.82	19.83	
		Band 12	10M	711	23130	QPSK	1	49	Band 2	20M	1960	900	22.62	22.67	
	CA_2A-13A	Band 2	20M	1900	19100	QPSK	1	0	Band 13	10M	751	5230	19.78	19.83	
		Band 13	10M	782	23230	QPSK	1	49	Band 2	20M	1960	900	22.59	22.61	
	CA_2A-17A	Band 2	10M	1905	19150	QPSK	1	0	Band 17	10M	740	5790	19.81	19.82	
		Band 17	10M	711	23800	QPSK	1	0	Band 2	10M	1960	900	22.68	22.69	
	CA_2A-29A	Band 2	20M	1900	19100	QPSK	1	0	Band 29	10M	722.5	9715	19.82	19.83	
	CA_4A-5A	Band 4	20M	1745	20300	QPSK	1	0	Band 5	10M	881.5	2525	20.41	20.45	
		Band 5	10M	829	20450	QPSK	1	0	Band 4	20M	2132.5	2175	22.65	22.67	
	CA_4A-12A	Band 4	20M	1745	20300	QPSK	1	0	Band 12	10M	737.5	5095	20.43	20.45	
		Band 12	10M	711	23130	QPSK	1	49	Band 4	20M	2132.5	2175	22.64	22.67	
	CA_4A-13A	Band 4	20M	1745	20300	QPSK	1	0	Band 13	10M	751	5230	20.39	20.45	
		Band 13	10M	782	23230	QPSK	1	49	Band 4	20M	2132.5	2175	22.56	22.61	
	CA_4A-17A	Band 4	10M	1750	20350	QPSK	1	0	Band 17	10M	740	5790	20.21	20.30	
		Band 17	10M	711	23800	QPSK	1	0	Band 4	10M	2132.5	2175	22.65	22.69	
	CA_4A-29A	Band 4	20M	1745	20300	QPSK	1	0	Band 29	10M	722.5	9715	20.38	20.45	
	CA_5A-7A	Band 5	10M	829	20450	QPSK	1	0	Band 7	20M	2655	3100	22.63	22.67	
		Band 7	20M	2560	21350	QPSK	1	0	Band 5	10M	881.5	2525	20.35	20.38	
CA_5A-30A	Band 5	10M	829	20450	QPSK	1	0	Band 30	10M	2355	9820	22.64	22.67		
	Band 30	10M	2310	27710	QPSK	1	0	Band 5	10M	881.5	2525	22.78	22.80		
CA_12A-30A	Band 12	10M	711	23130	QPSK	1	49	Band 30	10M	2355	9820	22.56	22.67		
	Band 30	10M	2310	27710	QPSK	1	0	Band 12	10M	737.5	5095	22.78	22.80		
CA_25A-26A	Band 25	20M	1905	26590	QPSK	1	0	Band 26	15M	876.5	8865	19.51	19.56		
	Band 26	15M	841.5	26965	QPSK	1	0	Band 25	20M	1962.5	8365	22.96	22.98		
CA_26A-41A	Band 26	15M	841.5	26965	QPSK	1	0	Band 41	20M	2593	40620	22.95	22.98		
CA_30A-29A	Band 30	10M	2310	27710	QPSK	1	0	Band 29	10M	722.5	9715	22.78	22.80		
Intra-Band	Contiguous	CA_2C	Band 2	20M	1900	19100	QPSK	1	0	Band 2	20M	1960.2	902	19.72	19.83
		CA_4C	Band 4	20M	1745	20300	QPSK	1	0	Band 4	20M	2125.2	2102	20.38	20.45
		CA_7B	Band 7	15M	2562.5	21375	QPSK	1	0	Band 7	5M	2673.2	3282	20.21	20.30
		CA_7C	Band 7	20M	2560	21350	QPSK	1	0	Band 7	20M	2660.2	3152	20.31	20.38
		CA_12B	Band 12	5M	713.5	23155	QPSK	1	24	Band 12	10M	733.8	5058	22.61	22.63
		CA_38C	Band 38	20M	2580	37850	QPSK	1	0	Band 38	20M	2599.8	38048	22.85	22.89
		CA_41C	Band 41	20M	2593	40620	QPSK	1	0	Band 41	20M	2573.2	40422	22.89	22.91
	Non-Contiguous	CA_2A-2A	Band 2	20M	1900	19100	QPSK	1	0	Band 2	5M	1932.5	625	19.78	19.83
		CA_4A-4A	Band 4	20M	1745	20300	QPSK	1	0	Band 4	5M	2112.5	1975	20.38	20.45
		CA_7A-7A	Band 7	20M	2560	21350	QPSK	1	0	Band 7	5M	2622.5	2775	20.31	20.38
CA_41A-41A	Band 41	20M	2593	40620	QPSK	1	0	Band 41	5M	2687.5	41565	22.85	22.91		

<Three Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC1				SCC2				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)	
Inter-Band	CA_2A-12B	Band 2	20M	1900	19100	QPSK	1	0	Band 12	5M	737.5	5095	Band 12	10M	744.7	5167	19.82	19.83	
		Band 12	5M	713.5	23155	QPSK	1	24	Band 12	10M	733.8	5058	Band 2	20M	1960	900	22.61	22.63	
	CA_4A-12B	Band 4	20M	1745	20300	QPSK	1	0	Band 12	5M	737.5	5095	Band 12	10M	744.7	5167	20.41	20.45	
		Band 12	5M	713.5	23155	QPSK	1	24	Band 12	10M	733.8	5058	Band 4	20M	2132.5	2175	22.62	22.63	
Intra-Band	Non-Contiguous	CA_41D	Band 41	20M	2593	40620	QPSK	1	0	Band 41	20M	2612.8	40818	Band 41	20M	2632.6	41016	22.89	22.91
		CA_41A-41C	Band 41	20M	2593	40620	QPSK	1	0	Band 41	5M	2687.5	41565	Band 41	20M	2675.8	41448	22.87	22.91
Band 41	20M		2593	40620	QPSK	1	0	Band 41	20M	2612.8	40818	Band 41	5M	2498.5	39675	22.89	22.91		

LTE Carrier Aggregation Conducted Power (Uplink)

1. This device supports uplink carrier aggregation for LTE CA_7C, CA_38C, CA_41C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. For the non-contiguously allocated resource blocks which the MPR level is determined by various RB separation and RB sizes requirement, and the allowed MPR levels, settings and the conducted powers are permanently implemented in this device per the 3GPP 36.36.101 section 6.2.3A.1.3 requirements.
2. According to November 2017 TCB workshop, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs
4. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.





<CA_7C>

Power State	Combination	PCC							SCC							Power		
		PCC Band	PCC Bandwidth (MHz)	PCC (UL) Channel	PCC (UL) Frequency (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth (MHz)	SCC (UL) Channel	SCC (UL) Frequency (MHz)	Modulation	SCC UL# RB	SCC UL RB Offset	ULCA Tx. Power (dBm)	ULCA Tune up Power (dBm)	Single Carrier Target. Power (dBm)
P-Sensor Off	CA_7C	LTE B7	20	20850	2510	QPSK	1	0	LTE B7	20	21048	2529.8	QPSK	0	0	23.02	23.50	23.50
		LTE B7	20	21100	2535	QPSK	1	0	LTE B7	20	20902	2515.2	QPSK	0	0	23.02	23.50	23.50
		LTE B7	20	21350	2560	QPSK	1	0	LTE B7	20	21152	2540.2	QPSK	0	0	22.85	23.50	23.50
P-Sensor On	CA_7C	LTE B7	20	20850	2510	QPSK	1	0	LTE B7	20	21048	2529.8	QPSK	0	0	20.31	20.50	20.50
		LTE B7	20	21100	2535	QPSK	1	0	LTE B7	20	20902	2515.2	QPSK	0	0	20.18	20.50	20.50
		LTE B7	20	21350	2560	QPSK	1	0	LTE B7	20	21152	2540.2	QPSK	0	0	20.23	20.50	20.50

<CA_38C>

Power State	Combination	PCC							SCC							Power		
		PCC Band	PCC Bandwidth (MHz)	PCC (UL/DL) Channel	PCC (UL/DL) Frequency (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth (MHz)	SCC (UL/DL) Channel	SCC (UL/DL) Frequency (MHz)	Modulation	SCC UL# RB	SCC UL RB Offset	ULCA Tx. Power (dBm)	ULCA Tune up Power (dBm)	Single Carrier Target. Power (dBm)
P-Sensor Off	CA_38C	LTE B38	20	37850	2580	QPSK	1	0	LTE B38	20	38048	2599.8	QPSK	0	0	23.11	23.50	23.50
		LTE B38	20	37901	2585.1	QPSK	1	0	LTE B38	20	38099	2604.9	QPSK	0	0	23.01	23.50	23.50
		LTE B38	20	38150	2610	QPSK	1	0	LTE B38	20	37952	2590.2	QPSK	0	0	23.03	23.50	23.50

<CA_41C>

Power State	Combination	PCC							SCC							Power		
		PCC Band	PCC Bandwidth (MHz)	PCC (UL/DL) Channel	PCC (UL/DL) Frequency (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth (MHz)	SCC (UL/DL) Channel	SCC (UL/DL) Frequency (MHz)	Modulation	SCC UL# RB	SCC UL RB Offset	ULCA Tx. Power (dBm)	ULCA Tune up Power (dBm)	Single Carrier Target. Power (dBm)
P-Sensor Off	CA_41C	LTE B41	20	39750	2506	QPSK	1	0	LTE B41	20	39948	2525.8	QPSK	0	0	22.86	23.50	23.50
		LTE B41	20	40185	2549.5	QPSK	1	0	LTE B41	20	39987	2529.7	QPSK	0	0	22.82	23.50	23.50
		LTE B41	20	40620	2593	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	0	0	23.02	23.50	23.50
		LTE B41	20	41055	2636.5	QPSK	1	0	LTE B41	20	40857	2616.7	QPSK	0	0	23.08	23.50	23.50
		LTE B41	20	41490	2680	QPSK	1	0	LTE B41	20	41292	2660.2	QPSK	0	0	23.24	23.50	23.50



<WLAN Conducted Power>

General Note:

3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN Ant.1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.53	19.00	98.57
		6	2437	18.56	19.00	
		11	2462	18.67	19.00	
	802.11g 6Mbps	1	2412	17.86	18.00	98.10
		6	2437	17.87	18.00	
		11	2462	17.89	18.00	
	802.11n-HT20 MCS0	1	2412	17.74	18.00	96.97
		6	2437	17.77	18.00	
		11	2462	17.76	18.00	
	802.11n-HT40 MCS0	3	2422	15.73	16.00	94.06
		6	2437	15.68	16.00	
		9	2452	15.69	16.00	



<2.4GHz WLAN Ant.2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.28	18.50	99.04
		6	2437	18.37	18.50	
		11	2462	18.17	18.50	
	802.11g 6Mbps	1	2412	17.62	18.00	98.10
		6	2437	17.56	18.00	
		11	2462	17.52	18.00	
	802.11n-HT20 MCS0	1	2412	17.46	18.00	96.97
		6	2437	17.37	18.00	
		11	2462	17.33	18.00	
	802.11n-HT40 MCS0	3	2422	15.67	16.00	94.06
		6	2437	15.66	16.00	
		9	2452	15.64	16.00	

<2.4GHz WLAN Ant.1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11g 6Mbps	1	2412	20.77	21.00	98.10
		6	2437	20.75	21.00	
		11	2462	20.75	21.00	
	802.11n-HT20 MCS0	1	2412	20.62	21.00	97.96
		6	2437	20.60	21.00	
		11	2462	20.58	21.00	
	802.11n-HT40 MCS0	3	2422	18.72	19.00	94.06
		6	2437	18.69	19.00	
		9	2452	18.69	19.00	



<5GHz WLAN Ant.1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	12.31	13.00	98.10
		40	5200	12.25	13.00	
		44	5220	12.11	13.00	
		48	5240	12.14	13.00	
	802.11n-HT20 MCS0	36	5180	11.74	12.00	97.97
		40	5200	11.65	12.00	
		44	5220	11.58	12.00	
		48	5240	11.61	12.00	
	802.11n-HT40 MCS0	38	5190	11.79	12.00	95.96
		46	5230	11.59	12.00	
	802.11ac-VHT20 MCS0	36	5180	11.70	12.00	97.98
		40	5200	11.62	12.00	
		44	5220	11.54	12.00	
		48	5240	11.59	12.00	
	802.11ac-VHT40 MCS0	38	5190	11.77	12.00	96.00
		46	5230	11.58	12.00	
802.11ac-VHT80 MCS0	42	5210	11.59	12.00	92.77	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	12.12	13.00	98.10
		56	5280	12.07	13.00	
		60	5300	12.15	13.00	
		64	5320	12.18	13.00	
	802.11n-HT20 MCS0	52	5260	11.51	12.00	97.97
		56	5280	11.55	12.00	
		60	5300	11.57	12.00	
		64	5320	11.59	12.00	
	802.11n-HT40 MCS0	54	5270	11.60	12.00	95.96
		62	5310	11.65	12.00	
	802.11ac-VHT20 MCS0	52	5260	11.48	12.00	97.98
		56	5280	11.44	12.00	
		60	5300	11.54	12.00	
		64	5320	11.57	12.00	
	802.11ac-VHT40 MCS0	54	5270	11.57	12.00	96.00
		62	5310	11.62	12.00	
802.11ac-VHT80 MCS0	58	5290	11.63	12.00	92.77	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	12.98	13.00	98.10
		116	5580	12.66	13.00	
		124	5620	12.78	13.00	
		132	5660	12.59	13.00	
		140	5700	12.68	13.00	
	802.11n-HT20 MCS0	100	5500	12.37	12.50	97.97
		116	5580	12.05	12.50	
		124	5620	12.25	12.50	
		132	5660	12.07	12.50	
		140	5700	12.02	12.50	
	802.11n-HT40 MCS0	102	5510	12.46	12.50	95.96
		110	5550	12.13	12.50	
		126	5630	12.07	12.50	
		134	5670	12.15	12.50	
	802.11ac-VHT20 MCS0	100	5500	12.34	12.50	97.98
		116	5580	12.02	12.50	
		124	5620	12.22	12.50	
		132	5660	12.05	12.50	
		140	5700	12.00	12.50	
	802.11ac-VHT40 MCS0	102	5510	12.43	12.50	96.00
110		5550	12.10	12.50		
126		5630	12.03	12.50		
134		5670	12.13	12.50		
802.11ac-VHT80 MCS0	106	5530	12.31	12.50	92.77	
	122	5610	12.15	12.50		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	14.99	15.00	98.10
		157	5785	14.80	15.00	
		165	5825	14.53	15.00	
	802.11n-HT20 MCS0	149	5745	14.35	14.50	97.97
		157	5785	14.13	14.50	
		165	5825	13.91	14.50	
	802.11n-HT40 MCS0	151	5755	14.40	14.50	95.96
		159	5795	14.19	14.50	
	802.11ac-VHT20 MCS0	149	5745	14.23	14.50	97.98
		157	5785	14.08	14.50	
		165	5825	13.84	14.50	
	802.11ac-VHT40 MCS0	151	5755	14.38	14.50	96.00
		159	5795	14.19	14.50	
	802.11ac-VHT80 MCS0	155	5775	14.28	14.50	92.77



<5GHz WLAN Ant.2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	13.96	14.50	98.10
		40	5200	13.95	14.50	
		44	5220	14.10	14.50	
		48	5240	14.24	14.50	
	802.11n-HT20 MCS0	36	5180	13.54	14.00	97.97
		40	5200	13.44	14.00	
		44	5220	13.57	14.00	
		48	5240	13.70	14.00	
	802.11n-HT40 MCS0	38	5190	13.43	14.00	95.96
		46	5230	13.59	14.00	
	802.11ac-VHT20 MCS0	36	5180	13.51	14.00	97.98
		40	5200	13.42	14.00	
		44	5220	13.55	14.00	
		48	5240	13.68	14.00	
	802.11ac-VHT40 MCS0	38	5190	13.41	14.00	95.96
		46	5230	13.57	14.00	
802.11ac-VHT80 MCS0	42	5210	11.59	13.00	92.77	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	14.35	14.50	98.10
		56	5280	14.45	14.50	
		60	5300	14.49	14.50	
		64	5320	14.37	14.50	
	802.11n-HT20 MCS0	52	5260	13.81	14.00	97.97
		56	5280	13.91	14.00	
		60	5300	13.97	14.00	
		64	5320	13.85	14.00	
	802.11n-HT40 MCS0	54	5270	13.83	14.00	95.96
		62	5310	13.85	14.00	
	802.11ac-VHT20 MCS0	52	5260	13.79	14.00	97.98
		56	5280	13.88	14.00	
		60	5300	13.95	14.00	
		64	5320	13.82	14.00	
	802.11ac-VHT40 MCS0	54	5270	13.80	14.00	95.96
		62	5310	13.84	14.00	
802.11ac-VHT80 MCS0	58	5290	13.96	14.00	92.77	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	15.83	16.00	98.10
		116	5580	15.89	16.00	
		124	5620	15.87	16.00	
		132	5660	15.86	16.00	
		140	5700	15.84	16.00	
	802.11n-HT20 MCS0	100	5500	15.20	15.50	97.97
		116	5580	15.22	15.50	
		124	5620	15.35	15.50	
		132	5660	15.32	15.50	
140		5700	15.19	15.50		
802.11n-HT40 MCS0	102	5510	15.25	15.50	95.96	
	110	5550	15.21	15.50		
	126	5630	15.30	15.50		
	134	5670	15.32	15.50		
802.11ac-VHT20 MCS0	100	5500	15.17	16.00	97.98	
	116	5580	15.20	16.00		
	124	5620	15.85	16.00		
	132	5660	15.83	16.00		
	140	5700	15.16	16.00		
802.11ac-VHT40 MCS0	102	5510	15.23	15.50	95.96	
	110	5550	15.19	15.50		
	126	5630	15.28	15.50		
	134	5670	15.30	15.50		
802.11ac-VHT80 MCS0	106	5530	15.30	15.50	92.77	
	122	5610	15.33	15.50		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	16.48	16.50	98.10
		157	5785	16.22	16.50	
		165	5825	15.90	16.50	
	802.11n-HT20 MCS0	149	5745	15.92	16.00	97.97
		157	5785	15.62	16.00	
		165	5825	15.27	16.00	
	802.11n-HT40 MCS0	151	5755	15.92	16.00	95.96
		159	5795	15.59	16.00	
	802.11ac-VHT20 MCS0	149	5745	15.79	16.00	97.98
157		5785	15.50	16.00		
165		5825	15.25	16.00		
802.11ac-VHT40 MCS0	151	5755	15.87	16.00	95.96	
	159	5795	15.56	16.00		
802.11ac-VHT80 MCS0	155	5775	15.70	16.00	92.77	



<5GHz WLAN Ant.1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.39	17.50	98.10
		40	5200	17.40	17.50	
		44	5220	17.44	17.50	
		48	5240	17.43	17.50	
	802.11n-HT20 MCS0	36	5180	16.63	17.00	97.97
		40	5200	16.72	17.00	
		44	5220	16.77	17.00	
		48	5240	16.74	17.00	
	802.11n-HT40 MCS0	38	5190	16.78	17.00	95.96
		46	5230	16.87	17.00	
	802.11ac-VHT20 MCS0	36	5180	16.61	17.00	97.98
		40	5200	16.70	17.00	
		44	5220	16.73	17.00	
		48	5240	16.73	17.00	
	802.11ac-VHT40 MCS0	38	5190	16.71	17.00	95.96
		46	5230	16.85	17.00	
802.11ac-VHT80 MCS0	42	5210	14.95	16.00	92.77	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	17.37	18.00	98.10
		56	5280	17.46	18.00	
		60	5300	17.50	18.00	
		64	5320	17.52	18.00	
	802.11n-HT20 MCS0	52	5260	16.73	17.00	97.96
		56	5280	16.85	17.00	
		60	5300	16.93	17.00	
		64	5320	16.88	17.00	
	802.11n-HT40 MCS0	54	5270	16.85	17.00	94.95
		62	5310	16.98	17.00	
	802.11ac-VHT20 MCS0	52	5260	16.70	17.00	96.12
		56	5280	16.79	17.00	
		60	5300	16.89	17.00	
		64	5320	16.86	17.00	
	802.11ac-VHT40 MCS0	54	5270	16.83	17.00	92.22
		62	5310	16.96	17.00	
802.11ac-VHT80 MCS0	58	5290	16.98	17.00	86.99	




	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	19.07	19.50	98.10
		116	5580	18.85	19.50	
		124	5620	18.94	19.50	
		132	5660	18.86	19.50	
		140	5700	18.76	19.50	
	802.11n-HT20 MCS0	100	5500	18.40	19.00	97.96
		116	5580	18.32	19.00	
		124	5620	18.38	19.00	
		132	5660	18.33	19.00	
		140	5700	18.16	19.00	
	802.11n-HT40 MCS0	102	5510	18.44	19.00	94.95
		110	5550	18.33	19.00	
		126	5630	18.40	19.00	
		134	5670	18.24	19.00	
	802.11ac-VHT20 MCS0	100	5500	18.39	19.00	96.12
		116	5580	18.31	19.00	
		124	5620	18.35	19.00	
		132	5660	18.30	19.00	
		140	5700	18.15	19.00	
	802.11ac-VHT40 MCS0	102	5510	18.43	19.00	92.22
110		5550	18.31	19.00		
126		5630	18.34	19.00		
134		5670	18.21	19.00		
802.11ac-VHT80 MCS0	106	5530	18.55	19.00	86.99	
	122	5610	18.34	19.00		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	19.48	19.50	98.10
		157	5785	19.31	19.50	
		165	5825	18.94	19.50	
	802.11n-HT20 MCS0	149	5745	18.82	19.00	97.96
		157	5785	18.62	19.00	
		165	5825	18.32	19.00	
	802.11n-HT40 MCS0	151	5755	18.89	19.00	94.95
		159	5795	18.56	19.00	
	802.11ac-VHT20 MCS0	149	5745	18.81	19.00	96.12
		157	5785	18.57	19.00	
		165	5825	18.30	19.00	
	802.11ac-VHT40 MCS0	151	5755	18.86	19.00	92.22
		159	5795	18.55	19.00	
	802.11ac-VHT80 MCS0	155	5775	18.78	19.00	86.99

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 77.13 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

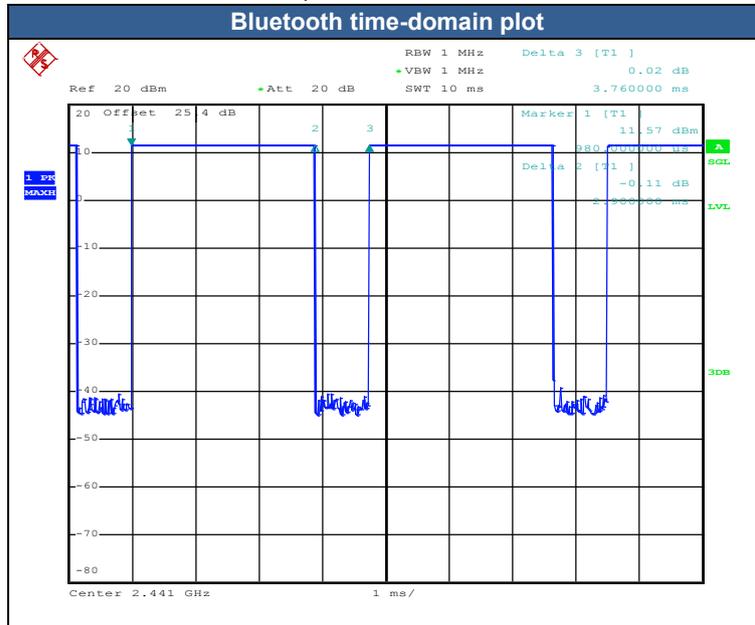


Mode	Channel	Frequency (MHz)	Data Rate
			1Mbps
v3.0+EDR	CH 00	2402	11.65
	CH 39	2441	11.86
	CH 78	2480	11.84
Tune-up Limit			12.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v4.0/v4.1/v4.2 LE	CH 00	2402	6.07
	CH 19	2440	5.89
	CH 39	2480	7.02
Tune-up Limit			7.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v5.0 LE	CH 00	2402	6.05
	CH 19	2440	5.91
	CH 39	2480	7.00
Tune-up Limit			7.50

14. Antenna Location

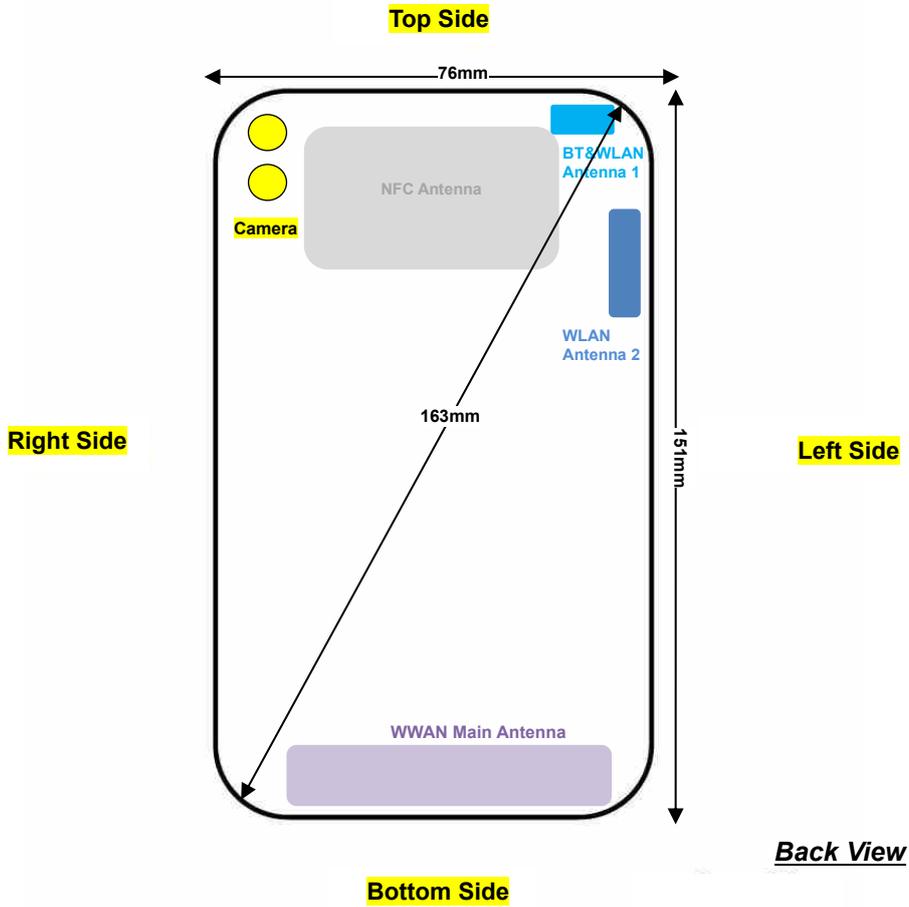

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main Antenna	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN Antenna 1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
WLAN Antenna 2	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main Antenna	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN Antenna 1	Yes	Yes	Yes	No	No	Yes
WLAN Antenna 2	Yes	Yes	Yes	No	No	Yes

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. The device employs proximity sensors that detect the presence of the user's body at the front or back or bottom side faces of the device. When front or back or bottom side condition is detected, GSM850/1900, WCDMA B2 / B4, CDMA2000 BC1 and LTE B2 / B4 / B7 / B25 reduced power will be active.
6. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - b. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.



GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by p-sensor on is implemented in GSM850/GSM1900 band, for SAR testing EUT was set in reduced power mode and GPRS 4Tx slots due to its highest frame-average power.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

CDMA2000 Note:

1. Per KDB 941225 D01v03r01, SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. According to November 2017 TCB workshop, the following applied to intra-band contiguous UL CA only;
 - a. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.
 - b. UL CA SAR is measured for each exposure condition in each frequency band using the highest SAR configuration tested in standalone LTE mode to establish the UL CA PCC. The SCC and subsequent CC must use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions.
 - c. When the SAR configuration tested in step b) has a maximum output power specification more than $\frac{1}{4}$ dB lower than the highest maximum output power conditions measured in the power measurements in step a) above and the reported SAR in step b) is larger than 1.2 W/kg, SAR measurement is also required for the configuration in step a)
 - d. All standalone SAR configurations with SAR > 1.2 W/kg must also be tested by applying the procedures in step b)
7. For LTE B4 / B5 / B12 / B17 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE B17 / B2 / B5 / B38 SAR test was covered by B12 / B25 / B26 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#01	GSM 850	GPRS 4 Tx slots	Right Cheek	P-Sensor Off	128	824.2	31.77	32.50	1.183	0.02	0.535	0.633
	GSM 850	GPRS 4 Tx slots	Right Tilted	P-Sensor Off	128	824.2	31.77	32.50	1.183	0.06	0.290	0.343
	GSM 850	GPRS 4 Tx slots	Left Cheek	P-Sensor Off	128	824.2	31.77	32.50	1.183	0.18	0.421	0.498
	GSM 850	GPRS 4 Tx slots	Left Tilted	P-Sensor Off	128	824.2	31.77	32.50	1.183	-0.01	0.350	0.414
#02	GSM 1900	GPRS 4 Tx slots	Right Cheek	P-Sensor Off	810	1909.8	29.36	30.50	1.300	0.14	0.395	0.514
	GSM 1900	GPRS 4 Tx slots	Right Tilted	P-Sensor Off	810	1909.8	29.36	30.50	1.300	0.01	0.179	0.233
	GSM 1900	GPRS 4 Tx slots	Left Cheek	P-Sensor Off	810	1909.8	29.36	30.50	1.300	0.06	0.385	0.501
	GSM 1900	GPRS 4 Tx slots	Left Tilted	P-Sensor Off	810	1909.8	29.36	30.50	1.300	0.07	0.201	0.261

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	P-Sensor Off	4233	846.6	24.10	24.50	1.096	0.16	0.233	0.255
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	P-Sensor Off	4233	846.6	24.10	24.50	1.096	0.19	0.125	0.137
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	P-Sensor Off	4233	846.6	24.10	24.50	1.096	0.12	0.179	0.196
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	P-Sensor Off	4233	846.6	24.10	24.50	1.096	0.13	0.135	0.148
#04	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	P-Sensor Off	1513	1752.6	24.32	25.00	1.169	0.05	0.127	0.149
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	P-Sensor Off	1513	1752.6	24.32	25.00	1.169	0.05	0.049	0.057
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	P-Sensor Off	1513	1752.6	24.32	25.00	1.169	0.12	0.106	0.124
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	P-Sensor Off	1513	1752.6	24.32	25.00	1.169	0.03	0.051	0.060
#05	WCDMA Band II	RMC 12.2Kbps	Right Cheek	P-Sensor Off	9538	1907.6	24.44	25.00	1.138	0.01	0.111	0.126
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	P-Sensor Off	9538	1907.6	24.44	25.00	1.138	0.04	0.041	0.047
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	P-Sensor Off	9538	1907.6	24.44	25.00	1.138	0.06	0.050	0.057
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	P-Sensor Off	9538	1907.6	24.44	25.00	1.138	0.01	0.036	0.041

<CDMA2000 SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#06	CDMA2000 BC10	RC3 SO55	Right Cheek	P-Sensor Off	684	823.1	23.81	24.50	1.172	0.08	0.182	0.213
	CDMA2000 BC10	RC3 SO55	Right Tilted	P-Sensor Off	684	823.1	23.81	24.50	1.172	-0.03	0.095	0.111
	CDMA2000 BC10	RC3 SO55	Left Cheek	P-Sensor Off	684	823.1	23.81	24.50	1.172	0.05	0.148	0.173
	CDMA2000 BC10	RC3 SO55	Left Tilted	P-Sensor Off	684	823.1	23.81	24.50	1.172	-0.02	0.109	0.128
#07	CDMA2000 BC0	RC3 SO55	Right Cheek	P-Sensor Off	384	836.52	23.79	24.50	1.178	0.03	0.190	0.224
	CDMA2000 BC0	RC3 SO55	Right Tilted	P-Sensor Off	384	836.52	23.79	24.50	1.178	0.02	0.098	0.116
	CDMA2000 BC0	RC3 SO55	Left Cheek	P-Sensor Off	384	836.52	23.79	24.50	1.178	0.07	0.143	0.168
	CDMA2000 BC0	RC3 SO55	Left Tilted	P-Sensor Off	384	836.52	23.79	24.50	1.178	-0.06	0.101	0.119
#08	CDMA2000 BC1	RC3 SO55	Right Cheek	P-Sensor Off	25	1851.25	24.05	24.50	1.109	0.02	0.136	0.151
	CDMA2000 BC1	RC3 SO55	Right Tilted	P-Sensor Off	25	1851.25	24.05	24.50	1.109	0.15	0.070	0.077
	CDMA2000 BC1	RC3 SO55	Left Cheek	P-Sensor Off	25	1851.25	24.05	24.50	1.109	0.01	0.079	0.088
	CDMA2000 BC1	RC3 SO55	Left Tilted	P-Sensor Off	25	1851.25	24.05	24.50	1.109	0.03	0.053	0.058



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#09	LTE Band 12	10M	QPSK	1	49	Right Cheek	P-Sensor Off	23095	707.5	22.50	23.50	1.259	-0.12	0.112	0.141
	LTE Band 12	10M	QPSK	25	0	Right Cheek	P-Sensor Off	23095	707.5	21.57	22.50	1.239	0.03	0.092	0.114
	LTE Band 12	10M	QPSK	1	49	Right Tilted	P-Sensor Off	23095	707.5	22.50	23.50	1.259	0.14	0.059	0.074
	LTE Band 12	10M	QPSK	25	0	Right Tilted	P-Sensor Off	23095	707.5	21.57	22.50	1.239	0.13	0.048	0.059
	LTE Band 12	10M	QPSK	1	49	Left Cheek	P-Sensor Off	23095	707.5	22.50	23.50	1.259	0.01	0.101	0.127
	LTE Band 12	10M	QPSK	25	0	Left Cheek	P-Sensor Off	23095	707.5	21.57	22.50	1.239	0.14	0.075	0.093
	LTE Band 12	10M	QPSK	1	49	Left Tilted	P-Sensor Off	23095	707.5	22.50	23.50	1.259	0.09	0.065	0.082
	LTE Band 12	10M	QPSK	25	0	Left Tilted	P-Sensor Off	23095	707.5	21.57	22.50	1.239	0.04	0.045	0.056
#10	LTE Band 13	10M	QPSK	1	49	Right Cheek	P-Sensor Off	23230	782	22.61	23.50	1.227	-0.1	0.103	0.126
	LTE Band 13	10M	QPSK	25	0	Right Cheek	P-Sensor Off	23230	782	21.61	22.50	1.227	0.04	0.089	0.109
	LTE Band 13	10M	QPSK	1	49	Right Tilted	P-Sensor Off	23230	782	22.61	23.50	1.227	0.17	0.051	0.063
	LTE Band 13	10M	QPSK	25	0	Right Tilted	P-Sensor Off	23230	782	21.61	22.50	1.227	0.1	0.044	0.054
	LTE Band 13	10M	QPSK	1	49	Left Cheek	P-Sensor Off	23230	782	22.61	23.50	1.227	0.11	0.083	0.102
	LTE Band 13	10M	QPSK	25	0	Left Cheek	P-Sensor Off	23230	782	21.61	22.50	1.227	0.1	0.071	0.087
	LTE Band 13	10M	QPSK	1	49	Left Tilted	P-Sensor Off	23230	782	22.61	23.50	1.227	0.19	0.058	0.071
	LTE Band 13	10M	QPSK	25	0	Left Tilted	P-Sensor Off	23230	782	21.61	22.50	1.227	0.18	0.049	0.060
#11	LTE Band 26	15M	QPSK	1	0	Right Cheek	P-Sensor Off	26865	831.5	22.96	23.50	1.132	-0.09	0.148	0.168
	LTE Band 26	15M	QPSK	36	0	Right Cheek	P-Sensor Off	26865	831.5	21.69	22.50	1.205	0.05	0.107	0.129
	LTE Band 26	15M	QPSK	1	0	Right Tilted	P-Sensor Off	26865	831.5	22.96	23.50	1.132	0.13	0.079	0.089
	LTE Band 26	15M	QPSK	36	0	Right Tilted	P-Sensor Off	26865	831.5	21.69	22.50	1.205	0.1	0.057	0.069
	LTE Band 26	15M	QPSK	1	0	Left Cheek	P-Sensor Off	26865	831.5	22.96	23.50	1.132	0.15	0.109	0.123
	LTE Band 26	15M	QPSK	36	0	Left Cheek	P-Sensor Off	26865	831.5	21.69	22.50	1.205	0.05	0.084	0.101
	LTE Band 26	15M	QPSK	1	0	Left Tilted	P-Sensor Off	26865	831.5	22.96	23.50	1.132	0.19	0.072	0.082
	LTE Band 26	15M	QPSK	36	0	Left Tilted	P-Sensor Off	26865	831.5	21.69	22.50	1.205	0.03	0.043	0.052
	LTE Band 4	20M	QPSK	1	0	Right Cheek	P-Sensor Off	20175	1732.5	22.93	23.50	1.140	0.12	0.115	0.131
	LTE Band 4	20M	QPSK	50	0	Right Cheek	P-Sensor Off	20175	1732.5	21.88	22.50	1.153	0.19	0.092	0.106
	LTE Band 4	20M	QPSK	1	0	Right Tilted	P-Sensor Off	20175	1732.5	22.93	23.50	1.140	0.12	0.054	0.062
	LTE Band 4	20M	QPSK	50	0	Right Tilted	P-Sensor Off	20175	1732.5	21.88	22.50	1.153	0.1	0.038	0.044
#12	LTE Band 4	20M	QPSK	1	0	Left Cheek	P-Sensor Off	20175	1732.5	22.93	23.50	1.140	0.11	0.147	0.168
	LTE Band 4	20M	QPSK	50	0	Left Cheek	P-Sensor Off	20175	1732.5	21.88	22.50	1.153	0.13	0.116	0.134
	LTE Band 4	20M	QPSK	1	0	Left Tilted	P-Sensor Off	20175	1732.5	22.93	23.50	1.140	0.13	0.061	0.070
	LTE Band 4	20M	QPSK	50	0	Left Tilted	P-Sensor Off	20175	1732.5	21.88	22.50	1.153	0.1	0.049	0.057



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1	0	Right Cheek	P-Sensor Off	26590	1905	22.90	23.50	1.148	0.18	0.144	0.165
	LTE Band 25	20M	QPSK	50	0	Right Cheek	P-Sensor Off	26590	1905	21.81	22.50	1.172	0.15	0.113	0.132
	LTE Band 25	20M	QPSK	1	0	Right Tilted	P-Sensor Off	26590	1905	22.90	23.50	1.148	0.13	0.097	0.111
	LTE Band 25	20M	QPSK	50	0	Right Tilted	P-Sensor Off	26590	1905	21.81	22.50	1.172	0.18	0.075	0.088
#13	LTE Band 25	20M	QPSK	1	0	Left Cheek	P-Sensor Off	26590	1905	22.90	23.50	1.148	0.16	0.158	0.181
	LTE Band 25	20M	QPSK	50	0	Left Cheek	P-Sensor Off	26590	1905	21.81	22.50	1.172	0.02	0.119	0.139
	LTE Band 25	20M	QPSK	1	0	Left Tilted	P-Sensor Off	26590	1905	22.90	23.50	1.148	0.14	0.071	0.082
	LTE Band 25	20M	QPSK	50	0	Left Tilted	P-Sensor Off	26590	1905	21.81	22.50	1.172	0.12	0.058	0.068
#14	LTE Band 30	10M	QPSK	1	0	Right Cheek	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.01	0.104	0.122
	LTE Band 30	10M	QPSK	25	0	Right Cheek	P-Sensor Off	27710	2310	21.76	22.50	1.186	0.01	0.085	0.101
	LTE Band 30	10M	QPSK	1	0	Right Tilted	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.02	0.054	0.064
	LTE Band 30	10M	QPSK	25	0	Right Tilted	P-Sensor Off	27710	2310	21.76	22.50	1.186	0.13	0.045	0.054
	LTE Band 30	10M	QPSK	1	0	Left Cheek	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.05	0.093	0.110
	LTE Band 30	10M	QPSK	25	0	Left Cheek	P-Sensor Off	27710	2310	21.76	22.50	1.186	0.01	0.074	0.088
	LTE Band 30	10M	QPSK	1	0	Left Tilted	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.06	0.070	0.082
	LTE Band 30	10M	QPSK	25	0	Left Tilted	P-Sensor Off	27710	2310	21.76	22.50	1.186	0.17	0.051	0.061
	LTE Band 7	20M	QPSK	1	0	Right Cheek	P-Sensor Off	21350	2560	22.84	23.50	1.164	0.04	0.080	0.093
	LTE Band 7	20M	QPSK	50	0	Right Cheek	P-Sensor Off	21350	2560	21.72	22.50	1.197	0.01	0.060	0.072
	LTE Band 7	20M	QPSK	1	0	Right Tilted	P-Sensor Off	21350	2560	22.84	23.50	1.164	0.06	0.059	0.069
	LTE Band 7	20M	QPSK	50	0	Right Tilted	P-Sensor Off	21350	2560	21.72	22.50	1.197	0.09	0.051	0.061
#15	LTE Band 7	20M	QPSK	1	0	Left Cheek	P-Sensor Off	21350	2560	22.84	23.50	1.164	0.01	0.125	0.146
	LTE Band 7	20M	QPSK	1	0	Left Cheek	P-Sensor Off	21350(PCC) + 21152(SCC)	2560(PCC) + 2540.2(SCC)	22.85	23.50	1.161	0.16	0.120	0.139
	LTE Band 7	20M	QPSK	50	0	Left Cheek	P-Sensor Off	21350	2560	21.72	22.50	1.197	0.03	0.093	0.112
	LTE Band 7	20M	QPSK	1	0	Left Tilted	P-Sensor Off	21350	2560	22.84	23.50	1.164	0.05	0.041	0.048
	LTE Band 7	20M	QPSK	50	0	Left Tilted	P-Sensor Off	21350	2560	21.72	22.50	1.197	0.06	0.030	0.036



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	0.02	0.045	0.052
	LTE Band 41	20M	QPSK	50	0	Right Cheek	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	0.04	0.035	0.040
	LTE Band 41	20M	QPSK	1	0	Right Tilted	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	0.02	0.027	0.031
	LTE Band 41	20M	QPSK	50	0	Right Tilted	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	0.02	0.020	0.023
#16	LTE Band 41	20M	QPSK	1	0	Left Cheek	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	0.08	0.052	0.060
	LTE Band 41	20M	QPSK	1	0	Left Cheek	P-Sensor Off	40620(PCC) + 40422(SCC)	2593(PCC) + 2573.2(SCC)	23.02	23.50	1.117	62.9	1.006	0.09	0.045	0.051
	LTE Band 41	20M	QPSK	50	0	Left Cheek	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	0.01	0.038	0.044
	LTE Band 41	20M	QPSK	1	0	Left Tilted	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	0.1	0.022	0.025
	LTE Band 41	20M	QPSK	50	0	Left Tilted	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	-0.02	0.014	0.016

<WLAN2.4GHz SAR>

Plot No.	Ant.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	1	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	11	2472	18.67	19.00	1.079	98.57	1.015	1.424	0.13	0.757	0.829
	1	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	11	2472	18.67	19.00	1.079	98.57	1.015	1.434	0.05	0.846	0.926
	1	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	11	2472	18.67	19.00	1.079	98.57	1.015	0.839	0.09	0.554	0.607
	1	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	11	2472	18.67	19.00	1.079	98.57	1.015	0.834			
	1	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	6	2437	18.56	19.00	1.107	98.57	1.015		-0.06	0.782	0.878
#17	1	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	6	2437	18.56	19.00	1.107	98.57	1.015		-0.03	0.845	0.949
#18	2	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	6	2437	18.37	19.00	1.156	99.04	1.010	0.083	0.06	0.021	0.025
	2	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	6	2437	18.37	19.00	1.156	99.04	1.010	0.032			
	2	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	6	2437	18.37	19.00	1.156	99.04	1.010	0.00082			
	2	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	6	2437	18.37	19.00	1.156	99.04	1.010	0.013			
	1+2	WLAN2.4GHz	802.11g 6Mbps	Right Cheek	1	2412	20.77	21.00	1.054	98.10	1.019	0.94	-0.02	0.636	0.683
#19	1+2	WLAN2.4GHz	802.11g 6Mbps	Right Tilted	1	2412	20.77	21.00	1.054	98.10	1.019	1.005	0.1	0.656	0.705
	1+2	WLAN2.4GHz	802.11g 6Mbps	Left Cheek	1	2412	20.77	21.00	1.054	98.10	1.019	0.653			
	1+2	WLAN2.4GHz	802.11g 6Mbps	Left Tilted	1	2412	20.77	21.00	1.054	98.10	1.019	0.911			



<WLAN5GHz SAR>

Plot No.	Ant.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	1	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	64	5320	12.18	13.00	1.207	98.10	1.019	0.213			
#20	1	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	64	5320	12.18	13.00	1.207	98.10	1.019	0.274	-0.01	0.112	0.138
	1	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	64	5320	12.18	13.00	1.207	98.10	1.019	0.071			
	1	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	64	5320	12.18	13.00	1.207	98.10	1.019	0.087			
	2	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	60	5300	14.49	14.50	1.002	98.10	1.019	0.202			
#21	2	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	60	5300	14.49	14.50	1.002	98.10	1.019	0.365	-0.1	0.047	0.048
	2	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	60	5300	14.49	14.50	1.002	98.10	1.019	0.103			
	2	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	60	5300	14.49	14.50	1.002	98.10	1.019	0.093			
	1+2	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	64	5320	17.52	18.00	1.116	98.10	1.019	1.06	-0.05	0.423	0.481
#22	1+2	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	64	5320	17.52	18.00	1.116	98.10	1.019	1.22	0.01	0.509	0.579
	1+2	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	64	5320	17.52	18.00	1.116	98.10	1.019	0.408			
	1+2	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	64	5320	17.52	18.00	1.116	98.10	1.019	0.475			
#23	1	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	100	5500	12.98	13.00	1.004	98.10	1.019	0.27	-0.05	0.085	0.087
	1	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	100	5500	12.98	13.00	1.004	98.10	1.019	0.264			
	1	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	100	5500	12.98	13.00	1.004	98.10	1.019	0.088			
	1	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	100	5500	12.98	13.00	1.004	98.10	1.019	0.072			
	2	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	116	5580	15.89	16.00	1.025	98.10	1.019	0			
#24	2	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	116	5580	15.89	16.00	1.025	98.10	1.019	0.109	0.05	0.027	0.028
	2	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	116	5580	15.89	16.00	1.025	98.10	1.019	0.049			
	2	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	116	5580	15.89	16.00	1.025	98.10	1.019	0.059			
#25	1+2	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	100	5500	19.07	19.50	1.103	98.10	1.019	0.634	0.1	0.207	0.233
	1+2	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	100	5500	19.07	19.50	1.103	98.10	1.019	0.490			
	1+2	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	100	5500	19.07	19.50	1.103	98.10	1.019	0.222			
	1+2	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	100	5500	19.07	19.50	1.103	98.10	1.019	0.161			
	1	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	149	5745	14.99	15.00	1.002	98.10	1.019	0.448			
#26	1	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	149	5745	14.99	15.00	1.002	98.10	1.019	0.520	0.08	0.203	0.207
	1	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	149	5745	14.99	15.00	1.002	98.10	1.019	0.193			
	1	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	149	5745	14.99	15.00	1.002	98.10	1.019	0.127			
#27	2	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	149	5745	16.48	16.50	1.005	98.10	1.019	0.073	-0.11	0.0053	0.005
	2	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	149	5745	16.48	16.50	1.005	98.10	1.019	0.043			
	2	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	149	5745	16.48	16.50	1.005	98.10	1.019	0.042			
	2	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	149	5745	16.48	16.50	1.005	98.10	1.019	0.037			
#28	1+2	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	149	5745	19.48	19.50	1.005	98.10	1.019	0.709	0.08	0.278	0.285
	1+2	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	149	5745	19.48	19.50	1.005	98.10	1.019	0.594			
	1+2	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	149	5745	19.48	19.50	1.005	98.10	1.019	0.279			
	1+2	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	149	5745	19.48	19.50	1.005	98.10	1.019	0.259			



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#29	GSM850	GPRS 4 Tx slots	Front	10	P-Sensor On	128	824.2	30.80	31.00	1.047	0.1	0.768	0.804
	GSM850	GPRS 4 Tx slots	Front	10	P-Sensor On	189	836.4	30.43	31.00	1.140	-0.06	0.629	0.717
	GSM850	GPRS 4 Tx slots	Front	10	P-Sensor On	251	848.8	30.65	31.00	1.084	-0.04	0.608	0.659
	GSM850	GPRS 4 Tx slots	Back	10	P-Sensor On	128	824.2	30.80	31.00	1.047	-0.19	0.629	0.659
	GSM850	GPRS 4 Tx slots	Left Side	10	P-Sensor Off	128	824.2	31.77	32.50	1.183	0.12	0.350	0.414
	GSM850	GPRS 4 Tx slots	Right Side	10	P-Sensor Off	128	824.2	31.77	32.50	1.183	-0.04	0.670	0.793
	GSM850	GPRS 4 Tx slots	Bottom Side	10	P-Sensor On	128	824.2	30.80	31.00	1.047	0.06	0.408	0.427
	GSM1900	GPRS 4 Tx slots	Front	10	P-Sensor On	810	1909.8	23.40	24.00	1.148	0.12	0.314	0.361
	GSM1900	GPRS 4 Tx slots	Back	10	P-Sensor On	810	1909.8	23.40	24.00	1.148	0.08	0.391	0.449
	GSM1900	GPRS 4 Tx slots	Left Side	10	P-Sensor Off	810	1909.8	29.36	30.50	1.300	0.02	0.455	0.592
	GSM1900	GPRS 4 Tx slots	Right Side	10	P-Sensor Off	810	1909.8	29.36	30.50	1.300	0.01	0.262	0.341
#30	GSM1900	GPRS 4 Tx slots	Bottom Side	10	P-Sensor On	810	1909.8	23.40	24.00	1.148	0.17	0.735	0.844
	GSM1900	GPRS 4 Tx slots	Bottom Side	10	P-Sensor On	512	1850.2	23.35	24.00	1.161	0.08	0.690	0.801
	GSM1900	GPRS 4 Tx slots	Bottom Side	10	P-Sensor On	661	1880	23.27	24.00	1.183	0.06	0.712	0.842

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	P-Sensor Off	4233	846.6	24.10	24.50	1.096	-0.03	0.359	0.394
#31	WCDMA Band V	RMC 12.2Kbps	Back	10	P-Sensor Off	4233	846.6	24.10	24.50	1.096	0.04	0.372	0.408
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	P-Sensor Off	4233	846.6	24.10	24.50	1.096	0.03	0.052	0.057
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	P-Sensor Off	4233	846.6	24.10	24.50	1.096	0.09	0.261	0.286
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	10	P-Sensor Off	4233	846.6	24.10	24.50	1.096	0.02	0.233	0.255
	WCDMA Band IV	RMC 12.2Kbps	Front	10	P-Sensor On	1513	1752.6	20.56	21.00	1.107	-0.02	0.501	0.554
	WCDMA Band IV	RMC 12.2Kbps	Back	10	P-Sensor On	1513	1752.6	20.56	21.00	1.107	0.01	0.497	0.550
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	P-Sensor Off	1513	1752.6	24.32	25.00	1.169	0.01	0.187	0.219
	WCDMA Band IV	RMC 12.2Kbps	Right Side	10	P-Sensor Off	1513	1752.6	24.32	25.00	1.169	0.01	0.106	0.124
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	P-Sensor On	1513	1752.6	20.56	21.00	1.107	0.15	0.924	1.023
#32	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	P-Sensor On	1312	1712.4	20.30	21.00	1.175	0.03	0.891	1.047
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	P-Sensor On	1413	1732.6	20.52	21.00	1.117	0.09	0.833	0.930
	WCDMA Band II	RMC 12.2Kbps	Front	10	P-Sensor On	9538	1907.6	20.19	20.50	1.074	-0.03	0.333	0.358
	WCDMA Band II	RMC 12.2Kbps	Back	10	P-Sensor On	9538	1907.6	20.19	20.50	1.074	0.02	0.333	0.358
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	P-Sensor Off	9538	1907.6	24.44	25.00	1.138	0.07	0.157	0.179
	WCDMA Band II	RMC 12.2Kbps	Right Side	10	P-Sensor Off	9538	1907.6	24.44	25.00	1.138	0.06	0.112	0.127
#33	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	P-Sensor On	9538	1907.6	20.19	20.50	1.074	0.09	0.621	0.667



<CDMA2000 SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#34	CDMA2000 BC10	RTAP 153.6Kbps	Front	10	P-Sensor Off	476	817.9	23.90	24.50	1.148	-0.02	0.340	0.390
	CDMA2000 BC10	RTAP 153.6Kbps	Back	10	P-Sensor Off	476	817.9	23.90	24.50	1.148	0.1	0.313	0.359
	CDMA2000 BC10	RTAP 153.6Kbps	Left Side	10	P-Sensor Off	476	817.9	23.90	24.50	1.148	0.16	0.095	0.109
	CDMA2000 BC10	RTAP 153.6Kbps	Right Side	10	P-Sensor Off	476	817.9	23.90	24.50	1.148	0.11	0.292	0.335
	CDMA2000 BC10	RTAP 153.6Kbps	Bottom Side	10	P-Sensor Off	476	817.9	23.90	24.50	1.148	0.05	0.232	0.266
#35	CDMA2000 BC0	RTAP 153.6Kbps	Front	10	P-Sensor Off	1013	824.7	23.37	24.50	1.297	0.01	0.339	0.440
	CDMA2000 BC0	RTAP 153.6Kbps	Back	10	P-Sensor Off	1013	824.7	23.37	24.50	1.297	-0.02	0.334	0.433
	CDMA2000 BC0	RTAP 153.6Kbps	Left Side	10	P-Sensor Off	1013	824.7	23.37	24.50	1.297	0.02	0.081	0.105
	CDMA2000 BC0	RTAP 153.6Kbps	Right Side	10	P-Sensor Off	1013	824.7	23.37	24.50	1.297	0.09	0.267	0.346
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Side	10	P-Sensor Off	1013	824.7	23.37	24.50	1.297	0.02	0.257	0.333
	CDMA2000 BC1	RTAP 153.6Kbps	Front	10	P-Sensor On	25	1851.25	20.22	20.50	1.067	0.03	0.276	0.294
	CDMA2000 BC1	RTAP 153.6Kbps	Back	10	P-Sensor On	25	1851.25	20.22	20.50	1.067	0.17	0.262	0.279
	CDMA2000 BC1	RTAP 153.6Kbps	Left Side	10	P-Sensor Off	25	1851.25	23.82	24.50	1.169	0.05	0.228	0.267
	CDMA2000 BC1	RTAP 153.6Kbps	Right Side	10	P-Sensor Off	25	1851.25	23.82	24.50	1.169	0.04	0.187	0.219
#36	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	10	P-Sensor On	25	1851.25	20.22	20.50	1.067	0.09	0.444	0.474



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	49	Front	10	P-Sensor Off	23095	707.5	22.50	23.50	1.259	0.03	0.198	0.249
	LTE Band 12	10M	QPSK	25	0	Front	10	P-Sensor Off	23095	707.5	21.57	22.50	1.239	-0.05	0.163	0.202
#37	LTE Band 12	10M	QPSK	1	49	Back	10	P-Sensor Off	23095	707.5	22.50	23.50	1.259	-0.1	0.256	0.322
	LTE Band 12	10M	QPSK	25	0	Back	10	P-Sensor Off	23095	707.5	21.57	22.50	1.239	-0.01	0.207	0.256
	LTE Band 12	10M	QPSK	1	49	Left Side	10	P-Sensor Off	23095	707.5	22.50	23.50	1.259	0.01	0.139	0.175
	LTE Band 12	10M	QPSK	25	0	Left Side	10	P-Sensor Off	23095	707.5	21.57	22.50	1.239	0.15	0.112	0.139
	LTE Band 12	10M	QPSK	1	49	Right Side	10	P-Sensor Off	23095	707.5	22.50	23.50	1.259	0.03	0.187	0.235
	LTE Band 12	10M	QPSK	25	0	Right Side	10	P-Sensor Off	23095	707.5	21.57	22.50	1.239	0.05	0.152	0.188
	LTE Band 12	10M	QPSK	1	49	Bottom Side	10	P-Sensor Off	23095	707.5	22.50	23.50	1.259	-0.04	0.138	0.174
	LTE Band 12	10M	QPSK	25	0	Bottom Side	10	P-Sensor Off	23095	707.5	21.57	22.50	1.239	-0.08	0.109	0.135
	LTE Band 13	10M	QPSK	1	49	Front	10	P-Sensor Off	23230	782	22.61	23.50	1.227	-0.06	0.224	0.275
	LTE Band 13	10M	QPSK	25	0	Front	10	P-Sensor Off	23230	782	21.61	22.50	1.227	-0.02	0.186	0.228
#38	LTE Band 13	10M	QPSK	1	49	Back	10	P-Sensor Off	23230	782	22.61	23.50	1.227	0.05	0.238	0.292
	LTE Band 13	10M	QPSK	25	0	Back	10	P-Sensor Off	23230	782	21.61	22.50	1.227	0.08	0.197	0.242
	LTE Band 13	10M	QPSK	1	49	Left Side	10	P-Sensor Off	23230	782	22.61	23.50	1.227	0.11	0.076	0.093
	LTE Band 13	10M	QPSK	25	0	Left Side	10	P-Sensor Off	23230	782	21.61	22.50	1.227	0.12	0.074	0.091
	LTE Band 13	10M	QPSK	1	49	Right Side	10	P-Sensor Off	23230	782	22.61	23.50	1.227	0.05	0.212	0.260
	LTE Band 13	10M	QPSK	25	0	Right Side	10	P-Sensor Off	23230	782	21.61	22.50	1.227	0.05	0.188	0.231
	LTE Band 13	10M	QPSK	1	49	Bottom Side	10	P-Sensor Off	23230	782	22.61	23.50	1.227	-0.01	0.176	0.216
	LTE Band 13	10M	QPSK	25	0	Bottom Side	10	P-Sensor Off	23230	782	21.61	22.50	1.227	-0.02	0.142	0.174
	LTE Band 26	15M	QPSK	1	0	Front	10	P-Sensor Off	26865	831.5	22.96	23.50	1.132	-0.03	0.293	0.332
	LTE Band 26	15M	QPSK	36	0	Front	10	P-Sensor Off	26865	831.5	21.69	22.50	1.205	-0.05	0.223	0.269
#39	LTE Band 26	15M	QPSK	1	0	Back	10	P-Sensor Off	26865	831.5	22.96	23.50	1.132	0.07	0.342	0.387
	LTE Band 26	15M	QPSK	36	0	Back	10	P-Sensor Off	26865	831.5	21.69	22.50	1.205	0.06	0.259	0.312
	LTE Band 26	15M	QPSK	1	0	Left Side	10	P-Sensor Off	26865	831.5	22.96	23.50	1.132	0.09	0.070	0.080
	LTE Band 26	15M	QPSK	36	0	Left Side	10	P-Sensor Off	26865	831.5	21.69	22.50	1.205	0.06	0.050	0.060
	LTE Band 26	15M	QPSK	1	0	Right Side	10	P-Sensor Off	26865	831.5	22.96	23.50	1.132	0.03	0.234	0.265
	LTE Band 26	15M	QPSK	36	0	Right Side	10	P-Sensor Off	26865	831.5	21.69	22.50	1.205	0.1	0.171	0.206
	LTE Band 26	15M	QPSK	1	0	Bottom Side	10	P-Sensor Off	26865	831.5	22.96	23.50	1.132	-0.03	0.242	0.274
	LTE Band 26	15M	QPSK	36	0	Bottom Side	10	P-Sensor Off	26865	831.5	21.69	22.50	1.205	-0.05	0.180	0.217
	LTE Band 4	20M	QPSK	1	0	Front	10	P-Sensor On	20175	1732.5	20.32	20.50	1.042	0.01	0.471	0.491
	LTE Band 4	20M	QPSK	50	0	Front	10	P-Sensor On	20175	1732.5	19.27	20.50	1.327	0.02	0.370	0.491
	LTE Band 4	20M	QPSK	1	0	Back	10	P-Sensor On	20175	1732.5	20.32	20.50	1.042	0.06	0.445	0.464
	LTE Band 4	20M	QPSK	50	0	Back	10	P-Sensor On	20175	1732.5	19.27	20.50	1.327	0.03	0.357	0.474
	LTE Band 4	20M	QPSK	1	0	Left Side	10	P-Sensor Off	20175	1732.5	22.93	23.50	1.140	0.01	0.159	0.181
	LTE Band 4	20M	QPSK	50	0	Left Side	10	P-Sensor Off	20175	1732.5	21.88	22.50	1.153	0.06	0.124	0.143
	LTE Band 4	20M	QPSK	1	0	Right Side	10	P-Sensor Off	20175	1732.5	22.93	23.50	1.140	0.01	0.075	0.085
	LTE Band 4	20M	QPSK	50	0	Right Side	10	P-Sensor Off	20175	1732.5	21.88	22.50	1.153	0.01	0.090	0.104
#40	LTE Band 4	20M	QPSK	1	0	Bottom Side	10	P-Sensor On	20175	1732.5	20.32	20.50	1.042	0.17	0.931	0.970
	LTE Band 4	20M	QPSK	50	0	Bottom Side	10	P-Sensor On	20175	1732.5	19.27	20.50	1.327	0.04	0.728	0.966
	LTE Band 4	20M	QPSK	100	0	Bottom Side	10	P-Sensor On	20175	1732.5	19.29	20.50	1.321	0.05	0.712	0.941



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1	0	Front	10	P-Sensor On	26590	1905	19.56	20.00	1.107	0.04	0.415	0.459
	LTE Band 25	20M	QPSK	50	0	Front	10	P-Sensor On	26590	1905	18.46	19.00	1.132	0.13	0.324	0.367
	LTE Band 25	20M	QPSK	1	0	Back	10	P-Sensor On	26590	1905	19.56	20.00	1.107	0.05	0.428	0.474
	LTE Band 25	20M	QPSK	50	0	Back	10	P-Sensor On	26590	1905	18.46	19.00	1.132	0.01	0.337	0.382
	LTE Band 25	20M	QPSK	1	0	Left Side	10	P-Sensor Off	26590	1905	22.90	23.50	1.148	0	0.149	0.171
	LTE Band 25	20M	QPSK	50	0	Left Side	10	P-Sensor Off	26590	1905	21.81	22.50	1.172	0.02	0.124	0.145
	LTE Band 25	20M	QPSK	1	0	Right Side	10	P-Sensor Off	26590	1905	22.90	23.50	1.148	0.06	0.097	0.111
	LTE Band 25	20M	QPSK	50	0	Right Side	10	P-Sensor Off	26590	1905	21.81	22.50	1.172	-0.01	0.081	0.095
#41	LTE Band 25	20M	QPSK	1	0	Bottom Side	10	P-Sensor On	26590	1905	19.56	20.00	1.107	0.04	0.890	0.985
	LTE Band 25	20M	QPSK	1	0	Bottom Side	10	P-Sensor On	26340	1880	19.20	20.00	1.202	0.04	0.802	0.964
	LTE Band 25	20M	QPSK	1	0	Bottom Side	10	P-Sensor On	26140	1860	19.25	20.00	1.189	0.06	0.797	0.947
	LTE Band 25	20M	QPSK	50	0	Bottom Side	10	P-Sensor On	26590	1905	18.46	19.00	1.132	0.01	0.702	0.795
	LTE Band 25	20M	QPSK	50	0	Bottom Side	10	P-Sensor On	26340	1880	18.21	19.00	1.199	0.05	0.641	0.769
	LTE Band 25	20M	QPSK	50	0	Bottom Side	10	P-Sensor On	26140	1860	18.17	19.00	1.211	0.06	0.634	0.768
	LTE Band 25	20M	QPSK	100	0	Bottom Side	10	P-Sensor On	26590	1905	18.45	19.00	1.135	0.06	0.702	0.797
	LTE Band 30	10M	QPSK	1	0	Front	10	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.03	0.436	0.512
	LTE Band 30	10M	QPSK	25	0	Front	10	P-Sensor Off	27710	2310	21.76	22.50	1.186	0.03	0.364	0.432
	LTE Band 30	10M	QPSK	1	0	Back	10	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.02	0.617	0.725
	LTE Band 30	10M	QPSK	25	0	Back	10	P-Sensor Off	27710	2310	21.76	22.50	1.186	0.07	0.491	0.582
	LTE Band 30	10M	QPSK	1	0	Left Side	10	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.02	0.134	0.157
	LTE Band 30	10M	QPSK	25	0	Left Side	10	P-Sensor Off	27710	2310	21.76	22.50	1.186	0.12	0.109	0.129
	LTE Band 30	10M	QPSK	1	0	Right Side	10	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.01	0.081	0.095
	LTE Band 30	10M	QPSK	25	0	Right Side	10	P-Sensor Off	27710	2310	21.76	22.50	1.186	-0.12	0.066	0.078
#42	LTE Band 30	10M	QPSK	1	0	Bottom Side	10	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.02	0.981	1.153
	LTE Band 30	10M	QPSK	25	0	Bottom Side	10	P-Sensor Off	27710	2310	21.76	22.50	1.186	0.04	0.732	0.868
	LTE Band 30	10M	QPSK	50	0	Bottom Side	10	P-Sensor Off	27710	2310	21.71	22.50	1.199	0.05	0.720	0.864
	LTE Band 7	20M	QPSK	1	0	Front	10	P-Sensor On	21350	2560	20.38	20.50	1.028	-0.14	0.143	0.147
	LTE Band 7	20M	QPSK	50	0	Front	10	P-Sensor On	21350	2560	19.30	20.50	1.318	0.06	0.102	0.134
#43	LTE Band 7	20M	QPSK	1	0	Back	10	P-Sensor On	21350	2560	20.38	20.50	1.028	-0.11	0.465	0.478
	LTE Band 7	20M	QPSK	1	0	Back	10	P-Sensor On	21350(PCC) + 21152(SCC)	2560(PCC) + 2540.2(SCC)	20.23	20.50	1.064	0.02	0.445	0.474
	LTE Band 7	20M	QPSK	50	0	Back	10	P-Sensor On	21350	2560	19.30	20.50	1.318	-0.03	0.332	0.438
	LTE Band 7	20M	QPSK	1	0	Left Side	10	P-Sensor Off	21350	2560	22.84	23.50	1.164	0.01	0.157	0.183
	LTE Band 7	20M	QPSK	50	0	Left Side	10	P-Sensor Off	21350	2560	21.72	22.50	1.197	0.14	0.133	0.159
	LTE Band 7	20M	QPSK	1	0	Right Side	10	P-Sensor Off	21350	2560	22.84	23.50	1.164	-0.04	0.044	0.051
	LTE Band 7	20M	QPSK	50	0	Right Side	10	P-Sensor Off	21350	2560	21.72	22.50	1.197	0.11	0.033	0.040
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10	P-Sensor On	21350	2560	20.38	20.50	1.028	0.11	0.373	0.383
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	P-Sensor On	21350	2560	19.30	20.50	1.318	-0.1	0.285	0.376



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	0.13	0.131	0.151
	LTE Band 41	20M	QPSK	50	0	Front	10	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	0.05	0.099	0.115
#44	LTE Band 41	20M	QPSK	1	0	Back	10	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	-0.1	0.498	0.574
	LTE Band 41	20M	QPSK	1	0	Back	10	P-Sensor Off	40620(PCC) + 40422(SCC)	2593(PCC) + 2573.2(SCC)	23.02	23.50	1.117	62.9	1.006	0.01	0.372	0.418
	LTE Band 41	20M	QPSK	50	0	Back	10	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	-0.17	0.320	0.371
	LTE Band 41	20M	QPSK	1	0	Left Side	10	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	0.11	0.103	0.119
	LTE Band 41	20M	QPSK	50	0	Left Side	10	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	0.14	0.080	0.093
	LTE Band 41	20M	QPSK	1	0	Right Side	10	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	0.12	0.030	0.035
	LTE Band 41	20M	QPSK	50	0	Right Side	10	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	0.13	0.022	0.026
	LTE Band 41	20M	QPSK	1	0	Bottom Side	10	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	0.11	0.315	0.363
	LTE Band 41	20M	QPSK	50	0	Bottom Side	10	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	0.17	0.173	0.201

<WLAN 2.4GHz SAR>

Plot No.	Ant.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	1	WLAN 2.4GHz	802.11b 1Mbps	Front	10	11	2472	18.67	19.00	1.079	98.57	1.015	0.354	0.02	0.225	0.246
	1	WLAN 2.4GHz	802.11b 1Mbps	Back	10	11	2472	18.67	19.00	1.079	98.57	1.015	0.469	0.01	0.307	0.336
	1	WLAN 2.4GHz	802.11b 1Mbps	Left Side	10	11	2472	18.67	19.00	1.079	98.57	1.015	0.256	0.05	0.178	0.195
#45	1	WLAN 2.4GHz	802.11b 1Mbps	Top Side	10	11	2472	18.67	19.00	1.079	98.57	1.015	0.976	0.07	0.609	0.667
	2	WLAN 2.4GHz	802.11b 1Mbps	Front	10	6	2437	18.37	19.00	1.156	99.04	1.010	0.017			
#46	2	WLAN 2.4GHz	802.11b 1Mbps	Back	10	6	2437	18.37	19.00	1.156	99.04	1.010	0.288	0.01	0.186	0.217
	2	WLAN 2.4GHz	802.11b 1Mbps	Left Side	10	6	2437	18.37	19.00	1.156	99.04	1.010	0.099			
	2	WLAN 2.4GHz	802.11b 1Mbps	Top Side	10	6	2437	18.37	19.00	1.156	99.04	1.010	0.0299			
	1+2	WLAN 2.4GHz	802.11g 6Mbps	Front	10	1	2412	20.77	21.00	1.054	98.10	1.019	0.199			
	1+2	WLAN 2.4GHz	802.11g 6Mbps	Back	10	1	2412	20.77	21.00	1.054	98.10	1.019	0.318	-0.12	0.198	0.213
	1+2	WLAN 2.4GHz	802.11g 6Mbps	Left Side	10	1	2412	20.77	21.00	1.054	98.10	1.019	0.215			
#47	1+2	WLAN 2.4GHz	802.11g 6Mbps	Top Side	10	1	2412	20.77	21.00	1.054	98.10	1.019	0.676	0.06	0.408	0.438



<WLAN 5GHz SAR>

Plot No.	Ant.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	1	WLAN5.2GHz	802.11a 6Mbps	Front	10	36	5180	12.31	13.00	1.172	98.10	1.019	0.056			
#48	1	WLAN5.2GHz	802.11a 6Mbps	Back	10	36	5180	12.31	13.00	1.172	98.10	1.019	1.439	0.11	0.475	0.567
	1	WLAN5.2GHz	802.11a 6Mbps	Left Side	10	36	5180	12.31	13.00	1.172	98.10	1.019	0.208			
	1	WLAN5.2GHz	802.11a 6Mbps	Top Side	10	36	5180	12.31	13.00	1.172	98.10	1.019	0.276	0.03	0.122	0.146
	2	WLAN5.2GHz	802.11a 6Mbps	Front	10	48	5240	14.24	14.50	1.062	98.10	1.019	0.056			
#49	2	WLAN5.2GHz	802.11a 6Mbps	Back	10	48	5240	14.24	14.50	1.062	98.10	1.019	0.871	0.19	0.329	0.356
	2	WLAN5.2GHz	802.11a 6Mbps	Left Side	10	48	5240	14.24	14.50	1.062	98.10	1.019	0.376			
	2	WLAN5.2GHz	802.11a 6Mbps	Top Side	10	48	5240	14.24	14.50	1.062	98.10	1.019	0.0775			
	1+2	WLAN5.2GHz	802.11a 6Mbps	Front	10	44	5220	17.44	17.50	1.014	98.10	1.019	0.091	0.09	0.040	0.041
#50	1+2	WLAN5.2GHz	802.11a 6Mbps	Back	10	44	5220	17.44	17.50	1.014	98.10	1.019	2.82	0.02	0.918	0.948
	1+2	WLAN5.2GHz	802.11a 6Mbps	Back	10	48	5240	17.43	17.50	1.016	98.10	1.019		-0.09	0.843	0.873
	1+2	WLAN5.2GHz	802.11a 6Mbps	Left Side	10	44	5220	17.44	17.50	1.014	98.10	1.019	0.463			
	1+2	WLAN5.2GHz	802.11a 6Mbps	Top Side	10	44	5220	17.44	17.50	1.014	98.10	1.019	0.576	0.05	0.243	0.251
	1	WLAN5.8GHz	802.11a 6Mbps	Front	10	149	5745	14.99	15.00	1.002	98.10	1.019	0.077	0.15	0.027	0.028
#51	1	WLAN5.8GHz	802.11a 6Mbps	Back	10	149	5745	14.99	15.00	1.002	98.10	1.019	1.407	0.07	0.472	0.482
	1	WLAN5.8GHz	802.11a 6Mbps	Left Side	10	149	5745	14.99	15.00	1.002	98.10	1.019	0.307	0.05	0.128	0.131
	1	WLAN5.8GHz	802.11a 6Mbps	Top Side	10	149	5745	14.99	15.00	1.002	98.10	1.019	0.252			
	2	WLAN5.8GHz	802.11a 6Mbps	Front	10	149	5745	16.48	16.50	1.005	98.10	1.019	0.056			
#52	2	WLAN5.8GHz	802.11a 6Mbps	Back	10	149	5745	16.48	16.50	1.005	98.10	1.019	0.749	0.09	0.268	0.274
	2	WLAN5.8GHz	802.11a 6Mbps	Left Side	10	149	5745	16.48	16.50	1.005	98.10	1.019	0.252			
	2	WLAN5.8GHz	802.11a 6Mbps	Top Side	10	149	5745	16.48	16.50	1.005	98.10	1.019	0.041			
	1+2	WLAN5.8GHz	802.11a 6Mbps	Front	10	149	5745	19.48	19.50	1.005	98.10	1.019	0.090	0.07	0.023	0.024
	1+2	WLAN5.8GHz	802.11a 6Mbps	Back	10	149	5745	19.48	19.50	1.005	98.10	1.019	2.282	0.09	0.951	0.974
#53	1+2	WLAN5.8GHz	802.11a 6Mbps	Back	10	157	5785	19.31	19.50	1.045	98.10	1.019		0.1	1.090	1.160
	1+2	WLAN5.8GHz	802.11a 6Mbps	Left Side	10	149	5745	19.48	19.50	1.005	98.10	1.019	0.609	-0.03	0.261	0.267
	1+2	WLAN5.8GHz	802.11a 6Mbps	Top Side	10	149	5745	19.48	19.50	1.005	98.10	1.019	0.384			

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10	39	2441	11.86	12.50	1.159	77.13	1.080	-0.01	0.031	0.039
	Bluetooth	1Mbps	Back	10	39	2441	11.86	12.50	1.159	77.13	1.080	0.04	0.020	0.025
	Bluetooth	1Mbps	Left Side	10	39	2441	11.86	12.50	1.159	77.13	1.080	0.01	0.047	0.059
#54	Bluetooth	1Mbps	Top Side	10	39	2441	11.86	12.50	1.159	77.13	1.080	0.07	0.099	0.124



15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#55	GSM850	GPRS 4 Tx slots	Front	10	P-Sensor On	128	824.2	30.80	31.00	1.047	0.1	0.768	0.804
	GSM850	GPRS 4 Tx slots	Front	10	P-Sensor On	189	836.4	30.43	31.00	1.140	-0.06	0.629	0.717
	GSM850	GPRS 4 Tx slots	Front	10	P-Sensor On	251	848.8	30.65	31.00	1.084	-0.04	0.608	0.659
	GSM850	GPRS 4 Tx slots	Back	10	P-Sensor On	128	824.2	30.80	31.00	1.047	-0.19	0.629	0.659
	GSM1900	GPRS 2 Tx slots	Front	10	P-Sensor On	810	1909.8	23.40	24.00	1.148	0.12	0.314	0.361
#56	GSM1900	GPRS 2 Tx slots	Back	10	P-Sensor On	810	1909.8	23.40	24.00	1.148	0.08	0.391	0.449

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	P-Sensor Off	4233	846.6	24.10	24.50	1.096	-0.03	0.359	0.394
#57	WCDMA Band V	RMC 12.2Kbps	Back	10	P-Sensor Off	4233	846.6	24.10	24.50	1.096	0.04	0.372	0.408
#58	WCDMA Band IV	RMC 12.2Kbps	Front	10	P-Sensor On	1513	1752.6	20.56	21.00	1.107	-0.02	0.501	0.554
	WCDMA Band IV	RMC 12.2Kbps	Back	10	P-Sensor On	1513	1752.6	20.56	21.00	1.107	0.01	0.497	0.550
	WCDMA Band II	RMC 12.2Kbps	Front	10	P-Sensor On	9538	1907.6	20.19	20.50	1.074	-0.03	0.333	0.358
#59	WCDMA Band II	RMC 12.2Kbps	Back	10	P-Sensor On	9538	1907.6	20.19	20.50	1.074	0.02	0.333	0.358

<CDMA2000 SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC10	RC3 SO32 (F+SCH)	Front	10	P-Sensor Off	476	817.9	23.89	24.50	1.151	0.01	0.310	0.357
#60	CDMA2000 BC10	RC3 SO32 (F+SCH)	Back	10	P-Sensor Off	476	817.9	23.89	24.50	1.151	-0.01	0.334	0.384
	CDMA2000 BC0	RC3 SO32 (F+SCH)	Front	10	P-Sensor Off	1013	824.7	23.75	24.50	1.189	0.01	0.314	0.373
#61	CDMA2000 BC0	RC3 SO32 (F+SCH)	Back	10	P-Sensor Off	1013	824.7	23.75	24.50	1.189	-0.02	0.355	0.422
#62	CDMA2000 BC1	RC3 SO32 (F+SCH)	Front	10	P-Sensor On	25	1851.25	20.12	20.50	1.091	0.09	0.291	0.318
	CDMA2000 BC1	RC3 SO32 (F+SCH)	Back	10	P-Sensor On	25	1851.25	20.12	20.50	1.091	-0.04	0.271	0.296



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	49	Front	10	P-Sensor Off	23095	707.5	22.50	23.50	1.259	0.03	0.198	0.249
	LTE Band 12	10M	QPSK	25	0	Front	10	P-Sensor Off	23095	707.5	21.57	22.50	1.239	-0.05	0.163	0.202
#63	LTE Band 12	10M	QPSK	1	49	Back	10	P-Sensor Off	23095	707.5	22.50	23.50	1.259	-0.1	0.256	0.322
	LTE Band 12	10M	QPSK	25	0	Back	10	P-Sensor Off	23095	707.5	21.57	22.50	1.239	-0.01	0.207	0.256
	LTE Band 13	10M	QPSK	1	49	Front	10	P-Sensor Off	23230	782	22.61	23.50	1.227	-0.06	0.224	0.275
	LTE Band 13	10M	QPSK	25	0	Front	10	P-Sensor Off	23230	782	21.61	22.50	1.227	-0.02	0.186	0.228
#64	LTE Band 13	10M	QPSK	1	49	Back	10	P-Sensor Off	23230	782	22.61	23.50	1.227	0.05	0.238	0.292
	LTE Band 13	10M	QPSK	25	0	Back	10	P-Sensor Off	23230	782	21.61	22.50	1.227	0.08	0.197	0.242
	LTE Band 26	15M	QPSK	1	0	Front	10	P-Sensor Off	26865	831.5	22.96	23.50	1.132	-0.03	0.293	0.332
	LTE Band 26	15M	QPSK	36	0	Front	10	P-Sensor Off	26865	831.5	21.69	22.50	1.205	-0.05	0.223	0.269
#65	LTE Band 26	15M	QPSK	1	0	Back	10	P-Sensor Off	26865	831.5	22.96	23.50	1.132	0.07	0.342	0.387
	LTE Band 26	15M	QPSK	36	0	Back	10	P-Sensor Off	26865	831.5	21.69	22.50	1.205	0.06	0.259	0.312
#66	LTE Band 4	20M	QPSK	1	0	Front	10	P-Sensor On	20175	1732.5	20.32	20.50	1.042	0.01	0.471	0.491
	LTE Band 4	20M	QPSK	50	0	Front	10	P-Sensor On	20175	1732.5	19.27	20.50	1.327	0.02	0.370	0.491
	LTE Band 4	20M	QPSK	1	0	Back	10	P-Sensor On	20175	1732.5	20.32	20.50	1.042	0.06	0.445	0.464
	LTE Band 4	20M	QPSK	50	0	Back	10	P-Sensor On	20175	1732.5	19.27	20.50	1.327	0.03	0.357	0.474
	LTE Band 25	20M	QPSK	1	0	Front	10	P-Sensor On	26590	1905	19.56	20.00	1.107	0.04	0.415	0.459
	LTE Band 25	20M	QPSK	50	0	Front	10	P-Sensor On	26590	1905	18.46	19.00	1.132	0.13	0.324	0.367
#67	LTE Band 25	20M	QPSK	1	0	Back	10	P-Sensor On	26590	1905	19.56	20.00	1.107	0.05	0.428	0.474
	LTE Band 25	20M	QPSK	50	0	Back	10	P-Sensor On	26590	1905	18.46	19.00	1.132	0.01	0.337	0.382
	LTE Band 30	10M	QPSK	1	0	Front	10	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.03	0.436	0.512
	LTE Band 30	10M	QPSK	25	0	Front	10	P-Sensor Off	27710	2310	21.76	22.50	1.186	0.03	0.364	0.432
#68	LTE Band 30	10M	QPSK	1	0	Back	10	P-Sensor Off	27710	2310	22.80	23.50	1.175	0.02	0.617	0.725
	LTE Band 30	10M	QPSK	25	0	Back	10	P-Sensor Off	27710	2310	21.76	22.50	1.186	0.07	0.491	0.582
	LTE Band 7	20M	QPSK	1	0	Front	10	P-Sensor On	21350	2560	20.38	20.50	1.028	-0.14	0.143	0.147
	LTE Band 7	20M	QPSK	50	0	Front	10	P-Sensor On	21350	2560	19.30	20.50	1.318	0.06	0.102	0.134
#69	LTE Band 7	20M	QPSK	1	0	Back	10	P-Sensor On	21350	2560	20.38	20.50	1.028	-0.11	0.465	0.478
	LTE Band 7	20M	QPSK	1	0	Back	10	P-Sensor On	21350(PCC) + 21152(SCC)	2560(PCC) + 2540.2(SCC)	20.23	20.50	1.064	0.02	0.445	0.474
	LTE Band 7	20M	QPSK	50	0	Back	10	P-Sensor On	21350	2560	19.30	20.50	1.318	-0.03	0.332	0.438



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	0.13	0.131	0.151
	LTE Band 41	20M	QPSK	50	0	Front	10	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	0.05	0.099	0.115
#70	LTE Band 41	20M	QPSK	1	0	Back	10	P-Sensor Off	40620	2593	22.91	23.50	1.146	62.9	1.006	-0.1	0.498	0.574
	LTE Band 41	20M	QPSK	1	0	Back	10	P-Sensor Off	40620(PCC) + 40422(SCC)	2593(PCC) + 2573.2(SCC)	23.02	23.50	1.117	62.9	1.006	0.01	0.372	0.418
	LTE Band 41	20M	QPSK	50	0	Back	10	P-Sensor Off	40620	2593	21.88	22.50	1.153	62.9	1.006	-0.17	0.320	0.371

<WLAN 2.4GHz SAR>

Plot No.	Ant.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	1	WLAN 2.4GHz	802.11b 1Mbps	Front	10	11	2472	18.67	19.00	1.079	98.57	1.015	0.354	0.02	0.225	0.246
#71	1	WLAN 2.4GHz	802.11b 1Mbps	Back	10	11	2472	18.67	19.00	1.079	98.57	1.015	0.469	0.01	0.307	0.336
	2	WLAN 2.4GHz	802.11b 1Mbps	Front	10	6	2437	18.37	19.00	1.156	99.04	1.010	0.017			
#72	2	WLAN 2.4GHz	802.11b 1Mbps	Back	10	6	2437	18.37	19.00	1.156	99.04	1.010	0.288	0.01	0.186	0.217
	1+2	WLAN 2.4GHz	802.11g 6Mbps	Front	10	1	2412	20.77	21.00	1.054	98.10	1.019	0.199			
#73	1+2	WLAN 2.4GHz	802.11g 6Mbps	Back	10	1	2412	20.77	21.00	1.054	98.10	1.019	0.318	-0.12	0.198	0.213



<WLAN 5GHz SAR>

Plot No.	Ant.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	1	WLAN5.3GHz	802.11a 6Mbps	Front	10	64	5320	12.18	13.00	1.207	98.10	1.019	0.056	0.06	0.015	0.018
#74	1	WLAN5.3GHz	802.11a 6Mbps	Back	10	64	5320	12.18	13.00	1.207	98.10	1.019	1.248	0.05	0.514	0.632
	2	WLAN5.3GHz	802.11a 6Mbps	Front	10	60	5300	14.49	14.50	1.002	98.10	1.019	0.086	0.02	0.032	0.033
#75	2	WLAN5.3GHz	802.11a 6Mbps	Back	10	60	5300	14.49	14.50	1.002	98.10	1.019	0.935	0.07	0.386	0.394
	1+2	WLAN5.3GHz	802.11a 6Mbps	Front	10	64	5320	17.52	18.00	1.116	98.10	1.019	0.0581	0.07	0.019	0.022
#76	1+2	WLAN5.3GHz	802.11a 6Mbps	Back	10	64	5320	17.52	18.00	1.116	98.10	1.019	2.35	-0.09	0.969	1.102
	1+2	WLAN5.3GHz	802.11a 6Mbps	Back	10	60	5300	17.50	18.00	1.122	98.10	1.019		-0.03	0.954	1.091
	1	WLAN5.5GHz	802.11a 6Mbps	Front	10	100	5500	12.98	13.00	1.004	98.10	1.019	0.1	0.07	0.022	0.023
#77	1	WLAN5.5GHz	802.11a 6Mbps	Back	10	100	5745	12.98	13.00	1.004	98.10	1.019	1.022	0.09	0.411	0.420
	2	WLAN5.5GHz	802.11a 6Mbps	Front	10	116	5580	15.89	16.00	1.025	98.10	1.019	0.081	0.06	0.025	0.026
#78	2	WLAN5.5GHz	802.11a 6Mbps	Back	10	116	5580	15.89	16.00	1.025	98.10	1.019	0.989	0.16	0.390	0.407
	1+2	WLAN5.5GHz	802.11a 6Mbps	Front	10	100	5500	19.07	19.50	1.103	98.10	1.019	0.0677	0.07	0.043	0.048
#79	1+2	WLAN5.5GHz	802.11a 6Mbps	Back	10	100	5500	19.07	19.50	1.103	98.10	1.019	2.53	0.09	1.030	1.158
	1+2	WLAN5.5GHz	802.11a 6Mbps	Back	10	124	5620	18.94	19.50	1.138	98.10	1.019		-0.09	0.907	1.051
	1	WLAN5.8GHz	802.11a 6Mbps	Front	10	149	5745	14.99	15.00	1.002	98.10	1.019	0.077	0.15	0.027	0.028
#80	1	WLAN5.8GHz	802.11a 6Mbps	Back	10	149	5745	14.99	15.00	1.002	98.10	1.019	1.407	0.07	0.472	0.482
	2	WLAN5.8GHz	802.11a 6Mbps	Front	10	149	5745	16.48	16.50	1.005	98.10	1.019	0.056			
#81	2	WLAN5.8GHz	802.11a 6Mbps	Back	10	149	5745	16.48	16.50	1.005	98.10	1.019	0.749	0.09	0.268	0.274
	1+2	WLAN5.8GHz	802.11a 6Mbps	Front	10	149	5745	19.48	19.50	1.005	98.10	1.019	0.090	0.07	0.023	0.024
	1+2	WLAN5.8GHz	802.11a 6Mbps	Back	10	149	5745	19.48	19.50	1.005	98.10	1.019	2.282	0.09	0.951	0.974
#82	1+2	WLAN5.8GHz	802.11a 6Mbps	Back	10	157	5785	19.31	19.50	1.045	98.10	1.019		0.1	1.090	1.160

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
#83	Bluetooth	1Mbps	Front	10	39	2441	11.86	12.50	1.159	77.13	1.080	-0.01	0.031	0.039
	Bluetooth	1Mbps	Back	10	39	2441	11.86	12.50	1.159	77.13	1.080	0.04	0.020	0.025



15.4 Product specific 10g SAR

<WLAN 5GHz SAR>

Plot No.	Ant.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	1	WLAN5.3GHz	802.11a 6Mbps	Front	0	64	5320	12.18	13.00	1.207	98.10	1.019	0.246			
#84	1	WLAN5.3GHz	802.11a 6Mbps	Back	0	64	5320	12.18	13.00	1.207	98.10	1.019	10.6	0.05	0.908	1.117
	1	WLAN5.3GHz	802.11a 6Mbps	Left Side	0	64	5320	12.18	13.00	1.207	98.10	1.019	1.107			
	1	WLAN5.3GHz	802.11a 6Mbps	Top Side	0	64	5320	12.18	13.00	1.207	98.10	1.019	4.29	0.09	0.576	0.708
	2	WLAN5.3GHz	802.11a 6Mbps	Front	0	60	5300	14.49	14.50	1.002	98.10	1.019	0.277			
#85	2	WLAN5.3GHz	802.11a 6Mbps	Back	0	60	5300	14.49	14.50	1.002	98.10	1.019	9.19	0.02	1.220	1.245
	2	WLAN5.3GHz	802.11a 6Mbps	Left Side	0	60	5300	14.49	14.50	1.002	98.10	1.019	2.403	0.05	0.140	0.143
	2	WLAN5.3GHz	802.11a 6Mbps	Top Side	0	60	5300	14.49	14.50	1.002	98.10	1.019	0.212			
	1+2	WLAN5.3GHz	802.11a 6Mbps	Front	0	64	5320	17.52	18.00	1.116	98.10	1.019	0.554			
#86	1+2	WLAN5.3GHz	802.11a 6Mbps	Back	0	64	5320	17.52	18.00	1.116	98.10	1.019	26.6	0.08	1.330	1.512
	1+2	WLAN5.3GHz	802.11a 6Mbps	Left Side	0	64	5320	17.52	18.00	1.116	98.10	1.019	2.704			
	1+2	WLAN5.3GHz	802.11a 6Mbps	Top Side	0	64	5320	17.52	18.00	1.116	98.10	1.019	3.93	0.05	0.560	0.637
	1	WLAN5.5GHz	802.11a 6Mbps	Front	0	100	5500	12.98	13.00	1.004	98.10	1.019	0.303			
#87	1	WLAN5.5GHz	802.11a 6Mbps	Back	0	100	5500	12.98	13.00	1.004	98.10	1.019	15.1	0.1	1.200	1.228
	1	WLAN5.5GHz	802.11a 6Mbps	Left Side	0	100	5500	12.98	13.00	1.004	98.10	1.019	1.62			
	1	WLAN5.5GHz	802.11a 6Mbps	Top Side	0	100	5500	12.98	13.00	1.004	98.10	1.019	3.11	0.13	0.300	0.307
	2	WLAN5.5GHz	802.11a 6Mbps	Front	0	116	5580	15.89	16.00	1.025	98.10	1.019	0.364			
#88	2	WLAN5.5GHz	802.11a 6Mbps	Back	0	116	5580	15.89	16.00	1.025	98.10	1.019	4.07	0.06	1.010	1.055
	2	WLAN5.5GHz	802.11a 6Mbps	Left Side	0	116	5580	15.89	16.00	1.025	98.10	1.019	2.56	0.15	0.480	0.501
	2	WLAN5.5GHz	802.11a 6Mbps	Top Side	0	116	5580	15.89	16.00	1.025	98.10	1.019	0.0881			
	1+2	WLAN5.5GHz	802.11a 6Mbps	Front	0	100	5500	19.07	19.50	1.103	98.10	1.019	0.751			
	1+2	WLAN5.5GHz	802.11a 6Mbps	Back	0	100	5500	19.07	19.50	1.103	98.10	1.019	42.2	0.05	2.370	2.664
#89	1+2	WLAN5.5GHz	802.11a 6Mbps	Back	0	124	5620	18.94	19.50	1.138	98.10	1.019		0.15	2.390	2.771
	1+2	WLAN5.5GHz	802.11a 6Mbps	Left Side	0	100	5500	19.07	19.50	1.103	98.10	1.019	2.728			
	1+2	WLAN5.5GHz	802.11a 6Mbps	Top Side	0	100	5500	19.07	19.50	1.103	98.10	1.019	4.87	0.09	0.485	0.545



15.5 Repeated SAR Measurement

<1g SAR>

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 4	-	20M	QPSK	1	0	Bottom Side	10	P-Sensor On	20175	1732.5	20.32	20.50	1.042	-	-	0.17	0.931	1	0.970
2nd	LTE Band 4	-	20M	QPSK	1	0	Bottom Side	10	P-Sensor On	20175	1732.5	20.32	20.50	1.042	-	-	0.06	0.925	1.006	0.964
1st	LTE Band 25	-	20M	QPSK	1	0	Bottom Side	10	P-Sensor On	26590	1905	19.56	20.00	1.107	-	-	0.04	0.890	1	0.985
2nd	LTE Band 25	-	20M	QPSK	1	0	Bottom Side	10	P-Sensor On	26590	1905	19.56	20.00	1.107	-	-	0.06	0.885	1.006	0.979
1st	LTE Band 30	-	10M	QPSK	1	0	Bottom Side	10	P-Sensor Off	27710	2310	22.80	23.50	1.175	-	-	0.02	0.981	1	1.153
2nd	LTE Band 30	-	10M	QPSK	1	0	Bottom Side	10	P-Sensor Off	27710	2310	22.80	23.50	1.175	-	-	0.09	0.968	1.013	1.137
1st	WLAN2.4GHz	802.11b 1Mbps	-	-	-	-	Right Tilted	0	P-Sensor Off	11	2472	18.67	19.00	1.079	98.57	1.015	0.05	0.846	1	0.926
2nd	WLAN2.4GHz	802.11b 1Mbps	-	-	-	-	Right Tilted	0	P-Sensor Off	11	2472	18.67	19.00	1.079	98.57	1.015	0.09	0.832	1.017	0.911
1st	WLAN5.2GHz	802.11a 6Mbps	-	-	-	-	Back	10	P-Sensor Off	44	5220	17.44	17.50	1.014	98.10	1.019	0.02	0.918	1	0.948
2nd	WLAN5.2GHz	802.11a 6Mbps	-	-	-	-	Back	10	P-Sensor Off	44	5220	17.44	17.50	1.014	98.10	1.019	0.08	0.908	1.011	0.938
1st	WLAN5.3GHz	802.11a 6Mbps	-	-	-	-	Back	10	P-Sensor Off	64	5320	17.52	18.00	1.116	98.10	1.019	-0.09	0.969	1	1.102
2nd	WLAN5.3GHz	802.11a 6Mbps	-	-	-	-	Back	10	P-Sensor Off	64	5320	17.52	18.00	1.116	98.10	1.019	0.09	0.955	1.015	1.086
1st	WLAN5.5GHz	802.11a 6Mbps	-	-	-	-	Back	10	P-Sensor Off	100	5500	19.07	19.50	1.103	98.10	1.019	0.09	1.030	1	1.158
2nd	WLAN5.5GHz	802.11a 6Mbps	-	-	-	-	Back	10	P-Sensor Off	100	5500	19.07	19.50	1.103	98.10	1.019	0.07	0.998	1.032	1.122
1st	WLAN5.8GHz	802.11a 6Mbps	-	-	-	-	Back	10	P-Sensor Off	157	5785	19.31	19.50	1.045	98.10	1.019	0.1	1.060	1	1.128
2nd	WLAN5.8GHz	802.11a 6Mbps	-	-	-	-	Back	10	P-Sensor Off	157	5785	19.31	19.50	1.045	98.10	1.019	0.11	1.000	1.060	1.065

<10g SAR>

No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WLAN5.5GHz	802.11a 6Mbps	Back	0	124	5620	18.94	19.50	1.138	98.10	1.019	0.15	2.390	1	2.771
2nd	WLAN5.5GHz	802.11a 6Mbps	Back	0	124	5620	18.94	19.50	1.138	98.10	1.019	0.07	2.280	1.048	2.643

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	GSM Voice + WLAN2.4GHz SISO/MIMO	Yes	Yes	
2.	GPRS/EDGE + WLAN2.4GHz SISO/MIMO	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz SISO/MIMO	Yes	Yes	Yes
4.	CDMA + WLAN2.4GHz SISO/MIMO	Yes	Yes	Yes
5.	LTE + WLAN2.4GHz SISO/MIMO	Yes	Yes	Yes
6.	GSM Voice + WLAN5.3/5.5GHz SISO/MIMO	Yes	Yes	
7.	GPRS/EDGE + WLAN5.3/5.5GHz SISO/MIMO	Yes	Yes	
8.	WCDMA + WLAN5.3/5.5GHz SISO/MIMO	Yes	Yes	
9.	CDMA + WLAN5.3/5.5GHz SISO/MIMO	Yes	Yes	
10.	LTE + WLAN5.3/5.5GHz SISO/MIMO	Yes	Yes	
11.	GSM Voice + WLAN5.2/5.8GHz SISO/MIMO	Yes	Yes	
12.	GPRS/EDGE + WLAN5.2/5.8GHz SISO/MIMO	Yes	Yes	Yes
13.	WCDMA + WLAN5.2/5.8GHz SISO/MIMO	Yes	Yes	Yes
14.	CDMA + WLAN5.2/5.8GHz SISO/MIMO	Yes	Yes	Yes
15.	LTE + WLAN5.2/5.8GHz SISO/MIMO	Yes	Yes	Yes
16.	GSM Voice + Bluetooth		Yes	
17.	GPRS/EDGE + Bluetooth		Yes	Yes
18.	WCDMA + Bluetooth		Yes	Yes
19.	CDMA + Bluetooth		Yes	Yes
20.	LTE + Bluetooth		Yes	Yes
21.	WLAN2.4GHz Ant.1 + WLAN5.3/5.5GHz Ant.2	Yes	Yes	
22.	WLAN2.4GHz Ant.1 + WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes
23.	WLAN2.4GHz Ant.2 + Bluetooth		Yes	Yes
24.	Bluetooth + WLAN5GHz SISO/MIMO		Yes	Yes
25.	GSM Voice + Bluetooth + WLAN5.3/5.5GHz SISO/MIMO		Yes	
26.	GPRS/EDGE + Bluetooth + WLAN5.3/5.5GHz SISO/MIMO		Yes	
27.	WCDMA + Bluetooth + WLAN5.3/5.5GHz SISO/MIMO		Yes	
28.	CDMA + Bluetooth + WLAN5.3/5.5GHz SISO/MIMO		Yes	
29.	LTE + Bluetooth + WLAN5.3/5.5GHz SISO/MIMO		Yes	
30.	GSM Voice + Bluetooth + WLAN5.2/5.8GHz SISO/MIMO	Yes	Yes	
31.	GPRS/EDGE + Bluetooth + WLAN5.2/5.8GHz SISO/MIMO	Yes	Yes	Yes
32.	WCDMA + Bluetooth + WLAN5.2/5.8GHz SISO/MIMO	Yes	Yes	Yes
33.	CDMA + Bluetooth + WLAN5.2/5.8GHz SISO/MIMO	Yes	Yes	Yes
34.	LTE + Bluetooth + WLAN5.2/5.8GHz SISO/MIMO	Yes	Yes	Yes
35.	GSM Voice + Bluetooth + WLAN2.4GHz Ant.2		Yes	
36.	GPRS/EDGE + Bluetooth + WLAN2.4GHz Ant.2		Yes	Yes
37.	WCDMA + Bluetooth + WLAN2.4GHz Ant.2		Yes	Yes
38.	CDMA + Bluetooth + WLAN2.4GHz Ant.2		Yes	Yes
39.	LTE + Bluetooth + WLAN2.4GHz Ant.2		Yes	Yes
40.	GSM Voice + WLAN2.4GHz Ant.1 + WLAN5.3/5.5GHz Ant.2	Yes	Yes	
41.	GPRS/EDGE + WLAN2.4GHz Ant.1 + WLAN5.3/5.5GHz Ant.2	Yes	Yes	
42.	WCDMA + WLAN2.4GHz Ant.1 + WLAN5.3/5.5GHz Ant.2	Yes	Yes	
43.	CDMA + WLAN2.4GHz Ant.1 + WLAN5.3/5.5GHz Ant.2	Yes	Yes	
44.	LTE + WLAN2.4GHz Ant.1 + WLAN5.3/5.5GHz Ant.2	Yes	Yes	
45.	GSM Voice + WLAN2.4GHz Ant.1 + WLAN5.2/5.8GHz Ant.2	Yes	Yes	
46.	GPRS/EDGE + WLAN2.4GHz Ant.1 + WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes
47.	WCDMA + WLAN2.4GHz Ant.1 + WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes
48.	CDMA + WLAN2.4GHz Ant.1 + WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes
49.	LTE + WLAN2.4GHz Ant.1 + WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes



General Note:

1. This device supports VoIP in GPRS, EGPRS, CDMA, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. EUT will choose each GSM, WCDMA, CDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. WLAN2.4GHz antenna 1 and Bluetooth share the same antenna, so can't transmit simultaneously.
4. According to the character of EUT, WLAN2.4GHz Ant.2 and WLAN5GHz Ant.1 can't transmit simultaneously.
5. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
6. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
7. The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
8. For simultaneously analysis of hotspot and body-worn, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
9. Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
10. The reported SAR summation is calculated based on the same configuration and test position.
11. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$ for 1g SAR, $SPLSR \leq 0.10$ for 10g SAR simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - v) The SPLSR calculated results please refer to section 16.4.
 - vi) For WWAN product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.



16.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+7 Summed 1g SAR (W/kg)	1+2+6 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.2	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.1	5GHz WLAN Ant.2	5GHz WLAN Ant.1+2								
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
GSM	GSM850	Right Cheek	0.633	0.878	0.025	0.683	0.087	0.005	0.481	1.51	0.66	1.32	0.72	0.64	1.11	1.52
		Right Tilted	0.343	0.949	0.025	0.705	0.207	0.048	0.579	1.29	0.37	1.05	0.55	0.39	0.92	1.34
		Left Cheek	0.498	0.607	0.025	0.705	0.207	0.048	0.579	1.11	0.52	1.20	0.71	0.55	1.08	1.15
		Left Tilted	0.414	0.949	0.025	0.705	0.207	0.048	0.579	1.36	0.44	1.12	0.62	0.46	0.99	1.41
	GSM1900	Right Cheek	0.514	0.878	0.025	0.683	0.087	0.005	0.481	1.39	0.54	1.20	0.60	0.52	1.00	1.40
		Right Tilted	0.233	0.949	0.025	0.705	0.207	0.048	0.579	1.18	0.26	0.94	0.44	0.28	0.81	1.23
		Left Cheek	0.501	0.607	0.025	0.705	0.207	0.048	0.579	1.11	0.53	1.21	0.71	0.55	1.08	1.16
		Left Tilted	0.261	0.949	0.025	0.705	0.207	0.048	0.579	1.21	0.29	0.97	0.47	0.31	0.84	1.26
WCDMA	Band V	Right Cheek	0.255	0.878	0.025	0.683	0.087	0.005	0.481	1.13	0.28	0.94	0.34	0.26	0.74	1.14
		Right Tilted	0.137	0.949	0.025	0.705	0.207	0.048	0.579	1.09	0.16	0.84	0.34	0.19	0.72	1.13
		Left Cheek	0.196	0.607	0.025	0.705	0.207	0.048	0.579	0.80	0.22	0.90	0.40	0.24	0.78	0.85
		Left Tilted	0.148	0.949	0.025	0.705	0.207	0.048	0.579	1.10	0.17	0.85	0.36	0.20	0.73	1.15
	Band IV	Right Cheek	0.149	0.878	0.025	0.683	0.087	0.005	0.481	1.03	0.17	0.83	0.24	0.15	0.63	1.03
		Right Tilted	0.057	0.949	0.025	0.705	0.207	0.048	0.579	1.01	0.08	0.76	0.26	0.11	0.64	1.05
		Left Cheek	0.124	0.607	0.025	0.705	0.207	0.048	0.579	0.73	0.15	0.83	0.33	0.17	0.70	0.78
		Left Tilted	0.060	0.949	0.025	0.705	0.207	0.048	0.579	1.01	0.09	0.77	0.27	0.11	0.64	1.06
	Band II	Right Cheek	0.126	0.878	0.025	0.683	0.087	0.005	0.481	1.00	0.15	0.81	0.21	0.13	0.61	1.01
		Right Tilted	0.047	0.949	0.025	0.705	0.207	0.048	0.579	1.00	0.07	0.75	0.25	0.10	0.63	1.04
		Left Cheek	0.057	0.607	0.025	0.705	0.207	0.048	0.579	0.66	0.08	0.76	0.26	0.11	0.64	0.71
		Left Tilted	0.041	0.949	0.025	0.705	0.207	0.048	0.579	0.99	0.07	0.75	0.25	0.09	0.62	1.04
CDMA	BC10	Right Cheek	0.213	0.878	0.025	0.683	0.087	0.005	0.481	1.09	0.24	0.90	0.30	0.22	0.69	1.10
		Right Tilted	0.111	0.949	0.025	0.705	0.207	0.048	0.579	1.06	0.14	0.82	0.32	0.16	0.69	1.11
		Left Cheek	0.173	0.607	0.025	0.705	0.207	0.048	0.579	0.78	0.20	0.88	0.38	0.22	0.75	0.83
		Left Tilted	0.128	0.949	0.025	0.705	0.207	0.048	0.579	1.08	0.15	0.83	0.34	0.18	0.71	1.13
	BC0	Right Cheek	0.224	0.878	0.025	0.683	0.087	0.005	0.481	1.10	0.25	0.91	0.31	0.23	0.71	1.11
		Right Tilted	0.116	0.949	0.025	0.705	0.207	0.048	0.579	1.07	0.14	0.82	0.32	0.16	0.70	1.11
		Left Cheek	0.168	0.607	0.025	0.705	0.207	0.048	0.579	0.78	0.19	0.87	0.38	0.22	0.75	0.82
		Left Tilted	0.119	0.949	0.025	0.705	0.207	0.048	0.579	1.07	0.14	0.82	0.33	0.17	0.70	1.12
	BC1	Right Cheek	0.151	0.878	0.025	0.683	0.087	0.005	0.481	1.03	0.18	0.83	0.24	0.16	0.63	1.03
		Right Tilted	0.077	0.949	0.025	0.705	0.207	0.048	0.579	1.03	0.10	0.78	0.28	0.13	0.66	1.07
		Left Cheek	0.088	0.607	0.025	0.705	0.207	0.048	0.579	0.70	0.11	0.79	0.30	0.14	0.67	0.74
		Left Tilted	0.058	0.949	0.025	0.705	0.207	0.048	0.579	1.01	0.08	0.76	0.27	0.11	0.64	1.06



WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+7 Summed 1g SAR (W/kg)	1+2+6 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.2	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.1	5GHz WLAN Ant.2	5GHz WLAN Ant.1+2								
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
LTE	Band 12	Right Cheek	0.141	0.878	0.025	0.683	0.087	0.005	0.481	1.02	0.17	0.82	0.23	0.15	0.62	1.02
		Right Tilted	0.074	0.949	0.025	0.705	0.207	0.048	0.579	1.02	0.10	0.78	0.28	0.12	0.65	1.07
		Left Cheek	0.127	0.607	0.025	0.705	0.207	0.048	0.579	0.73	0.15	0.83	0.33	0.18	0.71	0.78
		Left Tilted	0.082	0.949	0.025	0.705	0.207	0.048	0.579	1.03	0.11	0.79	0.29	0.13	0.66	1.08
	Band 13	Right Cheek	0.126	0.878	0.025	0.683	0.087	0.005	0.481	1.00	0.15	0.81	0.21	0.13	0.61	1.01
		Right Tilted	0.063	0.949	0.025	0.705	0.207	0.048	0.579	1.01	0.09	0.77	0.27	0.11	0.64	1.06
		Left Cheek	0.102	0.607	0.025	0.705	0.207	0.048	0.579	0.71	0.13	0.81	0.31	0.15	0.68	0.76
		Left Tilted	0.071	0.949	0.025	0.705	0.207	0.048	0.579	1.02	0.10	0.78	0.28	0.12	0.65	1.07
	Band 26	Right Cheek	0.168	0.878	0.025	0.683	0.087	0.005	0.481	1.05	0.19	0.85	0.26	0.17	0.65	1.05
		Right Tilted	0.089	0.949	0.025	0.705	0.207	0.048	0.579	1.04	0.11	0.79	0.30	0.14	0.67	1.09
		Left Cheek	0.123	0.607	0.025	0.705	0.207	0.048	0.579	0.73	0.15	0.83	0.33	0.17	0.70	0.78
		Left Tilted	0.082	0.949	0.025	0.705	0.207	0.048	0.579	1.03	0.11	0.79	0.29	0.13	0.66	1.08
	Band 4	Right Cheek	0.131	0.878	0.025	0.683	0.087	0.005	0.481	1.01	0.16	0.81	0.22	0.14	0.61	1.01
		Right Tilted	0.062	0.949	0.025	0.705	0.207	0.048	0.579	1.01	0.09	0.77	0.27	0.11	0.64	1.06
		Left Cheek	0.168	0.607	0.025	0.705	0.207	0.048	0.579	0.78	0.19	0.87	0.38	0.22	0.75	0.82
		Left Tilted	0.070	0.949	0.025	0.705	0.207	0.048	0.579	1.02	0.10	0.78	0.28	0.12	0.65	1.07
	Band 25	Right Cheek	0.165	0.878	0.025	0.683	0.087	0.005	0.481	1.04	0.19	0.85	0.25	0.17	0.65	1.05
		Right Tilted	0.111	0.949	0.025	0.705	0.207	0.048	0.579	1.06	0.14	0.82	0.32	0.16	0.69	1.11
		Left Cheek	0.181	0.607	0.025	0.705	0.207	0.048	0.579	0.79	0.21	0.89	0.39	0.23	0.76	0.84
		Left Tilted	0.082	0.949	0.025	0.705	0.207	0.048	0.579	1.03	0.11	0.79	0.29	0.13	0.66	1.08
	Band 30	Right Cheek	0.122	0.878	0.025	0.683	0.087	0.005	0.481	1.00	0.15	0.81	0.21	0.13	0.60	1.01
		Right Tilted	0.064	0.949	0.025	0.705	0.207	0.048	0.579	1.01	0.09	0.77	0.27	0.11	0.64	1.06
		Left Cheek	0.110	0.607	0.025	0.705	0.207	0.048	0.579	0.72	0.14	0.82	0.32	0.16	0.69	0.77
		Left Tilted	0.082	0.949	0.025	0.705	0.207	0.048	0.579	1.03	0.11	0.79	0.29	0.13	0.66	1.08
	Band 7	Right Cheek	0.093	0.878	0.025	0.683	0.087	0.005	0.481	0.97	0.12	0.78	0.18	0.10	0.57	0.98
		Right Tilted	0.069	0.949	0.025	0.705	0.207	0.048	0.579	1.02	0.09	0.77	0.28	0.12	0.65	1.07
		Left Cheek	0.146	0.607	0.025	0.705	0.207	0.048	0.579	0.75	0.17	0.85	0.35	0.19	0.73	0.80
		Left Tilted	0.048	0.949	0.025	0.705	0.207	0.048	0.579	1.00	0.07	0.75	0.26	0.10	0.63	1.05
	Band 41	Right Cheek	0.052	0.878	0.025	0.683	0.087	0.005	0.481	0.93	0.08	0.74	0.14	0.06	0.53	0.94
		Right Tilted	0.031	0.949	0.025	0.705	0.207	0.048	0.579	0.98	0.06	0.74	0.24	0.08	0.61	1.03
		Left Cheek	0.060	0.607	0.025	0.705	0.207	0.048	0.579	0.67	0.09	0.77	0.27	0.11	0.64	0.72
		Left Tilted	0.025	0.949	0.025	0.705	0.207	0.048	0.579	0.97	0.05	0.73	0.23	0.07	0.60	1.02



16.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	6	8	1+2+6			1+3+8			1+4 Summed 1g SAR (W/kg)		
		WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.2	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant.1	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	Case No	SPLSR			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)									
GSM	GSM850	Front	0.804	0.246	0.217	0.438	0.356	0.039	1.41			1.06			1.24	
		Back	0.659	0.336	0.217	0.213	0.356	0.025	1.35			0.90			0.87	
		Left Side	0.414	0.195	0.217	0.438	0.356	0.059	0.97			0.69			0.85	
		Right Side	0.793							0.79			0.79			0.79
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
		Bottom Side	0.427							0.43			0.43			0.43
	GSM1900	Front	0.361	0.246	0.217	0.438	0.356	0.039	0.96			0.62			0.80	
		Back	0.449	0.336	0.217	0.213	0.356	0.025	1.14			0.69			0.66	
		Left Side	0.592	0.195	0.217	0.438	0.356	0.059	1.14			0.87			1.03	
		Right Side	0.341							0.34			0.34			0.34
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
		Bottom Side	0.844							0.84			0.84			0.84
WCDMA	Band V	Front	0.394	0.246	0.217	0.438	0.356	0.039	1.00			0.65			0.83	
		Back	0.408	0.336	0.217	0.213	0.356	0.025	1.10			0.65			0.62	
		Left Side	0.057	0.195	0.217	0.438	0.356	0.059	0.61			0.33			0.50	
		Right Side	0.286							0.29			0.29			0.29
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
		Bottom Side	0.255							0.26			0.26			0.26
	Band IV	Front	0.554	0.246	0.217	0.438	0.356	0.039	1.16			0.81			0.99	
		Back	0.550	0.336	0.217	0.213	0.356	0.025	1.24			0.79			0.76	
		Left Side	0.219	0.195	0.217	0.438	0.356	0.059	0.77			0.50			0.66	
		Right Side	0.124							0.12			0.12			0.12
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
		Bottom Side	1.047							1.05			1.05			1.05
	Band II	Front	0.358	0.246	0.217	0.438	0.356	0.039	0.96			0.61			0.80	
		Back	0.358	0.336	0.217	0.213	0.356	0.025	1.05			0.60			0.57	
		Left Side	0.179	0.195	0.217	0.438	0.356	0.059	0.73			0.46			0.62	
		Right Side	0.127							0.13			0.13			0.13
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
		Bottom Side	0.667							0.67			0.67			0.67
CDMA	BC10	Front	0.390	0.246	0.217	0.438	0.356	0.039	0.99			0.65			0.83	
		Back	0.359	0.336	0.217	0.213	0.356	0.025	1.05			0.60			0.57	
		Left Side	0.109	0.195	0.217	0.438	0.356	0.059	0.66			0.39			0.55	
		Right Side	0.335							0.34			0.34			0.34
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
		Bottom Side	0.266							0.27			0.27			0.27
	BC0	Front	0.440	0.246	0.217	0.438	0.356	0.039	1.04			0.70			0.88	
		Back	0.433	0.336	0.217	0.213	0.356	0.025	1.13			0.68			0.65	
		Left Side	0.105	0.195	0.217	0.438	0.356	0.059	0.66			0.38			0.54	
		Right Side	0.346							0.35			0.35			0.35
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
		Bottom Side	0.333							0.33			0.33			0.33
	BC1	Front	0.294	0.246	0.217	0.438	0.356	0.039	0.90			0.55			0.73	
		Back	0.279	0.336	0.217	0.213	0.356	0.025	0.97			0.52			0.49	
		Left Side	0.267	0.195	0.217	0.438	0.356	0.059	0.82			0.54			0.71	
		Right Side	0.219							0.22			0.22			0.22
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
		Bottom Side	0.474							0.47			0.47			0.47



FCC SAR Test Report

Report No. : FA820821

WWAN Band	Exposure Position	1	2	3	4	6	8	1+2+6		1+3+8		1+4 Summed 1g SAR (W/kg)			
		WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.2	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant. 1	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)		Case No	SPLSR	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
LTE	Band 12	Front	0.249	0.246	0.217	0.438	0.356	0.039	0.85			0.51			0.69
		Back	0.322	0.336	0.217	0.213	0.356	0.025	1.01			0.56			0.54
		Left Side	0.175	0.195	0.217	0.438	0.356	0.059	0.73			0.45			0.61
		Right Side	0.235						0.24			0.24			0.24
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44
		Bottom Side	0.174						0.17			0.17			0.17
	Band 13	Front	0.275	0.246	0.217	0.438	0.356	0.039	0.88			0.53			0.71
		Back	0.292	0.336	0.217	0.213	0.356	0.025	0.98			0.53			0.51
		Left Side	0.093	0.195	0.217	0.438	0.356	0.059	0.64			0.37			0.53
		Right Side	0.26						0.26			0.26			0.26
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44
		Bottom Side	0.216						0.22			0.22			0.22
	Band 26	Front	0.332	0.246	0.217	0.438	0.356	0.039	0.93			0.59			0.77
		Back	0.387	0.336	0.217	0.213	0.356	0.025	1.08			0.63			0.60
		Left Side	0.08	0.195	0.217	0.438	0.356	0.059	0.63			0.36			0.52
		Right Side	0.265						0.27			0.27			0.27
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44
		Bottom Side	0.274						0.27			0.27			0.27
	Band 4	Front	0.491	0.246	0.217	0.438	0.356	0.039	1.09			0.75			0.93
		Back	0.474	0.336	0.217	0.213	0.356	0.025	1.17			0.72			0.69
		Left Side	0.181	0.195	0.217	0.438	0.356	0.059	0.73			0.46			0.62
		Right Side	0.104						0.10			0.10			0.10
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44
		Bottom Side	0.97						0.97			0.97			0.97
	Band 25	Front	0.459	0.246	0.217	0.438	0.356	0.039	1.06			0.72			0.90
		Back	0.474	0.336	0.217	0.213	0.356	0.025	1.17			0.72			0.69
		Left Side	0.171	0.195	0.217	0.438	0.356	0.059	0.72			0.45			0.61
		Right Side	0.111						0.11			0.11			0.11
		Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44
		Bottom Side	0.985						0.99			0.99			0.99
Band 30	Front	0.512	0.246	0.217	0.438	0.356	0.039	1.11			0.77			0.95	
	Back	0.725	0.336	0.217	0.213	0.356	0.025	1.42			0.97			0.94	
	Left Side	0.157	0.195	0.217	0.438	0.356	0.059	0.71			0.43			0.60	
	Right Side	0.095						0.10			0.10			0.10	
	Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
	Bottom Side	1.153						1.15			1.15			1.15	
Band 7	Front	0.147	0.246	0.217	0.438	0.356	0.039	0.75			0.40			0.59	
	Back	0.478	0.336	0.217	0.213	0.356	0.025	1.17			0.72			0.69	
	Left Side	0.183	0.195	0.217	0.438	0.356	0.059	0.73			0.46			0.62	
	Right Side	0.051						0.05			0.05			0.05	
	Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
	Bottom Side	0.383						0.38			0.38			0.38	
Band 41	Front	0.151	0.246	0.217	0.438	0.356	0.039	0.75			0.41			0.59	
	Back	0.574	0.336	0.217	0.213	0.356	0.025	1.27			0.82			0.79	
	Left Side	0.119	0.195	0.217	0.438	0.356	0.059	0.67			0.40			0.56	
	Right Side	0.035						0.04			0.04			0.04	
	Top Side		0.667	0.217	0.438	0.356	0.124	1.02			0.34			0.44	
	Bottom Side	0.363						0.36			0.36			0.36	



WWAN Band	Exposure Position	1	5	6	7	8	1+5+8			1+6+8			1+7+8			
		WWAN	5GHz WLAN Ant.1	5GHz WLAN Ant.2	5GHz WLAN Ant.1+2	Bluetooth Ant.1	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	Case No	SPLSR	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)										
GSM	GSM850	Front	0.804	0.028	0.356	0.041	0.039	0.87			1.20			0.88		
		Back	0.659	0.567	0.356	1.160	0.025	1.25			1.04			1.84	#1	0.04
		Left Side	0.414	0.131	0.356	0.267	0.059	0.60			0.83			0.74		
		Right Side	0.793					0.79			0.79			0.79		
		Top Side		0.146	0.356	0.251	0.124	0.27			0.48			0.38		
		Bottom Side	0.427					0.43			0.43			0.43		
	GSM1900	Front	0.361	0.028	0.356	0.041	0.039	0.43			0.76			0.44		
		Back	0.449	0.567	0.356	1.160	0.025	1.04			0.83			1.63	#2	0.04
		Left Side	0.592	0.131	0.356	0.267	0.059	0.78			1.01			0.92		
		Right Side	0.341					0.34			0.34			0.34		
		Top Side		0.146	0.356	0.251	0.124	0.27			0.48			0.38		
		Bottom Side	0.844					0.84			0.84			0.84		
WCDMA	Band V	Front	0.394	0.028	0.356	0.041	0.039	0.46			0.79			0.47		
		Back	0.408	0.567	0.356	1.160	0.025	1.00			0.79			1.59		
		Left Side	0.057	0.131	0.356	0.267	0.059	0.25			0.47			0.38		
		Right Side	0.286					0.29			0.29			0.29		
		Top Side		0.146	0.356	0.251	0.124	0.27			0.48			0.38		
		Bottom Side	0.255					0.26			0.26			0.26		
	Band IV	Front	0.554	0.028	0.356	0.041	0.039	0.62			0.95			0.63		
		Back	0.550	0.567	0.356	1.160	0.025	1.14			0.93			1.74	#3	0.04
		Left Side	0.219	0.131	0.356	0.267	0.059	0.41			0.63			0.55		
		Right Side	0.124					0.12			0.12			0.12		
		Top Side		0.146	0.356	0.251	0.124	0.27			0.48			0.38		
		Bottom Side	1.047					1.05			1.05			1.05		
	Band II	Front	0.358	0.028	0.356	0.041	0.039	0.43			0.75			0.44		
		Back	0.358	0.567	0.356	1.160	0.025	0.95			0.74			1.54		
		Left Side	0.179	0.131	0.356	0.267	0.059	0.37			0.59			0.51		
		Right Side	0.127					0.13			0.13			0.13		
		Top Side		0.146	0.356	0.251	0.124	0.27			0.48			0.38		
		Bottom Side	0.667					0.67			0.67			0.67		
CDMA	BC10	Front	0.390	0.028	0.356	0.041	0.039	0.46			0.79			0.47		
		Back	0.359	0.567	0.356	1.160	0.025	0.95			0.74			1.54		
		Left Side	0.109	0.131	0.356	0.267	0.059	0.30			0.52			0.44		
		Right Side	0.335					0.34			0.34			0.34		
		Top Side		0.146	0.356	0.251	0.124	0.27			0.48			0.38		
		Bottom Side	0.266					0.27			0.27			0.27		
	BC0	Front	0.440	0.028	0.356	0.041	0.039	0.51			0.84			0.52		
		Back	0.433	0.567	0.356	1.160	0.025	1.03			0.81			1.62	#4	0.04
		Left Side	0.105	0.131	0.356	0.267	0.059	0.30			0.52			0.43		
		Right Side	0.346					0.35			0.35			0.35		
		Top Side		0.146	0.356	0.251	0.124	0.27			0.48			0.38		
		Bottom Side	0.333					0.33			0.33			0.33		
BC1	Front	0.294	0.028	0.356	0.041	0.039	0.36			0.69			0.37			
	Back	0.279	0.567	0.356	1.160	0.025	0.87			0.66			1.46			
	Left Side	0.267	0.131	0.356	0.267	0.059	0.46			0.68			0.59			
	Right Side	0.219					0.22			0.22			0.22			
	Top Side		0.146	0.356	0.251	0.124	0.27			0.48			0.38			
	Bottom Side	0.474					0.47			0.47			0.47			



FCC SAR Test Report

Report No. : FA820821

WWAN Band	Exposure Position	1	5	6	7	8	1+5+8		1+6+8		1+7+8						
		WWAN 1g SAR (W/kg)	5GHz WLAN Ant.1 1g SAR (W/kg)	5GHz WLAN Ant.2 1g SAR (W/kg)	5GHz WLAN Ant.1+2 1g SAR (W/kg)	Bluetooth Ant. 1 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	Case No	SPLSR		
LTE	Band 12	Front	0.249	0.028	0.356	0.041	0.039	0.32			0.64			0.33			
		Back	0.322	0.567	0.356	1.160	0.025	0.039	0.91			0.70			1.51		
		Left Side	0.175	0.131	0.356	0.267	0.059	0.039	0.37			0.59			0.50		
		Right Side	0.235					0.039	0.24			0.24			0.24		
		Top Side		0.146	0.356	0.251	0.124	0.039	0.27			0.48			0.38		
		Bottom Side	0.174					0.039	0.17			0.17			0.17		
	Band 13	Front	0.275	0.028	0.356	0.041	0.039	0.34			0.67			0.36			
		Back	0.292	0.567	0.356	1.160	0.025	0.039	0.88			0.67			1.48		
		Left Side	0.093	0.131	0.356	0.267	0.059	0.039	0.28			0.51			0.42		
		Right Side	0.26					0.039	0.26			0.26			0.26		
		Top Side		0.146	0.356	0.251	0.124	0.039	0.27			0.48			0.38		
		Bottom Side	0.216					0.039	0.22			0.22			0.22		
	Band 26	Front	0.332	0.028	0.356	0.041	0.039	0.40			0.73			0.41			
		Back	0.387	0.567	0.356	1.160	0.025	0.039	0.98			0.77			1.57		
		Left Side	0.08	0.131	0.356	0.267	0.059	0.039	0.27			0.50			0.41		
		Right Side	0.265					0.039	0.27			0.27			0.27		
		Top Side		0.146	0.356	0.251	0.124	0.039	0.27			0.48			0.38		
		Bottom Side	0.274					0.039	0.27			0.27			0.27		
	Band 4	Front	0.491	0.028	0.356	0.041	0.039	0.56			0.89			0.57			
		Back	0.474	0.567	0.356	1.160	0.025	0.039	1.07			0.86			1.66	#5	0.04
		Left Side	0.181	0.131	0.356	0.267	0.059	0.039	0.37			0.60			0.51		
		Right Side	0.104					0.039	0.10			0.10			0.10		
		Top Side		0.146	0.356	0.251	0.124	0.039	0.27			0.48			0.38		
		Bottom Side	0.97					0.039	0.97			0.97			0.97		
Band 25	Front	0.459	0.028	0.356	0.041	0.039	0.53			0.85			0.54				
	Back	0.474	0.567	0.356	1.160	0.025	0.039	1.07			0.86			1.66	#6	0.04	
	Left Side	0.171	0.131	0.356	0.267	0.059	0.039	0.36			0.59			0.50			
	Right Side	0.111					0.039	0.11			0.11			0.11			
	Top Side		0.146	0.356	0.251	0.124	0.039	0.27			0.48			0.38			
	Bottom Side	0.985					0.039	0.99			0.99			0.99			
Band 30	Front	0.512	0.028	0.356	0.041	0.039	0.58			0.91			0.59				
	Back	0.725	0.567	0.356	1.160	0.025	0.039	1.32			1.11			1.91	#7	0.04	
	Left Side	0.157	0.131	0.356	0.267	0.059	0.039	0.35			0.57			0.48			
	Right Side	0.095					0.039	0.10			0.10			0.10			
	Top Side		0.146	0.356	0.251	0.124	0.039	0.27			0.48			0.38			
	Bottom Side	1.153					0.039	1.15			1.15			1.15			
Band 7	Front	0.147	0.028	0.356	0.041	0.039	0.21			0.54			0.23				
	Back	0.478	0.567	0.356	1.160	0.025	0.039	1.07			0.86			1.66	#8	0.04	
	Left Side	0.183	0.131	0.356	0.267	0.059	0.039	0.37			0.60			0.51			
	Right Side	0.051					0.039	0.05			0.05			0.05			
	Top Side		0.146	0.356	0.251	0.124	0.039	0.27			0.48			0.38			
	Bottom Side	0.383					0.039	0.38			0.38			0.38			
Band 41	Front	0.151	0.028	0.356	0.041	0.039	0.22			0.55			0.23				
	Back	0.574	0.567	0.356	1.160	0.025	0.039	1.17			0.96			1.76	#9	0.04	
	Left Side	0.119	0.131	0.356	0.267	0.059	0.039	0.31			0.53			0.45			
	Right Side	0.035					0.039	0.04			0.04			0.04			
	Top Side		0.146	0.356	0.251	0.124	0.039	0.27			0.48			0.38			
	Bottom Side	0.363					0.039	0.36			0.36			0.36			



16.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	6	8	1+2+6			1+3+8			1+4 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.2	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant.1	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	Case No	SPLSR		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
GSM	GSM850	Front	0.804	0.246	0.217	0.438	0.033	0.039	1.08			1.06			1.24
		Back	0.659	0.336	0.217	0.213	0.407	0.025	0.025	1.40			0.90		0.87
	GSM1900	Front	0.361	0.246	0.217	0.438	0.033	0.039	0.64			0.62			0.80
		Back	0.449	0.336	0.217	0.213	0.407	0.025	1.19			0.69			0.66
WCDMA	Band V	Front	0.394	0.246	0.217	0.438	0.033	0.039	0.67			0.65			0.83
		Back	0.408	0.336	0.217	0.213	0.407	0.025	1.15			0.65			0.62
	Band IV	Front	0.554	0.246	0.217	0.438	0.033	0.039	0.83			0.81			0.99
		Back	0.55	0.336	0.217	0.213	0.407	0.025	1.29			0.79			0.76
	Band II	Front	0.358	0.246	0.217	0.438	0.033	0.039	0.64			0.61			0.80
		Back	0.358	0.336	0.217	0.213	0.407	0.025	1.10			0.60			0.57
CDMA	BC10	Front	0.357	0.246	0.217	0.438	0.033	0.039	0.64			0.61			0.80
		Back	0.384	0.336	0.217	0.213	0.407	0.025	1.13			0.63			0.60
	BC0	Front	0.373	0.246	0.217	0.438	0.033	0.039	0.65			0.63			0.81
		Back	0.422	0.336	0.217	0.213	0.407	0.025	1.17			0.66			0.64
	BC1	Front	0.318	0.246	0.217	0.438	0.033	0.039	0.60			0.57			0.76
		Back	0.296	0.336	0.217	0.213	0.407	0.025	1.04			0.54			0.51
LTE	Band 12	Front	0.249	0.246	0.217	0.438	0.033	0.039	0.53			0.51			0.69
		Back	0.322	0.336	0.217	0.213	0.407	0.025	1.07			0.56			0.54
	Band 13	Front	0.275	0.246	0.217	0.438	0.033	0.039	0.55			0.53			0.71
		Back	0.292	0.336	0.217	0.213	0.407	0.025	1.04			0.53			0.51
	Band 26	Front	0.332	0.246	0.217	0.438	0.033	0.039	0.61			0.59			0.77
		Back	0.387	0.336	0.217	0.213	0.407	0.025	1.13			0.63			0.60
	Band 4	Front	0.491	0.246	0.217	0.438	0.033	0.039	0.77			0.75			0.93
		Back	0.474	0.336	0.217	0.213	0.407	0.025	1.22			0.72			0.69
	Band 25	Front	0.459	0.246	0.217	0.438	0.033	0.039	0.74			0.72			0.90
		Back	0.474	0.336	0.217	0.213	0.407	0.025	1.22			0.72			0.69
	Band 30	Front	0.512	0.246	0.217	0.438	0.033	0.039	0.79			0.77			0.95
		Back	0.725	0.336	0.217	0.213	0.407	0.025	1.47			0.97			0.94
	Band 7	Front	0.147	0.246	0.217	0.438	0.033	0.039	0.43			0.40			0.59
		Back	0.478	0.336	0.217	0.213	0.407	0.025	1.22			0.72			0.69
	Band 41	Front	0.151	0.246	0.217	0.438	0.033	0.039	0.43			0.41			0.59
		Back	0.574	0.336	0.217	0.213	0.407	0.025	1.32			0.82			0.79




WWAN Band	Exposure Position	1	5	6	7	8	1+5+8			1+6+8			1+7+8			
		WWAN	5GHz WLAN Ant.1	5GHz WLAN Ant.2	5GHz WLAN Ant.1+2	Bluetooth Ant. 1	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	Case No	SPLSR	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)										
GSM	GSM850	Front	0.804	0.028	0.033	0.048	0.039	0.87			0.88			0.89		
		Back	0.659	0.632	0.407	1.160	0.025	1.32			1.09			1.84	#1	0.04
	GSM1900	Front	0.361	0.028	0.033	0.048	0.039	0.43			0.43			0.45		
		Back	0.449	0.632	0.407	1.160	0.025	1.11			0.88			1.63	#2	0.04
WCDMA	Band V	Front	0.394	0.028	0.033	0.048	0.039	0.46			0.47			0.48		
		Back	0.408	0.632	0.407	1.160	0.025	1.07			0.84			1.59		
	Band IV	Front	0.554	0.028	0.033	0.048	0.039	0.62			0.63			0.64		
		Back	0.55	0.632	0.407	1.160	0.025	1.21			0.98			1.74	#3	0.04
	Band II	Front	0.358	0.028	0.033	0.048	0.039	0.43			0.43			0.45		
		Back	0.358	0.632	0.407	1.160	0.025	1.02			0.79			1.54		
CDMA	BC10	Front	0.357	0.028	0.033	0.048	0.039	0.42			0.43			0.44		
		Back	0.384	0.632	0.407	1.160	0.025	1.04			0.82			1.57		
	BC0	Front	0.373	0.028	0.033	0.048	0.039	0.44			0.45			0.46		
		Back	0.422	0.632	0.407	1.160	0.025	1.08			0.85			1.61	#10	0.04
	BC1	Front	0.318	0.028	0.033	0.048	0.039	0.39			0.39			0.41		
		Back	0.296	0.632	0.407	1.160	0.025	0.95			0.73			1.48		
LTE	Band 12	Front	0.249	0.028	0.033	0.048	0.039	0.32			0.32			0.34		
		Back	0.322	0.632	0.407	1.160	0.025	0.98			0.75			1.51		
	Band 13	Front	0.275	0.028	0.033	0.048	0.039	0.34			0.35			0.36		
		Back	0.292	0.632	0.407	1.160	0.025	0.95			0.72			1.48		
	Band 26	Front	0.332	0.028	0.033	0.048	0.039	0.40			0.40			0.42		
		Back	0.387	0.632	0.407	1.160	0.025	1.04			0.82			1.57		
	Band 4	Front	0.491	0.028	0.033	0.048	0.039	0.56			0.56			0.58		
		Back	0.474	0.632	0.407	1.160	0.025	1.13			0.91			1.66	#5	0.04
	Band 25	Front	0.459	0.028	0.033	0.048	0.039	0.53			0.53			0.55		
		Back	0.474	0.632	0.407	1.160	0.025	1.13			0.91			1.66	#6	0.04
	Band 30	Front	0.512	0.028	0.033	0.048	0.039	0.58			0.58			0.60		
		Back	0.725	0.632	0.407	1.160	0.025	1.38			1.16			1.91	#7	0.04
	Band 7	Front	0.147	0.028	0.033	0.048	0.039	0.21			0.22			0.23		
		Back	0.478	0.632	0.407	1.160	0.025	1.14			0.91			1.66	#8	0.04
	Band 41	Front	0.151	0.028	0.033	0.048	0.039	0.22			0.22			0.24		
		Back	0.574	0.632	0.407	1.160	0.025	1.23			1.01			1.76	#9	0.04

16.4 SPLSR Evaluation and Analysis


General Note:

- When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
- $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.


Case #1	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed 1g SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	0.659	10	-0.0115	-0.08	-0.205	146.31	1.82	0.02	Not required
	5GHz WLAN Ant. 1+2		1.160	10	0.008	0.065	-0.206				
	GSM850		0.659	10	-0.0115	-0.08	-0.205	153.83	0.68	0.00	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				
	5GHz WLAN Ant. 1+2		1.160	10	0.008	0.065	-0.206	34.41	1.19	0.04	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				

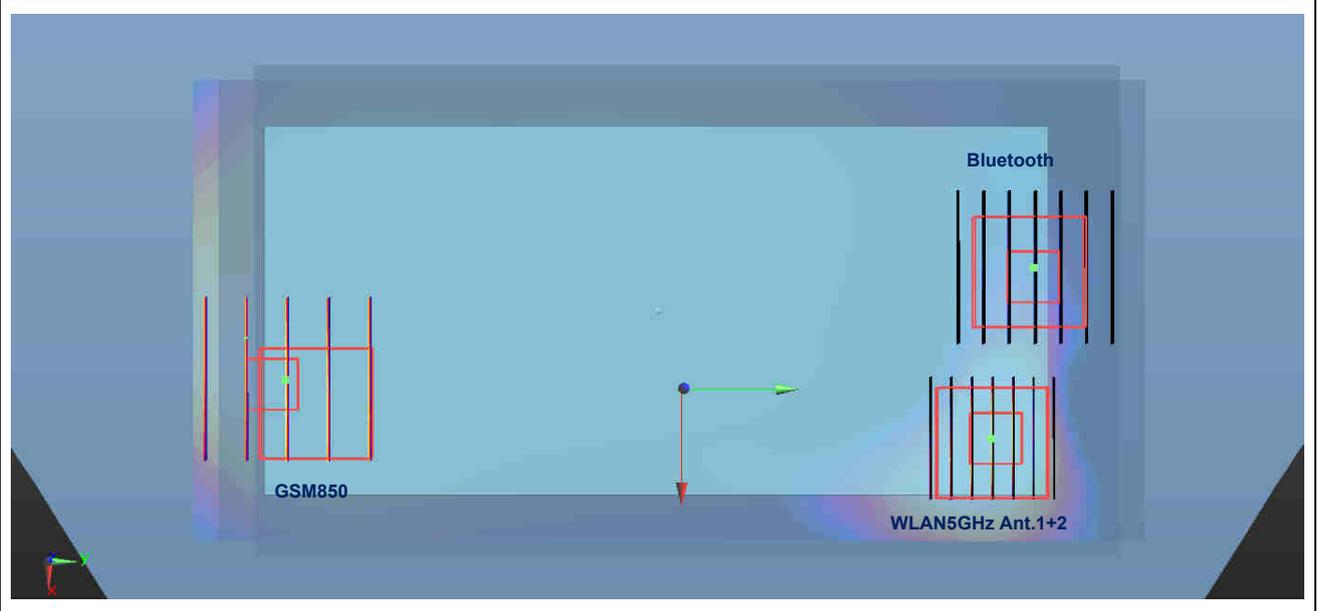


Case #2	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed 1g SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #2	GSM1900	Back	0.449	10	8.74E-11	-0.0698	-0.205	135.04	1.61	0.02	Not required
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206				
	GSM1900		0.449	10	8.74E-11	-0.0698	-0.205	145.24	0.47	0.00	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206	34.41	1.19	0.04	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				

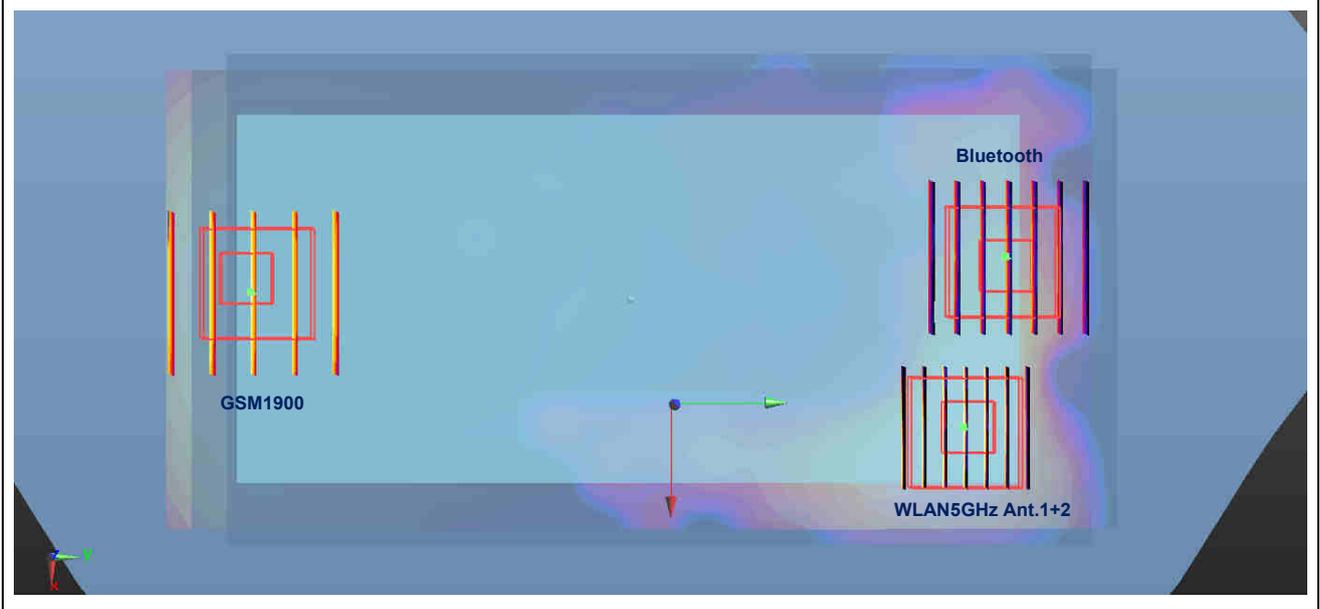


Case #3	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed 1g SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #3	WCDMA Band IV	Back	0.550	10	-0.023	-0.0765	-0.205	144.86	1.71	0.02	Not required
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206				
	WCDMA Band IV		0.550	10	-0.023	-0.0765	-0.205	149.72	0.58	0.00	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206	34.41	1.19	0.04	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				

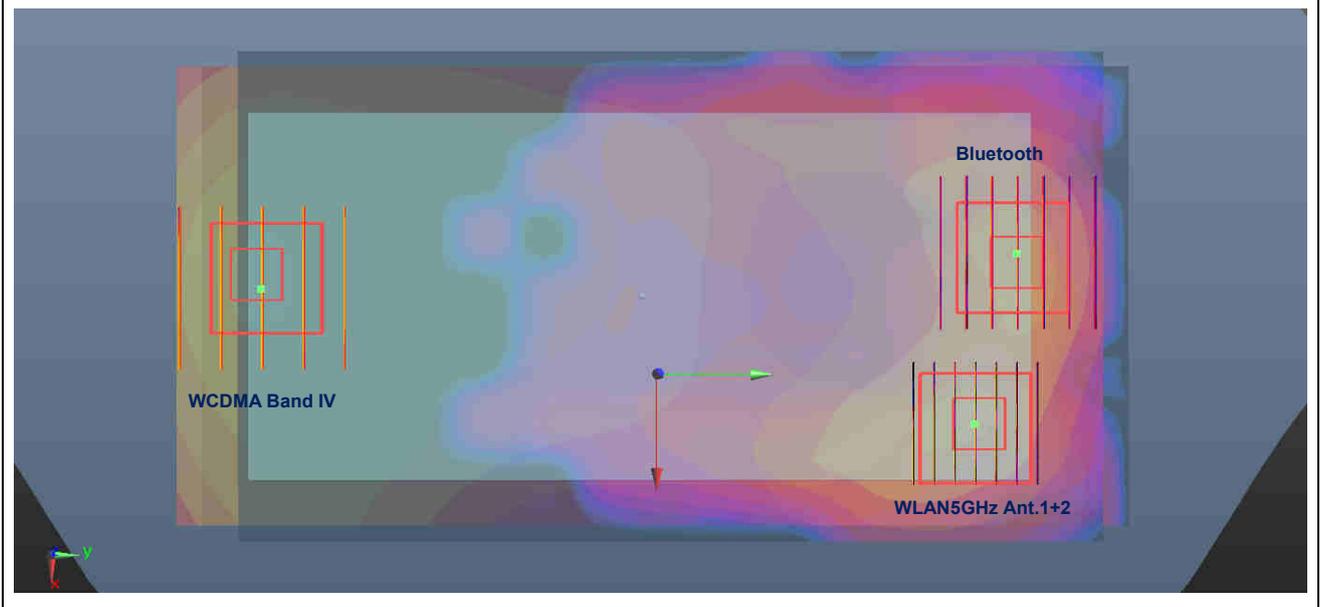


Case #4	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed 1g SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	CDMA2000 BC0	Back	0.433	10	-0.005	-0.0735	-0.205	139.11	1.59	0.01	Not required
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206				
	CDMA2000 BC0		0.433	10	-0.005	-0.0735	-0.205	148.11	0.46	0.00	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206	34.41	1.19	0.04	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				

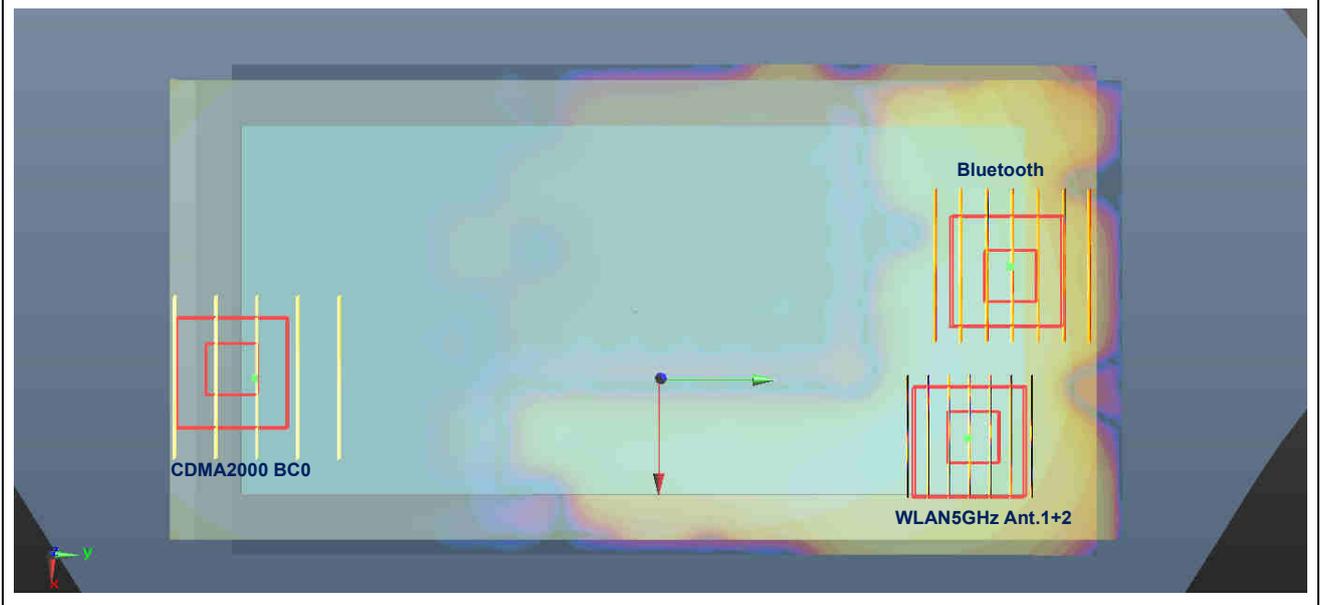


Case #5	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed 1g SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #5	LTE Band 4	Back	0.474	10	8.74E-11	-0.0698	-0.205	135.04	1.62	0.02	Not required
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206				
	LTE Band 4		0.474	10	8.74E-11	-0.0698	-0.205	145.24	0.49	0.00	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206	34.41	1.19	0.04	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				

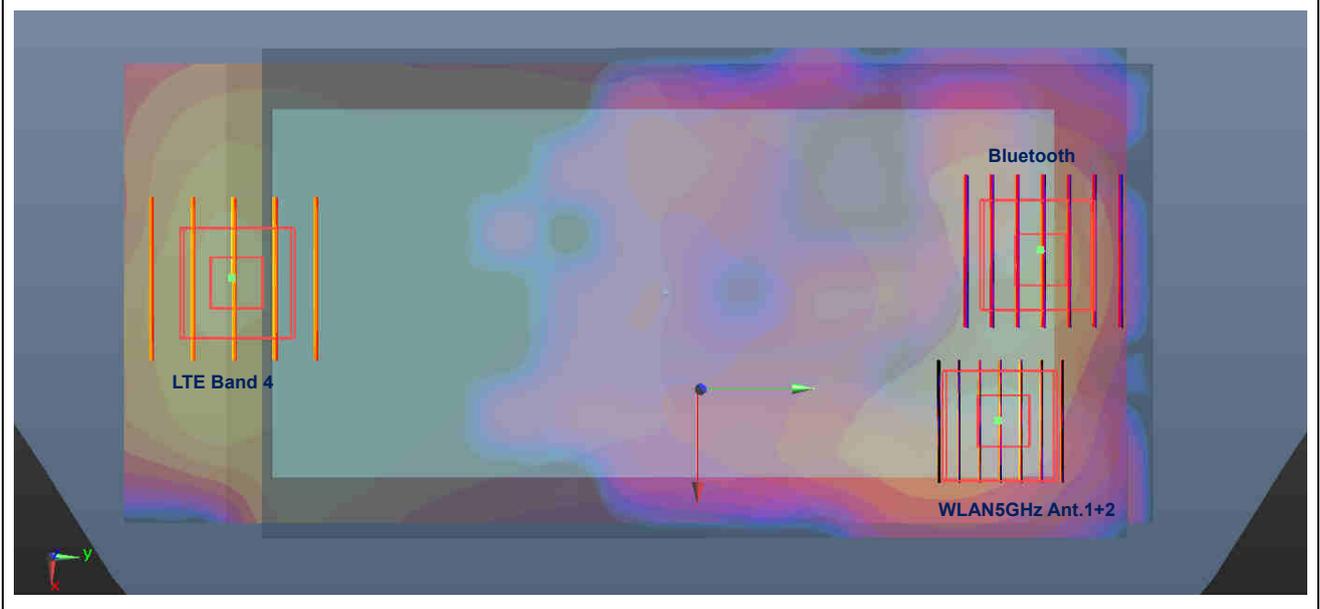


Case #6	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed 1g SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #6	LTE Band 25	Back	0.474	10	-0.0215	-0.0825	-0.205	150.42	1.63	0.01	Not required
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206				
	LTE Band 25		0.474	10	-0.0215	-0.0825	-0.205	155.75	0.50	0.00	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				
	5GHz WLAN Ant. 1+2		1.160	10	0.008	0.065	-0.206				
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				

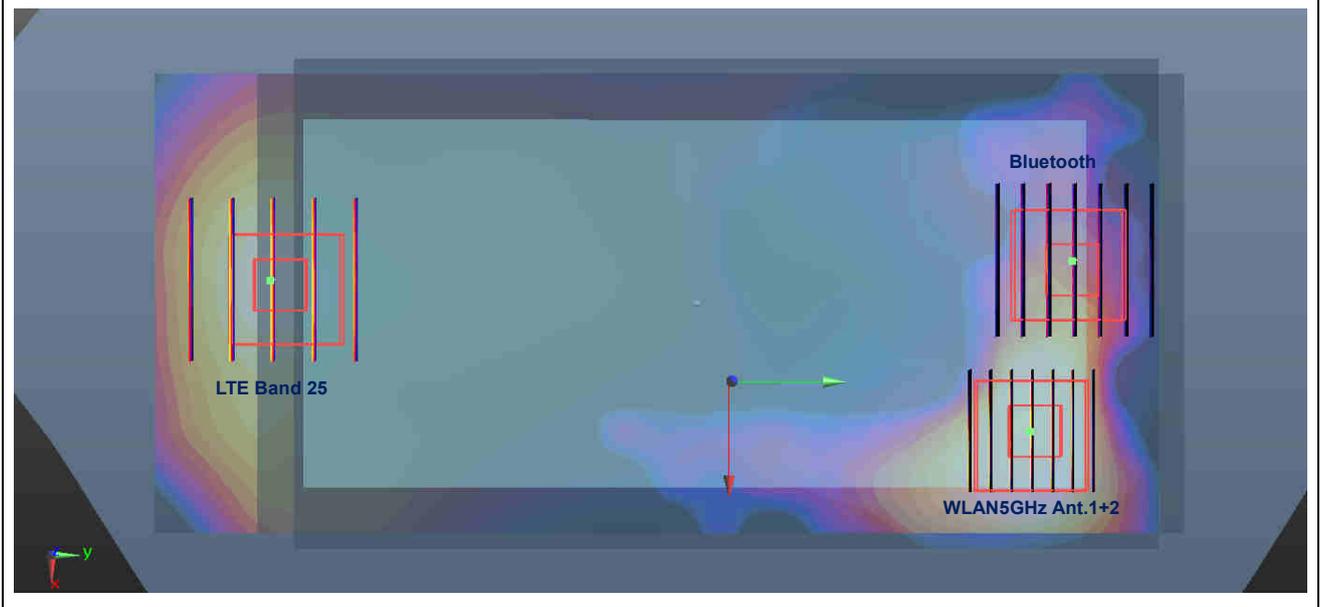


Case #7	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed 1g SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #7	LTE Band 30	Back	0.725	10	-0.0074	-0.066	-0.205	131.91	1.89	0.02	Not required
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206				
	LTE Band 30		0.725	10	-0.0074	-0.066	-0.205	140.36	0.75	0.00	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206	34.41	1.19	0.04	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				

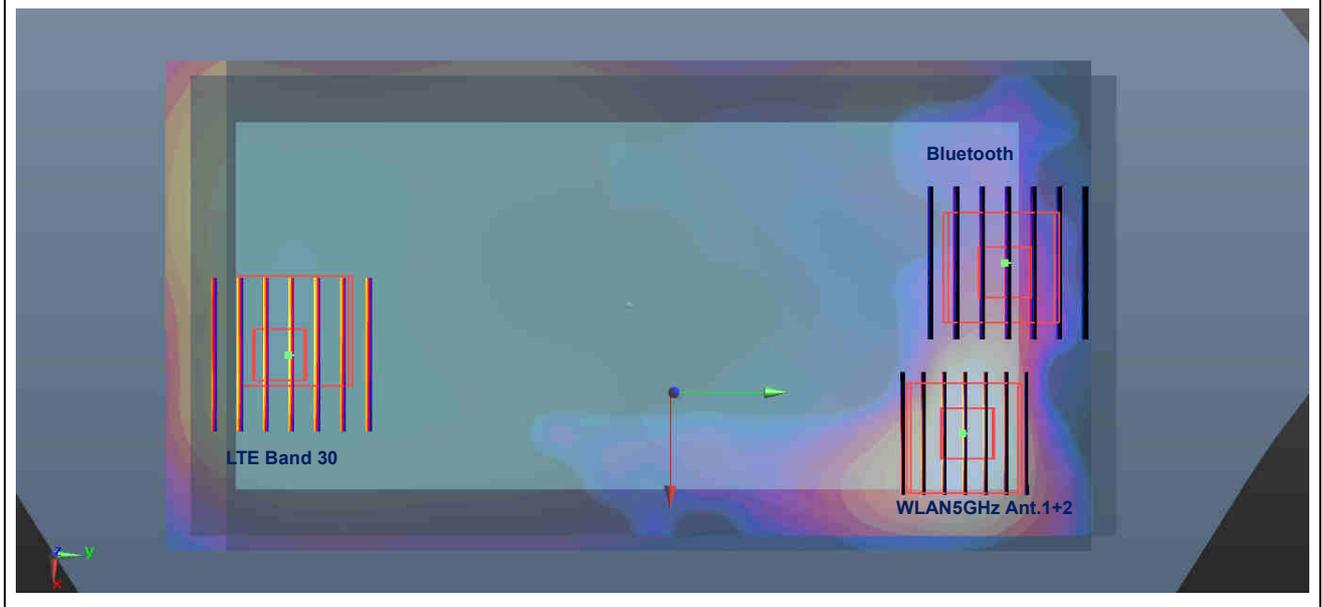


Case #8	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed 1g SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #8	LTE Band 7	Back	0.478	10	-0.0012	-0.0648	-0.205	130.13	1.64	0.02	Not required
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206				
	LTE Band 7		0.478	10	-0.0012	-0.0648	-0.205	140.11	0.50	0.00	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206	34.41	1.19	0.04	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				

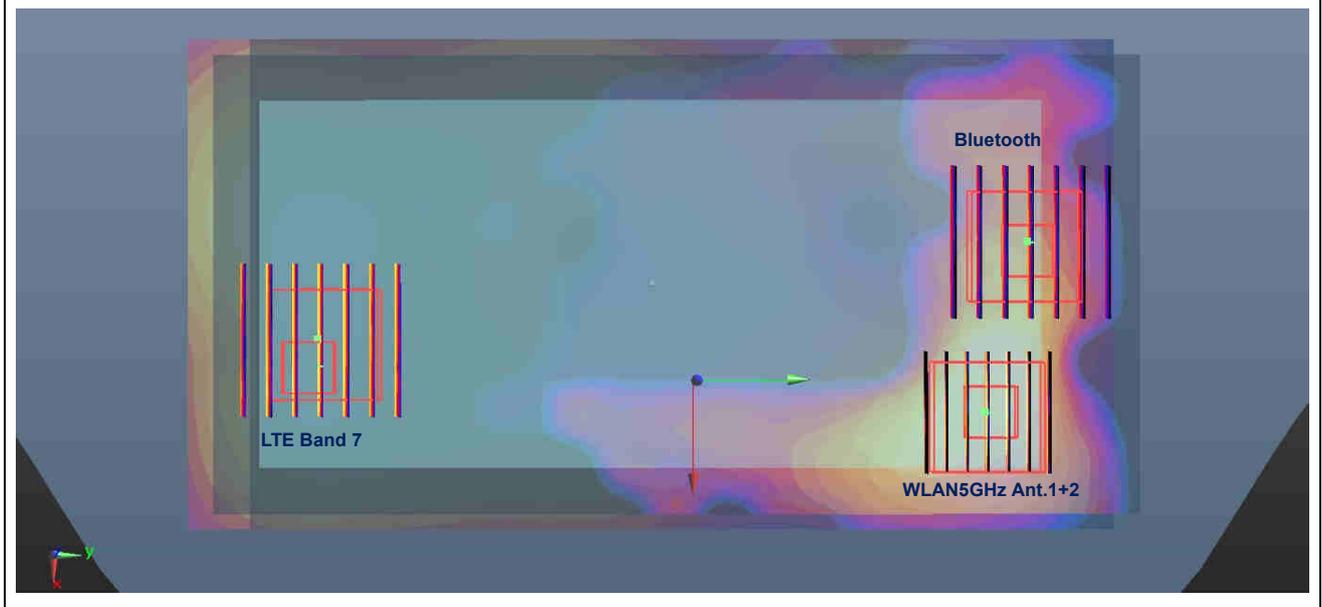

Case #9	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed 1g SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #9	LTE Band 41	Back	0.574	10	8.74E-11	-0.0698	-0.205	135.04	1.73	0.02	Not required
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206				
	LTE Band 41		0.574	10	8.74E-11	-0.0698	-0.205	145.24	0.60	0.00	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206	34.41	1.19	0.04	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				

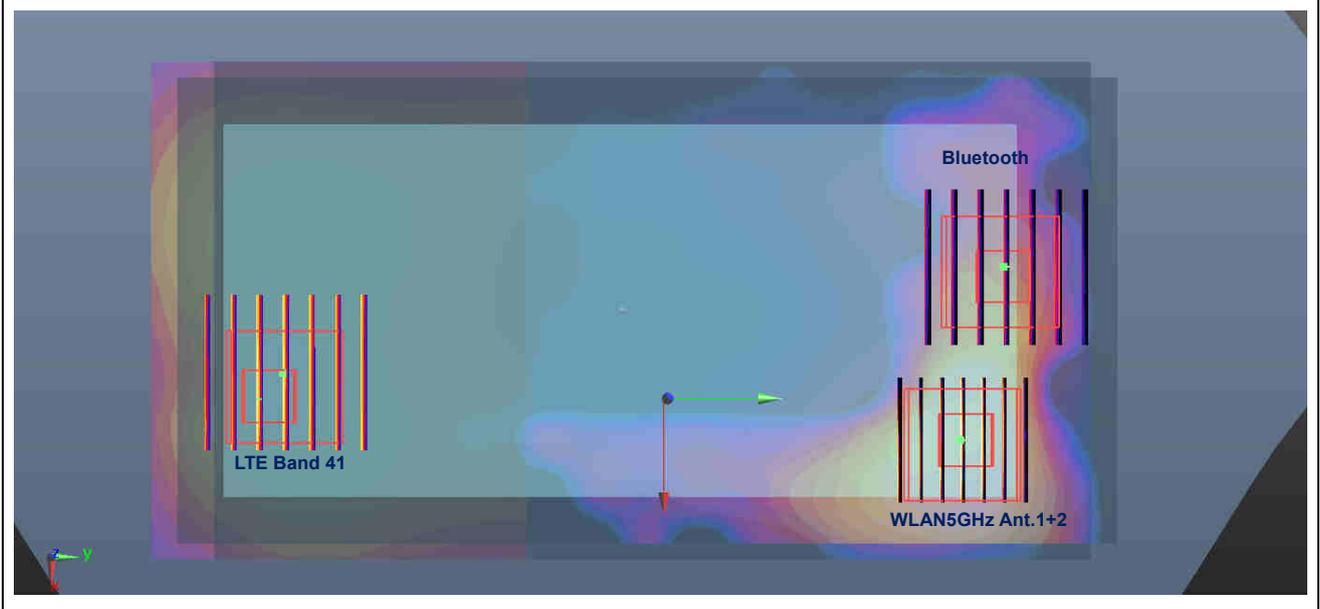

Case #10	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed 1g SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #10	CDMA2000 BC0	Back	0.422	10	-0.0035	-0.0735	-0.205	139.07	1.58	0.01	Not required
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206				
	CDMA2000 BC0		0.422	10	-0.0035	-0.0735	-0.205	148.33	0.45	0.00	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				
	5GHz WLAN Ant.1+2		1.160	10	0.008	0.065	-0.206	34.41	1.19	0.04	Not required
	Bluetooth Ant. 1		0.025	10	-0.0254	0.0732	-0.205				

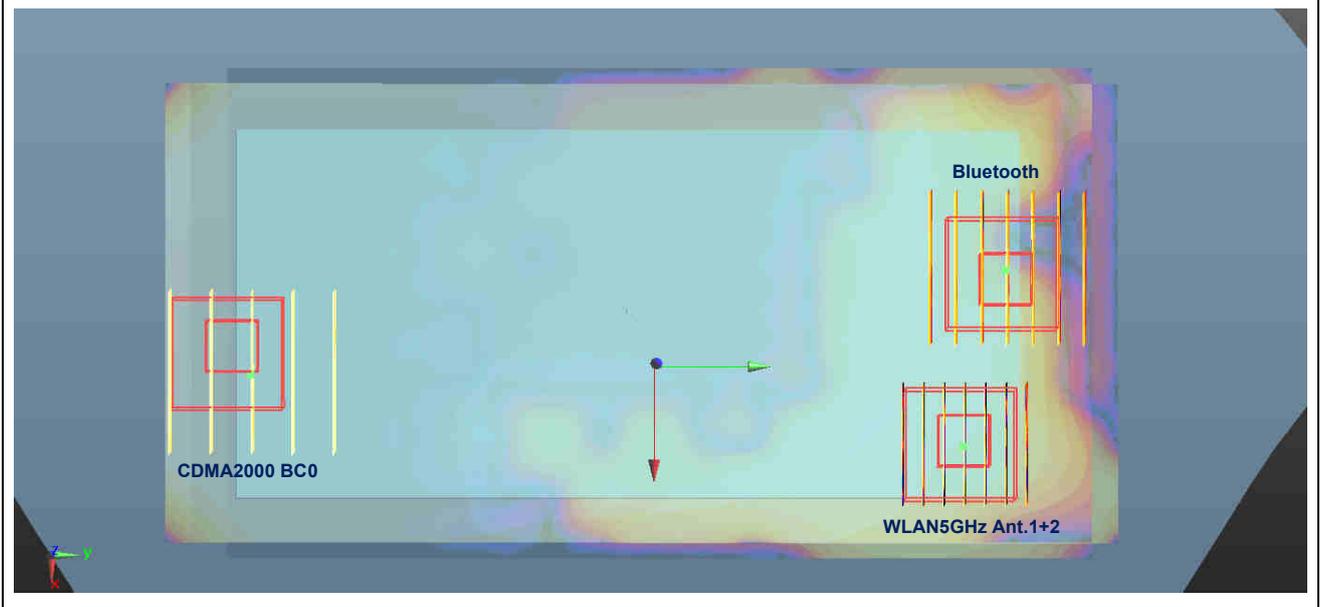

Test Engineer : Nick Hu



17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.



18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [13] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [14] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_750MHz

DUT: D750V3 - SN:1065

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 42.431$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.42, 9.42, 9.42); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.04 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 48.34 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.80 W/kg

SAR(1 g) = 2.20 kg; SAR(10 g) = 1.49 kg

Maximum value of SAR (measured) = 4.04 W/kg

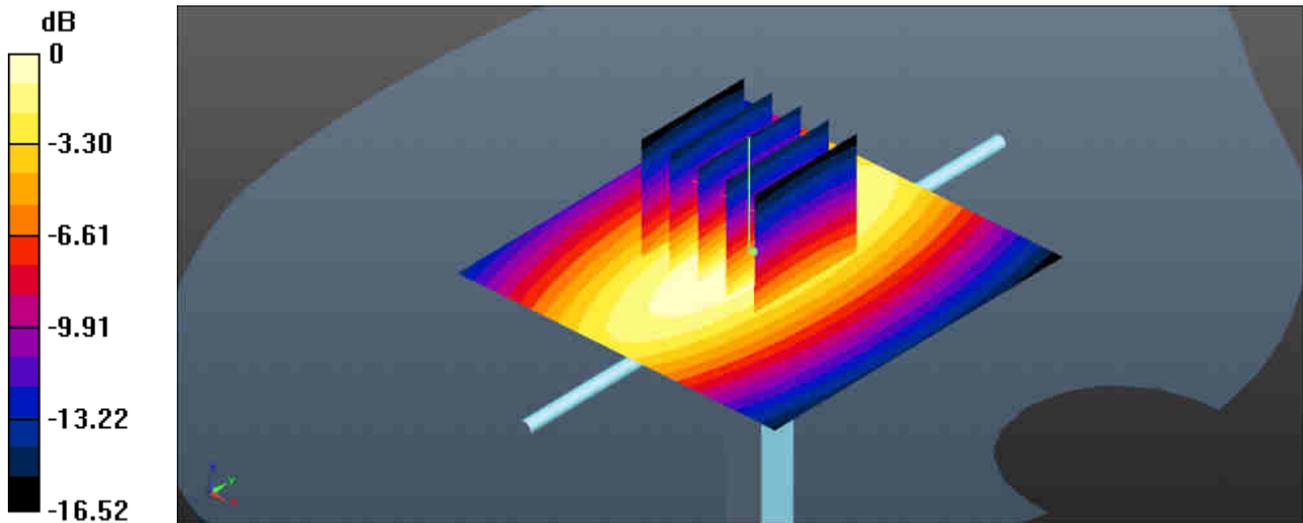

0 dB = $4.04 \text{ W/kg} = 6.06 \text{ dBW/kg}$

System Check_Head_835MHz

DUT: D835V2 - SN:4d091

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 41.63$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.13, 9.13, 9.13); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 3.04 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.41 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 2.4 W/kg ; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 3.02 W/kg

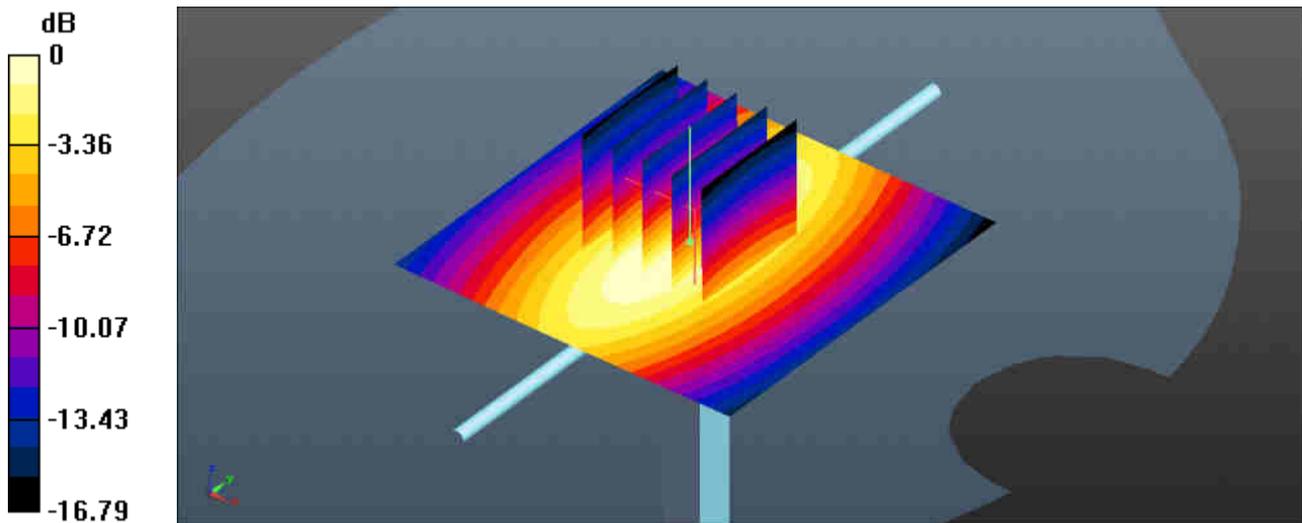

0 dB = 3.02 W/kg = 4.8 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2 - SN:1069

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.932$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(8.16, 8.16, 8.16); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 17.7 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 97.67 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 19.8 W/kg
SAR(1 g) = 9.43 W/kg; SAR(10 g) = 5.03 W/kg
 Maximum value of SAR (measured) = 16.3 W/kg

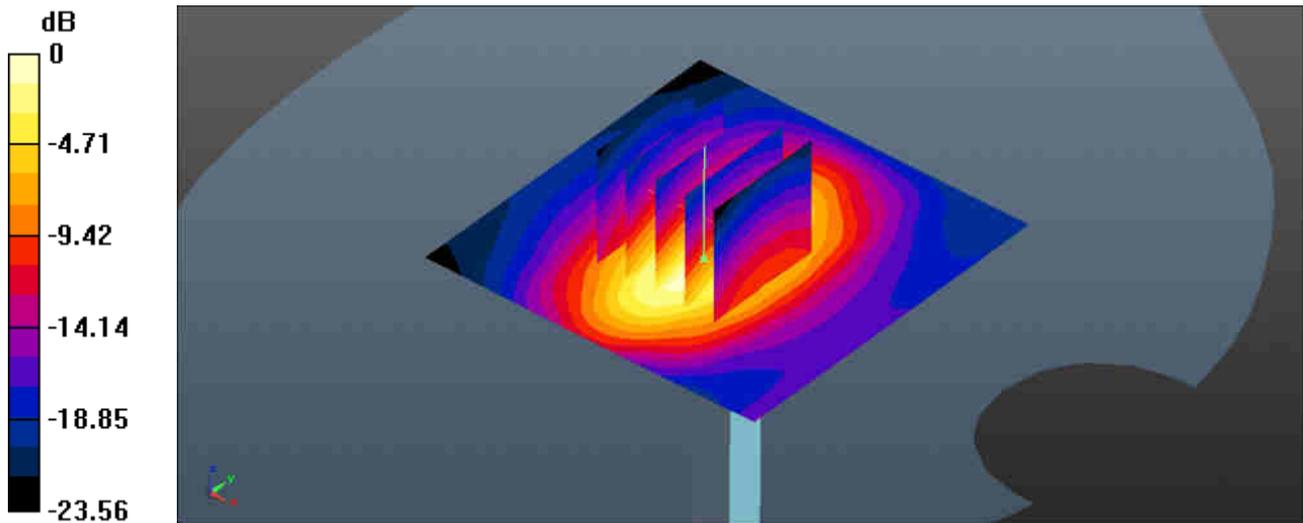

0 dB = 17.7 W/kg = 12.48 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2 - SN:5d118

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 38.719$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.79, 7.79, 7.79); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 16.7 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 96.87 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 20.9 W/kg

SAR(1 g) = 9.95 W/kg; SAR(10 g) = 5.15 W/kg

Maximum value of SAR (measured) = 16.8 W/kg

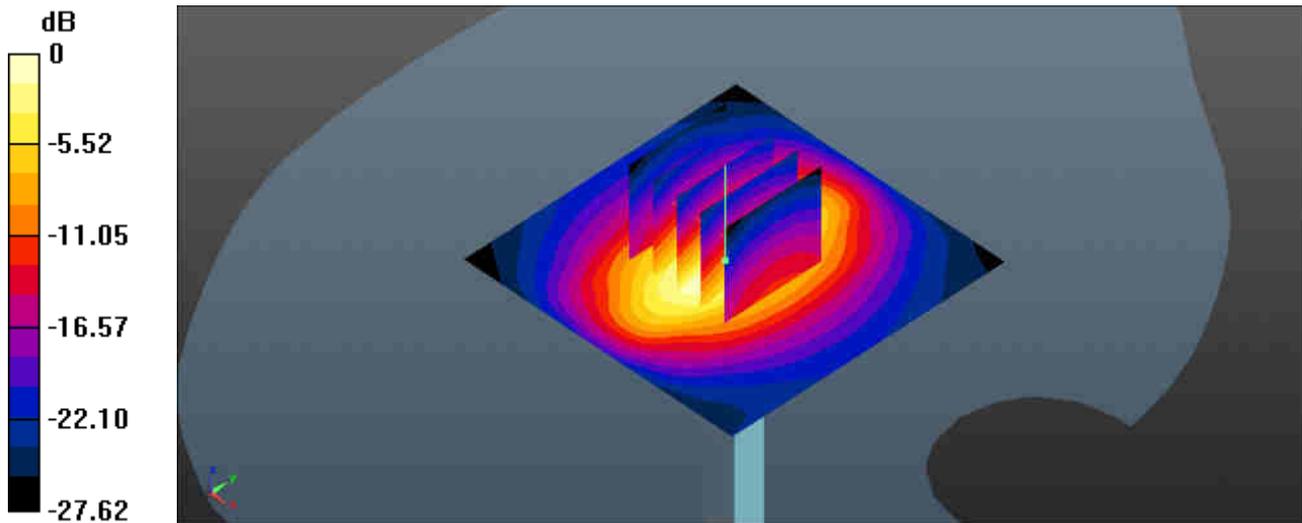

0 dB = 16.7 W/kg = 12.23 dBW/kg

System Check_Head_2300MHz

DUT: D2300V2 - SN:1055

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: HSL_2300 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.685$ S/m; $\epsilon_r = 39.244$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.35, 7.35, 7.35); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 15.3 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 68.16 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 9.02 W/kg
SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.98 W/kg
Maximum value of SAR (measured) = 7.29 W/kg

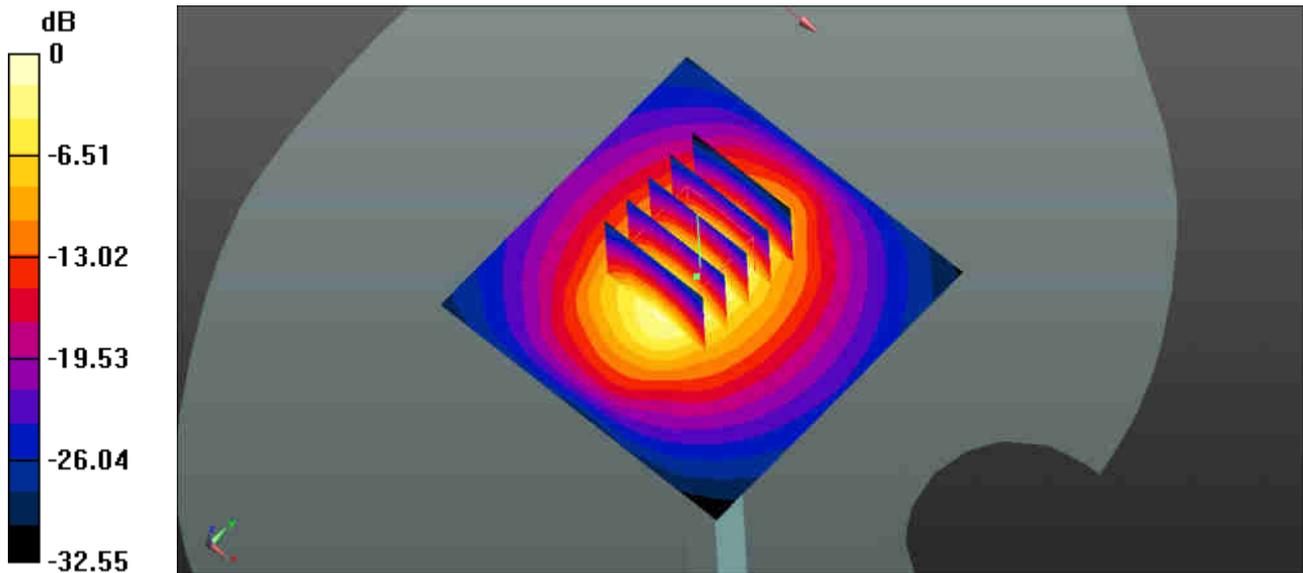

System Check_Head_2450MHz

DUT: D2450V2 - SN:840

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.851$ S/m; $\epsilon_r = 38.977$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.28, 7.28, 7.28); Calibrated: 2017.5.5;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 22.7 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 86.13 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 26.2 W/kg
SAR(1 g) = 12.4 W/kg; SAR(10 g) = 6.07 W/kg
Maximum value of SAR (measured) = 20.8 W/kg

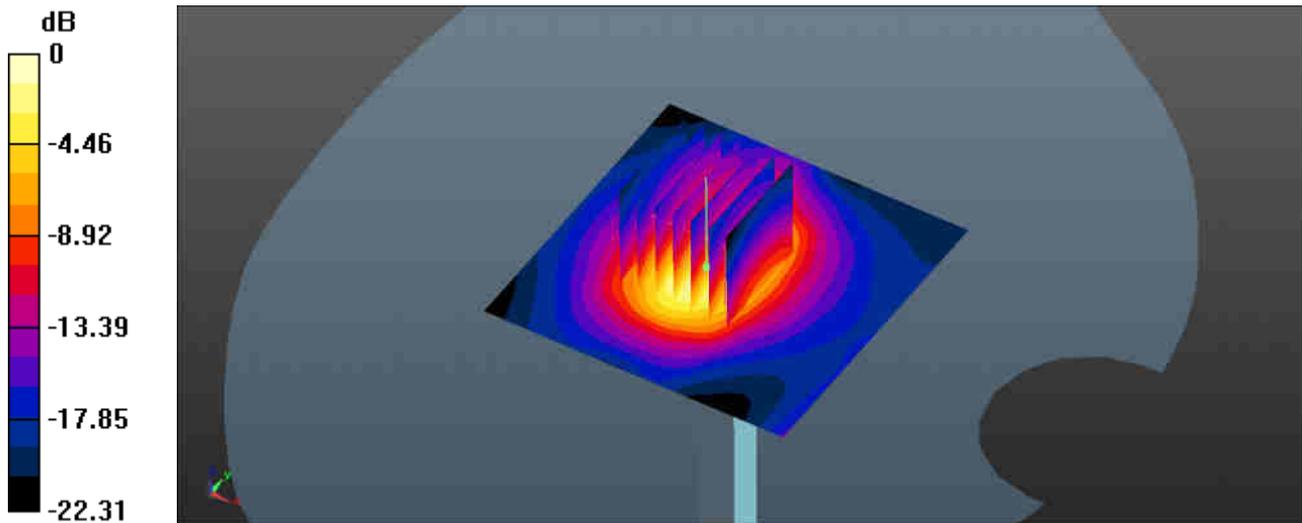

0 dB = 22.7 W/kg = 13.56 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2 - SN:1061

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.051$ S/m; $\epsilon_r = 38.046$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(6.9, 6.9, 6.9); Calibrated: 2017.9.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.1.3
- Phantom: SAM1; Type: SAM; Serial: TP-1842
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 19.6 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 80.33 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 26.6 W/kg
SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.32 W/kg
Maximum value of SAR (measured) = 19.1 W/kg

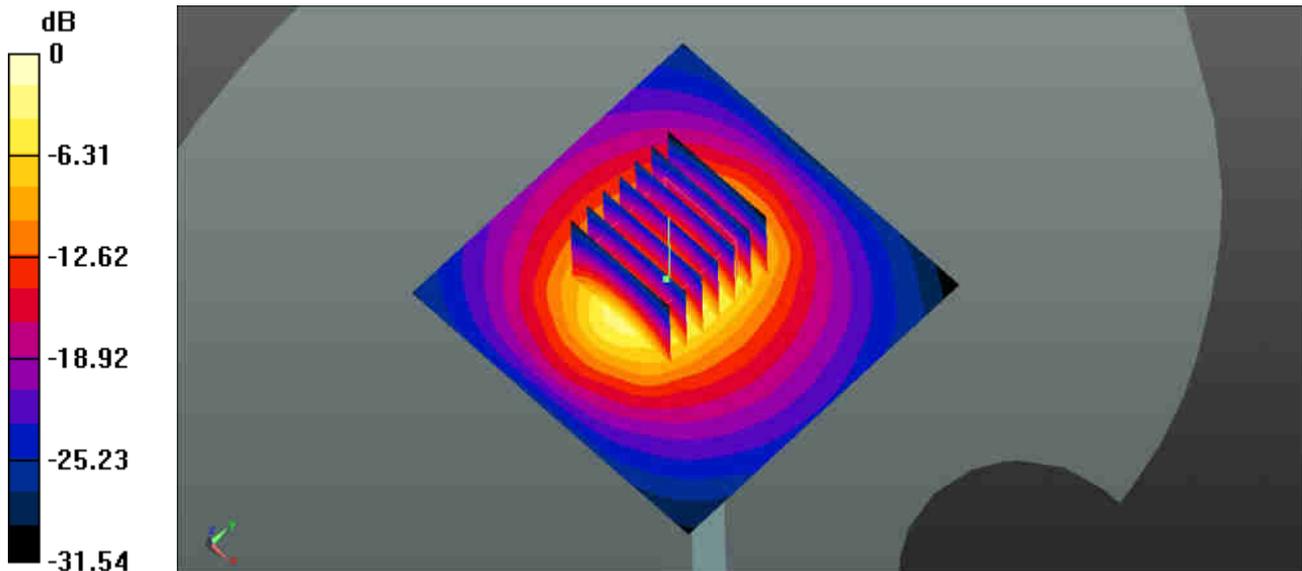

0 dB = 19.6 W/kg = 12.92 dBW/kg

System Check_Head_5250MHz

DUT: D5GHzV2-SN:1006


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.865$ S/m; $\epsilon_r = 37.109$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.39, 5.39, 5.39); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 18.6 W/kg

CW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 42.91 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 32.7 W/kg
SAR(1 g) = 7.7 W/kg; SAR(10 g) = 2.18 W/kg
Maximum value of SAR (measured) = 18.7 W/kg

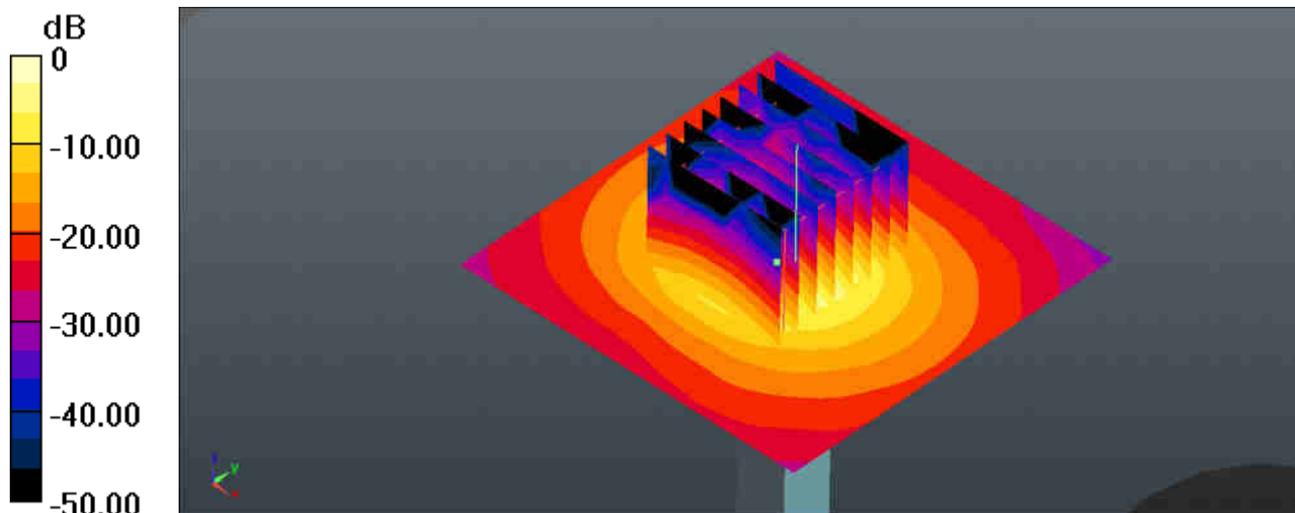

0 dB = 18.7 W/kg = 12.72 dBW/kg

System Check_Head_5600MHz

DUT: D5GHzV2-SN:1006


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.207$ S/m; $\epsilon_r = 36.587$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.04, 5.04, 5.04); Calibrated: 2017.5.26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2017.5.25
- Phantom: SAM3; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 18.6 W/kg

CW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 39.44 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 29.6 W/kg
SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.51 W/kg
Maximum value of SAR (measured) = 18.3 W/kg

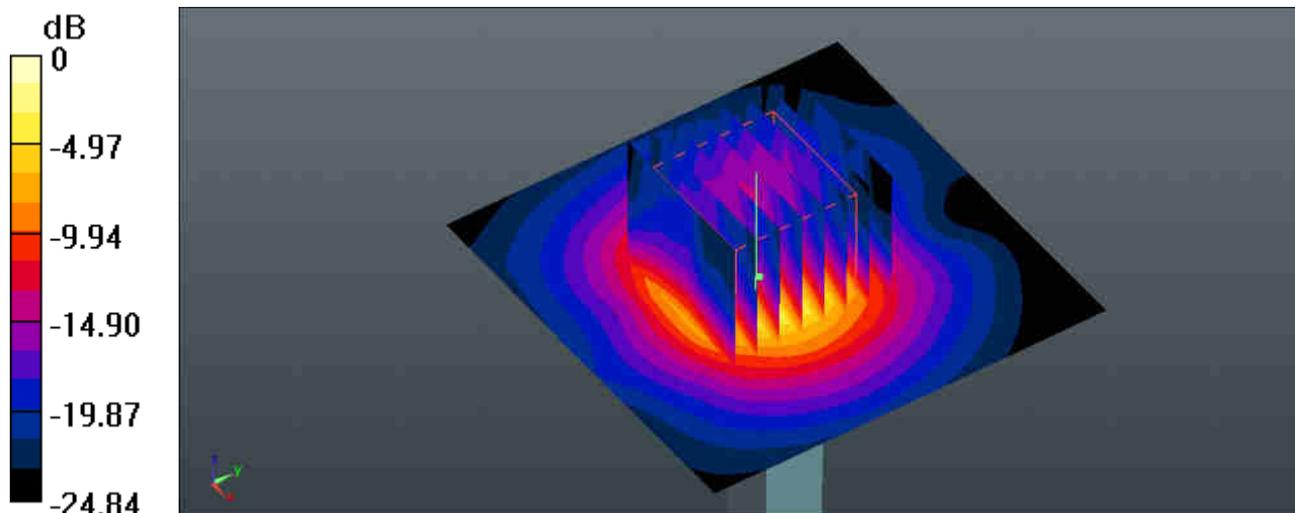

0 dB = 18.3 W/kg = 12.62 dBW/kg