

FCC SAR Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : MI
MODEL NAME : M1903F10G
FCC ID : 2AFZZ-XMSF10G
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Mar. 12, 2019 and testing was started from Apr. 01, 2019 and completed on Apr. 11, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager



Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information..... 6
4.1 General Information 6
4.2 General LTE SAR Test and Reporting Considerations 8
5. Proximity Sensor Triggering Test.....10
5.1 Proximity sensor triggering distances(Per KDB616217§6.2)10
5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4).....14
6. RF Exposure Limits.....15
6.1 Uncontrolled Environment.....15
6.2 Controlled Environment.....15
7. Specific Absorption Rate (SAR).....16
7.1 Introduction16
7.2 SAR Definition.....16
8. System Description and Setup17
8.1 E-Field Probe18
8.2 Data Acquisition Electronics (DAE)18
8.3 Phantom.....19
8.4 Device Holder.....20
9. Measurement Procedures21
9.1 Spatial Peak SAR Evaluation21
9.2 Power Reference Measurement.....22
9.3 Area Scan22
9.4 Zoom Scan.....23
9.5 Volume Scan Procedures.....23
9.6 Power Drift Monitoring.....23
10. Test Equipment List.....24
11. System Verification25
11.1 Tissue Simulating Liquids25
11.2 Tissue Verification26
11.3 System Performance Check Results27
12. RF Exposure Positions28
12.1 Ear and handset reference point28
12.2 Definition of the cheek position29
12.3 Definition of the tilt position30
12.4 Body Worn Accessory31
12.5 Product Specific 10g SAR Exposure32
12.6 Wireless Router.....32
13. Conducted RF Output Power (Unit: dBm).....33
14. Antenna Location108
15. SAR Test Results110
15.1 Head SAR113
15.2 Hotspot SAR119
15.3 Body Worn Accessory SAR.....125
15.4 Product specific 10g SAR129
15.5 Repeated SAR Measurement130
16. Simultaneous Transmission Analysis.....131
16.1 Head Exposure Conditions132
16.2 Hotspot Exposure Conditions.....136
16.3 Body-Worn Accessory Exposure Conditions140
16.4 Product specific 10g SAR Exposure Conditions.....142
16.5 SPLSR Evaluation and Analysis.....143
17. Uncertainty Assessment148
18. References149
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, M1903F10G**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	1.03	0.32	0.21	1.58
		GSM1900	1.19	1.18	0.33	
	WCDMA	Band V	1.09	0.46	0.31	
		Band IV	1.15	1.01	0.98	
		Band II	1.10	0.84	0.94	
	LTE	Band 5	0.99	0.38	0.25	
		Band 4	1.13	1.04	0.80	
		Band 2	0.98	1.03	0.71	
		Band 7	1.06	0.90	0.46	
		Band 38	0.76	1.08	0.29	
DTS	WLAN	2.4GHz WLAN	0.56	0.24	0.17	1.53
NII		5GHz WLAN	1.08	0.65	0.96	1.58
DSS	Bluetooth	2.4GHz Bluetooth	0.16	<0.10	<0.10	1.58
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)		Highest Simultaneous Transmission 10g SAR	
Licensed	GSM	GSM1900	1.64		3.48	
	WCDMA	Band IV	2.66			
		Band II	2.82			
	LTE	Band 4	3.48			
		Band 2	2.74			
NII	WLAN	5GHz WLAN	2.22			
Date of Testing:			2019/4/1 ~ 2019/4/11			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Testing Laboratory	
Test Site	Sporton International (Kunshan) Inc.
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

Manufacturer	
Company Name	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	MI
Model Name	M1903F10G
FCC ID	2AFZZ-XMSF10G
IMEI Code	SIM1: 866962040000774 SIM2: 866962040000782
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5805 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+: 16QAM (uplink is not supported) LTE: QPSK, 16QAM, 64QAM, 256QAM (Downlink Only) WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC
HW Version	P1
SW Version	MIUI 10
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype



Remark:

1. This device supports VoIP in GPRS, EGPRS, CDMA, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and supports GRPS/EGPRS mode up to multi-slot class 33.
5. This device has two WWAN transmit antennas. WWAN bottom antenna is located at the bottom edge of the device, and WWAN top antenna is located at the top edge of the device which can refer to antenna location chapter. Top and Bottom antenna support the same WWAN frequency bands, and they can't transmit simultaneously.
6. For top WWAN antenna and WLAN antenna:
 - a. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in GSM850, WCDMA band 2/4/5, LTE B2/4/5/7/38 and WLAN 2.4GHz/5.2/5.3/5.8GHz.
 - b. When hotspot mode is enabled, power reduction will be activated to GSM850, WCDMA band 2/4/5, LTE B2/4/5/7/38 and WLAN 2.4GHz/5.2/5.8GHz.
7. For bottom WWAN antenna:
 - a. P-sensor can detect handheld state, WCDMA band II/IV and LTE band 2/4/7 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active
 - b. When hotspot mode is enabled, power reduction will be activated to GSM1900, WCDMA band II/IV, LTE band 2/4/7.
8. There are two types of EUT sample 1 and sample 2, the differences between two samples is for memory, sample 1 6+64GB capacity and sample 2 is 6+128GB capacity. According to the difference, memory capacity has no effect on SAR distribution, so sample 1 is chose to perform full SAR testing.
9. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
10. The device distinguishes different countries by MCC information. If we are close to a country border and the phone switches to a neighboring network the power reduction will follow the newest registered MCC information. The default status when the device doesn't know the MCC information will be set to the Lower Power Level between A and B, the detail information can refer to operation description. This mechanism limited to WLAN only.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	2AFZZ-XMSF10G																																																														
Equipment Name	Mobile Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R12, Cat13																																																														
CA Support	Yes, Uplink and Downlink																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, the detail please referred to section 15.																																																														
LTE Carrier Aggregation Combinations	Intra-Band and Inter-Band possible combinations and the detail power verification please referred to section 13.																																																														
LTE Carrier Aggregation Additional Information	<p>(1) This device supports LTE Carrier Aggregation (CA) in the uplink for LTE 7C /38C with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance.</p> <p>(2) This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICl, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.</p>																																																														




Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				

5. Proximity Sensor Triggering Test



5.1 Proximity sensor triggering distances(Per KDB616217§6.2)



1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front, back or bottom side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, WCDMA B2 / B4, and LTE B2 / B4 / B7 reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the front, back or bottom side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).


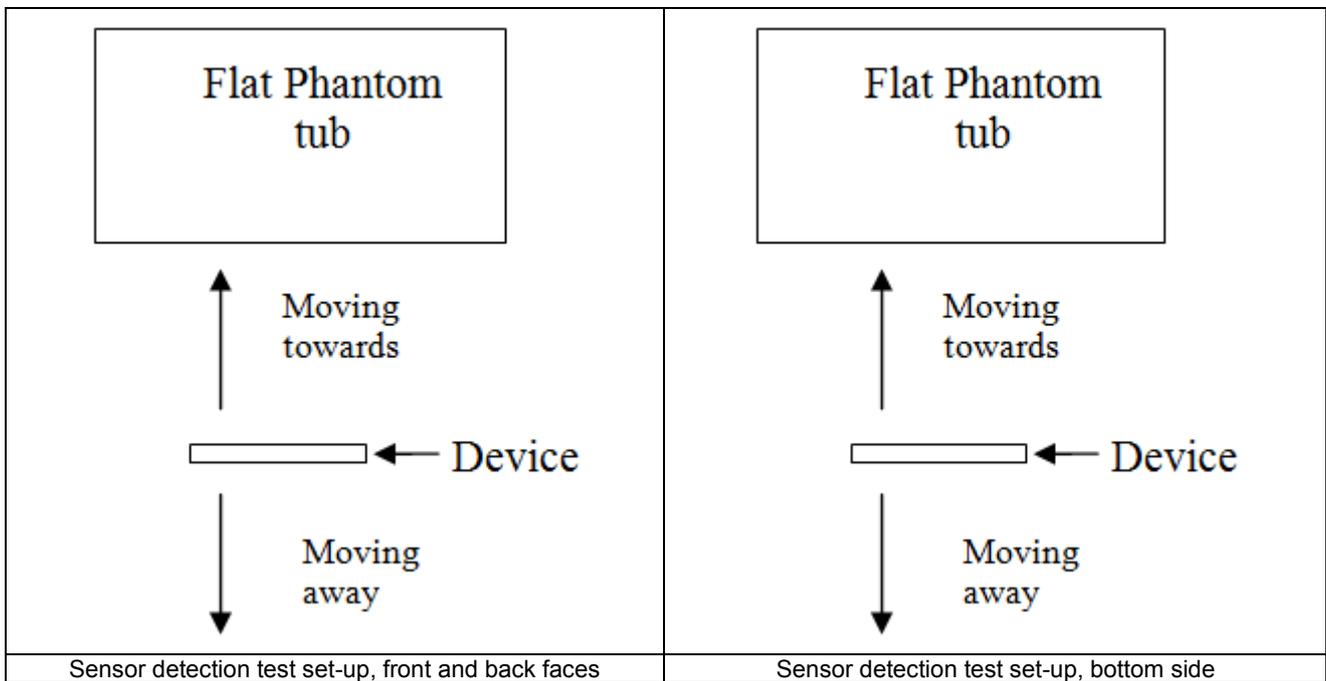


Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	9	11	11	13	12	14

<Sensor Trigger Distance and Measured Power>

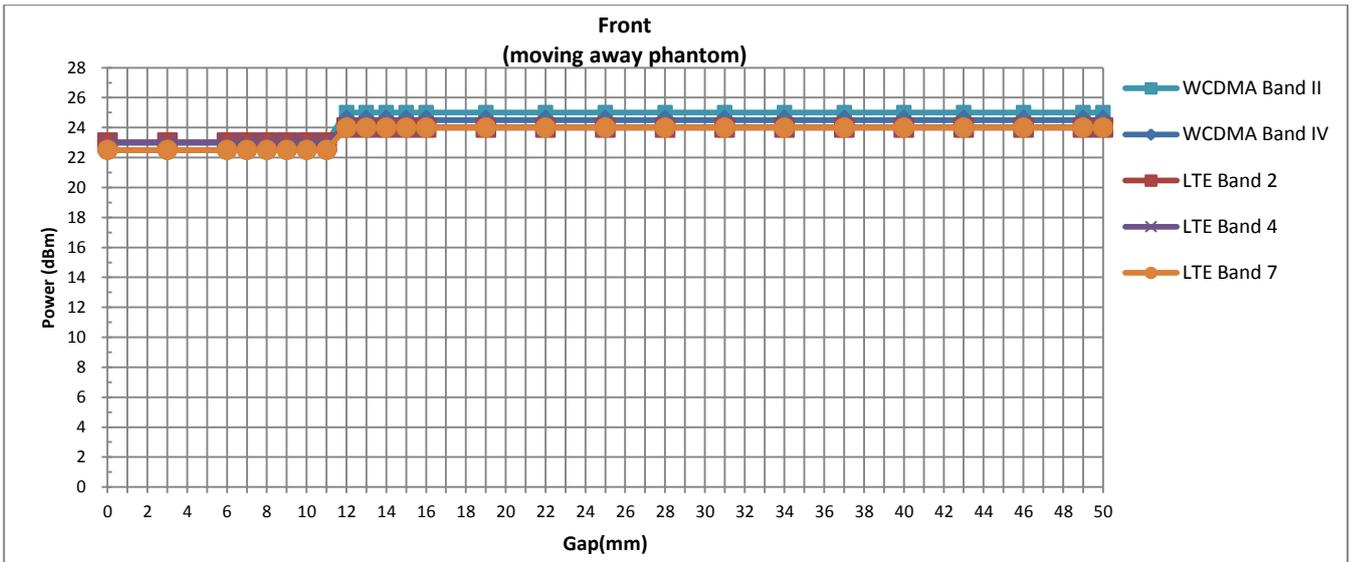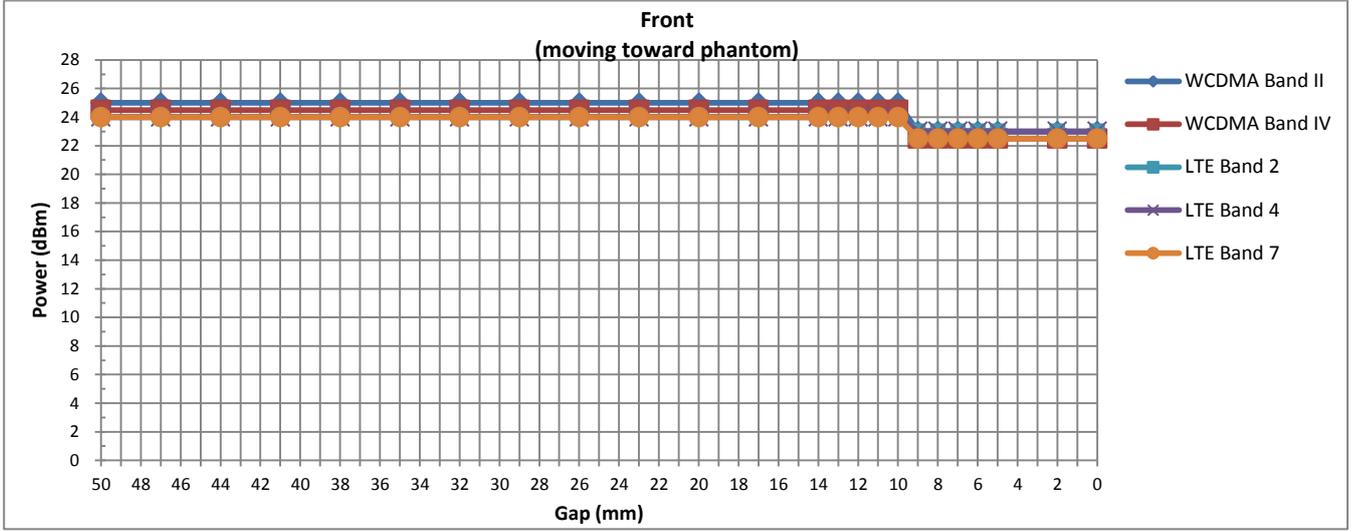

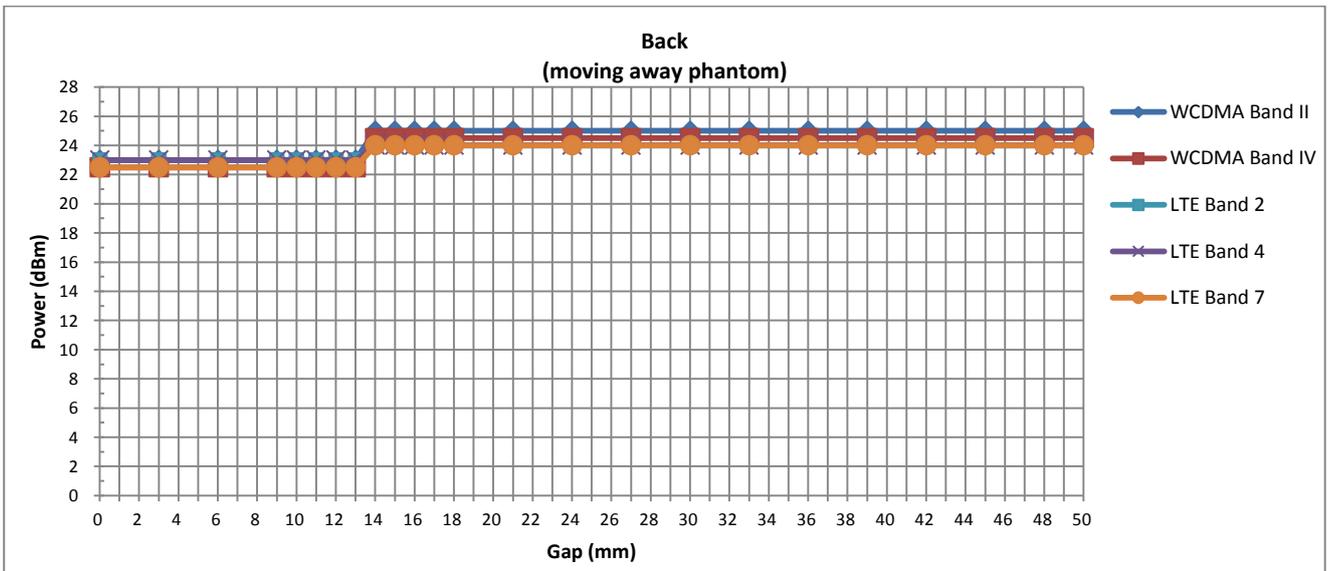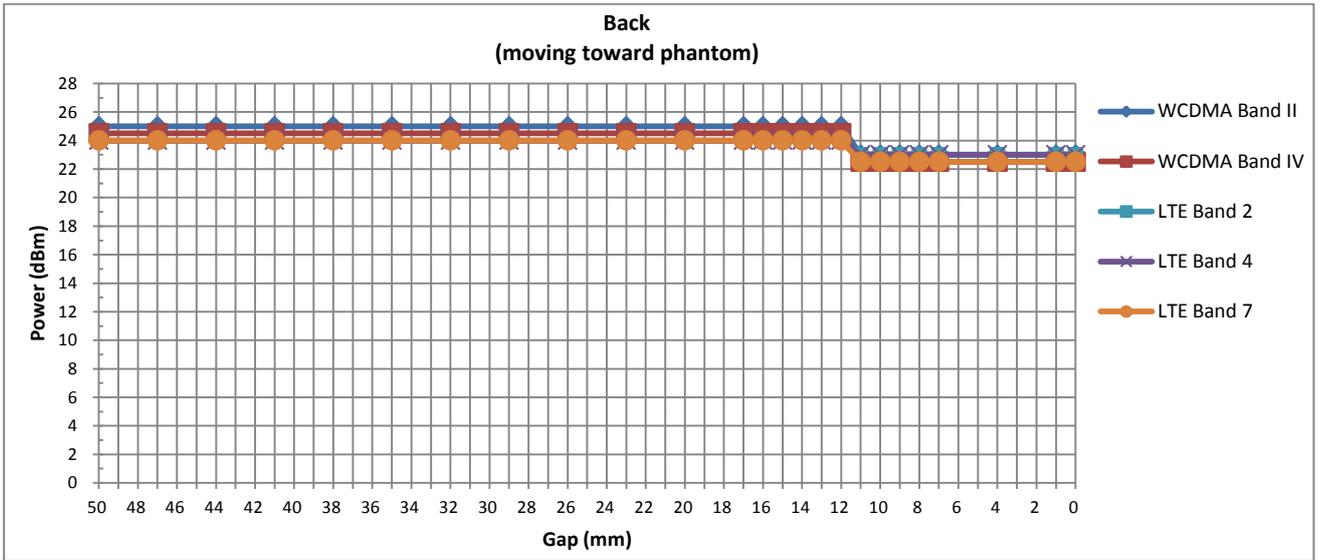


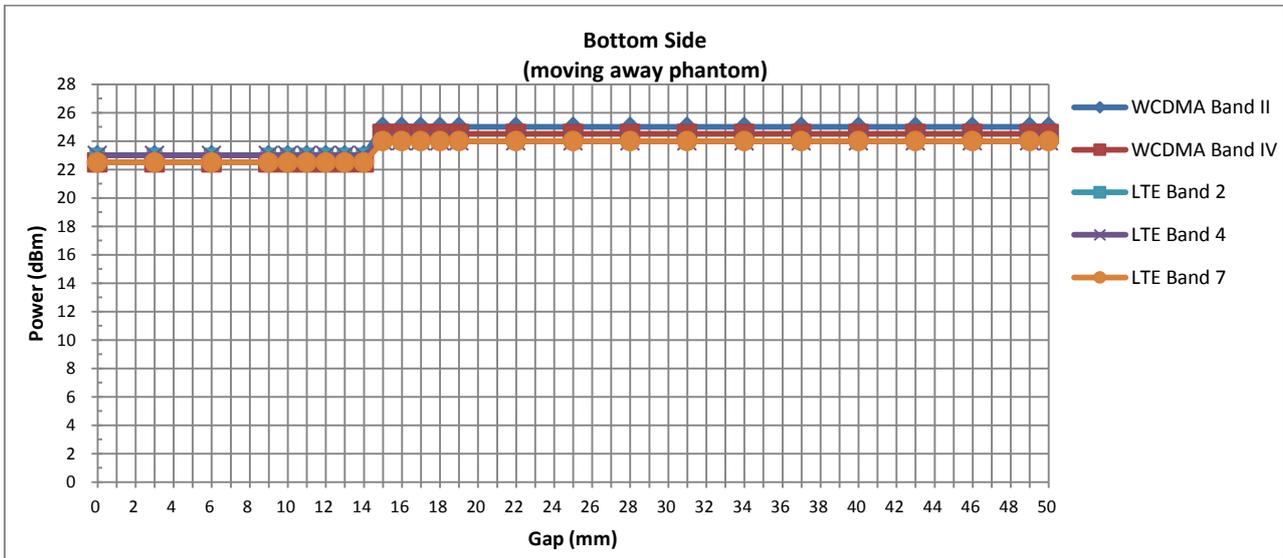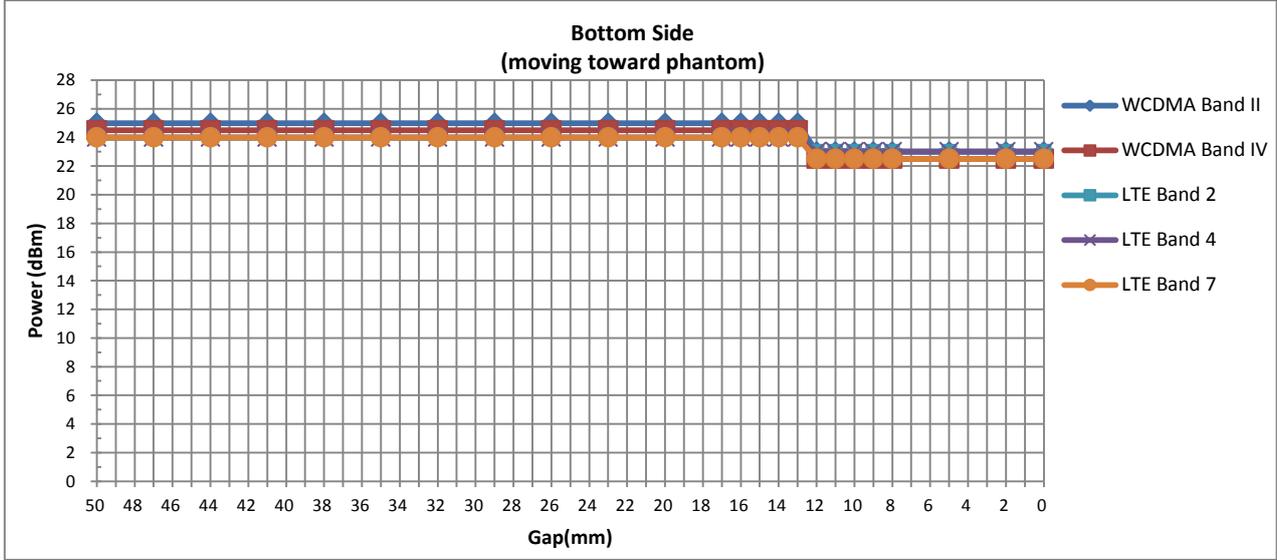

5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with bottom side parallel to the base of the flat phantom for each band.

The EUT was rotated about bottom side for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

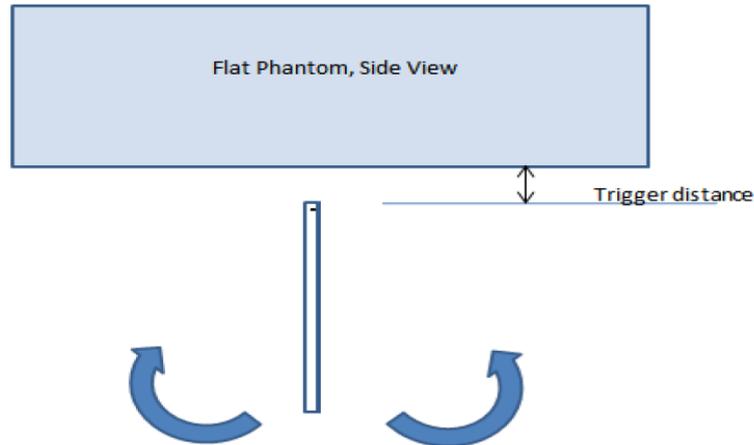

Proximity Sensor Coverage Assesment(Bottom Side)

Table: Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Bottom Side)

Main ant Band(MHz)	Minimum trigger distance at which power reduction was maintained over ±45°	Power Reduction Status											
		-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°	
WCDMA Band II	12mm	on	on	on	on	on	on	on	on	on	on	on	on
WCDMA Band IV	12mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 2	12mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 4	12mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band 7	12mm	on	on	on	on	on	on	on	on	on	on	on	on

Conclusion: As is shown from the validation data, it can be ensured that the proximity sensor can be valid triggered for the DUT tilt coverage exposure condition.

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

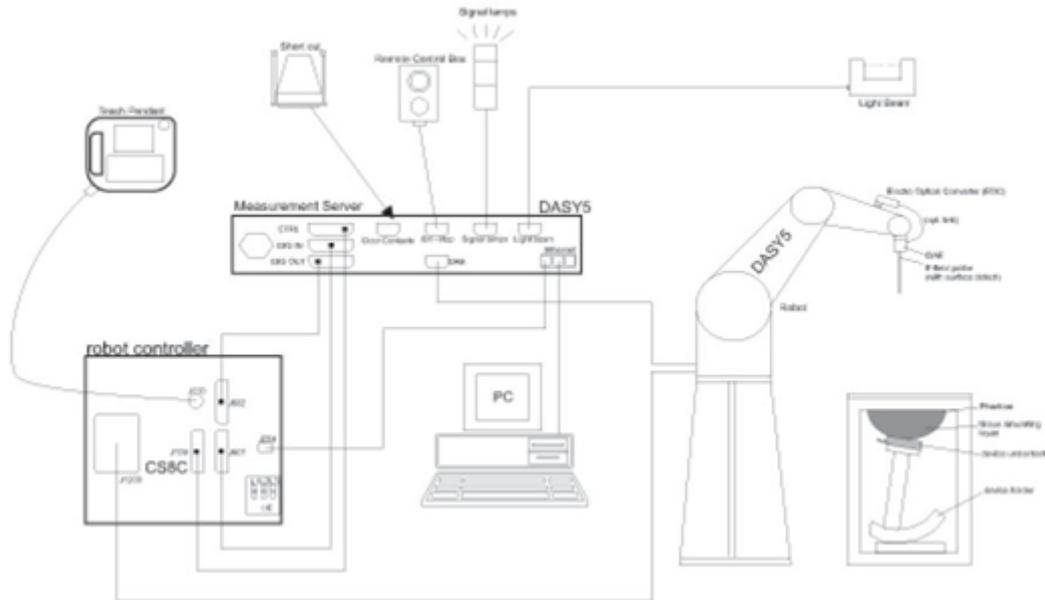

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>


Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm

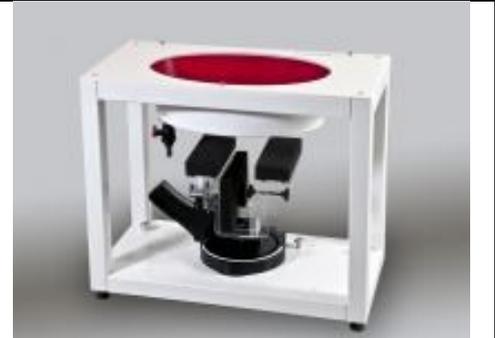

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2020/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2019/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1006	2018/9/27	2019/9/26
SPEAG	Data Acquisition Electronics	DAE4	1338	2018/12/3	2019/12/2
SPEAG	Dosimetric E-Field Probe	EX3DV4	3843	2018/9/27	2019/9/26
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2018/5/31	2019/5/30
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1839	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1503	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201274349	2018/8/16	2019/8/15
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2018/4/17	2019/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2018/4/17	2019/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2018/11/20	2019/11/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2019/1/14	2020/1/13
Rohde & Schwarz	Power Meter	NRVD	102081	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2018/8/20	2019/8/19
R&S	CBT BLUETOOTH TESTER	CBT	101641	2019/1/14	2020/1/13
EXA	Spectrum Analyzer	FSV7	101631	2019/1/14	2020/1/13
Testo	Hygrometer	608-H1	1241332126	2018/8/21	2019/8/20
FLUKE	DIGITAC THERMOMETER	51II	97240029	2018/8/8	2019/8/7
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	

Note: Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

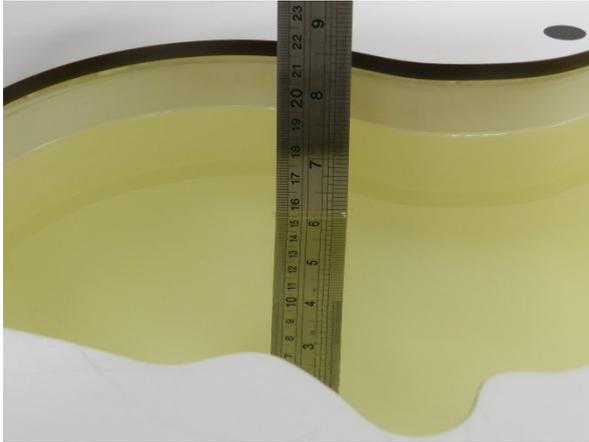


Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.7	0.921	42.546	0.90	41.50	2.33	2.52	±5	2019/4/1
1750	Head	22.6	1.371	40.660	1.37	40.10	0.07	1.40	±5	2019/4/2
1900	Head	22.7	1.399	39.840	1.40	40.00	-0.07	-0.40	±5	2019/4/2
2450	Head	22.9	1.828	39.050	1.80	39.20	1.56	-0.38	±5	2019/4/3
2600	Head	22.6	1.998	38.452	1.96	39.00	1.94	-1.41	±5	2019/4/4
5250	Head	22.9	4.787	35.795	4.71	35.90	1.63	-0.29	±5	2019/4/9
5600	Head	22.7	5.143	35.264	5.07	35.50	1.44	-0.66	±5	2019/4/9
5750	Head	22.8	5.302	35.036	5.22	35.40	1.57	-1.03	±5	2019/4/9
835	Body	22.9	0.998	54.644	0.97	55.20	2.89	-1.01	±5	2019/4/5
1750	Body	22.6	1.521	54.081	1.49	53.40	2.08	1.28	±5	2019/4/6
1900	Body	22.6	1.538	52.781	1.52	53.30	1.18	-0.97	±5	2019/4/7
2450	Body	22.8	2.008	52.277	1.95	52.70	2.97	-0.80	±5	2019/4/8
2600	Body	22.9	2.217	52.913	2.16	52.50	2.64	0.79	±5	2019/4/8
5250	Body	22.8	5.452	48.884	5.36	48.90	1.72	-0.03	±5	2019/4/11
5600	Body	22.8	5.909	48.311	5.77	48.50	2.41	-0.39	±5	2019/4/11
5750	Body	22.6	6.119	48.065	5.94	48.30	3.01	-0.49	±5	2019/4/11

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/4/1	835	Head	250	4d151	3843	1338	2.42	9.30	9.68	4.09
2019/4/2	1750	Head	250	1090	3843	1338	9.60	36.40	38.4	5.49
2019/4/2	1900	Head	250	5d170	3843	1338	9.69	39.00	38.76	-0.62
2019/4/3	2450	Head	250	908	3843	1338	13.80	52.80	55.2	4.55
2019/4/4	2600	Head	250	1061	3843	1338	13.90	57.70	55.6	-3.64
2019/4/9	5250	Head	100	1006	3857	1338	7.54	80.70	75.4	-6.57
2019/4/9	5600	Head	100	1006	3857	1338	7.70	83.30	77	-7.56
2019/4/9	5750	Head	100	1006	3857	1338	7.47	80.40	74.7	-7.09
2019/4/5	835	Body	250	4d151	3843	1338	2.35	9.53	9.4	-1.36
2019/4/6	1750	Body	250	1090	3843	1338	9.45	37.70	37.8	0.27
2019/4/7	1900	Body	250	5d170	3843	1338	9.50	40.00	38	-5.00
2019/4/8	2450	Body	250	908	3843	1338	13.60	50.80	54.4	7.09
2019/4/8	2600	Body	250	1061	3843	1338	14.50	54.20	58	7.01
2019/4/11	5250	Body	100	1006	3857	1338	7.28	78.30	72.8	-7.02
2019/4/11	5600	Body	100	1006	3857	1338	7.45	81.00	74.5	-8.02
2019/4/11	5750	Body	100	1006	3857	1338	7.19	77.40	71.9	-7.11

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/4/6	1750	Body	250	1090	3843	1338	5.01	19.90	20.04	0.70
2019/4/7	1900	Body	250	5d170	3843	1338	5.57	21.00	22.28	6.10
2019/4/11	5250	Body	100	1006	3857	1338	2.09	21.70	20.9	-3.69
2019/4/11	5600	Body	100	1006	3857	1338	2.11	22.50	21.1	-6.22

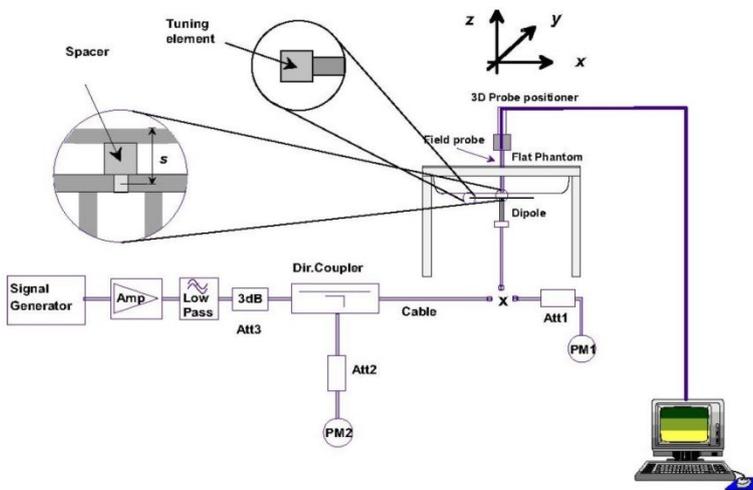


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

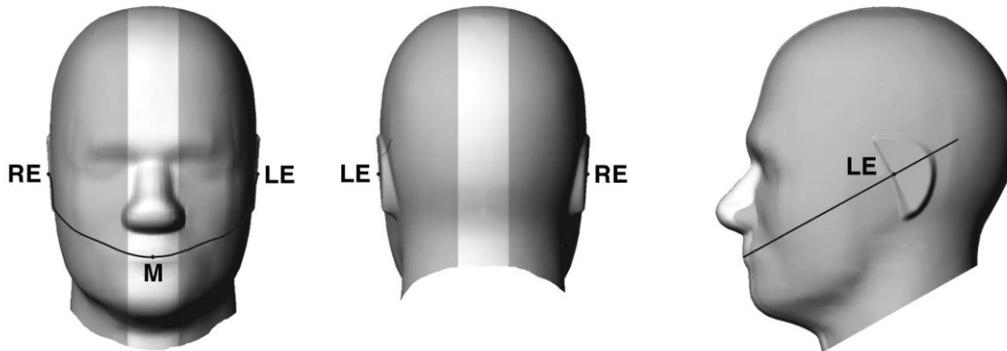


Fig 12.1.1 Front, back, and side views of SAM twin phantom

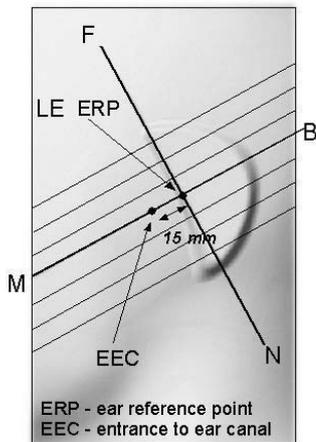


Fig 12.1.2 Close-up side view of phantom showing the ear region.

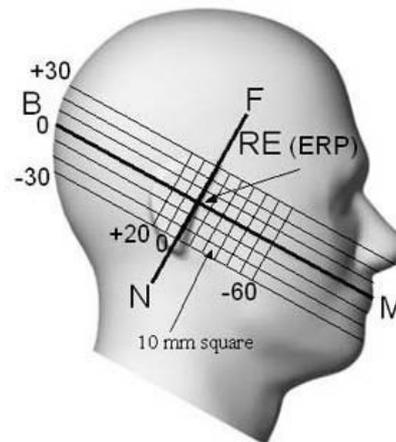


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

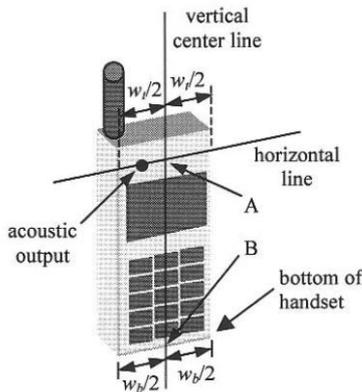


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

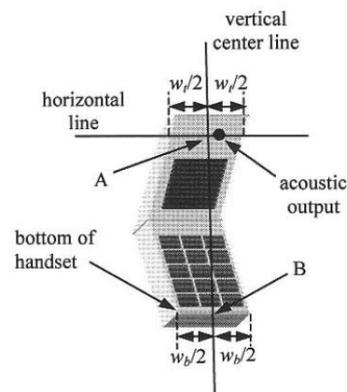


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

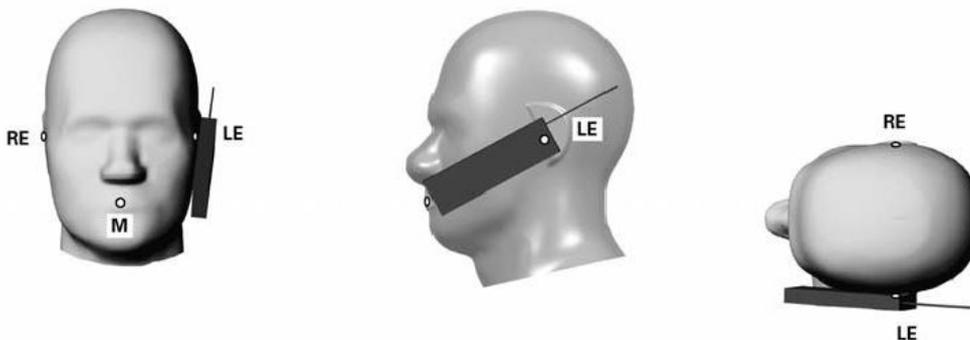


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

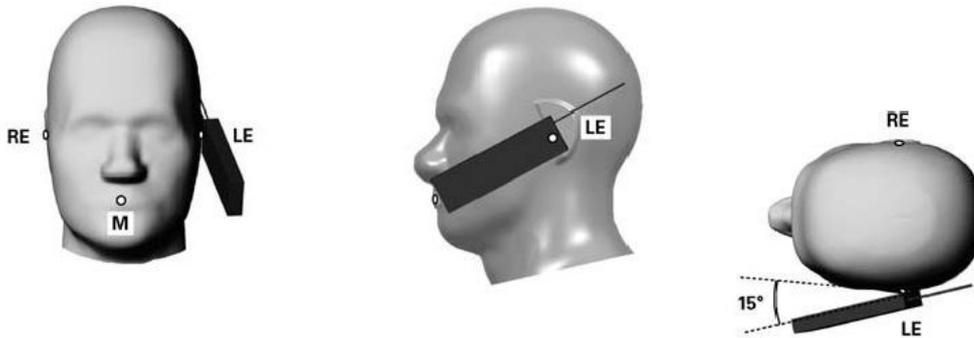


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

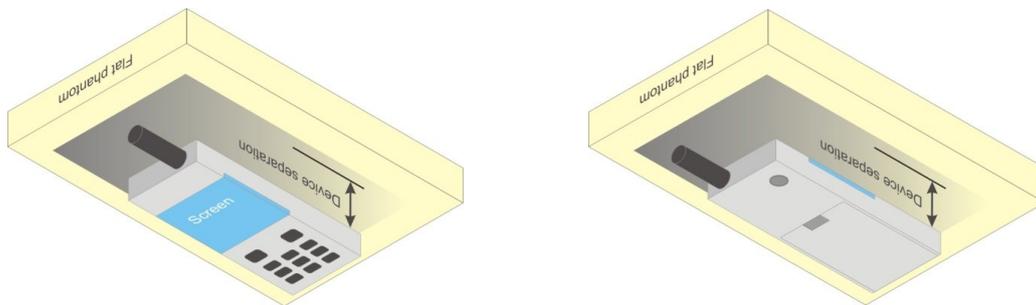


Fig 12.4 Body Worn Position



12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WWAN Top/Bottom Antenna--Full Power Mode>

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.46	32.62	32.50	33.50	23.46	23.62	23.50	24.50
GPRS 1 Tx slot	32.48	32.63	32.52	33.50	23.48	23.63	23.52	24.50
GPRS 2 Tx slots	29.15	29.31	29.21	30.50	23.15	23.31	23.21	24.50
GPRS 3 Tx slots	27.48	27.66	27.46	28.70	23.22	23.40	23.20	24.44
GPRS 4 Tx slots	25.90	26.20	25.92	27.50	22.90	23.20	22.92	24.50
EDGE 1 Tx slot	26.44	26.61	26.56	28.00	17.44	17.61	17.56	19.00
EDGE 2 Tx slots	23.50	23.41	23.33	25.00	17.50	17.41	17.33	19.00
EDGE 3 Tx slots	21.57	21.72	21.97	23.20	17.31	17.46	17.71	18.94
EDGE 4 Tx slots	20.15	20.47	20.57	22.00	17.15	17.47	17.57	19.00
GSM1900								
	Burst Average Power (dBm)				Frame-Average Power (dBm)			
Tx Channel	512	661	810	Tune-up Limit (dBm)	512	661	810	Tune-up Limit (dBm)
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.92	30.11	30.10	31.00	20.92	21.11	21.10	22.00
GPRS 1 Tx slot	29.95	30.11	30.13	31.00	20.95	21.11	21.13	22.00
GPRS 2 Tx slots	26.34	26.49	26.40	28.00	20.34	20.49	20.40	22.00
GPRS 3 Tx slots	24.40	24.84	24.63	26.20	20.14	20.58	20.37	21.94
GPRS 4 Tx slots	23.01	23.41	23.40	25.00	20.01	20.41	20.40	22.00
EDGE 1 Tx slot	25.51	25.47	25.60	27.00	16.51	16.47	16.60	18.00
EDGE 2 Tx slots	22.45	22.56	22.57	24.00	16.45	16.56	16.57	18.00
EDGE 3 Tx slots	20.52	20.65	20.32	22.20	16.26	16.39	16.06	17.94
EDGE 4 Tx slots	19.33	19.43	19.24	21.00	16.33	16.43	16.24	18.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On>

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	30.22	30.29	30.30	31.50	21.22	21.29	21.30	22.50
GPRS 1 Tx slot	30.20	30.28	30.28	31.50	21.20	21.28	21.28	22.50
GPRS 2 Tx slots	27.21	27.11	27.22	28.50	21.21	21.11	21.22	22.50
GPRS 3 Tx slots	25.29	25.38	25.38	26.70	21.03	21.12	21.12	22.44
GPRS 4 Tx slots	24.13	24.18	24.02	25.50	21.13	21.18	21.02	22.50
EDGE 1 Tx slot	26.44	26.61	26.56	28.00	17.44	17.61	17.56	19.00
EDGE 2 Tx slots	23.50	23.41	23.33	25.00	17.50	17.41	17.33	19.00
EDGE 3 Tx slots	21.57	21.72	21.97	23.20	17.31	17.46	17.71	18.94
EDGE 4 Tx slots	20.15	20.47	20.57	22.00	17.15	17.47	17.57	19.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WWAN Bottom Antenna --Reduced Power for Hotspot On>

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.14	29.23	29.25	30.00	20.14	20.23	20.25	21.00
GPRS 1 Tx slot	29.13	29.21	29.24	30.00	20.13	20.21	20.24	21.00
GPRS 2 Tx slots	25.52	25.69	25.55	27.00	19.52	19.69	19.55	21.00
GPRS 3 Tx slots	23.58	23.98	23.85	25.20	19.32	19.72	19.59	20.94
GPRS 4 Tx slots	22.24	22.58	22.41	24.00	19.24	19.58	19.41	21.00
EDGE 1 Tx slot	25.51	25.47	25.60	27.00	16.51	16.47	16.60	18.00
EDGE 2 Tx slots	22.45	22.56	22.57	24.00	16.45	16.56	16.57	18.00
EDGE 3 Tx slots	20.52	20.65	20.32	22.20	16.26	16.39	16.06	17.94
EDGE 4 Tx slots	19.33	19.43	19.24	21.00	16.33	16.43	16.24	18.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

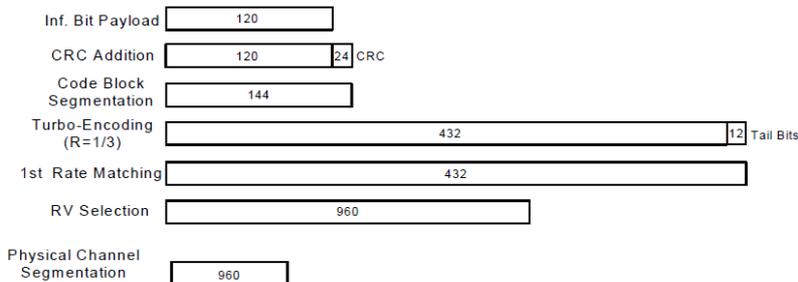


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<WWAN Top/Bottom Antenna--Full Power Mode>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.82	23.90	23.86	25.00	23.14	23.17	23.10	24.50	23.85	23.97	23.85	25.00
3GPP Rel 99	RMC 12.2Kbps	23.83	23.91	23.87	25.00	23.16	23.19	23.12	24.50	23.86	23.99	23.87	25.00
3GPP Rel 6	HSDPA Subtest-1	22.58	22.54	22.61	25.00	22.13	22.22	22.10	24.50	22.61	22.68	22.60	25.00
3GPP Rel 6	HSDPA Subtest-2	22.64	22.56	22.59	25.00	22.17	22.19	22.09	24.50	22.63	22.75	22.63	25.00
3GPP Rel 6	HSDPA Subtest-3	22.13	21.68	22.15	24.50	21.67	21.63	21.66	24.00	22.06	22.24	22.15	24.50
3GPP Rel 6	HSDPA Subtest-4	22.14	22.31	22.10	24.50	21.62	21.72	21.65	24.00	22.04	22.19	22.16	24.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.55	22.56	22.56	25.00	22.08	22.25	22.12	24.50	22.56	22.71	22.64	25.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.61	22.58	22.54	25.00	22.12	22.22	22.11	24.50	22.58	22.78	22.67	25.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.10	21.70	22.10	24.50	21.62	21.66	21.68	24.00	22.01	22.27	22.19	24.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.11	22.33	22.05	24.50	21.57	21.75	21.67	24.00	21.99	22.22	22.20	24.50
3GPP Rel 6	HSUPA Subtest-1	22.59	22.30	22.80	25.00	22.23	22.27	22.23	24.50	22.76	22.89	22.73	25.00
3GPP Rel 6	HSUPA Subtest-2	20.62	20.60	20.77	23.00	20.20	20.31	20.24	22.50	20.75	20.86	20.72	23.00
3GPP Rel 6	HSUPA Subtest-3	21.64	21.60	21.78	24.00	21.24	21.28	21.19	23.50	21.72	21.84	21.72	24.00
3GPP Rel 6	HSUPA Subtest-4	20.68	20.69	20.77	23.00	20.24	20.26	20.21	22.50	20.68	20.91	20.76	23.00
3GPP Rel 6	HSUPA Subtest-5	22.60	22.81	22.80	25.00	22.28	22.30	22.20	24.50	22.70	22.80	22.80	25.00



<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	20.50	20.61	20.58	21.50	20.22	20.25	20.20	21.50	20.74	20.64	20.78	22.00
3GPP Rel 99	RMC 12.2Kbps	20.51	20.62	20.60	21.50	20.23	20.27	20.22	21.50	20.76	20.85	20.80	22.00
3GPP Rel 6	HSDPA Subtest-1	19.07	19.08	19.10	21.50	19.08	19.14	19.07	21.50	19.77	19.86	19.78	22.00
3GPP Rel 6	HSDPA Subtest-2	19.15	19.13	19.17	21.50	19.05	19.14	19.11	21.50	19.77	19.93	19.79	22.00
3GPP Rel 6	HSDPA Subtest-3	18.62	18.58	18.60	21.00	18.58	18.66	18.26	21.00	19.28	19.40	19.30	21.50
3GPP Rel 6	HSDPA Subtest-4	18.64	18.60	18.65	21.00	18.60	18.60	18.51	21.00	19.27	19.38	19.29	21.50
3GPP Rel 8	DC-HSDPA Subtest-1	19.02	19.05	19.01	21.50	19.00	19.08	19.02	21.50	19.72	19.79	19.76	22.00
3GPP Rel 8	DC-HSDPA Subtest-2	19.03	19.02	19.07	21.50	19.03	19.04	19.00	21.50	19.69	19.77	19.80	22.00
3GPP Rel 8	DC-HSDPA Subtest-3	18.59	18.54	18.51	21.00	18.52	18.49	18.56	21.00	19.08	19.12	19.17	21.50
3GPP Rel 8	DC-HSDPA Subtest-4	18.55	18.62	18.57	21.00	18.59	18.53	18.64	21.00	19.09	19.18	19.12	21.50
3GPP Rel 6	HSUPA Subtest-1	19.09	19.06	19.10	21.50	19.02	19.11	19.04	21.50	19.81	19.85	19.71	22.00
3GPP Rel 6	HSUPA Subtest-2	17.11	17.11	17.12	19.50	17.07	17.14	17.02	19.50	17.75	17.88	17.79	20.00
3GPP Rel 6	HSUPA Subtest-3	18.04	18.07	18.11	20.50	18.01	18.11	18.08	20.50	18.74	18.89	18.72	21.00
3GPP Rel 6	HSUPA Subtest-4	17.06	17.11	17.17	19.50	17.00	17.16	17.09	19.50	17.72	17.84	17.71	20.00
3GPP Rel 6	HSUPA Subtest-5	19.10	19.10	19.10	21.50	19.00	19.10	19.00	21.50	19.80	19.90	19.70	22.00

<WWAN Bottom Antenna --Reduced Power for Hotspot On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	18.18	18.34	18.30	19.00	18.26	18.31	18.27	19.50
3GPP Rel 99	RMC 12.2Kbps	18.20	18.36	18.32	19.00	18.27	18.33	18.29	19.50
3GPP Rel 6	HSDPA Subtest-1	16.66	16.66	16.81	19.00	17.12	17.20	17.16	19.50
3GPP Rel 6	HSDPA Subtest-2	16.65	16.73	16.82	19.00	17.12	17.19	17.16	19.50
3GPP Rel 6	HSDPA Subtest-3	16.20	16.18	16.34	18.50	16.61	16.71	16.68	19.00
3GPP Rel 6	HSDPA Subtest-4	16.18	16.15	16.34	18.50	16.62	16.72	16.68	19.00
3GPP Rel 8	DC-HSDPA Subtest-1	16.60	16.62	16.75	19.00	17.09	17.13	17.05	19.50
3GPP Rel 8	DC-HSDPA Subtest-2	16.62	16.00	16.78	19.00	17.07	17.16	17.08	19.50
3GPP Rel 8	DC-HSDPA Subtest-3	16.03	16.10	16.09	18.50	16.57	16.51	16.02	19.00
3GPP Rel 8	DC-HSDPA Subtest-4	16.07	16.08	16.06	18.50	16.69	16.48	16.08	19.00
3GPP Rel 6	HSUPA Subtest-1	16.64	16.64	16.82	19.00	17.06	17.15	17.17	19.50
3GPP Rel 6	HSUPA Subtest-2	14.57	14.75	14.82	17.00	15.03	15.22	15.11	17.50
3GPP Rel 6	HSUPA Subtest-3	15.65	15.63	15.82	18.00	16.08	16.21	16.16	18.50
3GPP Rel 6	HSUPA Subtest-4	14.62	14.65	14.79	17.00	15.08	15.18	15.12	17.50
3GPP Rel 6	HSUPA Subtest-5	16.60	16.70	16.80	19.00	17.00	17.20	17.20	19.50




<WWAN Bottom Antenna --Reduced Power for Handheld>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	21.84	21.88	21.83	23.00	21.25	21.30	21.27	22.50
3GPP Rel 99	RMC 12.2Kbps	21.85	21.91	21.84	23.00	21.26	21.31	21.27	22.50
3GPP Rel 6	HSDPA Subtest-1	20.70	20.70	20.72	23.00	20.19	20.24	20.16	22.50
3GPP Rel 6	HSDPA Subtest-2	20.74	20.64	20.79	23.00	20.19	20.27	20.23	22.50
3GPP Rel 6	HSDPA Subtest-3	20.26	20.25	20.23	23.00	19.70	19.83	19.72	22.50
3GPP Rel 6	HSDPA Subtest-4	20.26	20.16	20.23	23.00	19.73	19.80	19.70	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	20.68	20.72	20.73	23.00	20.18	20.25	20.15	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	20.71	20.61	20.68	23.00	20.13	20.21	20.17	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	20.25	20.18	20.18	23.00	19.68	19.85	19.68	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	20.21	20.23	20.06	23.00	19.51	19.87	19.63	22.50
3GPP Rel 6	HSUPA Subtest-1	20.70	20.67	20.80	23.00	20.18	20.20	20.14	22.50
3GPP Rel 6	HSUPA Subtest-2	18.73	18.65	18.69	23.00	18.18	18.21	18.16	22.50
3GPP Rel 6	HSUPA Subtest-3	19.73	19.70	19.75	23.00	19.14	19.25	19.21	22.50
3GPP Rel 6	HSUPA Subtest-4	18.75	18.67	18.77	23.00	18.22	18.24	18.18	22.50
3GPP Rel 6	HSUPA Subtest-5	20.70	20.60	20.80	23.00	20.20	20.20	20.20	22.50


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64QAM and 16QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

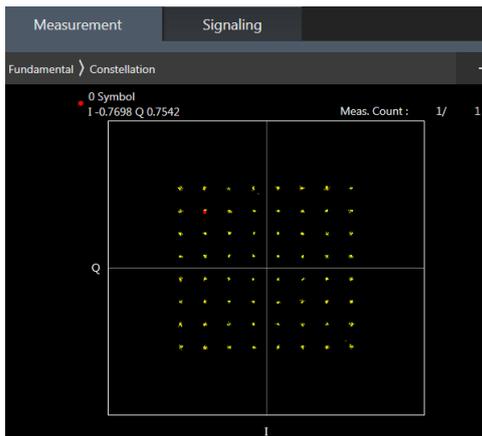

64QAM

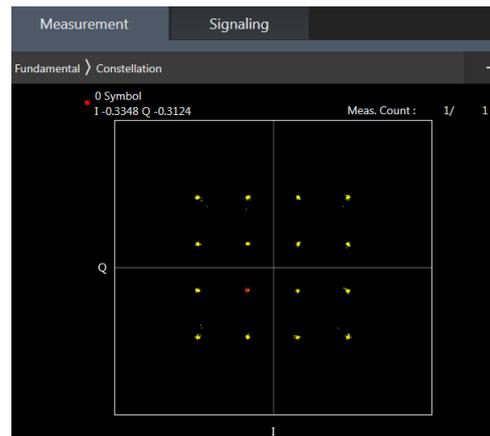

16QAM



<WWAN Top/Bottom Antenna-- Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.74	22.74	22.67	24	0
20	QPSK	1	49	22.62	22.66	22.72		
20	QPSK	1	99	22.62	22.56	22.63		
20	QPSK	50	0	21.73	21.85	21.68	23	1
20	QPSK	50	24	21.72	21.80	21.79		
20	QPSK	50	50	21.69	21.73	21.72		
20	QPSK	100	0	21.74	21.80	21.71	23	1
20	16QAM	1	0	22.01	22.07	22.02		
20	16QAM	1	49	21.93	22.05	22.01		
20	16QAM	1	99	21.88	21.89	21.98	22	2
20	16QAM	50	0	20.83	20.80	20.82		
20	16QAM	50	24	20.81	20.94	20.87		
20	16QAM	50	50	20.79	20.82	20.82	22	2
20	16QAM	100	0	20.83	20.88	20.79		
20	64QAM	1	0	21.13	21.12	21.11		
20	64QAM	1	49	21.04	21.08	21.12	22	2
20	64QAM	1	99	21.01	21.00	21.07		
20	64QAM	50	0	20.01	19.99	19.98		
20	64QAM	50	24	20.00	20.13	20.05	21	3
20	64QAM	50	50	19.98	20.02	19.99		
20	64QAM	100	0	20.04	20.09	19.96		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.73	22.69	22.79	24	0
15	QPSK	1	37	22.67	22.65	22.70		
15	QPSK	1	74	22.54	22.65	22.62		
15	QPSK	36	0	21.72	21.73	21.74	23	1
15	QPSK	36	20	21.71	21.85	21.78		
15	QPSK	36	39	21.64	21.73	21.75		
15	QPSK	75	0	21.67	21.80	21.74	23	1
15	16QAM	1	0	21.99	22.02	22.14		
15	16QAM	1	37	21.96	22.03	22.01		
15	16QAM	1	74	21.85	22.03	22.01	22	2
15	16QAM	36	0	20.78	20.80	20.84		
15	16QAM	36	20	20.80	20.93	20.90		
15	16QAM	36	39	20.70	20.87	20.86	21	3
15	16QAM	75	0	20.72	20.88	20.82		
15	64QAM	1	0	21.09	21.07	21.15		
15	64QAM	1	37	21.02	21.07	21.15	22	2
15	64QAM	1	74	20.91	21.07	21.07		
15	64QAM	36	0	19.96	19.98	20.01		
15	64QAM	36	20	19.98	20.11	20.01	21	3
15	64QAM	36	39	19.88	19.99	20.03		
15	64QAM	75	0	19.90	20.05	19.99		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.64	22.62	22.78	24	0
10	QPSK	1	25	22.72	22.66	22.75		
10	QPSK	1	49	22.71	22.77	22.66		
10	QPSK	25	0	21.78	21.74	21.80	23	1
10	QPSK	25	12	21.73	21.85	21.75		
10	QPSK	25	25	21.68	21.78	21.73		
10	QPSK	50	0	21.73	21.83	21.72	23	1
10	16QAM	1	0	22.12	22.12	22.05		
10	16QAM	1	25	22.03	22.03	22.04		
10	16QAM	1	49	22.00	22.13	22.02	22	2
10	16QAM	25	0	20.83	20.83	20.87		
10	16QAM	25	12	20.81	20.93	20.86		
10	16QAM	25	25	20.77	20.87	20.82	22	2
10	16QAM	50	0	20.81	20.93	20.85		
10	64QAM	1	0	21.12	21.14	21.06		
10	64QAM	1	25	20.95	21.03	21.04	22	2
10	64QAM	1	49	20.96	21.10	20.99		
10	64QAM	25	0	19.94	19.94	19.97		
10	64QAM	25	12	19.91	20.01	19.92	21	3
10	64QAM	25	25	19.84	19.95	19.92		
10	64QAM	50	0	19.89	20.00	19.90		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.61	22.78	22.81	24	0
5	QPSK	1	12	22.81	22.80	22.79		
5	QPSK	1	24	22.73	22.80	22.78		
5	QPSK	12	0	21.84	21.79	21.85	23	1
5	QPSK	12	7	21.85	21.82	21.84		
5	QPSK	12	13	21.79	21.88	21.80		
5	QPSK	25	0	21.82	21.88	21.81	23	1
5	16QAM	1	0	22.10	22.10	22.15		
5	16QAM	1	12	22.11	22.10	22.13		
5	16QAM	1	24	22.05	22.11	22.10	22	2
5	16QAM	12	0	20.88	20.92	20.93		
5	16QAM	12	7	20.88	20.92	20.99		
5	16QAM	12	13	20.86	20.98	20.94	22	2
5	16QAM	25	0	20.88	20.99	20.90		
5	64QAM	1	0	21.09	21.08	21.14		
5	64QAM	1	12	21.13	21.11	21.12	22	2
5	64QAM	1	24	21.02	21.12	21.10		
5	64QAM	12	0	19.97	19.97	19.99		
5	64QAM	12	7	19.97	19.94	20.07	21	3
5	64QAM	12	13	19.95	20.04	20.02		
5	64QAM	25	0	19.95	20.06	19.98		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.67	22.62	22.71	24	0
3	QPSK	1	8	22.66	22.63	22.73		
3	QPSK	1	14	22.63	22.67	22.66		
3	QPSK	8	0	21.69	21.64	21.73	23	1
3	QPSK	8	4	21.70	21.67	21.75		
3	QPSK	8	7	21.65	21.74	21.72		
3	QPSK	15	0	21.67	21.75	21.75	23	1
3	16QAM	1	0	21.94	21.91	21.96		
3	16QAM	1	8	21.96	21.95	22.06		
3	16QAM	1	14	21.91	21.97	22.03	22	2
3	16QAM	8	0	20.79	20.76	20.88		
3	16QAM	8	4	20.79	20.77	20.94		
3	16QAM	8	7	20.77	20.86	20.88	22	2
3	16QAM	15	0	20.76	20.84	20.84		
3	64QAM	1	0	20.93	20.88	21.01		
3	64QAM	1	8	20.99	20.95	21.05	22	2
3	64QAM	1	14	20.90	20.96	21.01		
3	64QAM	8	0	19.83	19.81	19.95		
3	64QAM	8	4	19.85	19.83	19.97	21	3
3	64QAM	8	7	19.78	19.90	19.92		
3	64QAM	15	0	19.82	19.99	19.94		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.69	22.64	22.63	24	0
1.4	QPSK	1	3	22.76	22.67	22.71		
1.4	QPSK	1	5	22.70	22.62	22.64		
1.4	QPSK	3	0	22.70	22.63	22.66		
1.4	QPSK	3	1	22.77	22.68	22.73		
1.4	QPSK	3	3	22.72	22.62	22.70		
1.4	QPSK	6	0	21.71	21.64	21.66	23	1
1.4	16QAM	1	0	21.91	21.91	21.98	23	1
1.4	16QAM	1	3	22.05	22.04	22.10		
1.4	16QAM	1	5	21.95	21.90	21.98		
1.4	16QAM	3	0	21.77	21.72	21.79		
1.4	16QAM	3	1	21.82	21.77	21.79		
1.4	16QAM	3	3	21.76	21.74	21.77		
1.4	16QAM	6	0	20.83	20.80	20.85	22	2
1.4	64QAM	1	0	21.03	20.90	20.97	22	2
1.4	64QAM	1	3	21.03	21.03	21.06		
1.4	64QAM	1	5	20.97	20.89	20.92		
1.4	64QAM	3	0	20.89	20.82	20.88		
1.4	64QAM	3	1	20.94	20.91	20.94		
1.4	64QAM	3	3	20.86	20.86	20.89		
1.4	64QAM	6	0	19.84	19.83	19.88	21	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.79	22.85	22.82	24	0
20	QPSK	1	49	22.66	22.78	22.74		
20	QPSK	1	99	22.59	22.67	22.70		
20	QPSK	50	0	21.80	21.88	21.82	23	1
20	QPSK	50	24	21.84	21.87	21.82		
20	QPSK	50	50	21.72	21.78	21.72		
20	QPSK	100	0	21.75	21.84	21.75	23	1
20	16QAM	1	0	22.00	22.18	22.11		
20	16QAM	1	49	21.98	22.03	22.02		
20	16QAM	1	99	21.88	21.95	21.93	22	2
20	16QAM	50	0	20.91	20.93	20.90		
20	16QAM	50	24	20.86	20.91	20.87		
20	16QAM	50	50	20.81	20.86	20.78	22	2
20	16QAM	100	0	20.86	20.88	20.83		
20	64QAM	1	0	21.01	21.12	21.04		
20	64QAM	1	49	20.97	21.04	21.01	22	2
20	64QAM	1	99	20.89	20.95	20.90		
20	64QAM	50	0	19.98	20.01	19.94		
20	64QAM	50	24	19.92	19.99	19.93	21	3
20	64QAM	50	50	19.88	19.91	19.84		
20	64QAM	100	0	19.93	19.96	19.90		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.76	22.84	22.77	24	0
15	QPSK	1	37	22.61	22.76	22.83		
15	QPSK	1	74	22.62	22.69	22.70		
15	QPSK	36	0	21.80	21.85	21.79	23	1
15	QPSK	36	20	21.78	21.83	21.78		
15	QPSK	36	39	21.74	21.77	21.81		
15	QPSK	75	0	21.74	21.81	21.73	23	1
15	16QAM	1	0	22.02	22.14	22.07		
15	16QAM	1	37	21.96	22.03	22.07		
15	16QAM	1	74	21.92	21.97	21.96	22	2
15	16QAM	36	0	20.89	20.90	20.84		
15	16QAM	36	20	20.88	20.89	20.83		
15	16QAM	36	39	20.82	20.85	20.86	22	2
15	16QAM	75	0	20.86	20.88	20.81		
15	64QAM	1	0	21.02	21.10	21.08		
15	64QAM	1	37	20.95	21.01	21.07	22	2
15	64QAM	1	74	20.88	20.93	20.94		
15	64QAM	36	0	19.96	19.97	19.90		
15	64QAM	36	20	19.94	19.98	19.89	21	3
15	64QAM	36	39	19.86	19.88	19.91		
15	64QAM	75	0	19.93	19.96	19.89		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.79	22.85	22.80	24	0
10	QPSK	1	25	22.67	22.81	22.82		
10	QPSK	1	49	22.60	22.74	22.75		
10	QPSK	25	0	21.82	21.86	21.79	23	1
10	QPSK	25	12	21.84	21.87	21.91		
10	QPSK	25	25	21.65	21.78	21.85		
10	QPSK	50	0	21.78	21.84	21.76	23	1
10	16QAM	1	0	22.04	22.11	22.08		
10	16QAM	1	25	21.96	22.09	22.11		
10	16QAM	1	49	21.89	22.01	21.98	22	2
10	16QAM	25	0	20.91	20.91	20.88		
10	16QAM	25	12	20.87	20.93	20.97		
10	16QAM	25	25	20.73	20.87	20.89	21	3
10	16QAM	50	0	20.85	20.88	20.80		
10	64QAM	1	0	20.97	21.00	21.05		
10	64QAM	1	25	20.98	21.07	21.02	22	2
10	64QAM	1	49	20.88	20.98	20.95		
10	64QAM	25	0	19.88	19.93	19.97		
10	64QAM	25	12	19.95	19.96	19.98	21	3
10	64QAM	25	25	19.89	19.90	19.89		
10	64QAM	50	0	19.93	19.93	19.95		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.74	22.77	22.81	24	0
5	QPSK	1	12	22.74	22.77	22.79		
5	QPSK	1	24	22.58	22.71	22.74		
5	QPSK	12	0	21.80	21.83	21.86	23	1
5	QPSK	12	7	21.80	21.84	21.88		
5	QPSK	12	13	21.77	21.80	21.79		
5	QPSK	25	0	21.79	21.84	21.86	23	1
5	16QAM	1	0	22.00	22.02	22.05		
5	16QAM	1	12	21.99	22.03	22.05		
5	16QAM	1	24	21.89	22.00	21.98	22	2
5	16QAM	12	0	20.83	20.91	20.91		
5	16QAM	12	7	20.88	20.87	20.91		
5	16QAM	12	13	20.83	20.87	20.85	22	2
5	16QAM	25	0	20.86	20.87	20.90		
5	64QAM	1	0	20.90	20.96	20.93		
5	64QAM	1	12	20.98	20.95	20.97	22	2
5	64QAM	1	24	20.97	20.95	20.92		
5	64QAM	12	0	19.84	19.89	19.89		
5	64QAM	12	7	19.86	19.90	19.91	21	3
5	64QAM	12	13	19.86	19.87	19.85		
5	64QAM	25	0	19.85	19.89	19.92		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.70	22.76	22.75	24	0
3	QPSK	1	8	22.71	22.76	22.75		
3	QPSK	1	14	22.68	22.71	22.74		
3	QPSK	8	0	21.74	21.76	21.81	23	1
3	QPSK	8	4	21.76	21.81	21.83		
3	QPSK	8	7	21.72	21.75	21.76		
3	QPSK	15	0	21.74	21.77	21.79		
3	16QAM	1	0	21.89	22.00	21.99	23	1
3	16QAM	1	8	21.98	21.98	21.99		
3	16QAM	1	14	21.96	21.98	21.94		
3	16QAM	8	0	20.85	20.85	20.86	22	2
3	16QAM	8	4	20.88	20.89	20.89		
3	16QAM	8	7	20.82	20.81	20.83		
3	16QAM	15	0	20.83	20.86	20.87		
3	64QAM	1	0	20.99	21.08	21.03	22	2
3	64QAM	1	8	20.92	21.02	21.07		
3	64QAM	1	14	20.86	20.95	20.97		
3	64QAM	8	0	19.97	19.99	19.94	21	3
3	64QAM	8	4	19.94	19.96	20.01		
3	64QAM	8	7	19.78	19.92	19.96		
3	64QAM	15	0	19.93	19.93	19.86		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.61	22.66	22.68	24	0
1.4	QPSK	1	3	22.66	22.71	22.72		
1.4	QPSK	1	5	22.59	22.65	22.63		
1.4	QPSK	3	0	22.67	22.69	22.69		
1.4	QPSK	3	1	22.70	22.74	22.76		
1.4	QPSK	3	3	22.63	22.69	22.68		
1.4	QPSK	6	0	21.66	21.71	21.73	23	1
1.4	16QAM	1	0	21.79	21.86	21.91	23	1
1.4	16QAM	1	3	21.93	21.98	21.93		
1.4	16QAM	1	5	21.81	21.89	21.86		
1.4	16QAM	3	0	21.64	21.69	21.71		
1.4	16QAM	3	1	21.71	21.81	21.73		
1.4	16QAM	3	3	21.65	21.70	21.70	22	2
1.4	16QAM	6	0	20.78	20.85	20.84	22	2
1.4	64QAM	1	0	20.82	20.91	20.87		
1.4	64QAM	1	3	20.88	20.94	20.92		
1.4	64QAM	1	5	20.77	20.85	20.86		
1.4	64QAM	3	0	20.75	20.84	20.80		
1.4	64QAM	3	1	20.83	20.85	20.88		
1.4	64QAM	3	3	20.74	20.82	20.81		
1.4	64QAM	6	0	19.79	19.79	19.83		
1.4	64QAM	6	0	19.79	19.79	19.83	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.70	22.82	22.80	24	0
10	QPSK	1	25	22.78	22.81	22.80		
10	QPSK	1	49	22.81	22.72	22.71		
10	QPSK	25	0	21.84	21.89	21.79	23	1
10	QPSK	25	12	21.80	21.85	21.80		
10	QPSK	25	25	21.72	21.82	21.80		
10	QPSK	50	0	21.92	21.84	21.78	23	1
10	16QAM	1	0	21.99	22.04	22.17		
10	16QAM	1	25	22.06	22.17	22.19		
10	16QAM	1	49	22.16	22.09	22.04	22	2
10	16QAM	25	0	20.92	20.98	20.90		
10	16QAM	25	12	20.89	20.97	20.86		
10	16QAM	25	25	20.95	20.87	20.91	22	2
10	16QAM	50	0	21.01	20.90	20.85		
10	64QAM	1	0	21.05	21.13	21.19		
10	64QAM	1	25	21.15	21.15	21.22	22	2
10	64QAM	1	49	21.17	21.14	21.11		
10	64QAM	25	0	20.10	20.13	20.04		
10	64QAM	25	12	20.06	20.13	20.01	21	3
10	64QAM	25	25	20.12	20.03	20.06		
10	64QAM	50	0	20.13	20.05	19.99		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.68	22.85	22.81	24	0
5	QPSK	1	12	22.77	22.80	22.79		
5	QPSK	1	24	22.73	22.75	22.74		
5	QPSK	12	0	21.88	21.83	21.84	23	1
5	QPSK	12	7	21.87	21.85	21.82		
5	QPSK	12	13	21.85	21.81	21.77		
5	QPSK	25	0	21.85	21.81	21.79	23	1
5	16QAM	1	0	21.99	22.13	22.19		
5	16QAM	1	12	22.11	22.14	22.09		
5	16QAM	1	24	22.08	22.09	22.02	22	2
5	16QAM	12	0	20.93	20.93	20.90		
5	16QAM	12	7	20.96	20.95	20.88		
5	16QAM	12	13	20.91	20.88	20.89	22	2
5	16QAM	25	0	20.93	20.88	20.86		
5	64QAM	1	0	21.05	21.15	21.18		
5	64QAM	1	12	21.15	21.19	21.15	22	2
5	64QAM	1	24	21.12	21.18	21.05		
5	64QAM	12	0	20.07	20.06	20.01		
5	64QAM	12	7	20.09	20.07	20.00	21	3
5	64QAM	12	13	20.01	20.02	20.02		
5	64QAM	25	0	20.04	20.05	20.01		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.62	22.77	22.78	24	0
3	QPSK	1	8	22.65	22.77	22.75		
3	QPSK	1	14	22.65	22.73	22.71		
3	QPSK	8	0	21.74	21.82	21.79	23	1
3	QPSK	8	4	21.76	21.84	21.82		
3	QPSK	8	7	21.70	21.81	21.76		
3	QPSK	15	0	21.75	21.78	21.78		
3	16QAM	1	0	21.89	22.08	22.11	23	1
3	16QAM	1	8	21.99	22.14	22.11		
3	16QAM	1	14	21.92	22.06	22.02		
3	16QAM	8	0	20.86	20.92	20.87	22	2
3	16QAM	8	4	20.89	20.94	20.92		
3	16QAM	8	7	20.79	20.90	20.87		
3	16QAM	15	0	20.84	20.90	20.90		
3	64QAM	1	0	20.94	21.16	21.12	22	2
3	64QAM	1	8	21.06	21.16	21.10		
3	64QAM	1	14	21.00	21.15	21.10		
3	64QAM	8	0	19.93	20.05	19.99	21	3
3	64QAM	8	4	19.95	20.07	20.05		
3	64QAM	8	7	19.94	20.03	20.01		
3	64QAM	15	0	19.93	20.03	20.00		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.47	22.68	22.65	24	0
1.4	QPSK	1	3	22.56	22.75	22.71		
1.4	QPSK	1	5	22.57	22.67	22.63		
1.4	QPSK	3	0	22.55	22.73	22.67		
1.4	QPSK	3	1	22.56	22.78	22.74		
1.4	QPSK	3	3	22.61	22.74	22.67		
1.4	QPSK	6	0	21.63	21.71	21.67	23	1
1.4	16QAM	1	0	21.80	21.97	21.98	23	1
1.4	16QAM	1	3	21.85	22.06	22.03		
1.4	16QAM	1	5	21.91	22.00	21.89		
1.4	16QAM	3	0	21.60	21.84	21.76		
1.4	16QAM	3	1	21.63	21.85	21.78		
1.4	16QAM	3	3	21.68	21.79	21.74	22	2
1.4	16QAM	6	0	20.78	20.87	20.84	22	2
1.4	64QAM	1	0	20.96	21.07	20.99		
1.4	64QAM	1	3	21.00	21.12	21.08		
1.4	64QAM	1	5	21.00	21.03	20.94		
1.4	64QAM	3	0	20.88	20.98	20.94		
1.4	64QAM	3	1	20.93	21.05	20.95		
1.4	64QAM	3	3	20.98	21.00	20.93		
1.4	64QAM	6	0	19.94	19.95	19.89		



<LTE Band 7-Top Antenna>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.82	22.99	22.90	23.5	0
20	QPSK	1	49	22.84	22.85	22.88		
20	QPSK	1	99	22.98	22.88	22.90		
20	QPSK	50	0	21.91	21.99	21.95	22.5	1
20	QPSK	50	24	21.92	21.95	21.97		
20	QPSK	50	50	21.95	21.94	21.97		
20	QPSK	100	0	22.01	21.96	21.95	22.5	1
20	16QAM	1	0	22.07	22.18	22.21		
20	16QAM	1	49	22.18	22.13	22.26		
20	16QAM	1	99	22.32	22.17	22.36	21.5	2
20	16QAM	50	0	21.02	21.01	21.04		
20	16QAM	50	24	21.03	21.06	21.11		
20	16QAM	50	50	21.16	21.05	21.11	21.5	2
20	16QAM	100	0	21.11	21.02	21.07		
20	64QAM	1	0	21.00	21.12	21.12		
20	64QAM	1	49	21.10	21.10	21.17	21.5	2
20	64QAM	1	99	21.25	21.13	21.29		
20	64QAM	50	0	20.05	20.04	20.06		
20	64QAM	50	24	20.05	20.05	20.12	20.5	3
20	64QAM	50	50	20.18	20.04	20.13		
20	64QAM	100	0	20.15	20.07	20.09		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.83	22.91	22.89	23.5	0
15	QPSK	1	37	22.84	22.85	22.89		
15	QPSK	1	74	22.92	22.95	23.08		
15	QPSK	36	0	21.89	21.91	21.94	22.5	1
15	QPSK	36	20	21.92	21.96	21.97		
15	QPSK	36	39	21.93	21.94	21.97		
15	QPSK	75	0	21.89	21.92	21.94	22.5	1
15	16QAM	1	0	22.13	22.17	22.25		
15	16QAM	1	37	22.14	22.13	22.21		
15	16QAM	1	74	22.29	22.20	22.39	21.5	2
15	16QAM	36	0	21.01	21.04	21.04		
15	16QAM	36	20	21.05	21.02	21.10		
15	16QAM	36	39	21.07	21.04	21.08	21.5	2
15	16QAM	75	0	21.02	21.01	21.07		
15	64QAM	1	0	21.02	21.11	21.18		
15	64QAM	1	37	21.06	21.11	21.15	21.5	2
15	64QAM	1	74	21.16	21.15	21.31		
15	64QAM	36	0	20.03	20.05	20.08		
15	64QAM	36	20	20.08	20.06	20.12	20.5	3
15	64QAM	36	39	20.09	20.07	20.12		
15	64QAM	75	0	20.04	20.03	20.11		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.82	22.77	22.86	23.5	0
10	QPSK	1	25	22.82	22.84	22.97		
10	QPSK	1	49	22.85	22.90	23.02		
10	QPSK	25	0	21.87	21.88	21.89	22.5	1
10	QPSK	25	12	21.93	21.94	21.94		
10	QPSK	25	25	21.91	21.92	22.07		
10	QPSK	50	0	21.89	21.92	21.95	22.5	1
10	16QAM	1	0	22.04	22.07	22.20		
10	16QAM	1	25	22.14	22.10	22.31		
10	16QAM	1	49	22.17	22.18	22.32	21.5	2
10	16QAM	25	0	20.98	21.00	21.02		
10	16QAM	25	12	21.00	21.04	21.06		
10	16QAM	25	25	21.01	21.00	21.14	21.5	2
10	16QAM	50	0	21.01	21.00	21.07		
10	64QAM	1	0	21.01	21.02	21.11		
10	64QAM	1	25	21.08	21.11	21.26	21.5	2
10	64QAM	1	49	21.08	21.09	21.26		
10	64QAM	25	0	20.02	20.00	20.05		
10	64QAM	25	12	20.01	20.02	20.10	20.5	3
10	64QAM	25	25	20.00	20.05	20.16		
10	64QAM	50	0	19.99	20.03	20.06		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.80	22.77	22.94	23.5	0
5	QPSK	1	12	22.84	22.85	22.97		
5	QPSK	1	24	22.85	22.87	22.99		
5	QPSK	12	0	21.91	21.89	22.01	22.5	1
5	QPSK	12	7	21.94	21.94	22.07		
5	QPSK	12	13	21.91	21.91	22.05		
5	QPSK	25	0	21.90	21.92	22.01	22.5	1
5	16QAM	1	0	22.09	22.04	22.29		
5	16QAM	1	12	22.09	22.10	22.28		
5	16QAM	1	24	22.12	22.11	22.28	21.5	2
5	16QAM	12	0	20.95	20.93	21.12		
5	16QAM	12	7	21.00	21.04	21.17		
5	16QAM	12	13	20.99	20.95	21.18	21.5	2
5	16QAM	25	0	20.95	20.98	21.14		
5	64QAM	1	0	21.05	20.93	21.21		
5	64QAM	1	12	21.06	21.04	21.22	21.5	2
5	64QAM	1	24	21.02	21.09	21.24		
5	64QAM	12	0	19.97	19.95	20.15		
5	64QAM	12	7	20.02	19.98	20.21	20.5	3
5	64QAM	12	13	19.98	19.98	20.18		
5	64QAM	25	0	19.99	20.02	20.18		



<LTE Band 7-Bottom Antenna>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.82	22.99	22.90	24	0
20	QPSK	1	49	22.84	22.85	22.88		
20	QPSK	1	99	22.98	22.88	22.90		
20	QPSK	50	0	21.91	21.99	21.95	23	1
20	QPSK	50	24	21.92	21.95	21.97		
20	QPSK	50	50	21.95	21.94	21.97		
20	QPSK	100	0	22.01	21.96	21.95	23	1
20	16QAM	1	0	22.07	22.18	22.21		
20	16QAM	1	49	22.18	22.13	22.26		
20	16QAM	1	99	22.32	22.17	22.36	22	2
20	16QAM	50	0	21.02	21.01	21.04		
20	16QAM	50	24	21.03	21.06	21.11		
20	16QAM	50	50	21.16	21.05	21.11	21	3
20	16QAM	100	0	21.11	21.02	21.07		
20	64QAM	1	0	21.00	21.12	21.12		
20	64QAM	1	49	21.10	21.10	21.17	22	2
20	64QAM	1	99	21.25	21.13	21.29		
20	64QAM	50	0	20.05	20.04	20.06		
20	64QAM	50	24	20.05	20.05	20.12	21	3
20	64QAM	50	50	20.18	20.04	20.13		
20	64QAM	100	0	20.15	20.07	20.09		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.83	22.91	22.89	24	0
15	QPSK	1	37	22.84	22.85	22.89		
15	QPSK	1	74	22.92	22.95	23.08		
15	QPSK	36	0	21.89	21.91	21.94	23	1
15	QPSK	36	20	21.92	21.96	21.97		
15	QPSK	36	39	21.93	21.94	21.97		
15	QPSK	75	0	21.89	21.92	21.94	23	1
15	16QAM	1	0	22.13	22.17	22.25		
15	16QAM	1	37	22.14	22.13	22.21		
15	16QAM	1	74	22.29	22.20	22.39	22	2
15	16QAM	36	0	21.01	21.04	21.04		
15	16QAM	36	20	21.05	21.02	21.10		
15	16QAM	36	39	21.07	21.04	21.08	22	2
15	16QAM	75	0	21.02	21.01	21.07		
15	64QAM	1	0	21.02	21.11	21.18		
15	64QAM	1	37	21.06	21.11	21.15	22	2
15	64QAM	1	74	21.16	21.15	21.31		
15	64QAM	36	0	20.03	20.05	20.08		
15	64QAM	36	20	20.08	20.06	20.12	21	3
15	64QAM	36	39	20.09	20.07	20.12		
15	64QAM	75	0	20.04	20.03	20.11		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.82	22.77	22.86	24	0
10	QPSK	1	25	22.82	22.84	22.97		
10	QPSK	1	49	22.85	22.90	23.02		
10	QPSK	25	0	21.87	21.88	21.89	23	1
10	QPSK	25	12	21.93	21.94	21.94		
10	QPSK	25	25	21.91	21.92	22.07		
10	QPSK	50	0	21.89	21.92	21.95	23	1
10	16QAM	1	0	22.04	22.07	22.20		
10	16QAM	1	25	22.14	22.10	22.31		
10	16QAM	1	49	22.17	22.18	22.32	22	2
10	16QAM	25	0	20.98	21.00	21.02		
10	16QAM	25	12	21.00	21.04	21.06		
10	16QAM	25	25	21.01	21.00	21.14	21	3
10	16QAM	50	0	21.01	21.00	21.07		
10	64QAM	1	0	21.01	21.02	21.11		
10	64QAM	1	25	21.08	21.11	21.26	22	2
10	64QAM	1	49	21.08	21.09	21.26		
10	64QAM	25	0	20.02	20.00	20.05		
10	64QAM	25	12	20.01	20.02	20.10	21	3
10	64QAM	25	25	20.00	20.05	20.16		
10	64QAM	50	0	19.99	20.03	20.06		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.80	22.77	22.94	24	0
5	QPSK	1	12	22.84	22.85	22.97		
5	QPSK	1	24	22.85	22.87	22.99		
5	QPSK	12	0	21.91	21.89	22.01	23	1
5	QPSK	12	7	21.94	21.94	22.07		
5	QPSK	12	13	21.91	21.91	22.05		
5	QPSK	25	0	21.90	21.92	22.01	23	1
5	16QAM	1	0	22.09	22.04	22.29		
5	16QAM	1	12	22.09	22.10	22.28		
5	16QAM	1	24	22.12	22.11	22.28	22	2
5	16QAM	12	0	20.95	20.93	21.12		
5	16QAM	12	7	21.00	21.04	21.17		
5	16QAM	12	13	20.99	20.95	21.18	22	2
5	16QAM	25	0	20.95	20.98	21.14		
5	64QAM	1	0	21.05	20.93	21.21		
5	64QAM	1	12	21.06	21.04	21.22	22	2
5	64QAM	1	24	21.02	21.09	21.24		
5	64QAM	12	0	19.97	19.95	20.15		
5	64QAM	12	7	20.02	19.98	20.21	21	3
5	64QAM	12	13	19.98	19.98	20.18		
5	64QAM	25	0	19.99	20.02	20.18		



<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On >

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.83	20.08	19.89	21	0
20	QPSK	1	49	19.77	19.82	19.87		
20	QPSK	1	99	19.73	19.70	19.76		
20	QPSK	50	0	19.89	19.97	19.95	21	0
20	QPSK	50	24	19.82	19.93	19.92		
20	QPSK	50	50	19.84	19.92	19.90		
20	QPSK	100	0	19.89	19.93	19.86	21	0
20	16QAM	1	0	19.94	19.93	20.00		
20	16QAM	1	49	19.90	19.85	20.00		
20	16QAM	1	99	19.90	19.73	19.98	21	0
20	16QAM	50	0	19.73	19.68	19.78		
20	16QAM	50	24	19.77	19.82	19.81		
20	16QAM	50	50	19.74	19.74	19.78	21	0
20	16QAM	100	0	19.79	19.77	19.75		
20	64QAM	1	0	19.84	19.87	19.88		
20	64QAM	1	49	19.76	19.75	19.91	21	0
20	64QAM	1	99	19.80	19.64	19.91		
20	64QAM	50	0	19.72	19.66	19.77		
20	64QAM	50	24	19.74	19.79	19.81	21	0
20	64QAM	50	50	19.73	19.72	19.77		
20	64QAM	100	0	19.80	19.77	19.75		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	19.78	19.88	19.91	21	0
15	QPSK	1	37	19.75	19.81	19.87		
15	QPSK	1	74	19.66	19.79	19.81		
15	QPSK	36	0	19.87	19.89	19.94	21	0
15	QPSK	36	20	19.83	20.02	19.96		
15	QPSK	36	39	19.80	19.96	19.89		
15	QPSK	75	0	19.82	19.95	19.92	21	0
15	16QAM	1	0	19.90	19.90	20.02		
15	16QAM	1	37	19.88	19.86	19.99		
15	16QAM	1	74	19.76	19.88	20.00	21	0
15	16QAM	36	0	19.69	19.68	19.81		
15	16QAM	36	20	19.73	19.81	19.83		
15	16QAM	36	39	19.64	19.75	19.80	21	0
15	16QAM	75	0	19.67	19.76	19.82		
15	64QAM	1	0	19.77	19.82	19.97		
15	64QAM	1	37	19.80	19.75	19.90	21	0
15	64QAM	1	74	19.70	19.76	19.89		
15	64QAM	36	0	19.67	19.66	19.80		
15	64QAM	36	20	19.72	19.81	19.82	21	0
15	64QAM	36	39	19.62	19.74	19.78		
15	64QAM	75	0	19.66	19.78	19.82		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	19.90	19.98	19.94	21	0
10	QPSK	1	25	19.77	19.85	19.90		
10	QPSK	1	49	19.78	19.93	19.85		
10	QPSK	25	0	19.85	19.89	19.95	21	0
10	QPSK	25	12	19.87	20.00	19.92		
10	QPSK	25	25	19.79	19.93	19.88		
10	QPSK	50	0	19.81	19.98	19.94	21	0
10	16QAM	1	0	19.96	20.00	20.04		
10	16QAM	1	25	19.89	19.89	20.05		
10	16QAM	1	49	19.93	20.01	20.03	21	0
10	16QAM	25	0	19.73	19.68	19.78		
10	16QAM	25	12	19.75	19.80	19.84		
10	16QAM	25	25	19.67	19.75	19.78	21	0
10	16QAM	50	0	19.72	19.78	19.79		
10	64QAM	1	0	19.90	19.88	19.93		
10	64QAM	1	25	19.78	19.79	19.94	21	0
10	64QAM	1	49	19.78	19.87	19.93		
10	64QAM	25	0	19.75	19.69	19.83		
10	64QAM	25	12	19.71	19.80	19.83	21	0
10	64QAM	25	25	19.67	19.73	19.76		
10	64QAM	50	0	19.71	19.76	19.76		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	19.81	19.86	19.84	21	0
5	QPSK	1	12	19.79	19.84	19.85		
5	QPSK	1	24	19.74	19.86	19.84		
5	QPSK	12	0	19.84	19.88	19.92	21	0
5	QPSK	12	7	19.87	19.93	19.95		
5	QPSK	12	13	19.81	19.94	19.87		
5	QPSK	25	0	19.82	19.95	19.90		
5	16QAM	1	0	19.92	19.89	20.04	21	0
5	16QAM	1	12	19.90	19.93	19.98		
5	16QAM	1	24	19.83	19.91	20.02		
5	16QAM	12	0	19.72	19.66	19.81	21	0
5	16QAM	12	7	19.72	19.70	19.84		
5	16QAM	12	13	19.68	19.75	19.80		
5	16QAM	25	0	19.70	19.75	19.77		
5	64QAM	1	0	19.80	19.78	19.89	21	0
5	64QAM	1	12	19.80	19.77	19.96		
5	64QAM	1	24	19.74	19.86	19.92		
5	64QAM	12	0	19.71	19.65	19.80	21	0
5	64QAM	12	7	19.67	19.67	19.83		
5	64QAM	12	13	19.65	19.74	19.77		
5	64QAM	25	0	19.70	19.76	19.79		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	19.75	19.76	19.79	21	0
3	QPSK	1	8	19.78	19.81	19.85		
3	QPSK	1	14	19.74	19.77	19.77		
3	QPSK	8	0	19.78	19.79	19.80	21	0
3	QPSK	8	4	19.83	19.84	19.86		
3	QPSK	8	7	19.79	19.77	19.84		
3	QPSK	15	0	19.78	19.78	19.82		
3	16QAM	1	0	19.85	19.85	20.01	21	0
3	16QAM	1	8	19.90	19.89	20.00		
3	16QAM	1	14	19.83	19.95	19.99		
3	16QAM	8	0	19.73	19.72	19.84	21	0
3	16QAM	8	4	19.76	19.75	19.90		
3	16QAM	8	7	19.72	19.80	19.84		
3	16QAM	15	0	19.71	19.75	19.80		
3	64QAM	1	0	19.77	19.76	19.93	21	0
3	64QAM	1	8	19.78	19.80	19.97		
3	64QAM	1	14	19.75	19.85	19.93		
3	64QAM	8	0	19.69	19.65	19.82	21	0
3	64QAM	8	4	19.71	19.71	19.86		
3	64QAM	8	7	19.67	19.74	19.78		
3	64QAM	15	0	19.68	19.74	19.78		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	19.55	19.56	19.59	21	0
1.4	QPSK	1	3	19.58	19.61	19.65		
1.4	QPSK	1	5	19.54	19.57	19.57		
1.4	QPSK	3	0	19.58	19.59	19.60		
1.4	QPSK	3	1	19.63	19.64	19.66		
1.4	QPSK	3	3	19.59	19.57	19.64		
1.4	QPSK	6	0	19.58	19.58	19.62	21	0
1.4	16QAM	1	0	19.87	19.80	19.94	21	0
1.4	16QAM	1	3	19.86	19.93	20.04		
1.4	16QAM	1	5	19.85	19.78	19.97		
1.4	16QAM	3	0	19.67	19.64	19.77		
1.4	16QAM	3	1	19.68	19.67	19.81		
1.4	16QAM	3	3	19.61	19.60	19.74		
1.4	16QAM	6	0	19.73	19.67	19.83	21	0
1.4	64QAM	1	0	19.71	19.77	19.89	21	0
1.4	64QAM	1	3	19.77	19.79	19.93		
1.4	64QAM	1	5	19.66	19.69	19.81		
1.4	64QAM	3	0	19.68	19.65	19.82		
1.4	64QAM	3	1	19.73	19.70	19.83		
1.4	64QAM	3	3	19.67	19.63	19.77		
1.4	64QAM	6	0	19.67	19.61	19.73	21	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	21.5	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	21.00	20.68	20.67	21.5	0
20	QPSK	1	49	20.55	20.61	20.55		
20	QPSK	1	99	20.51	20.46	20.50		
20	QPSK	50	0	20.77	20.71	20.69	21.5	0
20	QPSK	50	24	20.73	20.70	20.65		
20	QPSK	50	50	20.65	20.62	20.55		
20	QPSK	100	0	20.71	20.67	20.60	21.5	0
20	16QAM	1	0	20.98	20.95	20.99		
20	16QAM	1	49	20.91	20.89	20.85		
20	16QAM	1	99	20.81	20.82	20.71	21.5	0
20	16QAM	50	0	20.83	20.77	20.74		
20	16QAM	50	24	20.82	20.75	20.72		
20	16QAM	50	50	20.74	20.71	20.59	21.5	0
20	16QAM	100	0	20.77	20.68	20.62		
20	64QAM	1	0	20.97	20.87	20.87		
20	64QAM	1	49	20.82	20.81	20.78	21.5	0
20	64QAM	1	99	20.74	20.73	20.63		
20	64QAM	50	0	20.82	20.76	20.72		
20	64QAM	50	24	20.79	20.73	20.66	21.5	0
20	64QAM	50	50	20.70	20.69	20.57		
20	64QAM	100	0	20.77	20.70	20.63		
Channel				20025	20175	20325	21.5	0
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.72	20.70	20.62	21.5	0
15	QPSK	1	37	20.54	20.60	20.62		
15	QPSK	1	74	20.59	20.52	20.47		
15	QPSK	36	0	20.74	20.66	20.59	21.5	0
15	QPSK	36	20	20.71	20.70	20.59		
15	QPSK	36	39	20.69	20.63	20.63		
15	QPSK	75	0	20.68	20.65	20.60	21.5	0
15	16QAM	1	0	20.87	20.93	20.99		
15	16QAM	1	37	20.92	20.85	20.91		
15	16QAM	1	74	20.85	20.84	20.75	21.5	0
15	16QAM	36	0	20.80	20.73	20.69		
15	16QAM	36	20	20.79	20.73	20.66		
15	16QAM	36	39	20.74	20.67	20.66	21.5	0
15	16QAM	75	0	20.74	20.69	20.60		
15	64QAM	1	0	20.92	20.84	20.87		
15	64QAM	1	37	20.81	20.79	20.80	21.5	0
15	64QAM	1	74	20.76	20.76	20.67		
15	64QAM	36	0	20.78	20.72	20.69		
15	64QAM	36	20	20.78	20.73	20.65	21.5	0
15	64QAM	36	39	20.74	20.67	20.63		
15	64QAM	75	0	20.66	20.68	20.61		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.72	20.67	20.61	21.5	0
10	QPSK	1	25	20.57	20.64	20.62		
10	QPSK	1	49	20.49	20.55	20.55		
10	QPSK	25	0	20.73	20.68	20.59	21.5	0
10	QPSK	25	12	20.74	20.68	20.68		
10	QPSK	25	25	20.55	20.62	20.64		
10	QPSK	50	0	20.70	20.66	20.58	21.5	0
10	16QAM	1	0	20.96	20.92	20.91		
10	16QAM	1	25	20.99	20.92	20.92		
10	16QAM	1	49	20.90	20.89	20.77	21.5	0
10	16QAM	25	0	20.82	20.75	20.68		
10	16QAM	25	12	20.80	20.75	20.76		
10	16QAM	25	25	20.67	20.68	20.68	21.5	0
10	16QAM	50	0	20.80	20.74	20.62		
10	64QAM	1	0	20.92	20.82	20.81		
10	64QAM	1	25	20.86	20.81	20.83	21.5	0
10	64QAM	1	49	20.79	20.80	20.68		
10	64QAM	25	0	20.80	20.73	20.67		
10	64QAM	25	12	20.79	20.73	20.74	21.5	0
10	64QAM	25	25	20.55	20.68	20.68		
10	64QAM	50	0	20.78	20.72	20.63		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.70	20.63	20.63	21.5	0
5	QPSK	1	12	20.68	20.63	20.61		
5	QPSK	1	24	20.49	20.56	20.53		
5	QPSK	12	0	20.75	20.67	20.64	21.5	0
5	QPSK	12	7	20.77	20.67	20.68		
5	QPSK	12	13	20.73	20.62	20.64		
5	QPSK	25	0	20.74	20.66	20.67	21.5	0
5	16QAM	1	0	20.92	20.85	20.88		
5	16QAM	1	12	20.98	20.93	20.87		
5	16QAM	1	24	20.92	20.84	20.75	21.5	0
5	16QAM	12	0	20.80	20.70	20.69		
5	16QAM	12	7	20.82	20.70	20.69		
5	16QAM	12	13	20.78	20.67	20.61	21.5	0
5	16QAM	25	0	20.78	20.71	20.70		
5	64QAM	1	0	20.89	20.83	20.78		
5	64QAM	1	12	20.89	20.79	20.78	21.5	0
5	64QAM	1	24	20.80	20.73	20.66		
5	64QAM	12	0	20.76	20.71	20.67		
5	64QAM	12	7	20.82	20.72	20.67	21.5	0
5	64QAM	12	13	20.75	20.65	20.63		
5	64QAM	25	0	20.76	20.71	20.71		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.68	20.64	20.60	21.5	0
3	QPSK	1	8	20.68	20.64	20.60		
3	QPSK	1	14	20.65	20.58	20.55		
3	QPSK	8	0	20.75	20.64	20.63	21.5	0
3	QPSK	8	4	20.72	20.70	20.63		
3	QPSK	8	7	20.72	20.68	20.61		
3	QPSK	15	0	20.72	20.68	20.65		
3	16QAM	1	0	20.95	20.84	20.84	21.5	0
3	16QAM	1	8	20.98	20.87	20.85		
3	16QAM	1	14	20.94	20.84	20.82		
3	16QAM	8	0	20.77	20.74	20.71	21.5	0
3	16QAM	8	4	20.82	20.78	20.73		
3	16QAM	8	7	20.79	20.73	20.67		
3	16QAM	15	0	20.79	20.74	20.73		
3	64QAM	1	0	20.84	20.76	20.71	21.5	0
3	64QAM	1	8	20.88	20.80	20.74		
3	64QAM	1	14	20.86	20.77	20.69		
3	64QAM	8	0	20.74	20.71	20.65	21.5	0
3	64QAM	8	4	20.77	20.74	20.70		
3	64QAM	8	7	20.75	20.71	20.64		
3	64QAM	15	0	20.80	20.69	20.67		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	20.63	20.57	20.53	21.5	0
1.4	QPSK	1	3	20.71	20.65	20.59		
1.4	QPSK	1	5	20.61	20.57	20.52		
1.4	QPSK	3	0	20.65	20.59	20.57		
1.4	QPSK	3	1	20.72	20.64	20.60		
1.4	QPSK	3	3	20.66	20.61	20.54		
1.4	QPSK	6	0	20.69	20.62	20.60	21.5	0
1.4	16QAM	1	0	20.85	20.83	20.77	21.5	0
1.4	16QAM	1	3	20.99	20.91	20.85		
1.4	16QAM	1	5	20.89	20.82	20.73		
1.4	16QAM	3	0	20.71	20.63	20.57		
1.4	16QAM	3	1	20.77	20.70	20.64		
1.4	16QAM	3	3	20.66	20.64	20.57	21.5	0
1.4	16QAM	6	0	20.79	20.76	20.68	21.5	0
1.4	64QAM	1	0	20.81	20.73	20.72	21.5	0
1.4	64QAM	1	3	20.85	20.82	20.72		
1.4	64QAM	1	5	20.82	20.77	20.69		
1.4	64QAM	3	0	20.72	20.70	20.60		
1.4	64QAM	3	1	20.80	20.74	20.67		
1.4	64QAM	3	3	20.72	20.65	20.64		
1.4	64QAM	6	0	20.76	20.65	20.64	21.5	0



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.07	21.45	21.11	22.5	0
10	QPSK	1	25	21.11	21.12	21.12		
10	QPSK	1	49	21.14	21.08	21.06		
10	QPSK	25	0	21.20	21.21	21.11	22.5	0
10	QPSK	25	12	21.15	21.18	21.07		
10	QPSK	25	25	21.18	21.20	21.10		
10	QPSK	50	0	21.24	21.18	21.09	22.5	0
10	16QAM	1	0	21.38	21.43	21.40		
10	16QAM	1	25	21.39	21.40	21.42		
10	16QAM	1	49	21.38	21.38	21.40	22.5	0
10	16QAM	25	0	20.73	20.81	20.70		
10	16QAM	25	12	20.78	20.78	20.71		
10	16QAM	25	25	20.79	20.75	20.70	22.5	0
10	16QAM	50	0	20.86	20.76	20.66		
10	64QAM	1	0	21.26	21.34	21.35		
10	64QAM	1	25	21.34	21.36	21.39	22.5	0
10	64QAM	1	49	21.36	21.31	21.30		
10	64QAM	25	0	20.75	20.78	20.70		
10	64QAM	25	12	20.73	20.77	20.71	22.5	0
10	64QAM	25	25	20.80	20.73	20.70		
10	64QAM	50	0	20.80	20.74	20.65		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.04	21.16	21.13	22.5	0
5	QPSK	1	12	21.12	21.11	21.04		
5	QPSK	1	24	21.09	21.06	21.04		
5	QPSK	12	0	21.20	21.18	21.16	22.5	0
5	QPSK	12	7	21.19	21.18	21.16		
5	QPSK	12	13	21.15	21.13	21.08		
5	QPSK	25	0	21.14	21.16	21.14	22.5	0
5	16QAM	1	0	21.36	21.34	21.39		
5	16QAM	1	12	21.42	21.43	21.40		
5	16QAM	1	24	21.39	21.38	21.37	22.5	0
5	16QAM	12	0	20.76	20.79	20.72		
5	16QAM	12	7	20.80	20.79	20.72		
5	16QAM	12	13	20.70	20.74	20.69	22.5	0
5	16QAM	25	0	20.75	20.75	20.71		
5	64QAM	1	0	21.27	21.37	21.40		
5	64QAM	1	12	21.34	21.42	21.34	22.5	0
5	64QAM	1	24	21.28	21.33	21.28		
5	64QAM	12	0	20.71	20.77	20.71		
5	64QAM	12	7	20.77	20.78	20.71	22.5	0
5	64QAM	12	13	20.69	20.72	20.68		
5	64QAM	25	0	20.76	20.74	20.71		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	21.04	21.12	21.06	22.5	0
3	QPSK	1	8	21.11	21.08	21.07		
3	QPSK	1	14	21.07	21.09	21.05		
3	QPSK	8	0	21.16	21.11	21.09	22.5	0
3	QPSK	8	4	21.17	21.15	21.13		
3	QPSK	8	7	21.15	21.13	21.10		
3	QPSK	15	0	21.16	21.15	21.08		
3	16QAM	1	0	21.33	21.43	21.42	22.5	0
3	16QAM	1	8	21.43	21.42	21.43		
3	16QAM	1	14	21.41	21.41	21.38		
3	16QAM	8	0	20.75	20.76	20.73	22.5	0
3	16QAM	8	4	20.81	20.82	20.73		
3	16QAM	8	7	20.73	20.76	20.73		
3	16QAM	15	0	20.77	20.75	20.70		
3	64QAM	1	0	21.19	21.33	21.29	22.5	0
3	64QAM	1	8	21.31	21.34	21.34		
3	64QAM	1	14	21.33	21.34	21.30		
3	64QAM	8	0	20.72	20.71	20.65	22.5	0
3	64QAM	8	4	20.78	20.77	20.69		
3	64QAM	8	7	20.69	20.76	20.68		
3	64QAM	15	0	20.71	20.73	20.68		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	20.93	21.01	20.96	22.5	0
1.4	QPSK	1	3	21.00	21.09	21.05		
1.4	QPSK	1	5	21.05	21.00	20.97		
1.4	QPSK	3	0	20.98	21.06	21.02		
1.4	QPSK	3	1	21.04	21.10	21.06		
1.4	QPSK	3	3	21.09	21.08	21.01		
1.4	QPSK	6	0	21.07	21.07	21.00	22.5	0
1.4	16QAM	1	0	21.28	21.42	21.36	22.5	0
1.4	16QAM	1	3	21.32	21.43	21.40		
1.4	16QAM	1	5	21.35	21.36	21.31		
1.4	16QAM	3	0	21.06	21.17	21.11		
1.4	16QAM	3	1	21.11	21.20	21.16		
1.4	16QAM	3	3	21.16	21.17	21.09	22.5	0
1.4	16QAM	6	0	20.75	20.70	20.67	22.5	0
1.4	64QAM	1	0	21.18	21.30	21.23	22.5	0
1.4	64QAM	1	3	21.21	21.36	21.32		
1.4	64QAM	1	5	21.26	21.26	21.21		
1.4	64QAM	3	0	21.12	21.21	21.15		
1.4	64QAM	3	1	21.15	21.22	21.21		
1.4	64QAM	3	3	21.19	21.19	21.14		
1.4	64QAM	6	0	20.68	20.65	20.60	22.5	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	17.99	18.10	17.94	19.5	0
20	QPSK	1	49	17.83	17.94	17.94		
20	QPSK	1	99	17.97	17.93	18.09		
20	QPSK	50	0	18.01	18.05	18.02	19.5	0
20	QPSK	50	24	17.92	17.95	18.00		
20	QPSK	50	50	18.00	17.97	17.99		
20	QPSK	100	0	17.99	18.02	18.01	19.5	0
20	16QAM	1	0	17.91	17.95	18.02		
20	16QAM	1	49	17.91	18.00	18.05		
20	16QAM	1	99	18.07	18.02	18.08	19.5	0
20	16QAM	50	0	17.72	17.74	17.80		
20	16QAM	50	24	17.74	17.79	17.84		
20	16QAM	50	50	17.83	17.81	17.84	19.5	0
20	16QAM	100	0	17.83	17.76	17.83		
20	64QAM	1	0	17.78	17.89	17.91		
20	64QAM	1	49	17.83	17.85	17.96	19.5	0
20	64QAM	1	99	17.97	17.92	18.08		
20	64QAM	50	0	17.67	17.72	17.78		
20	64QAM	50	24	17.70	17.77	17.83	19.5	0
20	64QAM	50	50	17.82	17.79	17.82		
20	64QAM	100	0	17.82	17.75	17.86		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.87	17.93	17.99	19.5	0
15	QPSK	1	37	17.87	17.89	17.96		
15	QPSK	1	74	17.97	17.99	18.04		
15	QPSK	36	0	17.93	17.95	18.03	19.5	0
15	QPSK	36	20	17.96	18.01	18.07		
15	QPSK	36	39	17.94	17.99	18.04		
15	QPSK	75	0	17.95	18.01	18.02	19.5	0
15	16QAM	1	0	17.93	18.03	18.06		
15	16QAM	1	37	17.96	17.99	18.04		
15	16QAM	1	74	18.04	18.04	18.07	19.5	0
15	16QAM	36	0	17.71	17.79	17.80		
15	16QAM	36	20	17.75	17.79	17.87		
15	16QAM	36	39	17.75	17.78	17.86	19.5	0
15	16QAM	75	0	17.78	17.77	17.87		
15	64QAM	1	0	17.81	17.91	17.93		
15	64QAM	1	37	17.85	17.88	17.92	19.5	0
15	64QAM	1	74	17.92	17.93	17.95		
15	64QAM	36	0	17.70	17.78	17.82		
15	64QAM	36	20	17.78	17.80	17.88	19.5	0
15	64QAM	36	39	17.73	17.79	17.85		
15	64QAM	75	0	17.74	17.78	17.87		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.86	17.80	17.96	19.5	0
10	QPSK	1	25	17.88	17.92	18.02		
10	QPSK	1	49	17.89	17.96	18.08		
10	QPSK	25	0	17.90	17.94	17.98	19.5	0
10	QPSK	25	12	17.93	17.94	17.99		
10	QPSK	25	25	17.93	17.96	18.08		
10	QPSK	50	0	17.90	17.97	17.98	19.5	0
10	16QAM	1	0	17.89	17.89	18.03		
10	16QAM	1	25	17.93	18.00	18.03		
10	16QAM	1	49	17.95	18.03	17.95	19.5	0
10	16QAM	25	0	17.70	17.71	17.78		
10	16QAM	25	12	17.72	17.75	17.81		
10	16QAM	25	25	17.72	17.78	17.91	19.5	0
10	16QAM	50	0	17.70	17.76	17.79		
10	64QAM	1	0	17.81	17.82	17.93		
10	64QAM	1	25	17.80	17.89	18.05	19.5	0
10	64QAM	1	49	17.85	17.92	18.06		
10	64QAM	25	0	17.71	17.72	17.79		
10	64QAM	25	12	17.71	17.76	17.81	19.5	0
10	64QAM	25	25	17.72	17.75	17.91		
10	64QAM	50	0	17.68	17.75	17.79		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	17.85	17.80	18.04	19.5	0
5	QPSK	1	12	17.89	17.93	18.02		
5	QPSK	1	24	17.88	17.91	18.04		
5	QPSK	12	0	17.91	17.96	18.06	19.5	0
5	QPSK	12	7	17.97	17.99	18.09		
5	QPSK	12	13	17.94	17.97	18.01		
5	QPSK	25	0	17.92	17.92	18.05	19.5	0
5	16QAM	1	0	17.88	17.89	18.08		
5	16QAM	1	12	17.91	17.92	17.94		
5	16QAM	1	24	17.96	18.01	18.02	19.5	0
5	16QAM	12	0	17.71	17.74	17.88		
5	16QAM	12	7	17.74	17.77	17.95		
5	16QAM	12	13	17.74	17.78	17.93	19.5	0
5	16QAM	25	0	17.71	17.72	17.89		
5	64QAM	1	0	17.82	17.78	18.03		
5	64QAM	1	12	17.82	17.84	17.99	19.5	0
5	64QAM	1	24	17.86	17.87	18.05		
5	64QAM	12	0	17.68	17.71	17.87		
5	64QAM	12	7	17.73	17.78	17.92	19.5	0
5	64QAM	12	13	17.71	17.77	17.91		
5	64QAM	25	0	17.69	17.74	17.86		



<WWAN Bottom Antenna --Reduced Power for Hotspot On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.35	18.57	18.31	19.5	0
20	QPSK	1	49	18.15	18.14	18.22		
20	QPSK	1	99	18.29	18.23	18.13		
20	QPSK	50	0	18.26	18.34	18.33	19.5	0
20	QPSK	50	24	18.24	18.32	18.29		
20	QPSK	50	50	18.21	18.25	18.23		
20	QPSK	100	0	18.29	18.31	18.19	19.5	0
20	16QAM	1	0	18.56	18.50	18.50		
20	16QAM	1	49	18.48	18.51	18.54		
20	16QAM	1	99	18.46	18.43	18.53	19.5	0
20	16QAM	50	0	18.36	18.37	18.30		
20	16QAM	50	24	18.37	18.42	18.37		
20	16QAM	50	50	18.33	18.37	18.33	19.5	0
20	16QAM	100	0	18.39	18.39	18.26		
20	64QAM	1	0	18.50	18.49	18.42		
20	64QAM	1	49	18.41	18.41	18.45	19.5	0
20	64QAM	1	99	18.35	18.32	18.38		
20	64QAM	50	0	18.33	18.38	18.28		
20	64QAM	50	24	18.30	18.41	18.36	19.5	0
20	64QAM	50	50	18.34	18.35	18.31		
20	64QAM	100	0	18.41	18.40	18.26		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.20	18.19	18.28	19.5	0
15	QPSK	1	37	18.12	18.17	18.22		
15	QPSK	1	74	17.99	18.15	18.14		
15	QPSK	36	0	18.20	18.20	18.29	19.5	0
15	QPSK	36	20	18.21	18.31	18.29		
15	QPSK	36	39	18.11	18.27	18.25		
15	QPSK	75	0	18.21	18.29	18.27		
15	16QAM	1	0	18.53	18.54	18.52	19.5	0
15	16QAM	1	37	18.52	18.53	18.53		
15	16QAM	1	74	18.40	18.49	18.51		
15	16QAM	36	0	18.32	18.32	18.35	19.5	0
15	16QAM	36	20	18.33	18.43	18.40		
15	16QAM	36	39	18.22	18.37	18.32		
15	16QAM	75	0	18.33	18.40	18.38		
15	64QAM	1	0	18.45	18.44	18.54	19.5	0
15	64QAM	1	37	18.41	18.42	18.47		
15	64QAM	1	74	18.24	18.43	18.38		
15	64QAM	36	0	18.30	18.31	18.40	19.5	0
15	64QAM	36	20	18.31	18.42	18.40		
15	64QAM	36	39	18.24	18.36	18.31		
15	64QAM	75	0	18.32	18.39	18.37		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.32	18.31	18.30	19.5	0
10	QPSK	1	25	18.17	18.18	18.26		
10	QPSK	1	49	18.17	18.26	18.20		
10	QPSK	25	0	18.23	18.23	18.30	19.5	0
10	QPSK	25	12	18.24	18.34	18.29		
10	QPSK	25	25	18.16	18.27	18.22		
10	QPSK	50	0	18.20	18.32	18.25		
10	16QAM	1	0	18.50	18.55	18.52	19.5	0
10	16QAM	1	25	18.53	18.48	18.50		
10	16QAM	1	49	18.51	18.53	18.53		
10	16QAM	25	0	18.36	18.37	18.37	19.5	0
10	16QAM	25	12	18.35	18.46	18.37		
10	16QAM	25	25	18.29	18.39	18.31		
10	16QAM	50	0	18.32	18.44	18.33		
10	64QAM	1	0	18.56	18.54	18.50	19.5	0
10	64QAM	1	25	18.46	18.44	18.50		
10	64QAM	1	49	18.43	18.55	18.45		
10	64QAM	25	0	18.34	18.35	18.36	19.5	0
10	64QAM	25	12	18.35	18.44	18.36		
10	64QAM	25	25	18.29	18.37	18.30		
10	64QAM	50	0	18.30	18.42	18.32		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.22	18.19	18.22	19.5	0
5	QPSK	1	12	18.23	18.18	18.25		
5	QPSK	1	24	18.15	18.23	18.19		
5	QPSK	12	0	18.26	18.25	18.28	19.5	0
5	QPSK	12	7	18.24	18.26	18.30		
5	QPSK	12	13	18.22	18.30	18.25		
5	QPSK	25	0	18.21	18.32	18.22		
5	16QAM	1	0	18.56	18.53	18.52	19.5	0
5	16QAM	1	12	18.53	18.51	18.48		
5	16QAM	1	24	18.45	18.50	18.53		
5	16QAM	12	0	18.34	18.37	18.34	19.5	0
5	16QAM	12	7	18.36	18.34	18.39		
5	16QAM	12	13	18.32	18.42	18.36		
5	16QAM	25	0	18.30	18.40	18.37		
5	64QAM	1	0	18.50	18.46	18.49	19.5	0
5	64QAM	1	12	18.47	18.46	18.53		
5	64QAM	1	24	18.37	18.47	18.41		
5	64QAM	12	0	18.34	18.31	18.32	19.5	0
5	64QAM	12	7	18.34	18.35	18.37		
5	64QAM	12	13	18.29	18.38	18.32		
5	64QAM	25	0	18.30	18.37	18.34		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.20	18.19	18.25	19.5	0
3	QPSK	1	8	18.17	18.17	18.23		
3	QPSK	1	14	18.17	18.24	18.18		
3	QPSK	8	0	18.24	18.24	18.24	19.5	0
3	QPSK	8	4	18.25	18.22	18.27		
3	QPSK	8	7	18.23	18.30	18.25		
3	QPSK	15	0	18.19	18.31	18.26		
3	16QAM	1	0	18.56	18.49	18.55	19.5	0
3	16QAM	1	8	18.56	18.56	18.53		
3	16QAM	1	14	18.47	18.52	18.55		
3	16QAM	8	0	18.37	18.35	18.39	19.5	0
3	16QAM	8	4	18.40	18.39	18.45		
3	16QAM	8	7	18.35	18.44	18.37		
3	16QAM	15	0	18.32	18.42	18.37		
3	64QAM	1	0	18.44	18.41	18.46	19.5	0
3	64QAM	1	8	18.46	18.45	18.53		
3	64QAM	1	14	18.40	18.51	18.47		
3	64QAM	8	0	18.33	18.33	18.38	19.5	0
3	64QAM	8	4	18.38	18.35	18.41		
3	64QAM	8	7	18.29	18.40	18.33		
3	64QAM	15	0	18.30	18.38	18.34		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.16	18.12	18.15	19.5	0
1.4	QPSK	1	3	18.21	18.17	18.23		
1.4	QPSK	1	5	18.13	18.09	18.11		
1.4	QPSK	3	0	18.18	18.13	18.16		
1.4	QPSK	3	1	18.21	18.20	18.23		
1.4	QPSK	3	3	18.19	18.13	18.20		
1.4	QPSK	6	0	18.18	18.11	18.17	19.5	0
1.4	16QAM	1	0	18.49	18.50	18.52	19.5	0
1.4	16QAM	1	3	18.56	18.56	18.50		
1.4	16QAM	1	5	18.51	18.46	18.45		
1.4	16QAM	3	0	18.32	18.26	18.31		
1.4	16QAM	3	1	18.36	18.34	18.33		
1.4	16QAM	3	3	18.29	18.26	18.29		
1.4	16QAM	6	0	18.36	18.30	18.32	19.5	0
1.4	64QAM	1	0	18.44	18.40	18.33	19.5	0
1.4	64QAM	1	3	18.47	18.42	18.54		
1.4	64QAM	1	5	18.39	18.32	18.40		
1.4	64QAM	3	0	18.37	18.29	18.34		
1.4	64QAM	3	1	18.38	18.36	18.35		
1.4	64QAM	3	3	18.34	18.31	18.31		
1.4	64QAM	6	0	18.30	18.24	18.28	19.5	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	20	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.05	18.76	18.72		
20	QPSK	1	49	18.61	18.69	18.68	20	0
20	QPSK	1	99	18.61	18.58	18.60		
20	QPSK	50	0	18.84	18.75	18.70		
20	QPSK	50	24	18.79	18.75	18.67	20	0
20	QPSK	50	50	18.73	18.66	18.65		
20	QPSK	100	0	18.76	18.73	18.66		
20	16QAM	1	0	19.00	19.01	19.01	20	0
20	16QAM	1	49	19.04	18.99	19.00		
20	16QAM	1	99	18.99	18.89	18.93		
20	16QAM	50	0	18.89	18.86	18.79	20	0
20	16QAM	50	24	18.89	18.85	18.76		
20	16QAM	50	50	18.83	18.77	18.67		
20	16QAM	100	0	18.85	18.82	18.74	20	0
20	64QAM	1	0	18.99	19.02	18.92		
20	64QAM	1	49	18.92	18.94	18.88		
20	64QAM	1	99	18.88	18.81	18.81	20	0
20	64QAM	50	0	18.90	18.85	18.77		
20	64QAM	50	24	18.88	18.84	18.74		
20	64QAM	50	50	18.80	18.76	18.66	20	0
20	64QAM	100	0	18.85	18.78	18.74		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	18.80	18.75	18.69	20	0
15	QPSK	1	37	18.59	18.69	18.73		
15	QPSK	1	74	18.60	18.60	18.60		
15	QPSK	36	0	18.81	18.74	18.72	20	0
15	QPSK	36	20	18.81	18.77	18.69		
15	QPSK	36	39	18.75	18.66	18.75		
15	QPSK	75	0	18.78	18.72	18.66	20	0
15	16QAM	1	0	19.02	19.01	19.03		
15	16QAM	1	37	18.96	19.02	19.04		
15	16QAM	1	74	19.02	18.92	18.93	20	0
15	16QAM	36	0	18.85	18.84	18.75		
15	16QAM	36	20	18.92	18.86	18.78		
15	16QAM	36	39	18.83	18.76	18.76	20	0
15	16QAM	75	0	18.85	18.79	18.76		
15	64QAM	1	0	19.03	18.96	18.92		
15	64QAM	1	37	18.84	18.92	18.97	20	0
15	64QAM	1	74	18.88	18.79	18.83		
15	64QAM	36	0	18.86	18.85	18.78		
15	64QAM	36	20	18.90	18.84	18.78	20	0
15	64QAM	36	39	18.80	18.76	18.75		
15	64QAM	75	0	18.84	18.80	18.76		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	18.79	18.75	18.67	20	0
10	QPSK	1	25	18.64	18.73	18.73		
10	QPSK	1	49	18.53	18.64	18.63		
10	QPSK	25	0	18.81	18.74	18.67	20	0
10	QPSK	25	12	18.79	18.75	18.79		
10	QPSK	25	25	18.60	18.68	18.73		
10	QPSK	50	0	18.77	18.71	18.66		
10	16QAM	1	0	18.99	19.01	19.00	20	0
10	16QAM	1	25	18.98	19.04	19.00		
10	16QAM	1	49	18.96	18.96	18.97		
10	16QAM	25	0	18.87	18.80	18.77	20	0
10	16QAM	25	12	18.88	18.83	18.84		
10	16QAM	25	25	18.71	18.78	18.78		
10	16QAM	50	0	18.82	18.81	18.76		
10	64QAM	1	0	19.01	18.97	18.92	20	0
10	64QAM	1	25	18.91	18.91	18.99		
10	64QAM	1	49	18.85	18.85	18.86		
10	64QAM	25	0	18.85	18.80	18.77	20	0
10	64QAM	25	12	18.86	18.82	18.83		
10	64QAM	25	25	18.70	18.77	18.76		
10	64QAM	50	0	18.81	18.79	18.74		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	18.76	18.69	18.70	20	0
5	QPSK	1	12	18.76	18.67	18.71		
5	QPSK	1	24	18.57	18.63	18.64		
5	QPSK	12	0	18.78	18.74	18.75	20	0
5	QPSK	12	7	18.83	18.75	18.76		
5	QPSK	12	13	18.76	18.72	18.70		
5	QPSK	25	0	18.75	18.72	18.72		
5	16QAM	1	0	19.04	19.01	19.02	20	0
5	16QAM	1	12	19.03	19.04	19.04		
5	16QAM	1	24	18.98	18.98	18.95		
5	16QAM	12	0	18.87	18.78	18.83	20	0
5	16QAM	12	7	18.87	18.85	18.84		
5	16QAM	12	13	18.86	18.76	18.78		
5	16QAM	25	0	18.84	18.79	18.79		
5	64QAM	1	0	18.95	18.92	18.93	20	0
5	64QAM	1	12	18.98	18.91	18.93		
5	64QAM	1	24	18.80	18.90	18.88		
5	64QAM	12	0	18.83	18.77	18.81	20	0
5	64QAM	12	7	18.86	18.82	18.81		
5	64QAM	12	13	18.84	18.74	18.75		
5	64QAM	25	0	18.84	18.80	18.78		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	18.74	18.66	18.71	20	0
3	QPSK	1	8	18.74	18.72	18.72		
3	QPSK	1	14	18.72	18.65	18.65		
3	QPSK	8	0	18.82	18.71	18.76	20	0
3	QPSK	8	4	18.82	18.73	18.75		
3	QPSK	8	7	18.77	18.71	18.72		
3	QPSK	15	0	18.80	18.72	18.73		
3	16QAM	1	0	19.02	19.00	19.02	20	0
3	16QAM	1	8	19.02	18.96	19.01		
3	16QAM	1	14	19.00	18.95	19.00		
3	16QAM	8	0	18.88	18.81	18.87	20	0
3	16QAM	8	4	18.94	18.86	18.85		
3	16QAM	8	7	18.89	18.83	18.84		
3	16QAM	15	0	18.83	18.82	18.81		
3	64QAM	1	0	18.95	18.92	18.92	20	0
3	64QAM	1	8	18.97	18.93	18.89		
3	64QAM	1	14	18.92	18.85	18.89		
3	64QAM	8	0	18.87	18.77	18.82	20	0
3	64QAM	8	4	18.89	18.83	18.81		
3	64QAM	8	7	18.83	18.80	18.79		
3	64QAM	15	0	18.82	18.78	18.79		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	18.68	18.63	18.64	20	0
1.4	QPSK	1	3	18.73	18.68	18.68		
1.4	QPSK	1	5	18.67	18.59	18.60		
1.4	QPSK	3	0	18.73	18.66	18.65		
1.4	QPSK	3	1	18.74	18.68	18.71		
1.4	QPSK	3	3	18.76	18.64	18.68		
1.4	QPSK	6	0	18.72	18.65	18.66	20	0
1.4	16QAM	1	0	18.96	18.99	18.96	20	0
1.4	16QAM	1	3	19.03	19.00	19.03		
1.4	16QAM	1	5	18.96	18.94	18.91		
1.4	16QAM	3	0	18.80	18.77	18.73		
1.4	16QAM	3	1	18.82	18.79	18.77		
1.4	16QAM	3	3	18.78	18.73	18.71	20	0
1.4	16QAM	6	0	18.86	18.81	18.77	20	0
1.4	64QAM	1	0	18.92	18.88	18.87	20	0
1.4	64QAM	1	3	18.99	18.91	18.91		
1.4	64QAM	1	5	18.88	18.84	18.82		
1.4	64QAM	3	0	18.85	18.80	18.77		
1.4	64QAM	3	1	18.86	18.82	18.80		
1.4	64QAM	3	3	18.82	18.75	18.75		
1.4	64QAM	6	0	18.76	18.73	18.70	20	0



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	20.60	20.85	20.59	21.5	0
20	QPSK	1	49	20.48	20.47	20.52		
20	QPSK	1	99	20.46	20.39	20.55		
20	QPSK	50	0	20.55	20.62	20.59	21.5	0
20	QPSK	50	24	20.45	20.48	20.46		
20	QPSK	50	50	20.52	20.46	20.49		
20	QPSK	100	0	20.43	20.45	20.37	21.5	0
20	16QAM	1	0	20.71	20.76	20.80		
20	16QAM	1	49	20.78	20.69	20.83		
20	16QAM	1	99	20.81	20.83	20.80	21.5	0
20	16QAM	50	0	20.52	20.55	20.60		
20	16QAM	50	24	20.57	20.58	20.61		
20	16QAM	50	50	20.64	20.57	20.63	21.5	0
20	16QAM	100	0	20.62	20.57	20.60		
20	64QAM	1	0	20.61	20.62	20.68		
20	64QAM	1	49	20.68	20.61	20.74	21.5	0
20	64QAM	1	99	20.78	20.67	20.78		
20	64QAM	50	0	20.50	20.54	20.59		
20	64QAM	50	24	20.54	20.57	20.60	21.5	0
20	64QAM	50	50	20.66	20.55	20.61		
20	64QAM	100	0	20.63	20.57	20.61		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	20.38	20.38	20.41	21.5	0
15	QPSK	1	37	20.36	20.35	20.38		
15	QPSK	1	74	20.44	20.42	20.64		
15	QPSK	36	0	20.40	20.41	20.45	21.5	0
15	QPSK	36	20	20.41	20.49	20.49		
15	QPSK	36	39	20.42	20.43	20.45		
15	QPSK	75	0	20.43	20.45	20.47	21.5	0
15	16QAM	1	0	20.74	20.75	20.84		
15	16QAM	1	37	20.77	20.68	20.76		
15	16QAM	1	74	20.81	20.83	20.81	21.5	0
15	16QAM	36	0	20.51	20.52	20.59		
15	16QAM	36	20	20.60	20.56	20.63		
15	16QAM	36	39	20.54	20.53	20.64	21.5	0
15	16QAM	75	0	20.55	20.55	20.61		
15	64QAM	1	0	20.66	20.67	20.72		
15	64QAM	1	37	20.66	20.59	20.74	21.5	0
15	64QAM	1	74	20.61	20.67	20.62		
15	64QAM	36	0	20.51	20.52	20.61		
15	64QAM	36	20	20.59	20.55	20.60	21.5	0
15	64QAM	36	39	20.55	20.53	20.62		
15	64QAM	75	0	20.53	20.55	20.60		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	20.35	20.25	20.35	21.5	0
10	QPSK	1	25	20.34	20.34	20.50		
10	QPSK	1	49	20.38	20.37	20.50		
10	QPSK	25	0	20.41	20.42	20.40	21.5	0
10	QPSK	25	12	20.43	20.44	20.43		
10	QPSK	25	25	20.42	20.40	20.56		
10	QPSK	50	0	20.41	20.40	20.43	21.5	0
10	16QAM	1	0	20.67	20.58	20.74		
10	16QAM	1	25	20.62	20.71	20.70		
10	16QAM	1	49	20.78	20.70	20.72	21.5	0
10	16QAM	25	0	20.48	20.54	20.56		
10	16QAM	25	12	20.54	20.54	20.57		
10	16QAM	25	25	20.55	20.50	20.65	21.5	0
10	16QAM	50	0	20.42	20.52	20.56		
10	64QAM	1	0	20.53	20.49	20.66		
10	64QAM	1	25	20.57	20.61	20.78	21.5	0
10	64QAM	1	49	20.56	20.63	20.83		
10	64QAM	25	0	20.39	20.49	20.55		
10	64QAM	25	12	20.45	20.54	20.58	21.5	0
10	64QAM	25	25	20.42	20.51	20.66		
10	64QAM	50	0	20.52	20.49	20.53		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	20.33	20.24	20.47	21.5	0
5	QPSK	1	12	20.34	20.33	20.48		
5	QPSK	1	24	20.38	20.35	20.49		
5	QPSK	12	0	20.38	20.37	20.51	21.5	0
5	QPSK	12	7	20.42	20.43	20.58		
5	QPSK	12	13	20.40	20.39	20.55		
5	QPSK	25	0	20.36	20.39	20.53	21.5	0
5	16QAM	1	0	20.70	20.60	20.84		
5	16QAM	1	12	20.73	20.68	20.79		
5	16QAM	1	24	20.69	20.69	20.65	21.5	0
5	16QAM	12	0	20.39	20.47	20.64		
5	16QAM	12	7	20.45	20.53	20.70		
5	16QAM	12	13	20.43	20.49	20.71	21.5	0
5	16QAM	25	0	20.40	20.49	20.63		
5	64QAM	1	0	20.52	20.46	20.76		
5	64QAM	1	12	20.52	20.59	20.76	21.5	0
5	64QAM	1	24	20.53	20.59	20.84		
5	64QAM	12	0	20.36	20.45	20.61		
5	64QAM	12	7	20.48	20.52	20.67	21.5	0
5	64QAM	12	13	20.50	20.48	20.67		
5	64QAM	25	0	20.42	20.51	20.64		



<WWAN Bottom Antenna --Reduced Power for Handheld>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.71	21.75	21.71	23	0
20	QPSK	1	49	21.61	21.66	21.72		
20	QPSK	1	99	21.61	21.51	21.62		
20	QPSK	50	0	21.71	21.82	21.73	23	0
20	QPSK	50	24	21.68	21.81	21.81		
20	QPSK	50	50	21.73	21.70	21.76		
20	QPSK	100	0	21.79	21.80	21.67	23	0
20	16QAM	1	0	21.74	21.75	21.73		
20	16QAM	1	49	21.67	21.72	21.74		
20	16QAM	1	99	21.63	21.62	21.69	22	1
20	16QAM	50	0	20.79	20.83	20.78		
20	16QAM	50	24	20.77	20.92	20.90		
20	16QAM	50	50	20.80	20.86	20.84	22	1
20	16QAM	100	0	20.81	20.89	20.74		
20	64QAM	1	0	20.94	20.94	20.95		
20	64QAM	1	49	20.87	20.90	20.97	21	2
20	64QAM	1	99	20.85	20.80	20.87		
20	64QAM	50	0	20.79	20.83	20.78		
20	64QAM	50	24	20.77	20.89	20.89	21	2
20	64QAM	50	50	20.78	20.85	20.84		
20	64QAM	100	0	20.81	20.85	20.75		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	21.68	21.67	21.75	23	0
15	QPSK	1	37	21.62	21.64	21.70		
15	QPSK	1	74	21.50	21.65	21.65		
15	QPSK	36	0	21.71	21.75	21.80	23	0
15	QPSK	36	20	21.70	21.85	21.78		
15	QPSK	36	39	21.61	21.74	21.73		
15	QPSK	75	0	21.66	21.79	21.78		
15	16QAM	1	0	21.69	21.72	21.80	23	0
15	16QAM	1	37	21.69	21.70	21.70		
15	16QAM	1	74	21.51	21.69	21.68		
15	16QAM	36	0	20.80	20.77	20.86	22	1
15	16QAM	36	20	20.81	20.90	20.86		
15	16QAM	36	39	20.69	20.87	20.81		
15	16QAM	75	0	20.71	20.87	20.85		
15	64QAM	1	0	20.95	20.93	21.00	22	1
15	64QAM	1	37	20.88	20.89	20.92		
15	64QAM	1	74	20.71	20.89	20.87		
15	64QAM	36	0	20.76	20.76	20.86	21	2
15	64QAM	36	20	20.77	20.89	20.86		
15	64QAM	36	39	20.72	20.86	20.80		
15	64QAM	75	0	20.74	20.89	20.85		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	21.80	21.79	21.75	23	0
10	QPSK	1	25	21.66	21.65	21.69		
10	QPSK	1	49	21.65	21.74	21.67		
10	QPSK	25	0	21.73	21.72	21.77	23	0
10	QPSK	25	12	21.72	21.82	21.80		
10	QPSK	25	25	21.66	21.77	21.71		
10	QPSK	50	0	21.70	21.79	21.76		
10	16QAM	1	0	21.80	21.85	21.75	23	0
10	16QAM	1	25	21.65	21.70	21.72		
10	16QAM	1	49	21.65	21.83	21.70		
10	16QAM	25	0	20.81	20.82	20.83	22	1
10	16QAM	25	12	20.78	20.91	20.87		
10	16QAM	25	25	20.74	20.85	20.85		
10	16QAM	50	0	20.78	20.88	20.85		
10	64QAM	1	0	21.00	20.99	20.94	22	1
10	64QAM	1	25	20.89	20.91	20.92		
10	64QAM	1	49	20.87	21.03	20.92		
10	64QAM	25	0	20.81	20.82	20.83	21	2
10	64QAM	25	12	20.79	20.89	20.87		
10	64QAM	25	25	20.72	20.84	20.84		
10	64QAM	50	0	20.76	20.87	20.84		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.68	21.70	21.72	23	0
5	QPSK	1	12	21.69	21.65	21.71		
5	QPSK	1	24	21.62	21.74	21.65		
5	QPSK	12	0	21.73	21.73	21.75	23	0
5	QPSK	12	7	21.74	21.72	21.79		
5	QPSK	12	13	21.70	21.79	21.70		
5	QPSK	25	0	21.71	21.79	21.73		
5	16QAM	1	0	21.66	21.71	21.72	23	0
5	16QAM	1	12	21.67	21.71	21.80		
5	16QAM	1	24	21.66	21.77	21.69		
5	16QAM	12	0	20.81	20.81	20.86	22	1
5	16QAM	12	7	20.81	20.80	20.87		
5	16QAM	12	13	20.74	20.88	20.84		
5	16QAM	25	0	20.77	20.87	20.85		
5	64QAM	1	0	20.92	20.91	20.98	22	1
5	64QAM	1	12	20.89	20.89	20.94		
5	64QAM	1	24	20.82	20.91	20.93		
5	64QAM	12	0	20.78	20.79	20.84	21	2
5	64QAM	12	7	20.77	20.79	20.84		
5	64QAM	12	13	20.75	20.87	20.81		
5	64QAM	25	0	20.77	20.89	20.83		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.68	21.67	21.69	23	0
3	QPSK	1	8	21.67	21.63	21.70		
3	QPSK	1	14	21.65	21.74	21.63		
3	QPSK	8	0	21.68	21.70	21.71	23	0
3	QPSK	8	4	21.74	21.71	21.76		
3	QPSK	8	7	21.67	21.79	21.73		
3	QPSK	15	0	21.71	21.78	21.71		
3	16QAM	1	0	21.59	21.69	21.71	23	0
3	16QAM	1	8	21.69	21.69	21.70		
3	16QAM	1	14	21.65	21.74	21.71		
3	16QAM	8	0	20.79	20.79	20.87	22	1
3	16QAM	8	4	20.81	20.82	20.92		
3	16QAM	8	7	20.77	20.88	20.86		
3	16QAM	15	0	20.77	20.88	20.84		
3	64QAM	1	0	20.86	20.89	20.90	22	1
3	64QAM	1	8	20.90	20.89	20.94		
3	64QAM	1	14	20.82	20.99	20.92		
3	64QAM	8	0	20.77	20.76	20.83	21	2
3	64QAM	8	4	20.79	20.77	20.89		
3	64QAM	8	7	20.75	20.85	20.82		
3	64QAM	15	0	20.77	20.86	20.81		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.64	21.61	21.63	23	0
1.4	QPSK	1	3	21.68	21.67	21.69		
1.4	QPSK	1	5	21.61	21.61	21.60		
1.4	QPSK	3	0	21.66	21.64	21.64		
1.4	QPSK	3	1	21.71	21.66	21.71		
1.4	QPSK	3	3	21.67	21.63	21.68		
1.4	QPSK	6	0	21.66	21.63	21.66	23	0
1.4	16QAM	1	0	21.60	21.69	21.65	23	0
1.4	16QAM	1	3	21.70	21.70	21.76		
1.4	16QAM	1	5	21.56	21.64	21.67		
1.4	16QAM	3	0	21.43	21.41	21.48		
1.4	16QAM	3	1	21.48	21.47	21.49		
1.4	16QAM	3	3	21.44	21.43	21.47		
1.4	16QAM	6	0	20.78	20.80	20.83	22	1
1.4	64QAM	1	0	20.84	20.82	20.87	22	1
1.4	64QAM	1	3	20.89	20.89	20.96		
1.4	64QAM	1	5	20.81	20.82	20.83		
1.4	64QAM	3	0	20.75	20.76	20.79		
1.4	64QAM	3	1	20.81	20.85	20.89		
1.4	64QAM	3	3	20.74	20.52	20.80		
1.4	64QAM	6	0	20.74	20.74	20.76	21	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.18	22.25	22.21	23	0
20	QPSK	1	49	22.03	22.15	22.11		
20	QPSK	1	99	22.00	22.06	22.07		
20	QPSK	50	0	21.71	21.86	21.71	23	0
20	QPSK	50	24	21.68	21.75	21.71		
20	QPSK	50	50	21.64	21.67	21.62		
20	QPSK	100	0	21.68	21.71	21.66		
20	16QAM	1	0	21.62	21.73	21.70	23	0
20	16QAM	1	49	21.54	21.63	21.62		
20	16QAM	1	99	21.46	21.53	21.52		
20	16QAM	50	0	20.79	20.83	20.77	22	1
20	16QAM	50	24	20.77	20.82	20.78		
20	16QAM	50	50	20.69	20.74	20.69		
20	16QAM	100	0	20.71	20.75	20.70		
20	64QAM	1	0	20.82	20.95	20.87	22	1
20	64QAM	1	49	20.75	20.85	20.83		
20	64QAM	1	99	20.67	20.76	20.72		
20	64QAM	50	0	20.76	20.81	20.77	21	2
20	64QAM	50	24	20.76	20.78	20.77		
20	64QAM	50	50	20.66	20.73	20.68		
20	64QAM	100	0	20.72	20.75	20.72		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.16	22.24	22.20	23	0
15	QPSK	1	37	22.01	22.13	22.20		
15	QPSK	1	74	22.03	22.04	22.10		
15	QPSK	36	0	21.71	21.70	21.65	23	0
15	QPSK	36	20	21.67	21.70	21.64		
15	QPSK	36	39	21.62	21.66	21.69		
15	QPSK	75	0	21.64	21.71	21.64		
15	16QAM	1	0	21.57	21.72	21.69	23	0
15	16QAM	1	37	21.54	21.60	21.66		
15	16QAM	1	74	21.51	21.57	21.52		
15	16QAM	36	0	20.78	20.76	20.75	22	1
15	16QAM	36	20	20.77	20.78	20.72		
15	16QAM	36	39	20.67	20.72	20.75		
15	16QAM	75	0	20.75	20.75	20.70		
15	64QAM	1	0	20.82	20.91	20.86	22	1
15	64QAM	1	37	20.74	20.82	20.86		
15	64QAM	1	74	20.70	20.82	20.76		
15	64QAM	36	0	20.75	20.76	20.76	21	2
15	64QAM	36	20	20.77	20.76	20.73		
15	64QAM	36	39	20.67	20.73	20.76		
15	64QAM	75	0	20.72	20.74	20.68		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.17	22.22	22.18	23	0
10	QPSK	1	25	22.04	22.16	22.23		
10	QPSK	1	49	21.97	22.08	22.13		
10	QPSK	25	0	21.69	21.74	21.67	23	0
10	QPSK	25	12	21.69	21.76	21.78		
10	QPSK	25	25	21.53	21.68	21.72		
10	QPSK	50	0	21.66	21.72	21.66	23	0
10	16QAM	1	0	21.60	21.68	21.65		
10	16QAM	1	25	21.59	21.68	21.72		
10	16QAM	1	49	21.45	21.58	21.57	22	1
10	16QAM	25	0	20.77	20.79	20.72		
10	16QAM	25	12	20.79	20.81	20.84		
10	16QAM	25	25	20.59	20.75	20.74	21	2
10	16QAM	50	0	20.75	20.79	20.70		
10	64QAM	1	0	20.84	20.90	20.85		
10	64QAM	1	25	20.77	20.84	20.91	22	1
10	64QAM	1	49	20.65	20.76	20.79		
10	64QAM	25	0	20.78	20.80	20.72		
10	64QAM	25	12	20.79	20.77	20.84	21	2
10	64QAM	25	25	20.58	20.73	20.74		
10	64QAM	50	0	20.74	20.77	20.70		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.17	22.18	22.20	23	0
5	QPSK	1	12	22.12	22.18	22.20		
5	QPSK	1	24	21.99	22.09	22.15		
5	QPSK	12	0	21.69	21.72	21.75	23	0
5	QPSK	12	7	21.73	21.73	21.76		
5	QPSK	12	13	21.66	21.69	21.69		
5	QPSK	25	0	21.68	21.73	21.76	23	0
5	16QAM	1	0	21.57	21.63	21.69		
5	16QAM	1	12	21.63	21.63	21.64		
5	16QAM	1	24	21.49	21.54	21.56	22	1
5	16QAM	12	0	20.75	20.80	20.79		
5	16QAM	12	7	20.75	20.77	20.79		
5	16QAM	12	13	20.74	20.75	20.76	22	1
5	16QAM	25	0	20.74	20.79	20.81		
5	64QAM	1	0	20.73	20.81	20.88		
5	64QAM	1	12	20.84	20.85	20.82	22	1
5	64QAM	1	24	20.70	20.76	20.78		
5	64QAM	12	0	20.71	20.73	20.79		
5	64QAM	12	7	20.74	20.77	20.80	21	2
5	64QAM	12	13	20.72	20.74	20.73		
5	64QAM	25	0	20.73	20.77	20.81		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.25	22.15	22.20	23	0
3	QPSK	1	8	22.25	22.16	22.20		
3	QPSK	1	14	22.20	22.14	22.18		
3	QPSK	8	0	21.77	21.72	21.73	23	0
3	QPSK	8	4	21.80	21.74	21.77		
3	QPSK	8	7	21.75	21.68	21.71		
3	QPSK	15	0	21.77	21.71	21.75		
3	16QAM	1	0	21.61	21.63	21.66	23	0
3	16QAM	1	8	21.70	21.66	21.66		
3	16QAM	1	14	21.66	21.60	21.59		
3	16QAM	8	0	20.86	20.78	20.79	22	1
3	16QAM	8	4	20.89	20.84	20.83		
3	16QAM	8	7	20.86	20.77	20.81		
3	16QAM	15	0	20.86	20.77	20.80		
3	64QAM	1	0	20.86	20.82	20.87	22	1
3	64QAM	1	8	20.94	20.85	20.87		
3	64QAM	1	14	20.90	20.79	20.81		
3	64QAM	8	0	20.80	20.75	20.78	21	2
3	64QAM	8	4	20.87	20.80	20.81		
3	64QAM	8	7	20.81	20.77	20.76		
3	64QAM	15	0	20.84	20.77	20.79		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.19	22.10	22.12	23	0
1.4	QPSK	1	3	22.22	22.20	22.21		
1.4	QPSK	1	5	22.14	22.09	22.11		
1.4	QPSK	3	0	22.21	22.15	22.18		
1.4	QPSK	3	1	22.24	22.18	22.23		
1.4	QPSK	3	3	22.20	22.16	22.17	23	0
1.4	QPSK	6	0	21.72	21.65	21.67		
1.4	16QAM	1	0	21.42	21.35	21.37	23	0
1.4	16QAM	1	3	21.58	21.59	21.55		
1.4	16QAM	1	5	21.68	21.68	21.57		
1.4	16QAM	3	0	21.61	21.50	21.56		
1.4	16QAM	3	1	21.44	21.40	21.39		
1.4	16QAM	3	3	21.46	21.42	21.42	22	1
1.4	16QAM	6	0	20.83	20.81	20.81		
1.4	64QAM	1	0	20.81	20.81	20.77	22	1
1.4	64QAM	1	3	20.88	20.82	20.83		
1.4	64QAM	1	5	20.79	20.74	20.73		
1.4	64QAM	3	0	20.76	20.75	20.73		
1.4	64QAM	3	1	20.82	20.75	20.74		
1.4	64QAM	3	3	20.74	20.70	20.69		
1.4	64QAM	6	0	20.77	20.71	20.72	21	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	21.24	21.26	21.28	22.5	0
20	QPSK	1	49	21.27	21.29	21.30		
20	QPSK	1	99	21.39	21.31	21.43		
20	QPSK	50	0	21.29	21.33	21.37	22.5	0
20	QPSK	50	24	21.34	21.36	21.40		
20	QPSK	50	50	21.43	21.36	21.38		
20	QPSK	100	0	21.40	21.36	21.38		
20	16QAM	1	0	21.57	21.65	21.64	22.5	0
20	16QAM	1	49	21.61	21.61	21.69		
20	16QAM	1	99	21.76	21.61	21.87		
20	16QAM	50	0	20.93	20.92	20.96	22	0.5
20	16QAM	50	24	20.94	20.96	21.01		
20	16QAM	50	50	21.06	20.96	21.01		
20	16QAM	100	0	21.00	20.91	20.96		
20	64QAM	1	0	20.63	20.72	20.71	22	0.5
20	64QAM	1	49	20.69	20.70	20.78		
20	64QAM	1	99	20.80	20.72	20.92		
20	64QAM	50	0	19.91	19.90	19.95	21	1.5
20	64QAM	50	24	19.91	19.93	20.01		
20	64QAM	50	50	20.03	19.92	19.99		
20	64QAM	100	0	19.99	19.93	19.99		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	21.28	21.29	21.29	22.5	0
15	QPSK	1	37	21.26	21.23	21.31		
15	QPSK	1	74	21.32	21.35	21.48		
15	QPSK	36	0	21.28	21.32	21.33	22.5	0
15	QPSK	36	20	21.36	21.34	21.37		
15	QPSK	36	39	21.29	21.33	21.36		
15	QPSK	75	0	21.32	21.32	21.34		
15	16QAM	1	0	21.55	21.63	21.67	22.5	0
15	16QAM	1	37	21.61	21.61	21.70		
15	16QAM	1	74	21.70	21.65	21.82		
15	16QAM	36	0	20.92	20.89	20.98	22	0.5
15	16QAM	36	20	20.96	20.96	21.01		
15	16QAM	36	39	20.91	20.90	20.99		
15	16QAM	75	0	20.91	20.92	20.95		
15	64QAM	1	0	20.65	20.70	20.77	22	0.5
15	64QAM	1	37	20.69	20.64	20.76		
15	64QAM	1	74	20.81	20.75	20.94		
15	64QAM	36	0	19.91	19.90	19.96	21	1.5
15	64QAM	36	20	19.96	19.97	20.02		
15	64QAM	36	39	19.90	19.90	19.97		
15	64QAM	75	0	19.92	19.93	19.97		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.25	21.15	21.29	22.5	0
10	QPSK	1	25	21.24	21.26	21.36		
10	QPSK	1	49	21.30	21.26	21.44		
10	QPSK	25	0	21.27	21.31	21.31	22.5	0
10	QPSK	25	12	21.33	21.35	21.33		
10	QPSK	25	25	21.31	21.31	21.42		
10	QPSK	50	0	21.28	21.30	21.33	22.5	0
10	16QAM	1	0	21.53	21.51	21.63		
10	16QAM	1	25	21.55	21.56	21.79		
10	16QAM	1	49	21.62	21.60	21.79	22	0.5
10	16QAM	25	0	20.85	20.88	20.93		
10	16QAM	25	12	20.93	20.90	20.96		
10	16QAM	25	25	20.91	20.87	21.05	22	0.5
10	16QAM	50	0	20.89	20.88	20.94		
10	64QAM	1	0	20.64	20.58	20.74		
10	64QAM	1	25	20.65	20.65	20.88	22	0.5
10	64QAM	1	49	20.68	20.70	20.88		
10	64QAM	25	0	19.85	19.89	19.92		
10	64QAM	25	12	19.92	19.90	19.92	21	1.5
10	64QAM	25	25	19.91	19.89	20.03		
10	64QAM	50	0	19.88	19.87	19.92		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.25	21.13	21.36	22.5	0
5	QPSK	1	12	21.22	21.24	21.35		
5	QPSK	1	24	21.25	21.25	21.37		
5	QPSK	12	0	21.26	21.29	21.38	22.5	0
5	QPSK	12	7	21.30	21.32	21.44		
5	QPSK	12	13	21.32	21.33	21.42		
5	QPSK	25	0	21.32	21.33	21.39	22.5	0
5	16QAM	1	0	21.51	21.45	21.76		
5	16QAM	1	12	21.50	21.57	21.69		
5	16QAM	1	24	21.55	21.57	21.75	22	0.5
5	16QAM	12	0	20.83	20.82	21.04		
5	16QAM	12	7	20.89	20.90	21.07		
5	16QAM	12	13	20.87	20.85	21.05	22	0.5
5	16QAM	25	0	20.86	20.87	21.02		
5	64QAM	1	0	20.61	20.52	20.81		
5	64QAM	1	12	20.61	20.67	20.84	22	0.5
5	64QAM	1	24	20.64	20.67	20.84		
5	64QAM	12	0	19.83	19.82	20.02		
5	64QAM	12	7	19.87	19.86	20.07	21	1.5
5	64QAM	12	13	19.85	19.86	20.02		
5	64QAM	25	0	19.83	19.87	20.03		

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<WWAN Top/Bottom Antenna-- Full Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.92	23.09	23.06	24	0
20	QPSK	1	49	22.92	23.08	22.94		
20	QPSK	1	99	22.95	22.92	23.06		
20	QPSK	50	0	22.00	22.17	22.13	23	1
20	QPSK	50	24	21.98	22.16	22.09		
20	QPSK	50	50	22.00	22.10	22.10		
20	QPSK	100	0	22.00	22.11	22.10		
20	16QAM	1	0	22.02	22.10	22.14	23	1
20	16QAM	1	49	22.03	22.15	22.20		
20	16QAM	1	99	22.02	22.20	22.15		
20	16QAM	50	0	21.14	21.20	21.15	22	2
20	16QAM	50	24	21.10	21.25	21.22		
20	16QAM	50	50	21.12	21.24	21.17		
20	16QAM	100	0	21.13	21.20	21.22		
20	64QAM	1	0	20.79	20.84	20.91	22	2
20	64QAM	1	49	20.84	20.93	21.00		
20	64QAM	1	99	20.91	20.95	20.93		
20	64QAM	50	0	20.11	20.18	20.07	21	3
20	64QAM	50	24	20.12	20.19	20.17		
20	64QAM	50	50	20.14	20.18	20.10		
20	64QAM	100	0	20.20	20.28	20.22		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	23.10	23.01	23.08	24	0
15	QPSK	1	37	23.09	23.09	23.03		
15	QPSK	1	74	22.96	23.13	23.10		
15	QPSK	36	0	22.09	22.13	22.10	23	1
15	QPSK	36	20	22.14	22.13	22.15		
15	QPSK	36	39	22.08	22.14	22.07		
15	QPSK	75	0	22.10	22.08	22.07		
15	16QAM	1	0	22.16	22.10	22.17	23	1
15	16QAM	1	37	22.15	22.16	22.17		
15	16QAM	1	74	22.20	22.22	22.20		
15	16QAM	36	0	21.16	21.18	21.13	22	2
15	16QAM	36	20	21.13	21.23	21.17		
15	16QAM	36	39	21.18	21.18	21.14		
15	16QAM	75	0	21.19	21.21	21.16		
15	64QAM	1	0	20.92	20.90	20.93	22	2
15	64QAM	1	37	20.92	20.97	20.89		
15	64QAM	1	74	20.96	20.95	20.96		
15	64QAM	36	0	20.14	20.22	20.17	21	3
15	64QAM	36	20	20.18	20.22	20.17		
15	64QAM	36	39	20.15	20.17	20.15		
15	64QAM	75	0	20.16	20.22	20.16		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	23.05	23.01	23.13	24	0
10	QPSK	1	25	23.04	23.11	23.11		
10	QPSK	1	49	23.10	22.96	23.09		
10	QPSK	25	0	22.11	22.13	22.04	23	1
10	QPSK	25	12	22.10	22.16	22.09		
10	QPSK	25	25	22.09	22.15	22.11		
10	QPSK	50	0	22.13	22.15	22.05		
10	16QAM	1	0	22.18	22.10	22.26	23	1
10	16QAM	1	25	22.18	22.18	22.23		
10	16QAM	1	49	22.14	22.19	22.14		
10	16QAM	25	0	21.17	21.21	21.17	22	2
10	16QAM	25	12	21.17	21.21	21.18		
10	16QAM	25	25	21.17	21.23	21.15		
10	16QAM	50	0	21.21	21.19	21.15		
10	64QAM	1	0	20.91	20.85	21.06	22	2
10	64QAM	1	25	20.93	20.93	21.00		
10	64QAM	1	49	20.94	20.98	20.85		
10	64QAM	25	0	20.14	20.14	20.11	21	3
10	64QAM	25	12	20.09	20.17	20.09		
10	64QAM	25	25	20.14	20.21	20.11		
10	64QAM	50	0	20.14	20.13	20.09		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	23.03	22.92	23.05	24	0
5	QPSK	1	12	22.98	23.00	23.00		
5	QPSK	1	24	23.05	23.04	23.07		
5	QPSK	12	0	21.98	22.04	22.07	23	1
5	QPSK	12	7	22.03	22.04	22.12		
5	QPSK	12	13	21.97	22.05	22.04		
5	QPSK	25	0	21.99	21.99	22.04		
5	16QAM	1	0	22.05	22.01	22.14	23	1
5	16QAM	1	12	22.04	22.07	22.14		
5	16QAM	1	24	22.09	22.13	22.17		
5	16QAM	12	0	21.05	21.09	21.10	22	2
5	16QAM	12	7	21.02	21.14	21.14		
5	16QAM	12	13	21.07	21.09	21.11		
5	16QAM	25	0	21.08	21.12	21.13		
5	64QAM	1	0	20.81	20.81	20.90	22	2
5	64QAM	1	12	20.81	20.88	20.86		
5	64QAM	1	24	20.85	20.86	20.93		
5	64QAM	12	0	20.03	20.13	20.14	21	3
5	64QAM	12	7	20.07	20.13	20.14		
5	64QAM	12	13	20.04	20.08	20.12		
5	64QAM	25	0	20.05	20.13	20.13		



<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	19.66	19.72	19.90	21	0
20	QPSK	1	49	19.58	19.65	19.73		
20	QPSK	1	99	19.65	19.70	19.69		
20	QPSK	50	0	19.69	19.71	19.73	21	0
20	QPSK	50	24	19.67	19.68	19.71		
20	QPSK	50	50	19.65	19.70	19.70		
20	QPSK	100	0	19.70	19.73	19.66		
20	16QAM	1	0	19.76	19.76	19.82	21	0
20	16QAM	1	49	19.73	19.81	19.87		
20	16QAM	1	99	19.77	19.82	19.79		
20	16QAM	50	0	19.74	19.85	19.76	21	0
20	16QAM	50	24	19.79	19.86	19.81		
20	16QAM	50	50	19.81	19.84	19.81		
20	16QAM	100	0	19.78	19.84	19.79		
20	64QAM	1	0	19.49	19.48	19.58	21	0
20	64QAM	1	49	19.51	19.51	19.60		
20	64QAM	1	99	19.52	19.57	19.54		
20	64QAM	50	0	19.69	19.76	19.74	21	0
20	64QAM	50	24	19.71	19.79	19.73		
20	64QAM	50	50	19.71	19.81	19.76		
20	64QAM	100	0	19.80	19.88	19.82		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	19.67	19.59	19.66	21	0
15	QPSK	1	37	19.64	19.67	19.65		
15	QPSK	1	74	19.75	19.72	19.72		
15	QPSK	36	0	19.70	19.69	19.69	21	0
15	QPSK	36	20	19.71	19.75	19.72		
15	QPSK	36	39	19.70	19.69	19.69		
15	QPSK	75	0	19.69	19.70	19.67		
15	16QAM	1	0	19.78	19.71	19.79	21	0
15	16QAM	1	37	19.81	19.85	19.81		
15	16QAM	1	74	19.87	19.87	19.84		
15	16QAM	36	0	19.69	19.75	19.70	21	0
15	16QAM	36	20	19.76	19.82	19.78		
15	16QAM	36	39	19.74	19.79	19.76		
15	16QAM	75	0	19.80	19.80	19.80		
15	64QAM	1	0	19.51	19.49	19.54	21	0
15	64QAM	1	37	19.55	19.57	19.55		
15	64QAM	1	74	19.63	19.61	19.60		
15	64QAM	36	0	19.75	19.78	19.75	21	0
15	64QAM	36	20	19.79	19.85	19.82		
15	64QAM	36	39	19.76	19.82	19.78		
15	64QAM	75	0	19.78	19.81	19.77		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	19.65	19.60	19.75	21	0
10	QPSK	1	25	19.65	19.68	19.75		
10	QPSK	1	49	19.71	19.72	19.69		
10	QPSK	25	0	19.63	19.69	19.63	21	0
10	QPSK	25	12	19.65	19.72	19.68		
10	QPSK	25	25	19.67	19.67	19.66		
10	QPSK	50	0	19.65	19.72	19.67		
10	16QAM	1	0	19.74	19.70	19.89	21	0
10	16QAM	1	25	19.77	19.84	19.89		
10	16QAM	1	49	19.77	19.83	19.82		
10	16QAM	25	0	19.77	19.78	19.76	21	0
10	16QAM	25	12	19.79	19.83	19.79		
10	16QAM	25	25	19.78	19.82	19.79		
10	16QAM	50	0	19.72	19.80	19.80		
10	64QAM	1	0	19.50	19.47	19.61	21	0
10	64QAM	1	25	19.53	19.58	19.61		
10	64QAM	1	49	19.55	19.60	19.56		
10	64QAM	25	0	19.71	19.76	19.68	21	0
10	64QAM	25	12	19.70	19.79	19.72		
10	64QAM	25	25	19.72	19.78	19.72		
10	64QAM	50	0	19.69	19.73	19.71		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	19.59	19.68	19.74	21	0
5	QPSK	1	12	19.61	19.68	19.75		
5	QPSK	1	24	19.61	19.62	19.60		
5	QPSK	12	0	19.65	19.68	19.79	21	0
5	QPSK	12	7	19.66	19.72	19.72		
5	QPSK	12	13	19.68	19.74	19.70		
5	QPSK	25	0	19.65	19.70	19.64		
5	16QAM	1	0	19.73	19.78	19.84	21	0
5	16QAM	1	12	19.79	19.84	19.88		
5	16QAM	1	24	19.77	19.81	19.79		
5	16QAM	12	0	19.72	19.75	19.79	21	0
5	16QAM	12	7	19.75	19.81	19.76		
5	16QAM	12	13	19.74	19.76	19.74		
5	16QAM	25	0	19.77	19.83	19.77		
5	64QAM	1	0	19.50	19.56	19.63	21	0
5	64QAM	1	12	19.53	19.56	19.63		
5	64QAM	1	24	19.55	19.59	19.55		
5	64QAM	12	0	19.71	19.75	19.78	21	0
5	64QAM	12	7	19.74	19.78	19.77		
5	64QAM	12	13	19.73	19.75	19.74		
5	64QAM	25	0	19.70	19.75	19.71		



<LTE Carrier Aggregation>

General Note:

- 1. This device supports Carrier Aggregation on downlink for CA_7C /CA_38C/CA_7A-7A and uplink for CA_7C/ CA_38C. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
- 2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
- 3. All permutations exist. No restrictions on Pcell & Scell combinations.

Index	2CC	Restriction	Completely Covered by Measurement Superset
2CC #1	CA_7C		No
2CC #2	CA_38C		No
2CC #3	CA_7A-7A		No

LTE Carrier Aggregation Conducted Power (Downlink)

General Note:

- i. According to KDB941225 D05A v01r02, uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<WWAN Top Antenna--Full Power Mode>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	0	Band 7	20M	2674.8	3298	22.85	22.99
		CA_38C	Band 38	20M	2585	37901	QPSK	1	0	Band 38	20M	2604.8	38099	23.05	23.09
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	0	Band 7	5M	2687.5	3425	22.91	22.99

<WWAN Bottom Antenna--Full Power Mode>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	0	Band 7	20M	2674.8	3298	22.91	22.99
		CA_38C	Band 38	20M	2585	37901	QPSK	1	0	Band 38	20M	2604.8	38099	23.05	23.09
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	0	Band 7	5M	2687.5	3425	22.88	22.99

<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	0	Band 7	20M	2674.8	3298	18.05	18.10
		CA_38C	Band 38	20M	2610	38150	QPSK	1	0	Band 38	20M	2590.2	37952	19.88	19.90
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	0	Band 7	5M	2687.5	3425	18.09	18.10

<WWAN Bottom Antenna --Reduced Power for Hotspot On>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	0	Band 7	20M	2674.8	3298	20.76	20.85
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	0	Band 7	5M	2687.5	3425	20.79	20.85

<WWAN Bottom Antenna --Reduced Power for Handheld>

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2560	21350	16QAM	1	99	Band 7	20M	2660.2	3152	21.79	21.87
	Non-Contiguous	CA_7A-7A	Band 7	20M	2560	21350	16QAM	1	99	Band 7	5M	2622.5	2775	21.75	21.87

LTE Carrier Aggregation Conducted Power (Uplink)

1. This device supports uplink carrier aggregation for LTE CA_7C, CA_38C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. For the non-contiguously allocated resource blocks which the MPR level is determined by various RB separation and RB sizes requirement, and the allowed MPR levels, settings and the conducted powers are permanently implemented in this device per the 3GPP 36.36.101 section 6.2.3A.1.3 requirements.
2. According to November 2017 TCB workshop, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs
4. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.





<WWAN Top Antenna--Full Power Mode>

<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	22.89	23.50
21100	20902	QPSK	1	0	0	0	1	0	22.85	23.50
21350	21152	QPSK	1	0	0	0	1	0	23.08	23.50

<LTE Band 38>

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	23.14	24.00
37901	38099	QPSK	1	0	0	0	1	0	23.09	24.00
38150	37952	QPSK	1	0	0	0	1	0	23.06	24.00

<WWAN Bottom Antenna--Full Power Mode>

<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	22.89	24.00
21100	20902	QPSK	1	0	0	0	1	0	22.85	24.00
21350	21152	QPSK	1	0	0	0	1	0	23.08	24.00

<LTE Band 38>

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	23.14	24.00
37901	38099	QPSK	1	0	0	0	1	0	23.09	24.00
38150	37952	QPSK	1	0	0	0	1	0	23.06	24.00

<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On>

<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	18.03	19.50
21100	20902	QPSK	1	0	0	0	1	0	18.08	19.50
21350	21152	QPSK	1	0	0	0	1	0	18.05	19.50

<LTE Band 38>

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	19.72	21.00
37901	38099	QPSK	1	0	0	0	1	0	19.75	21.00
38150	37952	QPSK	1	0	0	0	1	0	19.68	21.00

<WWAN Bottom Antenna --Reduced Power for Hotspot On>

<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	20.58	21.50
21100	20902	QPSK	1	0	0	0	1	0	20.73	21.50
21350	21152	QPSK	1	0	0	0	1	0	20.71	21.50

<WWAN Bottom Antenna --Reduced Power for Handheld>

<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	21.38	22.50
21001	21199	QPSK	1	0	0	0	1	0	21.45	22.50
21152	21350	QPSK	1	0	0	0	1	0	21.26	22.50



<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<Full Power>

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.28	21.50	100.00
		6	2437	20.73	21.50	
		11	2462	20.93	21.50	
	802.11g 6Mbps	1	2412	17.57	18.00	97.93
		6	2437	17.71	18.00	
		11	2462	17.27	18.00	
	802.11n-HT20 MCS0	1	2412	15.63	17.00	97.79
		6	2437	15.71	17.00	
		11	2462	16.11	17.00	



<5GHz WLAN>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	18.53	19.50	97.95
		40	5200	18.73	19.50	
		44	5220	18.75	19.50	
		48	5240	18.66	19.50	
	802.11n-HT20 MCS0	36	5180	17.65	18.50	98.52
		40	5200	17.78	18.50	
		44	5220	17.80	18.50	
		48	5240	17.92	18.50	
	802.11n-HT40 MCS0	38	5190	15.04	15.50	96.32
46		5230	17.73	18.50		
802.11ac-VHT20 MCS0	36	5180	17.67	18.50	98.16	
	40	5200	17.80	18.50		
	44	5220	17.84	18.50		
	48	5240	17.95	18.50		
802.11ac-VHT40 MCS0	38	5190	14.89	15.50	96.32	
	46	5230	17.72	18.50		
802.11ac-VHT80 MCS0	42	5210	14.06	15.50	93.06	

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	18.66	19.50	97.95
		56	5280	18.86	19.50	
		60	5300	18.71	19.50	
		64	5320	17.25	19.50	
	802.11n-HT20 MCS0	52	5260	17.54	18.50	98.52
		56	5280	17.67	18.50	
		60	5300	17.57	18.50	
		64	5320	16.64	17.50	
	802.11n-HT40 MCS0	54	5270	16.36	17.50	96.32
		62	5310	13.58	15.50	
	802.11ac-VHT20 MCS0	52	5260	17.55	18.50	98.16
		56	5280	17.66	18.50	
		60	5300	17.64	18.50	
64		5320	17.66	18.50		
802.11ac-VHT40 MCS0	54	5270	16.18	17.50	96.32	
	62	5310	13.36	15.50		
802.11ac-VHT80 MCS0	58	5290	12.67	13.00	93.06	



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	=Duty Cycle %
	802.11a 6Mbps	100	5500	18.86	19.50	97.95
		116	5580	18.70	19.50	
		124	5620	18.72	19.50	
		132	5660	18.75	19.50	
		140	5700	18.15	19.50	
	802.11n-HT20 MCS0	100	5500	17.75	18.50	98.52
		116	5580	17.55	18.50	
		124	5620	17.80	18.50	
		132	5660	17.88	18.50	
140		5700	17.08	18.50		
802.11n-HT40 MCS0	102	5510	15.77	16.50	96.32	
	110	5550	17.66	18.50		
	126	5630	17.77	18.50		
	134	5670	17.78	18.50		
802.11ac-VHT20 MCS0	100	5500	17.76	18.50	98.16	
	116	5580	17.52	18.50		
	124	5620	17.77	18.50		
	132	5660	17.87	18.50		
	140	5700	17.31	18.50		
802.11ac-VHT40 MCS0	102	5510	15.71	16.50	96.32	
	110	5550	17.71	18.50		
	126	5630	17.78	18.50		
	134	5670	17.79	18.50		
802.11ac-VHT80 MCS0	106	5530	11.75	12.50	93.06	
	122	5610	16.99	17.50		

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	18.70	19.50	97.95
		157	5785	18.75	19.50	
		161	5805	18.79	19.50	
	802.11n-HT20 MCS0	149	5745	17.77	18.50	98.52
		157	5785	17.51	18.50	
		161	5805	17.80	18.50	
	802.11n-HT40 MCS0	151	5755	17.75	18.50	96.32
		159	5795	17.58	18.50	
	802.11ac-VHT20 MCS0	149	5745	17.86	18.50	98.16
157		5785	17.53	18.50		
161		5805	17.81	18.50		
802.11ac-VHT40 MCS0	151	5755	17.77	18.50	96.32	
	159	5795	17.68	18.50		
802.11ac-VHT80 MCS0	155	5775	16.31	17.50	93.06	



<Reduced Power for Receiver On >

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.39	17.50	100.00
		6	2437	16.67	17.50	
		11	2462	16.77	17.50	
	802.11g 6Mbps	1	2412	15.92	17.50	97.93
		6	2437	16.05	17.50	
		11	2462	16.13	17.50	
	802.11n-HT20 MCS0	1	2412	15.63	17.00	97.79
		6	2437	15.71	17.00	
		11	2462	16.11	17.00	



<5GHz WLAN >

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	15.44	16.00	97.95
		40	5200	15.70	16.00	
		44	5220	15.87	16.00	
		48	5240	15.66	16.00	
	802.11n-HT20 MCS0	36	5180	15.19	16.00	98.52
		40	5200	15.28	16.00	
		44	5220	15.21	16.00	
		48	5240	15.42	16.00	
	802.11n-HT40 MCS0	38	5190	15.04	15.50	96.32
		46	5230	15.48	15.50	
	802.11ac-VHT20 MCS0	36	5180	15.14	16.00	98.16
		40	5200	15.33	16.00	
		44	5220	15.27	16.00	
		48	5240	15.42	16.00	
	802.11ac-VHT40 MCS0	38	5190	14.89	15.50	96.32
		46	5230	15.49	15.50	
802.11ac-VHT80 MCS0	42	5210	14.06	15.50	93.06	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	15.34	16.00	97.95
		56	5280	15.82	16.00	
		60	5300	15.80	16.00	
		64	5320	15.81	16.00	
	802.11n-HT20 MCS0	52	5260	15.19	16.00	98.52
		56	5280	15.57	16.00	
		60	5300	15.59	16.00	
		64	5320	15.55	16.00	
	802.11n-HT40 MCS0	54	5270	15.04	15.50	96.32
		62	5310	13.58	15.50	
	802.11ac-VHT20 MCS0	52	5260	14.40	16.00	98.16
		56	5280	14.81	16.00	
		60	5300	14.76	16.00	
		64	5320	14.66	16.00	
	802.11ac-VHT40 MCS0	54	5270	15.10	15.50	96.32
		62	5310	13.78	15.50	
802.11ac-VHT80 MCS0	58	5290	12.67	13.00	93.06	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	17.36	18.00	97.95
		157	5785	17.51	18.00	
		161	5805	17.56	18.00	
	802.11n-HT20 MCS0	149	5745	17.12	18.00	98.52
		157	5785	17.21	18.00	
		161	5805	17.15	18.00	
	802.11n-HT40 MCS0	151	5755	17.48	17.50	96.32
		159	5795	17.31	17.50	
	802.11ac-VHT20 MCS0	149	5745	17.03	18.00	98.16
		157	5785	17.22	18.00	
		161	5805	17.14	18.00	
	802.11ac-VHT40 MCS0	151	5755	16.61	17.50	96.32
		159	5795	16.53	17.50	
	802.11ac-VHT80 MCS0	155	5775	16.31	17.50	93.06



<Reduced Power for Hotspot On >

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.39	17.50	100.00
		6	2437	16.67	17.50	
		11	2462	16.77	17.50	
	802.11g 6Mbps	1	2412	15.92	17.50	97.93
		6	2437	16.05	17.50	
		11	2462	16.13	17.50	
	802.11n-HT20 MCS0	1	2412	15.63	17.00	97.79
		6	2437	15.71	17.00	
		11	2462	16.11	17.00	



<5GHz WLAN >


	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	15.44	16.00	97.95
		40	5200	15.70	16.00	
		44	5220	15.87	16.00	
		48	5240	15.66	16.00	
	802.11n-HT20 MCS0	36	5180	15.19	16.00	98.52
		40	5200	15.28	16.00	
		44	5220	15.21	16.00	
		48	5240	15.42	16.00	
	802.11n-HT40 MCS0	38	5190	15.04	15.50	96.32
		46	5230	15.48	15.50	
	802.11ac-VHT20 MCS0	36	5180	15.14	16.00	98.16
		40	5200	15.33	16.00	
		44	5220	15.27	16.00	
		48	5240	15.42	16.00	
	802.11ac-VHT40 MCS0	38	5190	14.89	15.50	96.32
		46	5230	15.49	15.50	
802.11ac-VHT80 MCS0	42	5210	14.06	15.50	93.06	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	17.36	18.00	97.95
		157	5785	17.51	18.00	
		161	5805	17.56	18.00	
	802.11n-HT20 MCS0	149	5745	17.12	18.00	98.52
		157	5785	17.21	18.00	
		161	5805	17.15	18.00	
	802.11n-HT40 MCS0	151	5755	17.48	17.50	96.32
		159	5795	17.31	17.50	
	802.11ac-VHT20 MCS0	149	5745	17.03	18.00	98.16
		157	5785	17.22	18.00	
		161	5805	17.14	18.00	
	802.11ac-VHT40 MCS0	151	5755	16.61	17.50	96.32
		159	5795	16.53	17.50	
	802.11ac-VHT80 MCS0	155	5775	16.31	17.50	93.06

<2.4GHz Bluetooth>

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
- The Bluetooth duty cycle is 76.94 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

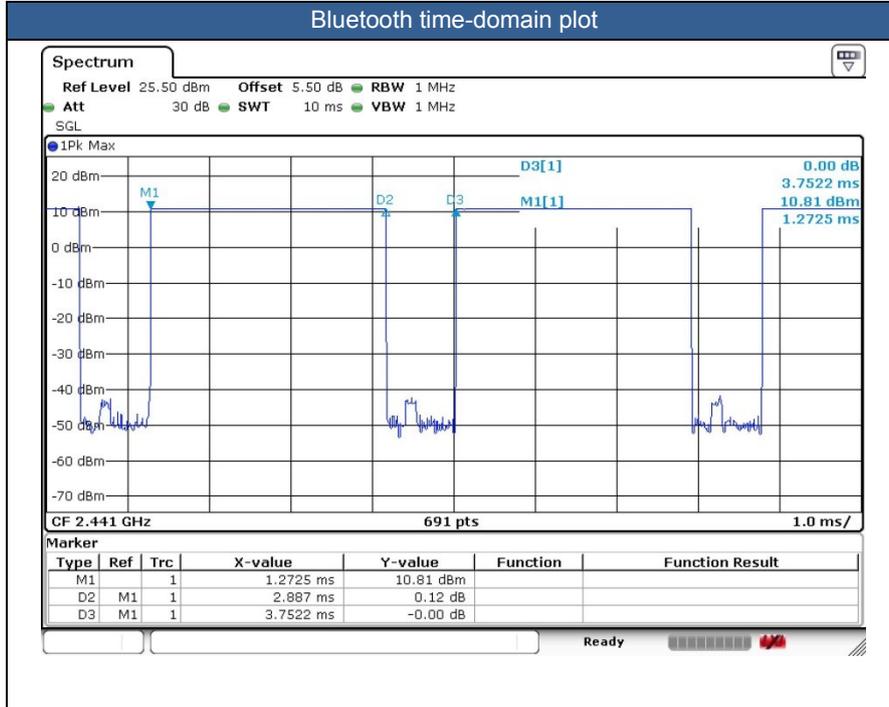


Mode	Channel	Frequency (MHz)	Data Rate
			1Mbps
BR/EDR	CH 00	2402	11.54
	CH 39	2441	10.84
	CH 78	2480	11.61
Tune-up Limit			12.00

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v4.0/v4.1/v4.2 LE	CH 00	2402	5.59
	CH 19	2440	4.88
	CH 39	2480	7.17
Tune-up Limit			10.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v5.0 LE	CH 00	2402	5.42
	CH 19	2440	4.96
	CH 39	2480	7.02
Tune-up Limit			10.50

14. Antenna Location

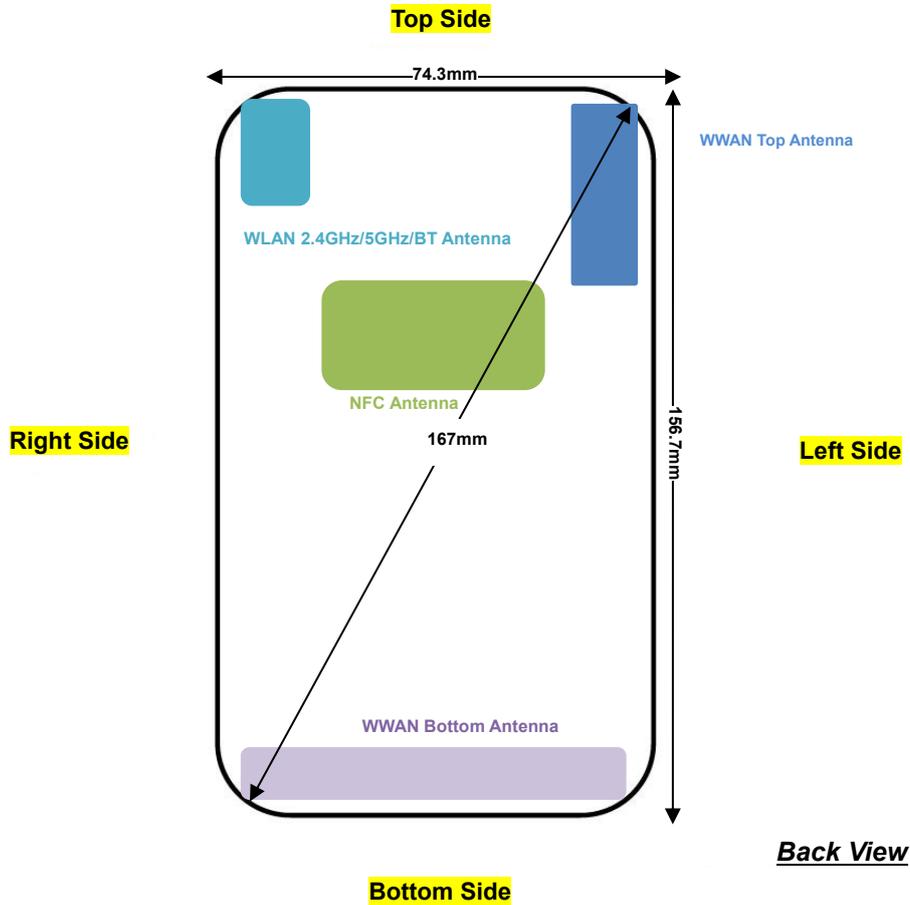

Antenna	Support Band
WWAN Top Antenna	GSM: 850 / 1900 WCDMA: B2 / B4 / B5 LTE: B2 / B4 / B5 / B7 / B38
WWAN Bottom Antenna	GSM: 850 / 1900 WCDMA: B2 / B4 / B5 LTE: B2 / B4 / B5 / B7 / B38
WLAN 2.4GHz/5GHz/BT Antenna	WLAN 2.4GHz WLAN 5GHz Bluetooth
NFC Antenna	NFC

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Top Antenna	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
WWAN Bottom Antenna	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WLAN 2.4GHz/5GHz/BT Antenna	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Top Antenna	Yes	Yes	Yes	No	No	Yes
WWAN Bottom Antenna	Yes	Yes	No	Yes	Yes	Yes
WLAN 2.4GHz/5GHz/BT Antenna	Yes	Yes	Yes	No	Yes	No

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for sensor on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN transmitter scaled to the maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of WCDMA B2 / B4, LTE B4 / B7, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
6. This device has two WWAN transmit antennas. WWAN bottom antenna is located at the bottom edge of the device, and WWAN top antenna is located at the top edge of the device which can refer to antenna location chapter. Top and Bottom antenna support the same WWAN frequency bands, and they can't transmit simultaneously.
7. For top WWAN antenna and WLAN antenna:
 - a. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in GSM850, WCDMA band 2/4/5, LTE B2/4/5/7/38 and WLAN 2.4GHz/5.2/5.3/5.8GHz.
 - b. When hotspot mode is enabled, power reduction will be activated to GSM850, WCDMA band 2/4/5, LTE B2/4/5/7/38 and WLAN 2.4GHz/5.2/5.8GHz.
8. For bottom WWAN antenna:
 - a. P-sensor can detect handheld state, WCDMA band II/IV and LTE band 2/4/7 for back/bottom sides of product specific 10g SAR condition reduced powers will be active
 - b. When hotspot mode is enabled, power reduction will be activated to GSM1900, WCDMA band II/IV, LTE band 2/4/7.
9. There are two types of EUT sample 1 and sample 2, the differences between two samples is for memory, sample 1 6+64GB capacity and sample 2 is 6+128GB capacity. According to the difference, memory capacity has no effect on SAR distribution, so sample 1 is chose to perform full SAR testing.



GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. Per FCC KDB inquiry guidance, the following applied to intra-band contiguous UL CA only;
 - a. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.
 - b. UL CA SAR is measured for each exposure condition in each frequency band using the highest SAR configuration tested in standalone LTE mode to establish the UL CA PCC. The SCC and subsequent CC must use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions.
 - c. When the SAR configuration tested in step b) has a maximum output power specification more than $\frac{1}{4}$ dB lower than the highest maximum output power conditions measured in the power measurements in step a) above and the reported SAR in step b) is larger than 1.2 W/kg, SAR measurement is also required for the configuration in step a)
 - d. All standalone SAR configurations with SAR > 1.2 W/kg must also be tested by applying the procedures in step b)
7. For LTE B4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM 850	GPRS 4 Tx slots	Right Cheek	Top	Reduced	189	836.4	24.18	25.50	1.355	0.04	0.760	1.030
	GSM 850	GPRS 4 Tx slots	Right Cheek	Top	Reduced	128	824.2	24.13	25.50	1.371	0.04	0.714	0.979
	GSM 850	GPRS 4 Tx slots	Right Cheek	Top	Reduced	251	848.8	24.02	25.50	1.406	-0.11	0.705	0.991
	GSM 850	GPRS 4 Tx slots	Right Tilted	Top	Reduced	189	836.4	24.18	25.50	1.355	-0.02	0.644	0.873
	GSM 850	GPRS 4 Tx slots	Right Tilted	Top	Reduced	128	824.2	24.13	25.50	1.371	0.17	0.550	0.754
	GSM 850	GPRS 4 Tx slots	Right Tilted	Top	Reduced	251	848.8	24.02	25.50	1.406	0.16	0.576	0.810
	GSM 850	GPRS 4 Tx slots	Left Cheek	Top	Reduced	189	836.4	24.18	25.50	1.355	0.02	0.271	0.367
	GSM 850	GPRS 4 Tx slots	Left Tilted	Top	Reduced	189	836.4	24.18	25.50	1.355	0.02	0.263	0.356
	GSM 850	GPRS 4 Tx slots	Right Cheek	Bottom	Full	189	836.4	26.20	27.50	1.349	-0.05	0.173	0.233
	GSM 850	GPRS 4 Tx slots	Right Tilted	Bottom	Full	189	836.4	26.20	27.50	1.349	-0.03	0.073	0.099
	GSM 850	GPRS 4 Tx slots	Left Cheek	Bottom	Full	189	836.4	26.20	27.50	1.349	0.04	0.124	0.167
	GSM 850	GPRS 4 Tx slots	Left Tilted	Bottom	Full	189	836.4	26.20	27.50	1.349	-0.01	0.073	0.099
	GSM 1900	GPRS 4 Tx slots	Right Cheek	Top	Full	661	1880	23.41	25.00	1.442	-0.04	0.732	1.056
	GSM 1900	GPRS 4 Tx slots	Right Cheek	Top	Full	512	1850.2	23.01	25.00	1.581	-0.07	0.674	1.066
02	GSM 1900	GPRS 4 Tx slots	Right Cheek	Top	Full	810	1909.8	23.40	25.00	1.445	0.06	0.820	1.185
	GSM 1900	GPRS 4 Tx slots	Right Tilted	Top	Full	661	1880	23.41	25.00	1.442	-0.02	0.323	0.466
	GSM 1900	GPRS 4 Tx slots	Left Cheek	Top	Full	661	1880	23.41	25.00	1.442	-0.03	0.192	0.277
	GSM 1900	GPRS 4 Tx slots	Left Tilted	Top	Full	661	1880	23.41	25.00	1.442	-0.07	0.146	0.211
	GSM 1900	GPRS 4 Tx slots	Right Cheek	Bottom	Full	661	1880	23.41	25.00	1.442	-0.01	0.019	0.027
	GSM 1900	GPRS 4 Tx slots	Right Tilted	Bottom	Full	661	1880	23.41	25.00	1.442	-0.05	0.012	0.017
	GSM 1900	GPRS 4 Tx slots	Left Cheek	Bottom	Full	661	1880	23.41	25.00	1.442	-0.12	0.029	0.042
	GSM 1900	GPRS 4 Tx slots	Left Tilted	Bottom	Full	661	1880	23.41	25.00	1.442	-0.02	0.012	0.018



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Top	Reduced	4182	836.4	20.85	22.00	1.303	0.09	0.838	1.092
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Top	Reduced	4132	826.4	20.76	22.00	1.330	-0.11	0.792	1.054
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Top	Reduced	4233	846.6	20.80	22.00	1.318	0.07	0.748	0.986
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Top	Reduced	4182	836.4	20.85	22.00	1.303	-0.11	0.659	0.859
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Top	Reduced	4132	826.4	20.76	22.00	1.330	-0.03	0.613	0.816
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Top	Reduced	4233	846.6	20.80	22.00	1.318	0.01	0.688	0.907
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	Top	Reduced	4182	836.4	20.85	22.00	1.303	0.01	0.285	0.371
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	Top	Reduced	4182	836.4	20.85	22.00	1.303	0.02	0.202	0.263
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Bottom	Full	4182	836.4	23.99	25.00	1.262	0.01	0.250	0.315
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Bottom	Full	4182	836.4	23.99	25.00	1.262	0.03	0.109	0.138
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	Bottom	Full	4182	836.4	23.99	25.00	1.262	-0.02	0.199	0.251
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	Bottom	Full	4182	836.4	23.99	25.00	1.262	0.02	0.114	0.144
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Top	Reduced	1413	1732.6	20.27	21.50	1.327	0.08	0.862	1.144
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Top	Reduced	1312	1712.4	20.23	21.50	1.340	-0.1	0.828	1.109
04	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Top	Reduced	1513	1752.6	20.22	21.50	1.343	0.11	0.857	1.151
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	Top	Reduced	1413	1732.6	20.27	21.50	1.327	0.03	0.434	0.576
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	Top	Reduced	1413	1732.6	20.27	21.50	1.327	-0.06	0.245	0.325
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	Top	Reduced	1413	1732.6	20.27	21.50	1.327	-0.06	0.193	0.256
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Bottom	Full	1413	1732.6	23.19	24.50	1.352	0.02	0.080	0.109
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	Bottom	Full	1413	1732.6	23.19	24.50	1.352	-0.07	0.042	0.056
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	Bottom	Full	1413	1732.6	23.19	24.50	1.352	0.13	0.144	0.195
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	Bottom	Full	1413	1732.6	23.19	24.50	1.352	0.01	0.029	0.039
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Top	Reduced	9400	1880	20.62	21.50	1.225	-0.01	0.860	1.053
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Top	Reduced	9262	1852.4	20.51	21.50	1.256	-0.01	0.781	0.981
05	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Top	Reduced	9538	1907.6	20.60	21.50	1.230	0.1	0.892	1.097
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Top	Reduced	9400	1880	20.62	21.50	1.225	0.02	0.402	0.492
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	Top	Reduced	9400	1880	20.62	21.50	1.225	-0.06	0.235	0.288
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	Top	Reduced	9400	1880	20.62	21.50	1.225	-0.06	0.178	0.218
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Bottom	Full	9400	1880	23.91	25.00	1.285	0.02	0.070	0.089
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Bottom	Full	9400	1880	23.91	25.00	1.285	-0.01	0.038	0.049
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	Bottom	Full	9400	1880	23.91	25.00	1.285	0.11	0.113	0.145
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	Bottom	Full	9400	1880	23.91	25.00	1.285	0.01	0.027	0.035



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 5	10M	QPSK	1	0	Right Cheek	Top	Reduced	20525	836.5	21.45	22.50	1.274	0.07	0.761	0.969
	LTE Band 5	10M	QPSK	25	0	Right Cheek	Top	Reduced	20525	836.5	21.21	22.50	1.346	0.02	0.734	0.988
	LTE Band 5	10M	QPSK	50	0	Right Cheek	Top	Reduced	20525	836.5	21.18	22.50	1.355	-0.03	0.728	0.987
	LTE Band 5	10M	QPSK	1	0	Right Tilted	Top	Reduced	20525	836.5	21.45	22.50	1.274	0.11	0.679	0.865
	LTE Band 5	10M	QPSK	25	0	Right Tilted	Top	Reduced	20525	836.5	21.21	22.50	1.346	0.06	0.574	0.773
	LTE Band 5	10M	QPSK	50	0	Right Tilted	Top	Reduced	20525	836.5	21.18	22.50	1.355	0.02	0.572	0.775
	LTE Band 5	10M	QPSK	1	0	Left Cheek	Top	Reduced	20525	836.5	21.45	22.50	1.274	-0.06	0.257	0.327
	LTE Band 5	10M	QPSK	25	0	Left Cheek	Top	Reduced	20525	836.5	21.21	22.50	1.346	-0.04	0.247	0.332
	LTE Band 5	10M	QPSK	1	0	Left Tilted	Top	Reduced	20525	836.5	21.45	22.50	1.274	-0.1	0.233	0.297
	LTE Band 5	10M	QPSK	25	0	Left Tilted	Top	Reduced	20525	836.5	21.21	22.50	1.346	-0.02	0.227	0.306
07	LTE Band 5	10M	QPSK	1	0	Right Cheek	Bottom	Full	20525	836.5	22.82	24.00	1.312	-0.02	0.194	0.255
	LTE Band 5	10M	QPSK	25	0	Right Cheek	Bottom	Full	20525	836.5	21.89	23.00	1.291	0.04	0.153	0.198
	LTE Band 5	10M	QPSK	1	0	Right Tilted	Bottom	Full	20525	836.5	22.82	24.00	1.312	-0.02	0.094	0.124
	LTE Band 5	10M	QPSK	25	0	Right Tilted	Bottom	Full	20525	836.5	21.89	23.00	1.291	0.01	0.077	0.099
	LTE Band 5	10M	QPSK	1	0	Left Cheek	Bottom	Full	20525	836.5	22.82	24.00	1.312	-0.03	0.156	0.205
	LTE Band 5	10M	QPSK	25	0	Left Cheek	Bottom	Full	20525	836.5	21.89	23.00	1.291	0.03	0.128	0.165
	LTE Band 5	10M	QPSK	1	0	Left Tilted	Bottom	Full	20525	836.5	22.82	24.00	1.312	0.01	0.100	0.131
	LTE Band 5	10M	QPSK	25	0	Left Tilted	Bottom	Full	20525	836.5	21.89	23.00	1.291	-0.04	0.082	0.106
	LTE Band 4	20M	QPSK	1	0	Right Cheek	Top	Reduced	20175	1732.5	20.68	21.50	1.208	0.09	0.795	0.960
	LTE Band 4	20M	QPSK	50	0	Right Cheek	Top	Reduced	20175	1732.5	20.71	21.50	1.199	0.02	0.648	0.777
	LTE Band 4	20M	QPSK	100	0	Right Cheek	Top	Reduced	20175	1732.5	20.67	21.50	1.211	0.08	0.930	1.126
	LTE Band 4	20M	QPSK	1	0	Right Tilted	Top	Reduced	20175	1732.5	20.68	21.50	1.208	0.04	0.389	0.470
	LTE Band 4	20M	QPSK	50	0	Right Tilted	Top	Reduced	20175	1732.5	20.71	21.50	1.199	-0.02	0.402	0.482
	LTE Band 4	20M	QPSK	1	0	Left Cheek	Top	Reduced	20175	1732.5	20.68	21.50	1.208	0.03	0.255	0.308
LTE Band 4	20M	QPSK	50	0	Left Cheek	Top	Reduced	20175	1732.5	20.71	21.50	1.199	-0.01	0.257	0.308	
LTE Band 4	20M	QPSK	1	0	Left Tilted	Top	Reduced	20175	1732.5	20.68	21.50	1.208	0.12	0.193	0.233	
LTE Band 4	20M	QPSK	50	0	Left Tilted	Top	Reduced	20175	1732.5	20.71	21.50	1.199	0.03	0.196	0.235	
LTE Band 4	20M	QPSK	1	0	Right Cheek	Bottom	Full	20175	1732.5	22.85	24.00	1.303	0.01	0.067	0.087	
LTE Band 4	20M	QPSK	50	0	Right Cheek	Bottom	Full	20175	1732.5	21.88	23.00	1.294	0.02	0.053	0.068	
LTE Band 4	20M	QPSK	1	0	Right Tilted	Bottom	Full	20175	1732.5	22.85	24.00	1.303	0.01	0.056	0.073	
LTE Band 4	20M	QPSK	50	0	Right Tilted	Bottom	Full	20175	1732.5	21.88	23.00	1.294	0.01	0.046	0.060	
LTE Band 4	20M	QPSK	1	0	Left Cheek	Bottom	Full	20175	1732.5	22.85	24.00	1.303	0.01	0.116	0.151	
LTE Band 4	20M	QPSK	50	0	Left Cheek	Bottom	Full	20175	1732.5	21.88	23.00	1.294	0.03	0.102	0.132	
LTE Band 4	20M	QPSK	1	0	Left Tilted	Bottom	Full	20175	1732.5	22.85	24.00	1.303	0.01	0.062	0.080	
LTE Band 4	20M	QPSK	50	0	Left Tilted	Bottom	Full	20175	1732.5	21.88	23.00	1.294	0.02	0.050	0.064	



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Top	Reduced	18900	1880	20.08	21.00	1.236	0.02	0.715	0.884
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Top	Reduced	18700	1860	19.83	21.00	1.309	0.05	0.697	0.912
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Top	Reduced	19100	1900	19.89	21.00	1.291	0.03	0.731	0.944
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Top	Reduced	18900	1880	19.97	21.00	1.268	-0.02	0.623	0.790
08	LTE Band 2	20M	QPSK	100	0	Right Cheek	Top	Reduced	18900	1880	19.93	21.00	1.279	0.02	0.765	0.979
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Top	Reduced	18900	1880	20.08	21.00	1.236	0.01	0.322	0.398
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Top	Reduced	18900	1880	19.97	21.00	1.268	0.03	0.339	0.430
	LTE Band 2	20M	QPSK	1	0	Left Cheek	Top	Reduced	18900	1880	20.08	21.00	1.236	-0.02	0.201	0.248
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Top	Reduced	18900	1880	19.97	21.00	1.268	0.02	0.208	0.264
	LTE Band 2	20M	QPSK	1	0	Left Tilted	Top	Reduced	18900	1880	20.08	21.00	1.236	0.04	0.166	0.205
	LTE Band 2	20M	QPSK	50	0	Left Tilted	Top	Reduced	18900	1880	19.97	21.00	1.268	-0.01	0.168	0.213
	LTE Band 2	20M	QPSK	1	0	Right Cheek	Bottom	Full	18900	1880	22.74	24.00	1.337	0.02	0.050	0.067
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Bottom	Full	18900	1880	21.85	23.00	1.303	0.05	0.041	0.054
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Bottom	Full	18900	1880	22.74	24.00	1.337	0.06	0.034	0.046
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Bottom	Full	18900	1880	21.85	23.00	1.303	-0.04	0.029	0.038
	LTE Band 2	20M	QPSK	1	0	Left Cheek	Bottom	Full	18900	1880	22.74	24.00	1.337	0.11	0.091	0.122
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Bottom	Full	18900	1880	21.85	23.00	1.303	-0.02	0.077	0.100
	LTE Band 2	20M	QPSK	1	0	Left Tilted	Bottom	Full	18900	1880	22.74	24.00	1.337	-0.04	0.037	0.049
	LTE Band 2	20M	QPSK	50	0	Left Tilted	Bottom	Full	18900	1880	21.85	23.00	1.303	0.01	0.031	0.040
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Top	Reduced	21100	2535	18.10	19.50	1.380	0.03	0.753	1.039
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Top	Reduced	20850	2510	17.99	19.50	1.416	0.05	0.705	0.998
09	LTE Band 7	20M	QPSK	1	0	Right Cheek	Top	Reduced	21350	2560	17.94	19.50	1.432	-0.01	0.740	1.060
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Top	Reduced	21350+21152	2560+2540.2	18.05	19.50	1.396	-0.01	0.640	0.894
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Top	Reduced	21100	2535	18.05	19.50	1.396	-0.11	0.654	0.913
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Top	Reduced	20850	2510	18.01	19.50	1.409	0.19	0.617	0.870
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Top	Reduced	21350	2560	18.02	19.50	1.406	-0.09	0.610	0.858
	LTE Band 7	20M	QPSK	100	0	Right Cheek	Top	Reduced	21100	2535	18.02	19.50	1.406	0.07	0.631	0.887
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Top	Reduced	21100	2535	18.10	19.50	1.380	-0.03	0.331	0.457
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Top	Reduced	21100	2535	18.05	19.50	1.396	0.02	0.324	0.452
	LTE Band 7	20M	QPSK	1	0	Left Cheek	Top	Reduced	21100	2535	18.10	19.50	1.380	-0.06	0.267	0.369
	LTE Band 7	20M	QPSK	50	0	Left Cheek	Top	Reduced	21100	2535	18.05	19.50	1.396	0.01	0.261	0.364
	LTE Band 7	20M	QPSK	1	0	Left Tilted	Top	Reduced	21100	2535	18.10	19.50	1.380	0.02	0.133	0.184
	LTE Band 7	20M	QPSK	50	0	Left Tilted	Top	Reduced	21100	2535	18.05	19.50	1.396	0.01	0.114	0.159
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Bottom	Full	21100	2535	22.99	24.00	1.262	0.02	0.058	0.073
	LTE Band 7	20M	QPSK	50	0	Right Cheek	Bottom	Full	21100	2535	21.99	23.00	1.262	0.06	0.046	0.058
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Bottom	Full	21100	2535	22.99	24.00	1.262	-0.02	0.067	0.084
	LTE Band 7	20M	QPSK	50	0	Right Tilted	Bottom	Full	21100	2535	21.99	23.00	1.262	0.03	0.060	0.076
	LTE Band 7	20M	QPSK	1	0	Left Cheek	Bottom	Full	21100	2535	22.99	24.00	1.262	0.01	0.068	0.086
	LTE Band 7	20M	QPSK	1	0	Left Cheek	Bottom	Full	21100+20902	2535+2515.2	22.85	24.00	1.303	0.04	0.060	0.078
	LTE Band 7	20M	QPSK	50	0	Left Cheek	Bottom	Full	21100	2535	21.99	23.00	1.262	0.06	0.059	0.074
	LTE Band 7	20M	QPSK	1	0	Left Tilted	Bottom	Full	21100	2535	22.99	24.00	1.262	-0.03	0.061	0.077
	LTE Band 7	20M	QPSK	50	0	Left Tilted	Bottom	Full	21100	2535	21.99	23.00	1.262	0.12	0.050	0.063



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
10	LTE Band 38	20M	QPSK	1	0	Right Cheek	Top	Reduced	38000	2595	19.72	21.00	1.343	62.9	1.006	0.11	0.562	0.759
	LTE Band 38	20M	QPSK	1	0	Right Cheek	Top	Reduced	37901+38099	2585.1+2604.9	19.75	21.00	1.334	62.9	1.006	0.19	0.560	0.751
	LTE Band 38	20M	QPSK	50	0	Right Cheek	Top	Reduced	38000	2595	19.71	21.00	1.346	62.9	1.006	0.05	0.555	0.751
	LTE Band 38	20M	QPSK	1	0	Right Tilted	Top	Reduced	38000	2595	19.72	21.00	1.343	62.9	1.006	0.05	0.314	0.424
	LTE Band 38	20M	QPSK	50	0	Right Tilted	Top	Reduced	38000	2595	19.71	21.00	1.346	62.9	1.006	0.02	0.273	0.370
	LTE Band 38	20M	QPSK	1	0	Left Cheek	Top	Reduced	38000	2595	19.72	21.00	1.343	62.9	1.006	-0.03	0.271	0.366
	LTE Band 38	20M	QPSK	50	0	Left Cheek	Top	Reduced	38000	2595	19.71	21.00	1.346	62.9	1.006	0.03	0.266	0.360
	LTE Band 38	20M	QPSK	1	0	Left Tilted	Top	Reduced	38000	2595	19.72	21.00	1.343	62.9	1.006	-0.02	0.124	0.168
	LTE Band 38	20M	QPSK	50	0	Left Tilted	Top	Reduced	38000	2595	19.71	21.00	1.346	62.9	1.006	0.02	0.100	0.135
	LTE Band 38	20M	QPSK	1	0	Right Cheek	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	-0.02	0.031	0.038
	LTE Band 38	20M	QPSK	50	0	Right Cheek	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	0.03	0.026	0.031
	LTE Band 38	20M	QPSK	1	0	Right Tilted	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.01	0.054	0.067
	LTE Band 38	20M	QPSK	1	0	Right Tilted	Bottom	Full	37901+38099	2585.1+2604.9	23.09	24.00	1.233	62.9	1.006	0.03	0.045	0.055
	LTE Band 38	20M	QPSK	50	0	Right Tilted	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	-0.11	0.043	0.053
	LTE Band 38	20M	QPSK	1	0	Left Cheek	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.04	0.034	0.043
	LTE Band 38	20M	QPSK	50	0	Left Cheek	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	-0.06	0.027	0.033
	LTE Band 38	20M	QPSK	1	0	Left Tilted	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.02	0.037	0.046
	LTE Band 38	20M	QPSK	50	0	Left Tilted	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	0.01	0.028	0.034

<WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Reduced	11	2462	16.77	17.50	1.183	100	1.000	-0.05	0.287	0.340
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Reduced	11	2462	16.77	17.50	1.183	100	1.000	0.01	0.340	0.402
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Reduced	11	2462	16.77	17.50	1.183	100	1.000	-0.09	0.448	0.530
11	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Reduced	11	2462	16.77	17.50	1.183	100	1.000	-0.13	0.477	0.564

<WLAN5GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	Reduced	56	5280	15.82	16.00	1.042	97.95	1.021	0.03	0.205	0.218
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	Reduced	56	5280	15.82	16.00	1.042	97.95	1.021	0.1	0.196	0.209
12	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Reduced	56	5280	15.82	16.00	1.042	97.95	1.021	-0.05	0.984	1.047
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Reduced	64	5320	15.81	16.00	1.045	97.95	1.021	-0.03	0.787	0.839
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	Reduced	56	5280	15.82	16.00	1.042	97.95	1.021	0.03	0.749	0.797
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	Full	100	5500	18.86	19.50	1.159	97.95	1.021	-0.17	0.213	0.252
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	Full	100	5500	18.86	19.50	1.159	97.95	1.021	0.02	0.277	0.328
13	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Full	100	5500	18.86	19.50	1.159	97.95	1.021	0.1	0.779	0.922
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Full	132	5660	18.75	19.50	1.188	97.95	1.021	-0.03	0.750	0.910
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	Full	100	5500	18.86	19.50	1.159	97.95	1.021	0.02	0.503	0.595
	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	Reduced	161	5805	17.56	18.00	1.107	97.95	1.021	0.03	0.181	0.205
	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	Reduced	161	5805	17.56	18.00	1.107	97.95	1.021	-0.05	0.220	0.249
14	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	Reduced	161	5805	17.56	18.00	1.107	97.95	1.021	0.05	0.957	1.081
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	Reduced	157	5785	17.51	18.00	1.119	97.95	1.021	-0.03	0.659	0.753
	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	Reduced	161	5805	17.56	18.00	1.107	97.95	1.021	0.02	0.436	0.493

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	78	2480	11.61	12.00	1.094	76.94	1.083	0.02	0.086	0.102
	Bluetooth	1Mbps	Right Tilted	78	2480	11.61	12.00	1.094	76.94	1.083	-0.03	0.098	0.116
	Bluetooth	1Mbps	Left Cheek	78	2480	11.61	12.00	1.094	76.94	1.083	-0.01	0.108	0.128
15	Bluetooth	1Mbps	Left Tilted	78	2480	11.61	12.00	1.094	76.94	1.083	-0.15	0.136	0.161



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	10	Top	Reduced	189	836.4	24.18	25.50	1.355	0.02	0.185	0.251
	GSM850	GPRS 4 Tx slots	Back	10	Top	Reduced	189	836.4	24.18	25.50	1.355	-0.03	0.210	0.285
	GSM850	GPRS 4 Tx slots	Left Side	10	Top	Reduced	189	836.4	24.18	25.50	1.355	-0.06	0.192	0.260
	GSM850	GPRS 4 Tx slots	Top Side	10	Top	Reduced	189	836.4	24.18	25.50	1.355	0.03	0.132	0.179
	GSM850	GPRS 4 Tx slots	Front	10	Bottom	Full	189	836.4	26.20	27.50	1.349	0.05	0.228	0.308
16	GSM850	GPRS 4 Tx slots	Back	10	Bottom	Full	189	836.4	26.20	27.50	1.349	-0.08	0.239	0.322
	GSM850	GPRS 4 Tx slots	Left Side	10	Bottom	Full	189	836.4	26.20	27.50	1.349	0.02	0.062	0.084
	GSM850	GPRS 4 Tx slots	Right Side	10	Bottom	Full	189	836.4	26.20	27.50	1.349	0.03	0.238	0.321
	GSM850	GPRS 4 Tx slots	Bottom Side	10	Bottom	Full	189	836.4	26.20	27.50	1.349	0.09	0.191	0.258
	GSM1900	GPRS 4 Tx slots	Front	10	Top	Full	661	1880	23.41	25.00	1.442	0.02	0.074	0.107
	GSM1900	GPRS 4 Tx slots	Back	10	Top	Full	661	1880	23.41	25.00	1.442	0.09	0.108	0.156
	GSM1900	GPRS 4 Tx slots	Left Side	10	Top	Full	661	1880	23.41	25.00	1.442	-0.01	0.263	0.379
	GSM1900	GPRS 4 Tx slots	Top Side	10	Top	Full	661	1880	23.41	25.00	1.442	0.03	0.077	0.111
	GSM1900	GPRS 4 Tx slots	Front	10	Bottom	Reduced	661	1880	22.58	24.00	1.387	-0.05	0.346	0.480
	GSM1900	GPRS 4 Tx slots	Back	10	Bottom	Reduced	661	1880	22.58	24.00	1.387	-0.09	0.402	0.557
	GSM1900	GPRS 4 Tx slots	Left Side	10	Bottom	Reduced	661	1880	22.58	24.00	1.387	0.06	0.036	0.049
	GSM1900	GPRS 4 Tx slots	Right Side	10	Bottom	Reduced	661	1880	22.58	24.00	1.387	0.04	0.071	0.099
	GSM1900	GPRS 4 Tx slots	Bottom Side	10	Bottom	Reduced	661	1880	22.58	24.00	1.387	0.04	0.815	1.130
	GSM1900	GPRS 4 Tx slots	Bottom Side	10	Bottom	Reduced	512	1850.2	22.24	24.00	1.500	0.02	0.733	1.099
17	GSM1900	GPRS 4 Tx slots	Bottom Side	10	Bottom	Reduced	810	1909.8	22.41	24.00	1.442	0.02	0.821	1.184



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	Top	Reduced	4182	836.4	20.85	22.00	1.303	0.03	0.208	0.271
	WCDMA Band V	RMC 12.2Kbps	Back	10	Top	Reduced	4182	836.4	20.85	22.00	1.303	-0.05	0.255	0.332
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	Top	Reduced	4182	836.4	20.85	22.00	1.303	0.04	0.251	0.327
	WCDMA Band V	RMC 12.2Kbps	Top Side	10	Top	Reduced	4182	836.4	20.85	22.00	1.303	0.03	0.143	0.186
	WCDMA Band V	RMC 12.2Kbps	Front	10	Bottom	Full	4182	836.4	23.99	25.00	1.262	0.06	0.326	0.411
18	WCDMA Band V	RMC 12.2Kbps	Back	10	Bottom	Full	4182	836.4	23.99	25.00	1.262	-0.05	0.363	0.458
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	Bottom	Full	4182	836.4	23.99	25.00	1.262	-0.09	0.110	0.139
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	Bottom	Full	4182	836.4	23.99	25.00	1.262	0.02	0.361	0.456
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	10	Bottom	Full	4182	836.4	23.99	25.00	1.262	0.02	0.214	0.270
	WCDMA Band IV	RMC 12.2Kbps	Front	10	Top	Reduced	1413	1732.6	20.27	21.50	1.327	0.02	0.107	0.142
	WCDMA Band IV	RMC 12.2Kbps	Back	10	Top	Reduced	1413	1732.6	20.27	21.50	1.327	-0.16	0.157	0.208
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	Top	Reduced	1413	1732.6	20.27	21.50	1.327	0.08	0.318	0.422
	WCDMA Band IV	RMC 12.2Kbps	Top Side	10	Top	Reduced	1413	1732.6	20.27	21.50	1.327	0.04	0.123	0.163
	WCDMA Band IV	RMC 12.2Kbps	Front	10	Bottom	Reduced	1413	1732.6	18.33	19.50	1.309	-0.03	0.323	0.423
	WCDMA Band IV	RMC 12.2Kbps	Back	10	Bottom	Reduced	1413	1732.6	18.33	19.50	1.309	0.04	0.409	0.535
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	Bottom	Reduced	1413	1732.6	18.33	19.50	1.309	0.02	0.051	0.067
	WCDMA Band IV	RMC 12.2Kbps	Right Side	10	Bottom	Reduced	1413	1732.6	18.33	19.50	1.309	0.02	0.067	0.088
19	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	1413	1732.6	18.33	19.50	1.309	0.06	0.769	1.007
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	1312	1712.4	18.27	19.50	1.327	-0.01	0.690	0.916
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	1513	1752.6	18.29	19.50	1.321	0.04	0.744	0.983
	WCDMA Band II	RMC 12.2Kbps	Front	10	Top	Reduced	9400	1880	20.62	21.50	1.225	-0.11	0.092	0.112
	WCDMA Band II	RMC 12.2Kbps	Back	10	Top	Reduced	9400	1880	20.62	21.50	1.225	-0.02	0.125	0.153
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	Top	Reduced	9400	1880	20.62	21.50	1.225	0.02	0.311	0.381
	WCDMA Band II	RMC 12.2Kbps	Top Side	10	Top	Reduced	9400	1880	20.62	21.50	1.225	-0.01	0.097	0.118
	WCDMA Band II	RMC 12.2Kbps	Front	10	Bottom	Reduced	9400	1880	18.36	19.00	1.159	-0.05	0.233	0.270
	WCDMA Band II	RMC 12.2Kbps	Back	10	Bottom	Reduced	9400	1880	18.36	19.00	1.159	0.02	0.311	0.360
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	Bottom	Reduced	9400	1880	18.36	19.00	1.159	0.06	0.026	0.030
	WCDMA Band II	RMC 12.2Kbps	Right Side	10	Bottom	Reduced	9400	1880	18.36	19.00	1.159	-0.01	0.053	0.061
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	9400	1880	18.36	19.00	1.159	0.08	0.717	0.831
20	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	9262	1852.4	18.20	19.00	1.202	0.03	0.697	0.838
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	Bottom	Reduced	9538	1907.6	18.32	19.00	1.169	0.04	0.691	0.808



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	0	Front	10	Top	Reduced	20525	836.5	21.45	22.50	1.274	0.08	0.213	0.271
	LTE Band 5	10M	QPSK	25	0	Front	10	Top	Reduced	20525	836.5	21.21	22.50	1.346	-0.07	0.184	0.248
	LTE Band 5	10M	QPSK	1	0	Back	10	Top	Reduced	20525	836.5	21.45	22.50	1.274	-0.15	0.267	0.340
	LTE Band 5	10M	QPSK	25	0	Back	10	Top	Reduced	20525	836.5	21.21	22.50	1.346	-0.01	0.249	0.335
	LTE Band 5	10M	QPSK	1	0	Left Side	10	Top	Reduced	20525	836.5	21.45	22.50	1.274	0.11	0.249	0.317
	LTE Band 5	10M	QPSK	25	0	Left Side	10	Top	Reduced	20525	836.5	21.21	22.50	1.346	0.02	0.233	0.314
	LTE Band 5	10M	QPSK	1	0	Top Side	10	Top	Reduced	20525	836.5	21.45	22.50	1.274	0.01	0.154	0.196
	LTE Band 5	10M	QPSK	25	0	Top Side	10	Top	Reduced	20525	836.5	21.21	22.50	1.346	-0.11	0.126	0.170
	LTE Band 5	10M	QPSK	1	0	Front	10	Bottom	Full	20525	836.5	22.82	24.00	1.312	0.02	0.063	0.083
	LTE Band 5	10M	QPSK	25	0	Front	10	Bottom	Full	20525	836.5	21.89	23.00	1.291	0.03	0.051	0.066
	LTE Band 5	10M	QPSK	1	0	Back	10	Bottom	Full	20525	836.5	22.82	24.00	1.312	0.03	0.213	0.279
	LTE Band 5	10M	QPSK	25	0	Back	10	Bottom	Full	20525	836.5	21.89	23.00	1.291	-0.02	0.209	0.270
	LTE Band 5	10M	QPSK	1	0	Left Side	10	Bottom	Full	20525	836.5	22.82	24.00	1.312	0.07	0.092	0.121
	LTE Band 5	10M	QPSK	25	0	Left Side	10	Bottom	Full	20525	836.5	21.89	23.00	1.291	-0.03	0.072	0.093
21	LTE Band 5	10M	QPSK	1	0	Right Side	10	Bottom	Full	20525	836.5	22.82	24.00	1.312	-0.04	0.291	0.382
	LTE Band 5	10M	QPSK	25	0	Right Side	10	Bottom	Full	20525	836.5	21.89	23.00	1.291	-0.02	0.236	0.305
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10	Bottom	Full	20525	836.5	22.82	24.00	1.312	0.01	0.165	0.217
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10	Bottom	Full	20525	836.5	21.89	23.00	1.291	-0.06	0.137	0.177
	LTE Band 4	20M	QPSK	1	0	Front	10	Top	Reduced	20175	1732.5	20.68	21.50	1.208	0.01	0.118	0.143
	LTE Band 4	20M	QPSK	50	0	Front	10	Top	Reduced	20175	1732.5	20.71	21.50	1.199	0.02	0.099	0.118
	LTE Band 4	20M	QPSK	1	0	Back	10	Top	Reduced	20175	1732.5	20.68	21.50	1.208	0.01	0.160	0.193
	LTE Band 4	20M	QPSK	50	0	Back	10	Top	Reduced	20175	1732.5	20.71	21.50	1.199	0.03	0.140	0.168
	LTE Band 4	20M	QPSK	1	0	Left Side	10	Top	Reduced	20175	1732.5	20.68	21.50	1.208	-0.09	0.331	0.400
	LTE Band 4	20M	QPSK	50	0	Left Side	10	Top	Reduced	20175	1732.5	20.71	21.50	1.199	-0.03	0.289	0.347
	LTE Band 4	20M	QPSK	1	0	Top Side	10	Top	Reduced	20175	1732.5	20.68	21.50	1.208	0.09	0.129	0.156
	LTE Band 4	20M	QPSK	50	0	Top Side	10	Top	Reduced	20175	1732.5	20.71	21.50	1.199	0.01	0.107	0.128
	LTE Band 4	20M	QPSK	1	0	Front	10	Bottom	Reduced	20175	1732.5	18.76	20.00	1.330	0.02	0.354	0.471
	LTE Band 4	20M	QPSK	50	0	Front	10	Bottom	Reduced	20175	1732.5	18.75	20.00	1.334	0.03	0.298	0.397
	LTE Band 4	20M	QPSK	1	0	Back	10	Bottom	Reduced	20175	1732.5	18.76	20.00	1.330	0.02	0.462	0.615
	LTE Band 4	20M	QPSK	50	0	Back	10	Bottom	Reduced	20175	1732.5	18.75	20.00	1.334	-0.05	0.410	0.547
	LTE Band 4	20M	QPSK	1	0	Left Side	10	Bottom	Reduced	20175	1732.5	18.76	20.00	1.330	0.03	0.054	0.072
	LTE Band 4	20M	QPSK	50	0	Left Side	10	Bottom	Reduced	20175	1732.5	18.75	20.00	1.334	-0.01	0.049	0.065
	LTE Band 4	20M	QPSK	1	0	Right Side	10	Bottom	Reduced	20175	1732.5	18.76	20.00	1.330	0.06	0.070	0.093
	LTE Band 4	20M	QPSK	50	0	Right Side	10	Bottom	Reduced	20175	1732.5	18.75	20.00	1.334	-0.09	0.071	0.094
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	20175	1732.5	18.76	20.00	1.330	0.02	0.728	0.969
22	LTE Band 4	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	20175	1732.5	18.75	20.00	1.334	0.08	0.779	1.039
	LTE Band 4	20M	QPSK	100	0	Bottom Side	10	Bottom	Reduced	20175	1732.5	18.73	20.00	1.340	0.02	0.755	1.011



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10	Top	Reduced	18900	1880	20.08	21.00	1.236	0.02	0.088	0.109
	LTE Band 2	20M	QPSK	50	0	Front	10	Top	Reduced	18900	1880	19.97	21.00	1.268	0.11	0.102	0.129
	LTE Band 2	20M	QPSK	1	0	Back	10	Top	Reduced	18900	1880	20.08	21.00	1.236	0.02	0.113	0.140
	LTE Band 2	20M	QPSK	50	0	Back	10	Top	Reduced	18900	1880	19.97	21.00	1.268	-0.03	0.110	0.139
	LTE Band 2	20M	QPSK	1	0	Left Side	10	Top	Reduced	18900	1880	20.08	21.00	1.236	-0.04	0.275	0.340
	LTE Band 2	20M	QPSK	50	0	Left Side	10	Top	Reduced	18900	1880	19.97	21.00	1.268	0.02	0.280	0.355
	LTE Band 2	20M	QPSK	1	0	Top Side	10	Top	Reduced	18900	1880	20.08	21.00	1.236	-0.1	0.083	0.103
	LTE Band 2	20M	QPSK	50	0	Top Side	10	Top	Reduced	18900	1880	19.97	21.00	1.268	0.04	0.088	0.111
	LTE Band 2	20M	QPSK	1	0	Front	10	Bottom	Reduced	18900	1880	18.57	19.50	1.239	0.02	0.270	0.334
	LTE Band 2	20M	QPSK	50	0	Front	10	Bottom	Reduced	18900	1880	18.34	19.50	1.306	0.06	0.245	0.320
	LTE Band 2	20M	QPSK	1	0	Back	10	Bottom	Reduced	18900	1880	18.57	19.50	1.239	0.11	0.381	0.472
	LTE Band 2	20M	QPSK	50	0	Back	10	Bottom	Reduced	18900	1880	18.34	19.50	1.306	-0.04	0.369	0.482
	LTE Band 2	20M	QPSK	1	0	Left Side	10	Bottom	Reduced	18900	1880	18.57	19.50	1.239	0.03	0.029	0.035
	LTE Band 2	20M	QPSK	50	0	Left Side	10	Bottom	Reduced	18900	1880	18.34	19.50	1.306	-0.05	0.027	0.036
	LTE Band 2	20M	QPSK	1	0	Right Side	10	Bottom	Reduced	18900	1880	18.57	19.50	1.239	0.04	0.052	0.064
	LTE Band 2	20M	QPSK	50	0	Right Side	10	Bottom	Reduced	18900	1880	18.34	19.50	1.306	-0.04	0.059	0.077
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	18900	1880	18.57	19.50	1.239	-0.03	0.754	0.934
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	18700	1860	18.35	19.50	1.303	0.05	0.736	0.959
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	19100	1900	18.31	19.50	1.315	0.03	0.750	0.986
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	18900	1880	18.34	19.50	1.306	0.09	0.768	1.003
23	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	18700	1860	18.26	19.50	1.330	0.06	0.772	1.027
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	19100	1900	18.33	19.50	1.309	0.02	0.736	0.964
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10	Bottom	Reduced	18900	1880	18.31	19.50	1.315	-0.03	0.753	0.990
	LTE Band 7	20M	QPSK	1	0	Front	10	Top	Reduced	21100	2535	18.10	19.50	1.380	0.05	0.157	0.217
	LTE Band 7	20M	QPSK	50	0	Front	10	Top	Reduced	21100	2535	18.05	19.50	1.396	0.02	0.171	0.239
	LTE Band 7	20M	QPSK	1	0	Back	10	Top	Reduced	21100	2535	18.10	19.50	1.380	-0.02	0.161	0.222
	LTE Band 7	20M	QPSK	50	0	Back	10	Top	Reduced	21100	2535	18.05	19.50	1.396	0.05	0.150	0.209
	LTE Band 7	20M	QPSK	1	0	Left Side	10	Top	Reduced	21100	2535	18.10	19.50	1.380	0.11	0.345	0.476
	LTE Band 7	20M	QPSK	1	0	Left Side	10	Top	Reduced	21100+	2535+	18.08	19.50	1.387	0.04	0.342	0.474
	LTE Band 7	20M	QPSK	50	0	Left Side	10	Top	Reduced	20902	2515.2	18.05	19.50	1.396	0.03	0.334	0.466
	LTE Band 7	20M	QPSK	1	0	Top Side	10	Top	Reduced	21100	2535	18.10	19.50	1.380	0.04	0.098	0.136
	LTE Band 7	20M	QPSK	50	0	Top Side	10	Top	Reduced	21100	2535	18.05	19.50	1.396	0.02	0.095	0.133
	LTE Band 7	20M	QPSK	1	0	Front	10	Bottom	Reduced	21100	2535	20.85	21.50	1.161	0.03	0.272	0.316
	LTE Band 7	20M	QPSK	50	0	Front	10	Bottom	Reduced	21100	2535	20.62	21.50	1.225	-0.03	0.266	0.326
	LTE Band 7	20M	QPSK	1	0	Back	10	Bottom	Reduced	21100	2535	20.85	21.50	1.161	-0.08	0.308	0.358
	LTE Band 7	20M	QPSK	50	0	Back	10	Bottom	Reduced	21100	2535	20.62	21.50	1.225	-0.04	0.303	0.371
	LTE Band 7	20M	QPSK	1	0	Left Side	10	Bottom	Reduced	21100	2535	20.85	21.50	1.161	0.02	0.148	0.172
	LTE Band 7	20M	QPSK	50	0	Left Side	10	Bottom	Reduced	21100	2535	20.62	21.50	1.225	0.06	0.138	0.169
	LTE Band 7	20M	QPSK	1	0	Right Side	10	Bottom	Reduced	21100	2535	20.85	21.50	1.161	-0.11	0.064	0.074
	LTE Band 7	20M	QPSK	50	0	Right Side	10	Bottom	Reduced	21100	2535	20.62	21.50	1.225	0.05	0.064	0.079
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	21100	2535	20.85	21.50	1.161	0.05	0.686	0.797
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	20850	2510	20.60	21.50	1.230	0.08	0.651	0.801
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10	Bottom	Reduced	21350	2560	20.59	21.50	1.233	0.09	0.090	0.111
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	21100	2535	20.62	21.50	1.225	0.03	0.709	0.868
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	20850	2510	20.55	21.50	1.245	0.07	0.672	0.836
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	Bottom	Reduced	21350	2560	20.59	21.50	1.233	0.02	0.717	0.884
24	LTE Band 7	20M	QPSK	100	0	Bottom Side	10	Bottom	Reduced	21100	2535	20.45	21.50	1.274	0.07	0.706	0.899
	LTE Band 7	20M	QPSK	100	0	Bottom Side	10	Bottom	Reduced	21100+	2535+	20.73	21.50	1.194	-0.03	0.665	0.794



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Front	10	Top	Reduced	38000	2595	19.72	21.00	1.343	62.9	1.006	0.02	0.132	0.178
	LTE Band 38	20M	QPSK	50	0	Front	10	Top	Reduced	38000	2595	19.71	21.00	1.346	62.9	1.006	0.01	0.144	0.195
	LTE Band 38	20M	QPSK	1	0	Back	10	Top	Reduced	38000	2595	19.72	21.00	1.343	62.9	1.006	0.08	0.144	0.195
	LTE Band 38	20M	QPSK	50	0	Back	10	Top	Reduced	38000	2595	19.71	21.00	1.346	62.9	1.006	0.01	0.137	0.185
	LTE Band 38	20M	QPSK	1	0	Left Side	10	Top	Reduced	38000	2595	19.72	21.00	1.343	62.9	1.006	0.09	0.313	0.423
	LTE Band 38	20M	QPSK	50	0	Left Side	10	Top	Reduced	38000	2595	19.71	21.00	1.346	62.9	1.006	-0.03	0.314	0.425
	LTE Band 38	20M	QPSK	50	0	Left Side	10	Top	Reduced	37901+38099	2585.1+2604.9	19.75	21.00	1.334	62.9	1.006	0.08	0.313	0.420
	LTE Band 38	20M	QPSK	1	0	Top Side	10	Top	Reduced	38000	2595	19.72	21.00	1.343	62.9	1.006	-0.02	0.070	0.094
	LTE Band 38	20M	QPSK	50	0	Top Side	10	Top	Reduced	38000	2595	19.71	21.00	1.346	62.9	1.006	-0.01	0.069	0.093
	LTE Band 38	20M	QPSK	1	0	Front	10	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.01	0.297	0.368
	LTE Band 38	20M	QPSK	50	0	Front	10	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	0.02	0.243	0.296
	LTE Band 38	20M	QPSK	1	0	Back	10	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.01	0.379	0.470
	LTE Band 38	20M	QPSK	50	0	Back	10	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	0.04	0.310	0.378
	LTE Band 38	20M	QPSK	1	0	Left Side	10	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.01	0.160	0.198
	LTE Band 38	20M	QPSK	50	0	Left Side	10	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	0.02	0.129	0.157
	LTE Band 38	20M	QPSK	1	0	Right Side	10	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.01	0.076	0.094
	LTE Band 38	20M	QPSK	50	0	Right Side	10	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	0.03	0.063	0.076
25	LTE Band 38	20M	QPSK	1	0	Bottom Side	10	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.03	0.868	1.077
	LTE Band 38	20M	QPSK	1	0	Bottom Side	10	Bottom	Full	37901(PCC) + 38099(SCC)	2585.1(PCC) + 2604.9(SCC)	23.09	24.00	1.233	62.9	1.006	0.03	0.867	1.076
	LTE Band 38	20M	QPSK	50	0	Bottom Side	10	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	-0.03	0.715	0.871
	LTE Band 38	20M	QPSK	100	0	Bottom Side	10	Bottom	Full	38000	2595	22.11	23.00	1.227	62.9	1.006	-0.04	0.716	0.884

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	Reduced	11	2462	16.77	17.50	1.183	100	1.000	0.01	0.092	0.108
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	Reduced	11	2462	16.77	17.50	1.183	100	1.000	-0.08	0.116	0.137
	WLAN 2.4GHz	802.11b 1Mbps	Right Side	10	Reduced	11	2462	16.77	17.50	1.183	100	1.000	0.03	0.086	0.102
26	WLAN 2.4GHz	802.11b 1Mbps	Top Side	10	Reduced	11	2462	16.77	17.50	1.183	100	1.000	0.01	0.204	0.241

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Front	10	Reduced	44	5220	15.87	16.00	1.030	97.95	1.021	0.03	0.122	0.128
27	WLAN5.2GHz	802.11a 6Mbps	Back	10	Reduced	44	5220	15.87	16.00	1.030	97.95	1.021	0.06	0.306	0.322
	WLAN5.2GHz	802.11a 6Mbps	Right Side	10	Reduced	44	5220	15.87	16.00	1.030	97.95	1.021	-0.01	0.124	0.130
	WLAN5.2GHz	802.11a 6Mbps	Top Side	10	Reduced	44	5220	15.87	16.00	1.030	97.95	1.021	0.08	0.205	0.216
	WLAN5.8GHz	802.11a 6Mbps	Front	10	Reduced	161	5805	17.56	18.00	1.107	97.95	1.021	0.01	0.004	0.005
28	WLAN5.8GHz	802.11a 6Mbps	Back	10	Reduced	161	5805	17.56	18.00	1.107	97.95	1.021	0.14	0.571	0.645
	WLAN5.8GHz	802.11a 6Mbps	Right Side	10	Reduced	161	5805	17.56	18.00	1.107	97.95	1.021	0.03	0.279	0.315
	WLAN5.8GHz	802.11a 6Mbps	Top Side	10	Reduced	161	5805	17.56	18.00	1.107	97.95	1.021	0.01	0.281	0.317



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10	78	2480	11.61	12.00	1.094	76.94	1.083	0.03	0.020	0.024
	Bluetooth	1Mbps	Back	10	78	2480	11.61	12.00	1.094	76.94	1.083	0.03	0.041	0.048
	Bluetooth	1Mbps	Right Side	10	78	2480	11.61	12.00	1.094	76.94	1.083	0.02	0.028	0.033
29	Bluetooth	1Mbps	Top Side	10	78	2480	11.61	12.00	1.094	76.94	1.083	0.05	0.066	0.078



15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduced	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	15	Top	Full	189	836.4	26.20	27.50	1.349	-0.05	0.136	0.183
	GSM850	GPRS 4 Tx slots	Back	15	Top	Full	189	836.4	26.20	27.50	1.349	0.07	0.144	0.194
	GSM850	GPRS 4 Tx slots	Front	15	Bottom	Full	189	836.4	26.20	27.50	1.349	0.03	0.141	0.190
30	GSM850	GPRS 4 Tx slots	Back	15	Bottom	Full	189	836.4	26.20	27.50	1.349	-0.05	0.152	0.205
	GSM1900	GPRS 4 Tx slots	Front	15	Top	Full	661	1880	23.41	25.00	1.442	0.01	0.047	0.068
	GSM1900	GPRS 4 Tx slots	Back	15	Top	Full	661	1880	23.41	25.00	1.442	0.03	0.050	0.072
	GSM1900	GPRS 4 Tx slots	Front	15	Bottom	Full	661	1880	23.41	25.00	1.442	0.02	0.170	0.245
31	GSM1900	GPRS 4 Tx slots	Back	15	Bottom	Full	661	1880	23.41	25.00	1.442	-0.09	0.231	0.333

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Reduced	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	15	Top	Full	4182	836.4	23.99	25.00	1.262	0.09	0.193	0.244
	WCDMA Band V	RMC 12.2Kbps	Back	15	Top	Full	4182	836.4	23.99	25.00	1.262	-0.14	0.239	0.302
	WCDMA Band V	RMC 12.2Kbps	Front	15	Bottom	Full	4182	836.4	23.99	25.00	1.262	0.05	0.210	0.265
32	WCDMA Band V	RMC 12.2Kbps	Back	15	Bottom	Full	4182	836.4	23.99	25.00	1.262	-0.02	0.242	0.305
	WCDMA Band IV	RMC 12.2Kbps	Front	15	Top	Full	1413	1732.6	23.19	24.50	1.352	0.02	0.131	0.177
	WCDMA Band IV	RMC 12.2Kbps	Back	15	Top	Full	1413	1732.6	23.19	24.50	1.352	-0.18	0.141	0.191
	WCDMA Band IV	RMC 12.2Kbps	Front	15	Bottom	Full	1413	1732.6	23.19	24.50	1.352	0.04	0.539	0.729
	WCDMA Band IV	RMC 12.2Kbps	Back	15	Bottom	Full	1413	1732.6	23.19	24.50	1.352	-0.03	0.699	0.945
	WCDMA Band IV	RMC 12.2Kbps	Back	15	Bottom	Full	1312	1712.4	23.16	24.50	1.361	0.08	0.639	0.870
33	WCDMA Band IV	RMC 12.2Kbps	Back	15	Bottom	Full	1513	1752.6	23.12	24.50	1.374	-0.05	0.715	0.982
	WCDMA Band II	RMC 12.2Kbps	Front	15	Top	Full	9400	1880	23.91	25.00	1.285	-0.02	0.123	0.158
	WCDMA Band II	RMC 12.2Kbps	Back	15	Top	Full	9400	1880	23.91	25.00	1.285	-0.06	0.139	0.179
	WCDMA Band II	RMC 12.2Kbps	Front	15	Bottom	Full	9400	1880	23.91	25.00	1.285	0.03	0.459	0.590
	WCDMA Band II	RMC 12.2Kbps	Back	15	Bottom	Full	9400	1880	23.91	25.00	1.285	0.13	0.710	0.913
	WCDMA Band II	RMC 12.2Kbps	Back	15	Bottom	Full	9262	1852.4	23.83	25.00	1.309	-0.07	0.687	0.899
34	WCDMA Band II	RMC 12.2Kbps	Back	15	Bottom	Full	9538	1907.6	23.87	25.00	1.297	0.02	0.721	0.935



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Reduced	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	0	Front	15	Top	Full	20525	836.5	22.82	24.00	1.312	-0.02	0.149	0.196
	LTE Band 5	10M	QPSK	25	0	Front	15	Top	Full	20525	836.5	21.89	23.00	1.291	0.09	0.124	0.160
	LTE Band 5	10M	QPSK	1	0	Back	15	Top	Full	20525	836.5	22.82	24.00	1.312	-0.08	0.165	0.217
	LTE Band 5	10M	QPSK	25	0	Back	15	Top	Full	20525	836.5	21.89	23.00	1.291	0.08	0.145	0.187
	LTE Band 5	10M	QPSK	1	0	Front	15	Bottom	Full	20525	836.5	22.82	24.00	1.312	-0.05	0.176	0.231
	LTE Band 5	10M	QPSK	25	0	Front	15	Bottom	Full	20525	836.5	21.89	23.00	1.291	0.05	0.139	0.179
35	LTE Band 5	10M	QPSK	1	0	Back	15	Bottom	Full	20525	836.5	22.82	24.00	1.312	-0.04	0.193	0.253
	LTE Band 5	10M	QPSK	25	0	Back	15	Bottom	Full	20525	836.5	21.89	23.00	1.291	-0.1	0.152	0.196
	LTE Band 4	20M	QPSK	1	0	Front	15	Top	Full	20175	1732.5	22.85	24.00	1.303	-0.13	0.110	0.143
	LTE Band 4	20M	QPSK	50	0	Front	15	Top	Full	20175	1732.5	21.88	23.00	1.294	-0.09	0.092	0.119
	LTE Band 4	20M	QPSK	1	0	Back	15	Top	Full	20175	1732.5	22.85	24.00	1.303	0.1	0.121	0.158
	LTE Band 4	20M	QPSK	50	0	Back	15	Top	Full	20175	1732.5	21.88	23.00	1.294	-0.02	0.099	0.128
	LTE Band 4	20M	QPSK	1	0	Front	15	Bottom	Full	20175	1732.5	22.85	24.00	1.303	0.05	0.463	0.603
	LTE Band 4	20M	QPSK	50	0	Front	15	Bottom	Full	20175	1732.5	21.88	23.00	1.294	0.04	0.381	0.493
36	LTE Band 4	20M	QPSK	1	0	Back	15	Bottom	Full	20175	1732.5	22.85	24.00	1.303	-0.07	0.611	0.796
	LTE Band 4	20M	QPSK	50	0	Back	15	Bottom	Full	20175	1732.5	21.88	23.00	1.294	0.03	0.487	0.630
	LTE Band 2	20M	QPSK	1	0	Front	15	Top	Full	18900	1880	22.74	24.00	1.337	0.02	0.101	0.135
	LTE Band 2	20M	QPSK	50	0	Front	15	Top	Full	18900	1880	21.85	23.00	1.303	0.06	0.083	0.109
	LTE Band 2	20M	QPSK	1	0	Back	15	Top	Full	18900	1880	22.74	24.00	1.337	-0.09	0.111	0.148
	LTE Band 2	20M	QPSK	50	0	Back	15	Top	Full	18900	1880	21.85	23.00	1.303	-0.03	0.095	0.124
	LTE Band 2	20M	QPSK	1	0	Front	15	Bottom	Full	18900	1880	22.74	24.00	1.337	-0.13	0.368	0.492
	LTE Band 2	20M	QPSK	50	0	Front	15	Bottom	Full	18900	1880	21.85	23.00	1.303	-0.01	0.301	0.392
37	LTE Band 2	20M	QPSK	1	0	Back	15	Bottom	Full	18900	1880	22.74	24.00	1.337	-0.06	0.528	0.706
	LTE Band 2	20M	QPSK	50	0	Back	15	Bottom	Full	18900	1880	21.85	23.00	1.303	-0.02	0.411	0.536
	LTE Band 7	20M	QPSK	1	0	Front	15	Top	Full	21100	2535	22.99	23.50	1.125	0.05	0.236	0.265
	LTE Band 7	20M	QPSK	1	0	Front	15	Top	Full	21100+20902	2535+2515.2	22.85	23.50	1.161	0.15	0.231	0.268
	LTE Band 7	20M	QPSK	50	0	Front	15	Top	Full	21100	2535	21.99	22.50	1.125	0.06	0.188	0.211
	LTE Band 7	20M	QPSK	1	0	Back	15	Top	Full	21100	2535	22.99	23.50	1.125	-0.03	0.175	0.197
	LTE Band 7	20M	QPSK	50	0	Back	15	Top	Full	21100	2535	21.99	22.50	1.125	-0.19	0.140	0.157
	LTE Band 7	20M	QPSK	1	0	Front	15	Bottom	Full	21100	2535	22.99	24.00	1.262	-0.04	0.268	0.338
	LTE Band 7	20M	QPSK	50	0	Front	15	Bottom	Full	21100	2535	21.99	23.00	1.262	-0.03	0.211	0.266
38	LTE Band 7	20M	QPSK	1	0	Back	15	Bottom	Full	21100	2535	22.99	24.00	1.262	0.08	0.365	0.461
	LTE Band 7	20M	QPSK	1	0	Back	15	Bottom	Full	21100+20902	2535+2515.2	22.85	24.00	1.303	0.01	0.313	0.408
	LTE Band 7	20M	QPSK	50	0	Back	15	Bottom	Full	21100	2535	21.99	23.00	1.262	0.15	0.260	0.328



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Reduced	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Front	15	Top	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	-0.02	0.145	0.180
	LTE Band 38	20M	QPSK	1	0	Front	15	Top	Full	37901+38099	2585.1+2604.9	23.09	24.00	1.233	62.9	1.006	0.13	0.142	0.176
	LTE Band 38	20M	QPSK	1	0	Front	15	Top	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	-0.03	0.118	0.144
	LTE Band 38	20M	QPSK	1	0	Back	15	Top	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	-0.14	0.107	0.133
	LTE Band 38	20M	QPSK	1	0	Back	15	Top	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	-0.05	0.087	0.106
	LTE Band 38	20M	QPSK	1	0	Front	15	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.01	0.162	0.201
	LTE Band 38	20M	QPSK	50	0	Front	15	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	0.07	0.131	0.160
39	LTE Band 38	20M	QPSK	1	0	Back	15	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.05	0.230	0.285
	LTE Band 38	20M	QPSK	1	0	Back	15	Bottom	Full	37901+38099	2585.1+2604.9	23.09	24.00	1.233	62.9	1.006	0.09	0.189	0.234
	LTE Band 38	20M	QPSK	50	0	Back	15	Bottom	Full	38000	2595	22.17	23.00	1.211	62.9	1.006	0.03	0.163	0.199



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduced	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	15	Full	11	2462	20.93	21.50	1.140	100	1.000	0.03	0.126	0.144
40	WLAN 2.4GHz	802.11b 1Mbps	Back	15	Full	11	2462	20.93	21.50	1.140	100	1.000	0.01	0.145	0.165

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduced Level	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	15	Full	56	5280	18.86	19.50	1.159	97.95	1.021	-0.02	0.089	0.105
41	WLAN5.3GHz	802.11a 6Mbps	Back	15	Full	56	5280	18.86	19.50	1.159	97.95	1.021	-0.06	0.440	0.521
	WLAN5.5GHz	802.11a 6Mbps	Front	15	Full	100	5500	18.86	19.50	1.159	97.95	1.021	0.03	0.065	0.077
	WLAN5.5GHz	802.11a 6Mbps	Back	15	Full	100	5500	18.86	19.50	1.159	97.95	1.021	0.07	0.720	0.852
42	WLAN5.5GHz	802.11a 6Mbps	Back	15	Full	132	5660	18.75	19.50	1.189	97.95	1.021	-0.1	0.790	0.959
	WLAN5.8GHz	802.11a 6Mbps	Front	15	Full	161	5805	18.79	19.50	1.178	97.95	1.021	0.01	0.031	0.037
43	WLAN5.8GHz	802.11a 6Mbps	Back	15	Full	161	5805	18.79	19.50	1.178	97.95	1.021	0.01	0.436	0.524

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	15	78	2480	11.61	12.00	1.094	76.94	1.083	0.03	0.018	0.021
44	Bluetooth	1Mbps	Back	15	78	2480	11.61	12.00	1.094	76.94	1.083	0.02	0.022	0.026



15.4 Product specific 10g SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
45	GSM1900	GPRS 4 Tx slots	Bottom Side	0	Bottom	Full	661	1880	23.41	25.00	1.442	0.04	1.140	1.644

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
46	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	0	Bottom	Reduced	1413	1732.6	21.31	22.50	1.315	0.08	2.020	2.657
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	0	Bottom	Reduced	1312	1712.4	21.26	22.50	1.330	0.03	1.980	2.634
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	0	Bottom	Reduced	1513	1752.6	21.27	22.50	1.327	-0.01	1.950	2.588
47	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Bottom	Reduced	9400	1880	21.91	23.00	1.285	0.06	2.190	2.815
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Bottom	Reduced	9262	1852.4	21.85	23.00	1.303	0.03	1.980	2.580
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Bottom	Reduced	9538	1907.6	21.84	23.00	1.306	0.01	2.150	2.808

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
48	LTE Band 4	20M	QPSK	1	0	Back	0	Bottom	Reduced	20175	1732.5	22.25	23.00	1.189	-0.04	2.910	3.459
	LTE Band 4	20M	QPSK	50	0	Back	0	Bottom	Reduced	20175	1732.5	21.86	23.00	1.300	0.01	2.680	3.484
	LTE Band 4	20M	QPSK	100	0	Back	0	Bottom	Reduced	20175	1732.5	21.71	23.00	1.346	-0.03	2.540	3.418
	LTE Band 4	20M	QPSK	1	0	Bottom Side	0	Bottom	Reduced	20175	1732.5	22.25	23.00	1.189	0.07	2.600	3.090
	LTE Band 4	20M	QPSK	50	0	Bottom Side	0	Bottom	Reduced	20175	1732.5	21.86	23.00	1.300	0.09	2.340	3.042
	LTE Band 4	20M	QPSK	100	0	Bottom Side	0	Bottom	Reduced	20175	1732.5	21.71	23.00	1.346	0.01	1.950	2.624
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Bottom	Reduced	18900	1880	21.75	23.00	1.334	0.03	2.040	2.720
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Bottom	Reduced	18700	1860	21.71	23.00	1.346	0.02	2.010	2.705
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0	Bottom	Reduced	19100	1900	21.71	23.00	1.346	0.03	2.010	2.705
49	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Bottom	Reduced	18900	1880	21.82	23.00	1.312	0.01	2.090	2.742
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Bottom	Reduced	18700	1860	21.71	23.00	1.346	0.06	1.590	2.140
	LTE Band 2	20M	QPSK	50	0	Bottom Side	0	Bottom	Reduced	19100	1900	21.73	23.00	1.340	0.01	1.550	2.076
	LTE Band 2	20M	QPSK	100	0	Bottom Side	0	Bottom	Reduced	18900	1880	21.80	23.00	1.318	-0.03	1.610	2.122

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
50	WLAN5.3GHz	802.11a 6Mbps	Front	0	Full	56	5280	18.86	19.50	1.159	97.95	1.021	-0.02	0.888	1.051
	WLAN5.3GHz	802.11a 6Mbps	Back	0	Full	56	5280	18.86	19.50	1.159	97.95	1.021	0.07	1.090	1.290
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0	Full	56	5280	18.86	19.50	1.159	97.95	1.021	0.02	0.805	0.952
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0	Full	56	5280	18.86	19.50	1.159	97.95	1.021	-0.04	0.467	0.553
51	WLAN5.5GHz	802.11a 6Mbps	Front	0	Full	100	5500	18.86	19.50	1.159	97.95	1.021	0.02	0.552	0.653
	WLAN5.5GHz	802.11a 6Mbps	Back	0	Full	100	5500	18.86	19.50	1.159	97.95	1.021	0.07	1.880	2.224
	WLAN5.5GHz	802.11a 6Mbps	Back	0	Full	132	5660	18.75	19.50	1.188	97.95	1.021	0.01	1.630	1.978
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0	Full	100	5500	18.86	19.50	1.159	97.95	1.021	0.04	1.450	1.716
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0	Full	100	5500	18.86	19.50	1.159	97.95	1.021	0.03	0.621	0.735



15.5 Repeated SAR Measurement

<1g SAR>

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA Band V	RMC 12.2Kbps	-	-	-	-	Right Cheek	0	Top	Reduced	4182	836.4	20.85	22.00	1.303	-	-	0.09	0.838	1	1.092
2nd	WCDMA Band V	RMC 12.2Kbps	-	-	-	-	Right Cheek	0	Top	Reduced	4182	836.4	20.85	22.00	1.303	-	-	0.01	0.829	1.011	1.080
1st	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Right Cheek	0	Top	Reduced	9538	1907.6	20.60	21.50	1.230	-	-	0.1	0.892	1	1.097
2nd	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Right Cheek	0	Top	Reduced	9538	1907.6	20.60	21.50	1.230	-	-	-0.03	0.885	1.008	1.089
1st	LTE Band 4	-	20M	QPSK	100	0	Right Cheek	0	Top	Reduced	20175	1732.5	20.67	21.50	1.211	-	-	0.08	0.930	1	1.126
2nd	LTE Band 4	-	20M	QPSK	100	0	Right Cheek	0	Top	Reduced	20175	1732.5	20.67	21.50	1.211	-	-	-0.05	0.921	1.010	1.115
1st	WLAN5.3GHz	802.11a 6Mbps	-	-	-	-	Left Cheek	0	-	Reduced	56	5280	15.82	16.00	1.042	97.95	1.021	-0.05	0.984	1	1.047
2nd	WLAN5.3GHz	802.11a 6Mbps	-	-	-	-	Left Cheek	0	-	Reduced	56	5280	15.82	16.00	1.042	97.95	1.021	-0.01	0.978	1.006	1.041
1st	WLAN5.8GHz	802.11a 6Mbps	-	-	-	-	Left Cheek	0	-	Reduced	161	5805	17.56	18.00	1.107	97.95	1.021	0.05	0.957	1	1.081
2nd	WLAN5.8GHz	802.11a 6Mbps	-	-	-	-	Left Cheek	0	-	Reduced	161	5805	17.56	18.00	1.107	97.95	1.021	-0.02	0.948	1.009	1.071
1st	LTE Band 38	-	20M	QPSK	1	0	Bottom Side	10	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	0.03	0.868	1	1.077
2nd	LTE Band 38	-	20M	QPSK	1	0	Bottom Side	10	Bottom	Full	38000	2595	23.09	24.00	1.233	62.9	1.006	-0.09	0.865	1.003	1.073

<10g SAR>

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Bottom Side	0	Bottom	Reduced	9400	1880	21.91	23.00	1.285	-	-	0.06	2.190	1	2.815
2nd	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Bottom Side	0	Bottom	Reduced	9400	1880	21.91	23.00	1.285	-	-	0.06	2.180	1.005	2.802
1st	LTE Band 4	-	20M	QPSK	1	0	Back	0	Bottom	Reduced	20175	1732.5	22.25	23.00	1.189	-	-	-0.04	2.910	1	3.459
2nd	LTE Band 4	-	20M	QPSK	1	0	Back	0	Bottom	Reduced	20175	1732.5	22.25	23.00	1.189	-	-	0.05	2.890	1.007	3.435

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	GSM Voice + WLAN2.4GHz	Yes	Yes	
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes
4.	CDMA + WLAN2.4GHz	Yes	Yes	Yes
5.	LTE + WLAN2.4GHz	Yes	Yes	Yes
6.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes	
7.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes	
8.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes	
9.	CDMA + WLAN5.3/5.5GHz	Yes	Yes	
10.	LTE + WLAN5.3/5.5GHz	Yes	Yes	
11.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes	
12.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes
13.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes
14.	CDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes
15.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes
16.	GSM Voice + Bluetooth	Yes	Yes	
17.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes
18.	WCDMA + Bluetooth	Yes	Yes	Yes
19.	CDMA + Bluetooth	Yes	Yes	Yes
20.	LTE + Bluetooth	Yes	Yes	Yes
21.	Bluetooth + WLAN5GHz	Yes	Yes	Yes
22.	GSM Voice + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes	
23.	GPRS/EDGE + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes	
24.	WCDMA + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes	
25.	CDMA + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes	
26.	LTE + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes	
27.	GSM Voice + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	
28.	GPRS/EDGE + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes
29.	WCDMA + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes
30.	CDMA + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes
31.	LTE + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes

General Note:

1. This device supports VoIP in GPRS, EGPRS, CDMA, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. EUT will choose each GSM, WCDMA, CDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. WLAN2.4GHz antenna and Bluetooth share the same antenna, so can't transmit simultaneously.
4. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
5. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
6. The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
7. For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
8. Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
9. The reported SAR summation is calculated based on the same configuration and test position.
10. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$ for 1g SAR, $SPLSR \leq 0.10$ for 10g SAR simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - v) For WWAN/Bluetooth product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.



16.1 Head Exposure Conditions

<Top Antenna >

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
GSM	GSM850	Right Cheek	1.030	0.340	0.252	0.102	1.37	1.38
		Right Tilted	0.873	0.402	0.328	0.116	1.28	1.32
		Left Cheek	0.367	0.530	1.081	0.128	0.90	1.58
		Left Tilted	0.356	0.564	0.797	0.161	0.92	1.31
	GSM1900	Right Cheek	1.185	0.340	0.252	0.102	1.53	1.54
		Right Tilted	0.466	0.402	0.328	0.116	0.87	0.91
		Left Cheek	0.277	0.530	1.081	0.128	0.81	1.49
		Left Tilted	0.211	0.564	0.797	0.161	0.78	1.17
WCDMA	Band V	Right Cheek	1.092	0.340	0.252	0.102	1.43	1.45
		Right Tilted	0.907	0.402	0.328	0.116	1.31	1.35
		Left Cheek	0.371	0.530	1.081	0.128	0.90	1.58
		Left Tilted	0.263	0.564	0.797	0.161	0.83	1.22
	Band IV	Right Cheek	1.151	0.340	0.252	0.102	1.49	1.51
		Right Tilted	0.576	0.402	0.328	0.116	0.98	1.02
		Left Cheek	0.325	0.530	1.081	0.128	0.86	1.53
		Left Tilted	0.256	0.564	0.797	0.161	0.82	1.21
	Band II	Right Cheek	1.097	0.340	0.252	0.102	1.44	1.45
		Right Tilted	0.492	0.402	0.328	0.116	0.89	0.94
		Left Cheek	0.288	0.530	1.081	0.128	0.82	1.50
		Left Tilted	0.218	0.564	0.797	0.161	0.78	1.18



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 5	Right Cheek	0.988	0.340	0.252	0.102	1.33	1.34
		Right Tilted	0.865	0.402	0.328	0.116	1.27	1.31
		Left Cheek	0.332	0.530	1.081	0.128	0.86	1.54
		Left Tilted	0.306	0.564	0.797	0.161	0.87	1.26
	Band 4	Right Cheek	1.126	0.340	0.252	0.102	1.47	1.48
		Right Tilted	0.482	0.402	0.328	0.116	0.88	0.93
		Left Cheek	0.308	0.530	1.081	0.128	0.84	1.52
		Left Tilted	0.235	0.564	0.797	0.161	0.80	1.19
	Band 2	Right Cheek	0.979	0.340	0.252	0.102	1.32	1.33
		Right Tilted	0.430	0.402	0.328	0.116	0.83	0.87
		Left Cheek	0.264	0.530	1.081	0.128	0.79	1.47
		Left Tilted	0.213	0.564	0.797	0.161	0.78	1.17
	Band 7	Right Cheek	1.060	0.340	0.252	0.102	1.40	1.41
		Right Tilted	0.457	0.402	0.328	0.116	0.86	0.90
		Left Cheek	0.369	0.530	1.081	0.128	0.90	1.58
		Left Tilted	0.184	0.564	0.797	0.161	0.75	1.14
	Band 38	Right Cheek	0.759	0.340	0.252	0.102	1.10	1.11
		Right Tilted	0.424	0.402	0.328	0.116	0.83	0.87
		Left Cheek	0.366	0.530	1.081	0.128	0.90	1.58
		Left Tilted	0.168	0.564	0.797	0.161	0.73	1.13



<Bottom Antenna >

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.233	0.340	0.252	0.102	0.57	0.59
		Right Tilted	0.099	0.402	0.328	0.116	0.50	0.54
		Left Cheek	0.167	0.530	1.081	0.128	0.70	1.38
		Left Tilted	0.099	0.564	0.797	0.161	0.66	1.06
	GSM1900	Right Cheek	0.027	0.340	0.252	0.102	0.37	0.38
		Right Tilted	0.017	0.402	0.328	0.116	0.42	0.46
		Left Cheek	0.042	0.530	1.081	0.128	0.57	1.25
		Left Tilted	0.018	0.564	0.797	0.161	0.58	0.98
WCDMA	Band V	Right Cheek	0.315	0.340	0.252	0.102	0.66	0.67
		Right Tilted	0.138	0.402	0.328	0.116	0.54	0.58
		Left Cheek	0.251	0.530	1.081	0.128	0.78	1.46
		Left Tilted	0.144	0.564	0.797	0.161	0.71	1.10
	Band IV	Right Cheek	0.109	0.340	0.252	0.102	0.45	0.46
		Right Tilted	0.056	0.402	0.328	0.116	0.46	0.50
		Left Cheek	0.195	0.530	1.081	0.128	0.73	1.40
		Left Tilted	0.039	0.564	0.797	0.161	0.60	1.00
	Band II	Right Cheek	0.089	0.340	0.252	0.102	0.43	0.44
		Right Tilted	0.049	0.402	0.328	0.116	0.45	0.49
		Left Cheek	0.145	0.530	1.081	0.128	0.68	1.35
		Left Tilted	0.035	0.564	0.797	0.161	0.60	0.99



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 5	Right Cheek	0.255	0.340	0.252	0.102	0.60	0.61
		Right Tilted	0.124	0.402	0.328	0.116	0.53	0.57
		Left Cheek	0.205	0.530	1.081	0.128	0.74	1.41
		Left Tilted	0.131	0.564	0.797	0.161	0.70	1.09
	Band 4	Right Cheek	0.087	0.340	0.252	0.102	0.43	0.44
		Right Tilted	0.073	0.402	0.328	0.116	0.48	0.52
		Left Cheek	0.151	0.530	1.081	0.128	0.68	1.36
		Left Tilted	0.080	0.564	0.797	0.161	0.64	1.04
	Band 2	Right Cheek	0.067	0.340	0.252	0.102	0.41	0.42
		Right Tilted	0.046	0.402	0.328	0.116	0.45	0.49
		Left Cheek	0.122	0.530	1.081	0.128	0.65	1.33
		Left Tilted	0.049	0.564	0.797	0.161	0.61	1.01
	Band 7	Right Cheek	0.073	0.340	0.252	0.102	0.41	0.43
		Right Tilted	0.084	0.402	0.328	0.116	0.49	0.53
		Left Cheek	0.086	0.530	1.081	0.128	0.62	1.30
		Left Tilted	0.077	0.564	0.797	0.161	0.64	1.04
	Band 38	Right Cheek	0.038	0.340	0.252	0.102	0.38	0.39
		Right Tilted	0.067	0.402	0.328	0.116	0.47	0.51
		Left Cheek	0.043	0.530	1.081	0.128	0.57	1.25
		Left Tilted	0.046	0.564	0.797	0.161	0.61	1.00

16.2 Hotspot Exposure Conditions

<Top Antenna >

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Front	0.251	0.108	0.128	0.024	0.36	0.40
		Back	0.285	0.137	0.645	0.048	0.42	0.98
		Left side	0.260				0.26	0.26
		Right side		0.102	0.315	0.033	0.10	0.35
		Top side	0.179	0.241	0.317	0.078	0.42	0.57
	GSM1900	Front	0.107	0.108	0.128	0.024	0.22	0.26
		Back	0.156	0.137	0.645	0.048	0.29	0.85
		Left side	0.379				0.38	0.38
		Right side		0.102	0.315	0.033	0.10	0.35
		Top side	0.111	0.241	0.317	0.078	0.35	0.51
WCDMA	Band V	Front	0.271	0.108	0.128	0.024	0.38	0.42
		Back	0.332	0.137	0.645	0.048	0.47	1.03
		Left side	0.327				0.33	0.33
		Right side		0.102	0.315	0.033	0.10	0.35
		Top side	0.186	0.241	0.317	0.078	0.43	0.58
	Band IV	Front	0.142	0.108	0.128	0.024	0.25	0.29
		Back	0.208	0.137	0.645	0.048	0.35	0.90
		Left side	0.422				0.42	0.42
		Right side		0.102	0.315	0.033	0.10	0.35
		Top side	0.163	0.241	0.317	0.078	0.40	0.56
	Band II	Front	0.112	0.108	0.128	0.024	0.22	0.26
		Back	0.153	0.137	0.645	0.048	0.29	0.85
		Left side	0.381				0.38	0.38
		Right side		0.102	0.315	0.033	0.10	0.35
		Top side	0.118	0.241	0.317	0.078	0.36	0.51



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 5	Front	0.271	0.108	0.128	0.024	0.38	0.42
		Back	0.340	0.137	0.645	0.048	0.48	1.03
		Left side	0.317				0.32	0.32
		Right side		0.102	0.315	0.033	0.10	0.35
		Top side	0.196	0.241	0.317	0.078	0.44	0.59
	Band 4	Front	0.143	0.108	0.128	0.024	0.25	0.30
		Back	0.193	0.137	0.645	0.048	0.33	0.89
		Left side	0.400				0.40	0.40
		Right side		0.102	0.315	0.033	0.10	0.35
		Top side	0.156	0.241	0.317	0.078	0.40	0.55
	Band 2	Front	0.129	0.108	0.128	0.024	0.24	0.28
		Back	0.140	0.137	0.645	0.048	0.28	0.83
		Left side	0.355				0.36	0.36
		Right side		0.102	0.315	0.033	0.10	0.35
		Top side	0.111	0.241	0.317	0.078	0.35	0.51
	Band 7	Front	0.239	0.108	0.128	0.024	0.35	0.39
		Back	0.222	0.137	0.645	0.048	0.36	0.92
		Left side	0.476				0.48	0.48
		Right side		0.102	0.315	0.033	0.10	0.35
		Top side	0.136	0.241	0.317	0.078	0.38	0.53
	Band 38	Front	0.195	0.108	0.128	0.024	0.30	0.35
		Back	0.195	0.137	0.645	0.048	0.33	0.89
		Left side	0.425				0.43	0.43
		Right side		0.102	0.315	0.033	0.10	0.35
		Top side	0.094	0.241	0.317	0.078	0.34	0.49



<Bottom Antenna>

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Front	0.308	0.108	0.128	0.024	0.42	0.46
		Back	0.322	0.137	0.645	0.048	0.46	1.02
		Left side	0.084				0.08	0.08
		Right side	0.321	0.102	0.315	0.033	0.42	0.67
		Top side		0.241	0.317	0.078	0.24	0.40
		Bottom side	0.258				0.26	0.26
	GSM1900	Front	0.480	0.108	0.128	0.024	0.59	0.63
		Back	0.557	0.137	0.645	0.048	0.69	1.25
		Left side	0.049				0.05	0.05
		Right side	0.099	0.102	0.315	0.033	0.20	0.45
		Top side		0.241	0.317	0.078	0.24	0.40
		Bottom side	1.184				1.18	1.18
WCDMA	Band V	Front	0.411	0.108	0.128	0.024	0.52	0.56
		Back	0.458	0.137	0.645	0.048	0.60	1.15
		Left side	0.139				0.14	0.14
		Right side	0.456	0.102	0.315	0.033	0.56	0.80
		Top side		0.241	0.317	0.078	0.24	0.40
		Bottom side	0.270				0.27	0.27
	Band IV	Front	0.423	0.108	0.128	0.024	0.53	0.58
		Back	0.535	0.137	0.645	0.048	0.67	1.23
		Left side	0.067				0.07	0.07
		Right side	0.088	0.102	0.315	0.033	0.19	0.44
		Top side		0.241	0.317	0.078	0.24	0.40
		Bottom side	1.007				1.01	1.01
	Band II	Front	0.270	0.108	0.128	0.024	0.38	0.42
		Back	0.360	0.137	0.645	0.048	0.50	1.05
		Left side	0.030				0.03	0.03
		Right side	0.061	0.102	0.315	0.033	0.16	0.41
		Top side		0.241	0.317	0.078	0.24	0.40
		Bottom side	0.838				0.84	0.84

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 5	Front	0.083	0.108	0.128	0.024	0.19	0.24
		Back	0.279	0.137	0.645	0.048	0.42	0.97
		Left side	0.121				0.12	0.12
		Right side	0.382	0.102	0.315	0.033	0.48	0.73
		Top side		0.241	0.317	0.078	0.24	0.40
		Bottom side	0.217				0.22	0.22
	Band 4	Front	0.471	0.108	0.128	0.024	0.58	0.62
		Back	0.615	0.137	0.645	0.048	0.75	1.31
		Left side	0.072				0.07	0.07
		Right side	0.094	0.102	0.315	0.033	0.20	0.44
		Top side		0.241	0.317	0.078	0.24	0.40
		Bottom side	1.039				1.04	1.04
	Band 2	Front	0.334	0.108	0.128	0.024	0.44	0.49
		Back	0.482	0.137	0.645	0.048	0.62	1.18
		Left side	0.036				0.04	0.04
		Right side	0.077	0.102	0.315	0.033	0.18	0.43
		Top side		0.241	0.317	0.078	0.24	0.40
		Bottom side	1.027				1.03	1.03
	Band 7	Front	0.326	0.108	0.128	0.024	0.43	0.48
		Back	0.371	0.137	0.645	0.048	0.51	1.06
		Left side	0.172				0.17	0.17
		Right side	0.079	0.102	0.315	0.033	0.18	0.43
		Top side		0.241	0.317	0.078	0.24	0.40
		Bottom side	0.899				0.90	0.90
Band 38	Front	0.368	0.108	0.128	0.024	0.48	0.52	
	Back	0.470	0.137	0.645	0.048	0.61	1.16	
	Left side	0.198				0.20	0.20	
	Right side	0.094	0.102	0.315	0.033	0.20	0.44	
	Top side		0.241	0.317	0.078	0.24	0.40	
	Bottom side	1.077				1.08	1.08	



16.3 Body-Worn Accessory Exposure Conditions

<Top Antenna>

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Front	0.183	0.144	0.105	0.021	0.33	0.31
		Back	0.194	0.165	0.959	0.026	0.36	1.18
	GSM1900	Front	0.068	0.144	0.105	0.021	0.21	0.19
		Back	0.072	0.165	0.959	0.026	0.24	1.06
WCDMA	Band V	Front	0.244	0.144	0.105	0.021	0.39	0.37
		Back	0.302	0.165	0.959	0.026	0.47	1.29
	Band IV	Front	0.177	0.144	0.105	0.021	0.32	0.30
		Back	0.191	0.165	0.959	0.026	0.36	1.18
	Band II	Front	0.158	0.144	0.105	0.021	0.30	0.28
		Back	0.179	0.165	0.959	0.026	0.34	1.16
LTE	Band 5	Front	0.196	0.144	0.105	0.021	0.34	0.32
		Back	0.217	0.165	0.959	0.026	0.38	1.20
	Band 4	Front	0.143	0.144	0.105	0.021	0.29	0.27
		Back	0.158	0.165	0.959	0.026	0.32	1.14
	Band 2	Front	0.135	0.144	0.105	0.021	0.28	0.26
		Back	0.148	0.165	0.959	0.026	0.31	1.13
	Band 7	Front	0.268	0.144	0.105	0.021	0.41	0.39
		Back	0.197	0.165	0.959	0.026	0.36	1.18
	Band 38	Front	0.180	0.144	0.105	0.021	0.32	0.31
		Back	0.133	0.165	0.959	0.026	0.30	1.12



<Bottom Antenna>

WWAN Band		Exposure Position	1	2	3	4	1+2	1+3+4		
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	SPLSR	Case No
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Front	0.190	0.144	0.105	0.021	0.33	0.32		
		Back	0.205	0.165	0.959	0.026	0.37	1.19		
	GSM1900	Front	0.245	0.144	0.105	0.021	0.39	0.37		
		Back	0.333	0.165	0.959	0.026	0.50	1.32		
WCDMA	Band V	Front	0.265	0.144	0.105	0.021	0.41	0.39		
		Back	0.305	0.165	0.959	0.026	0.47	1.29		
	Band IV	Front	0.729	0.144	0.105	0.021	0.87	0.86		
		Back	0.982	0.165	0.959	0.026	1.15	1.97	0.02	#01
	Band II	Front	0.590	0.144	0.105	0.021	0.73	0.72		
		Back	0.935	0.165	0.959	0.026	1.10	1.92	0.03	#02
LTE	Band 5	Front	0.231	0.144	0.105	0.021	0.38	0.36		
		Back	0.253	0.165	0.959	0.026	0.42	1.24		
	Band 4	Front	0.603	0.144	0.105	0.021	0.75	0.73		
		Back	0.796	0.165	0.959	0.026	0.96	1.78	0.02	#03
	Band 2	Front	0.492	0.144	0.105	0.021	0.64	0.62		
		Back	0.706	0.165	0.959	0.026	0.87	1.69	0.01	#04
	Band 7	Front	0.338	0.144	0.105	0.021	0.48	0.46		
		Back	0.461	0.165	0.959	0.026	0.63	1.45		
	Band 38	Front	0.201	0.144	0.105	0.021	0.35	0.33		
		Back	0.285	0.165	0.959	0.026	0.45	1.27		

16.4 Product specific 10g SAR Exposure Conditions

WWAN Band		Exposure Position	1	2	1+2		
			WWAN	5GHz WLAN	Summed 10g SAR (W/kg)	SPLSR	Case No
			10g SAR (W/kg)	10g SAR (W/kg)			
GSM	GSM1900	Bottom Side	1.644		1.64		
WCDMA	Band IV	Bottom Side	2.657		2.66		
	Band II	Bottom Side	2.815		2.82		
LTE	Band 4	Back	3.484	2.224	5.71	0.09	#05
		Bottom Side	3.090		3.09		
	Band 2	Bottom Side	2.742		2.74		

Remark:

- For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.
- If $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.

16.5 SPLSR Evaluation and Analysis


General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.

Case #01	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band IV-LAT	Back	0.982	15mm	-4.5	-85	-1.79	158.1	1.97	0.02	Not required
	WLAN5GHz		0.959	15mm	-3.7	69	-1.59				
	Bluetooth		0.026	15mm	5.2	72.8	-1.44				
	WCDMA Band IV-LAT	Back	0.982	15mm	-4.5	-85	-1.79	154.0	1.97	0.02	Not required
	Bluetooth		0.026	15mm	5.2	72.8	-1.44				
	WLAN5GHz		0.959	15mm	-3.7	69	-1.59				




Case #02	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #02	WCDMA Band II-LAT	Back	0.935	15mm	-6.1	-8.4	-1.77	82.0	1.92	0.03	Not required
	WLAN5GHz		0.959	15mm	-3.7	69	-1.59				
	Bluetooth		0.026	15mm	5.2	72.8	-1.44				
Case #02	WCDMA Band II-LAT	Back	0.935	15mm	-6.1	-8.4	-1.77	77.4	1.92	0.03	Not required
	Bluetooth		0.026	15mm	5.2	72.8	-1.44				
	WLAN5GHz		0.959	15mm	-3.7	69	-1.59				

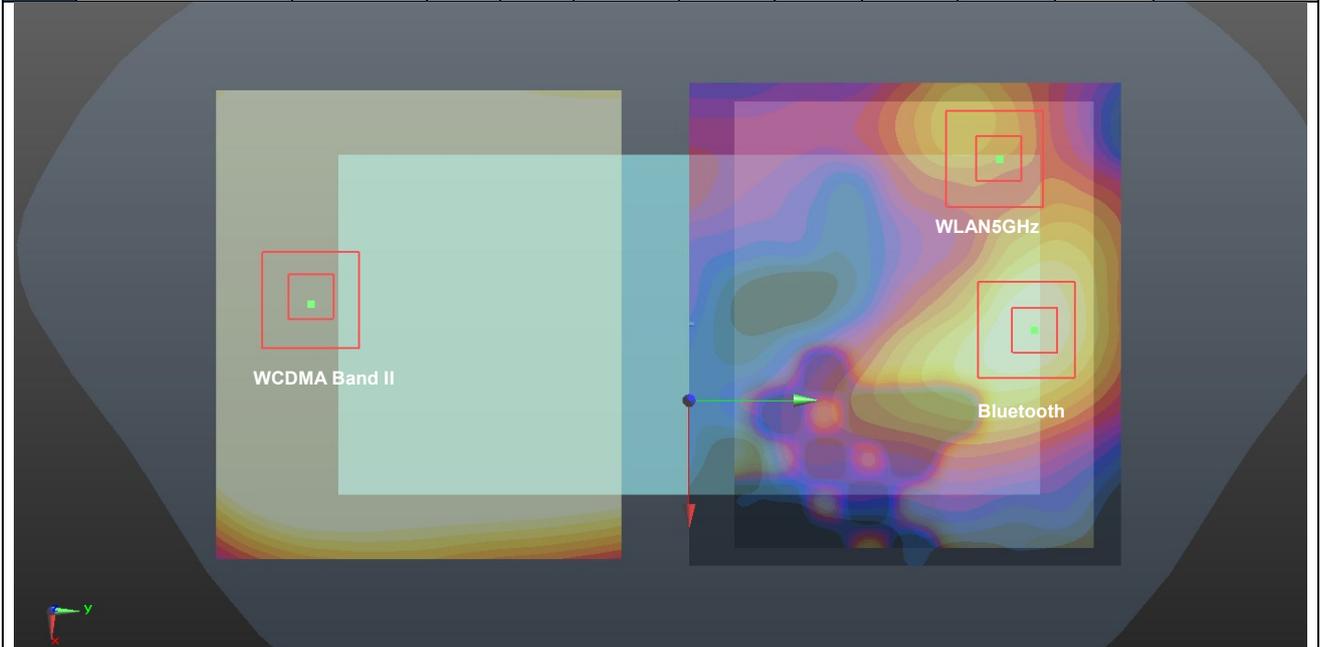


Case #03	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 4-LAT	Back	0.796	15mm	-7.5	-81.9	-1.84	155.2	1.78	0.02	Not required
	WLAN5GHz		0.959	15mm	-3.7	69	-1.59				
	Bluetooth		0.026	15mm	5.2	72.8	-1.44				
	LTE Band 4-LAT	Back	0.796	15mm	-7.5	-81.9	-1.84	150.9	1.78	0.02	Not required
	Bluetooth		0.026	15mm	5.2	72.8	-1.44				
	WLAN5GHz		0.959	15mm	-3.7	69	-1.59				



Case #04	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 2-LAT	Back	0.706	15mm	-9.1	-82	-1.83	155.5	1.69	0.01	Not required
	WLAN5GHz		0.959	15mm	-3.7	69	-1.59				
	Bluetooth		0.026	15mm	5.2	72.8	-1.44				
	LTE Band 2-LAT	Back	0.706	15mm	-9.1	-82	-1.83	151.1	1.69	0.01	Not required
	Bluetooth		0.026	15mm	5.2	72.8	-1.44				
	WLAN5GHz		0.959	15mm	-3.7	69	-1.59				

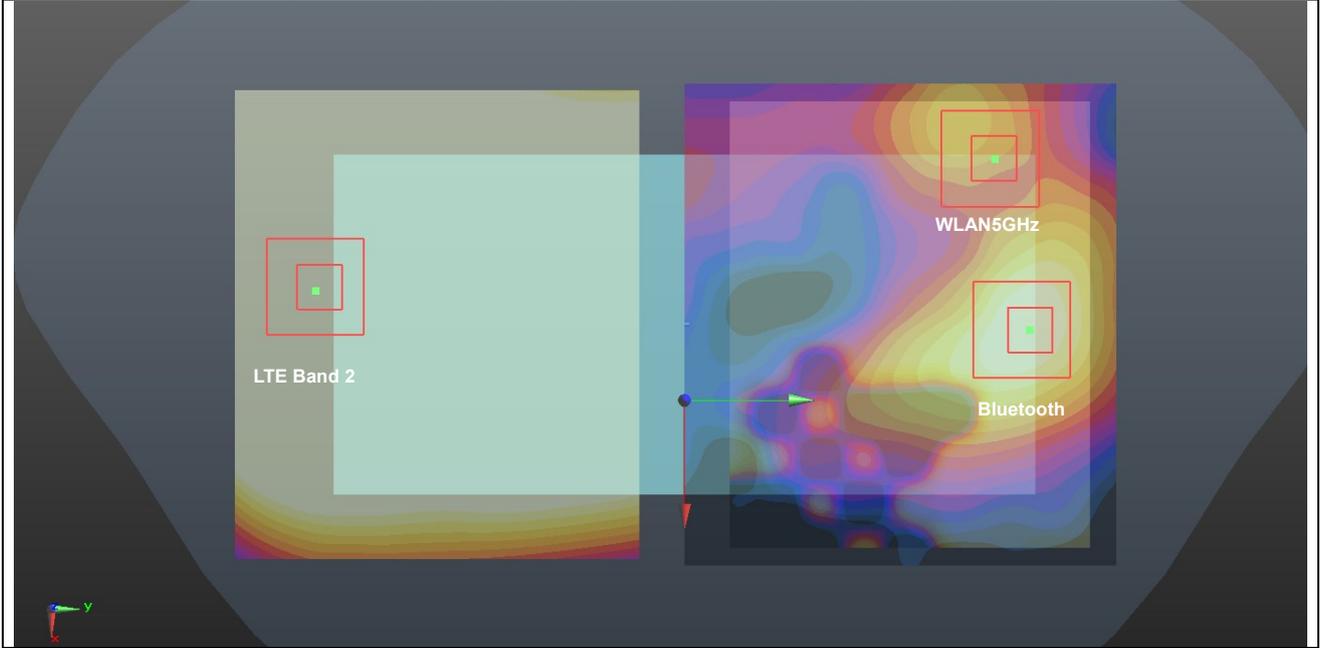

Case #05	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band4	Back	3.484	0mm	-12.3	-80	-1.17	148.0	5.71	0.09	Not required
	WLAN5GHz		2.224	0mm	-36.4	66	-1.29				

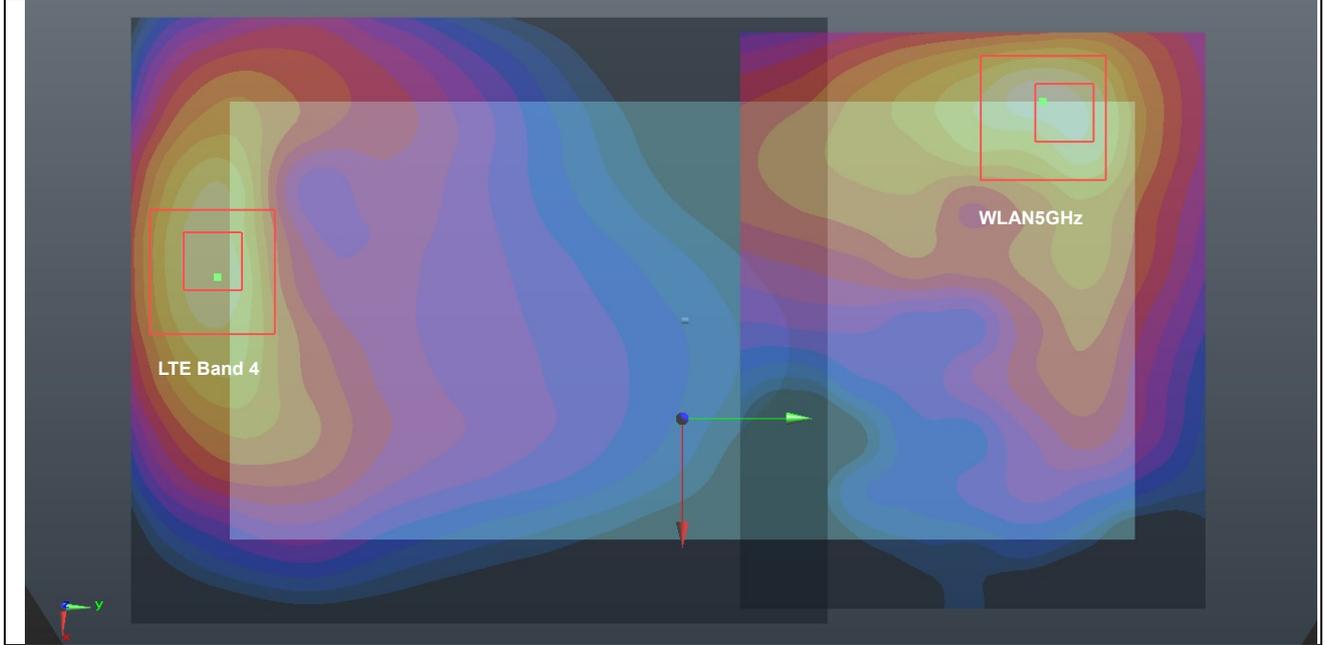

Test Engineer : Nick Hu



17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.



18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [13] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [14] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_835MHz

DUT: D835V2 - SN:4d151


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium: HSL_850 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.921 \text{ S/m}$; $\epsilon_r = 42.546$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.01, 9.01, 9.01); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM1; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 3.18 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 53.01 V/m ; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 3.82 W/kg
SAR(1 g) = 2.42 W/kg ; SAR(10 g) = 1.63 W/kg
Maximum value of SAR (measured) = 3.23 W/kg

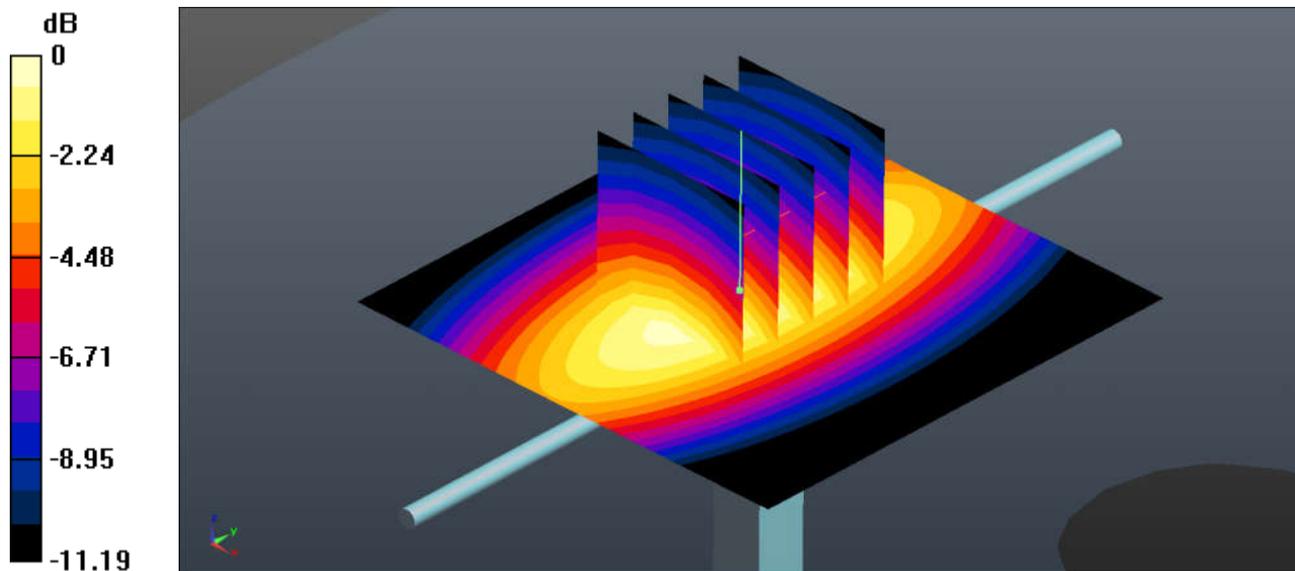

0 dB = $3.23 \text{ W/kg} = 5.09 \text{ dBW/kg}$

System Check_Head_1750MHz

DUT: D1750V2 - SN:1090

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.66$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.79, 7.79, 7.79); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.9 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.88 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.6 W/kg; SAR(10 g) = 5.09 W/kg

Maximum value of SAR (measured) = 13.6 W/kg

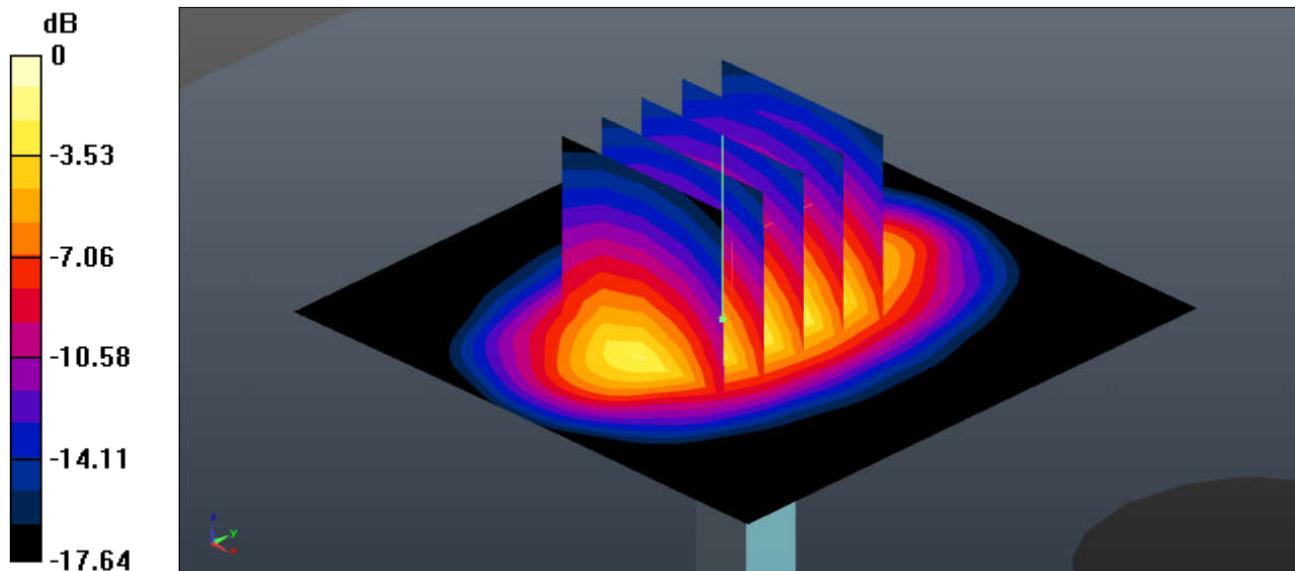

0 dB = 13.6 W/kg = 11.34 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2 - SN:5d170


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.84$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.4, 7.4, 7.4); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.9 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 85.57 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 17.9 W/kg
SAR(1 g) = 9.69 W/kg; SAR(10 g) = 4.99 W/kg
Maximum value of SAR (measured) = 14.0 W/kg

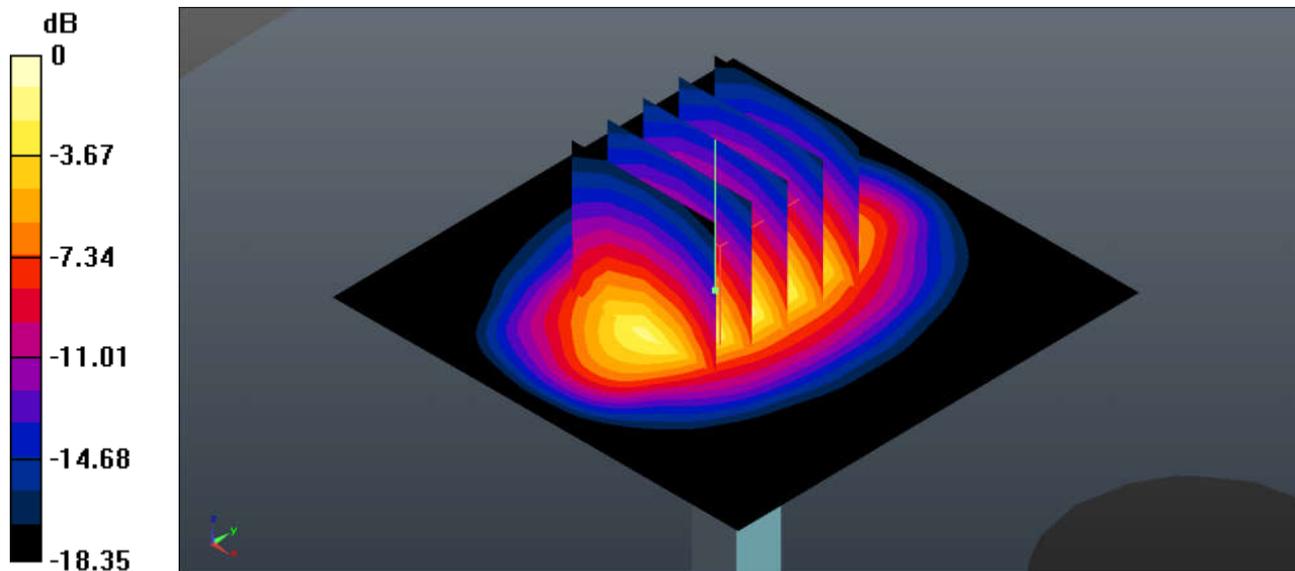

0 dB = 14.0 W/kg = 11.46 dBW/kg

System Check_Head_2450MHz

DUT: D2450V2 - SN:908


Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 39.05$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.08, 7.08, 7.08); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM1; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 22.1 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 93.12 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 29.7 W/kg
SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.45 W/kg
Maximum value of SAR (measured) = 21.8 W/kg

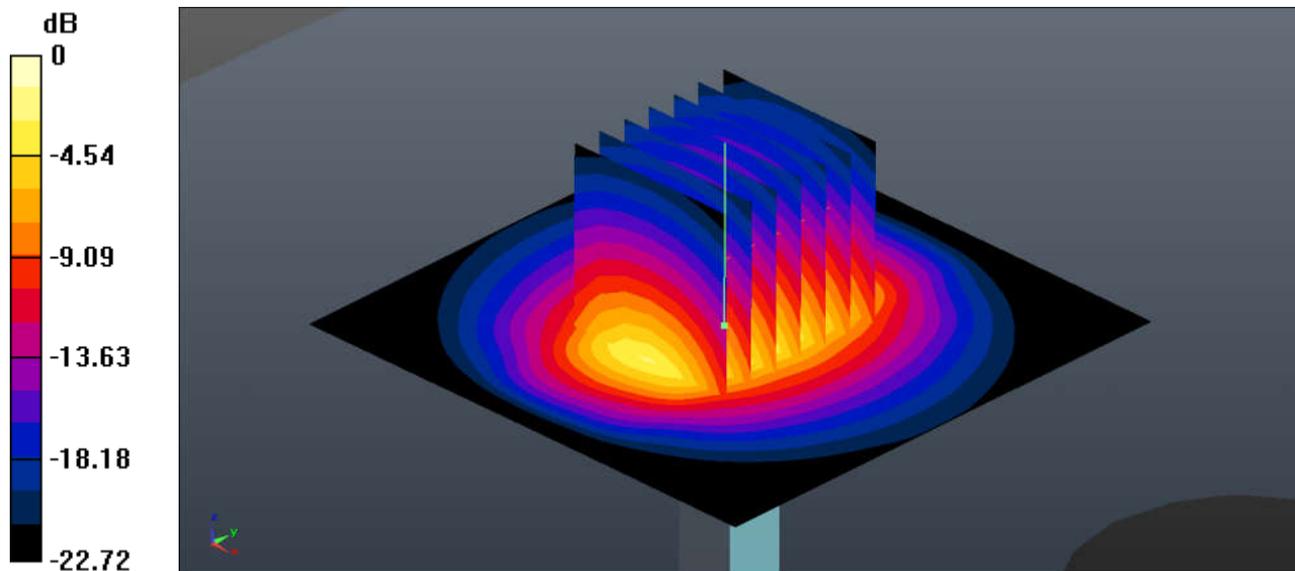

0 dB = 21.8 W/kg = 13.38 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2 - SN:1061

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.998$ S/m; $\epsilon_r = 38.452$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.86, 6.86, 6.86); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM1; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 22.4 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.84 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.13 W/kg

Maximum value of SAR (measured) = 22.0 W/kg

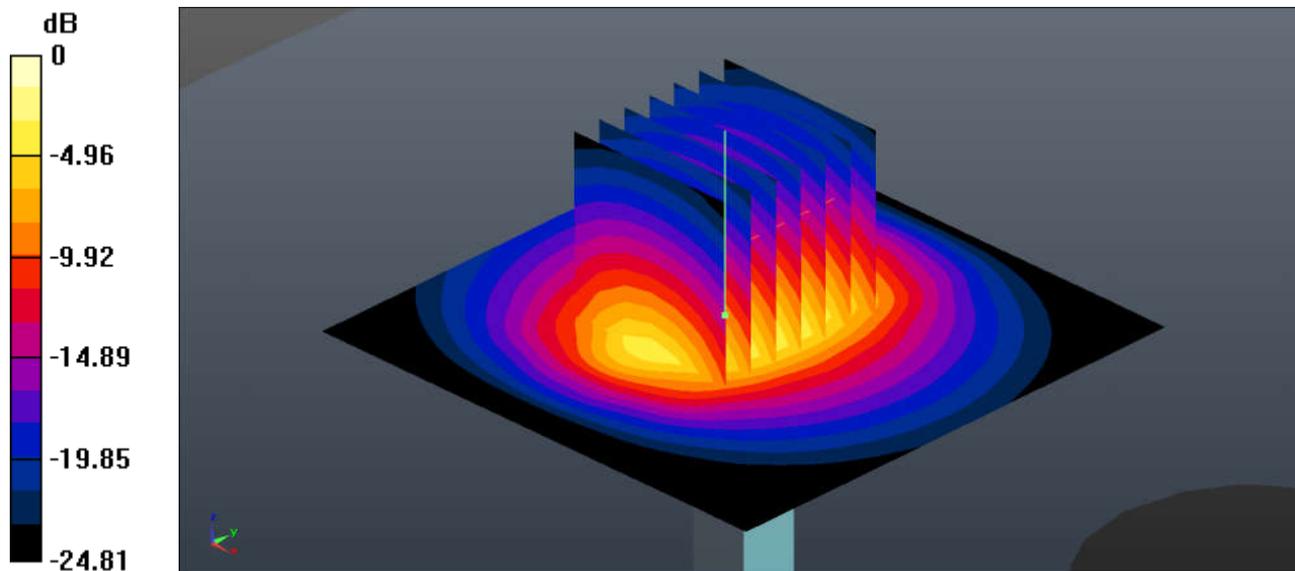

0 dB = 22.0 W/kg = 13.42 dBW/kg

System Check_Head_5250MHz

DUT: D5GHzV2-SN:1006


Communication System: UID 0, CW (0); Frequency: 5250 MHz;Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.787$ S/m; $\epsilon_r = 35.795$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.2, 5.2, 5.2); Calibrated: 2018.5.31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM1; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 18.2 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 42.77 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 32.2 W/kg
SAR(1 g) = 7.54 W/kg; SAR(10 g) = 2.23 W/kg
Maximum value of SAR (measured) = 18.2 W/kg

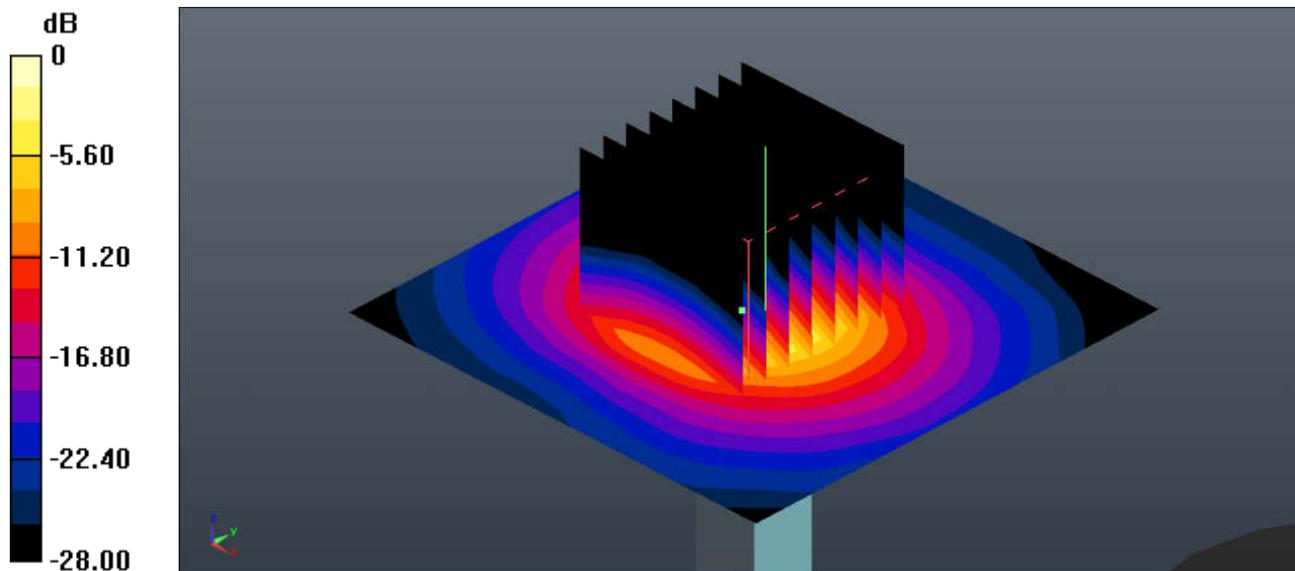

0 dB = 18.2 W/kg = 12.60 dBW/kg

System Check_Head_5600MHz

DUT: D5GHzV2-SN:1006


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium: HSL_5000 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.143$ S/m; $\epsilon_r = 35.264$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.94, 4.94, 4.94); Calibrated: 2018.5.31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM1; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 18.0 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 38.89 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 28.8 W/kg
SAR(1 g) = 7.7 W/kg; SAR(10 g) = 2.38 W/kg
Maximum value of SAR (measured) = 17.6 W/kg

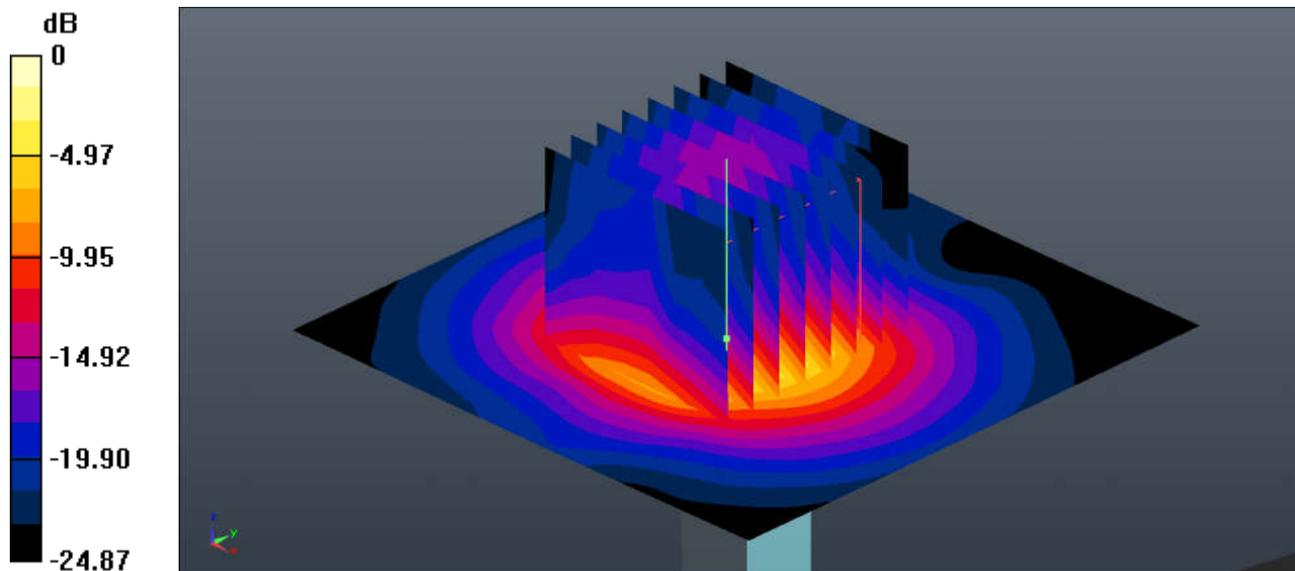

0 dB = 17.6 W/kg = 12.46 dBW/kg

System Check_Head_5750MHz

DUT: D5GHzV2-SN:1006

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.302$ S/m; $\epsilon_r = 35.036$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.23, 5.23, 5.23); Calibrated: 2018.5.31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM1; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.1 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 37.48 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 7.47 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 17.1 W/kg

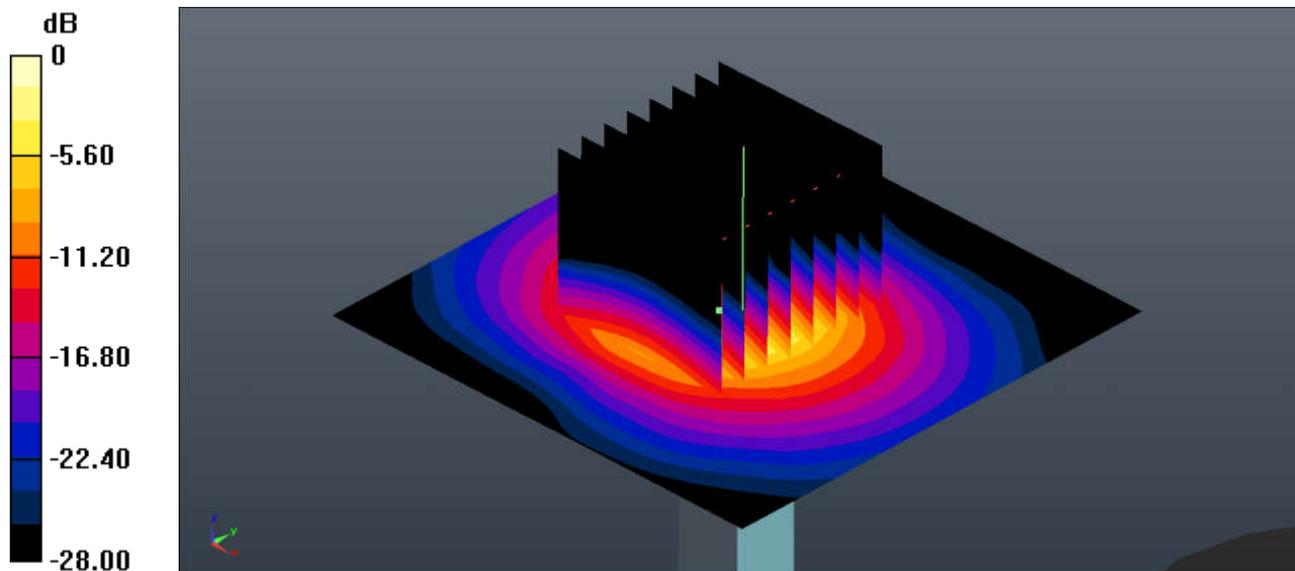

0 dB = 17.1 W/kg = 12.33 dBW/kg

System Check_Body_835MHz

DUT: D835V2 - SN:4d151

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.998 \text{ S/m}$; $\epsilon_r = 54.644$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.03, 9.03, 9.03); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM1; Type: SAM; Serial: TP-1839
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.90 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 47.22 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 2.35 W/kg ; SAR(10 g) = 1.67 W/kg

Maximum value of SAR (measured) = 2.74 W/kg

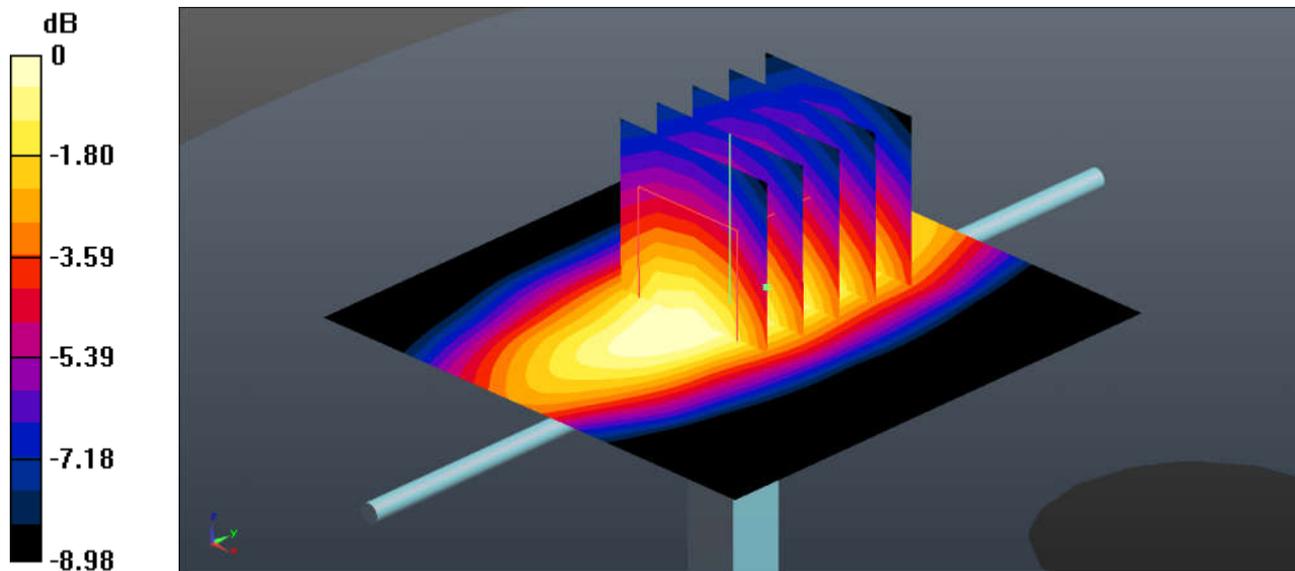

0 dB = $2.74 \text{ W/kg} = 4.38 \text{ dBW/kg}$