


FCC SAR Test Report


APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : MI
MODEL NAME : M1903F11G
FCC ID : 2AFZZ-XMSF11G
STANDARD : FCC 47 CFR PART 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on May 24, 2019 and testing was started from Jun. 09, 2019 and completed on Jun. 29, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations.....	8
5. Proximity Sensor Triggering Test.....	10
5.1 Proximity sensor triggering distances(Per KDB616217§6.2)	10
5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4).....	14
6. RF Exposure Limits.....	15
6.1 Uncontrolled Environment.....	15
6.2 Controlled Environment.....	15
7. Specific Absorption Rate (SAR).....	16
7.1 Introduction	16
7.2 SAR Definition.....	16
8. System Description and Setup	17
8.1 E-Field Probe	18
8.2 Data Acquisition Electronics (DAE)	18
8.3 Phantom.....	19
8.4 Device Holder.....	20
9. Measurement Procedures	21
9.1 Spatial Peak SAR Evaluation.....	21
9.2 Power Reference Measurement.....	22
9.3 Area Scan	22
9.4 Zoom Scan.....	23
9.5 Volume Scan Procedures.....	23
9.6 Power Drift Monitoring.....	23
10. Test Equipment List.....	24
11. System Verification	25
11.1 Tissue Simulating Liquids	25
11.2 Tissue Verification	26
11.3 System Performance Check Results	27
12. RF Exposure Positions	28
12.1 Ear and handset reference point.....	28
12.2 Definition of the cheek position	29
12.3 Definition of the tilt position	30
12.4 Body Worn Accessory	31
12.5 Product Specific 10g SAR Exposure.....	32
12.6 Wireless Router.....	32
13. Conducted RF Output Power (Unit: dBm).....	33
14. Antenna Location	127
15. SAR Test Results	129
15.1 Head SAR	132
15.2 Hotspot SAR	139
15.3 Body Worn Accessory SAR.....	146
15.4 Product Specific SAR.....	150
15.5 Repeated SAR Measurement	154
16. Simultaneous Transmission Analysis.....	155
16.1 Head Exposure Conditions	157
16.2 Hotspot Exposure Conditions.....	159
16.3 Body-Worn Accessory Exposure Conditions	163
16.4 Product specific 10g SAR Exposure Conditions.....	165
17. Uncertainty Assessment	166
18. References.....	167
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA921903-02	Rev. 01	Initial issue of report	Jul. 08, 2019



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, M1903F11G**, are as follows.

Highest Standalone 1g SAR Summary						Highest Simultaneous Transmission 1g SAR (W/kg)
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	
			1g SAR (W/kg)			
Licensed	GSM	GSM850	1.14	0.58	0.31	1.59
		GSM1900	0.89	1.11	0.38	
	WCDMA	Band II	1.17	1.19	1.13	
		Band IV	1.18	1.15	0.62	
		Band V	1.11	0.56	0.30	
	LTE	LTE Band 2	1.03	1.14	0.79	
		LTE Band 4	1.18	1.04	0.56	
		LTE Band 5	1.03	0.52	0.26	
		LTE Band 7	1.03	0.98	0.52	
		LTE Band 38	1.16	1.16	0.31	
DTS	WLAN	2.4GHz WLAN	1.16	0.81	0.22	1.59
NII		5GHz WLAN	0.83	0.65	1.15	1.59
DSS	Bluetooth	2.4GHz Bluetooth	0.19	0.11	<0.10	1.57

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM1900	1.94	3.60
	WCDMA	Band II	2.77	
		Band IV	3.44	
	LTE	LTE Band 2	3.47	
		LTE Band 4	3.44	
		LTE Band 7	3.45	
		LTE Band 38	1.63	
NII	WLAN	5GHz WLAN	1.45	3.60
Date of Testing:			2019/6/9~2019/6/29	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
-
-



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification			
Equipment Name	Mobile Phone		
Brand Name	MI		
Model Name	M1903F11G		
FCC ID	2AFZZ-XMSF11G		
IMEI Code	SIM1: 865110042998238 SIM2: 865110042999236		
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5805 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz		
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) LTE: QPSK, 16QAM, 64QAM,256QAM(Downlink only) WLAN 2.4GHz : 802.11b/g/n/ HT20 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK		
HW Version	P2.2		
SW Version	MIUI 10		
Antenna Function for Transmitter		Ant. 1	Ant. 2
	Bluetooth	V	-
	802.11 b/g/n SISO	V	-
	802.11 b/g/n MIMO	V	V
	802.11 a/n/ac SISO	-	V
	802.11 a/n/ac MIMO	V	V
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network		
EUT Stage	Identical Prototype		
Remark:			
1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.			
2. This device does not support DTM operation and support GRPS/EGRPS mode up to multi-slot class 33.			



3. This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications.
4. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
5. This device has two WWAN transmit antennas. WWAN bottom antenna is located at the bottom edge of the device, and WWAN top antenna is located at the top edge of the device which can refer to antenna location chapter. Top and Bottom antenna support the same WWAN frequency bands, and they can't transmit simultaneously.
6. For top WWAN antenna:
 - a. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in GSM850, WCDMA band 2/4/5, LTE B2/4/5/7/38.
 - b. When hotspot mode is enabled, power reduction will be activated to GSM850, WCDMA II/IV and LTE B2 / B4 / B5/B7/B38.
 - c. For GSM850, WCDMA II/IV and LTE B2 / B4 / B5 / 38, full power can be tested pass at 10mm distance, so reduced power no need to be evaluated.
7. For bottom WWAN antenna:
 - a. P-sensor can detect handheld state, WCDMA band II/IV and LTE band 2/4/7 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active
 - b. When hotspot mode is enabled, power reduction will be activated to GSM1900, WCDMA band II/IV, LTE band 2/4/7/38 and WLAN5.8GHz.
 - c. For WCDMA B2, while the device WLAN or Bluetooth transmit simultaneously with the WWAN Bottom antenna at hotspot or body worn mode, power reduction enabled for this scenario.
 - d. For WLAN5.5GHz/5.8GHz, when it transmits simultaneously WWAN or Bluetooth for body worn mode, power reduction will be triggered for this scenario.
8. For WLAN antenna
 - a. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately for WLAN 2.4GHz/5.2/5.3GHz.
 - b. When hotspot mode is enabled, power reduction will be activated to WLAN5.8GHz.
 - c. For WLAN5.5GHz/5.8GHz, when it transmits simultaneously WWAN or Bluetooth for body worn mode, power reduction will be triggered for this scenario.
9. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.



4.2 General LTE SAR Test and Reporting Considerations


Summarized necessary items addressed in KDB 941225 D05 v02r05								
FCC ID	2AFZZ-XMSF11G							
Equipment Name	Mobile Phone							
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz							
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz							
Uplink Modulations used	QPSK / 16QAM / 64QAM /256QAM(Downlink only)							
LTE Voice / Data requirements	Voice and Data							
LTE Release Version	R13, Cat 13							
CA Support	Yes, Uplink and Downlink							
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
	256 QAM	≥ 1						≤ 5
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance	Yes, receiver on or hotspot on will trigger reduced power for LTE bands.							
LTE Carrier Aggregation Combinations	Intra-Band possible combinations, the detail power verification please referred to section 13. SAR verified ,please referred to section 15							
LTE Carrier Aggregation Additional Information	(1) This device supports LTE Carrier Aggregation (CA) in the uplink for LTE 7C / 38C with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. (2) This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.							

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				

5. Proximity Sensor Triggering Test



5.1 Proximity sensor triggering distances(Per KDB616217§6.2)



1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front, back or bottom side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, WCDMA B2 / B4, and LTE B2 / B4 / B7 reduced power will be active.
4. The sensors used to detect the proximity of the user's finger or hand at the front, back or bottom side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).


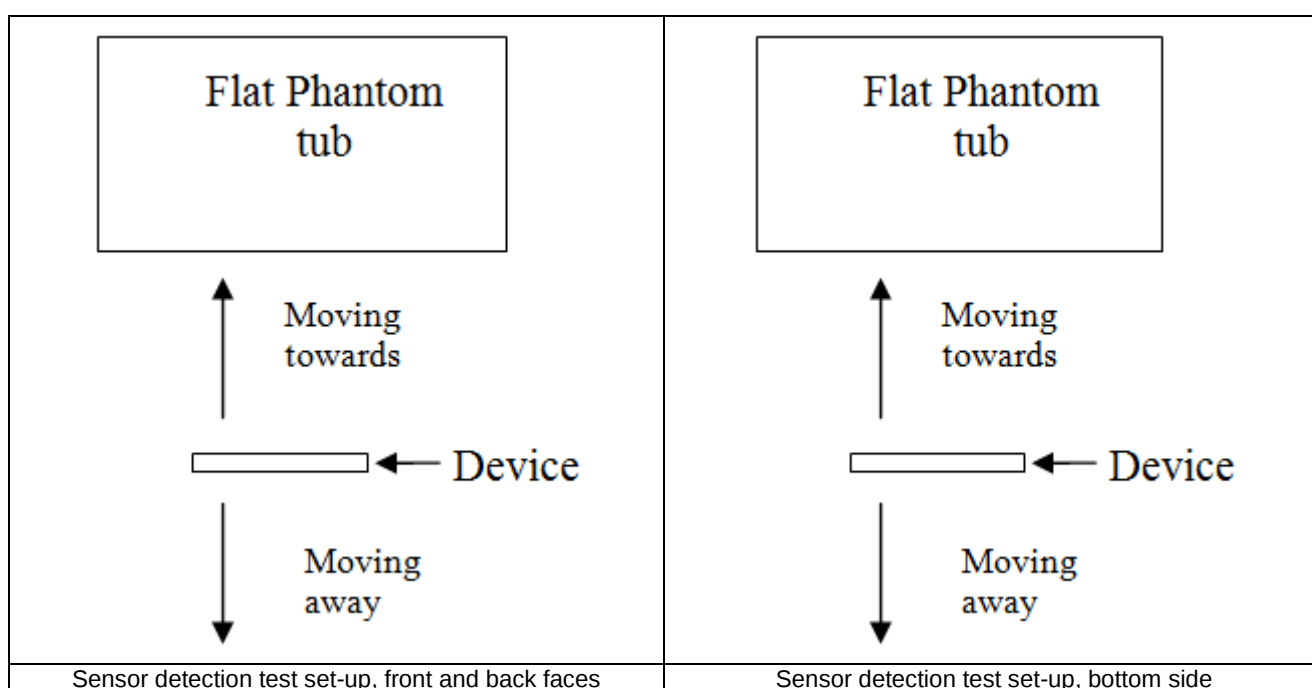


Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	8	8	10	10	13	13

<Sensor Trigger Distance and Measured Power>

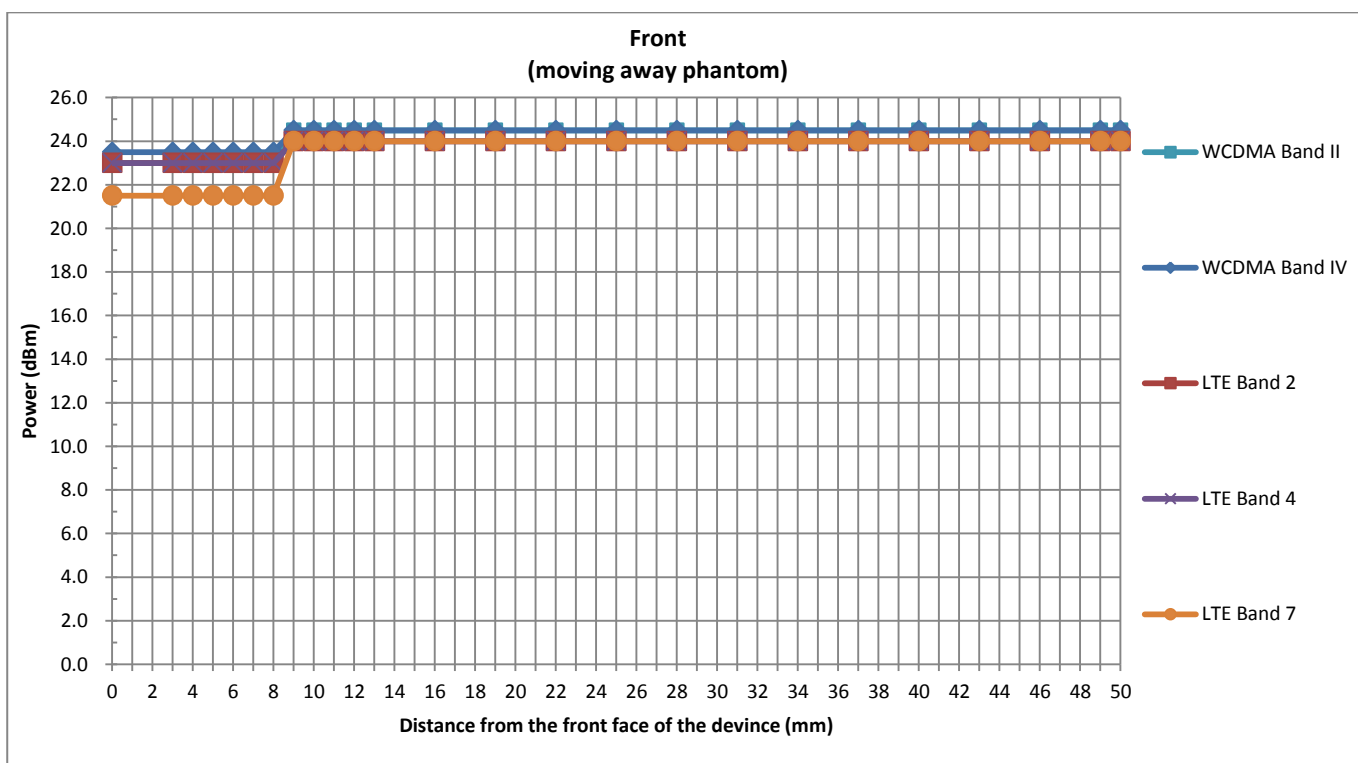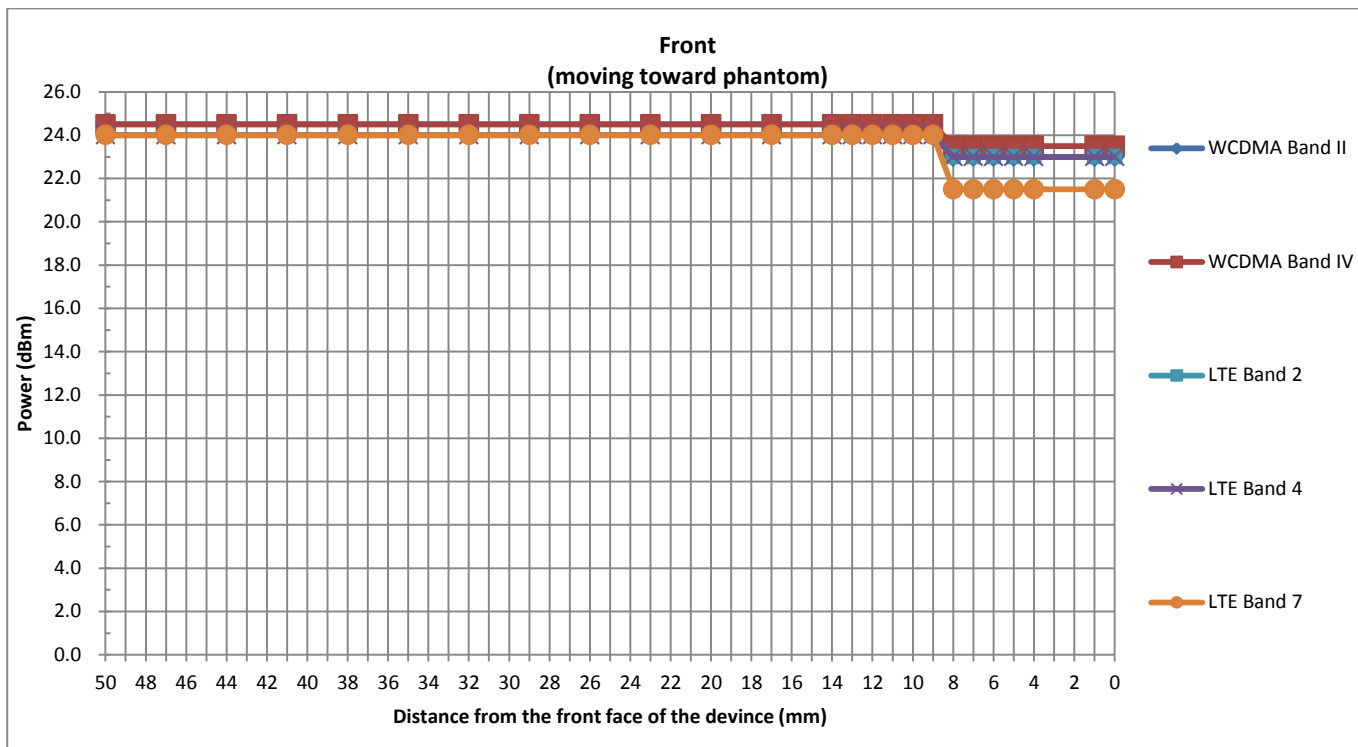

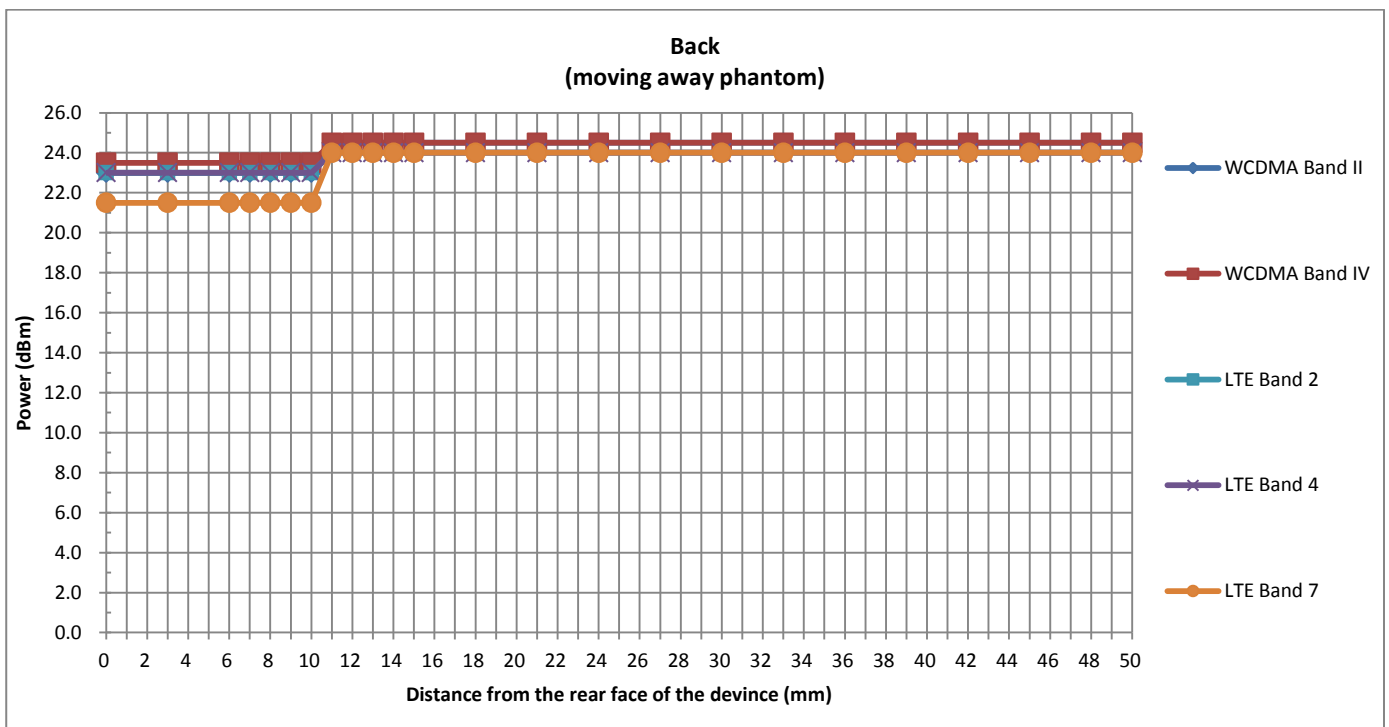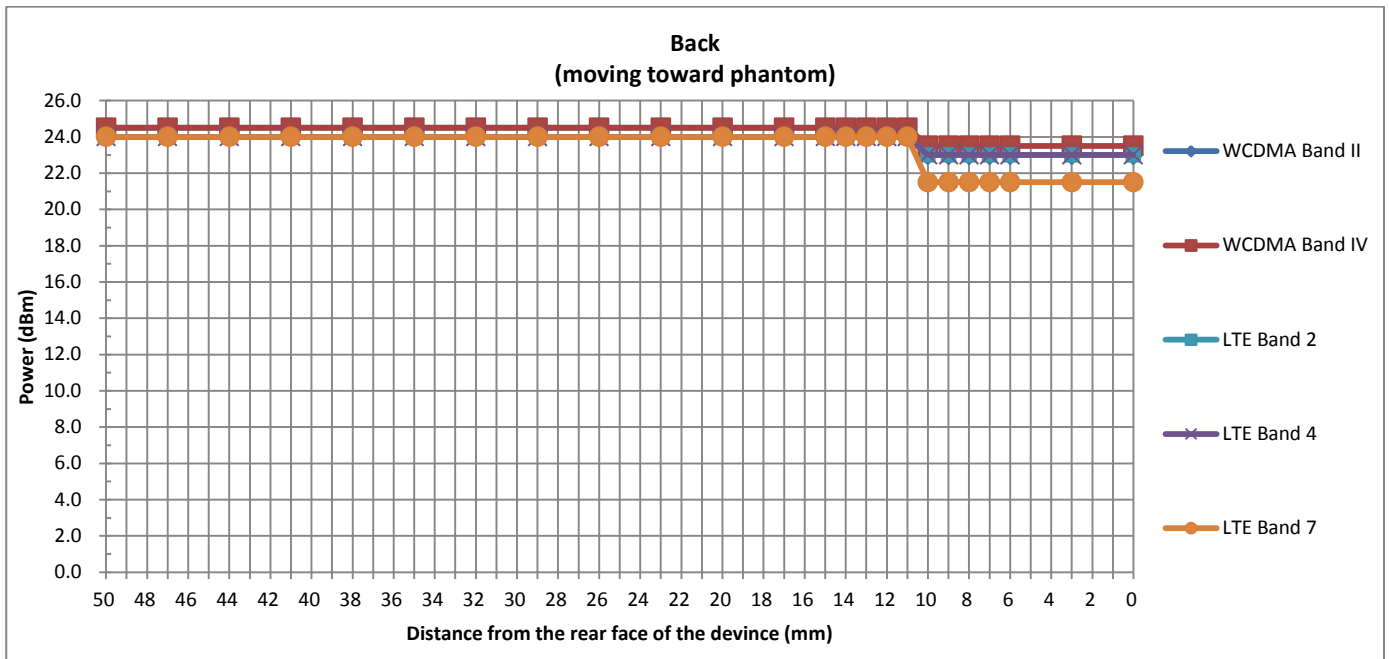


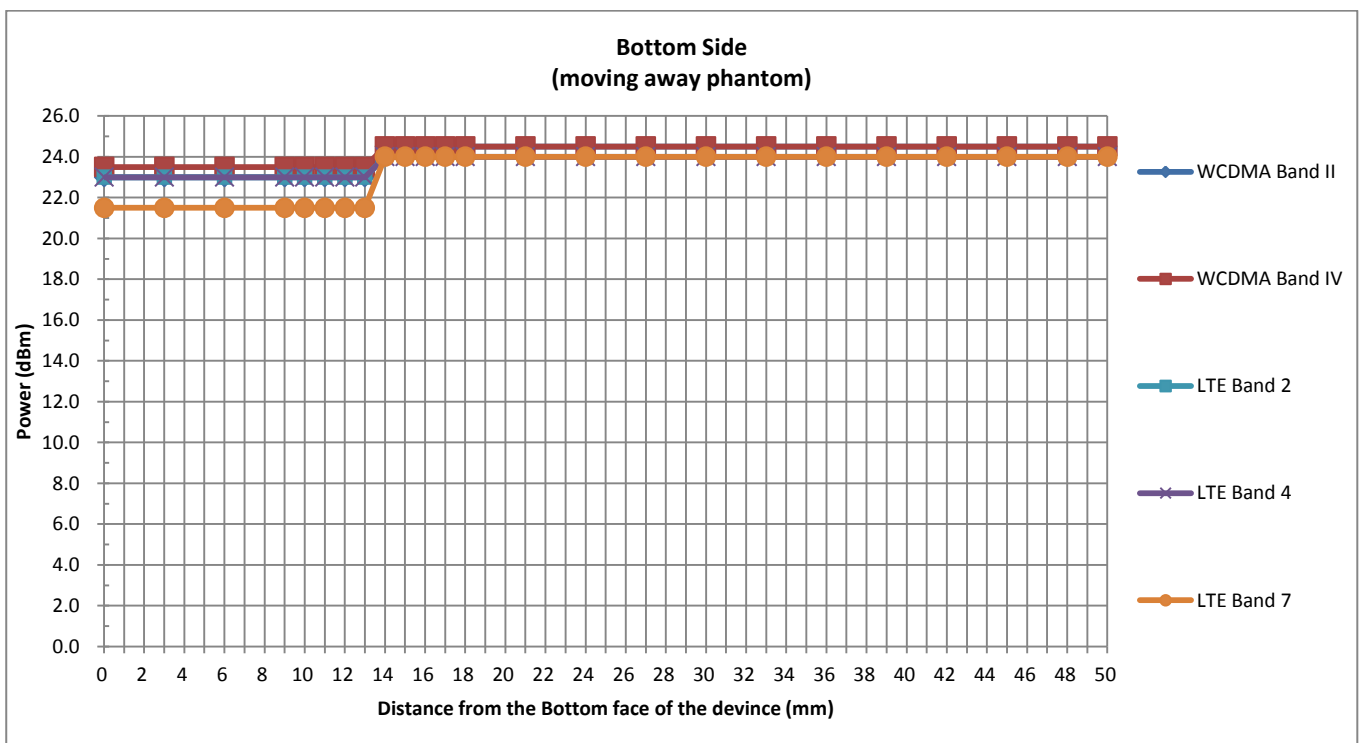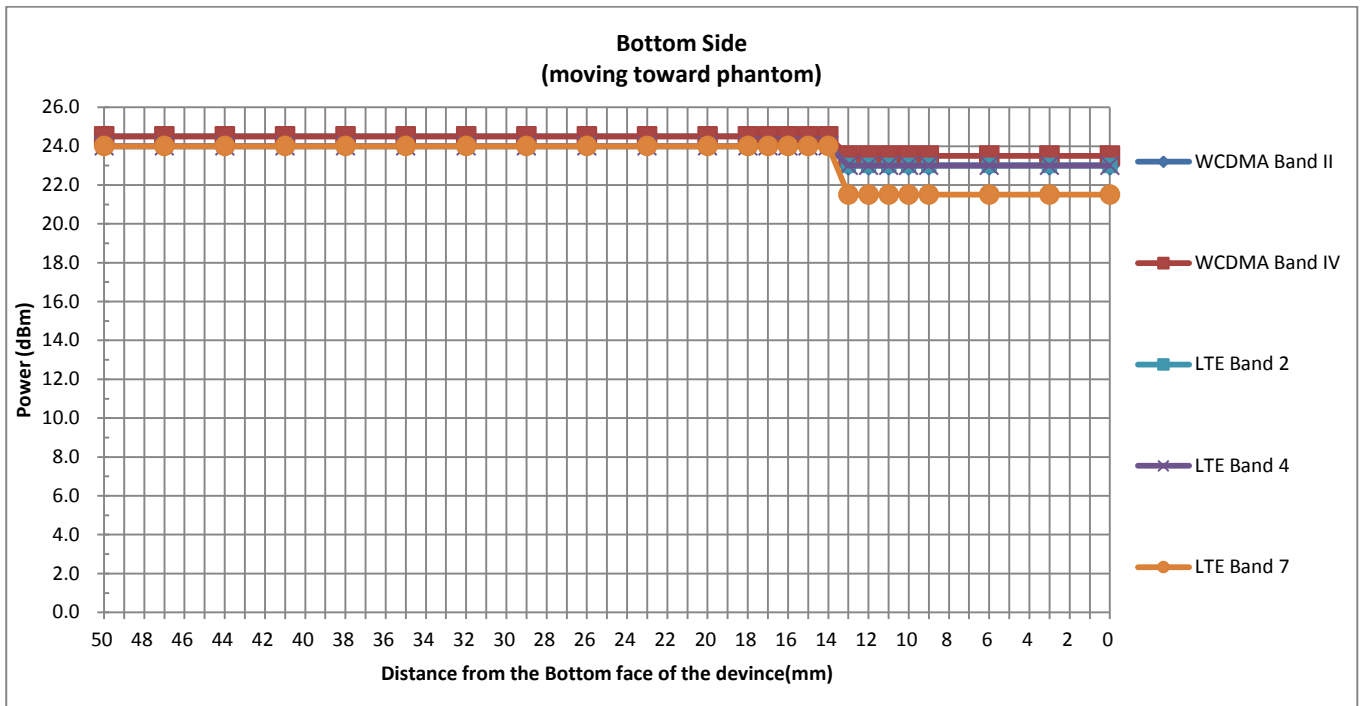

5.2 Tilt angle influences to proximity sensor triggering(Per KDB616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with bottom side parallel to the base of the flat phantom for each band.

The EUT was rotated about bottom side for angles up to $\pm 45^\circ$. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to $\pm 45^\circ$.

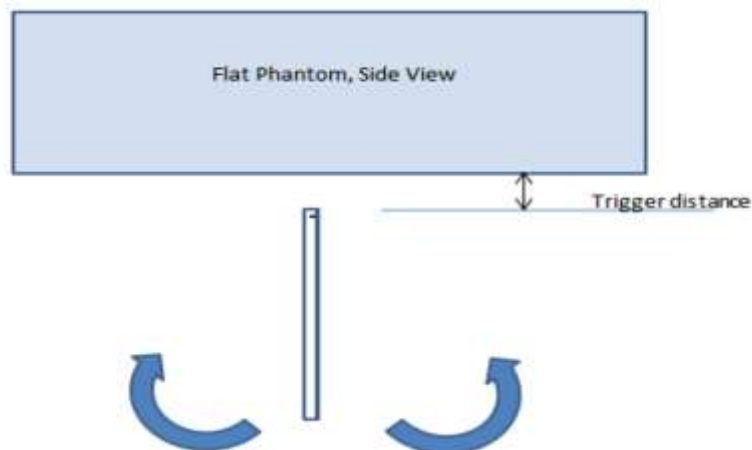

Proximity Sensor Coverage Assessment(Bottom Side)

Table: Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Bottom Side)

Main ant Band(MHz)	Minimum trigger distance at which power reduction was maintained over ±45°	Power Reduction Status											
		-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°	
WCDMA Band II	13mm	on	on	on	on	on	on	on	on	on	on	on	
WCDMA Band IV	13mm	on	on	on	on	on	on	on	on	on	on	on	
LTE Band 2	13mm	on	on	on	on	on	on	on	on	on	on	on	
LTE Band 4	13mm	on	on	on	on	on	on	on	on	on	on	on	
LTE Band 7	13mm	on	on	on	on	on	on	on	on	on	on	on	

Conclusion: As is shown from the validation data, it can be ensured that the proximity sensor can be valid triggered for the DUT tilt coverage exposure condition.

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

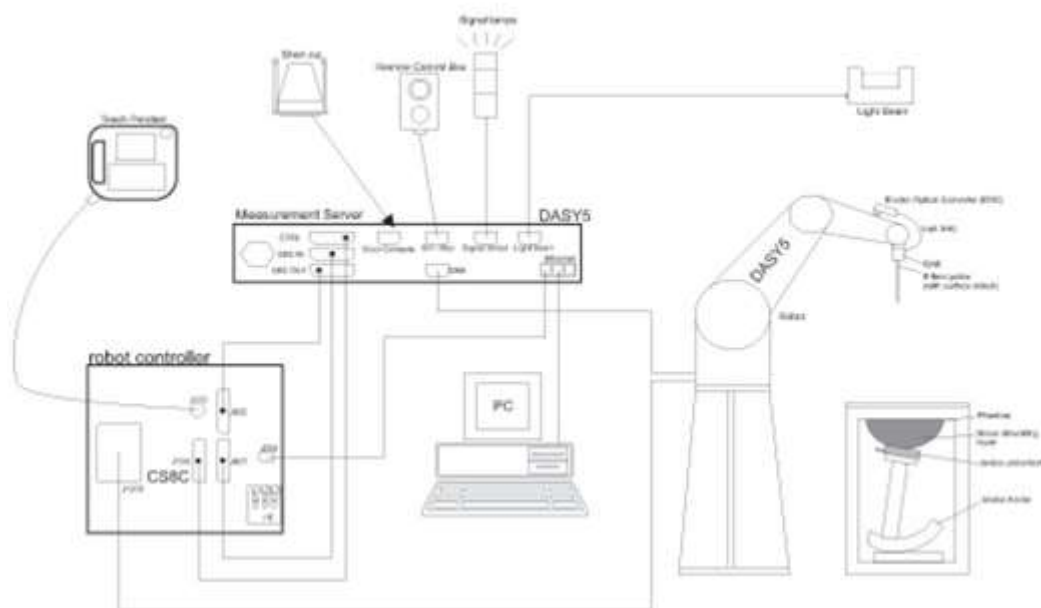

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

**10. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2020/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2019/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1006	2018/9/27	2019/9/26
SPEAG	Data Acquisition Electronics	DAE4	1338	2018/12/3	2019/12/2
SPEAG	Data Acquisition Electronics	DAE4	1279	2018/10/22	2019/10/21
SPEAG	Dosimetric E-Field Probe	EX3DV4	3843	2018/9/27	2019/9/26
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	2019/4/25	2020/4/24
SPEAG	Dosimetric E-Field Probe	ES3DV3	3279	2019/3/4	2020/3/3
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1754	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1697	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2019/4/17	2020/4/16
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2019/4/17	2020/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2019/4/17	2020/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2018/11/20	2019/11/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2019/1/14	2020/1/13
Rohde & Schwarz	Power Meter	NRVD	102081	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2018/8/20	2019/8/19
R&S	CBT BLUETOOTH TESTER	CBT	101641	2019/1/14	2020/1/13
EXA	Spectrum Analyzer	FSV7	101631	2019/1/14	2020/1/13
Testo	Hygrometer	608-H1	1241332126	2018/8/21	2019/8/20
FLUKE	DIGITAC THERMOMETER	51II	97240029	2018/8/8	2019/8/7
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	

Note:

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 11.1.1 Photo of Liquid Height for Head SAR



Fig 11.1.2 Photo of Liquid Height for Body SAR

**11.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.9	0.901	41.168	0.90	41.50	0.11	-0.80	±5	2019/6/9
1750	Head	22.7	1.383	39.750	1.37	40.10	0.95	-0.87	±5	2019/6/25
1900	Head	22.7	1.437	38.970	1.40	40.00	2.64	-2.58	±5	2019/6/12
2450	Head	22.6	1.878	39.228	1.80	39.20	4.33	0.07	±5	2019/6/18
2600	Head	22.8	2.036	37.899	1.96	39.00	3.88	-2.82	±5	2019/6/12
5250	Head	22.9	4.834	37.112	4.71	35.90	2.63	3.38	±5	2019/6/29
5600	Head	22.7	5.201	36.587	5.07	35.50	2.58	3.06	±5	2019/6/29
5750	Head	22.7	5.362	36.382	5.22	35.40	2.72	2.77	±5	2019/6/29

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/6/9	835	Head	250	4d151	3843	1279	2.28	9.30	9.12	-1.94
2019/6/25	1750	Head	250	1090	3954	1338	9.13	36.40	36.52	0.33
2019/6/12	1900	Head	250	5d170	3279	1338	9.76	39.00	39.04	0.10
2019/6/18	2450	Head	250	908	3954	1338	12.90	52.80	51.6	-2.27
2019/6/12	2600	Head	250	1061	3279	1338	14.30	57.70	57.2	-0.87
2019/6/29	5250	Head	100	1006	3954	1338	8.09	80.70	80.9	0.25
2019/6/29	5600	Head	100	1006	3954	1338	8.45	83.30	84.5	1.44
2019/6/29	5750	Head	100	1006	3954	1338	8.23	80.40	82.3	2.36

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/6/25	1750	Head	250	1090	3954	1338	4.99	19.20	19.96	3.96
2019/6/12	1900	Head	250	5d170	3279	1338	5.11	20.30	20.44	0.69
2019/6/12	2600	Head	250	1061	3279	1338	6.33	25.90	25.32	-2.24
2019/6/29	5250	Head	100	1006	3954	1338	2.28	23.20	22.8	-1.72
2019/6/29	5600	Head	100	1006	3954	1338	2.36	23.80	23.6	-0.84

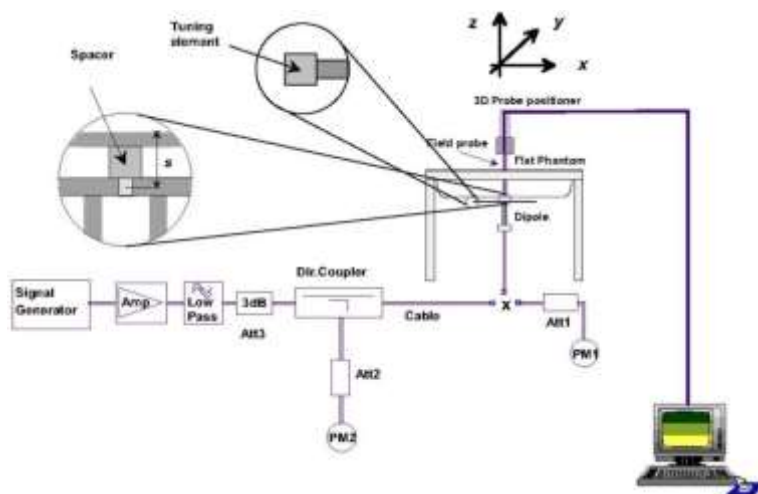


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 11.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 11.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 11.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 11.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

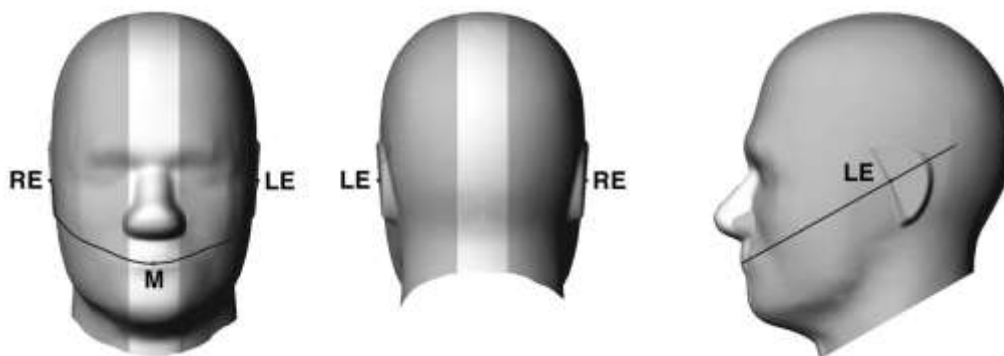


Fig 11.1.1 Front, back, and side views of SAM twin phantom

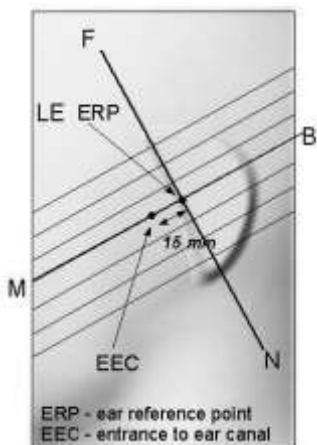


Fig 11.1.2 Close-up side view of phantom showing the ear region.

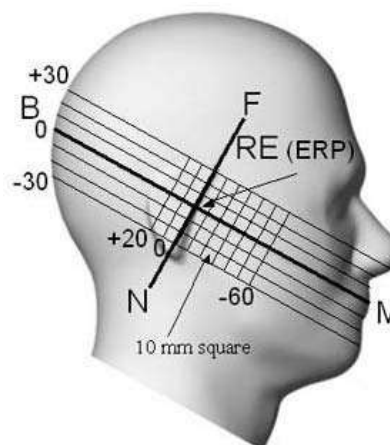


Fig 11.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 11.2.1 and Figure 11.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 11.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 11.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 11.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 11.2.3. The actual rotation angles should be documented in the test report.

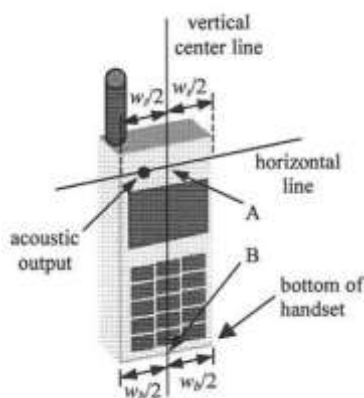


Fig 11.2.1 Handset vertical and horizontal reference lines—“fixed case”

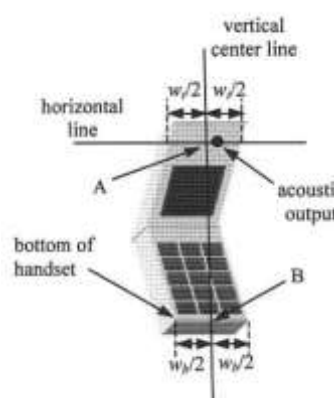


Fig 11.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

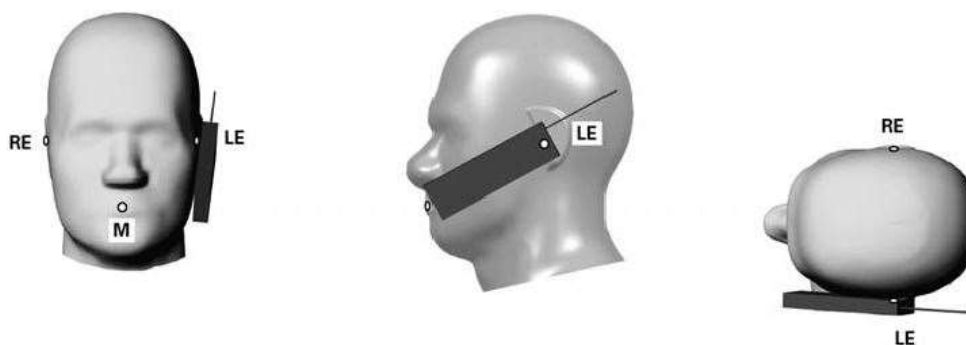


Fig 11.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 11.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

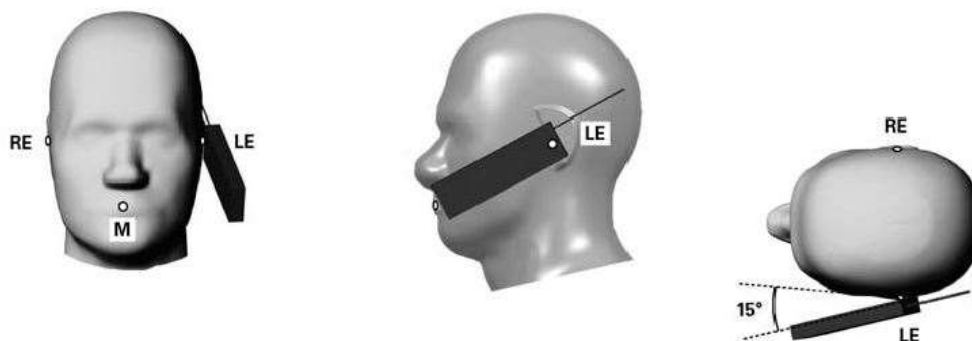


Fig 11.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

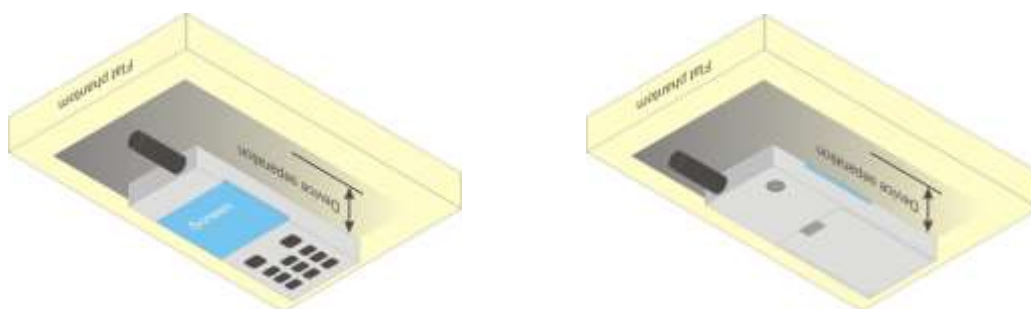


Fig 11.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WWAN Top/Bottom Antenna--Full Power Mode>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Tx Channel	824.2	836.4	848.8		824.2	836.4	848.8	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.49	32.30	32.46	33.50	23.49	23.30	23.46	24.50
GPRS 1 Tx slot	32.47	32.27	32.45	33.50	23.47	23.27	23.45	24.50
GPRS 2 Tx slots	29.80	30.08	30.10	31.00	23.80	24.08	24.10	25.00
GPRS 3 Tx slots	28.01	27.88	28.09	29.20	23.75	23.62	23.83	24.94
GPRS 4 Tx slots	26.70	26.68	26.42	28.00	23.70	23.68	23.42	25.00
EDGE 1 Tx slot	26.16	26.26	26.13	28.00	17.16	17.26	17.13	19.00
EDGE 2 Tx slots	23.50	23.64	23.57	25.50	17.50	17.64	17.57	19.50
EDGE 3 Tx slots	22.27	22.43	22.31	23.70	18.01	18.17	18.05	19.44
EDGE 4 Tx slots	21.05	21.04	20.86	22.50	18.05	18.04	17.86	19.50
GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Tx Channel	1850.2	1880	1909.8		1850.2	1880	1909.8	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.84	29.85	30.12	30.50	20.84	20.85	21.12	21.50
GPRS 1 Tx slot	29.85	29.86	30.14	30.50	20.85	20.86	21.14	21.50
GPRS 2 Tx slots	27.23	27.20	27.40	28.00	21.23	21.20	21.40	22.00
GPRS 3 Tx slots	25.25	25.41	25.30	26.20	20.99	21.15	21.04	21.94
GPRS 4 Tx slots	23.84	24.06	24.01	25.00	20.84	21.06	21.01	22.00
EDGE 1 Tx slot	25.81	25.85	25.94	27.50	16.81	16.85	16.94	18.50
EDGE 2 Tx slots	22.85	22.81	22.94	24.50	16.85	16.81	16.94	18.50
EDGE 3 Tx slots	22.26	22.01	22.05	22.70	18.00	17.75	17.79	18.44
EDGE 4 Tx slots	20.02	20.12	20.22	21.50	17.02	17.12	17.22	18.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	128	189		128	189	251	
Frequency (MHz)		824.2	836.4		824.2	836.4	848.8	
GSM 1 Tx slot		31.20	31.23	31.00	31.50	22.20	22.23	22.00
GPRS 1 Tx slot		31.15	31.13	30.90	31.50	22.15	22.13	21.90
GPRS 2 Tx slots		28.86	28.90	28.71	29.00	22.86	22.90	22.71
GPRS 3 Tx slots		26.75	26.76	26.98	27.20	22.49	22.50	22.72
GPRS 4 Tx slots		25.25	25.54	25.53	26.00	22.25	22.54	22.53
EDGE 1 Tx slot		26.16	26.26	26.13	28.00	17.16	17.26	17.13
EDGE 2 Tx slots		23.50	23.64	23.57	25.50	17.50	17.64	17.57
EDGE 3 Tx slots		22.27	22.43	22.31	23.70	18.01	18.17	18.05
EDGE 4 Tx slots		21.05	21.04	20.86	22.50	18.05	18.04	17.86

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WWAN Bottom Antenna --Reduced Power for Hotspot On>

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	512	661		512	661	810	
Frequency (MHz)		1850.2	1880		1850.2	1880	1909.8	
GSM 1 Tx slot		28.82	28.79	28.59	29.00	19.82	19.79	19.59
GPRS 1 Tx slot		28.80	28.78	28.56	29.00	19.80	19.78	19.56
GPRS 2 Tx slots		26.15	26.00	25.92	26.50	20.15	20.00	19.92
GPRS 3 Tx slots		24.27	24.23	24.02	24.70	20.01	19.97	19.76
GPRS 4 Tx slots		22.84	22.85	22.83	23.50	19.84	19.85	19.83
EDGE 1 Tx slot		25.81	25.85	25.94	27.50	16.81	16.85	16.94
EDGE 2 Tx slots		22.85	22.81	22.94	24.50	16.85	16.81	16.94
EDGE 3 Tx slots		22.26	22.01	22.05	22.70	18.00	17.75	17.79
EDGE 4 Tx slots		20.02	20.12	20.22	21.50	17.02	17.12	17.22

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Cycle to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{inf})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

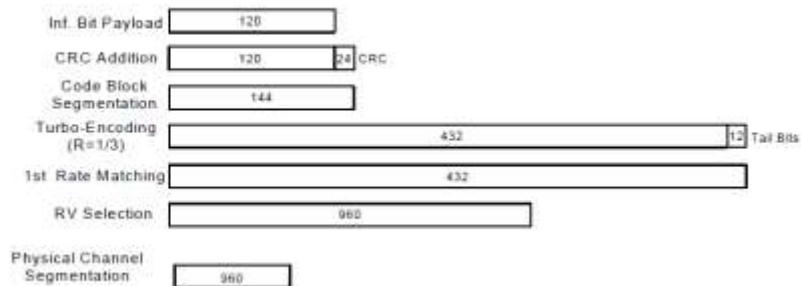


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Parms
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.
 Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
 Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
 Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
 Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration


<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<WWAN Top/Bottom Antenna--Full Power Mode>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.31	23.36	23.40	24.50	23.25	23.35	23.20	24.50	23.35	23.25	23.26	24.50
3GPP Rel 99	RMC 12.2Kbps	23.32	23.38	23.41	24.50	23.26	23.37	23.23	24.50	23.37	23.26	23.28	24.50
3GPP Rel 6	HSDPA Subtest-1	22.39	22.39	22.32	24.50	22.36	22.43	22.30	24.50	22.26	22.27	22.23	24.50
3GPP Rel 6	HSDPA Subtest-2	22.40	22.39	22.30	24.50	22.04	22.39	22.22	24.50	22.27	22.27	22.22	24.50
3GPP Rel 6	HSDPA Subtest-3	21.85	21.83	21.73	24.50	21.80	21.90	21.77	24.50	21.73	21.74	21.70	24.50
3GPP Rel 6	HSDPA Subtest-4	21.86	21.84	21.79	24.50	21.84	21.89	21.73	24.50	21.71	21.73	21.67	24.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.36	22.37	22.28	24.50	22.34	22.40	22.25	24.50	22.24	22.24	22.18	24.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.37	22.37	22.26	24.50	22.02	22.36	22.17	24.50	22.25	22.24	22.17	24.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.82	21.81	21.69	24.50	21.78	21.87	21.72	24.50	21.71	21.71	21.65	24.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.83	21.82	21.75	24.50	21.82	21.86	21.68	24.50	21.69	21.70	21.62	24.50
3GPP Rel 6	HSUPA Subtest-1	22.39	22.37	22.34	24.50	22.30	22.39	22.22	24.50	22.23	22.24	22.19	24.50
3GPP Rel 6	HSUPA Subtest-2	20.42	20.38	20.37	24.50	20.30	20.40	20.37	24.50	20.26	20.21	20.25	24.50
3GPP Rel 6	HSUPA Subtest-3	21.47	21.38	21.28	24.50	21.33	21.38	21.33	24.50	21.27	21.25	21.15	24.50
3GPP Rel 6	HSUPA Subtest-4	20.40	20.36	20.32	24.50	20.32	20.38	20.24	24.50	20.24	20.23	20.17	24.50
3GPP Rel 6	HSUPA Subtest-5	22.40	22.40	22.30	24.50	22.40	22.40	22.30	24.50	22.30	22.30	22.20	24.50
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	20.64	20.61	20.61	24.50	20.60	20.64	20.47	24.50	20.59	20.55	20.51	24.50



<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	20.53	20.48	20.55	21.00	20.61	20.61	20.49	21.00	21.82	21.90	21.84	22.50
3GPP Rel 99	RMC 12.2Kbps	20.54	20.56	20.59	21.00	20.67	20.68	20.56	21.00	21.92	21.95	21.94	22.50
3GPP Rel 6	HSDPA Subtest-1	19.55	19.56	19.53	21.00	19.63	19.67	19.57	21.00	20.78	20.65	20.58	22.50
3GPP Rel 6	HSDPA Subtest-2	19.54	19.55	19.49	21.00	19.62	19.70	19.60	21.00	20.71	20.67	20.54	22.50
3GPP Rel 6	HSDPA Subtest-3	19.05	19.05	18.97	21.00	19.08	19.19	19.07	21.00	20.23	20.18	20.06	22.50
3GPP Rel 6	HSDPA Subtest-4	19.01	19.08	18.98	21.00	19.09	19.17	19.03	21.00	20.17	20.21	20.07	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	19.51	19.51	19.48	21.00	19.62	19.69	19.61	21.00	20.71	20.68	20.63	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	19.35	19.59	19.41	21.00	19.65	19.75	19.59	21.00	20.75	20.61	20.54	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	19.05	19.04	18.95	21.00	19.01	19.12	19.15	21.00	20.18	20.15	20.01	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	19.12	18.99	18.91	21.00	19.05	19.13	19.12	21.00	20.08	20.18	20.05	22.50
3GPP Rel 6	HSUPA Subtest-1	19.58	19.61	19.53	21.00	19.65	19.66	19.59	21.00	20.64	20.60	20.56	22.50
3GPP Rel 6	HSUPA Subtest-2	17.59	17.59	17.50	21.00	17.69	17.62	17.58	21.00	18.62	18.64	18.53	22.50
3GPP Rel 6	HSUPA Subtest-3	18.53	18.56	18.44	21.00	18.64	18.69	18.61	21.00	19.60	19.60	19.51	22.50
3GPP Rel 6	HSUPA Subtest-4	17.56	17.57	17.48	21.00	17.61	17.69	17.51	21.00	18.62	18.61	18.55	22.50
3GPP Rel 6	HSUPA Subtest-5	19.50	19.50	19.50	21.00	19.60	19.70	19.60	21.00	20.70	20.60	20.60	22.50
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	17.51	17.48	17.35	21.00	17.28	17.33	17.48	21.00	18.35	18.25	18.48	22.50

<WWAN Bottom Antenna --Reduced Power for Hotspot On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	17.81	17.84	17.82	19.00	20.31	20.41	20.22	21.50
3GPP Rel 99	RMC 12.2Kbps	17.91	17.94	17.92	19.00	20.41	20.45	20.31	21.50
3GPP Rel 6	HSDPA Subtest-1	16.55	16.52	16.49	19.00	18.98	19.08	18.97	21.50
3GPP Rel 6	HSDPA Subtest-2	16.55	16.51	16.45	19.00	18.97	19.03	18.92	21.50
3GPP Rel 6	HSDPA Subtest-3	16.05	16.01	15.98	19.00	18.41	18.54	18.43	21.50
3GPP Rel 6	HSDPA Subtest-4	16.02	16.06	15.93	19.00	18.43	18.49	18.41	21.50
3GPP Rel 8	DC-HSDPA Subtest-1	16.48	16.58	16.51	19.00	18.78	19.05	18.89	21.50
3GPP Rel 8	DC-HSDPA Subtest-2	16.51	16.50	16.48	19.00	18.88	19.08	18.88	21.50
3GPP Rel 8	DC-HSDPA Subtest-3	16.05	16.05	16.01	19.00	18.42	18.55	18.38	21.50
3GPP Rel 8	DC-HSDPA Subtest-4	16.01	16.00	16.05	19.00	18.39	18.48	18.35	21.50
3GPP Rel 6	HSUPA Subtest-1	16.51	16.50	16.62	19.00	18.99	19.03	18.91	21.50
3GPP Rel 6	HSUPA Subtest-2	14.52	14.50	14.49	19.00	16.96	17.03	16.93	21.50
3GPP Rel 6	HSUPA Subtest-3	15.43	15.52	15.36	19.00	17.97	18.03	17.88	21.50
3GPP Rel 6	HSUPA Subtest-4	14.50	14.50	14.47	19.00	17.01	17.05	16.89	21.50
3GPP Rel 6	HSUPA Subtest-5	16.50	16.50	16.50	19.00	19.10	19.10	18.90	21.50
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	14.68	14.35	14.81	19.00	17.05	17.12	17.63	21.50



<WWAN Bottom Antenna --Reduced Power for Handheld>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	22.55	22.56	22.63	23.00	22.43	22.41	22.22	23.50
3GPP Rel 99	RMC 12.2Kbps	22.57	22.59	22.64	23.00	22.53	22.54	22.37	23.50
3GPP Rel 6	HSDPA Subtest-1	21.48	21.49	21.43	23.00	21.48	21.55	21.39	23.50
3GPP Rel 6	HSDPA Subtest-2	21.48	21.48	21.39	23.00	21.47	21.55	21.39	23.50
3GPP Rel 6	HSDPA Subtest-3	21.00	20.97	20.92	23.00	20.90	21.01	20.88	23.50
3GPP Rel 6	HSDPA Subtest-4	20.98	20.94	20.89	23.00	20.90	21.00	20.84	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.41	21.48	21.42	23.00	21.41	21.58	21.45	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	21.35	21.41	21.41	23.00	21.46	21.55	21.33	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	20.98	20.95	20.98	23.00	20.88	20.98	20.85	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.01	20.88	20.95	23.00	20.92	20.95	20.81	23.50
3GPP Rel 6	HSUPA Subtest-1	21.49	21.48	21.48	23.00	21.48	21.55	21.41	23.50
3GPP Rel 6	HSUPA Subtest-2	19.50	19.51	19.45	23.00	19.49	19.58	19.39	23.50
3GPP Rel 6	HSUPA Subtest-3	20.51	20.50	20.46	23.00	20.53	20.50	20.36	23.50
3GPP Rel 6	HSUPA Subtest-4	19.50	19.52	19.47	23.00	19.49	19.54	19.38	23.50
3GPP Rel 6	HSUPA Subtest-5	21.50	21.50	21.40	23.00	21.50	21.50	21.50	23.50
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	19.62	19.49	19.51	23.00	19.38	19.41	19.46	23.50


<WWAN Bottom Antenna --Reduced Power for transmitting simultaneously with WLAN 2.4GHz/5GHz/Bluetooth>

Band		WCDMA Band II			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538	
Rx Channel		9662	9800	9938	
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	AMR 12.2Kbps	22.55	22.56	22.63	23.00
3GPP Rel 99	RMC 12.2Kbps	22.57	22.59	22.64	23.00
3GPP Rel 6	HSDPA Subtest-1	21.48	21.49	21.43	23.00
3GPP Rel 6	HSDPA Subtest-2	21.48	21.48	21.39	23.00
3GPP Rel 6	HSDPA Subtest-3	21.00	20.97	20.92	23.00
3GPP Rel 6	HSDPA Subtest-4	20.98	20.94	20.89	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	21.41	21.48	21.42	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.35	21.41	21.41	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	20.98	20.95	20.98	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.01	20.88	20.95	23.00
3GPP Rel 6	HSUPA Subtest-1	21.49	21.48	21.48	23.00
3GPP Rel 6	HSUPA Subtest-2	19.50	19.51	19.45	23.00
3GPP Rel 6	HSUPA Subtest-3	20.51	20.50	20.46	23.00
3GPP Rel 6	HSUPA Subtest-4	19.50	19.52	19.47	23.00
3GPP Rel 6	HSUPA Subtest-5	21.50	21.50	21.40	23.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	19.62	19.49	19.51	23.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. According to 2017 TCB workshop, for 64QAM and 16QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

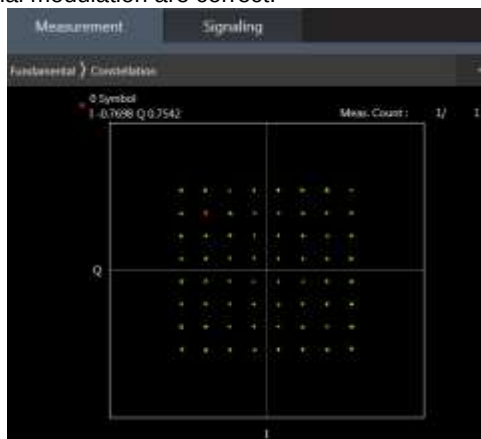

64QAM

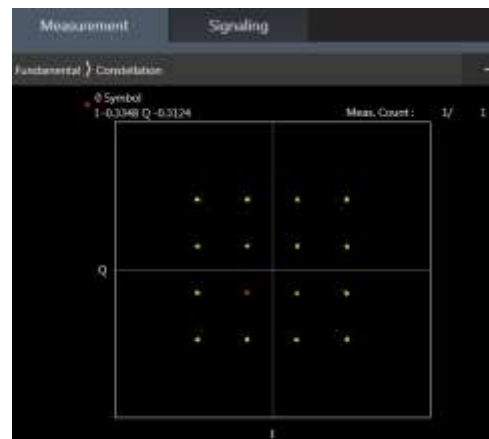

16QAM



<WWAN Top/Bottom Antenna-- Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.89	22.93	22.83	24	0
20	QPSK	1	49	22.76	22.84	22.79		
20	QPSK	1	99	22.82	22.83	22.72		
20	QPSK	50	0	21.89	22.00	21.97	23	1
20	QPSK	50	24	21.95	22.00	21.97		
20	QPSK	50	50	22.00	22.05	21.96		
20	QPSK	100	0	21.95	22.03	21.96	23	1
20	16QAM	1	0	22.16	22.20	22.06		
20	16QAM	1	49	22.06	22.09	22.10		
20	16QAM	1	99	22.02	22.10	22.06	22	2
20	16QAM	50	0	20.90	21.04	20.99		
20	16QAM	50	24	20.96	21.00	20.99		
20	16QAM	50	50	21.01	21.03	20.98	22	2
20	16QAM	100	0	20.93	21.00	20.97		
20	64QAM	1	0	21.04	21.06	21.05		
20	64QAM	1	49	20.94	21.02	21.02	21	3
20	64QAM	1	99	20.96	20.97	20.92		
20	64QAM	50	0	19.87	20.00	19.95		
20	64QAM	50	24	19.93	19.98	19.96	21	3
20	64QAM	50	50	19.99	20.01	19.92		
20	64QAM	100	0	19.92	19.98	19.96		



FCC SAR Test Report

Report No. : FA921903-02

Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.39	22.42	22.48	24	0
15	QPSK	1	37	22.37	22.37	22.37		
15	QPSK	1	74	22.49	22.49	22.32		
15	QPSK	36	0	21.46	21.52	21.50	23	1
15	QPSK	36	20	21.53	21.56	21.53		
15	QPSK	36	39	21.57	21.57	21.52		
15	QPSK	75	0	21.51	21.53	21.50	23	1
15	16QAM	1	0	21.66	21.71	21.75		
15	16QAM	1	37	21.61	21.64	21.66		
15	16QAM	1	74	21.77	21.73	21.67	22	2
15	16QAM	36	0	20.48	20.54	20.58		
15	16QAM	36	20	20.52	20.55	20.60		
15	16QAM	36	39	20.58	20.56	20.57	22	2
15	16QAM	75	0	20.51	20.56	20.57		
15	64QAM	1	0	20.56	20.59	20.69		
15	64QAM	1	37	20.58	20.54	20.63	21	3
15	64QAM	1	74	20.71	20.63	20.57		
15	64QAM	36	0	19.45	19.49	19.54		
15	64QAM	36	20	19.50	19.53	19.56	21	3
15	64QAM	36	39	19.52	19.51	19.53		
15	64QAM	75	0	19.50	19.52	19.54		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.35	22.69	22.41	24	0
10	QPSK	1	25	22.43	22.69	22.35		
10	QPSK	1	49	22.36	22.42	22.26		
10	QPSK	25	0	21.52	21.48	21.60	23	1
10	QPSK	25	12	21.55	21.51	21.74		
10	QPSK	25	25	21.49	21.45	21.68		
10	QPSK	50	0	21.52	21.58	21.73	23	1
10	16QAM	1	0	21.59	21.59	22.02		
10	16QAM	1	25	21.67	21.62	21.94		
10	16QAM	1	49	21.61	21.61	21.91	22	2
10	16QAM	25	0	20.51	20.49	20.79		
10	16QAM	25	12	20.52	20.51	20.79		
10	16QAM	25	25	20.46	20.45	20.73	22	2
10	16QAM	50	0	20.49	20.46	20.76		
10	64QAM	1	0	20.50	20.52	20.92		
10	64QAM	1	25	20.60	20.52	20.88	21	3
10	64QAM	1	49	20.50	20.56	20.77		
10	64QAM	25	0	19.48	19.47	19.79		
10	64QAM	25	12	19.49	19.47	19.77	21	3
10	64QAM	25	25	19.44	19.42	19.72		
10	64QAM	50	0	19.43	19.44	19.74		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.77	22.69	22.66	24	0
5	QPSK	1	12	22.79	22.79	22.67		
5	QPSK	1	24	22.75	22.76	22.70		
5	QPSK	12	0	21.86	21.75	21.74	23	1
5	QPSK	12	7	21.94	21.90	21.80		
5	QPSK	12	13	21.91	21.85	21.81		
5	QPSK	25	0	21.89	21.83	21.76	23	1
5	16QAM	1	0	22.09	21.95	21.96		
5	16QAM	1	12	22.06	22.05	21.98		
5	16QAM	1	24	21.94	22.03	21.93	22	2
5	16QAM	12	0	20.89	20.80	20.80		
5	16QAM	12	7	20.91	20.89	20.87		
5	16QAM	12	13	20.89	20.91	20.82	22	2
5	16QAM	25	0	20.90	20.87	20.84		
5	64QAM	1	0	20.91	20.79	20.87		
5	64QAM	1	12	20.97	20.92	20.89	22	2
5	64QAM	1	24	20.89	20.85	20.83		
5	64QAM	12	0	19.81	19.77	19.76		
5	64QAM	12	7	19.90	19.85	19.84	21	3
5	64QAM	12	13	19.87	19.82	19.79		
5	64QAM	25	0	19.83	19.83	19.81		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.80	22.71	22.63	24	0
3	QPSK	1	8	22.88	22.86	22.76		
3	QPSK	1	14	22.75	22.82	22.72		
3	QPSK	8	0	21.85	21.78	21.76	23	1
3	QPSK	8	4	21.97	21.88	21.78		
3	QPSK	8	7	21.93	21.92	21.78		
3	QPSK	15	0	21.96	21.89	21.82	23	1
3	16QAM	1	0	21.99	21.91	21.94		
3	16QAM	1	8	22.15	22.08	22.08		
3	16QAM	1	14	22.02	22.03	21.97	22	2
3	16QAM	8	0	20.93	20.80	20.85		
3	16QAM	8	4	20.96	20.96	20.90		
3	16QAM	8	7	20.94	20.90	20.83	22	2
3	16QAM	15	0	20.92	20.88	20.83		
3	64QAM	1	0	20.95	20.78	20.82		
3	64QAM	1	8	21.08	20.99	20.95	22	2
3	64QAM	1	14	20.92	20.93	20.88		
3	64QAM	8	0	19.84	19.74	19.73		
3	64QAM	8	4	19.88	19.90	19.83	21	3
3	64QAM	8	7	19.88	19.85	19.80		
3	64QAM	15	0	19.88	19.85	19.77		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.73	22.60	22.57	24	0
1.4	QPSK	1	3	22.84	22.80	22.69		
1.4	QPSK	1	5	22.75	22.72	22.61		
1.4	QPSK	3	0	22.75	22.69	22.61		
1.4	QPSK	3	1	22.81	22.75	22.69		
1.4	QPSK	3	3	22.79	22.74	22.63		
1.4	QPSK	6	0	21.85	21.80	21.69	23	1
1.4	16QAM	1	0	22.00	21.88	21.82	23	1
1.4	16QAM	1	3	22.10	22.02	21.96		
1.4	16QAM	1	5	22.01	21.97	21.89		
1.4	16QAM	3	0	21.79	21.71	21.69		
1.4	16QAM	3	1	21.84	21.80	21.76		
1.4	16QAM	3	3	21.84	21.74	21.69		
1.4	16QAM	6	0	20.90	20.86	20.79	22	2
1.4	64QAM	1	0	20.87	20.73	20.72	22	2
1.4	64QAM	1	3	21.00	20.94	20.89		
1.4	64QAM	1	5	20.87	20.86	20.80		
1.4	64QAM	3	0	20.80	20.76	20.70		
1.4	64QAM	3	1	20.92	20.81	20.78		
1.4	64QAM	3	3	20.79	20.75	20.73		
1.4	64QAM	6	0	19.82	19.74	19.72	21	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.90	22.93	22.84	24	0
20	QPSK	1	49	22.81	22.77	22.81		
20	QPSK	1	99	22.80	22.78	22.69		
20	QPSK	50	0	21.97	21.93	21.95	23	1
20	QPSK	50	24	21.98	21.99	21.92		
20	QPSK	50	50	21.97	21.94	21.89		
20	QPSK	100	0	21.95	21.94	21.93		
20	16QAM	1	0	22.16	22.22	22.14	23	1
20	16QAM	1	49	22.11	22.05	22.00		
20	16QAM	1	99	22.08	22.04	21.93		
20	16QAM	50	0	20.99	20.98	20.93	22	2
20	16QAM	50	24	21.00	20.98	20.95		
20	16QAM	50	50	20.93	20.93	20.90		
20	16QAM	100	0	20.96	20.92	20.91		
20	64QAM	1	0	21.06	21.10	21.10	22	2
20	64QAM	1	49	21.01	21.00	20.97		
20	64QAM	1	99	21.00	20.99	20.90		
20	64QAM	50	0	19.95	19.96	19.88	21	3
20	64QAM	50	24	19.94	19.97	19.88		
20	64QAM	50	50	19.89	19.91	19.86		
20	64QAM	100	0	19.94	19.96	19.90		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.82	22.86	22.83	24	0
15	QPSK	1	37	22.76	22.81	22.79		
15	QPSK	1	74	22.83	22.85	22.80		
15	QPSK	36	0	21.90	21.94	21.89	23	1
15	QPSK	36	20	21.96	21.98	21.92		
15	QPSK	36	39	21.89	21.95	21.85		
15	QPSK	75	0	21.93	21.94	21.90	23	1
15	16QAM	1	0	22.09	22.18	22.09		
15	16QAM	1	37	22.08	22.13	22.01		
15	16QAM	1	74	22.12	22.14	22.07	22	2
15	16QAM	36	0	20.92	20.96	20.89		
15	16QAM	36	20	20.97	20.97	20.92		
15	16QAM	36	39	20.92	20.93	20.88	22	2
15	16QAM	75	0	20.95	20.97	20.88		
15	64QAM	1	0	21.03	21.06	21.01		
15	64QAM	1	37	21.01	21.01	20.91	22	2
15	64QAM	1	74	21.07	21.00	20.97		
15	64QAM	36	0	19.90	19.95	19.85		
15	64QAM	36	20	19.92	19.94	19.88	21	3
15	64QAM	36	39	19.89	19.89	19.85		
15	64QAM	75	0	19.93	19.94	19.85		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.73	22.72	22.70	24	0
10	QPSK	1	25	22.71	22.78	22.66		
10	QPSK	1	49	22.67	22.65	22.59		
10	QPSK	25	0	21.84	21.86	21.79	23	1
10	QPSK	25	12	21.83	21.86	21.79		
10	QPSK	25	25	21.77	21.79	21.70		
10	QPSK	50	0	21.83	21.82	21.75	23	1
10	16QAM	1	0	22.05	22.04	21.92		
10	16QAM	1	25	22.03	22.01	21.96		
10	16QAM	1	49	22.00	21.98	21.84	22	2
10	16QAM	25	0	20.84	20.86	20.78		
10	16QAM	25	12	20.86	20.87	20.78		
10	16QAM	25	25	20.78	20.77	20.71	22	2
10	16QAM	50	0	20.83	20.85	20.75		
10	64QAM	1	0	20.90	20.88	20.81		
10	64QAM	1	25	20.92	20.96	20.87	22	2
10	64QAM	1	49	20.81	20.83	20.75		
10	64QAM	25	0	19.82	19.82	19.77		
10	64QAM	25	12	19.82	19.86	19.77	21	3
10	64QAM	25	25	19.75	19.76	19.70		
10	64QAM	50	0	19.76	19.78	19.72		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.79	22.68	22.67	24	0
5	QPSK	1	12	22.78	22.79	22.72		
5	QPSK	1	24	22.65	22.69	22.60		
5	QPSK	12	0	21.84	21.85	21.72	23	1
5	QPSK	12	7	21.91	21.89	21.79		
5	QPSK	12	13	21.83	21.84	21.75		
5	QPSK	25	0	21.83	21.82	21.79	23	1
5	16QAM	1	0	22.05	21.93	21.96		
5	16QAM	1	12	22.08	22.05	22.00		
5	16QAM	1	24	21.93	21.97	21.88	22	2
5	16QAM	12	0	20.89	20.91	20.76		
5	16QAM	12	7	20.94	20.89	20.82		
5	16QAM	12	13	20.85	20.81	20.78	22	2
5	16QAM	25	0	20.86	20.87	20.75		
5	64QAM	1	0	20.97	20.87	20.83		
5	64QAM	1	12	20.94	20.97	20.90	22	2
5	64QAM	1	24	20.85	20.88	20.80		
5	64QAM	12	0	19.86	19.86	19.69		
5	64QAM	12	7	19.88	19.85	19.79	21	3
5	64QAM	12	13	19.82	19.78	19.72		
5	64QAM	25	0	19.80	19.84	19.74		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.64	22.68	22.61	24	0
3	QPSK	1	8	22.83	22.85	22.82		
3	QPSK	1	14	22.60	22.73	22.64		
3	QPSK	8	0	21.83	21.82	21.73	23	1
3	QPSK	8	4	21.89	21.88	21.78		
3	QPSK	8	7	21.78	21.90	21.83		
3	QPSK	15	0	21.87	21.89	21.80	23	1
3	16QAM	1	0	21.98	21.93	21.90		
3	16QAM	1	8	22.15	22.17	22.11		
3	16QAM	1	14	21.89	22.02	21.89	22	2
3	16QAM	8	0	20.91	20.88	20.81		
3	16QAM	8	4	21.00	20.95	20.87		
3	16QAM	8	7	20.88	20.94	20.84	22	2
3	16QAM	15	0	20.91	20.89	20.79		
3	64QAM	1	0	20.92	20.88	20.77		
3	64QAM	1	8	20.92	20.88	20.93	22	2
3	64QAM	1	14	20.78	20.91	20.82		
3	64QAM	8	0	19.90	19.83	19.72		
3	64QAM	8	4	19.90	19.90	19.81	21	3
3	64QAM	8	7	19.78	19.89	19.77		
3	64QAM	15	0	19.84	19.83	19.72		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.72	22.78	22.68	24	0
1.4	QPSK	1	3	22.83	22.88	22.80		
1.4	QPSK	1	5	22.73	22.82	22.72		
1.4	QPSK	3	0	22.78	22.77	22.71		
1.4	QPSK	3	1	22.82	22.88	22.76		
1.4	QPSK	3	3	22.80	22.84	22.72		
1.4	QPSK	6	0	21.87	21.88	21.82	23	1
1.4	16QAM	1	0	22.03	22.07	21.99	23	1
1.4	16QAM	1	3	22.20	22.19	22.06		
1.4	16QAM	1	5	22.00	22.12	21.96		
1.4	16QAM	3	0	21.89	21.88	21.78		
1.4	16QAM	3	1	21.96	21.88	21.86		
1.4	16QAM	3	3	21.90	21.85	21.79		
1.4	16QAM	6	0	20.96	20.98	20.83	22	2
1.4	64QAM	1	0	20.88	20.98	20.81	22	2
1.4	64QAM	1	3	20.78	20.89	20.87		
1.4	64QAM	1	5	20.93	20.95	20.87		
1.4	64QAM	3	0	20.93	20.87	20.80		
1.4	64QAM	3	1	20.98	20.93	20.86		
1.4	64QAM	3	3	20.97	20.91	20.80		
1.4	64QAM	6	0	19.94	19.89	19.80	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.70	22.61	22.72	24	0
10	QPSK	1	25	22.69	22.76	22.62		
10	QPSK	1	49	22.63	22.62	22.57		
10	QPSK	25	0	21.78	21.81	21.75	23	1
10	QPSK	25	12	21.78	21.80	21.75		
10	QPSK	25	25	21.72	21.77	21.70		
10	QPSK	50	0	21.74	21.79	21.74	23	1
10	16QAM	1	0	21.94	21.92	21.98		
10	16QAM	1	25	21.92	21.96	21.85		
10	16QAM	1	49	21.92	21.87	21.83	22	2
10	16QAM	25	0	20.76	20.78	20.74		
10	16QAM	25	12	20.73	20.76	20.74		
10	16QAM	25	25	20.72	20.73	20.67	22	2
10	16QAM	50	0	20.75	20.77	20.73		
10	64QAM	1	0	20.84	20.80	20.79		
10	64QAM	1	25	20.80	20.84	20.81	22	2
10	64QAM	1	49	20.81	20.79	20.74		
10	64QAM	25	0	19.73	19.75	19.72		
10	64QAM	25	12	19.75	19.75	19.71	21	3
10	64QAM	25	25	19.70	19.71	19.65		
10	64QAM	50	0	19.72	19.70	19.69		



FCC SAR Test Report

Report No. : FA921903-02

Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.61	22.57	22.58	24	0
5	QPSK	1	12	22.65	22.74	22.66		
5	QPSK	1	24	22.64	22.70	22.64		
5	QPSK	12	0	21.66	21.69	21.69	23	1
5	QPSK	12	7	21.81	21.82	21.74		
5	QPSK	12	13	21.80	21.83	21.79		
5	QPSK	25	0	21.76	21.79	21.68	23	1
5	16QAM	1	0	21.82	21.79	21.84		
5	16QAM	1	12	21.92	21.95	21.95		
5	16QAM	1	24	21.92	21.98	21.88	22	2
5	16QAM	12	0	20.65	20.71	20.71		
5	16QAM	12	7	20.79	20.82	20.72		
5	16QAM	12	13	20.80	20.84	20.75	22	2
5	16QAM	25	0	20.75	20.80	20.67		
5	64QAM	1	0	20.72	20.68	20.75		
5	64QAM	1	12	20.85	20.86	20.86	22	2
5	64QAM	1	24	20.82	20.87	20.83		
5	64QAM	12	0	19.60	19.68	19.65		
5	64QAM	12	7	19.75	19.82	19.73	21	3
5	64QAM	12	13	19.78	19.82	19.77		
5	64QAM	25	0	19.72	19.77	19.70		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.50	22.53	22.45	24	0
3	QPSK	1	8	22.71	22.73	22.64		
3	QPSK	1	14	22.59	22.68	22.56		
3	QPSK	8	0	21.56	21.59	21.56	23	1
3	QPSK	8	4	21.72	21.77	21.70		
3	QPSK	8	7	21.71	21.77	21.67		
3	QPSK	15	0	21.71	21.78	21.68	23	1
3	16QAM	1	0	21.75	21.71	21.76		
3	16QAM	1	8	21.95	21.96	21.87		
3	16QAM	1	14	21.91	21.90	21.86	22	2
3	16QAM	8	0	20.64	20.66	20.60		
3	16QAM	8	4	20.77	20.76	20.78		
3	16QAM	8	7	20.77	20.77	20.70	22	2
3	16QAM	15	0	20.71	20.75	20.73		
3	64QAM	1	0	20.61	20.61	20.61		
3	64QAM	1	8	20.86	20.86	20.79	22	2
3	64QAM	1	14	20.82	20.84	20.78		
3	64QAM	8	0	19.55	19.60	19.55		
3	64QAM	8	4	19.69	19.70	19.72	21	3
3	64QAM	8	7	19.67	19.71	19.65		
3	64QAM	15	0	19.65	19.69	19.63		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.47	22.47	22.50	24	0
1.4	QPSK	1	3	22.64	22.66	22.61		
1.4	QPSK	1	5	22.61	22.59	22.53		
1.4	QPSK	3	0	22.56	22.57	22.50		
1.4	QPSK	3	1	22.63	22.63	22.57		
1.4	QPSK	3	3	22.57	22.59	22.58		
1.4	QPSK	6	0	21.66	21.66	21.61	23	1
1.4	16QAM	1	0	21.75	21.76	21.75	23	1
1.4	16QAM	1	3	21.86	21.91	21.89		
1.4	16QAM	1	5	21.83	21.88	21.83		
1.4	16QAM	3	0	21.61	21.61	21.55		
1.4	16QAM	3	1	21.62	21.66	21.58		
1.4	16QAM	3	3	21.65	21.64	21.56		
1.4	16QAM	6	0	20.70	20.71	20.72	22	2
1.4	64QAM	1	0	20.62	20.64	20.67	22	2
1.4	64QAM	1	3	20.77	20.81	20.77		
1.4	64QAM	1	5	20.75	20.77	20.70		
1.4	64QAM	3	0	20.62	20.62	20.59		
1.4	64QAM	3	1	20.68	20.67	20.62		
1.4	64QAM	3	3	20.66	20.65	20.57		
1.4	64QAM	6	0	19.60	19.64	19.59	21	3



<LTE Band 7-Top Antenna>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.25	22.17	22.32	23	0
20	QPSK	1	49	22.20	22.29	22.29		
20	QPSK	1	99	22.36	22.37	22.31		
20	QPSK	50	0	21.35	21.40	21.49	22	1
20	QPSK	50	24	21.41	21.49	21.50		
20	QPSK	50	50	21.42	21.51	21.45		
20	QPSK	100	0	21.35	21.48	21.43	22	1
20	16QAM	1	0	21.57	21.43	21.69		
20	16QAM	1	49	21.52	21.54	21.59		
20	16QAM	1	99	21.67	21.58	21.56	21	2
20	16QAM	50	0	20.34	20.42	20.55		
20	16QAM	50	24	20.40	20.49	20.52		
20	16QAM	50	50	20.40	20.45	20.43	21	2
20	16QAM	100	0	20.36	20.41	20.45		
20	64QAM	1	0	20.46	20.34	20.60		
20	64QAM	1	49	20.39	20.45	20.51	21	2
20	64QAM	1	99	20.58	20.52	20.50		
20	64QAM	50	0	19.32	19.39	19.53		
20	64QAM	50	24	19.40	19.45	19.51	20	3
20	64QAM	50	50	19.41	19.48	19.39		
20	64QAM	100	0	19.36	19.40	19.45		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.24	22.22	22.34	23	0
15	QPSK	1	37	22.23	22.29	22.29		
15	QPSK	1	74	22.25	22.35	22.36		
15	QPSK	36	0	21.35	21.43	21.48	22	1
15	QPSK	36	20	21.39	21.51	21.52		
15	QPSK	36	39	21.41	21.49	21.47		
15	QPSK	75	0	21.40	21.47	21.52	22	1
15	16QAM	1	0	21.58	21.51	21.69		
15	16QAM	1	37	21.49	21.54	21.57		
15	16QAM	1	74	21.57	21.58	21.60	21	2
15	16QAM	36	0	20.32	20.43	20.55		
15	16QAM	36	20	20.41	20.49	20.51		
15	16QAM	36	39	20.38	20.43	20.45	21	2
15	16QAM	75	0	20.39	20.42	20.47		
15	64QAM	1	0	20.48	20.46	20.60		
15	64QAM	1	37	20.48	20.53	20.46	21	2
15	64QAM	1	74	20.49	20.52	20.53		
15	64QAM	36	0	19.32	19.39	19.52		
15	64QAM	36	20	19.40	19.47	19.51	20	3
15	64QAM	36	39	19.39	19.41	19.45		
15	64QAM	75	0	19.39	19.44	19.48		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.07	22.15	22.19	23	0
10	QPSK	1	25	22.07	22.27	22.23		
10	QPSK	1	49	22.04	22.27	22.24		
10	QPSK	25	0	21.21	21.30	21.32	22	1
10	QPSK	25	12	21.21	21.36	21.32		
10	QPSK	25	25	21.17	21.35	21.33		
10	QPSK	50	0	21.21	21.34	21.33	22	1
10	16QAM	1	0	21.36	21.49	21.54		
10	16QAM	1	25	21.37	21.53	21.51		
10	16QAM	1	49	21.34	21.57	21.55	21	2
10	16QAM	25	0	20.22	20.33	20.31		
10	16QAM	25	12	20.23	20.36	20.33		
10	16QAM	25	25	20.16	20.34	20.31	21	2
10	16QAM	50	0	20.19	20.34	20.31		
10	64QAM	1	0	20.28	20.37	20.38		
10	64QAM	1	25	20.27	20.45	20.44	21	2
10	64QAM	1	49	20.26	20.40	20.45		
10	64QAM	25	0	19.19	19.29	19.31		
10	64QAM	25	12	19.22	19.35	19.30	20	3
10	64QAM	25	25	19.17	19.31	19.30		
10	64QAM	50	0	19.19	19.29	19.29		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.18	22.29	22.22	23	0
5	QPSK	1	12	22.19	22.37	22.29		
5	QPSK	1	24	22.11	22.26	22.32		
5	QPSK	12	0	21.29	21.39	21.23	22	1
5	QPSK	12	7	21.36	21.46	21.42		
5	QPSK	12	13	21.31	21.41	21.38		
5	QPSK	25	0	21.28	21.39	21.29	22	1
5	16QAM	1	0	21.51	21.51	21.49		
5	16QAM	1	12	21.50	21.61	21.58		
5	16QAM	1	24	21.40	21.55	21.52	21	2
5	16QAM	12	0	20.35	20.39	20.28		
5	16QAM	12	7	20.42	20.46	20.44		
5	16QAM	12	13	20.28	20.36	20.38	21	2
5	16QAM	25	0	20.35	20.39	20.27		
5	64QAM	1	0	20.47	20.46	20.39		
5	64QAM	1	12	20.40	20.49	20.51	21	2
5	64QAM	1	24	20.34	20.44	20.46		
5	64QAM	12	0	19.32	19.30	19.27		
5	64QAM	12	7	19.39	19.46	19.43	20	3
5	64QAM	12	13	19.28	19.33	19.37		
5	64QAM	25	0	19.35	19.39	19.28		



<LTE Band 7-Bottom Antenna>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.14	23.11	23.16	24	0
20	QPSK	1	49	23.10	23.10	23.10		
20	QPSK	1	99	23.21	23.25	23.15		
20	QPSK	50	0	22.23	22.22	22.32	23	1
20	QPSK	50	24	22.28	22.30	22.32		
20	QPSK	50	50	22.27	22.35	22.27		
20	QPSK	100	0	22.25	22.29	22.27	23	1
20	16QAM	1	0	22.47	22.32	22.46		
20	16QAM	1	49	22.38	22.37	22.37		
20	16QAM	1	99	22.50	22.45	22.43	22	2
20	16QAM	50	0	21.24	21.23	21.32		
20	16QAM	50	24	21.27	21.33	21.31		
20	16QAM	50	50	21.27	21.34	21.23	22	2
20	16QAM	100	0	21.26	21.26	21.23		
20	64QAM	1	0	21.33	21.15	21.38		
20	64QAM	1	49	21.27	21.26	21.25	22	2
20	64QAM	1	99	21.41	21.39	21.31		
20	64QAM	50	0	20.22	20.17	20.29		
20	64QAM	50	24	20.23	20.27	20.29	21	3
20	64QAM	50	50	20.22	20.32	20.21		
20	64QAM	100	0	20.24	20.25	20.22		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.14	23.00	23.14	24	0
15	QPSK	1	37	23.07	23.10	23.11		
15	QPSK	1	74	23.10	23.21	23.13		
15	QPSK	36	0	22.22	22.22	22.30	23	1
15	QPSK	36	20	22.26	22.31	22.30		
15	QPSK	36	39	22.23	22.31	22.29		
15	QPSK	75	0	22.25	22.26	22.29	23	1
15	16QAM	1	0	22.42	22.31	22.44		
15	16QAM	1	37	22.35	22.37	22.38		
15	16QAM	1	74	22.43	22.50	22.42	22	2
15	16QAM	36	0	21.21	21.20	21.28		
15	16QAM	36	20	21.26	21.30	21.31		
15	16QAM	36	39	21.26	21.30	21.25	22	2
15	16QAM	75	0	21.23	21.28	21.29		
15	64QAM	1	0	21.37	21.21	21.31		
15	64QAM	1	37	21.31	21.27	21.28	22	2
15	64QAM	1	74	21.31	21.41	21.34		
15	64QAM	36	0	20.18	20.19	20.27		
15	64QAM	36	20	20.22	20.28	20.26	21	3
15	64QAM	36	39	20.24	20.25	20.23		
15	64QAM	75	0	20.19	20.25	20.26		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.97	23.00	23.01	24	0
10	QPSK	1	25	22.91	23.07	23.03		
10	QPSK	1	49	22.95	23.09	23.02		
10	QPSK	25	0	22.06	22.08	22.09	23	1
10	QPSK	25	12	22.07	22.14	22.10		
10	QPSK	25	25	22.04	22.19	22.07		
10	QPSK	50	0	22.07	22.15	22.11	23	1
10	16QAM	1	0	22.21	22.19	22.23		
10	16QAM	1	25	22.19	22.33	22.30		
10	16QAM	1	49	22.18	22.37	22.28	22	2
10	16QAM	25	0	21.08	21.11	21.11		
10	16QAM	25	12	21.08	21.16	21.11		
10	16QAM	25	25	21.02	21.17	21.08	22	2
10	16QAM	50	0	21.04	21.12	21.11		
10	64QAM	1	0	21.11	21.12	21.17		
10	64QAM	1	25	21.09	21.27	21.17	22	2
10	64QAM	1	49	21.10	21.28	21.19		
10	64QAM	25	0	20.04	20.08	20.09		
10	64QAM	25	12	20.04	20.14	20.09	21	3
10	64QAM	25	25	19.99	20.15	20.04		
10	64QAM	50	0	20.00	20.10	20.06		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.97	23.06	22.97	24	0
5	QPSK	1	12	23.00	23.12	23.04		
5	QPSK	1	24	22.87	23.12	23.09		
5	QPSK	12	0	22.10	22.12	22.05	23	1
5	QPSK	12	7	22.14	22.24	22.17		
5	QPSK	12	13	22.08	22.18	22.13		
5	QPSK	25	0	22.10	22.21	22.08	23	1
5	16QAM	1	0	22.27	22.29	22.27		
5	16QAM	1	12	22.30	22.38	22.38		
5	16QAM	1	24	22.21	22.36	22.34	22	2
5	16QAM	12	0	21.15	21.15	21.08		
5	16QAM	12	7	21.16	21.23	21.20		
5	16QAM	12	13	21.14	21.19	21.18	22	2
5	16QAM	25	0	21.13	21.21	21.12		
5	64QAM	1	0	21.13	21.22	21.13		
5	64QAM	1	12	21.19	21.24	21.23	22	2
5	64QAM	1	24	21.11	21.21	21.24		
5	64QAM	12	0	20.10	20.09	20.05		
5	64QAM	12	7	20.17	20.19	20.17	21	3
5	64QAM	12	13	20.07	20.16	20.13		
5	64QAM	25	0	20.13	20.16	20.10		



<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On >

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	20.13	20.20	20.15	21	0
20	QPSK	1	49	20.05	20.07	20.06		
20	QPSK	1	99	20.11	20.06	19.97		
20	QPSK	50	0	20.16	20.28	20.27	21	0
20	QPSK	50	24	20.22	20.26	20.27		
20	QPSK	50	50	20.30	20.31	20.26		
20	QPSK	100	0	20.26	20.27	20.24	21	0
20	16QAM	1	0	20.37	20.42	20.28		
20	16QAM	1	49	20.32	20.29	20.42		
20	16QAM	1	99	20.42	20.30	20.28	21	0
20	16QAM	50	0	20.13	20.27	20.26		
20	16QAM	50	24	20.17	20.23	20.27		
20	16QAM	50	50	20.29	20.27	20.24	21	0
20	16QAM	100	0	20.16	20.26	20.23		
20	64QAM	1	0	20.21	20.37	20.28		
20	64QAM	1	49	20.17	20.26	20.31	21	0
20	64QAM	1	99	20.29	20.24	20.19		
20	64QAM	50	0	20.11	20.29	20.21		
20	64QAM	50	24	20.18	20.22	20.24	21	0
20	64QAM	50	50	20.27	20.25	20.25		
20	64QAM	100	0	20.19	20.24	20.25		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	20.13	20.14	20.18	21	0
15	QPSK	1	37	20.05	20.03	20.10		
15	QPSK	1	74	20.19	20.19	20.00		
15	QPSK	36	0	20.21	20.27	20.18	21	0
15	QPSK	36	20	20.22	20.23	20.23		
15	QPSK	36	39	20.26	20.28	20.22		
15	QPSK	75	0	20.21	20.24	20.23	21	0
15	16QAM	1	0	20.34	20.48	20.47		
15	16QAM	1	37	20.25	20.34	20.33		
15	16QAM	1	74	20.43	20.37	20.33	21	0
15	16QAM	36	0	20.13	20.25	20.22		
15	16QAM	36	20	20.19	20.24	20.25		
15	16QAM	36	39	20.26	20.22	20.23	21	0
15	16QAM	75	0	20.20	20.22	20.20		
15	64QAM	1	0	20.28	20.43	20.40		
15	64QAM	1	37	20.20	20.17	20.29	21	0
15	64QAM	1	74	20.38	20.28	20.22		
15	64QAM	36	0	20.14	20.24	20.22		
15	64QAM	36	20	20.21	20.24	20.23	21	0
15	64QAM	36	39	20.23	20.21	20.21		
15	64QAM	75	0	20.22	20.23	20.23		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	20.04	20.07	20.10	21	0
10	QPSK	1	25	19.94	19.92	19.99		
10	QPSK	1	49	19.98	20.08	20.01		
10	QPSK	25	0	20.15	20.15	20.11	21	0
10	QPSK	25	12	20.18	20.15	20.10		
10	QPSK	25	25	20.10	20.13	20.05		
10	QPSK	50	0	20.12	20.15	20.08	21	0
10	16QAM	1	0	20.33	20.37	20.33		
10	16QAM	1	25	20.23	20.17	20.19		
10	16QAM	1	49	20.19	20.27	20.30	21	0
10	16QAM	25	0	20.12	20.15	20.12		
10	16QAM	25	12	20.15	20.17	20.17		
10	16QAM	25	25	20.07	20.08	20.04	21	0
10	16QAM	50	0	20.11	20.12	20.10		
10	64QAM	1	0	20.13	20.18	20.29		
10	64QAM	1	25	20.07	20.13	20.22	21	0
10	64QAM	1	49	20.16	20.24	20.09		
10	64QAM	25	0	20.12	20.12	20.13		
10	64QAM	25	12	20.14	20.15	20.13	21	0
10	64QAM	25	25	20.10	20.06	20.06		
10	64QAM	50	0	20.10	20.10	20.09		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	20.04	19.92	19.93	21	0
5	QPSK	1	12	20.08	20.03	20.01		
5	QPSK	1	24	19.99	20.05	19.98		
5	QPSK	12	0	20.15	20.08	20.07	21	0
5	QPSK	12	7	20.23	20.18	20.14		
5	QPSK	12	13	20.17	20.16	20.11		
5	QPSK	25	0	20.17	20.14	20.06	21	0
5	16QAM	1	0	20.28	20.18	20.26		
5	16QAM	1	12	20.32	20.23	20.29		
5	16QAM	1	24	20.23	20.25	20.15	21	0
5	16QAM	12	0	20.15	20.06	20.09		
5	16QAM	12	7	20.22	20.19	20.14		
5	16QAM	12	13	20.19	20.12	20.14	21	0
5	16QAM	25	0	20.15	20.13	20.08		
5	64QAM	1	0	20.21	20.02	20.19		
5	64QAM	1	12	20.25	20.19	20.18	21	0
5	64QAM	1	24	20.15	20.16	20.10		
5	64QAM	12	0	20.15	20.06	20.11		
5	64QAM	12	7	20.15	20.18	20.12	21	0
5	64QAM	12	13	20.15	20.13	20.15		
5	64QAM	25	0	20.15	20.13	20.04		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	20.00	19.88	19.91	21	0
3	QPSK	1	8	20.08	20.09	20.03		
3	QPSK	1	14	20.00	20.04	19.91		
3	QPSK	8	0	20.12	20.02	19.99	21	0
3	QPSK	8	4	20.14	20.10	20.03		
3	QPSK	8	7	20.15	20.12	20.06		
3	QPSK	15	0	20.21	20.12	20.06	21	0
3	16QAM	1	0	20.24	20.17	20.15		
3	16QAM	1	8	20.35	20.29	20.33		
3	16QAM	1	14	20.23	20.25	20.14	21	0
3	16QAM	8	0	20.14	20.08	20.05		
3	16QAM	8	4	20.18	20.19	20.14		
3	16QAM	8	7	20.19	20.14	20.09	21	0
3	16QAM	15	0	20.13	20.12	20.10		
3	64QAM	1	0	20.08	20.00	20.13		
3	64QAM	1	8	20.27	20.18	20.23	21	0
3	64QAM	1	14	20.16	20.12	20.05		
3	64QAM	8	0	20.09	20.04	20.05		
3	64QAM	8	4	20.17	20.10	20.11	21	0
3	64QAM	8	7	20.16	20.13	20.03		
3	64QAM	15	0	20.15	20.10	20.06		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	19.98	19.86	19.86	21	0
1.4	QPSK	1	3	20.10	20.04	19.95		
1.4	QPSK	1	5	20.01	19.98	19.86		
1.4	QPSK	3	0	19.98	19.95	19.84		
1.4	QPSK	3	1	20.07	20.01	19.94		
1.4	QPSK	3	3	20.04	19.98	19.94		
1.4	QPSK	6	0	20.09	20.06	19.97	21	0
1.4	16QAM	1	0	20.14	20.06	20.09	21	0
1.4	16QAM	1	3	20.32	20.23	20.20		
1.4	16QAM	1	5	20.20	20.13	20.15		
1.4	16QAM	3	0	20.01	20.01	19.88		
1.4	16QAM	3	1	20.06	20.05	20.03		
1.4	16QAM	3	3	20.04	19.98	19.96		
1.4	16QAM	6	0	20.17	20.06	20.08	21	0
1.4	64QAM	1	0	20.21	20.03	20.01	21	0
1.4	64QAM	1	3	20.24	20.19	20.18		
1.4	64QAM	1	5	20.07	20.08	20.07		
1.4	64QAM	3	0	20.06	20.00	19.95		
1.4	64QAM	3	1	20.11	20.04	20.03		
1.4	64QAM	3	3	20.05	20.05	20.00		
1.4	64QAM	6	0	20.09	20.00	19.98	21	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	20.33	20.33	20.27	21	0
20	QPSK	1	49	20.26	20.31	20.16		
20	QPSK	1	99	20.22	20.19	20.15		
20	QPSK	50	0	20.39	20.39	20.33	21	0
20	QPSK	50	24	20.38	20.41	20.36		
20	QPSK	50	50	20.36	20.37	20.30		
20	QPSK	100	0	20.38	20.39	20.30		
20	16QAM	1	0	20.68	20.70	20.64	21	0
20	16QAM	1	49	20.60	20.60	20.44		
20	16QAM	1	99	20.54	20.55	20.39		
20	16QAM	50	0	20.43	20.41	20.37	21	0
20	16QAM	50	24	20.43	20.41	20.32		
20	16QAM	50	50	20.39	20.40	20.29		
20	16QAM	100	0	20.41	20.39	20.33		
20	64QAM	1	0	20.52	20.58	20.57	21	0
20	64QAM	1	49	20.48	20.48	20.35		
20	64QAM	1	99	20.45	20.46	20.35		
20	64QAM	50	0	20.41	20.39	20.32	21	0
20	64QAM	50	24	20.40	20.44	20.30		
20	64QAM	50	50	20.38	20.37	20.29		
20	64QAM	100	0	20.43	20.40	20.34		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.29	20.30	20.22	21	0
15	QPSK	1	37	20.22	20.23	20.15		
15	QPSK	1	74	20.26	20.26	20.16		
15	QPSK	36	0	20.41	20.37	20.29	21	0
15	QPSK	36	20	20.39	20.40	20.33		
15	QPSK	36	39	20.34	20.38	20.25		
15	QPSK	75	0	20.34	20.35	20.31	21	0
15	16QAM	1	0	20.61	20.61	20.51		
15	16QAM	1	37	20.50	20.53	20.39		
15	16QAM	1	74	20.56	20.54	20.46	21	0
15	16QAM	36	0	20.43	20.42	20.36		
15	16QAM	36	20	20.42	20.42	20.32		
15	16QAM	36	39	20.36	20.40	20.26	21	0
15	16QAM	75	0	20.36	20.39	20.30		
15	64QAM	1	0	20.53	20.63	20.41		
15	64QAM	1	37	20.49	20.54	20.38	21	0
15	64QAM	1	74	20.55	20.47	20.32		
15	64QAM	36	0	20.42	20.41	20.32		
15	64QAM	36	20	20.43	20.44	20.32	21	0
15	64QAM	36	39	20.37	20.40	20.28		
15	64QAM	75	0	20.37	20.40	20.31		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.14	20.19	20.14	21	0
10	QPSK	1	25	20.07	20.16	20.05		
10	QPSK	1	49	20.10	20.10	20.05		
10	QPSK	25	0	20.26	20.28	20.24	21	0
10	QPSK	25	12	20.27	20.33	20.21		
10	QPSK	25	25	20.17	20.22	20.17		
10	QPSK	50	0	20.24	20.31	20.20	21	0
10	16QAM	1	0	20.57	20.43	20.45		
10	16QAM	1	25	20.38	20.52	20.24		
10	16QAM	1	49	20.35	20.35	20.35	21	0
10	16QAM	25	0	20.30	20.29	20.19		
10	16QAM	25	12	20.31	20.30	20.19		
10	16QAM	25	25	20.23	20.25	20.11	21	0
10	16QAM	50	0	20.24	20.29	20.15		
10	64QAM	1	0	20.47	20.42	20.28		
10	64QAM	1	25	20.30	20.23	20.18	21	0
10	64QAM	1	49	20.28	20.28	20.28		
10	64QAM	25	0	20.32	20.29	20.22		
10	64QAM	25	12	20.31	20.31	20.19	21	0
10	64QAM	25	25	20.21	20.24	20.13		
10	64QAM	50	0	20.25	20.26	20.15		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.19	20.16	20.09	21	0
5	QPSK	1	12	20.16	20.25	20.14		
5	QPSK	1	24	20.07	20.13	20.04		
5	QPSK	12	0	20.28	20.33	20.16	21	0
5	QPSK	12	7	20.28	20.33	20.27		
5	QPSK	12	13	20.22	20.33	20.23		
5	QPSK	25	0	20.25	20.31	20.20	21	0
5	16QAM	1	0	20.52	20.39	20.26		
5	16QAM	1	12	20.56	20.51	20.39		
5	16QAM	1	24	20.42	20.39	20.33	21	0
5	16QAM	12	0	20.34	20.32	20.17		
5	16QAM	12	7	20.35	20.39	20.24		
5	16QAM	12	13	20.34	20.31	20.18	21	0
5	16QAM	25	0	20.32	20.26	20.16		
5	64QAM	1	0	20.44	20.37	20.25		
5	64QAM	1	12	20.36	20.49	20.38	21	0
5	64QAM	1	24	20.33	20.32	20.20		
5	64QAM	12	0	20.35	20.30	20.16		
5	64QAM	12	7	20.32	20.32	20.21	21	0
5	64QAM	12	13	20.31	20.30	20.16		
5	64QAM	25	0	20.31	20.26	20.14		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.14	20.11	20.00	21	0
3	QPSK	1	8	20.27	20.31	20.22		
3	QPSK	1	14	20.02	20.15	20.04		
3	QPSK	8	0	20.25	20.31	20.15	21	0
3	QPSK	8	4	20.35	20.35	20.22		
3	QPSK	8	7	20.24	20.33	20.17		
3	QPSK	15	0	20.30	20.35	20.16	21	0
3	16QAM	1	0	20.48	20.40	20.23		
3	16QAM	1	8	20.64	20.55	20.47		
3	16QAM	1	14	20.39	20.44	20.31	21	0
3	16QAM	8	0	20.37	20.31	20.17		
3	16QAM	8	4	20.44	20.40	20.22		
3	16QAM	8	7	20.34	20.34	20.27	21	0
3	16QAM	15	0	20.34	20.33	20.19		
3	64QAM	1	0	20.35	20.25	20.22		
3	64QAM	1	8	20.49	20.44	20.43	21	0
3	64QAM	1	14	20.23	20.28	20.22		
3	64QAM	8	0	20.39	20.27	20.15		
3	64QAM	8	4	20.40	20.38	20.17	21	0
3	64QAM	8	7	20.28	20.31	20.25		
3	64QAM	15	0	20.32	20.29	20.14		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	20.14	20.08	19.98	21	0
1.4	QPSK	1	3	20.27	20.21	20.11		
1.4	QPSK	1	5	20.13	20.13	20.05		
1.4	QPSK	3	0	20.19	20.15	20.04		
1.4	QPSK	3	1	20.26	20.18	20.10		
1.4	QPSK	3	3	20.19	20.19	20.06		
1.4	QPSK	6	0	20.33	20.25	20.13	21	0
1.4	16QAM	1	0	20.45	20.38	20.23	21	0
1.4	16QAM	1	3	20.58	20.50	20.38		
1.4	16QAM	1	5	20.42	20.48	20.28		
1.4	16QAM	3	0	20.22	20.18	20.09		
1.4	16QAM	3	1	20.28	20.23	20.12		
1.4	16QAM	3	3	20.29	20.19	20.07		
1.4	16QAM	6	0	20.35	20.29	20.19	21	0
1.4	64QAM	1	0	20.28	20.31	20.26	21	0
1.4	64QAM	1	3	20.50	20.45	20.25		
1.4	64QAM	1	5	20.31	20.25	20.16		
1.4	64QAM	3	0	20.31	20.23	20.08		
1.4	64QAM	3	1	20.36	20.30	20.15		
1.4	64QAM	3	3	20.26	20.26	20.09		
1.4	64QAM	6	0	20.30	20.22	20.13	21	0



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	20.96	20.88	20.90	22	0
10	QPSK	1	25	20.79	20.98	20.88		
10	QPSK	1	49	20.90	20.85	20.82		
10	QPSK	25	0	21.01	21.03	20.97	22	0
10	QPSK	25	12	21.01	21.03	20.99		
10	QPSK	25	25	20.95	20.99	20.94		
10	QPSK	50	0	21.02	21.06	20.97	22	0
10	16QAM	1	0	21.23	21.17	21.20		
10	16QAM	1	25	21.02	21.04	20.94		
10	16QAM	1	49	21.12	21.06	21.04	22	0
10	16QAM	25	0	21.01	21.03	20.97		
10	16QAM	25	12	20.99	21.00	20.97		
10	16QAM	25	25	20.96	20.99	20.90	22	0
10	16QAM	50	0	20.95	20.99	20.96		
10	64QAM	1	0	21.14	21.05	21.07		
10	64QAM	1	25	20.97	20.96	20.91	22	0
10	64QAM	1	49	21.07	21.02	20.96		
10	64QAM	25	0	19.99	20.01	19.96		
10	64QAM	25	12	19.98	20.03	19.95	21	1
10	64QAM	25	25	19.93	19.96	19.90		
10	64QAM	50	0	19.95	19.99	19.95		



FCC SAR Test Report

Report No. : FA921903-02

Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	20.85	20.80	20.80	22	0
5	QPSK	1	12	20.92	20.95	20.88		
5	QPSK	1	24	20.92	20.94	20.85		
5	QPSK	12	0	20.89	20.93	20.89	22	0
5	QPSK	12	7	21.05	21.07	20.95		
5	QPSK	12	13	21.04	21.08	21.04		
5	QPSK	25	0	20.99	21.03	20.94	22	0
5	16QAM	1	0	21.01	21.00	21.06		
5	16QAM	1	12	21.16	21.18	21.16		
5	16QAM	1	24	21.12	21.11	21.15	22	0
5	16QAM	12	0	20.89	20.91	20.85		
5	16QAM	12	7	21.03	21.06	20.94		
5	16QAM	12	13	21.06	21.08	21.03	22	0
5	16QAM	25	0	21.01	21.00	20.93		
5	64QAM	1	0	20.93	20.99	20.94		
5	64QAM	1	12	21.10	21.09	21.09	22	0
5	64QAM	1	24	21.04	21.03	21.06		
5	64QAM	12	0	19.86	19.90	19.83		
5	64QAM	12	7	20.01	20.06	19.93	21	1
5	64QAM	12	13	20.05	20.07	20.02		
5	64QAM	25	0	20.01	20.00	19.93		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	20.77	20.79	20.75	22	0
3	QPSK	1	8	20.98	21.01	21.01		
3	QPSK	1	14	20.98	20.97	20.85		
3	QPSK	8	0	20.88	20.95	20.88	22	0
3	QPSK	8	4	21.04	21.04	21.01		
3	QPSK	8	7	21.00	21.05	20.98		
3	QPSK	15	0	21.00	21.07	20.99	22	0
3	16QAM	1	0	20.99	21.04	21.04		
3	16QAM	1	8	21.19	21.22	21.20		
3	16QAM	1	14	21.10	21.23	21.13	22	0
3	16QAM	8	0	20.95	20.99	20.88		
3	16QAM	8	4	21.13	21.09	21.06		
3	16QAM	8	7	21.10	21.12	20.98	22	0
3	16QAM	15	0	21.04	21.03	20.98		
3	64QAM	1	0	20.97	20.96	20.93		
3	64QAM	1	8	21.16	21.21	21.15	22	0
3	64QAM	1	14	21.15	21.09	21.08		
3	64QAM	8	0	19.92	19.93	19.89		
3	64QAM	8	4	20.02	20.04	20.00	21	1
3	64QAM	8	7	20.06	20.06	19.95		
3	64QAM	15	0	20.01	19.99	19.95		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	20.75	20.76	20.73	22	0
1.4	QPSK	1	3	20.92	20.91	20.88		
1.4	QPSK	1	5	20.85	20.89	20.78		
1.4	QPSK	3	0	20.82	20.81	20.75		
1.4	QPSK	3	1	20.87	20.88	20.83		
1.4	QPSK	3	3	20.89	20.86	20.85		
1.4	QPSK	6	0	20.94	20.98	20.89	22	0
1.4	16QAM	1	0	20.94	20.93	20.96	22	0
1.4	16QAM	1	3	21.08	21.19	21.11		
1.4	16QAM	1	5	21.04	21.09	21.04		
1.4	16QAM	3	0	20.78	20.85	20.80		
1.4	16QAM	3	1	20.88	20.92	20.84		
1.4	16QAM	3	3	20.88	20.89	20.86		
1.4	16QAM	6	0	20.96	20.99	20.93	22	0
1.4	64QAM	1	0	20.98	20.91	20.84	22	0
1.4	64QAM	1	3	21.12	21.14	21.11		
1.4	64QAM	1	5	20.95	21.01	20.92		
1.4	64QAM	3	0	20.90	20.89	20.88		
1.4	64QAM	3	1	20.88	20.92	20.95		
1.4	64QAM	3	3	20.92	20.94	20.92		
1.4	64QAM	6	0	19.90	19.93	19.86	21	1



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	17.48	17.43	17.56	18.5	0
20	QPSK	1	49	17.45	17.51	17.49		
20	QPSK	1	99	17.55	17.62	17.51		
20	QPSK	50	0	17.54	17.62	17.68	18.5	0
20	QPSK	50	24	17.61	17.73	17.68		
20	QPSK	50	50	17.61	17.73	17.61		
20	QPSK	100	0	17.57	17.65	17.62	18.5	0
20	16QAM	1	0	17.66	17.67	17.78		
20	16QAM	1	49	17.64	17.71	17.77		
20	16QAM	1	99	17.80	17.75	17.70	18.5	0
20	16QAM	50	0	17.48	17.58	17.64		
20	16QAM	50	24	17.54	17.66	17.63		
20	16QAM	50	50	17.54	17.69	17.57	18.5	0
20	16QAM	100	0	17.51	17.59	17.56		
20	64QAM	1	0	17.58	17.59	17.73		
20	64QAM	1	49	17.56	17.65	17.65	18.5	0
20	64QAM	1	99	17.74	17.66	17.64		
20	64QAM	50	0	17.50	17.56	17.65		
20	64QAM	50	24	17.54	17.67	17.60	18.5	0
20	64QAM	50	50	17.61	17.67	17.55		
20	64QAM	100	0	17.52	17.59	17.59		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.44	17.43	17.54	18.5	0
15	QPSK	1	37	17.33	17.47	17.47		
15	QPSK	1	74	17.41	17.60	17.51		
15	QPSK	36	0	17.44	17.60	17.66	18.5	0
15	QPSK	36	20	17.52	17.69	17.65		
15	QPSK	36	39	17.50	17.68	17.58		
15	QPSK	75	0	17.48	17.66	17.67	18.5	0
15	16QAM	1	0	17.71	17.66	17.89		
15	16QAM	1	37	17.69	17.66	17.74		
15	16QAM	1	74	17.71	17.73	17.72	18.5	0
15	16QAM	36	0	17.44	17.58	17.65		
15	16QAM	36	20	17.52	17.60	17.63		
15	16QAM	36	39	17.52	17.62	17.56	18.5	0
15	16QAM	75	0	17.50	17.59	17.61		
15	64QAM	1	0	17.55	17.54	17.76		
15	64QAM	1	37	17.59	17.63	17.71	18.5	0
15	64QAM	1	74	17.61	17.69	17.71		
15	64QAM	36	0	17.43	17.56	17.63		
15	64QAM	36	20	17.51	17.62	17.65	18.5	0
15	64QAM	36	39	17.53	17.59	17.55		
15	64QAM	75	0	17.47	17.61	17.62		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.30	17.38	17.31	18.5	0
10	QPSK	1	25	17.13	17.28	17.36		
10	QPSK	1	49	17.28	17.50	17.37		
10	QPSK	25	0	17.37	17.52	17.44	18.5	0
10	QPSK	25	12	17.37	17.57	17.46		
10	QPSK	25	25	17.33	17.56	17.44		
10	QPSK	50	0	17.35	17.56	17.48	18.5	0
10	16QAM	1	0	17.55	17.55	17.65		
10	16QAM	1	25	17.38	17.51	17.45		
10	16QAM	1	49	17.54	17.67	17.57	18.5	0
10	16QAM	25	0	17.34	17.44	17.45		
10	16QAM	25	12	17.31	17.53	17.44		
10	16QAM	25	25	17.31	17.50	17.40	18.5	0
10	16QAM	50	0	17.32	17.45	17.43		
10	64QAM	1	0	17.42	17.45	17.53		
10	64QAM	1	25	17.25	17.54	17.36	18.5	0
10	64QAM	1	49	17.40	17.57	17.58		
10	64QAM	25	0	17.34	17.47	17.45		
10	64QAM	25	12	17.31	17.51	17.44	18.5	0
10	64QAM	25	25	17.30	17.52	17.42		
10	64QAM	50	0	17.31	17.46	17.43		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	17.33	17.42	17.34	18.5	0
5	QPSK	1	12	17.34	17.48	17.42		
5	QPSK	1	24	17.32	17.45	17.43		
5	QPSK	12	0	17.46	17.51	17.40	18.5	0
5	QPSK	12	7	17.49	17.63	17.55		
5	QPSK	12	13	17.44	17.57	17.54		
5	QPSK	25	0	17.48	17.62	17.47	18.5	0
5	16QAM	1	0	17.53	17.66	17.52		
5	16QAM	1	12	17.59	17.71	17.64		
5	16QAM	1	24	17.51	17.68	17.65	18.5	0
5	16QAM	12	0	17.39	17.52	17.40		
5	16QAM	12	7	17.49	17.58	17.53		
5	16QAM	12	13	17.38	17.53	17.52	18.5	0
5	16QAM	25	0	17.42	17.55	17.46		
5	64QAM	1	0	17.51	17.59	17.49		
5	64QAM	1	12	17.53	17.68	17.60	18.5	0
5	64QAM	1	24	17.40	17.58	17.63		
5	64QAM	12	0	17.37	17.45	17.39		
5	64QAM	12	7	17.47	17.56	17.51	18.5	0
5	64QAM	12	13	17.36	17.51	17.50		
5	64QAM	25	0	17.42	17.57	17.42		



<WWAN Bottom Antenna --Reduced Power for Hotspot On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	17.11	17.23	17.09	18.5	0
20	QPSK	1	49	16.97	17.02	17.03		
20	QPSK	1	99	17.00	16.97	16.97		
20	QPSK	50	0	17.11	17.23	17.22	18.5	0
20	QPSK	50	24	17.13	17.19	17.22		
20	QPSK	50	50	17.18	17.25	17.20		
20	QPSK	100	0	17.17	17.26	17.19		
20	16QAM	1	0	17.33	17.31	17.33	18.5	0
20	16QAM	1	49	17.24	17.28	17.34		
20	16QAM	1	99	17.22	17.19	17.28		
20	16QAM	50	0	17.08	17.21	17.22	18.5	0
20	16QAM	50	24	17.11	17.22	17.25		
20	16QAM	50	50	17.20	17.22	17.21		
20	16QAM	100	0	17.13	17.22	17.20		
20	64QAM	1	0	17.25	17.28	17.24	18.5	0
20	64QAM	1	49	17.16	17.19	17.22		
20	64QAM	1	99	17.11	17.14	17.16		
20	64QAM	50	0	17.18	17.21	17.21	18.5	0
20	64QAM	50	24	17.17	17.20	17.21		
20	64QAM	50	50	17.20	17.23	17.20		
20	64QAM	100	0	17.15	17.18	17.21		



FCC SAR Test Report

Report No. : FA921903-02

Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	17.13	17.13	17.23	18.5	0
15	QPSK	1	37	17.05	17.09	17.07		
15	QPSK	1	74	17.16	17.16	17.06		
15	QPSK	36	0	17.18	17.24	17.24	18.5	0
15	QPSK	36	20	17.23	17.26	17.24		
15	QPSK	36	39	17.27	17.28	17.21		
15	QPSK	75	0	17.24	17.25	17.24	18.5	0
15	16QAM	1	0	17.42	17.46	17.47		
15	16QAM	1	37	17.37	17.33	17.33		
15	16QAM	1	74	17.46	17.35	17.36	18.5	0
15	16QAM	36	0	17.16	17.24	17.23		
15	16QAM	36	20	17.22	17.25	17.26		
15	16QAM	36	39	17.25	17.23	17.21	18.5	0
15	16QAM	75	0	17.22	17.23	17.24		
15	64QAM	1	0	17.35	17.35	17.33		
15	64QAM	1	37	17.20	17.23	17.25	18.5	0
15	64QAM	1	74	17.33	17.29	17.22		
15	64QAM	36	0	17.16	17.24	17.25		
15	64QAM	36	20	17.24	17.23	17.25	18.5	0
15	64QAM	36	39	17.23	17.25	17.21		
15	64QAM	75	0	17.23	17.24	17.23		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	17.01	17.05	17.11	18.5	0
10	QPSK	1	25	17.09	16.95	16.92		
10	QPSK	1	49	16.95	17.02	17.01		
10	QPSK	25	0	17.14	17.15	17.12	18.5	0
10	QPSK	25	12	17.21	17.18	17.14		
10	QPSK	25	25	17.14	17.13	17.09		
10	QPSK	50	0	17.18	17.13	17.14	18.5	0
10	16QAM	1	0	17.27	17.30	17.40		
10	16QAM	1	25	17.35	17.23	17.18		
10	16QAM	1	49	17.24	17.21	17.25	18.5	0
10	16QAM	25	0	17.15	17.18	17.15		
10	16QAM	25	12	17.17	17.18	17.17		
10	16QAM	25	25	17.08	17.09	17.10	18.5	0
10	16QAM	50	0	17.14	17.14	17.13		
10	64QAM	1	0	17.24	17.25	17.26		
10	64QAM	1	25	17.11	17.12	17.12	18.5	0
10	64QAM	1	49	17.19	17.24	17.17		
10	64QAM	25	0	17.17	17.14	17.15		
10	64QAM	25	12	17.18	17.15	17.16	18.5	0
10	64QAM	25	25	17.13	17.10	17.09		
10	64QAM	50	0	17.14	17.11	17.11		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	17.11	17.00	16.98	18.5	0
5	QPSK	1	12	17.10	17.06	17.00		
5	QPSK	1	24	17.01	17.12	17.01		
5	QPSK	12	0	17.22	17.11	17.14	18.5	0
5	QPSK	12	7	17.22	17.21	17.16		
5	QPSK	12	13	17.22	17.20	17.16		
5	QPSK	25	0	17.22	17.16	17.11	18.5	0
5	16QAM	1	0	17.24	17.20	17.29		
5	16QAM	1	12	17.35	17.32	17.32		
5	16QAM	1	24	17.24	17.33	17.22	18.5	0
5	16QAM	12	0	17.21	17.12	17.16		
5	16QAM	12	7	17.23	17.21	17.19		
5	16QAM	12	13	17.21	17.21	17.19	18.5	0
5	16QAM	25	0	17.20	17.16	17.13		
5	64QAM	1	0	17.24	17.09	17.23		
5	64QAM	1	12	17.27	17.23	17.17	18.5	0
5	64QAM	1	24	17.22	17.22	17.18		
5	64QAM	12	0	17.13	17.06	17.13		
5	64QAM	12	7	17.22	17.19	17.17	18.5	0
5	64QAM	12	13	17.20	17.20	17.17		
5	64QAM	25	0	17.16	17.16	17.11		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	17.03	16.89	16.89	18.5	0
3	QPSK	1	8	17.15	17.05	17.02		
3	QPSK	1	14	16.98	17.04	16.99		
3	QPSK	8	0	17.11	16.99	17.03	18.5	0
3	QPSK	8	4	17.20	17.11	17.11		
3	QPSK	8	7	17.16	17.13	17.04		
3	QPSK	15	0	17.19	17.15	17.14	18.5	0
3	16QAM	1	0	17.22	17.13	17.22		
3	16QAM	1	8	17.32	17.35	17.22		
3	16QAM	1	14	17.27	17.19	17.24	18.5	0
3	16QAM	8	0	17.14	17.01	17.06		
3	16QAM	8	4	17.20	17.20	17.15		
3	16QAM	8	7	17.20	17.16	17.16	18.5	0
3	16QAM	15	0	17.15	17.10	17.08		
3	64QAM	1	0	17.24	17.02	17.17		
3	64QAM	1	8	17.29	17.27	17.26	18.5	0
3	64QAM	1	14	17.18	17.22	17.16		
3	64QAM	8	0	17.13	17.01	16.99		
3	64QAM	8	4	17.19	17.13	17.10	18.5	0
3	64QAM	8	7	17.21	17.09	17.15		
3	64QAM	15	0	17.17	17.12	17.04		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	17.01	16.93	16.92	18.5	0
1.4	QPSK	1	3	17.16	17.09	17.01		
1.4	QPSK	1	5	17.09	17.05	16.94		
1.4	QPSK	3	0	17.08	17.02	16.92		
1.4	QPSK	3	1	17.12	17.06	16.98		
1.4	QPSK	3	3	17.10	17.04	16.94		
1.4	QPSK	6	0	17.20	17.10	17.03	18.5	0
1.4	16QAM	1	0	17.27	17.12	17.17	18.5	0
1.4	16QAM	1	3	17.42	17.31	17.28		
1.4	16QAM	1	5	17.26	17.24	17.21		
1.4	16QAM	3	0	17.11	17.00	17.02		
1.4	16QAM	3	1	17.15	17.06	17.08		
1.4	16QAM	3	3	17.04	17.04	16.98		
1.4	16QAM	6	0	17.22	17.15	17.08	18.5	0
1.4	64QAM	1	0	17.07	17.10	17.14	18.5	0
1.4	64QAM	1	3	17.26	17.24	17.22		
1.4	64QAM	1	5	17.23	17.07	17.12		
1.4	64QAM	3	0	17.12	17.03	17.02		
1.4	64QAM	3	1	17.21	17.07	17.11		
1.4	64QAM	3	3	17.16	17.12	17.03		
1.4	64QAM	6	0	17.14	17.10	17.02	18.5	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	20.44	20.58	20.36	21.5	0
20	QPSK	1	49	20.30	20.29	20.23		
20	QPSK	1	99	20.31	20.29	20.21		
20	QPSK	50	0	20.47	20.49	20.40	21.5	0
20	QPSK	50	24	20.50	20.52	20.42		
20	QPSK	50	50	20.46	20.45	20.39		
20	QPSK	100	0	20.47	20.48	20.37	21.5	0
20	16QAM	1	0	20.37	20.48	20.35		
20	16QAM	1	49	20.24	20.32	20.22		
20	16QAM	1	99	20.32	20.26	20.20	21.5	0
20	16QAM	50	0	20.15	20.19	20.12		
20	16QAM	50	24	20.15	20.16	20.09		
20	16QAM	50	50	20.12	20.15	20.03	21.5	0
20	16QAM	100	0	20.13	20.10	20.11		
20	64QAM	1	0	20.29	20.33	20.27		
20	64QAM	1	49	20.26	20.22	20.13	21.5	0
20	64QAM	1	99	20.26	20.17	20.11		
20	64QAM	50	0	20.12	20.16	20.11	21	0.5
20	64QAM	50	24	20.16	20.14	20.06		
20	64QAM	50	50	20.14	20.14	20.04		
20	64QAM	100	0	20.14	20.12	20.11		



FCC SAR Test Report

Report No. : FA921903-02

Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.17	20.21	20.24	21.5	0
15	QPSK	1	37	20.15	20.17	20.12		
15	QPSK	1	74	20.21	20.16	20.16		
15	QPSK	36	0	20.30	20.31	20.30	21.5	0
15	QPSK	36	20	20.32	20.34	20.32		
15	QPSK	36	39	20.26	20.31	20.25		
15	QPSK	75	0	20.30	20.33	20.28	21.5	0
15	16QAM	1	0	20.46	20.58	20.49		
15	16QAM	1	37	20.48	20.53	20.41		
15	16QAM	1	74	20.52	20.57	20.48	21.5	0
15	16QAM	36	0	20.27	20.34	20.29		
15	16QAM	36	20	20.30	20.38	20.28		
15	16QAM	36	39	20.29	20.31	20.26	21.5	0
15	16QAM	75	0	20.27	20.36	20.28		
15	64QAM	1	0	20.49	20.43	20.38		
15	64QAM	1	37	20.36	20.42	20.37	21.5	0
15	64QAM	1	74	20.39	20.42	20.30		
15	64QAM	36	0	20.28	20.34	20.28		
15	64QAM	36	20	20.32	20.38	20.24	21	0.5
15	64QAM	36	39	20.29	20.31	20.26		
15	64QAM	75	0	20.32	20.37	20.28		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.99	20.09	19.96	21.5	0
10	QPSK	1	25	20.05	19.95	20.03		
10	QPSK	1	49	19.96	20.04	19.90		
10	QPSK	25	0	20.17	20.19	20.12	21.5	0
10	QPSK	25	12	20.18	20.22	20.12		
10	QPSK	25	25	20.10	20.12	20.03		
10	QPSK	50	0	20.17	20.17	20.10	21.5	0
10	16QAM	1	0	20.44	20.37	20.29		
10	16QAM	1	25	20.28	20.30	20.26		
10	16QAM	1	49	20.36	20.36	20.16	21.5	0
10	16QAM	25	0	20.19	20.19	20.11		
10	16QAM	25	12	20.19	20.20	20.10		
10	16QAM	25	25	20.10	20.12	20.01	21.5	0
10	16QAM	50	0	20.12	20.17	20.07		
10	64QAM	1	0	20.23	20.37	20.27		
10	64QAM	1	25	20.25	20.16	20.08	21.5	0
10	64QAM	1	49	20.16	20.23	20.21		
10	64QAM	25	0	20.19	20.19	20.11		
10	64QAM	25	12	20.17	20.19	20.10	21	0.5
10	64QAM	25	25	20.11	20.16	20.03		
10	64QAM	50	0	20.14	20.11	20.09		



FCC SAR Test Report

Report No. : FA921903-02

Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.13	20.00	19.95	21.5	0
5	QPSK	1	12	20.06	20.14	20.04		
5	QPSK	1	24	20.01	20.01	19.91		
5	QPSK	12	0	20.19	20.17	20.03	21.5	0
5	QPSK	12	7	20.22	20.23	20.17		
5	QPSK	12	13	20.18	20.22	20.10		
5	QPSK	25	0	20.20	20.20	20.10	21.5	0
5	16QAM	1	0	20.40	20.31	20.24		
5	16QAM	1	12	20.39	20.43	20.35		
5	16QAM	1	24	20.31	20.30	20.17	21.5	0
5	16QAM	12	0	20.24	20.21	20.09		
5	16QAM	12	7	20.26	20.22	20.13		
5	16QAM	12	13	20.19	20.19	20.11	21.5	0
5	16QAM	25	0	20.19	20.15	20.07		
5	64QAM	1	0	20.31	20.25	20.23		
5	64QAM	1	12	20.28	20.34	20.24	21.5	0
5	64QAM	1	24	20.18	20.18	20.11		
5	64QAM	12	0	20.20	20.21	20.05		
5	64QAM	12	7	20.23	20.22	20.13	21	0.5
5	64QAM	12	13	20.14	20.18	20.09		
5	64QAM	25	0	20.18	20.15	20.06		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.08	20.00	19.93	21.5	0
3	QPSK	1	8	20.23	20.20	20.12		
3	QPSK	1	14	19.97	20.03	19.94		
3	QPSK	8	0	20.16	20.17	20.04	21.5	0
3	QPSK	8	4	20.25	20.25	20.09		
3	QPSK	8	7	20.15	20.21	20.12		
3	QPSK	15	0	20.17	20.21	20.06	21.5	0
3	16QAM	1	0	20.39	20.23	20.18		
3	16QAM	1	8	20.47	20.47	20.45		
3	16QAM	1	14	20.23	20.38	20.19	21.5	0
3	16QAM	8	0	20.26	20.22	20.10		
3	16QAM	8	4	20.35	20.30	20.14		
3	16QAM	8	7	20.22	20.26	20.21	21.5	0
3	16QAM	15	0	20.24	20.21	20.00		
3	64QAM	1	0	20.36	20.22	20.08		
3	64QAM	1	8	20.36	20.41	20.27	21.5	0
3	64QAM	1	14	20.20	20.26	20.16		
3	64QAM	8	0	20.19	20.18	20.06		
3	64QAM	8	4	20.29	20.24	20.14	21	0.5
3	64QAM	8	7	20.20	20.17	20.14		
3	64QAM	15	0	20.23	20.19	20.04		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	20.00	19.95	19.93	21.5	0
1.4	QPSK	1	3	20.13	20.11	20.04		
1.4	QPSK	1	5	19.95	20.00	19.99		
1.4	QPSK	3	0	20.02	20.08	19.95		
1.4	QPSK	3	1	20.10	20.12	20.00		
1.4	QPSK	3	3	20.07	20.04	19.96		
1.4	QPSK	6	0	20.13	20.14	20.07	21.5	0
1.4	16QAM	1	0	20.29	20.28	20.21	21.5	0
1.4	16QAM	1	3	20.47	20.42	20.41		
1.4	16QAM	1	5	20.28	20.26	20.28		
1.4	16QAM	3	0	20.15	20.11	20.06		
1.4	16QAM	3	1	20.21	20.14	20.08		
1.4	16QAM	3	3	20.18	20.12	20.05		
1.4	16QAM	6	0	20.22	20.17	20.17	21.5	0
1.4	64QAM	1	0	20.29	20.24	20.07	21.5	0
1.4	64QAM	1	3	20.40	20.32	20.25		
1.4	64QAM	1	5	20.21	20.28	20.10		
1.4	64QAM	3	0	20.15	20.17	20.07		
1.4	64QAM	3	1	20.30	20.25	20.11		
1.4	64QAM	3	3	20.23	20.15	20.07		
1.4	64QAM	6	0	20.17	20.12	20.06	21	0.5



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	19.06	18.91	19.12	20	0
20	QPSK	1	49	18.95	19.07	19.04		
20	QPSK	1	99	19.09	19.15	19.10		
20	QPSK	50	0	18.81	18.85	18.95	20	0
20	QPSK	50	24	18.86	18.94	18.95		
20	QPSK	50	50	18.86	18.99	18.87		
20	QPSK	100	0	18.80	18.90	18.89		
20	16QAM	1	0	18.99	18.89	19.12	20	0
20	16QAM	1	49	18.92	19.00	19.03		
20	16QAM	1	99	19.06	19.07	19.11		
20	16QAM	50	0	18.80	18.85	18.98	20	0
20	16QAM	50	24	18.85	18.95	18.94		
20	16QAM	50	50	18.90	18.99	18.88		
20	16QAM	100	0	18.84	18.88	18.90		
20	64QAM	1	0	18.90	18.80	19.02	20	0
20	64QAM	1	49	18.91	18.97	18.93		
20	64QAM	1	99	19.00	19.00	19.01		
20	64QAM	50	0	18.78	18.84	18.96	20	0
20	64QAM	50	24	18.84	18.94	18.93		
20	64QAM	50	50	18.85	18.98	18.86		
20	64QAM	100	0	18.85	18.87	18.92		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	18.77	18.68	18.79	20	0
15	QPSK	1	37	18.67	18.74	18.76		
15	QPSK	1	74	18.72	18.86	18.83		
15	QPSK	36	0	18.81	18.86	18.94	20	0
15	QPSK	36	20	18.82	18.98	18.95		
15	QPSK	36	39	18.85	18.96	18.91		
15	QPSK	75	0	18.80	18.92	18.94	20	0
15	16QAM	1	0	19.11	18.97	19.06		
15	16QAM	1	37	18.98	19.06	19.06		
15	16QAM	1	74	19.03	19.06	19.13	20	0
15	16QAM	36	0	18.79	18.88	18.96		
15	16QAM	36	20	18.82	18.95	18.95		
15	16QAM	36	39	18.83	18.95	18.88	20	0
15	16QAM	75	0	18.81	18.90	18.93		
15	64QAM	1	0	18.97	18.93	18.98		
15	64QAM	1	37	18.87	18.95	19.05	20	0
15	64QAM	1	74	18.95	19.07	18.97		
15	64QAM	36	0	18.82	18.89	18.95		
15	64QAM	36	20	18.85	18.96	18.98	20	0
15	64QAM	36	39	18.85	18.95	18.90		
15	64QAM	75	0	18.82	18.90	18.93		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	18.54	18.61	18.62	20	0
10	QPSK	1	25	18.61	18.61	18.68		
10	QPSK	1	49	18.54	18.80	18.68		
10	QPSK	25	0	18.66	18.75	18.76	20	0
10	QPSK	25	12	18.68	18.83	18.78		
10	QPSK	25	25	18.64	18.83	18.78		
10	QPSK	50	0	18.63	18.79	18.80	20	0
10	16QAM	1	0	18.78	18.86	18.93		
10	16QAM	1	25	18.94	18.79	18.81		
10	16QAM	1	49	18.83	19.01	19.02	20	0
10	16QAM	25	0	18.71	18.76	18.79		
10	16QAM	25	12	18.72	18.83	18.81		
10	16QAM	25	25	18.65	18.83	18.77	20	0
10	16QAM	50	0	18.68	18.80	18.78		
10	64QAM	1	0	18.84	18.83	18.90		
10	64QAM	1	25	18.59	18.85	18.81	20	0
10	64QAM	1	49	18.77	19.06	18.95		
10	64QAM	25	0	18.67	18.76	18.78		
10	64QAM	25	12	18.65	18.81	18.79	20	0
10	64QAM	25	25	18.67	18.83	18.76		
10	64QAM	50	0	18.66	18.81	18.76		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	18.64	18.71	18.62	20	0
5	QPSK	1	12	18.68	18.79	18.77		
5	QPSK	1	24	18.56	18.77	18.77		
5	QPSK	12	0	18.76	18.79	18.71	20	0
5	QPSK	12	7	18.79	18.91	18.89		
5	QPSK	12	13	18.77	18.83	18.84		
5	QPSK	25	0	18.76	18.85	18.76	20	0
5	16QAM	1	0	18.90	18.89	18.91		
5	16QAM	1	12	19.01	18.98	19.02		
5	16QAM	1	24	18.83	19.04	18.98	20	0
5	16QAM	12	0	18.81	18.78	18.79		
5	16QAM	12	7	18.86	18.92	18.89		
5	16QAM	12	13	18.79	18.85	18.91	20	0
5	16QAM	25	0	18.80	18.89	18.78		
5	64QAM	1	0	18.85	18.87	18.84		
5	64QAM	1	12	18.91	19.00	18.86	20	0
5	64QAM	1	24	18.84	18.91	18.94		
5	64QAM	12	0	18.79	18.82	18.74		
5	64QAM	12	7	18.86	18.86	18.87	20	0
5	64QAM	12	13	18.76	18.85	18.90		
5	64QAM	25	0	18.76	18.87	18.77		



<WWAN Bottom Antenna --Reduced Power for Handheld>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.58	21.73	21.52	23	0
20	QPSK	1	49	21.47	21.50	21.46		
20	QPSK	1	99	21.47	21.55	21.42		
20	QPSK	50	0	21.60	21.70	21.69	23	0
20	QPSK	50	24	21.61	21.71	21.67		
20	QPSK	50	50	21.71	21.78	21.66		
20	QPSK	100	0	21.64	21.70	21.67		
20	16QAM	1	0	21.70	21.66	21.69	23	0
20	16QAM	1	49	21.78	21.74	21.71		
20	16QAM	1	99	21.77	21.77	21.67		
20	16QAM	50	0	20.57	20.72	20.68	22	1
20	16QAM	50	24	20.66	20.71	20.66		
20	16QAM	50	50	20.69	20.75	20.70		
20	16QAM	100	0	20.64	20.70	20.66		
20	64QAM	1	0	21.77	21.82	21.73	22	1
20	64QAM	1	49	21.68	21.71	21.70		
20	64QAM	1	99	21.70	21.70	21.65		
20	64QAM	50	0	20.61	20.70	20.66	21	2
20	64QAM	50	24	20.63	20.69	20.65		
20	64QAM	50	50	20.69	20.72	20.67		
20	64QAM	100	0	20.66	20.68	20.67		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	21.52	21.59	21.60	23	0
15	QPSK	1	37	21.49	21.52	21.47		
15	QPSK	1	74	21.59	21.58	21.44		
15	QPSK	36	0	21.60	21.67	21.63	23	0
15	QPSK	36	20	21.66	21.69	21.65		
15	QPSK	36	39	21.69	21.71	21.65		
15	QPSK	75	0	21.65	21.69	21.63	23	0
15	16QAM	1	0	21.81	21.81	21.95		
15	16QAM	1	37	21.82	21.75	21.82		
15	16QAM	1	74	21.88	21.83	21.81	22	1
15	16QAM	36	0	20.61	20.70	20.66		
15	16QAM	36	20	20.66	20.70	20.70		
15	16QAM	36	39	20.68	20.70	20.65	22	1
15	16QAM	75	0	20.64	20.70	20.68		
15	64QAM	1	0	21.76	21.76	21.84		
15	64QAM	1	37	21.70	21.69	21.84	22	1
15	64QAM	1	74	21.76	21.76	21.65		
15	64QAM	36	0	20.57	20.69	20.65		
15	64QAM	36	20	20.66	20.70	20.70	21	2
15	64QAM	36	39	20.67	20.67	20.66		
15	64QAM	75	0	20.64	20.68	20.69		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	21.38	21.49	21.50	23	0
10	QPSK	1	25	21.53	21.40	21.34		
10	QPSK	1	49	21.38	21.54	21.41		
10	QPSK	25	0	21.60	21.58	21.56	23	0
10	QPSK	25	12	21.63	21.59	21.57		
10	QPSK	25	25	21.53	21.54	21.47		
10	QPSK	50	0	21.58	21.59	21.51	23	0
10	16QAM	1	0	21.73	21.77	21.85		
10	16QAM	1	25	21.63	21.74	21.64		
10	16QAM	1	49	21.75	21.83	21.69	22	1
10	16QAM	25	0	20.60	20.61	20.59		
10	16QAM	25	12	20.61	20.62	20.58		
10	16QAM	25	25	20.55	20.55	20.53	22	1
10	16QAM	50	0	20.55	20.58	20.54		
10	64QAM	1	0	21.65	21.69	21.76		
10	64QAM	1	25	21.64	21.58	21.54	22	1
10	64QAM	1	49	21.64	21.72	21.63		
10	64QAM	25	0	20.58	20.59	20.55		
10	64QAM	25	12	20.60	20.60	20.56	21	2
10	64QAM	25	25	20.55	20.51	20.49		
10	64QAM	50	0	20.56	20.55	20.55		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.50	21.38	21.39	23	0
5	QPSK	1	12	21.52	21.52	21.42		
5	QPSK	1	24	21.36	21.48	21.40		
5	QPSK	12	0	21.56	21.55	21.51	23	0
5	QPSK	12	7	21.64	21.62	21.57		
5	QPSK	12	13	21.62	21.65	21.55		
5	QPSK	25	0	21.58	21.62	21.53	23	0
5	16QAM	1	0	21.80	21.65	21.71		
5	16QAM	1	12	21.81	21.84	21.70		
5	16QAM	1	24	21.71	21.75	21.74	22	1
5	16QAM	12	0	20.62	20.51	20.51		
5	16QAM	12	7	20.62	20.65	20.61		
5	16QAM	12	13	20.60	20.60	20.59	22	1
5	16QAM	25	0	20.62	20.58	20.54		
5	64QAM	1	0	21.72	21.64	21.60		
5	64QAM	1	12	21.72	21.62	21.65	22	1
5	64QAM	1	24	21.58	21.69	21.58		
5	64QAM	12	0	20.62	20.49	20.49		
5	64QAM	12	7	20.59	20.65	20.59	21	2
5	64QAM	12	13	20.59	20.61	20.55		
5	64QAM	25	0	20.63	20.58	20.55		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.46	21.36	21.33	23	0
3	QPSK	1	8	21.54	21.53	21.41		
3	QPSK	1	14	21.46	21.50	21.42		
3	QPSK	8	0	21.55	21.43	21.46	23	0
3	QPSK	8	4	21.59	21.61	21.51		
3	QPSK	8	7	21.62	21.53	21.48		
3	QPSK	15	0	21.61	21.60	21.50	23	0
3	16QAM	1	0	21.76	21.55	21.58		
3	16QAM	1	8	21.82	21.79	21.73		
3	16QAM	1	14	21.65	21.68	21.61	22	1
3	16QAM	8	0	20.62	20.50	20.50		
3	16QAM	8	4	20.70	20.62	20.60		
3	16QAM	8	7	20.64	20.60	20.56	22	1
3	16QAM	15	0	20.60	20.55	20.52		
3	64QAM	1	0	21.70	21.57	21.51		
3	64QAM	1	8	21.79	21.74	21.71	22	1
3	64QAM	1	14	21.61	21.69	21.63		
3	64QAM	8	0	20.55	20.45	20.44		
3	64QAM	8	4	20.60	20.61	20.53	21	2
3	64QAM	8	7	20.60	20.57	20.52		
3	64QAM	15	0	20.59	20.54	20.49		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.40	21.28	21.27	23	0
1.4	QPSK	1	3	21.53	21.48	21.36		
1.4	QPSK	1	5	21.44	21.41	21.25		
1.4	QPSK	3	0	21.42	21.37	21.30		
1.4	QPSK	3	1	21.49	21.44	21.37		
1.4	QPSK	3	3	21.44	21.42	21.32		
1.4	QPSK	6	0	21.51	21.47	21.39	23	0
1.4	16QAM	1	0	21.64	21.56	21.58	23	0
1.4	16QAM	1	3	21.80	21.72	21.73		
1.4	16QAM	1	5	21.71	21.69	21.57		
1.4	16QAM	3	0	21.53	21.43	21.37		
1.4	16QAM	3	1	21.57	21.46	21.42		
1.4	16QAM	3	3	21.46	21.47	21.36		
1.4	16QAM	6	0	20.60	20.55	20.48	22	1
1.4	64QAM	1	0	21.64	21.54	21.49	22	1
1.4	64QAM	1	3	21.65	21.58	21.56		
1.4	64QAM	1	5	21.53	21.60	21.45		
1.4	64QAM	3	0	21.49	21.46	21.38		
1.4	64QAM	3	1	21.53	21.56	21.44		
1.4	64QAM	3	3	21.50	21.48	21.40		
1.4	64QAM	6	0	20.53	20.48	20.39	21	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	21.64	21.76	21.63	23	0
20	QPSK	1	49	21.59	21.59	21.52		
20	QPSK	1	99	21.56	21.52	21.47		
20	QPSK	50	0	21.72	21.73	21.69	23	0
20	QPSK	50	24	21.74	21.76	21.69		
20	QPSK	50	50	21.71	21.69	21.65		
20	QPSK	100	0	21.71	21.72	21.63		
20	16QAM	1	0	21.73	21.67	21.64	23	0
20	16QAM	1	49	21.59	21.60	21.53		
20	16QAM	1	99	21.60	21.54	21.48		
20	16QAM	50	0	20.76	20.74	20.68	22	1
20	16QAM	50	24	20.76	20.76	20.66		
20	16QAM	50	50	20.72	20.71	20.66		
20	16QAM	100	0	20.72	20.76	20.66		
20	64QAM	1	0	21.86	21.90	21.84	22	1
20	64QAM	1	49	21.80	21.81	21.76		
20	64QAM	1	99	21.75	21.74	21.72		
20	64QAM	50	0	20.74	20.74	20.67	21	2
20	64QAM	50	24	20.74	20.75	20.61		
20	64QAM	50	50	20.72	20.71	20.59		
20	64QAM	100	0	20.72	20.75	20.66		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	21.63	21.63	21.53	23	0
15	QPSK	1	37	21.55	21.54	21.52		
15	QPSK	1	74	21.58	21.60	21.53		
15	QPSK	36	0	21.69	21.70	21.66	23	0
15	QPSK	36	20	21.74	21.75	21.67		
15	QPSK	36	39	21.69	21.70	21.62		
15	QPSK	75	0	21.73	21.71	21.64	23	0
15	16QAM	1	0	21.75	21.78	21.81		
15	16QAM	1	37	21.86	21.89	21.76		
15	16QAM	1	74	21.81	21.82	21.78	22	1
15	16QAM	36	0	20.71	20.74	20.66		
15	16QAM	36	20	20.74	20.75	20.70		
15	16QAM	36	39	20.71	20.72	20.62	22	1
15	16QAM	75	0	20.71	20.71	20.64		
15	64QAM	1	0	21.82	21.92	21.76		
15	64QAM	1	37	21.82	21.86	21.69	22	1
15	64QAM	1	74	21.77	21.87	21.70		
15	64QAM	36	0	20.70	20.76	20.65		
15	64QAM	36	20	20.74	20.73	20.65	21	2
15	64QAM	36	39	20.71	20.68	20.61		
15	64QAM	75	0	20.73	20.70	20.64		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	21.53	21.46	21.40	23	0
10	QPSK	1	25	21.38	21.56	21.31		
10	QPSK	1	49	21.46	21.35	21.34		
10	QPSK	25	0	21.61	21.63	21.53	23	0
10	QPSK	25	12	21.58	21.61	21.55		
10	QPSK	25	25	21.52	21.53	21.48		
10	QPSK	50	0	21.57	21.58	21.48	23	0
10	16QAM	1	0	21.82	21.85	21.78		
10	16QAM	1	25	21.81	21.68	21.56		
10	16QAM	1	49	21.75	21.68	21.57	22	1
10	16QAM	25	0	20.63	20.65	20.56		
10	16QAM	25	12	20.62	20.65	20.56		
10	16QAM	25	25	20.56	20.57	20.46	22	1
10	16QAM	50	0	20.59	20.61	20.52		
10	64QAM	1	0	21.75	21.70	21.59		
10	64QAM	1	25	21.64	21.66	21.64	22	1
10	64QAM	1	49	21.61	21.60	21.46		
10	64QAM	25	0	20.64	20.63	20.55		
10	64QAM	25	12	20.64	20.65	20.51	21	2
10	64QAM	25	25	20.54	20.55	20.47		
10	64QAM	50	0	20.58	20.57	20.49		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	21.55	21.48	21.33	23	0
5	QPSK	1	12	21.54	21.55	21.44		
5	QPSK	1	24	21.42	21.43	21.37		
5	QPSK	12	0	21.62	21.61	21.48	23	0
5	QPSK	12	7	21.64	21.63	21.56		
5	QPSK	12	13	21.58	21.60	21.51		
5	QPSK	25	0	21.57	21.59	21.48	23	0
5	16QAM	1	0	21.86	21.79	21.66		
5	16QAM	1	12	21.82	21.88	21.75		
5	16QAM	1	24	21.70	21.78	21.67	22	1
5	16QAM	12	0	20.69	20.62	20.49		
5	16QAM	12	7	20.69	20.69	20.57		
5	16QAM	12	13	20.65	20.63	20.54	22	1
5	16QAM	25	0	20.58	20.64	20.49		
5	64QAM	1	0	21.85	21.67	21.57		
5	64QAM	1	12	21.77	21.79	21.66	22	1
5	64QAM	1	24	21.66	21.72	21.55		
5	64QAM	12	0	20.65	20.61	20.49		
5	64QAM	12	7	20.67	20.67	20.57	21	2
5	64QAM	12	13	20.63	20.62	20.53		
5	64QAM	25	0	20.63	20.62	20.49		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	21.52	21.40	21.34	23	0
3	QPSK	1	8	21.59	21.62	21.49		
3	QPSK	1	14	21.39	21.45	21.36		
3	QPSK	8	0	21.58	21.61	21.45	23	0
3	QPSK	8	4	21.67	21.64	21.50		
3	QPSK	8	7	21.58	21.57	21.48		
3	QPSK	15	0	21.66	21.60	21.51	23	0
3	16QAM	1	0	21.73	21.69	21.64		
3	16QAM	1	8	21.76	21.78	21.79		
3	16QAM	1	14	21.71	21.73	21.62	22	1
3	16QAM	8	0	20.72	20.65	20.51		
3	16QAM	8	4	20.72	20.71	20.56		
3	16QAM	8	7	20.64	20.68	20.62	22	1
3	16QAM	15	0	20.65	20.63	20.49		
3	64QAM	1	0	21.64	21.67	21.50		
3	64QAM	1	8	21.81	21.80	21.74	22	1
3	64QAM	1	14	21.67	21.63	21.54		
3	64QAM	8	0	20.68	20.67	20.46		
3	64QAM	8	4	20.74	20.71	20.55	21	2
3	64QAM	8	7	20.61	20.61	20.55		
3	64QAM	15	0	20.65	20.62	20.46		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	21.44	21.38	21.28	23	0
1.4	QPSK	1	3	21.56	21.52	21.42		
1.4	QPSK	1	5	21.42	21.46	21.36		
1.4	QPSK	3	0	21.49	21.43	21.36		
1.4	QPSK	3	1	21.54	21.48	21.41		
1.4	QPSK	3	3	21.53	21.47	21.36		
1.4	QPSK	6	0	21.59	21.55	21.46	23	0
1.4	16QAM	1	0	21.75	21.70	21.64	23	0
1.4	16QAM	1	3	21.84	21.78	21.68		
1.4	16QAM	1	5	21.75	21.80	21.64		
1.4	16QAM	3	0	21.64	21.53	21.45		
1.4	16QAM	3	1	21.66	21.54	21.52		
1.4	16QAM	3	3	21.58	21.56	21.46		
1.4	16QAM	6	0	20.72	20.66	20.51	22	1
1.4	64QAM	1	0	21.63	21.68	21.46	22	1
1.4	64QAM	1	3	21.80	21.68	21.57		
1.4	64QAM	1	5	21.65	21.76	21.56		
1.4	64QAM	3	0	21.65	21.55	21.48		
1.4	64QAM	3	1	21.73	21.62	21.55		
1.4	64QAM	3	3	21.65	21.55	21.51		
1.4	64QAM	6	0	20.62	20.52	20.48	21	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	20.15	20.08	20.24	21.5	0
20	QPSK	1	49	20.12	20.17	20.18		
20	QPSK	1	99	20.21	20.52	20.23		
20	QPSK	50	0	20.27	20.30	20.40	21.5	0
20	QPSK	50	24	20.26	20.40	20.38		
20	QPSK	50	50	20.31	20.43	20.33		
20	QPSK	100	0	20.25	20.35	20.32	21.5	0
20	16QAM	1	0	20.49	20.29	20.50		
20	16QAM	1	49	20.43	20.42	20.46		
20	16QAM	1	99	20.48	20.51	20.51	21.5	0
20	16QAM	50	0	20.24	20.28	20.41		
20	16QAM	50	24	20.28	20.36	20.34		
20	16QAM	50	50	20.31	20.40	20.30	21.5	0
20	16QAM	100	0	20.27	20.32	20.31		
20	64QAM	1	0	20.38	20.22	20.46		
20	64QAM	1	49	20.29	20.37	20.37	21.5	0
20	64QAM	1	99	20.51	20.41	20.43		
20	64QAM	50	0	20.23	20.27	20.40		
20	64QAM	50	24	20.30	20.36	20.31	21	0.5
20	64QAM	50	50	20.27	20.37	20.29		
20	64QAM	100	0	20.30	20.33	20.32		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	20.19	20.11	20.25	21.5	0
15	QPSK	1	37	20.13	20.24	20.21		
15	QPSK	1	74	20.14	20.31	20.24		
15	QPSK	36	0	20.25	20.31	20.37	21.5	0
15	QPSK	36	20	20.29	20.39	20.40		
15	QPSK	36	39	20.27	20.40	20.36		
15	QPSK	75	0	20.28	20.33	20.37	21.5	0
15	16QAM	1	0	20.49	20.33	20.50		
15	16QAM	1	37	20.49	20.47	20.44		
15	16QAM	1	74	20.42	20.61	20.47	21.5	0
15	16QAM	36	0	20.25	20.29	20.36		
15	16QAM	36	20	20.29	20.40	20.36		
15	16QAM	36	39	20.30	20.38	20.31	21.5	0
15	16QAM	75	0	20.26	20.34	20.36		
15	64QAM	1	0	20.35	20.28	20.39		
15	64QAM	1	37	20.35	20.47	20.38	21.5	0
15	64QAM	1	74	20.30	20.49	20.45		
15	64QAM	36	0	20.25	20.27	20.38		
15	64QAM	36	20	20.27	20.36	20.37	21	0.5
15	64QAM	36	39	20.28	20.36	20.32		
15	64QAM	75	0	20.27	20.34	20.34		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	20.00	20.03	20.10	21.5	0
10	QPSK	1	25	19.86	20.03	19.97		
10	QPSK	1	49	20.00	20.21	20.06		
10	QPSK	25	0	20.11	20.17	20.17	21.5	0
10	QPSK	25	12	20.10	20.22	20.18		
10	QPSK	25	25	20.04	20.24	20.17		
10	QPSK	50	0	20.07	20.23	20.20	21.5	0
10	16QAM	1	0	20.24	20.29	20.43		
10	16QAM	1	25	20.11	20.27	20.24		
10	16QAM	1	49	20.19	20.47	20.45	21.5	0
10	16QAM	25	0	20.11	20.19	20.20		
10	16QAM	25	12	20.11	20.22	20.18		
10	16QAM	25	25	20.07	20.24	20.14	21.5	0
10	16QAM	50	0	20.08	20.19	20.15		
10	64QAM	1	0	20.28	20.20	20.23		
10	64QAM	1	25	20.11	20.17	20.17	21.5	0
10	64QAM	1	49	20.25	20.43	20.36		
10	64QAM	25	0	20.15	20.18	20.18		
10	64QAM	25	12	20.10	20.22	20.22	21	0.5
10	64QAM	25	25	20.05	20.23	20.18		
10	64QAM	50	0	20.09	20.20	20.18		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	20.06	20.10	20.00	21.5	0
5	QPSK	1	12	20.09	20.22	20.10		
5	QPSK	1	24	20.04	20.13	20.09		
5	QPSK	12	0	20.19	20.20	20.13	21.5	0
5	QPSK	12	7	20.20	20.31	20.27		
5	QPSK	12	13	20.17	20.26	20.25		
5	QPSK	25	0	20.19	20.25	20.15	21.5	0
5	16QAM	1	0	20.37	20.39	20.36		
5	16QAM	1	12	20.40	20.43	20.51		
5	16QAM	1	24	20.35	20.42	20.39	21.5	0
5	16QAM	12	0	20.22	20.24	20.13		
5	16QAM	12	7	20.25	20.33	20.31		
5	16QAM	12	13	20.21	20.27	20.28	21.5	0
5	16QAM	25	0	20.19	20.30	20.15		
5	64QAM	1	0	20.29	20.25	20.28		
5	64QAM	1	12	20.27	20.37	20.32	21.5	0
5	64QAM	1	24	20.27	20.27	20.33		
5	64QAM	12	0	20.20	20.22	20.11		
5	64QAM	12	7	20.23	20.27	20.29	21	0.5
5	64QAM	12	13	20.17	20.27	20.27		
5	64QAM	25	0	20.17	20.21	20.13		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

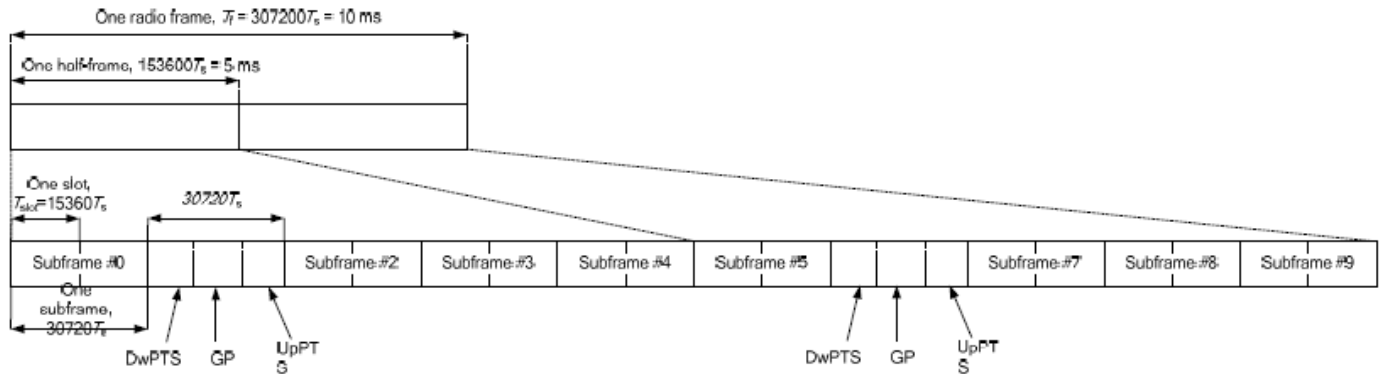


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<WWAN Top/Bottom Antenna-- Full Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	23.37	23.33	23.36	24	0
20	QPSK	1	49	23.36	23.51	23.28		
20	QPSK	1	99	23.40	23.36	23.25		
20	QPSK	50	0	22.51	22.59	22.39	23	1
20	QPSK	50	24	22.57	22.63	22.42		
20	QPSK	50	50	22.57	22.48	22.41		
20	QPSK	100	0	22.54	22.56	22.40	23	1
20	16QAM	1	0	22.41	22.44	22.34		
20	16QAM	1	49	22.49	22.46	22.36		
20	16QAM	1	99	22.55	22.38	22.34	22	2
20	16QAM	50	0	21.47	21.49	21.40		
20	16QAM	50	24	21.57	21.52	21.43		
20	16QAM	50	50	21.59	21.51	21.44	22	2
20	16QAM	100	0	21.52	21.49	21.39		
20	64QAM	1	0	21.15	21.20	21.10	22	2
20	64QAM	1	49	21.22	21.17	21.07		
20	64QAM	1	99	21.32	21.16	21.10		
20	64QAM	50	0	20.42	20.41	20.33	21	3
20	64QAM	50	24	20.49	20.45	20.36		
20	64QAM	50	50	20.52	20.43	20.35		
20	64QAM	100	0	20.54	20.51	20.37		



FCC SAR Test Report

Report No. : FA921903-02

Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	23.49	23.40	23.28	24	0
15	QPSK	1	37	23.49	23.40	23.30		
15	QPSK	1	74	23.40	23.33	23.28		
15	QPSK	36	0	22.53	22.45	22.36	23	1
15	QPSK	36	20	22.55	22.48	22.38		
15	QPSK	36	39	22.48	22.44	22.34		
15	QPSK	75	0	22.54	22.48	22.39		
15	16QAM	1	0	22.54	22.48	22.37	23	1
15	16QAM	1	37	22.46	22.47	22.34		
15	16QAM	1	74	22.47	22.44	22.38		
15	16QAM	36	0	21.43	21.39	21.31	22	2
15	16QAM	36	20	21.48	21.45	21.38		
15	16QAM	36	39	21.42	21.43	21.33		
15	16QAM	75	0	21.51	21.48	21.41		
15	64QAM	1	0	21.28	21.19	21.13	22	2
15	64QAM	1	37	21.18	21.11	21.08		
15	64QAM	1	74	21.17	21.17	21.10		
15	64QAM	36	0	20.44	20.41	20.34	21	3
15	64QAM	36	20	20.48	20.46	20.38		
15	64QAM	36	39	20.44	20.44	20.35		
15	64QAM	75	0	20.50	20.46	20.39		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	23.14	23.14	23.05	24	0
10	QPSK	1	25	23.26	23.23	23.14		
10	QPSK	1	49	23.17	23.19	23.15		
10	QPSK	25	0	22.37	22.31	22.19	23	1
10	QPSK	25	12	22.40	22.36	22.27		
10	QPSK	25	25	22.38	22.33	22.27		
10	QPSK	50	0	22.44	22.37	22.29		
10	16QAM	1	0	22.24	22.25	22.16	23	1
10	16QAM	1	25	22.33	22.27	22.22		
10	16QAM	1	49	22.25	22.22	22.17		
10	16QAM	25	0	21.36	21.33	21.26	22	2
10	16QAM	25	12	21.38	21.37	21.29		
10	16QAM	25	25	21.36	21.32	21.29		
10	16QAM	50	0	21.40	21.38	21.30		
10	64QAM	1	0	21.04	21.04	20.98	22	2
10	64QAM	1	25	21.05	21.01	20.97		
10	64QAM	1	49	21.04	21.02	21.01		
10	64QAM	25	0	20.27	20.25	20.18	21	3
10	64QAM	25	12	20.30	20.30	20.23		
10	64QAM	25	25	20.28	20.26	20.21		
10	64QAM	50	0	20.32	20.29	20.20		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	23.33	23.14	23.06	24	0
5	QPSK	1	12	23.35	23.28	23.17		
5	QPSK	1	24	23.35	23.31	23.15		
5	QPSK	12	0	22.39	22.23	22.15	23	1
5	QPSK	12	7	22.50	22.43	22.32		
5	QPSK	12	13	22.46	22.40	22.31		
5	QPSK	25	0	22.44	22.35	22.29		
5	16QAM	1	0	22.40	22.22	22.17	23	1
5	16QAM	1	12	22.40	22.38	22.30		
5	16QAM	1	24	22.43	22.41	22.30		
5	16QAM	12	0	21.32	21.18	21.19	22	2
5	16QAM	12	7	21.39	21.33	21.30		
5	16QAM	12	13	21.41	21.39	21.29		
5	16QAM	25	0	21.42	21.38	21.29		
5	64QAM	1	0	21.12	21.01	20.95	22	2
5	64QAM	1	12	21.15	21.07	21.02		
5	64QAM	1	24	21.21	21.12	21.03		
5	64QAM	12	0	20.36	20.20	20.12	21	3
5	64QAM	12	7	20.42	20.33	20.29		
5	64QAM	12	13	20.40	20.37	20.23		
5	64QAM	25	0	20.37	20.29	20.20		

<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On>
<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.04	20.00	19.92		
20	QPSK	1	49	20.05	20.05	20.00	21	0
20	QPSK	1	99	20.05	20.00	19.99	21	0
20	QPSK	50	0	20.22	20.19	20.11		
20	QPSK	50	24	20.26	20.20	20.13		
20	QPSK	50	50	20.24	20.18	20.13		
20	QPSK	100	0	20.23	20.18	20.10	21	0
20	16QAM	1	0	20.11	20.05	20.04		
20	16QAM	1	49	20.11	20.13	20.08		
20	16QAM	1	99	20.12	20.08	20.16	21	0
20	16QAM	50	0	20.15	20.15	20.10		
20	16QAM	50	24	20.19	20.20	20.15		
20	16QAM	50	50	20.22	20.15	20.17		
20	16QAM	100	0	20.15	20.15	20.10	21	0
20	64QAM	1	0	19.87	19.84	19.81		
20	64QAM	1	49	19.91	19.87	19.89		
20	64QAM	1	99	19.86	19.89	19.94	21	0
20	64QAM	50	0	20.12	20.10	20.04		
20	64QAM	50	24	20.20	20.15	20.08		
20	64QAM	50	50	20.12	20.14	20.09		
20	64QAM	100	0	20.20	20.18	20.12		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	20.12	20.08	19.96	21	0
15	QPSK	1	37	20.14	20.10	20.01		
15	QPSK	1	74	20.12	20.05	19.98		
15	QPSK	36	0	20.16	20.14	20.02	21	0
15	QPSK	36	20	20.21	20.19	20.10		
15	QPSK	36	39	20.17	20.15	20.08		
15	QPSK	75	0	20.22	20.21	20.09	21	0
15	16QAM	1	0	20.08	20.10	20.04		
15	16QAM	1	37	19.98	20.02	20.06		
15	16QAM	1	74	20.12	20.11	20.24	21	0
15	16QAM	36	0	20.09	20.08	20.00		
15	16QAM	36	20	20.12	20.14	20.11		
15	16QAM	36	39	20.09	20.09	20.08	21	0
15	16QAM	75	0	20.16	20.17	20.14		
15	64QAM	1	0	19.92	19.95	19.80		
15	64QAM	1	37	19.94	19.95	19.85	21	0
15	64QAM	1	74	19.89	19.90	19.95		
15	64QAM	36	0	20.11	20.14	20.04		
15	64QAM	36	20	20.16	20.16	20.12	21	0
15	64QAM	36	39	20.14	20.08	20.15		
15	64QAM	75	0	20.16	20.16	20.15		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	19.79	19.84	19.74	21	0
10	QPSK	1	25	19.88	19.87	19.87		
10	QPSK	1	49	19.87	19.86	19.85		
10	QPSK	25	0	20.05	19.99	19.87	21	0
10	QPSK	25	12	20.10	20.03	19.94		
10	QPSK	25	25	20.06	20.05	19.94		
10	QPSK	50	0	20.14	20.05	19.97	21	0
10	16QAM	1	0	19.88	19.90	19.97		
10	16QAM	1	25	19.97	19.96	19.85		
10	16QAM	1	49	19.85	19.96	20.05	21	0
10	16QAM	25	0	20.01	19.98	19.99		
10	16QAM	25	12	20.05	20.02	20.06		
10	16QAM	25	25	20.02	20.01	20.07	21	0
10	16QAM	50	0	20.08	20.08	20.06		
10	64QAM	1	0	19.74	19.77	19.71		
10	64QAM	1	25	19.58	19.62	19.61	21	0
10	64QAM	1	49	19.75	19.77	19.81		
10	64QAM	25	0	19.97	19.94	19.91		
10	64QAM	25	12	20.00	19.97	19.98	21	0
10	64QAM	25	25	19.99	19.91	19.94		
10	64QAM	50	0	20.02	19.99	19.96		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	19.97	19.83	19.82	21	0
5	QPSK	1	12	20.00	19.96	19.94		
5	QPSK	1	24	19.98	19.96	19.90		
5	QPSK	12	0	20.06	19.94	19.92	21	0
5	QPSK	12	7	20.07	20.08	20.04		
5	QPSK	12	13	20.11	20.09	20.03		
5	QPSK	25	0	20.13	20.04	19.96	21	0
5	16QAM	1	0	19.96	19.84	19.94		
5	16QAM	1	12	20.02	20.02	20.09		
5	16QAM	1	24	20.04	20.04	20.09	21	0
5	16QAM	12	0	20.01	19.90	19.91		
5	16QAM	12	7	20.07	20.05	20.00		
5	16QAM	12	13	20.04	20.07	20.01	21	0
5	16QAM	25	0	20.10	20.06	20.05		
5	64QAM	1	0	19.82	19.67	19.72		
5	64QAM	1	12	19.86	19.81	19.84	21	0
5	64QAM	1	24	19.87	19.83	19.84		
5	64QAM	12	0	19.95	19.88	19.94		
5	64QAM	12	7	20.06	20.02	20.06	21	0
5	64QAM	12	13	20.04	20.06	20.07		
5	64QAM	25	0	20.05	20.00	19.99		



<WWAN Bottom Antenna --Reduced Power for Hotspot On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.72	20.91	20.57	22	0
20	QPSK	1	49	20.73	20.71	20.64		
20	QPSK	1	99	20.67	20.65	20.61		
20	QPSK	50	0	20.85	20.85	20.71	22	0
20	QPSK	50	24	20.85	20.89	20.74		
20	QPSK	50	50	20.86	20.83	20.77		
20	QPSK	100	0	20.82	20.83	20.72		
20	16QAM	1	0	20.80	20.77	20.70	22	0
20	16QAM	1	49	20.80	20.80	20.73		
20	16QAM	1	99	20.76	20.76	20.71		
20	16QAM	50	0	20.85	20.82	20.73	22	0
20	16QAM	50	24	20.82	20.88	20.79		
20	16QAM	50	50	20.85	20.83	20.75		
20	16QAM	100	0	20.83	20.83	20.76		
20	64QAM	1	0	20.57	20.53	20.49	22	0
20	64QAM	1	49	20.58	20.56	20.49		
20	64QAM	1	99	20.55	20.57	20.51		
20	64QAM	50	0	20.79	20.73	20.65	21	1
20	64QAM	50	24	20.82	20.83	20.72		
20	64QAM	50	50	20.78	20.75	20.69		
20	64QAM	100	0	20.87	20.82	20.77		



FCC SAR Test Report

Report No. : FA921903-02

Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	20.73	20.68	20.61	22	0
15	QPSK	1	37	20.69	20.70	20.67		
15	QPSK	1	74	20.75	20.71	20.64		
15	QPSK	36	0	20.79	20.79	20.70	22	0
15	QPSK	36	20	20.87	20.84	20.75		
15	QPSK	36	39	20.77	20.80	20.71		
15	QPSK	75	0	20.87	20.80	20.69	22	0
15	16QAM	1	0	20.84	20.79	20.76		
15	16QAM	1	37	20.74	20.75	20.71		
15	16QAM	1	74	20.83	20.81	20.84	22	0
15	16QAM	36	0	20.77	20.75	20.70		
15	16QAM	36	20	20.81	20.81	20.74		
15	16QAM	36	39	20.77	20.75	20.73	22	0
15	16QAM	75	0	20.81	20.83	20.78		
15	64QAM	1	0	20.60	20.52	20.51		
15	64QAM	1	37	20.53	20.60	20.52	21	1
15	64QAM	1	74	20.54	20.55	20.54		
15	64QAM	36	0	20.78	20.75	20.73		
15	64QAM	36	20	20.83	20.77	20.78	21	1
15	64QAM	36	39	20.77	20.76	20.74		
15	64QAM	75	0	20.82	20.82	20.74		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.44	20.49	20.46	22	0
10	QPSK	1	25	20.54	20.55	20.37		
10	QPSK	1	49	20.49	20.53	20.54		
10	QPSK	25	0	20.67	20.65	20.54	22	0
10	QPSK	25	12	20.70	20.64	20.61		
10	QPSK	25	25	20.71	20.66	20.61		
10	QPSK	50	0	20.78	20.70	20.63	22	0
10	16QAM	1	0	20.63	20.59	20.58		
10	16QAM	1	25	20.67	20.63	20.61		
10	16QAM	1	49	20.57	20.58	20.59	22	0
10	16QAM	25	0	20.65	20.64	20.64		
10	16QAM	25	12	20.70	20.70	20.68		
10	16QAM	25	25	20.68	20.67	20.64	22	0
10	16QAM	50	0	20.73	20.72	20.65		
10	64QAM	1	0	20.39	20.44	20.38		
10	64QAM	1	25	20.35	20.24	20.23	21	1
10	64QAM	1	49	20.45	20.38	20.44		
10	64QAM	25	0	20.58	20.59	20.52		
10	64QAM	25	12	20.68	20.65	20.59	21	1
10	64QAM	25	25	20.64	20.57	20.55		
10	64QAM	50	0	20.64	20.65	20.59		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.66	20.50	20.44	22	0
5	QPSK	1	12	20.62	20.62	20.53		
5	QPSK	1	24	20.63	20.63	20.48		
5	QPSK	12	0	20.75	20.57	20.49	22	0
5	QPSK	12	7	20.79	20.73	20.62		
5	QPSK	12	13	20.77	20.76	20.64		
5	QPSK	25	0	20.73	20.70	20.60	22	0
5	16QAM	1	0	20.72	20.58	20.59		
5	16QAM	1	12	20.73	20.70	20.69		
5	16QAM	1	24	20.78	20.79	20.69	22	0
5	16QAM	12	0	20.68	20.57	20.51		
5	16QAM	12	7	20.75	20.70	20.67		
5	16QAM	12	13	20.74	20.73	20.63	22	0
5	16QAM	25	0	20.77	20.70	20.65		
5	64QAM	1	0	20.52	20.39	20.32		
5	64QAM	1	12	20.55	20.49	20.45	22	0
5	64QAM	1	24	20.60	20.50	20.46		
5	64QAM	12	0	20.63	20.56	20.50		
5	64QAM	12	7	20.75	20.66	20.66	21	1
5	64QAM	12	13	20.71	20.69	20.65		
5	64QAM	25	0	20.68	20.65	20.59		

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for CA_7C /CA_38C/CA_7A-7A and uplink for CA_7C/ CA_38C. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. All permutations exist. No restrictions on Pcell & Scell combinations.

Index	2CC	Restriction	Completely Covered by Measurement Superset
2CC #1	CA_7C		No
2CC #2	CA_38C		No
2CC #3	CA_7A-7A		No

LTE Carrier Aggregation Conducted Power (Downlink)
General Note:

- i. According to KDB941225 D05A v01r02, uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

**<WWAN Top Antenna--Full Power Mode>****<Two Carrier power verification>**

Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	99	Band 7	20M	2674.8	3298	22.05	22.37
		CA_38C	Band 38	20M	2595	37901	QPSK	1	49	Band 38	20M	2614.8	38099	23.28	23.51
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	99	Band 7	5M	2687.5	3425	22.26	22.37

<WWAN Bottom Antenna--Full Power Mode>**<Two Carrier power verification>**

Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	99	Band 7	20M	2674.8	3298	23.21	23.25
		CA_38C	Band 38	20M	2595	37901	QPSK	1	49	Band 38	20M	2614.8	38099	23.28	23.51
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	99	Band 7	5M	2687.5	3425	23.15	23.25

<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On>**<Two Carrier power verification>**

Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2510	20850	16QAM	1	99	Band 7	20M	2649.8	3048	17.58	17.80
		CA_38C	Band 38	20M	2580	37850	QPSK	50	24	Band 38	20M	2599.8	38048	20.19	20.26
	Non-Contiguous	CA_7A-7A	Band 7	20M	2510	20850	16QAM	1	99	Band 7	5M	2687.5	3425	17.56	17.80

<WWAN Bottom Antenna --Reduced Power for Hotspot On>**<Two Carrier power verification>**


Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	99	Band 7	20M	2674.8	3298	19.02	19.15
		CA_38C	Band 38	20M	2595	37901	QPSK	1	0	Band 38	20M	2614.8	38099	20.88	20.91
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	99	Band 7	5M	2687.5	3425	19.07	19.15

<WWAN Bottom Antenna --Reduced Power for Handheld>**<Two Carrier power verification>**

Configure		CA Configuration (BCS)	PCC							SCC				Power	
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7C	Band 7	20M	2535	21100	QPSK	1	99	Band 7	20M	2674.8	3298	20.41	20.52
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	99	Band 7	5M	2687.5	3425	20.35	20.52

LTE Carrier Aggregation Conducted Power (Uplink)

1. This device supports uplink carrier aggregation for LTE CA_7C, CA_38C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. For the non-contiguously allocated resource blocks which the MPR level is determined by various RB separation and RB sizes requirement, and the allowed MPR levels, settings and the conducted powers are permanently implemented in this device per the 3GPP 36.36.101 section 6.2.3A.1.3 requirements.
2. According to November 2017 TCB workshop, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs
4. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.

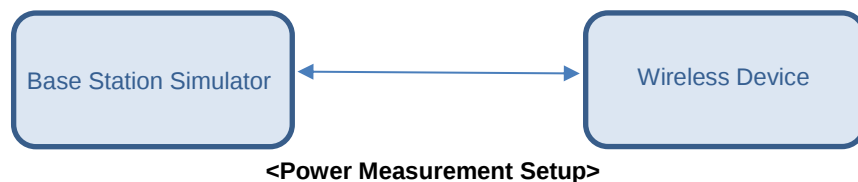

**<WWAN Top Antenna--Full Power Mode>****<LTE Band 7>**

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	99	0	0	1	0	22.25	23.00
21100	20902	QPSK	1	99	0	0	1	0	22.15	23.00
21350	21152	QPSK	1	99	0	0	1	0	22.09	23.00

<LTE Band 38>

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	49	0	0	1	0	23.4	24.00
37901	38099	QPSK	1	49	0	0	1	0	23.48	24.00
38150	37952	QPSK	1	49	0	0	1	0	23.43	24.00

<WWAN Bottom Antenna--Full Power Mode>**<LTE Band 7>**

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	99	0	0	1	0	23.16	24.00
21100	20902	QPSK	1	99	0	0	1	0	23.03	24.00
21350	21152	QPSK	1	99	0	0	1	0	23.04	24.00

<LTE Band 38>

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	49	0	0	1	0	23.4	24.00
37901	38099	QPSK	1	49	0	0	1	0	23.48	24.00
38150	37952	QPSK	1	49	0	0	1	0	23.43	24.00

<WWAN Top Antenna --Reduced Power for Receiver On/Hotspot On>
<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	50	50	0	0	1	0	17.59	18.50
21100	20902	QPSK	50	50	0	0	1	0	17.17	18.50
21350	21152	QPSK	50	50	0	0	1	0	17.20	18.50

<LTE Band 38>

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	50	24	0	0	1	0	19.80	21.00
37901	38099	QPSK	50	24	0	0	1	0	19.86	21.00
38150	37952	QPSK	50	24	0	0	1	0	19.76	21.00

<WWAN Bottom Antenna --Reduced Power for Hotspot On>
<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	50	50	0	0	1	0	18.48	20.00
21100	20902	QPSK	50	50	0	0	1	0	18.52	20.00
21350	21152	QPSK	50	50	0	0	1	0	18.57	20.00

<LTE Band 38>

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	100	0	0	0	1	0	20.83	22.00
37901	38099	QPSK	100	0	0	0	1	0	20.85	22.00
38150	37952	QPSK	100	0	0	0	1	0	20.76	22.00

<WWAN Bottom Antenna --Reduced Power for Handheld>

<LTE Band 7>

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	50	50	0	0	1	0	20.23	21.50
21100	20902	QPSK	50	50	0	0	1	0	20.15	21.50
21350	21152	QPSK	50	50	0	0	1	0	20.06	21.50

<WLAN Conducted Power>**General Note:**

4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<Full Power>
<2.4GHz WLAN Ant.1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.98	21.50	100.00
		6	2437	21.07	21.50	
		11	2462	21.33	21.50	
	802.11g 6Mbps	1	2412	17.91	18.50	97.95
		6	2437	18.17	18.50	
		11	2462	16.12	18.00	
	802.11n-HT20 MCS0	1	2412	17.08	18.00	98.52
		6	2437	17.50	18.00	
		11	2462	15.16	17.00	

<2.4GHz WLAN Ant.1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	24.06	24.50	100.00
		6	2437	24.19	24.50	
		11	2462	24.24	24.50	
	802.11g 6Mbps	1	2412	20.81	21.50	97.95
		6	2437	21.24	21.50	
		11	2462	18.98	21.00	
	802.11n-HT20 MCS0	1	2412	20.13	21.00	98.52
		6	2437	20.53	21.00	
		11	2462	18.17	20.00	



<5GHz WLAN Ant.2>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	16.24	17.50	97.93
		40	5200	16.72	17.50	
		44	5220	16.58	17.50	
		48	5240	16.46	17.50	
	802.11n-HT20 MCS0	36	5180	16.64	17.50	98.52
		40	5200	17.12	17.50	
		44	5220	16.94	17.50	
		48	5240	16.66	17.50	
	802.11n-HT40 MCS0	38	5190	13.27	15.00	96.32
		46	5230	13.05	15.00	
	802.11ac-VHT20 MCS0	36	5180	16.81	17.50	96.48
		40	5200	17.32	17.50	
		44	5220	17.07	17.50	
		48	5240	16.79	17.50	
	802.11ac-VHT40 MCS0	38	5190	13.52	15.00	92.70
		46	5230	13.32	15.00	
	802.11ac-VHT80 MCS0	42	5210	12.89	13.50	86.63

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	16.36	17.50	97.93
		56	5280	16.42	17.50	
		60	5300	16.30	17.50	
		64	5320	16.33	17.50	
	802.11n-HT20 MCS0	52	5260	15.69	17.50	98.52
		56	5280	15.25	17.50	
		60	5300	15.47	17.50	
		64	5320	15.42	17.50	
	802.11n-HT40 MCS0	54	5270	13.37	15.00	96.32
		62	5310	13.47	15.00	
	802.11ac-VHT20 MCS0	52	5260	15.79	17.50	96.48
		56	5280	15.37	17.50	
		60	5300	15.59	17.50	
		64	5320	15.57	17.50	
	802.11ac-VHT40 MCS0	54	5270	13.60	15.00	92.70
		62	5310	13.71	15.00	
	802.11ac-VHT80 MCS0	58	5290	10.75	13.50	86.63



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	=Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	16.80	17.50	97.93
		116	5580	16.72	17.50	
		124	5620	16.81	17.50	
		132	5660	16.90	17.50	
		140	5700	16.43	17.50	
	802.11n-HT20 MCS0	100	5500	16.81	17.50	98.52
		116	5580	17.43	17.50	
		124	5620	16.92	17.50	
		132	5660	16.84	17.50	
		140	5700	15.17	17.50	
	802.11n-HT40 MCS0	102	5510	13.49	15.00	96.32
		110	5550	13.53	15.00	
		126	5630	13.41	15.00	
		134	5670	13.58	15.00	
	802.11ac-VHT20 MCS0	100	5500	16.94	17.50	96.48
		116	5580	17.48	17.50	
		124	5620	17.06	17.50	
		132	5660	16.97	17.50	
		140	5700	15.35	17.50	
	802.11ac-VHT40 MCS0	102	5510	13.69	15.00	92.70
		110	5550	13.74	15.00	
		126	5630	13.64	15.00	
		134	5670	13.79	15.00	
	802.11ac-VHT80 MCS0	106	5530	12.60	13.50	86.63
		122	5610	12.30	13.50	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	16.55	17.50	97.93
		157	5785	16.84	17.50	
		161	5805	16.90	17.50	
	802.11n-HT20 MCS0	149	5745	15.94	17.50	98.52
		157	5785	16.01	17.50	
		161	5805	16.09	17.50	
	802.11n-HT40 MCS0	151	5755	15.76	17.00	96.32
		159	5795	15.86	17.00	
	802.11ac-VHT20 MCS0	149	5745	16.10	17.50	96.48
		157	5785	16.17	17.50	
		161	5805	16.24	17.50	
	802.11ac-VHT40 MCS0	151	5755	15.95	17.00	92.70
		159	5795	16.06	17.00	
	802.11ac-VHT80 MCS0	155	5775	16.22	17.00	86.63



<5GHz WLAN Ant.1+2>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	19.66	20.50	97.93
		40	5200	19.87	20.50	
		44	5220	19.79	20.50	
		48	5240	19.77	20.50	
	802.11n-HT20 MCS0	36	5180	20.00	20.50	98.52
		40	5200	20.22	20.50	
		44	5220	20.26	20.50	
		48	5240	20.00	20.50	
	802.11n-HT40 MCS0	38	5190	16.78	18.00	96.32
		46	5230	16.66	18.00	
	802.11ac-VHT20 MCS0	36	5180	20.14	20.50	96.48
		40	5200	20.37	20.50	
		44	5220	20.36	20.50	
		48	5240	20.12	20.50	
	802.11ac-VHT40 MCS0	38	5190	17.00	18.00	92.70
		46	5230	16.89	18.00	
	802.11ac-VHT80 MCS0	42	5210	16.20	16.50	86.63

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	19.72	20.50	97.93
		56	5280	19.73	20.50	
		60	5300	19.71	20.50	
		64	5320	19.74	20.50	
	802.11n-HT20 MCS0	52	5260	18.96	20.50	98.52
		56	5280	18.64	20.50	
		60	5300	18.59	20.50	
		64	5320	18.85	20.50	
	802.11n-HT40 MCS0	54	5270	16.58	18.00	96.32
		62	5310	16.67	18.00	
	802.11ac-VHT20 MCS0	52	5260	19.19	20.50	96.48
		56	5280	18.75	20.50	
		60	5300	18.69	20.50	
		64	5320	18.99	20.50	
	802.11ac-VHT40 MCS0	54	5270	16.77	18.00	92.70
		62	5310	16.85	18.00	
	802.11ac-VHT80 MCS0	58	5290	14.20	16.50	86.63



5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	19.86	20.50	97.93
		116	5580	19.94	20.50	
		124	5620	19.83	20.50	
		132	5660	19.94	20.50	
		140	5700	19.53	20.50	
	802.11n-HT20 MCS0	100	5500	19.91	20.50	98.52
		116	5580	20.44	20.50	
		124	5620	19.99	20.50	
		132	5660	20.19	20.50	
		140	5700	18.37	20.50	
	802.11n-HT40 MCS0	102	5510	16.67	18.00	96.32
		110	5550	16.76	18.00	
		126	5630	16.53	18.00	
		134	5670	16.90	18.00	
	802.11ac-VHT20 MCS0	100	5500	20.02	20.50	96.48
		116	5580	20.48	20.50	
		124	5620	20.13	20.50	
		132	5660	20.33	20.50	
		140	5700	18.52	20.50	
	802.11ac-VHT40 MCS0	102	5510	16.86	18.00	92.70
		110	5550	16.95	18.00	
		126	5630	16.78	18.00	
		134	5670	17.10	18.00	
	802.11ac-VHT80 MCS0	106	5530	15.52	16.50	86.63
		122	5610	15.31	16.50	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	19.67	20.50	97.93
		157	5785	19.78	20.50	
		161	5805	19.89	20.50	
	802.11n-HT20 MCS0	149	5745	18.98	20.50	98.52
		157	5785	18.98	20.50	
		161	5805	19.08	20.50	
	802.11n-HT40 MCS0	151	5755	18.84	20.00	96.32
		159	5795	18.82	20.00	
	802.11ac-VHT20 MCS0	149	5745	19.14	20.50	96.48
		157	5785	19.08	20.50	
		161	5805	19.21	20.50	
	802.11ac-VHT40 MCS0	151	5755	19.02	20.00	92.70
		159	5795	19.00	20.00	
	802.11ac-VHT80 MCS0	155	5775	19.07	20.00	86.63

<Reduced Power for Receiver On >
<2.4GHz WLAN Ant.1>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	19.37	19.50	100.00
		6	2437	19.38	19.50	
		11	2462	19.45	19.50	
	802.11g 6Mbps	1	2412	17.91	18.50	97.95
		6	2437	18.17	18.50	
		11	2462	16.12	18.00	
	802.11n-HT20 MCS0	1	2412	17.08	18.00	98.52
		6	2437	17.50	18.00	
		11	2462	15.16	17.00	

<2.4GHz WLAN Ant.1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	22.43	22.50	100.00
		6	2437	22.43	22.50	
		11	2462	22.49	22.50	
	802.11g 6Mbps	1	2412	20.81	21.50	97.95
		6	2437	21.24	21.50	
		11	2462	18.98	21.00	
	802.11n-HT20 MCS0	1	2412	20.13	21.00	98.52
		6	2437	20.53	21.00	
		11	2462	18.17	20.00	



<5GHz WLAN Ant.2>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	13.40	14.50	97.93
		40	5200	13.97	14.50	
		44	5220	13.99	14.50	
		48	5240	13.69	14.50	
	802.11n-HT20 MCS0	36	5180	12.57	14.00	98.52
		40	5200	13.01	14.00	
		44	5220	12.98	14.00	
		48	5240	12.76	14.00	
	802.11n-HT40 MCS0	38	5190	12.60	14.00	96.32
		46	5230	12.32	14.00	
	802.11ac-VHT20 MCS0	36	5180	12.75	14.50	96.48
		40	5200	13.21	14.50	
		44	5220	13.07	14.50	
		48	5240	12.91	14.50	
	802.11ac-VHT40 MCS0	38	5190	12.61	14.00	92.70
		46	5230	12.38	14.00	
	802.11ac-VHT80 MCS0	42	5210	12.89	13.50	86.63

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	13.53	14.50	97.93
		56	5280	13.63	14.50	
		60	5300	13.90	14.50	
		64	5320	13.89	14.50	
	802.11n-HT20 MCS0	52	5260	12.66	14.00	98.52
		56	5280	12.78	14.00	
		60	5300	12.97	14.00	
		64	5320	12.92	14.00	
	802.11n-HT40 MCS0	54	5270	12.47	14.00	96.32
		62	5310	12.76	14.00	
	802.11ac-VHT20 MCS0	52	5260	12.62	14.50	96.48
		56	5280	12.68	14.50	
		60	5300	13.08	14.50	
		64	5320	13.01	14.50	
	802.11ac-VHT40 MCS0	54	5270	12.60	14.00	92.70
		62	5310	12.86	14.00	
	802.11ac-VHT80 MCS0	58	5290	12.83	14.00	86.63



<5GHz WLAN Ant.1+2>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	16.44	17.50	97.93
		40	5200	16.80	17.50	
		44	5220	16.86	17.50	
		48	5240	16.75	17.50	
	802.11n-HT20 MCS0	36	5180	15.95	17.50	98.52
		40	5200	16.12	17.50	
		44	5220	16.17	17.50	
		48	5240	16.07	17.50	
	802.11n-HT40 MCS0	38	5190	15.67	17.00	96.32
		46	5230	15.56	17.00	
	802.11ac-VHT20 MCS0	36	5180	15.97	17.50	96.48
		40	5200	16.19	17.50	
		44	5220	16.20	17.50	
		48	5240	16.17	17.50	
	802.11ac-VHT40 MCS0	38	5190	15.85	17.00	92.70
		46	5230	15.72	17.00	
	802.11ac-VHT80 MCS0	42	5210	15.68	16.50	86.63

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	16.65	17.50	97.93
		56	5280	16.88	17.50	
		60	5300	16.87	17.50	
		64	5320	16.89	17.50	
	802.11n-HT20 MCS0	52	5260	15.80	17.50	98.52
		56	5280	15.87	17.50	
		60	5300	16.04	17.50	
		64	5320	16.00	17.50	
	802.11n-HT40 MCS0	54	5270	15.46	17.00	96.32
		62	5310	15.86	17.00	
	802.11ac-VHT20 MCS0	52	5260	15.99	17.50	96.48
		56	5280	15.90	17.50	
		60	5300	16.18	17.50	
		64	5320	16.19	17.50	
	802.11ac-VHT40 MCS0	54	5270	15.61	17.00	92.70
		62	5310	16.01	17.00	
	802.11ac-VHT80 MCS0	58	5290	15.85	16.50	86.63

<Reduced Power for Hotspot On >

<5GHz WLAN Ant.2>

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	13.20	13.50	97.93
		157	5785	13.07	13.50	
		161	5805	13.21	13.50	
	802.11n-HT20 MCS0	149	5745	12.42	13.50	98.52
		157	5785	12.48	13.50	
		161	5805	12.56	13.50	
	802.11n-HT40 MCS0	151	5755	12.39	13.00	96.32
		159	5795	12.48	13.00	
	802.11ac-VHT20 MCS0	149	5745	12.51	13.50	96.48
		157	5785	12.59	13.50	
		161	5805	12.76	13.50	
	802.11ac-VHT40 MCS0	151	5755	12.35	13.00	92.70
		159	5795	12.46	13.00	
	802.11ac-VHT80 MCS0	155	5775	12.83	13.00	86.63

<5GHz WLAN Ant.1+2>

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a MCS0	149	5745	16.12	16.50	97.93
		157	5785	15.98	16.50	
		161	5805	16.17	16.50	
	802.11n-HT20 MCS0	149	5745	15.46	16.50	98.52
		157	5785	15.37	16.50	
		161	5805	15.49	16.50	
	802.11n-HT40 MCS0	151	5755	15.50	16.00	96.32
		159	5795	15.51	16.00	
	802.11ac-VHT20 MCS0	149	5745	15.64	16.50	96.48
		157	5785	15.49	16.50	
		161	5805	15.88	16.50	
	802.11ac-VHT40 MCS0	151	5755	15.57	16.00	92.70
		159	5795	15.58	16.00	
	802.11ac-VHT80 MCS0	155	5775	15.67	16.00	86.63

<Reduced Power for transmitting simultaneously with WWAN>
<5GHz WLAN Ant.2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	13.09	14.00	97.93
		116	5580	13.10	14.00	
		124	5620	13.01	14.00	
		132	5660	12.88	14.00	
		140	5700	12.97	14.00	
	802.11n-HT20 MCS0	100	5500	12.51	14.00	98.52
		116	5580	12.23	14.00	
		124	5620	12.52	14.00	
		132	5660	12.28	14.00	
		140	5700	12.36	14.00	
	802.11n-HT40 MCS0	102	5510	12.61	13.50	96.32
		110	5550	12.52	13.50	
		126	5630	12.44	13.50	
		134	5670	12.11	13.50	
	802.11ac-VHT20 MCS0	100	5500	12.58	14.00	96.48
		116	5580	12.35	14.00	
		124	5620	12.53	14.00	
		132	5660	12.12	14.00	
		140	5700	12.26	14.00	
	802.11ac-VHT40 MCS0	102	5510	12.60	13.50	92.70
		110	5550	12.57	13.50	
		126	5630	12.54	13.50	
		134	5670	12.28	13.50	
	802.11ac-VHT80 MCS0	106	5530	12.60	13.50	86.63
		122	5610	12.30	13.50	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	13.20	14.00	97.93
		157	5785	13.07	14.00	
		161	5805	13.21	14.00	
	802.11n-HT20 MCS0	149	5745	12.42	14.00	98.52
		157	5785	12.48	14.00	
		161	5805	12.56	14.00	
	802.11n-HT40 MCS0	151	5755	12.39	13.50	96.32
		159	5795	12.48	13.50	
	802.11ac-VHT20 MCS0	149	5745	12.51	14.00	96.48
		157	5785	12.59	14.00	
		161	5805	12.76	14.00	
	802.11ac-VHT40 MCS0	151	5755	12.35	13.50	92.70
		159	5795	12.46	13.50	
	802.11ac-VHT80 MCS0	155	5775	12.83	13.50	86.63



<5GHz WLAN Ant.1+2>


	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	16.00	17.00	97.93
		116	5580	16.01	17.00	
		124	5620	15.98	17.00	
		132	5660	15.97	17.00	
		140	5700	15.98	17.00	
	802.11n-HT20 MCS0	100	5500	15.55	17.00	98.52
		116	5580	15.32	17.00	
		124	5620	15.45	17.00	
		132	5660	15.36	17.00	
		140	5700	15.33	17.00	
	802.11n-HT40 MCS0	102	5510	15.50	16.50	96.32
		110	5550	15.41	16.50	
		126	5630	15.42	16.50	
		134	5670	15.20	16.50	
	802.11ac-VHT20 MCS0	100	5500	15.37	17.00	96.48
		116	5580	15.42	17.00	
		124	5620	15.60	17.00	
		132	5660	15.41	17.00	
		140	5700	15.36	17.00	
	802.11ac-VHT40 MCS0	102	5510	15.56	16.50	92.70
		110	5550	15.54	16.50	
		126	5630	15.59	16.50	
		134	5670	15.38	16.50	
	802.11ac-VHT80 MCS0	106	5530	15.52	16.50	86.63
		122	5610	15.31	16.50	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	16.12	17.00	97.93
		157	5785	15.98	17.00	
		161	5805	16.17	17.00	
	802.11n-HT20 MCS0	149	5745	15.46	17.00	98.52
		157	5785	15.37	17.00	
		161	5805	15.49	17.00	
	802.11n-HT40 MCS0	151	5755	15.50	16.50	96.32
		159	5795	15.51	16.50	
	802.11ac-VHT20 MCS0	149	5745	15.64	17.00	96.48
		157	5785	15.49	17.00	
		161	5805	15.88	17.00	
	802.11ac-VHT40 MCS0	151	5755	15.57	16.50	92.70
		159	5795	15.58	16.50	
	802.11ac-VHT80 MCS0	155	5775	15.67	16.50	86.63

<2.4GHz Bluetooth>

General Note:


1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.91 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

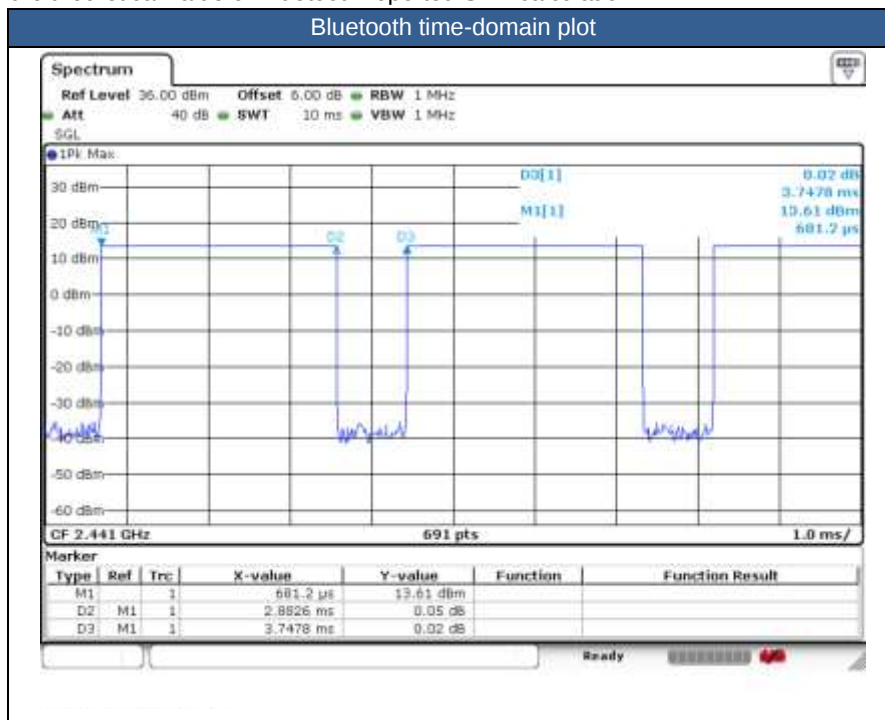

Mode	Channel	Frequency (MHz)	Data Rate
			1Mbps
BR/EDR	CH 00	2402	12.45
	CH 39	2441	13.35
	CH 78	2480	13.25
Tune-up Limit			13.50

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 00	2402	4.92
	CH 19	2440	5.92
	CH 39	2480	6.40
Tune-up Limit			8.00

14. Antenna Location

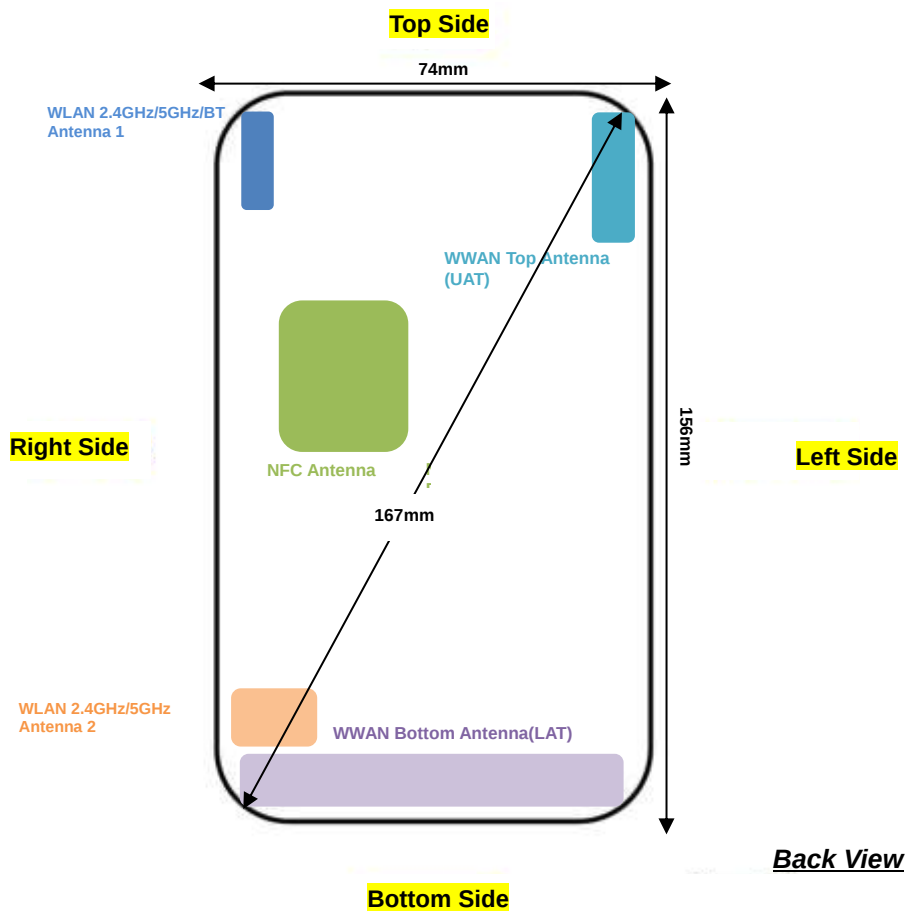

Antenna	Support Band
WWAN Top Antenna(UAT)	GSM: 850 / 1900 WCDMA: B2 / B4 / B5 LTE: B2 / B4 / B5 / B7 / B38
WWAN Bottom Antenna(LAT)	GSM: 850 / 1900 WCDMA: B2 / B4 / B5 LTE: B2 / B4 / B5 / B7 / B38
WLAN 2.4GHz/5GHz/BT Antenna 1	WLAN 2.4GHz WLAN 5GHz Bluetooth
WLAN 2.4GHz/5GHz Antenna 2	WLAN 2.4GHz WLAN 5GHz
NFC Antenna	NFC

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Top Antenna	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
WWAN Bottom Antenna	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WLAN 2.4GHz/5GHz/BT Antenna 1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
WLAN 2.4GHz/5GHz Antenna 2	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	>25mm

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Top Antenna	Yes	Yes	Yes	No	No	Yes
WWAN Bottom Antenna	Yes	Yes	No	Yes	Yes	Yes
WLAN 2.4GHz/5GHz/BT Antenna 1	Yes	Yes	Yes	No	Yes	No
WLAN 2.4GHz/5GHz Antenna 2	Yes	Yes	No	Yes	Yes	No

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
3. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
4. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold, for this device only bottom side SAR for WWAN transmitter scaled to maximum output power is higher than 1.2W/kg of GSM1900,WCDMA B2/ B4, and LTE B2/B4/B7/B38, therefore product specific SAR is necessary.
5. For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16 cm.
6. For top WWAN antenna:
 - a. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately in GSM850, WCDMA band 2/4/5, LTE B2/4/5/7/38.
 - b. When hotspot mode is enabled, power reduction will be activated to GSM850, WCDMAII/V/IV and LTE B2 / B4 / B5/B7/B38.
 - c. For GSM850, WCDMAII/V/IV and LTE B2 / B4 / B5 / 38, full power can be tested pass at 10mm distance, so reduced power no need to be evaluated.
7. For bottom WWAN antenna:
 - a. P-sensor can detect handheld state, WCDMA band II/IV and LTE band 2/4/7 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active
 - b. When hotspot mode is enabled, power reduction will be activated to GSM1900, WCDMA band II/IV, LTE band 2/4/7/38 and WLAN5.8GHz.
 - c. For WCDMA B2, while the device WLAN or Bluetooth transmitting simultaneously with the WWAN Bottom antenna at hotspot or body worn mode, power reduction enabled for this scenario.
 - d. For WLAN5.5GHz/5.8GHz, when it transmits simultaneously WWAN or Bluetooth for body worn mode, power reduction will be triggered for this scenario.
8. For WLAN antenna
 - a. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately for WLAN 2.4GHz/5.2/5.3GHz.
 - b. When hotspot mode is enabled, power reduction will be activated to WLAN5.8GHz.
 - c. For WLAN5.5GHz/5.8GHz, when it transmits simultaneously WWAN or Bluetooth for body worn mode, power reduction will be triggered for this scenario.

**GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA,) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
5. Bluetooth and WLAN share the same antenna, with similar work frequency, so for Bluetooth SAR testing, we chose the worst position of WLAN to perform.

**15.1 Head SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850-UAT	GPRS 4 Tx slots	Right Cheek	0	Reduced	189	836.4	25.54	26.00	1.112	0.02	0.988	1.098
	GSM850-UAT	GPRS 4 Tx slots	Right Cheek	0	Reduced	128	824.2	25.25	26.00	1.189	0.04	0.955	1.135
	GSM850-UAT	GPRS 4 Tx slots	Right Cheek	0	Reduced	251	848.8	25.53	26.00	1.114	0.06	0.960	1.070
	GSM850-UAT	GPRS 4 Tx slots	Right Tilted	0	Reduced	189	836.4	25.54	26.00	1.112	0.02	0.918	1.021
	GSM850-UAT	GPRS 4 Tx slots	Right Tilted	0	Reduced	128	824.2	25.25	26.00	1.189	0.01	0.907	1.078
	GSM850-UAT	GPRS 4 Tx slots	Right Tilted	0	Reduced	251	848.8	25.53	26.00	1.114	0.05	0.873	0.973
	GSM850-UAT	GPRS 4 Tx slots	Left Cheek	0	Reduced	189	836.4	25.54	26.00	1.112	0.02	0.392	0.436
	GSM850-UAT	GPRS 4 Tx slots	Left Tilted	0	Reduced	189	836.4	25.54	26.00	1.112	0.03	0.340	0.378
	GSM850-LAT	GPRS 4 Tx slots	Right Cheek	0	Full	128	824.2	26.70	28.00	1.349	0.01	0.155	0.209
	GSM850-LAT	GPRS 4 Tx slots	Right Tilted	0	Full	128	824.2	26.70	28.00	1.349	0.01	0.070	0.095
02	GSM850-LAT	GPRS 4 Tx slots	Left Cheek	0	Full	128	824.2	26.70	28.00	1.349	0.02	0.117	0.158
	GSM850-LAT	GPRS 4 Tx slots	Left Tilted	0	Full	128	824.2	26.70	28.00	1.349	0.01	0.063	0.084
	GSM1900-UAT	GPRS 4 Tx slots	Right Cheek	0	Full	661	1880	24.06	25.00	1.242	0.05	0.720	0.894
	GSM1900-UAT	GPRS 4 Tx slots	Right Cheek	0	Full	512	1850.2	23.84	25.00	1.306	0.01	0.680	0.888
	GSM1900-UAT	GPRS 4 Tx slots	Right Cheek	0	Full	810	1909.8	24.01	25.00	1.256	0.09	0.710	0.892
	GSM1900-UAT	GPRS 4 Tx slots	Right Tilted	0	Full	661	1880	24.06	25.00	1.242	0.01	0.435	0.540
	GSM1900-UAT	GPRS 4 Tx slots	Left Cheek	0	Full	661	1880	24.06	25.00	1.242	0.02	0.258	0.320
	GSM1900-UAT	GPRS 4 Tx slots	Left Tilted	0	Full	661	1880	24.06	25.00	1.242	0.02	0.205	0.255
	GSM1900-LAT	GPRS 4 Tx slots	Right Cheek	0	Full	661	1880	24.06	25.00	1.242	-0.02	0.028	0.035
	GSM1900-LAT	GPRS 4 Tx slots	Right Tilted	0	Full	661	1880	24.06	25.00	1.242	-0.05	0.023	0.029
	GSM1900-LAT	GPRS 4 Tx slots	Left Cheek	0	Full	661	1880	24.06	25.00	1.242	0.03	0.042	0.053
	GSM1900-LAT	GPRS 4 Tx slots	Left Tilted	0	Full	661	1880	24.06	25.00	1.242	0.01	0.025	0.032



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA II-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced	9538	1907.6	20.59	21.00	1.099	0.02	1.060	1.165
	WCDMA II-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced	9262	1852.4	20.54	21.00	1.112	0.07	0.981	1.091
	WCDMA II-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced	9400	1880	20.56	21.00	1.107	0.04	1.020	1.129
	WCDMA II-UAT	RMC 12.2Kbps	Right Tilted	0	Reduced	9538	1907.6	20.59	21.00	1.099	0.03	0.523	0.575
	WCDMA II-UAT	RMC 12.2Kbps	Left Cheek	0	Reduced	9538	1907.6	20.59	21.00	1.099	0.04	0.278	0.306
	WCDMA II-UAT	RMC 12.2Kbps	Left Tilted	0	Reduced	9538	1907.6	20.59	21.00	1.099	0.03	0.250	0.275
	WCDMA II-LAT	RMC 12.2Kbps	Right Cheek	0	Full	9538	1907.6	23.41	24.50	1.285	0.01	0.080	0.102
	WCDMA II-LAT	RMC 12.2Kbps	Right Tilted	0	Full	9538	1907.6	23.41	24.50	1.285	0.02	0.066	0.085
	WCDMA II-LAT	RMC 12.2Kbps	Left Cheek	0	Full	9538	1907.6	23.41	24.50	1.285	0.01	0.101	0.130
	WCDMA II-LAT	RMC 12.2Kbps	Left Tilted	0	Full	9538	1907.6	23.41	24.50	1.285	0.01	0.077	0.099
	WCDMA IV-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced	1413	1732.6	20.68	21.00	1.076	0.06	1.080	1.163
04	WCDMA IV-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced	1312	1712.4	20.67	21.00	1.079	0.02	1.090	1.176
	WCDMA IV-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced	1513	1752.6	20.56	21.00	1.107	0.08	1.050	1.162
	WCDMA IV-UAT	RMC 12.2Kbps	Right Tilted	0	Reduced	1413	1732.6	20.68	21.00	1.076	0.03	0.479	0.516
	WCDMA IV-UAT	RMC 12.2Kbps	Left Cheek	0	Reduced	1413	1732.6	20.68	21.00	1.076	0.03	0.287	0.309
	WCDMA IV-UAT	RMC 12.2Kbps	Left Tilted	0	Reduced	1413	1732.6	20.68	21.00	1.076	0.03	0.249	0.268
	WCDMA IV-LAT	RMC 12.2Kbps	Right Cheek	0	Full	1413	1732.6	23.37	24.50	1.297	0.02	0.060	0.077
	WCDMA IV-LAT	RMC 12.2Kbps	Right Tilted	0	Full	1413	1732.6	23.37	24.50	1.297	0.02	0.039	0.050
	WCDMA IV-LAT	RMC 12.2Kbps	Left Cheek	0	Full	1413	1732.6	23.37	24.50	1.297	0.01	0.089	0.115
	WCDMA IV-LAT	RMC 12.2Kbps	Left Tilted	0	Full	1413	1732.6	23.37	24.50	1.297	0.02	0.040	0.051
	WCDMA V-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced	4182	836.4	21.95	22.50	1.135	-0.04	0.917	1.041
05	WCDMA V-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced	4132	826.4	21.92	22.50	1.143	-0.08	0.971	1.110
	WCDMA V-UAT	RMC 12.2Kbps	Right Cheek	0	Reduced	4233	846.6	21.94	22.50	1.138	0.04	0.949	1.080
	WCDMA V-UAT	RMC 12.2Kbps	Right Tilted	0	Reduced	4182	836.4	21.95	22.50	1.135	-0.02	0.618	0.701
	WCDMA V-UAT	RMC 12.2Kbps	Left Cheek	0	Reduced	4182	836.4	21.95	22.50	1.135	0.05	0.351	0.398
	WCDMA V-UAT	RMC 12.2Kbps	Left Tilted	0	Reduced	4182	836.4	21.95	22.50	1.135	0.01	0.286	0.325
	WCDMA V-LAT	RMC 12.2Kbps	Right Cheek	0	Full	4132	826.4	23.37	24.50	1.297	0.01	0.171	0.222
	WCDMA V-LAT	RMC 12.2Kbps	Right Tilted	0	Full	4132	826.4	23.37	24.50	1.297	0.02	0.111	0.144
	WCDMA V-LAT	RMC 12.2Kbps	Left Cheek	0	Full	4132	826.4	23.37	24.50	1.297	0.02	0.139	0.180
	WCDMA V-LAT	RMC 12.2Kbps	Left Tilted	0	Full	4132	826.4	23.37	24.50	1.297	0.01	0.091	0.118



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 2-UAT	20M	QPSK	1	0	Right Cheek	0	Reduced	18900	1880	20.20	21.00	1.202	-0.05	0.932	1.121
	LTE Band 2-UAT	20M	QPSK	1	0	Right Cheek	0	Reduced	18700	1860	20.13	21.00	1.222	-0.01	0.877	1.072
	LTE Band 2-UAT	20M	QPSK	1	0	Right Cheek	0	Reduced	19100	1900	20.15	21.00	1.216	-0.04	0.973	1.183
	LTE Band 2-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced	18900	1880	20.31	21.00	1.172	-0.01	0.970	1.137
	LTE Band 2-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced	18700	1860	20.30	21.00	1.175	0.04	0.987	1.160
	LTE Band 2-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced	19100	1900	20.26	21.00	1.186	0.14	0.700	0.830
	LTE Band 2-UAT	20M	QPSK	100	0	Right Cheek	0	Reduced	18900	1880	20.27	21.00	1.183	-0.02	0.700	0.828
	LTE Band 2-UAT	20M	QPSK	1	0	Right Tilted	0	Reduced	18900	1880	20.20	21.00	1.202	0.03	0.406	0.488
	LTE Band 2-UAT	20M	QPSK	50	50	Right Tilted	0	Reduced	18900	1880	20.31	21.00	1.172	0.02	0.415	0.486
	LTE Band 2-UAT	20M	QPSK	1	0	Left Cheek	0	Reduced	18900	1880	20.20	21.00	1.202	-0.02	0.259	0.311
	LTE Band 2-UAT	20M	QPSK	50	50	Left Cheek	0	Reduced	18900	1880	20.31	21.00	1.172	-0.01	0.271	0.318
	LTE Band 2-UAT	20M	QPSK	1	0	Left Tilted	0	Reduced	18900	1880	20.20	21.00	1.202	0.05	0.220	0.264
	LTE Band 2-UAT	20M	QPSK	50	50	Left Tilted	0	Reduced	18900	1880	20.31	21.00	1.172	0.02	0.228	0.267
	LTE Band 2-LAT	20M	QPSK	1	0	Right Cheek	0	Full	18900	1880	22.93	24.00	1.279	0.03	0.061	0.078
	LTE Band 2-LAT	20M	QPSK	50	50	Right Cheek	0	Full	18900	1880	22.05	23.00	1.245	0.01	0.052	0.064
	LTE Band 2-LAT	20M	QPSK	1	0	Right Tilted	0	Full	18900	1880	22.93	24.00	1.279	0.02	0.052	0.066
	LTE Band 2-LAT	20M	QPSK	50	50	Right Tilted	0	Full	18900	1880	22.05	23.00	1.245	0.06	0.041	0.052
07	LTE Band 2-LAT	20M	QPSK	1	0	Left Cheek	0	Full	18900	1880	22.93	24.00	1.279	0.07	0.105	0.134
	LTE Band 2-LAT	20M	QPSK	50	50	Left Cheek	0	Full	18900	1880	22.05	23.00	1.245	-0.02	0.084	0.104
	LTE Band 2-LAT	20M	QPSK	1	0	Left Tilted	0	Full	18900	1880	22.93	24.00	1.279	0.06	0.056	0.072
	LTE Band 2-LAT	20M	QPSK	50	50	Left Tilted	0	Full	18900	1880	22.05	23.00	1.245	-0.01	0.043	0.054
	LTE Band 4-UAT	20M	QPSK	1	0	Right Cheek	0	Reduced	20175	1732.5	20.33	21.00	1.167	0.07	0.983	1.147
	LTE Band 4-UAT	20M	QPSK	50	24	Right Cheek	0	Reduced	20175	1732.5	20.41	21.00	1.146	0.02	1.020	1.168
	LTE Band 4-UAT	20M	QPSK	100	0	Right Cheek	0	Reduced	20175	1732.5	20.39	21.00	1.151	0.03	1.010	1.162
	LTE Band 4-UAT	20M	QPSK	1	0	Right Tilted	0	Reduced	20175	1732.5	20.33	21.00	1.167	0.02	0.436	0.509
	LTE Band 4-UAT	20M	QPSK	50	24	Right Tilted	0	Reduced	20175	1732.5	20.41	21.00	1.146	0.01	0.445	0.510
	LTE Band 4-UAT	20M	QPSK	1	0	Left Cheek	0	Reduced	20175	1732.5	20.33	21.00	1.167	0.03	0.270	0.315
	LTE Band 4-UAT	20M	QPSK	50	24	Left Cheek	0	Reduced	20175	1732.5	20.41	21.00	1.146	0.03	0.274	0.314
	LTE Band 4-UAT	20M	QPSK	1	0	Left Tilted	0	Reduced	20175	1732.5	20.33	21.00	1.167	0.01	0.226	0.264
	LTE Band 4-UAT	20M	QPSK	50	24	Left Tilted	0	Reduced	20175	1732.5	20.41	21.00	1.146	0.03	0.231	0.265
	LTE Band 4-LAT	20M	QPSK	1	0	Right Cheek	0	Full	20175	1732.5	22.93	24.00	1.279	0.09	0.054	0.069
	LTE Band 4-LAT	20M	QPSK	50	24	Right Cheek	0	Full	20175	1732.5	21.99	23.00	1.262	0.01	0.043	0.054
	LTE Band 4-LAT	20M	QPSK	1	0	Right Tilted	0	Full	20175	1732.5	22.93	24.00	1.279	0.03	0.040	0.051
	LTE Band 4-LAT	20M	QPSK	50	24	Right Tilted	0	Full	20175	1732.5	21.99	23.00	1.262	0.05	0.034	0.042
	LTE Band 4-LAT	20M	QPSK	1	0	Left Cheek	0	Full	20175	1732.5	22.93	24.00	1.279	-0.1	0.087	0.111
	LTE Band 4-LAT	20M	QPSK	50	24	Left Cheek	0	Full	20175	1732.5	21.99	23.00	1.262	0.02	0.070	0.088
	LTE Band 4-LAT	20M	QPSK	1	0	Left Tilted	0	Full	20175	1732.5	22.93	24.00	1.279	-0.09	0.043	0.055
	LTE Band 4-LAT	20M	QPSK	50	24	Left Tilted	0	Full	20175	1732.5	21.99	23.00	1.262	0.11	0.034	0.043



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
08	LTE Band 5-UAT	10M	QPSK	1	25	Right Cheek	0	Reduced	20525	836.5	20.98	22.00	1.265	0.03	0.812	1.027
	LTE Band 5-UAT	10M	QPSK	25	0	Right Cheek	0	Reduced	20525	836.5	21.03	22.00	1.250	0.09	0.827	1.034
	LTE Band 5-UAT	10M	QPSK	100	0	Right Cheek	0	Reduced	20525	836.5	21.06	22.00	1.242	0.06	0.810	1.006
	LTE Band 5-UAT	10M	QPSK	1	25	Right Tilted	0	Reduced	20525	836.5	20.98	22.00	1.265	0.03	0.588	0.744
	LTE Band 5-UAT	10M	QPSK	25	0	Right Tilted	0	Reduced	20525	836.5	21.03	22.00	1.250	0.02	0.596	0.745
	LTE Band 5-UAT	10M	QPSK	1	25	Left Cheek	0	Reduced	20525	836.5	20.98	22.00	1.265	0.01	0.301	0.381
	LTE Band 5-UAT	10M	QPSK	25	0	Left Cheek	0	Reduced	20525	836.5	21.03	22.00	1.250	0.03	0.304	0.380
	LTE Band 5-UAT	10M	QPSK	1	25	Left Tilted	0	Reduced	20525	836.5	20.98	22.00	1.265	-0.02	0.238	0.301
	LTE Band 5-UAT	10M	QPSK	25	0	Left Tilted	0	Reduced	20525	836.5	21.03	22.00	1.250	0.04	0.244	0.305
	LTE Band 5-LAT	10M	QPSK	1	25	Right Cheek	0	Full	20525	836.5	22.76	24.00	1.330	0.07	0.213	0.283
09	LTE Band 5-LAT	10M	QPSK	25	0	Right Cheek	0	Full	20525	836.5	21.81	23.00	1.315	0.05	0.175	0.230
	LTE Band 5-LAT	10M	QPSK	1	25	Right Tilted	0	Full	20525	836.5	22.76	24.00	1.330	0.02	0.100	0.133
	LTE Band 5-LAT	10M	QPSK	25	0	Right Tilted	0	Full	20525	836.5	21.81	23.00	1.315	0.01	0.081	0.106
	LTE Band 5-LAT	10M	QPSK	1	25	Left Cheek	0	Full	20525	836.5	22.76	24.00	1.330	0.08	0.163	0.217
	LTE Band 5-LAT	10M	QPSK	25	0	Left Cheek	0	Full	20525	836.5	21.81	23.00	1.315	0.01	0.131	0.172
	LTE Band 5-LAT	10M	QPSK	1	25	Left Tilted	0	Full	20525	836.5	22.76	24.00	1.330	0.02	0.102	0.136
	LTE Band 5-LAT	10M	QPSK	25	0	Left Tilted	0	Full	20525	836.5	21.81	23.00	1.315	0.01	0.082	0.108
	LTE Band 7-UAT	20M	QPSK	1	99	Right Cheek	0	Reduced	21100	2535	17.62	18.50	1.225	0.05	0.781	0.956
	LTE Band 7-UAT	20M	QPSK	1	99	Right Cheek	0	Reduced	20850	2510	17.55	18.50	1.245	0.05	0.803	0.999
	LTE Band 7-UAT	20M	QPSK	1	99	Right Cheek	0	Reduced	21350	2560	17.51	18.50	1.256	0.04	0.759	0.953
	LTE Band 7-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced	21100	2535	17.73	18.50	1.194	0.04	0.838	1.001
	LTE Band 7-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced	20850	2510	17.61	18.50	1.227	0.05	0.840	1.031
	LTE Band 7-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced	20850 + 21048	2510 + 2529.8	17.89	18.50	1.151	-0.03	0.790	0.909
	LTE Band 7-UAT	20M	QPSK	50	50	Right Cheek	0	Reduced	21350	2560	17.61	18.50	1.227	0.16	0.791	0.971
	LTE Band 7-UAT	20M	QPSK	100	0	Right Cheek	0	Reduced	21350	2560	17.65	18.50	1.216	0.16	0.791	0.962
	LTE Band 7-UAT	20M	QPSK	1	99	Right Tilted	0	Reduced	21100	2535	17.62	18.50	1.225	-0.17	0.460	0.563
	LTE Band 7-UAT	20M	QPSK	50	50	Right Tilted	0	Reduced	21100	2535	17.73	18.50	1.194	-0.03	0.475	0.567
	LTE Band 7-UAT	20M	QPSK	1	99	Left Cheek	0	Reduced	21100	2535	17.62	18.50	1.225	-0.05	0.324	0.397
	LTE Band 7-UAT	20M	QPSK	50	50	Left Cheek	0	Reduced	21100	2535	17.73	18.50	1.194	0.02	0.320	0.382
	LTE Band 7-UAT	20M	QPSK	1	99	Left Tilted	0	Reduced	21100	2535	17.62	18.50	1.225	-0.03	0.150	0.184
	LTE Band 7-UAT	20M	QPSK	50	50	Left Tilted	0	Reduced	21100	2535	17.73	18.50	1.194	0.02	0.158	0.189
	LTE Band 7-LAT	20M	QPSK	1	99	Right Cheek	0	Full	21100	2535	23.25	24.00	1.189	-0.07	0.087	0.104
	LTE Band 7-LAT	20M	QPSK	50	50	Right Cheek	0	Full	21100	2535	22.35	23.00	1.161	0.06	0.072	0.083
	LTE Band 7-LAT	20M	QPSK	1	99	Right Tilted	0	Full	21100	2535	23.25	24.00	1.189	0.01	0.104	0.124
	LTE Band 7-LAT	20M	QPSK	1	99	Right Tilted	0	Full	21100 + 20902	2535 + 2554.8	23.03	24.00	1.250	0.06	0.089	0.111
	LTE Band 7-LAT	20M	QPSK	50	50	Right Tilted	0	Full	21100	2535	22.35	23.00	1.161	0.09	0.086	0.099
	LTE Band 7-LAT	20M	QPSK	1	99	Left Cheek	0	Full	21100	2535	23.25	24.00	1.189	0.02	0.102	0.121
	LTE Band 7-LAT	20M	QPSK	50	50	Left Cheek	0	Full	21100	2535	22.35	23.00	1.161	0.06	0.083	0.096
	LTE Band 7-LAT	20M	QPSK	1	99	Left Tilted	0	Full	21100	2535	23.25	24.00	1.189	0.05	0.070	0.083
	LTE Band 7-LAT	20M	QPSK	50	50	Left Tilted	0	Full	21100	2535	22.35	23.00	1.161	0.02	0.057	0.066



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38-UAT	20M	QPSK	1	49	Right Cheek	0	Reduced	38000	2595	20.05	21.00	1.245	62.9	1.006	0.03	0.916	1.147
10	LTE Band 38-UAT	20M	QPSK	50	24	Right Cheek	0	Reduced	38000	2595	20.20	21.00	1.202	62.9	1.006	0.13	0.959	1.160
	LTE Band 38-UAT	20M	QPSK	50	24	Right Cheek	0	Reduced	37901 + 38099	2585.1 + 2604.9	19.86	21.00	1.300	62.9	1.006	0.06	0.873	1.142
	LTE Band 38-UAT	20M	QPSK	100	0	Right Cheek	0	Reduced	38000	2595	20.18	21.00	1.208	62.9	1.006	0.07	0.942	1.145
	LTE Band 38-UAT	20M	QPSK	1	49	Right Tilted	0	Reduced	38000	2595	20.05	21.00	1.245	62.9	1.006	-0.03	0.459	0.575
	LTE Band 38-UAT	20M	QPSK	50	24	Right Tilted	0	Reduced	38000	2595	20.20	21.00	1.202	62.9	1.006	-0.01	0.474	0.573
	LTE Band 38-UAT	20M	QPSK	1	49	Left Cheek	0	Reduced	38000	2595	20.05	21.00	1.245	62.9	1.006	-0.02	0.067	0.084
	LTE Band 38-UAT	20M	QPSK	50	24	Left Cheek	0	Reduced	38000	2595	20.20	21.00	1.202	62.9	1.006	-0.02	0.383	0.463
	LTE Band 38-UAT	20M	QPSK	1	49	Left Tilted	0	Reduced	38000	2595	20.05	21.00	1.245	62.9	1.006	0.02	0.173	0.217
	LTE Band 38-UAT	20M	QPSK	50	24	Left Tilted	0	Reduced	38000	2595	20.20	21.00	1.202	62.9	1.006	-0.02	0.178	0.215
	LTE Band 38-LAT	20M	QPSK	1	49	Right Cheek	0	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	0.02	0.064	0.072
	LTE Band 38-LAT	20M	QPSK	1	49	Right Cheek	0	Full	37901 + 38099	2585.1 + 2604.9	23.48	24.00	1.127	62.9	1.006	0.02	0.058	0.066
	LTE Band 38-LAT	20M	QPSK	50	24	Right Cheek	0	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.06	0.054	0.059
	LTE Band 38-LAT	20M	QPSK	1	49	Right Tilted	0	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	0.01	0.053	0.060
	LTE Band 38-LAT	20M	QPSK	50	24	Right Tilted	0	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	-0.01	0.044	0.049
	LTE Band 38-LAT	20M	QPSK	1	49	Left Cheek	0	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	0.05	0.058	0.066
	LTE Band 38-LAT	20M	QPSK	50	24	Left Cheek	0	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	-0.09	0.048	0.052
	LTE Band 38-LAT	20M	QPSK	1	49	Left Tilted	0	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	-0.02	0.036	0.040
	LTE Band 38-LAT	20M	QPSK	50	24	Left Tilted	0	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.07	0.029	0.032



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0	1	Reduced	11	2462	19.45	19.50	1.012	100	1.000	0.01	0.231	0.234
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0	1	Reduced	11	2462	19.45	19.50	1.012	100	1.000	0.03	0.319	0.323
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0	1	Reduced	11	2462	19.45	19.50	1.012	100	1.000	0.04	1.030	1.042
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0	1	Reduced	6	2437	19.38	19.50	1.028	100	1.000	-0.03	0.972	0.999
11	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0	1	Reduced	11	2462	19.45	19.50	1.012	100	1.000	0.05	1.150	1.163
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0	1	Reduced	6	2437	19.38	19.50	1.028	100	1.000	0.1	1.040	1.069
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0	1+2	Reduced	11	2462	22.49	22.50	1.002	100	1.000	0.02	0.308	0.309
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0	1+2	Reduced	11	2462	22.49	22.50	1.002	100	1.000	0.06	0.414	0.415
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0	1+2	Reduced	11	2462	22.49	22.50	1.002	100	1.000	0.03	0.944	0.946
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0	1+2	Reduced	6	2437	22.43	22.50	1.016	100	1.000	-0.04	1.080	1.098
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0	1+2	Reduced	11	2462	22.49	22.50	1.002	100	1.000	0.04	0.924	0.926

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
12	Bluetooth	1Mbps	Left Tilted	0	39	2441	13.35	13.50	1.035	79.61	1.046	-0.1	0.177	0.192



<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	0	2	Reduced	60	5300	13.90	14.50	1.148	97.93	1.021	0.02	0.029	0.034
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	0	2	Reduced	60	5300	13.90	14.50	1.148	97.93	1.021	0.01	0.006	0.007
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0	2	Reduced	60	5300	13.90	14.50	1.148	97.93	1.021	-0.03	0.007	0.008
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0	2	Reduced	60	5300	13.90	14.50	1.148	97.93	1.021	0.01	0.008	0.009
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	0	1+2	Reduced	64	5320	16.89	17.50	1.151	97.93	1.021	0.02	0.157	0.184
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	0	1+2	Reduced	64	5320	16.89	17.50	1.151	97.93	1.021	0.01	0.102	0.120
13	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0	1+2	Reduced	64	5320	16.89	17.50	1.151	97.93	1.021	-0.03	0.705	0.828
	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	0	1+2	Reduced	56	5280	16.88	17.50	1.153	97.93	1.021	0.01	0.685	0.807
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	0	1+2	Reduced	64	5320	16.89	17.50	1.151	97.93	1.021	0.02	0.489	0.575
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0	2	Full	132	5660	16.90	17.50	1.148	97.93	1.021	0.05	0.006	0.007
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0	2	Full	132	5660	16.90	17.50	1.148	97.93	1.021	0.07	0.011	0.013
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0	2	Full	132	5660	16.90	17.50	1.148	97.93	1.021	-0.05	0.006	0.007
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0	2	Full	132	5660	16.90	17.50	1.148	97.93	1.021	-0.03	0.016	0.018
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0	1+2	Full	132	5660	19.94	20.50	1.138	97.93	1.021	0.01	0.144	0.167
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0	1+2	Full	132	5660	19.94	20.50	1.138	97.93	1.021	0.03	0.141	0.164
14	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0	1+2	Full	132	5660	19.94	20.50	1.138	97.93	1.021	-0.02	0.416	0.483
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0	1+2	Full	132	5660	19.94	20.50	1.138	97.93	1.021	0.06	0.344	0.400
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	0	2	Full	161	5805	16.90	17.50	1.148	97.93	1.021	0.02	0.062	0.073
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	0	2	Full	161	5805	16.90	17.50	1.148	97.93	1.021	0.01	0.018	0.021
	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	0	2	Full	161	5805	16.90	17.50	1.148	97.93	1.021	-0.03	0.072	0.084
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0	2	Full	161	5805	16.90	17.50	1.148	97.93	1.021	0.01	0.035	0.041
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	0	1+2	Full	161	5805	19.89	20.50	1.151	97.93	1.021	0.02	0.162	0.190
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	0	1+2	Full	161	5805	19.89	20.50	1.151	97.93	1.021	0.01	0.173	0.203
15	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	0	1+2	Full	161	5805	19.89	20.50	1.151	97.93	1.021	0.01	0.391	0.459
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0	1+2	Full	161	5805	19.89	20.50	1.151	97.93	1.021	-0.02	0.385	0.452



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850-UAT	GPRS 4 Tx slots	Front	10	Full	128	824.2	26.70	28.00	1.349	-0.08	0.285	0.384
	GSM850-UAT	GPRS 4 Tx slots	Back	10	Full	128	824.2	26.70	28.00	1.349	-0.08	0.383	0.517
16	GSM850-UAT	GPRS 4 Tx slots	Left Side	10	Full	128	824.2	26.70	28.00	1.349	0.03	0.433	0.584
	GSM850-UAT	GPRS 4 Tx slots	Right Side	10	Full	128	824.2	26.70	28.00	1.349	-0.02	0.053	0.072
	GSM850-UAT	GPRS 4 Tx slots	Top Side	10	Full	128	824.2	26.70	28.00	1.349	0.05	0.223	0.301
	GSM850-LAT	GPRS 4 Tx slots	Front	10	Full	128	824.2	26.70	28.00	1.349	-0.18	0.231	0.312
	GSM850-LAT	GPRS 4 Tx slots	Back	10	Full	128	824.2	26.70	28.00	1.349	0.01	0.302	0.407
	GSM850-LAT	GPRS 4 Tx slots	Left Side	10	Full	128	824.2	26.70	28.00	1.349	0.02	0.125	0.169
	GSM850-LAT	GPRS 4 Tx slots	Right Side	10	Full	128	824.2	26.70	28.00	1.349	0.01	0.266	0.359
	GSM850-LAT	GPRS 4 Tx slots	Bottom Side	10	Full	128	824.2	26.70	28.00	1.349	-0.02	0.207	0.279
	GSM1900-UAT	GPRS 4 Tx slots	Front	10	Full	661	1880	24.06	25.00	1.242	-0.02	0.111	0.138
	GSM1900-UAT	GPRS 4 Tx slots	Back	10	Full	661	1880	24.06	25.00	1.242	0.01	0.116	0.144
	GSM1900-UAT	GPRS 4 Tx slots	Left Side	10	Full	661	1880	24.06	25.00	1.242	-0.04	0.289	0.359
	GSM1900-UAT	GPRS 4 Tx slots	Right Side	10	Full	661	1880	24.06	25.00	1.242	0.01	0.025	0.030
	GSM1900-UAT	GPRS 4 Tx slots	Top Side	10	Full	661	1880	24.06	25.00	1.242	0.01	0.092	0.114
	GSM1900-LAT	GPRS 4 Tx slots	Front	10	Reduced	661	1880	22.85	23.50	1.161	0.01	0.311	0.361
	GSM1900-LAT	GPRS 4 Tx slots	Back	10	Reduced	661	1880	22.85	23.50	1.161	0.01	0.375	0.436
	GSM1900-LAT	GPRS 4 Tx slots	Left Side	10	Reduced	661	1880	22.85	23.50	1.161	0.01	0.045	0.053
	GSM1900-LAT	GPRS 4 Tx slots	Right Side	10	Reduced	661	1880	22.85	23.50	1.161	0.02	0.073	0.085
	GSM1900-LAT	GPRS 4 Tx slots	Bottom Side	10	Reduced	661	1880	22.85	23.50	1.161	0.1	0.876	1.017
	GSM1900-LAT	GPRS 4 Tx slots	Bottom Side	10	Reduced	512	1850.2	22.81	23.50	1.172	0.14	0.850	0.996
17	GSM1900-LAT	GPRS 4 Tx slots	Bottom Side	10	Reduced	810	1909.8	22.83	23.50	1.167	0.04	0.955	1.114



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II-UAT	RMC 12.2Kbps	Front	10	Full	9538	1907.6	23.41	24.50	1.285	0.07	0.327	0.420
	WCDMA II-UAT	RMC 12.2Kbps	Back	10	Full	9538	1907.6	23.41	24.50	1.285	-0.16	0.347	0.446
	WCDMA II-UAT	RMC 12.2Kbps	Left Side	10	Full	9538	1907.6	23.41	24.50	1.285	-0.06	0.921	1.184
	WCDMA II-UAT	RMC 12.2Kbps	Left Side	10	Full	9262	1852.4	23.32	24.50	1.312	-0.03	0.836	1.097
	WCDMA II-UAT	RMC 12.2Kbps	Left Side	10	Full	9400	1880	23.38	24.50	1.294	-0.05	0.873	1.130
	WCDMA II-UAT	RMC 12.2Kbps	Right Side	10	Full	9538	1907.6	23.41	24.50	1.285	0.03	0.067	0.086
	WCDMA II-UAT	RMC 12.2Kbps	Top Side	10	Full	9538	1907.6	23.41	24.50	1.285	0.01	0.261	0.335
	WCDMA II-LAT	RMC 12.2Kbps	Front	10	Reduced	9400	1880	17.94	19.00	1.276	-0.14	0.336	0.429
	WCDMA II-LAT	RMC 12.2Kbps	Back	10	Reduced	9400	1880	17.94	19.00	1.276	0.05	0.365	0.466
	WCDMA II-LAT	RMC 12.2Kbps	Left Side	10	Reduced	9400	1880	17.94	19.00	1.276	0.01	0.025	0.032
	WCDMA II-LAT	RMC 12.2Kbps	Right Side	10	Reduced	9400	1880	17.94	19.00	1.276	0.01	0.062	0.080
18	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	9400	1880	17.94	19.00	1.276	0.03	0.935	1.193
	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	9262	1852.4	17.91	19.00	1.285	0.09	0.823	1.058
	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	9538	1907.6	17.92	19.00	1.282	0.1	0.855	1.096
	WCDMA IV-UAT	RMC 12.2Kbps	Front	10	Full	1413	1732.6	23.37	24.50	1.297	0.08	0.352	0.457
	WCDMA IV-UAT	RMC 12.2Kbps	Back	10	Full	1413	1732.6	23.37	24.50	1.297	-0.01	0.359	0.466
	WCDMA IV-UAT	RMC 12.2Kbps	Left Side	10	Full	1413	1732.6	23.37	24.50	1.297	-0.08	0.871	1.130
	WCDMA IV-UAT	RMC 12.2Kbps	Left Side	10	Full	1312	1712.4	23.26	24.50	1.330	-0.07	0.839	1.116
19	WCDMA IV-UAT	RMC 12.2Kbps	Left Side	10	Full	1513	1752.6	23.23	24.50	1.340	-0.06	0.855	1.145
	WCDMA IV-UAT	RMC 12.2Kbps	Right Side	10	Full	1413	1732.6	23.37	24.50	1.297	0.01	0.074	0.096
	WCDMA IV-UAT	RMC 12.2Kbps	Top Side	10	Full	1413	1732.6	23.37	24.50	1.297	0.14	0.251	0.326
	WCDMA IV-LAT	RMC 12.2Kbps	Front	10	Reduced	1413	1732.6	20.45	21.50	1.274	0.01	0.311	0.396
	WCDMA IV-LAT	RMC 12.2Kbps	Back	10	Reduced	1413	1732.6	20.45	21.50	1.274	-0.1	0.402	0.512
	WCDMA IV-LAT	RMC 12.2Kbps	Left Side	10	Reduced	1413	1732.6	20.45	21.50	1.274	0.03	0.059	0.075
	WCDMA IV-LAT	RMC 12.2Kbps	Right Side	10	Reduced	1413	1732.6	20.45	21.50	1.274	0.01	0.061	0.077
	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	1413	1732.6	20.45	21.50	1.274	0.07	0.795	1.012
	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	1312	1712.4	20.41	21.50	1.285	0.09	0.796	1.023
	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	10	Reduced	1513	1752.6	20.31	21.50	1.315	0.04	0.808	1.063
	WCDMA V-UAT	RMC 12.2Kbps	Front	10	Full	4132	826.4	23.37	24.50	1.297	-0.01	0.311	0.403
	WCDMA V-UAT	RMC 12.2Kbps	Back	10	Full	4132	826.4	23.37	24.50	1.297	-0.04	0.338	0.438
20	WCDMA V-UAT	RMC 12.2Kbps	Left Side	10	Full	4132	826.4	23.37	24.50	1.297	0.01	0.434	0.563
	WCDMA V-UAT	RMC 12.2Kbps	Right Side	10	Full	4132	826.4	23.37	24.50	1.297	0.03	0.054	0.070
	WCDMA V-UAT	RMC 12.2Kbps	Top Side	10	Full	4132	826.4	23.37	24.50	1.297	0.03	0.194	0.252
	WCDMA V-LAT	RMC 12.2Kbps	Front	10	Full	4132	826.4	23.37	24.50	1.297	0.02	0.263	0.341
	WCDMA V-LAT	RMC 12.2Kbps	Back	10	Full	4132	826.4	23.37	24.50	1.297	0.04	0.314	0.407
	WCDMA V-LAT	RMC 12.2Kbps	Left Side	10	Full	4132	826.4	23.37	24.50	1.297	0.01	0.109	0.141
	WCDMA V-LAT	RMC 12.2Kbps	Right Side	10	Full	4132	826.4	23.37	24.50	1.297	0.01	0.295	0.383
	WCDMA V-LAT	RMC 12.2Kbps	Bottom Side	10	Full	4132	826.4	23.37	24.50	1.297	-0.14	0.244	0.317



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2-UAT	20M	QPSK	1	0	Front	10	Full	18900	1880	22.93	24.00	1.279	-0.06	0.252	0.322
	LTE Band 2-UAT	20M	QPSK	50	50	Front	10	Full	18900	1880	22.05	23.00	1.245	0.03	0.222	0.276
	LTE Band 2-UAT	20M	QPSK	1	0	Back	10	Full	18900	1880	22.93	24.00	1.279	-0.04	0.268	0.343
	LTE Band 2-UAT	20M	QPSK	50	50	Back	10	Full	18900	1880	22.05	23.00	1.245	0.02	0.235	0.292
	LTE Band 2-UAT	20M	QPSK	1	0	Left Side	10	Full	18900	1880	22.93	24.00	1.279	0.04	0.769	0.984
	LTE Band 2-UAT	20M	QPSK	1	0	Left Side	10	Full	18700	1860	22.89	24.00	1.291	0.02	0.733	0.946
	LTE Band 2-UAT	20M	QPSK	1	0	Left Side	10	Full	19100	1900	22.83	24.00	1.309	-0.17	0.815	1.067
	LTE Band 2-UAT	20M	QPSK	50	50	Left Side	10	Full	18900	1880	22.05	23.00	1.245	0.03	0.661	0.823
	LTE Band 2-UAT	20M	QPSK	50	50	Left Side	10	Full	18700	1860	22.00	23.00	1.259	0.02	0.591	0.744
	LTE Band 2-UAT	20M	QPSK	50	50	Left Side	10	Full	19100	1900	21.96	23.00	1.271	0.01	0.605	0.769
	LTE Band 2-UAT	20M	QPSK	100	0	Left Side	10	Full	18900	1880	22.03	23.00	1.250	0.09	0.653	0.816
	LTE Band 2-UAT	20M	QPSK	1	0	Right Side	10	Full	18900	1880	22.93	24.00	1.279	0.01	0.060	0.077
	LTE Band 2-UAT	20M	QPSK	50	50	Right Side	10	Full	18900	1880	22.05	23.00	1.245	0.05	0.050	0.062
	LTE Band 2-UAT	20M	QPSK	1	0	Top Side	10	Full	18900	1880	22.93	24.00	1.279	-0.09	0.211	0.270
	LTE Band 2-UAT	20M	QPSK	50	50	Top Side	10	Full	18900	1880	22.05	23.00	1.245	0.01	0.175	0.218
	LTE Band 2-LAT	20M	QPSK	1	0	Front	10	Reduced	18900	1880	17.23	18.50	1.340	0.03	0.261	0.350
	LTE Band 2-LAT	20M	QPSK	50	50	Front	10	Reduced	18900	1880	17.25	18.50	1.334	0.01	0.264	0.352
	LTE Band 2-LAT	20M	QPSK	1	0	Back	10	Reduced	18900	1880	17.23	18.50	1.340	0.08	0.311	0.417
	LTE Band 2-LAT	20M	QPSK	50	50	Back	10	Reduced	18900	1880	17.25	18.50	1.334	0.1	0.308	0.411
	LTE Band 2-LAT	20M	QPSK	1	0	Left Side	10	Reduced	18900	1880	17.23	18.50	1.340	0.01	0.032	0.043
	LTE Band 2-LAT	20M	QPSK	50	50	Left Side	10	Reduced	18900	1880	17.25	18.50	1.334	0.02	0.030	0.040
	LTE Band 2-LAT	20M	QPSK	1	0	Right Side	10	Reduced	18900	1880	17.23	18.50	1.340	0.01	0.063	0.084
	LTE Band 2-LAT	20M	QPSK	50	50	Right Side	10	Reduced	18900	1880	17.25	18.50	1.334	0.02	0.059	0.079
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	10	Reduced	18900	1880	17.23	18.50	1.340	0.04	0.765	1.025
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	10	Reduced	18700	1860	17.11	18.50	1.377	0.02	0.716	0.986
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	10	Reduced	19100	1900	17.09	18.50	1.384	0.05	0.802	1.110
	LTE Band 2-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	18900	1880	17.25	18.50	1.334	0.06	0.820	1.093
	LTE Band 2-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	18700	1860	17.18	18.50	1.355	0.07	0.788	1.068
21	LTE Band 2-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	19100	1900	17.20	18.50	1.349	0.02	0.844	1.139
	LTE Band 2-LAT	20M	QPSK	100	0	Bottom Side	10	Reduced	18900	1880	17.26	18.50	1.330	0.08	0.806	1.072
	LTE Band 4-UAT	20M	QPSK	1	0	Front	10	Full	20175	1732.5	22.93	24.00	1.279	-0.02	0.301	0.385
	LTE Band 4-UAT	20M	QPSK	50	24	Front	10	Full	20175	1732.5	21.99	23.00	1.262	0.01	0.250	0.315
	LTE Band 4-UAT	20M	QPSK	1	0	Back	10	Full	20175	1732.5	22.93	24.00	1.279	-0.04	0.320	0.409
	LTE Band 4-UAT	20M	QPSK	50	24	Back	10	Full	20175	1732.5	21.99	23.00	1.262	0.03	0.267	0.337
	LTE Band 4-UAT	20M	QPSK	1	0	Left Side	10	Full	20175	1732.5	22.93	24.00	1.279	0.07	0.709	0.907
	LTE Band 4-UAT	20M	QPSK	50	24	Left Side	10	Full	20175	1732.5	21.99	23.00	1.262	0.01	0.554	0.699
	LTE Band 4-UAT	20M	QPSK	100	0	Left Side	10	Full	20175	1732.5	21.94	23.00	1.276	0.06	0.551	0.703
	LTE Band 4-UAT	20M	QPSK	1	0	Right Side	10	Full	20175	1732.5	22.93	24.00	1.279	0.02	0.074	0.095
	LTE Band 4-UAT	20M	QPSK	50	24	Right Side	10	Full	20175	1732.5	21.99	23.00	1.262	0.06	0.063	0.079
	LTE Band 4-UAT	20M	QPSK	1	0	Top Side	10	Full	20175	1732.5	22.93	24.00	1.279	0.07	0.223	0.285
	LTE Band 4-UAT	20M	QPSK	50	24	Top Side	10	Full	20175	1732.5	21.99	23.00	1.262	-0.01	0.190	0.240
	LTE Band 4-LAT	20M	QPSK	1	0	Front	10	Reduced	20175	1732.5	20.58	21.50	1.236	0.01	0.278	0.344
	LTE Band 4-LAT	20M	QPSK	50	24	Front	10	Reduced	20175	1732.5	20.52	21.50	1.253	0.03	0.286	0.358
	LTE Band 4-LAT	20M	QPSK	1	0	Back	10	Reduced	20175	1732.5	20.58	21.50	1.236	0.04	0.387	0.478
	LTE Band 4-LAT	20M	QPSK	50	24	Back	10	Reduced	20175	1732.5	20.52	21.50	1.253	0.08	0.393	0.492
	LTE Band 4-LAT	20M	QPSK	1	0	Left Side	10	Reduced	20175	1732.5	20.58	21.50	1.236	0.01	0.054	0.067
	LTE Band 4-LAT	20M	QPSK	50	24	Left Side	10	Reduced	20175	1732.5	20.52	21.50	1.253	0.05	0.060	0.076
	LTE Band 4-LAT	20M	QPSK	1	0	Right Side	10	Reduced	20175	1732.5	20.58	21.50	1.236	-0.01	0.061	0.076
	LTE Band 4-LAT	20M	QPSK	50	24	Right Side	10	Reduced	20175	1732.5	20.52	21.50	1.253	0.03	0.064	0.080
	LTE Band 4-LAT	20M	QPSK	1	0	Bottom Side	10	Reduced	20175	1732.5	20.58	21.50	1.236	0.06	0.809	1.000
	LTE Band 4-LAT	20M	QPSK	50	24	Bottom Side	10	Reduced	20175	1732.5	20.52	21.50	1.253	0.03	0.820	1.028
22	LTE Band 4-LAT	20M	QPSK	100	0	Bottom Side	10	Reduced	20175	1732.5	20.48	21.50	1.265	0.04	0.819	1.036



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5-UAT	10M	QPSK	1	25	Front	10	Full	20525	836.5	22.76	24.00	1.330	0.08	0.289	0.385
	LTE Band 5-UAT	10M	QPSK	25	0	Front	10	Full	20525	836.5	21.81	23.00	1.315	0.06	0.220	0.289
	LTE Band 5-UAT	10M	QPSK	1	25	Back	10	Full	20525	836.5	22.76	24.00	1.330	-0.01	0.333	0.443
	LTE Band 5-UAT	10M	QPSK	25	0	Back	10	Full	20525	836.5	21.81	23.00	1.315	-0.04	0.277	0.364
23	LTE Band 5-UAT	10M	QPSK	1	25	Left Side	10	Full	20525	836.5	22.76	24.00	1.330	-0.01	0.393	0.523
	LTE Band 5-UAT	10M	QPSK	25	0	Left Side	10	Full	20525	836.5	21.81	23.00	1.315	0.01	0.311	0.409
	LTE Band 5-UAT	10M	QPSK	1	25	Right Side	10	Full	20525	836.5	22.76	24.00	1.330	0.04	0.079	0.105
	LTE Band 5-UAT	10M	QPSK	25	0	Right Side	10	Full	20525	836.5	21.81	23.00	1.315	0.13	0.062	0.081
	LTE Band 5-UAT	10M	QPSK	1	25	Top Side	10	Full	20525	836.5	22.76	24.00	1.330	0.01	0.198	0.263
	LTE Band 5-UAT	10M	QPSK	25	0	Top Side	10	Full	20525	836.5	21.81	23.00	1.315	0.01	0.159	0.209
	LTE Band 5-LAT	10M	QPSK	1	25	Front	10	Full	20525	836.5	22.76	24.00	1.330	-0.1	0.240	0.319
	LTE Band 5-LAT	10M	QPSK	25	0	Front	10	Full	20525	836.5	21.81	23.00	1.315	0.02	0.204	0.268
	LTE Band 5-LAT	10M	QPSK	1	25	Back	10	Full	20525	836.5	22.76	24.00	1.330	-0.07	0.316	0.420
	LTE Band 5-LAT	10M	QPSK	25	0	Back	10	Full	20525	836.5	21.81	23.00	1.315	0.01	0.253	0.333
	LTE Band 5-LAT	10M	QPSK	1	25	Left Side	10	Full	20525	836.5	22.76	24.00	1.330	0.01	0.084	0.112
	LTE Band 5-LAT	10M	QPSK	25	0	Left Side	10	Full	20525	836.5	21.81	23.00	1.315	0.02	0.069	0.091
	LTE Band 5-LAT	10M	QPSK	1	25	Right Side	10	Full	20525	836.5	22.76	24.00	1.330	0.02	0.254	0.338
	LTE Band 5-LAT	10M	QPSK	25	0	Right Side	10	Full	20525	836.5	21.81	23.00	1.315	-0.02	0.207	0.272
	LTE Band 5-LAT	10M	QPSK	1	25	Bottom Side	10	Full	20525	836.5	22.76	24.00	1.330	0.01	0.200	0.266
	LTE Band 5-LAT	10M	QPSK	25	0	Bottom Side	10	Full	20525	836.5	21.81	23.00	1.315	0.03	0.158	0.208
	LTE Band 7-UAT	20M	QPSK	1	99	Front	10	Reduced	21100	2535	17.62	18.50	1.225	0.02	0.189	0.231
	LTE Band 7-UAT	20M	QPSK	50	50	Front	10	Reduced	21100	2535	17.73	18.50	1.194	0.01	0.199	0.238
	LTE Band 7-UAT	20M	QPSK	1	99	Back	10	Reduced	21100	2535	17.62	18.50	1.225	0.02	0.176	0.216
	LTE Band 7-UAT	20M	QPSK	50	50	Back	10	Reduced	21100	2535	17.73	18.50	1.194	-0.06	0.180	0.215
	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	10	Reduced	21100	2535	17.62	18.50	1.225	0.01	0.418	0.512
	LTE Band 7-UAT	20M	QPSK	50	50	Left Side	10	Reduced	21100	2535	17.73	18.50	1.194	0.01	0.436	0.521
	LTE Band 7-UAT	20M	QPSK	50	50	Left Side	10	Reduced	21100 + 20902	2535 + 2554.8	17.17	18.50	1.358	-0.08	0.361	0.49
	LTE Band 7-UAT	20M	QPSK	1	99	Right Side	10	Reduced	21100	2535	17.62	18.50	1.225	0.02	0.014	0.017
	LTE Band 7-UAT	20M	QPSK	50	50	Right Side	10	Reduced	21100	2535	17.73	18.50	1.194	0.01	0.017	0.020
	LTE Band 7-UAT	20M	QPSK	1	99	Top Side	10	Reduced	21100	2535	17.62	18.50	1.225	0.02	0.071	0.087
	LTE Band 7-UAT	20M	QPSK	50	50	Top Side	10	Reduced	21100	2535	17.73	18.50	1.194	-0.03	0.072	0.086
	LTE Band 7-LAT	20M	QPSK	1	99	Front	10	Reduced	21100	2535	19.15	20.00	1.216	0.01	0.252	0.306
	LTE Band 7-LAT	20M	QPSK	50	50	Front	10	Reduced	21100	2535	18.99	20.00	1.262	0.02	0.264	0.333
	LTE Band 7-LAT	20M	QPSK	1	99	Back	10	Reduced	21100	2535	19.15	20.00	1.216	0.01	0.288	0.350
	LTE Band 7-LAT	20M	QPSK	50	50	Back	10	Reduced	21100	2535	18.99	20.00	1.262	0.04	0.303	0.382
	LTE Band 7-LAT	20M	QPSK	1	99	Left Side	10	Reduced	21100	2535	19.15	20.00	1.216	-0.03	0.104	0.126
	LTE Band 7-LAT	20M	QPSK	50	50	Left Side	10	Reduced	21100	2535	18.99	20.00	1.262	0.03	0.109	0.138
	LTE Band 7-LAT	20M	QPSK	1	99	Right Side	10	Reduced	21100	2535	19.15	20.00	1.216	0.01	0.057	0.069
	LTE Band 7-LAT	20M	QPSK	50	50	Right Side	10	Reduced	21100	2535	18.99	20.00	1.262	-0.03	0.060	0.075
	LTE Band 7-LAT	20M	QPSK	1	99	Bottom Side	10	Reduced	21100	2535	19.15	20.00	1.216	-0.06	0.681	0.828
	LTE Band 7-LAT	20M	QPSK	1	99	Bottom Side	10	Reduced	20850	2510	19.09	20.00	1.233	0.08	0.599	0.739
	LTE Band 7-LAT	20M	QPSK	1	99	Bottom Side	10	Reduced	21350	2560	19.10	20.00	1.230	-0.02	0.739	0.909
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	21100	2535	18.99	20.00	1.262	0.09	0.707	0.892
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	20850	2510	18.86	20.00	1.300	0.04	0.608	0.791
24	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	21350	2560	18.87	20.00	1.297	-0.03	0.756	0.981
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	10	Reduced	21350 + 21152	2560 + 2540.2	18.57	20.00	1.390	0.06	0.665	0.924
	LTE Band 7-LAT	20M	QPSK	100	0	Bottom Side	10	Reduced	21100	2535	18.90	20.00	1.288	0.01	0.688	0.886



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38-UAT	20M	QPSK	1	49	Front	10	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	0.03	0.551	0.621
	LTE Band 38-UAT	20M	QPSK	50	24	Front	10	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.12	0.353	0.387
	LTE Band 38-UAT	20M	QPSK	1	49	Back	10	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	-0.07	0.360	0.405
	LTE Band 38-UAT	20M	QPSK	50	24	Back	10	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	-0.07	0.298	0.326
25	LTE Band 38-UAT	20M	QPSK	1	49	Left Side	10	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	-0.02	1.030	1.160
	LTE Band 38-UAT	20M	QPSK	1	49	Left Side	10	Full	37901 + 38099	2585.1 + 2604.9	23.48	24.00	1.127	62.9	1.006	0.01	0.950	1.077
	LTE Band 38-UAT	20M	QPSK	50	24	Left Side	10	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.01	0.841	0.921
	LTE Band 38-UAT	20M	QPSK	100	0	Left Side	10	Full	38000	2595	22.56	23.00	1.107	62.9	1.006	0.01	0.840	0.935
	LTE Band 38-UAT	20M	QPSK	1	49	Right Side	10	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	0.03	0.026	0.029
	LTE Band 38-UAT	20M	QPSK	50	24	Right Side	10	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.04	0.021	0.023
	LTE Band 38-UAT	20M	QPSK	1	49	Top Side	10	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	-0.12	0.224	0.252
	LTE Band 38-UAT	20M	QPSK	50	24	Top Side	10	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.01	0.179	0.196
	LTE Band 38-LAT	20M	QPSK	1	0	Front	10	Reduced	38000	2595	20.91	22.00	1.285	62.9	1.006	-0.02	0.257	0.332
	LTE Band 38-LAT	20M	QPSK	50	24	Front	10	Reduced	38000	2595	20.89	22.00	1.291	62.9	1.006	0.01	0.269	0.349
	LTE Band 38-LAT	20M	QPSK	1	0	Back	10	Reduced	38000	2595	20.91	22.00	1.285	62.9	1.006	0.09	0.300	0.388
	LTE Band 38-LAT	20M	QPSK	50	24	Back	10	Reduced	38000	2595	20.89	22.00	1.291	62.9	1.006	0.06	0.311	0.404
	LTE Band 38-LAT	20M	QPSK	1	0	Left Side	10	Reduced	38000	2595	20.91	22.00	1.285	62.9	1.006	0.01	0.155	0.200
	LTE Band 38-LAT	20M	QPSK	50	24	Left Side	10	Reduced	38000	2595	20.89	22.00	1.291	62.9	1.006	-0.03	0.118	0.153
	LTE Band 38-LAT	20M	QPSK	1	0	Right Side	10	Reduced	38000	2595	20.91	22.00	1.285	62.9	1.006	0.03	0.061	0.079
	LTE Band 38-LAT	20M	QPSK	50	24	Right Side	10	Reduced	38000	2595	20.89	22.00	1.291	62.9	1.006	0.01	0.067	0.087
	LTE Band 38-LAT	20M	QPSK	1	0	Bottom Side	10	Reduced	38000	2595	20.91	22.00	1.285	62.9	1.006	0.08	0.744	0.962
	LTE Band 38-LAT	20M	QPSK	50	24	Bottom Side	10	Reduced	38000	2595	20.89	22.00	1.291	62.9	1.006	0.05	0.772	1.003
	LTE Band 38-LAT	20M	QPSK	100	0	Bottom Side	10	Reduced	38000	2595	20.83	22.00	1.309	62.9	1.006	-0.07	0.764	1.006
	LTE Band 38-LAT	20M	QPSK	100	0	Bottom Side	10	Reduced	37901 + 38099	2585.1 + 2604.9	20.85	22.00	1.303	62.9	1.006	0.02	0.729	0.956



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	1	Full	11	2412	21.33	21.50	1.040	100	1.000	0.407	0.01	0.165	0.172
	WLAN2.4GHz	802.11b 1Mbps	Back	10	1	Full	11	2412	21.33	21.50	1.040	100	1.000	0.572	0.03	0.372	0.387
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10	1	Full	11	2412	21.33	21.50	1.040	100	1.000	0.495			
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10	1	Full	11	2412	21.33	21.50	1.040	100	1.000	0.994	-0.09	0.628	0.653
	WLAN2.4GHz	802.11b 1Mbps	Front	10	1+2	Full	11	2462	24.24	24.50	1.063	100	1.000	0.571	0.08	0.198	0.210
	WLAN2.4GHz	802.11b 1Mbps	Back	10	1+2	Full	11	2462	24.24	24.50	1.063	100	1.000	0.625	-0.03	0.399	0.424
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10	1+2	Full	11	2462	24.24	24.50	1.063	100	1.000	0.511			
26	WLAN2.4GHz	802.11b 1Mbps	Top Side	10	1+2	Full	11	2462	24.24	24.50	1.063	100	1.000	1.210	0.15	0.764	0.812
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10	1+2	Full	6	2437	24.19	24.50	1.075	100	1.000		-0.03	0.712	0.765
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	10	1+2	Full	11	2462	24.24	24.50	1.063	100	1.000	0.247	-0.02	0.189	0.201

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
27	Bluetooth	1Mbps	Top Side	10	39	2441	13.35	13.50	1.035	76.91	1.083	0.08	0.098	0.110



<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Front	10	2	Full	40	5200	16.72	17.50	1.197	97.93	1.021	0.031			
	WLAN5.2GHz	802.11a 6Mbps	Back	10	2	Full	40	5200	16.72	17.50	1.197	97.93	1.021	0.286	0.06	0.132	0.161
	WLAN5.2GHz	802.11a 6Mbps	Right Side	10	2	Full	40	5200	16.72	17.50	1.197	97.93	1.021	0.199			
	WLAN5.2GHz	802.11a 6Mbps	Bottom Side	10	2	Full	40	5200	16.72	17.50	1.197	97.93	1.021	0.079			
	WLAN5.2GHz	802.11a 6Mbps	Front	10	1+2	Full	40	5200	19.87	20.50	1.156	97.93	1.021	0.325			
28	WLAN5.2GHz	802.11a 6Mbps	Back	10	1+2	Full	40	5200	19.87	20.50	1.156	97.93	1.021	0.694	0.05	0.320	0.378
	WLAN5.2GHz	802.11a 6Mbps	Right Side	10	1+2	Full	40	5200	19.87	20.50	1.156	97.93	1.021	0.287			
	WLAN5.2GHz	802.11a 6Mbps	Top Side	10	1+2	Full	40	5200	19.87	20.50	1.156	97.93	1.021	0.307			
	WLAN5.2GHz	802.11a 6Mbps	Bottom Side	10	1+2	Full	40	5200	19.87	20.50	1.156	97.93	1.021	0.065			
	WLAN5.8GHz	802.11a 6Mbps	Front	10	2	Reduced	161	5805	13.21	13.50	1.069	97.93	1.021	0.030	0.01	0.006	0.007
29	WLAN5.8GHz	802.11a 6Mbps	Back	10	2	Reduced	161	5805	13.21	13.50	1.069	97.93	1.021	1.540	0.05	0.597	0.652
	WLAN5.8GHz	802.11a 6Mbps	Right Side	10	2	Reduced	161	5805	13.21	13.50	1.069	97.93	1.021	0.122	0.06	0.050	0.055
	WLAN5.8GHz	802.11a 6Mbps	Bottom Side	10	2	Reduced	161	5805	13.21	13.50	1.069	97.93	1.021	0.062	0.01	0.033	0.036
	WLAN5.8GHz	802.11a 6Mbps	Front	10	1+2	Reduced	161	5805	16.17	16.50	1.079	97.93	1.021	0.027	0.01	0.001	0.001
	WLAN5.8GHz	802.11a 6Mbps	Back	10	1+2	Reduced	161	5805	16.17	16.50	1.079	97.93	1.021	0.737	0.08	0.330	0.364
	WLAN5.8GHz	802.11a 6Mbps	Right Side	10	1+2	Reduced	161	5805	16.17	16.50	1.079	97.93	1.021	0.387			
	WLAN5.8GHz	802.11a 6Mbps	Top Side	10	1+2	Reduced	161	5805	16.17	16.50	1.079	97.93	1.021	0.434	0.08	0.194	0.214
	WLAN5.8GHz	802.11a 6Mbps	Bottom Side	10	1+2	Reduced	161	5805	16.17	16.50	1.079	97.93	1.021	0.058			



15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850-UAT	GPRS 4 Tx slots	Front	15	Full	128	824.2	26.70	28.00	1.349	0.02	0.175	0.236
	GSM850-UAT	GPRS 4 Tx slots	Back	15	Full	128	824.2	26.70	28.00	1.349	0.01	0.188	0.254
	GSM850-LAT	GPRS 4 Tx slots	Front	15	Full	128	824.2	26.70	28.00	1.349	0.01	0.193	0.260
30	GSM850-LAT	GPRS 4 Tx slots	Back	15	Full	128	824.2	26.70	28.00	1.349	0.09	0.226	0.305
	GSM1900-UAT	GPRS 4 Tx slots	Front	15	Full	661	1880	24.06	25.00	1.242	0.01	0.070	0.087
	GSM1900-UAT	GPRS 4 Tx slots	Back	15	Full	661	1880	24.06	25.00	1.242	-0.03	0.080	0.100
	GSM1900-LAT	GPRS 4 Tx slots	Front	15	Full	661	1880	24.06	25.00	1.242	0.02	0.205	0.255
31	GSM1900-LAT	GPRS 4 Tx slots	Back	15	Full	661	1880	24.06	25.00	1.242	0.01	0.302	0.375

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II-UAT	RMC 12.2Kbps	Front	15	Full	9538	1907.6	23.41	24.50	1.285	0.01	0.167	0.215
	WCDMA II-UAT	RMC 12.2Kbps	Back	15	Full	9538	1907.6	23.41	24.50	1.285	0.01	0.198	0.254
	WCDMA II-LAT-	RMC 12.2Kbps	Front	15	Full	9538	1907.6	23.41	24.50	1.285	0.06	0.510	0.655
32	WCDMA II-LAT-	RMC 12.2Kbps	Back	15	Full	9538	1907.6	23.41	24.50	1.285	0.01	0.875	1.125
	WCDMA II-LAT-	RMC 12.2Kbps	Back	15	Full	9626	1852.4	23.32	24.50	1.312	0.01	0.765	1.004
	WCDMA II-LAT-	RMC 12.2Kbps	Back	15	Full	9400	1880	23.38	24.50	1.294	0.02	0.805	1.042
	WCDMA II-LAT	RMC 12.2Kbps	Front	15	Reduced	9538	1907.6	22.64	23.00	1.086	0.01	0.427	0.464
	WCDMA II-LAT	RMC 12.2Kbps	Back	15	Reduced	9538	1907.6	22.64	23.00	1.086	0.05	0.672	0.730
	WCDMA IV-UAT	RMC 12.2Kbps	Front	15	Full	1413	1732.6	23.37	24.50	1.297	0.03	0.189	0.245
	WCDMA IV-UAT	RMC 12.2Kbps	Back	15	Full	1413	1732.6	23.37	24.50	1.297	0.01	0.226	0.293
	WCDMA IV-LAT	RMC 12.2Kbps	Front	15	Full	1413	1732.6	23.37	24.50	1.297	0.01	0.355	0.460
33	WCDMA IV-LAT	RMC 12.2Kbps	Back	15	Full	1413	1732.6	23.37	24.50	1.297	0.03	0.478	0.620
	WCDMA V-UAT	RMC 12.2Kbps	Front	15	Full	4132	826.4	23.37	24.50	1.297	0.01	0.162	0.210
	WCDMA V-UAT	RMC 12.2Kbps	Back	15	Full	4132	826.4	23.37	24.50	1.297	0.02	0.172	0.223
	WCDMA V-LAT	RMC 12.2Kbps	Front	15	Full	4132	826.4	23.37	24.50	1.297	0.01	0.192	0.249
34	WCDMA V-LAT	RMC 12.2Kbps	Back	15	Full	4132	826.4	23.37	24.50	1.297	0.03	0.231	0.300



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2-UAT	20M	QPSK	1	0	Front	15	Full	18900	1880	22.93	24.00	1.279	0.02	0.144	0.184
	LTE Band 2-UAT	20M	QPSK	50	50	Front	15	Full	18900	1880	22.05	23.00	1.245	0.03	0.121	0.151
	LTE Band 2-UAT	20M	QPSK	1	0	Back	15	Full	18900	1880	22.93	24.00	1.279	0.01	0.175	0.224
	LTE Band 2-UAT	20M	QPSK	50	50	Back	15	Full	18900	1880	22.05	23.00	1.245	0.03	0.146	0.182
	LTE Band 2-LAT	20M	QPSK	1	0	Front	15	Full	18900	1880	22.93	24.00	1.279	0.01	0.468	0.599
	LTE Band 2-LAT	20M	QPSK	50	50	Front	15	Full	18900	1880	22.05	23.00	1.245	0.03	0.384	0.478
35	LTE Band 2-LAT	20M	QPSK	1	0	Back	15	Full	18900	1880	22.93	24.00	1.279	0.19	0.620	0.793
	LTE Band 2-LAT	20M	QPSK	50	50	Back	15	Full	18900	1880	22.05	23.00	1.245	0.01	0.572	0.712
	LTE Band 4-UAT	20M	QPSK	1	0	Front	15	Full	20175	1732.5	22.93	24.00	1.279	0.01	0.172	0.220
	LTE Band 4-UAT	20M	QPSK	50	24	Front	15	Full	20175	1732.5	21.99	23.00	1.262	0.01	0.142	0.179
	LTE Band 4-UAT	20M	QPSK	1	0	Back	15	Full	20175	1732.5	22.93	24.00	1.279	-0.07	0.203	0.260
	LTE Band 4-UAT	20M	QPSK	50	24	Back	15	Full	20175	1732.5	21.99	23.00	1.262	-0.11	0.167	0.211
	LTE Band 4-LAT	20M	QPSK	1	0	Front	15	Full	20175	1732.5	22.93	24.00	1.279	0.02	0.329	0.421
	LTE Band 4-LAT	20M	QPSK	50	24	Front	15	Full	20175	1732.5	21.99	23.00	1.262	0.01	0.265	0.334
36	LTE Band 4-LAT	20M	QPSK	1	0	Back	15	Full	20175	1732.5	22.93	24.00	1.279	0.01	0.438	0.560
	LTE Band 4-LAT	20M	QPSK	50	24	Back	15	Full	20175	1732.5	21.99	23.00	1.262	0.03	0.346	0.437
	LTE Band 5-UAT	10M	QPSK	1	25	Front	15	Full	20525	836.5	22.76	24.00	1.330	0.01	0.146	0.194
	LTE Band 5-UAT	10M	QPSK	25	0	Front	15	Full	20525	836.5	21.81	23.00	1.315	0.01	0.116	0.153
	LTE Band 5-UAT	10M	QPSK	1	25	Back	15	Full	20525	836.5	22.76	24.00	1.330	-0.02	0.156	0.208
	LTE Band 5-UAT	10M	QPSK	25	0	Back	15	Full	20525	836.5	21.81	23.00	1.315	0.02	0.128	0.168
	LTE Band 5-LAT	10M	QPSK	1	25	Front	15	Full	20525	836.5	22.76	24.00	1.330	0.01	0.164	0.218
	LTE Band 5-LAT	10M	QPSK	25	0	Front	15	Full	20525	836.5	21.81	23.00	1.315	0.02	0.135	0.178
37	LTE Band 5-LAT	10M	QPSK	1	25	Back	15	Full	20525	836.5	22.76	24.00	1.330	0.05	0.195	0.259
	LTE Band 5-LAT	10M	QPSK	25	0	Back	15	Full	20525	836.5	21.81	23.00	1.315	0.01	0.157	0.206
	LTE Band 7-UAT	20M	QPSK	1	99	Front	15	Full	21100	2535	22.37	23.00	1.156	0.01	0.387	0.447
	LTE Band 7-UAT	20M	QPSK	1	99	Front	15	Full	21100+20902	2535+2554.8	22.15	23.00	1.216	-0.06	0.361	0.439
	LTE Band 7-UAT	20M	QPSK	50	50	Front	15	Full	21100	2535	21.51	22.00	1.119	0.03	0.326	0.365
	LTE Band 7-UAT	20M	QPSK	1	99	Back	15	Full	21100	2535	22.37	23.00	1.156	0.03	0.382	0.442
	LTE Band 7-UAT	20M	QPSK	50	50	Back	15	Full	21100	2535	21.51	22.00	1.119	0.01	0.321	0.359
	LTE Band 7-LAT	20M	QPSK	1	99	Front	15	Full	21100	2535	23.25	24.00	1.189	0.01	0.372	0.442
	LTE Band 7-LAT	20M	QPSK	50	50	Front	15	Full	21100	2535	22.35	23.00	1.161	0.03	0.309	0.359
	LTE Band 7-LAT	20M	QPSK	1	99	Back	15	Full	21100	2535	23.25	24.00	1.189	0.07	0.424	0.504
38	LTE Band 7-LAT	20M	QPSK	1	99	Back	15	Full	21100+20902	2535+2554.8	23.03	24.00	1.250	-0.08	0.412	0.515
	LTE Band 7-LAT	20M	QPSK	50	50	Back	15	Full	21100	2535	22.35	23.00	1.161	0.01	0.351	0.408



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38-UAT	20M	QPSK	1	49	Front	15	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	0.01	0.228	0.257
	LTE Band 38-UAT	20M	QPSK	1	49	Front	15	Full	37901 + 38099	2585.1 + 2604.9	23.48	24.00	1.127	62.9	1.006	-0.03	0.213	0.242
	LTE Band 38-UAT	20M	QPSK	50	24	Front	15	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.02	0.187	0.205
	LTE Band 38-UAT	20M	QPSK	1	49	Back	15	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	0.02	0.207	0.233
	LTE Band 38-UAT	20M	QPSK	50	24	Back	15	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.02	0.168	0.184
	LTE Band 38-LAT	20M	QPSK	1	49	Front	15	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	0.02	0.239	0.269
	LTE Band 38-LAT	20M	QPSK	50	24	Front	15	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.01	0.195	0.214
39	LTE Band 38-LAT	20M	QPSK	1	49	Back	15	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	-0.09	0.274	0.309
	LTE Band 38-LAT	20M	QPSK	1	49	Back	15	Full	37901 + 38099	2585.1 + 2604.9	23.48	24.00	1.127	62.9	1.006	0.01	0.255	0.289
	LTE Band 38-LAT	20M	QPSK	50	24	Back	15	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.02	0.224	0.245

**<WLAN 2.4GHz SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15	1	Full	11	2462	21.33	21.50	1.040	100	1.000	-0.01	0.165	0.172
	WLAN2.4GHz	802.11b 1Mbps	Back	15	1	Full	11	2462	21.33	21.50	1.040	100	1.000	0.02	0.209	0.217
	WLAN2.4GHz	802.11b 1Mbps	Front	15	1+2	Full	11	2462	24.24	24.50	1.062	100	1.000	-0.02	0.198	0.210
40	WLAN2.4GHz	802.11b 1Mbps	Back	15	1+2	Full	11	2462	24.24	24.50	1.062	100	1.000	0.03	0.203	0.216

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
41	Bluetooth	1Mbps	Back	15	0	2402	13.35	13.50	1.035	76.91	1.083	0.05	0.032	0.036

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	15	2	Full	56	5280	16.42	17.50	1.282	97.93	1.021	0.03	0.021	0.027
	WLAN5.3GHz	802.11a 6Mbps	Back	15	2	Full	56	5280	16.42	17.50	1.282	97.93	1.021	0.01	0.262	0.343
	WLAN5.3GHz	802.11a 6Mbps	Front	15	1+2	Full	64	5320	19.74	20.50	1.191	97.93	1.021	0.03	0.083	0.101
42	WLAN5.3GHz	802.11a 6Mbps	Back	15	1+2	Full	64	5320	19.74	20.50	1.191	97.93	1.021	0.01	0.424	0.516
	WLAN5.5GHz	802.11a 6Mbps	Front	15	2	Full	132	5660	16.90	17.50	1.148	97.93	1.021	0.04	0.009	0.011
	WLAN5.5GHz	802.11a 6Mbps	Back	15	2	Full	132	5660	16.90	17.50	1.148	97.93	1.021	0.02	0.798	0.935
	WLAN5.5GHz	802.11a 6Mbps	Back	15	2	Full	124	5620	16.81	17.50	1.172	97.93	1.021	0.19	0.768	0.919
	WLAN5.5GHz	802.11a 6Mbps	Front	15	2	Reduced	116	5580	13.10	14.00	1.230	97.93	1.021	0.04	0.007	0.008
	WLAN5.5GHz	802.11a 6Mbps	Back	15	2	Reduced	116	5580	13.10	14.00	1.230	97.93	1.021	0.02	0.435	0.546
	WLAN5.5GHz	802.11a 6Mbps	Front	15	1+2	Full	116	5580	19.94	20.50	1.138	97.93	1.021	0.07	0.009	0.011
43	WLAN5.5GHz	802.11a 6Mbps	Back	15	1+2	Full	116	5580	19.94	20.50	1.138	97.93	1.021	0.07	0.952	1.106
	WLAN5.5GHz	802.11a 6Mbps	Back	15	1+2	Full	132	5660	19.94	20.50	1.138	97.93	1.021	0.03	0.721	0.837
	WLAN5.5GHz	802.11a 6Mbps	Front	15	1+2	Reduced	116	5580	16.01	17.00	1.256	97.93	1.021	-0.05	0.002	0.002
	WLAN5.5GHz	802.11a 6Mbps	Back	15	1+2	Reduced	116	5580	16.01	17.00	1.256	97.93	1.021	0.01	0.406	0.521
	WLAN5.8GHz	802.11a 6Mbps	Front	15	2	Full	161	5805	16.90	17.50	1.148	97.93	1.021	0.03	0.006	0.007
	WLAN5.8GHz	802.11a 6Mbps	Back	15	2	Full	161	5805	16.90	17.50	1.148	97.93	1.021	0.05	0.977	1.145
	WLAN5.8GHz	802.11a 6Mbps	Back	15	2	Full	157	5785	16.84	17.50	1.164	97.93	1.021	0.01	0.692	0.822
	WLAN5.8GHz	802.11a 6Mbps	Front	15	2	Reduced	161	5805	13.21	14.00	1.199	97.93	1.021	-0.08	0.007	0.008
	WLAN5.8GHz	802.11a 6Mbps	Back	15	2	Reduced	161	5805	13.21	14.00	1.199	97.93	1.021	0.06	0.431	0.528
	WLAN5.8GHz	802.11a 6Mbps	Front	15	1+2	Full	161	5805	19.89	20.50	1.151	97.93	1.021	0.02	0.009	0.011
44	WLAN5.8GHz	802.11a 6Mbps	Back	15	1+2	Full	161	5805	19.89	20.50	1.151	97.93	1.021	0.02	0.981	1.153
	WLAN5.8GHz	802.11a 6Mbps	Back	15	1+2	Full	157	5785	19.89	20.50	1.151	97.93	1.021	0.01	0.721	0.847
	WLAN5.8GHz	802.11a 6Mbps	Front	15	1+2	Reduced	161	5805	16.17	17.00	1.211	97.93	1.021	0.08	0.005	0.007
	WLAN5.8GHz	802.11a 6Mbps	Back	15	1+2	Reduced	161	5805	16.17	17.00	1.211	97.93	1.021	-0.01	0.400	0.494

**15.4 Product Specific SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
45	GSM1900-LAT	GPRS 4 Tx slots	Bottom Side	0	Full	661	1880	24.06	25.00	1.242	0.1	1.560	1.937

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	9538	1907.6	22.64	23.00	1.086	0.05	2.180	2.368
46	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	9262	1852.4	22.57	23.00	1.104	-0.14	2.510	2.771
	WCDMA II-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	9400	1880	22.59	23.00	1.099	-0.03	2.470	2.715
	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	1413	1732.6	22.54	23.50	1.247	0.02	2.600	3.243
	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	1312	1712.4	22.53	23.50	1.250	0.03	2.570	3.213
47	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	1513	1752.6	22.37	23.50	1.297	-0.02	2.650	3.438



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
48	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	0	Reduced	18900	1880	21.73	23.00	1.340	0.08	2.330	3.121
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	0	Reduced	18700	1860	21.58	23.00	1.387	0.06	2.500	3.467
	LTE Band 2-LAT	20M	QPSK	1	0	Bottom Side	0	Reduced	19100	1900	21.52	23.00	1.406	0.05	2.290	3.220
	LTE Band 2-LAT	20M	QPSK	50	50	Bottom Side	0	Reduced	18900	1880	21.78	23.00	1.324	0.04	2.400	3.178
	LTE Band 2-LAT	20M	QPSK	50	50	Bottom Side	0	Reduced	18700	1860	21.71	23.00	1.346	-0.06	2.530	3.405
	LTE Band 2-LAT	20M	QPSK	50	50	Bottom Side	0	Reduced	19100	1900	21.66	23.00	1.361	-0.12	2.240	3.050
49	LTE Band 2-LAT	20M	QPSK	100	0	Bottom Side	0	Reduced	18900	1880	21.70	23.00	1.349	-0.08	2.470	3.332
	LTE Band 4-LAT	20M	QPSK	1	0	Bottom Side	0	Reduced	20175	1732.5	21.76	23.00	1.330	0.03	2.440	3.246
	LTE Band 4-LAT	20M	QPSK	50	24	Bottom Side	0	Reduced	20175	1732.5	21.76	23.00	1.330	0.05	2.450	3.260
	LTE Band 4-LAT	20M	QPSK	100	0	Bottom Side	0	Reduced	20175	1732.5	21.72	23.00	1.343	-0.01	2.560	3.437
	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	0	Full	21100	2535	22.37	23.00	1.156	0.05	2.980	3.445
	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	0	Full	20850	2510	22.36	23.00	1.159	-0.08	2.950	3.418
50	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	0	Full	21350	2560	22.31	23.00	1.172	0.01	2.920	3.423
	LTE Band 7-UAT	20M	QPSK	50	50	Left Side	0	Full	21100	2535	21.51	22.00	1.119	-0.05	2.390	2.675
	LTE Band 7-UAT	20M	QPSK	50	50	Left Side	0	Full	21100	2535	21.42	22.00	1.143	-0.01	2.360	2.697
	LTE Band 7-UAT	20M	QPSK	50	50	Left Side	0	Full	21100	2535	21.45	22.00	1.135	0.03	2.340	2.656
	LTE Band 7-UAT	20M	QPSK	100	50	Left Side	0	Full	21100	2535	21.48	22.00	1.127	-0.02	1.930	2.175
	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	0	Full	21100 + 20902	2535 + 2554.8	22.15	23.00	1.216	0.09	2.560	3.113
	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	0	Full	20850 + 21048	2510 + 2529.8	22.25	23.00	1.189	0.07	2.530	3.007
	LTE Band 7-UAT	20M	QPSK	1	99	Left Side	0	Full	21350 + 21152	2560 + 2540.2	22.09	23.00	1.233	-0.02	2.520	3.107
	LTE Band 7-LAT	20M	QPSK	1	99	Bottom Side	0mm	Reduced	21100	2535	20.52	21.50	1.253	0.03	2.350	2.945
	LTE Band 7-LAT	20M	QPSK	1	99	Bottom Side	0mm	Reduced	20850	2510	20.21	21.50	1.346	0.01	2.250	3.028
	LTE Band 7-LAT	20M	QPSK	1	99	Bottom Side	0mm	Reduced	21350	2560	20.23	21.50	1.340	0.05	2.260	3.028
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	0mm	Reduced	21100	2535	20.43	21.50	1.279	0.09	2.570	3.288
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	0mm	Reduced	20850	2510	20.31	21.50	1.315	0.07	2.600	3.420
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	0mm	Reduced	20850 + 21048	2510 + 2529.8	20.15	21.50	1.365	0.04	2.080	2.838
	LTE Band 7-LAT	20M	QPSK	50	50	Bottom Side	0mm	Reduced	21350	2560	20.33	21.50	1.309	0.07	2.380	3.116
	LTE Band 7-LAT	20M	QPSK	100	0	Bottom Side	0mm	Reduced	21100	2535	20.35	21.50	1.303	0.06	2.570	3.349

**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
51	LTE Band38-LAT	20M	QPSK	1	49	Bottom Side	0	Full	38000	2595	23.51	24.00	1.119	62.9	1.006	0.01	1.450	1.633
	LTE Band38-LAT	20M	QPSK	1	49	Bottom Side	0	Full	37901 + 38099	2585.1 + 2604.9	23.48	24.00	1.127	62.9	1.006	-0.09	1.350	1.531
	LTE Band38-LAT	20M	QPSK	50	24	Bottom Side	0	Full	38000	2595	22.63	23.00	1.089	62.9	1.006	0.01	1.290	1.413



<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Max Area Scan SAR	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	0	2	Full	56	5280	16.42	17.50	1.282	97.93	1.021	0.319			
	WLAN5.3GHz	802.11a 6Mbps	Back	0	2	Full	56	5280	16.42	17.50	1.282	97.93	1.021	6.394	0.03	0.698	0.914
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0	2	Full	56	5280	16.42	17.50	1.282	97.93	1.021	2.554			
	WLAN5.3GHz	802.11a 6Mbps	Bottom Side	0	2	Full	56	5280	16.42	17.50	1.282	97.93	1.021	0.611	0.02	0.093	0.122
	WLAN5.3GHz	802.11a 6Mbps	Front	0	1+2	Full	64	5320	19.74	20.50	1.191	97.93	1.021	7.637	0.03	0.731	0.889
52	WLAN5.3GHz	802.11a 6Mbps	Back	0	1+2	Full	64	5320	19.74	20.50	1.191	97.93	1.021	11.600	0.08	1.120	1.362
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0	1+2	Full	64	5320	19.74	20.50	1.191	97.93	1.021	4.174			
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0	1+2	Full	64	5320	19.74	20.50	1.191	97.93	1.021	4.003			
	WLAN5.3GHz	802.11a 6Mbps	Bottom Side	0	1+2	Full	64	5320	19.74	20.50	1.191	97.93	1.021	4.003	-0.08	0.113	0.137
	WLAN5.5GHz	802.11a 6Mbps	Front	0	2	Full	132	5660	16.90	17.50	1.148	97.93	1.021	0.344			
	WLAN5.5GHz	802.11a 6Mbps	Back	0	2	Full	132	5660	16.90	17.50	1.148	97.93	1.021	5.046	0.09	0.762	0.893
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0	2	Full	132	5660	16.90	17.50	1.148	97.93	1.021	4.042			
	WLAN5.5GHz	802.11a 6Mbps	Bottom Side	0	2	Full	132	5660	16.90	17.50	1.148	97.93	1.021	1.01	-0.01	0.094	0.110
	WLAN5.5GHz	802.11a 6Mbps	Front	0	1+2	Full	116	5580	19.94	20.50	1.138	97.93	1.021	3.300			
53	WLAN5.5GHz	802.11a 6Mbps	Back	0	1+2	Full	116	5580	19.94	20.50	1.138	97.93	1.021	13.300	-0.06	1.250	1.452
	WLAN5.5GHz	802.11a 6Mbps	Right Side	0	1+2	Full	116	5580	19.94	20.50	1.138	97.93	1.021	7.660	0.01	0.615	0.714
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0	1+2	Full	116	5580	19.94	20.50	1.138	97.93	1.021	3.157			
	WLAN5.5GHz	802.11a 6Mbps	Bottom Side	0	1+2	Full	116	5580	19.94	20.50	1.138	97.93	1.021	3.157	0.05	0.115	0.134



15.5 Repeated SAR Measurement

<1g SAR>

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850-UAT	GPRS 4 Tx slots	Right Cheek	0		Reduced	189	836.4	25.54	26.00	1.112		1.000	0.02	0.988	1	1.098
2nd	GSM850-UAT	GPRS 4 Tx slots	Right Cheek	0		Reduced	189	836.4	25.54	26.00	1.112		1.000	-0.01	0.981	1.007	1.091
1st	WCDMA II-UAT	RMC 12.2Kbps	Right Cheek	0		Reduced	9538	1907.6	20.59	21.00	1.099		1.000	0.02	1.060	1	1.165
2nd	WCDMA II-UAT	RMC 12.2Kbps	Right Cheek	0		Reduced	9538	1907.6	20.59	21.00	1.099		1.000	-0.09	1.040	1.019	1.143
1st	WCDMA IV-UAT	RMC 12.2Kbps	Right Cheek	0		Reduced	1312	1712.4	20.67	21.00	1.079		1.000	0.02	1.090	1	1.176
2nd	WCDMA IV-UAT	RMC 12.2Kbps	Right Cheek	0		Reduced	1312	1712.4	20.67	21.00	1.079		1.000	-0.06	1.060	1.028	1.144
1st	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0	1	Reduced	11	2462	19.45	19.50	1.012		1.000	0.05	1.150	1	1.163
2nd	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0	1	Reduced	11	2462	19.45	19.50	1.012		1.000	0.08	1.130	1.018	1.143
1st	LTE Band 38-UAT	20M_QPSK_1_49	Left Side	10		Full	38000	2595	23.51	24.00	1.119	62.9	1.006	-0.02	1.030	1	1.160
2nd	LTE Band 38-UAT	20M_QPSK_1_49	Left Side	10		Full	38000	2595	23.51	24.00	1.119	62.9	1.006	0.09	1.020	1.010	1.149
1st	WLAN5GHz	802.11a 6Mbps	Back	15	1+2	Full	116	5280	19.94	20.50	1.138	97.93	1.021	0.07	0.952	1	1.106
2nd	WLAN5GHz	802.11a 6Mbps	Back	15	1+2	Full	116	5280	19.94	20.50	1.138	97.93	1.021	-0.03	0.949	1.003	1.102
1st	WLAN5GHz	802.11a 6Mbps	Back	15	1+2	Full	161	5805	19.89	20.50	1.151	97.93	1.021	0.02	0.981	1	1.153
2nd	WLAN5GHz	802.11a 6Mbps	Back	15	1+2	Full	161	5805	19.89	20.50	1.151	97.93	1.021	-0.03	0.978	1.003	1.149

<10g SAR>

No.	Band	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	1513	1752.6	22.37	23.50	1.297	-	1.000	-0.02	2.650	1	3.438
2nd	WCDMA IV-LAT	RMC 12.2Kbps	Bottom Side	0	Reduced	1513	1752.6	22.37	23.50	1.297	-	1.000	-0.08	2.630	1.007	3.412
1st	LTE Band 2-LAT	20M_QPSK_50_50	Bottom Side	0	Reduced	18700	1860	21.71	23.00	1.346	-	1.000	-0.06	2.530	1	3.405
2nd	LTE Band 2-LAT	20M_QPSK_50_50	Bottom Side	0	Reduced	18700	1860	21.71	23.00	1.346	-	1.000	0.03	2.480	1.020	3.338
1st	LTE Band 7-UAT	20M_QPSK_1_99	Left Side	0	Full	21100	2535	22.37	23.00	1.156	-	1.000	0.05	2.980	1	3.445
2nd	LTE Band 7-UAT	20M_QPSK_1_99	Left Side	0	Full	21100	2535	22.37	23.00	1.156	-	1.000	-0.03	2.970	1.003	3.434

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific
1.	GSM Voice + WLAN2.4GHz Ant.1	Yes	Yes		Yes
2.	GPRS/EDGE + WLAN2.4GHz Ant.1	Yes	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz Ant.1	Yes	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz Ant.1	Yes	Yes	Yes	Yes
5.	GSM Voice + WLAN2.4GHz MIMO	Yes	Yes		Yes
6.	GPRS/EDGE + WLAN2.4GHz MIMO	Yes	Yes	Yes	Yes
7.	WCDMA + WLAN2.4GHz MIMO	Yes	Yes	Yes	Yes
8.	LTE + WLAN2.4GHz MIMO	Yes	Yes	Yes	Yes
9.	GSM Voice + WLAN5.3/5.5GHz Ant.2	Yes	Yes		Yes
10.	GPRS/EDGE + WLAN5.3/5.5GHz Ant.2	Yes	Yes		Yes
11.	WCDMA + WLAN5.3/5.5GHz Ant.2	Yes	Yes		Yes
12.	LTE + WLAN5.3/5.5GHz Ant.2	Yes	Yes		Yes
13.	GSM Voice + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
14.	GPRS/EDGE + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
15.	WCDMA + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
16.	LTE + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
17.	GSM Voice + WLAN5.2/5.8GHz Ant.2	Yes	Yes		Yes
18.	GPRS/EDGE + WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes	Yes
19.	WCDMA + WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes	Yes
20.	LTE + WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes	Yes
21.	GSM Voice + WLAN5.2/5.8GHz MIMO	Yes	Yes		Yes
22.	GPRS/EDGE + WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
23.	WCDMA + WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
24.	LTE + WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
25.	GSM Voice + Bluetooth Ant.1	Yes	Yes		Yes
26.	GPRS/EDGE + Bluetooth Ant.1	Yes	Yes	Yes	Yes
27.	WCDMA + Bluetooth Ant.1	Yes	Yes	Yes	Yes
28.	LTE + Bluetooth Ant.1	Yes	Yes	Yes	Yes
29.	WLAN2.4GHz Ant.1+ WLAN5GHz Ant.2	Yes	Yes	Yes	Yes
30.	Bluetooth Ant.1+ WLAN5GHz MIMO	Yes	Yes	Yes	Yes
31.	GSM Voice + WLAN2.4GHz Ant.1 + WLAN5.3/5.5GHz Ant.2	Yes	Yes		Yes
32.	GPRS/EDGE + WLAN2.4GHz Ant.1+ WLAN5.3/5.5GHz Ant.2	Yes	Yes		Yes
33.	WCDMA + WLAN2.4GHz Ant.1+ WLAN5.3/5.5GHz Ant.2	Yes	Yes		Yes
34.	LTE + WLAN2.4GHz Ant.1 + WLAN5.3/5.5GHz Ant.2	Yes	Yes		Yes
35.	GSM Voice + Bluetooth Ant.1+ WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
36.	GPRS/EDGE + Bluetooth Ant.1 + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
37.	WCDMA + Bluetooth Ant.1 + WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
38.	LTE + Bluetooth Ant.1+ WLAN5.3/5.5GHz MIMO	Yes	Yes		Yes
39.	GSM Voice + WLAN2.4GHz Ant.1+ WLAN5.2/5.8GHz Ant.2	Yes	Yes		Yes
40.	GPRS/EDGE + WLAN2.4GHz Ant.1+ WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes	Yes
41.	WCDMA + WLAN2.4GHz Ant.1 + WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes	Yes
42.	LTE + WLAN2.4GHz Ant.1 + WLAN5.2/5.8GHz Ant.2	Yes	Yes	Yes	Yes
43.	GSM Voice + Bluetooth Ant.1 + WLAN5.2/5.8GHz MIMO	Yes	Yes		Yes
44.	GPRS/EDGE + Bluetooth Ant.1+ WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
45.	WCDMA + Bluetooth Ant.1+ WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes
46.	LTE + Bluetooth Ant.1+ WLAN5.2/5.8GHz MIMO	Yes	Yes	Yes	Yes

**General Note:**

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), and LTE supports VoLTE function.
2. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications.
4. WLAN 2.4GHz Ant.1 and Bluetooth share the same antenna so can't transmit simultaneously.
5. According to the character of EUT, WLAN5GHz Ant.2 and Bluetooth can transmit simultaneously.
6. According to the character of EUT, WLAN5GHz Ant.2 and WLAN 2.4GHz Ant.1 can transmit simultaneously.
7. Chose the worse zoom scan SAR of WLAN SAR respectively for co-located with WWAN analysis.
8. For Bluetooth SAR testing only perform the worst position of WLAN, so other position use this SAR value to do co-located with WWAN analysis.
9. For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
10. All licensed modes share the same antenna part and cannot transmit simultaneously.
11. The reported SAR summation is calculated based on the same configuration and test position
12. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$ for 1g SAR, $SPLSR \leq 0.10$ for 10g SAR simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - v) For WWAN/Bluetooth product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.



16.1 Head Exposure Conditions

<Top Antenna>

WWAN Band		Exposure Position	1	2	3	4	5	6	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant.1				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Right Cheek	1.135	0.234	0.309	0.190	0.073	0.192	1.44	1.33	1.44	1.52
		Right Tilted	1.078	0.323	0.415	0.203	0.021	0.192	1.49	1.28	1.42	1.47
		Left Cheek	0.436	1.042	1.098	0.828	0.084	0.192	1.53	1.26	1.56	1.46
		Left Tilted	0.378	1.163	0.926	0.575	0.041	0.192	1.30	0.95	1.58	1.15
	GSM1900	Right Cheek	0.894	0.234	0.309	0.190	0.073	0.192	1.20	1.08	1.20	1.28
		Right Tilted	0.540	0.323	0.415	0.203	0.021	0.192	0.96	0.74	0.88	0.94
		Left Cheek	0.320	1.042	1.098	0.828	0.084	0.192	1.42	1.15	1.45	1.34
		Left Tilted	0.255	1.163	0.926	0.575	0.041	0.192	1.18	0.83	1.46	1.02
WCDMA	Band II	Right Cheek	1.165	0.234	0.309	0.190	0.073	0.192	1.47	1.36	1.47	1.55
		Right Tilted	0.575	0.323	0.415	0.203	0.021	0.192	0.99	0.78	0.92	0.97
		Left Cheek	0.306	1.042	1.098	0.828	0.084	0.192	1.40	1.13	1.43	1.33
		Left Tilted	0.275	1.163	0.926	0.575	0.041	0.192	1.20	0.85	1.48	1.04
	Band IV	Right Cheek	1.176	0.234	0.309	0.190	0.073	0.192	1.49	1.37	1.48	1.56
		Right Tilted	0.516	0.323	0.415	0.203	0.021	0.192	0.93	0.72	0.86	0.91
		Left Cheek	0.309	1.042	1.098	0.828	0.084	0.192	1.41	1.14	1.44	1.33
		Left Tilted	0.268	1.163	0.926	0.575	0.041	0.192	1.19	0.84	1.47	1.04
	Band V	Right Cheek	1.110	0.234	0.309	0.190	0.073	0.192	1.42	1.30	1.42	1.49
		Right Tilted	0.701	0.323	0.415	0.203	0.021	0.192	1.12	0.90	1.05	1.10
		Left Cheek	0.398	1.042	1.098	0.828	0.084	0.192	1.50	1.23	1.52	1.42
		Left Tilted	0.325	1.163	0.926	0.575	0.041	0.192	1.25	0.90	1.53	1.09
LTE	Band 5	Right Cheek	1.034	0.234	0.309	0.190	0.073	0.192	1.34	1.22	1.34	1.42
		Right Tilted	0.745	0.323	0.415	0.203	0.021	0.192	1.16	0.95	1.09	1.14
		Left Cheek	0.381	1.042	1.098	0.828	0.084	0.192	1.48	1.21	1.51	1.40
		Left Tilted	0.305	1.163	0.926	0.575	0.041	0.192	1.23	0.88	1.51	1.07
	Band 2	Right Cheek	1.183	0.234	0.309	0.190	0.073	0.192	1.49	1.37	1.49	1.57
		Right Tilted	0.488	0.323	0.415	0.203	0.021	0.192	0.90	0.69	0.83	0.88
		Left Cheek	0.318	1.042	1.098	0.828	0.084	0.192	1.42	1.15	1.44	1.34
		Left Tilted	0.267	1.163	0.926	0.575	0.041	0.192	1.19	0.84	1.47	1.03
	Band 4	Right Cheek	1.168	0.234	0.309	0.190	0.073	0.192	1.48	1.36	1.48	1.55
		Right Tilted	0.510	0.323	0.415	0.203	0.021	0.192	0.93	0.71	0.85	0.91
		Left Cheek	0.315	1.042	1.098	0.828	0.084	0.192	1.41	1.14	1.44	1.34
		Left Tilted	0.265	1.163	0.926	0.575	0.041	0.192	1.19	0.84	1.47	1.03
	Band 7	Right Cheek	1.031	0.234	0.309	0.190	0.073	0.192	1.34	1.22	1.34	1.41
		Right Tilted	0.567	0.323	0.415	0.203	0.021	0.192	0.98	0.77	0.91	0.96
		Left Cheek	0.397	1.042	1.098	0.828	0.084	0.192	1.50	1.23	1.52	1.42
		Left Tilted	0.189	1.163	0.926	0.575	0.041	0.192	1.12	0.76	1.39	0.96
	Band 38	Right Cheek	1.160	0.234	0.309	0.190	0.073	0.192	1.47	1.35	1.47	1.54
		Right Tilted	0.575	0.323	0.415	0.203	0.021	0.192	0.99	0.78	0.92	0.97
		Left Cheek	0.463	1.042	1.098	0.828	0.084	0.192	1.56	1.29	1.59	1.48
		Left Tilted	0.217	1.163	0.926	0.575	0.041	0.192	1.14	0.79	1.42	0.98



<Bottom Antenna>

WWAN Band		Exposure Position	1	2	3	4	5	6	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant.1				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.209	0.234	0.309	0.190	0.073	0.192	0.52	0.40	0.52	0.59
		Right Tilted	0.095	0.323	0.415	0.203	0.021	0.192	0.51	0.30	0.44	0.49
		Left Cheek	0.158	1.042	1.098	0.828	0.084	0.192	1.26	0.99	1.28	1.18
		Left Tilted	0.084	1.163	0.926	0.575	0.041	0.192	1.01	0.66	1.29	0.85
	GSM1900	Right Cheek	0.035	0.234	0.309	0.190	0.073	0.192	0.34	0.23	0.34	0.42
		Right Tilted	0.029	0.323	0.415	0.203	0.021	0.192	0.44	0.23	0.37	0.42
		Left Cheek	0.053	1.042	1.098	0.828	0.084	0.192	1.15	0.88	1.18	1.07
		Left Tilted	0.032	1.163	0.926	0.575	0.041	0.192	0.96	0.61	1.24	0.80
WCDMA	Band II	Right Cheek	0.102	0.234	0.309	0.190	0.073	0.192	0.41	0.29	0.41	0.48
		Right Tilted	0.085	0.323	0.415	0.203	0.021	0.192	0.50	0.29	0.43	0.48
		Left Cheek	0.130	1.042	1.098	0.828	0.084	0.192	1.23	0.96	1.26	1.15
		Left Tilted	0.099	1.163	0.926	0.575	0.041	0.192	1.03	0.67	1.30	0.87
	Band IV	Right Cheek	0.077	0.234	0.309	0.190	0.073	0.192	0.39	0.27	0.38	0.46
		Right Tilted	0.050	0.323	0.415	0.203	0.021	0.192	0.47	0.25	0.39	0.45
		Left Cheek	0.115	1.042	1.098	0.828	0.084	0.192	1.21	0.94	1.24	1.14
		Left Tilted	0.051	1.163	0.926	0.575	0.041	0.192	0.98	0.63	1.26	0.82
	Band V	Right Cheek	0.222	0.234	0.309	0.190	0.073	0.192	0.53	0.41	0.53	0.60
		Right Tilted	0.144	0.323	0.415	0.203	0.021	0.192	0.56	0.35	0.49	0.54
		Left Cheek	0.180	1.042	1.098	0.828	0.084	0.192	1.28	1.01	1.31	1.20
		Left Tilted	0.118	1.163	0.926	0.575	0.041	0.192	1.04	0.69	1.32	0.89
LTE	Band 5	Right Cheek	0.283	0.234	0.309	0.190	0.073	0.192	0.59	0.47	0.59	0.67
		Right Tilted	0.133	0.323	0.415	0.203	0.021	0.192	0.55	0.34	0.48	0.53
		Left Cheek	0.217	1.042	1.098	0.828	0.084	0.192	1.32	1.05	1.34	1.24
		Left Tilted	0.136	1.163	0.926	0.575	0.041	0.192	1.06	0.71	1.34	0.90
	Band 2	Right Cheek	0.078	0.234	0.309	0.190	0.073	0.192	0.39	0.27	0.39	0.46
		Right Tilted	0.066	0.323	0.415	0.203	0.021	0.192	0.48	0.27	0.41	0.46
		Left Cheek	0.134	1.042	1.098	0.828	0.084	0.192	1.23	0.96	1.26	1.15
		Left Tilted	0.072	1.163	0.926	0.575	0.041	0.192	1.00	0.65	1.28	0.84
	Band 4	Right Cheek	0.069	0.234	0.309	0.190	0.073	0.192	0.38	0.26	0.38	0.45
		Right Tilted	0.051	0.323	0.415	0.203	0.021	0.192	0.47	0.25	0.40	0.45
		Left Cheek	0.111	1.042	1.098	0.828	0.084	0.192	1.21	0.94	1.24	1.13
		Left Tilted	0.055	1.163	0.926	0.575	0.041	0.192	0.98	0.63	1.26	0.82
	Band 7	Right Cheek	0.104	0.234	0.309	0.190	0.073	0.192	0.41	0.29	0.41	0.49
		Right Tilted	0.124	0.323	0.415	0.203	0.021	0.192	0.54	0.33	0.47	0.52
		Left Cheek	0.121	1.042	1.098	0.828	0.084	0.192	1.22	0.95	1.25	1.14
		Left Tilted	0.083	1.163	0.926	0.575	0.041	0.192	1.01	0.66	1.29	0.85
	Band 38	Right Cheek	0.072	0.234	0.309	0.190	0.073	0.192	0.38	0.26	0.38	0.45
		Right Tilted	0.060	0.323	0.415	0.203	0.021	0.192	0.48	0.26	0.40	0.46
		Left Cheek	0.066	1.042	1.098	0.828	0.084	0.192	1.16	0.89	1.19	1.09
		Left Tilted	0.040	1.163	0.926	0.575	0.041	0.192	0.97	0.62	1.24	0.81



16.2 Hotspot Exposure Conditions

<Top Antenna>

WWAN Band		Exposure Position	1	2	3	4	5	6	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant.1				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Front	0.384	0.172	0.210	0.378	0.161	0.110	0.59	0.76	0.56	0.87
		Back	0.517	0.387	0.424	0.378	0.652	0.110	0.94	0.90	1.56	1.01
		Left side	0.584						0.58	0.58	0.58	0.58
		Right side	0.072	0.653	0.812	0.378	0.161	0.110	0.88	0.45	0.78	0.56
		Top side	0.301	0.653	0.812	0.378		0.110	1.11	0.68	0.95	0.79
	GSM1900	Front	0.138	0.172	0.210	0.378	0.161	0.110	0.35	0.52	0.32	0.63
		Back	0.144	0.387	0.424	0.378	0.652	0.110	0.57	0.52	1.18	0.63
		Left side	0.359						0.36	0.36	0.36	0.36
		Right side	0.030	0.653	0.812	0.378	0.161	0.110	0.84	0.41	0.74	0.52
		Top side	0.114	0.653	0.812	0.378		0.110	0.93	0.49	0.77	0.60
WCDMA	Band II	Front	0.420	0.172	0.210	0.378	0.161	0.110	0.63	0.80	0.60	0.91
		Back	0.446	0.387	0.424	0.378	0.652	0.110	0.87	0.82	1.49	0.93
		Left side	1.184						1.18	1.18	1.18	1.18
		Right side	0.086	0.653	0.812	0.378	0.161	0.110	0.90	0.46	0.79	0.57
		Top side	0.335	0.653	0.812	0.378		0.110	1.15	0.71	0.99	0.82
	Band IV	Front	0.457	0.172	0.210	0.378	0.161	0.110	0.67	0.84	0.64	0.95
		Back	0.466	0.387	0.424	0.378	0.652	0.110	0.89	0.84	1.51	0.95
		Left side	1.145						1.15	1.15	1.15	1.15
		Right side	0.096	0.653	0.812	0.378	0.161	0.110	0.91	0.47	0.80	0.58
		Top side	0.326	0.653	0.812	0.378		0.110	1.14	0.70	0.98	0.81
	Band V	Front	0.403	0.172	0.210	0.378	0.161	0.110	0.61	0.78	0.58	0.89
		Back	0.438	0.387	0.424	0.378	0.652	0.110	0.86	0.82	1.48	0.93
		Left side	0.563						0.56	0.56	0.56	0.56
		Right side	0.070	0.653	0.812	0.378	0.161	0.110	0.88	0.45	0.78	0.56
		Top side	0.252	0.653	0.812	0.378		0.110	1.06	0.63	0.91	0.74



WWAN Band		Exposure Position	1	2	3	4	5	6	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant.1				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
LTE	Band 5	Front	0.385	0.172	0.210	0.378	0.007	0.110	0.60	0.76	0.56	0.87
		Back	0.443	0.387	0.424	0.378	0.652	0.110	0.87	0.82	1.48	0.93
		Left side	0.523						0.52	0.52	0.52	0.52
		Right side	0.105	0.653	0.812	0.378	0.055	0.110	0.92	0.48	0.81	0.59
		Top side	0.263	0.653	0.812	0.378		0.110	1.08	0.64	0.92	0.75
	Band 2	Front	0.322	0.172	0.210	0.378	0.007	0.110	0.53	0.70	0.50	0.81
		Back	0.343	0.387	0.424	0.378	0.652	0.110	0.77	0.72	1.38	0.83
		Left side	1.067						1.07	1.07	1.07	1.07
		Right side	0.077	0.653	0.812	0.378	0.055	0.110	0.89	0.46	0.79	0.57
		Top side	0.270	0.653	0.812	0.378		0.110	1.08	0.65	0.92	0.76
	Band 4	Front	0.385	0.172	0.210	0.378	0.007	0.110	0.60	0.76	0.56	0.87
		Back	0.409	0.387	0.424	0.378	0.652	0.110	0.83	0.79	1.45	0.90
		Left side	0.907						0.91	0.91	0.91	0.91
		Right side	0.095	0.653	0.812	0.378	0.055	0.110	0.91	0.47	0.80	0.58
		Top side	0.285	0.653	0.812	0.378		0.110	1.10	0.66	0.94	0.77
	Band 7	Front	0.238	0.172	0.210	0.378	0.007	0.110	0.45	0.62	0.42	0.73
		Back	0.216	0.387	0.424	0.378	0.652	0.110	0.64	0.59	1.26	0.70
		Left side	0.521						0.52	0.52	0.52	0.52
		Right side	0.020	0.653	0.812	0.378	0.055	0.110	0.83	0.40	0.73	0.51
		Top side	0.087	0.653	0.812	0.378		0.110	0.90	0.47	0.74	0.58
	Band 38	Front	0.621	0.172	0.210	0.378	0.007	0.110	0.83	1.00	0.80	1.11
		Back	0.405	0.387	0.424	0.378	0.652	0.110	0.83	0.78	1.44	0.89
		Left side	1.160						1.16	1.16	1.16	1.16
		Right side	0.029	0.653	0.812	0.378	0.055	0.110	0.84	0.41	0.74	0.52
		Top side	0.252	0.653	0.812	0.378		0.110	1.06	0.63	0.91	0.74



<Bottom Antenna>

WWAN Band		Exposure Position	1	2	3	4	5	6	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant.1				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Front	0.312	0.172	0.210	0.378	0.007	0.110	0.52	0.69	0.49	0.80
		Back	0.407	0.387	0.424	0.378	0.652	0.110	0.83	0.79	1.45	0.90
		Left side	0.169						0.17	0.17	0.17	0.17
		Right side	0.359	0.653	0.812	0.378	0.055	0.110	1.17	0.74	1.07	0.85
		Top side		0.653	0.812	0.378		0.110	0.81	0.38	0.65	0.49
		Bottom side	0.279		0.201	0.378	0.036		0.48	0.66	0.32	0.66
	GSM1900	Front	0.361	0.172	0.210	0.378	0.007	0.110	0.57	0.74	0.54	0.85
		Back	0.436	0.387	0.424	0.378	0.652	0.110	0.86	0.81	1.48	0.92
		Left side	0.053						0.05	0.05	0.05	0.05
		Right side	0.085	0.653	0.812	0.378	0.055	0.110	0.90	0.46	0.79	0.57
		Top side		0.653	0.812	0.378		0.110	0.81	0.38	0.65	0.49
		Bottom side	1.114		0.201	0.378	0.036		1.32	1.49	1.15	1.49
WCDMA	Band II	Front	0.429	0.172	0.210	0.378	0.007	0.110	0.64	0.81	0.61	0.92
		Back	0.466	0.387	0.424	0.378	0.652	0.110	0.89	0.84	1.51	0.95
		Left side	0.032						0.03	0.03	0.03	0.03
		Right side	0.080	0.653	0.812	0.378	0.055	0.110	0.89	0.46	0.79	0.57
		Top side		0.653	0.812	0.378		0.110	0.81	0.38	0.65	0.49
		Bottom side	1.193		0.201	0.378	0.036		1.39	1.57	1.23	1.57
	Band IV	Front	0.396	0.172	0.210	0.378	0.007	0.110	0.61	0.77	0.58	0.88
		Back	0.512	0.387	0.424	0.378	0.652	0.110	0.94	0.89	1.55	1.00
		Left side	0.075						0.08	0.08	0.08	0.08
		Right side	0.077	0.653	0.812	0.378	0.055	0.110	0.89	0.46	0.79	0.57
		Top side		0.653	0.812	0.378		0.110	0.81	0.38	0.65	0.49
		Bottom side	1.063		0.201	0.378	0.036		1.26	1.44	1.10	1.44
	Band V	Front	0.341	0.172	0.210	0.378	0.007	0.110	0.55	0.72	0.52	0.83
		Back	0.407	0.387	0.424	0.378	0.652	0.110	0.83	0.79	1.45	0.90
		Left side	0.141						0.14	0.14	0.14	0.14
		Right side	0.383	0.653	0.812	0.378	0.055	0.110	1.20	0.76	1.09	0.87
		Top side		0.653	0.812	0.378		0.110	0.81	0.38	0.65	0.49
		Bottom side	0.317		0.201	0.378	0.036		0.52	0.70	0.35	0.70



WWAN Band		Exposure Position	1	2	3	4	5	6	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant.1				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
LTE	Band 5	Front	0.319	0.172	0.210	0.378	0.007	0.110	0.53	0.70	0.50	0.81
		Back	0.420	0.387	0.424	0.378	0.652	0.110	0.84	0.80	1.46	0.91
		Left side	0.112						0.11	0.11	0.11	0.11
		Right side	0.338	0.653	0.812	0.378	0.055	0.110	1.15	0.72	1.05	0.83
		Top side		0.653	0.812	0.378		0.110	0.81	0.38	0.65	0.49
		Bottom side	0.266		0.201	0.378	0.036		0.47	0.64	0.30	0.64
	Band 2	Front	0.352	0.172	0.210	0.378	0.007	0.110	0.56	0.73	0.53	0.84
		Back	0.417	0.387	0.424	0.378	0.652	0.110	0.84	0.80	1.46	0.91
		Left side	0.043						0.04	0.04	0.04	0.04
		Right side	0.084	0.653	0.812	0.378	0.055	0.110	0.90	0.46	0.79	0.57
		Top side		0.653	0.812	0.378		0.110	0.81	0.38	0.65	0.49
		Bottom side	1.139		0.201	0.378	0.036		1.34	1.52	1.18	1.52
	Band 4	Front	0.358	0.172	0.210	0.378	0.007	0.110	0.57	0.74	0.54	0.85
		Back	0.492	0.387	0.424	0.378	0.652	0.110	0.92	0.87	1.53	0.98
		Left side	0.076						0.08	0.08	0.08	0.08
		Right side	0.080	0.653	0.812	0.378	0.055	0.110	0.89	0.46	0.79	0.57
		Top side		0.653	0.812	0.378		0.110	0.81	0.38	0.65	0.49
		Bottom side	1.036		0.201	0.378	0.036		1.24	1.41	1.07	1.41
	Band 7	Front	0.333	0.172	0.210	0.378	0.007	0.110	0.54	0.71	0.51	0.82
		Back	0.382	0.387	0.424	0.378	0.652	0.110	0.81	0.76	1.42	0.87
		Left side	0.138						0.14	0.14	0.14	0.14
		Right side	0.075	0.653	0.812	0.378	0.055	0.110	0.89	0.45	0.78	0.56
		Top side		0.653	0.812	0.378		0.110	0.81	0.38	0.65	0.49
		Bottom side	0.981		0.201	0.378	0.036		1.18	1.36	1.02	1.36
	Band 38	Front	0.349	0.172	0.210	0.378	0.007	0.110	0.56	0.73	0.53	0.84
		Back	0.404	0.387	0.424	0.378	0.652	0.110	0.83	0.78	1.44	0.89
		Left side	0.200						0.20	0.20	0.20	0.20
		Right side	0.087	0.653	0.812	0.378	0.055	0.110	0.90	0.47	0.80	0.58
		Top side		0.653	0.812	0.378		0.110	0.81	0.38	0.65	0.49
		Bottom side	1.006		0.201	0.378	0.036		1.21	1.38	1.04	1.38



16.3 Body-Worn Accessory Exposure Conditions

<Top Antenna>

WWAN Band		Exposure Position	1	2	3	4	5	6	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant.1				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Front	0.236	0.172	0.210	0.101	0.027	0.036	0.45	0.34	0.44	0.37
		Back	0.254	0.217	0.216	0.521	0.546	0.036	0.47	0.78	1.02	0.81
	GSM1900	Front	0.087	0.172	0.210	0.101	0.027	0.036	0.30	0.19	0.29	0.22
		Back	0.100	0.217	0.216	0.521	0.546	0.036	0.32	0.62	0.86	0.66
WCDMA	Band II	Front	0.215	0.172	0.210	0.101	0.027	0.036	0.43	0.32	0.41	0.35
		Back	0.254	0.217	0.216	0.521	0.546	0.036	0.47	0.78	1.02	0.81
	Band IV	Front	0.245	0.172	0.210	0.101	0.027	0.036	0.46	0.35	0.44	0.38
		Back	0.293	0.217	0.216	0.521	0.546	0.036	0.51	0.81	1.06	0.85
	Band V	Front	0.210	0.172	0.210	0.101	0.027	0.036	0.42	0.31	0.41	0.35
		Back	0.223	0.217	0.216	0.521	0.546	0.036	0.44	0.74	0.99	0.78
LTE	Band 5	Front	0.194	0.172	0.210	0.101	0.027	0.036	0.40	0.30	0.39	0.33
		Back	0.208	0.217	0.216	0.521	0.546	0.036	0.42	0.73	0.97	0.77
	Band 2	Front	0.184	0.172	0.210	0.101	0.027	0.036	0.39	0.29	0.38	0.32
		Back	0.224	0.217	0.216	0.521	0.546	0.036	0.44	0.75	0.99	0.78
	Band 4	Front	0.220	0.172	0.210	0.101	0.027	0.036	0.43	0.32	0.42	0.36
		Back	0.260	0.217	0.216	0.521	0.546	0.036	0.48	0.78	1.02	0.82
	Band 7	Front	0.447	0.172	0.210	0.101	0.027	0.036	0.66	0.55	0.65	0.58
		Back	0.442	0.217	0.216	0.521	0.546	0.036	0.66	0.96	1.21	1.00
	Band 38	Front	0.257	0.172	0.210	0.101	0.027	0.036	0.47	0.36	0.46	0.39
		Back	0.233	0.217	0.216	0.521	0.546	0.036	0.45	0.75	1.00	0.79



<Bottom Antenna>

WWAN Band		Exposure Position	1	2	3	4	5	6	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant.1	2.4GHz WLAN Ant.1+2	5GHz WLAN Ant.1+2	5GHz WLAN Ant.2	Bluetooth Ant.1				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Front	0.260	0.172	0.210	0.101	0.027	0.036	0.47	0.36	0.46	0.40
		Back	0.305	0.217	0.216	0.521	0.546	0.036	0.52	0.83	1.07	0.86
	GSM1900	Front	0.255	0.172	0.210	0.101	0.027	0.036	0.47	0.36	0.45	0.39
		Back	0.375	0.217	0.216	0.521	0.546	0.036	0.59	0.90	1.14	0.93
WCDMA	Band II	Front	0.464	0.172	0.210	0.101	0.027	0.036	0.67	0.57	0.66	0.60
		Back	0.730	0.217	0.216	0.521	0.546	0.036	0.95	1.25	1.49	1.29
	Band IV	Front	0.460	0.172	0.210	0.101	0.027	0.036	0.67	0.56	0.66	0.60
		Back	0.620	0.217	0.216	0.521	0.546	0.036	0.84	1.14	1.38	1.18
	Band V	Front	0.249	0.172	0.210	0.101	0.027	0.036	0.46	0.35	0.45	0.39
		Back	0.300	0.217	0.216	0.521	0.546	0.036	0.52	0.82	1.06	0.86
LTE	Band 5	Front	0.218	0.172	0.210	0.101	0.027	0.036	0.43	0.32	0.42	0.36
		Back	0.259	0.217	0.216	0.521	0.546	0.036	0.48	0.78	1.02	0.82
	Band 2	Front	0.599	0.172	0.210	0.101	0.027	0.036	0.81	0.70	0.80	0.74
		Back	0.793	0.217	0.216	0.521	0.546	0.036	1.01	1.31	1.56	1.35
	Band 4	Front	0.421	0.172	0.210	0.101	0.027	0.036	0.63	0.52	0.62	0.56
		Back	0.560	0.217	0.216	0.521	0.546	0.036	0.78	1.08	1.32	1.12
	Band 7	Front	0.442	0.172	0.210	0.101	0.027	0.036	0.65	0.54	0.64	0.58
		Back	0.515	0.217	0.216	0.521	0.546	0.036	0.73	1.04	1.28	1.07
	Band 38	Front	0.269	0.172	0.210	0.101	0.027	0.036	0.48	0.37	0.47	0.41
		Back	0.309	0.217	0.216	0.521	0.546	0.036	0.53	0.83	1.07	0.87



16.4 Product specific 10g SAR Exposure Conditions

<Top Antenna>

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN	5GHz WLAN Ant.1+2	5GHz WLAN Ant.2		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE	Band 7	Left Side	3.445			3.45	3.45

<Bottom Antenna>

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN	5GHz WLAN Ant.1+2	5GHz WLAN Ant.2		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM1900	Bottom side	1.937	0.137	0.122	2.07	2.06
WCDMA	Band II	Bottom side	2.771	0.137	0.122	2.91	2.89
	Band IV	Bottom side	3.438	0.137	0.122	3.58	3.56
LTE	Band 2	Bottom side	3.467	0.137	0.122	3.60	3.59
	Band 4	Bottom side	3.437	0.137	0.122	3.57	3.56
	Band 7	Bottom side	3.420	0.137	0.122	3.56	3.54
	Band 38	Bottom side	1.633	0.137	0.122	1.77	1.76

Remark:

- For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.
- If SPLSR ≤ 0.10 for 10g SAR, simultaneously transmission SAR measurement is not necessary.

Test Engineer : Nick Hu, Yuan Zhao, Jiaxing Chang, Yuankai Kong



17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [8] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [9] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [13] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [14] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_835MHz

DUT: D835V2 - SN:4d151

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_850 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 41.168$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.01, 9.01, 9.01); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.79 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 36.44 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.28 W/kg ; SAR(10 g) = 1.51 W/kg

Maximum value of SAR (measured) = 2.87 W/kg

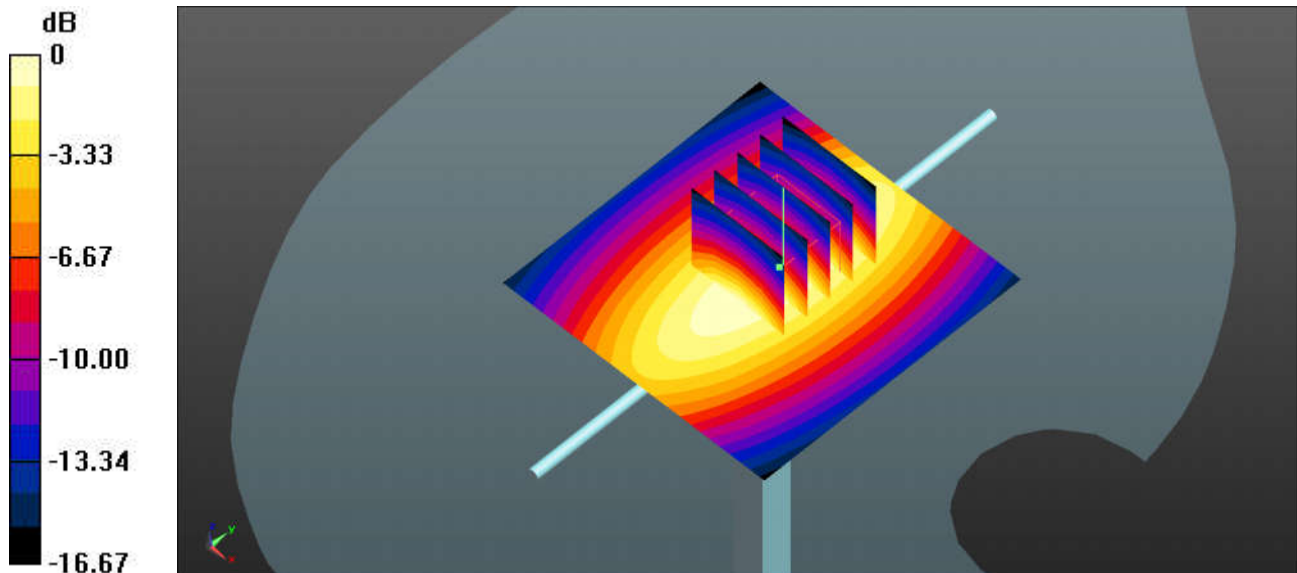

System Check_Head_1750MHz**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 39.75$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.61, 8.61, 8.61); Calibrated: 2019.4.25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.0 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 83.81 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 9.13 W/kg; SAR(10 g) = 4.99 W/kg

Maximum value of SAR (measured) = 12.6 W/kg

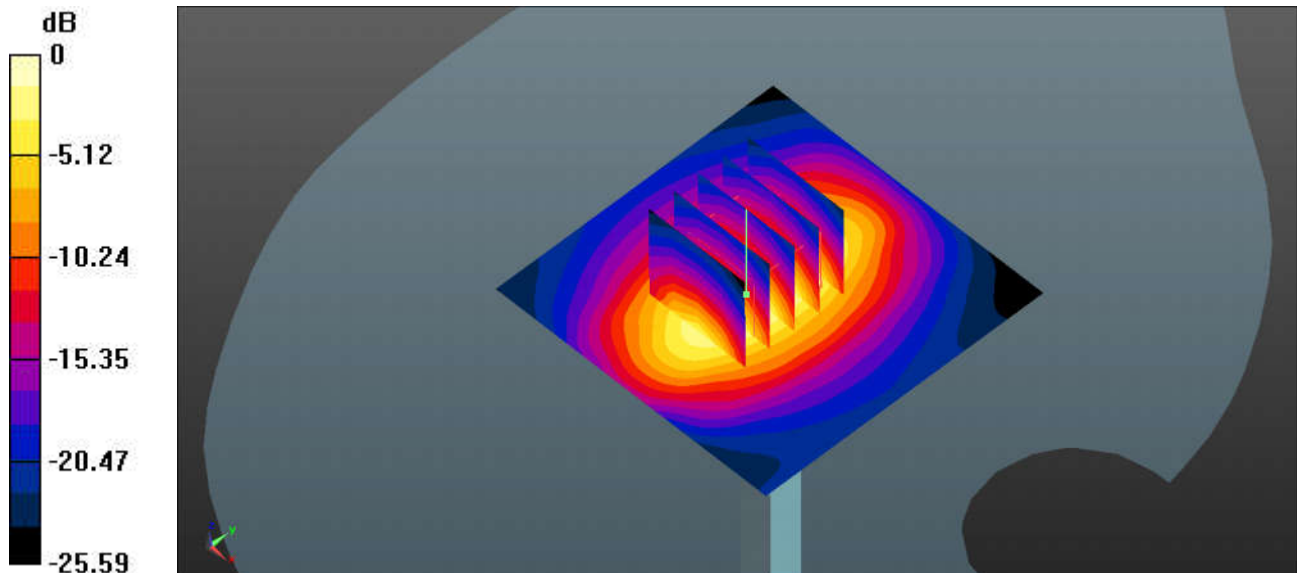

System Check_Head_1900MHz**DUT: D1900V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 38.97$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.35, 5.35, 5.35); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type: SAM ; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.6 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.40 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 9.76 W/kg; SAR(10 g) = 5.11 W/kg

Maximum value of SAR (measured) = 13.5 W/kg

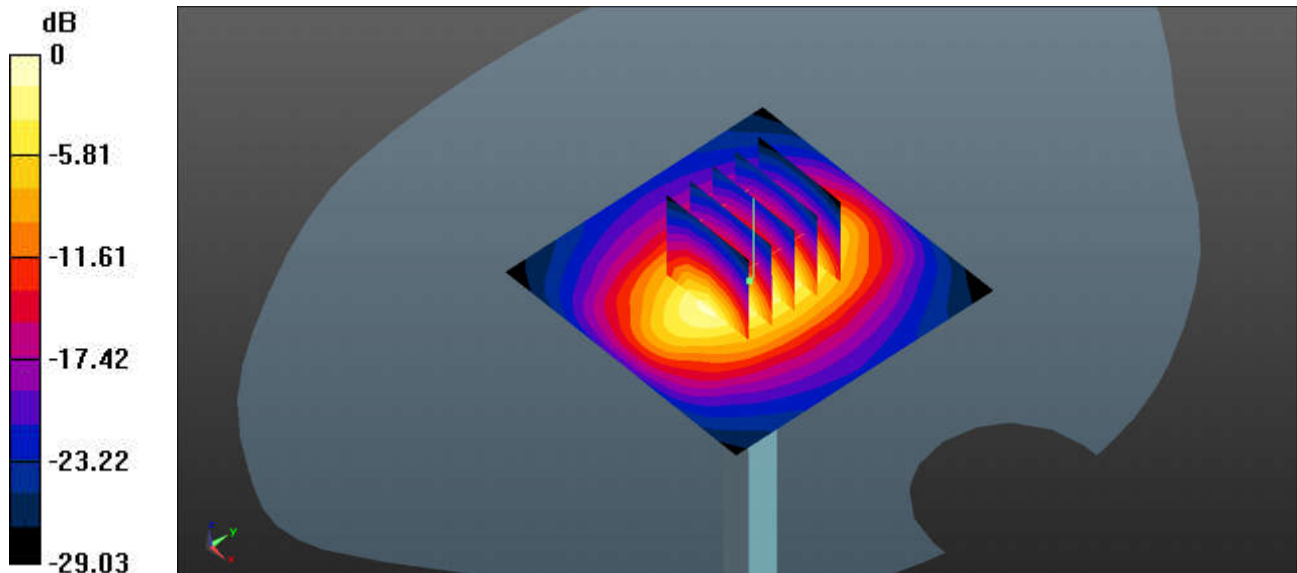

System Check_Head_2450MHz**DUT: D2450V2 - SN:908**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(7.62, 7.62, 7.62); Calibrated: 2019.4.25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type:SAM ; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.3 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.54 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.77 W/kg

Maximum value of SAR (measured) = 20.2 W/kg

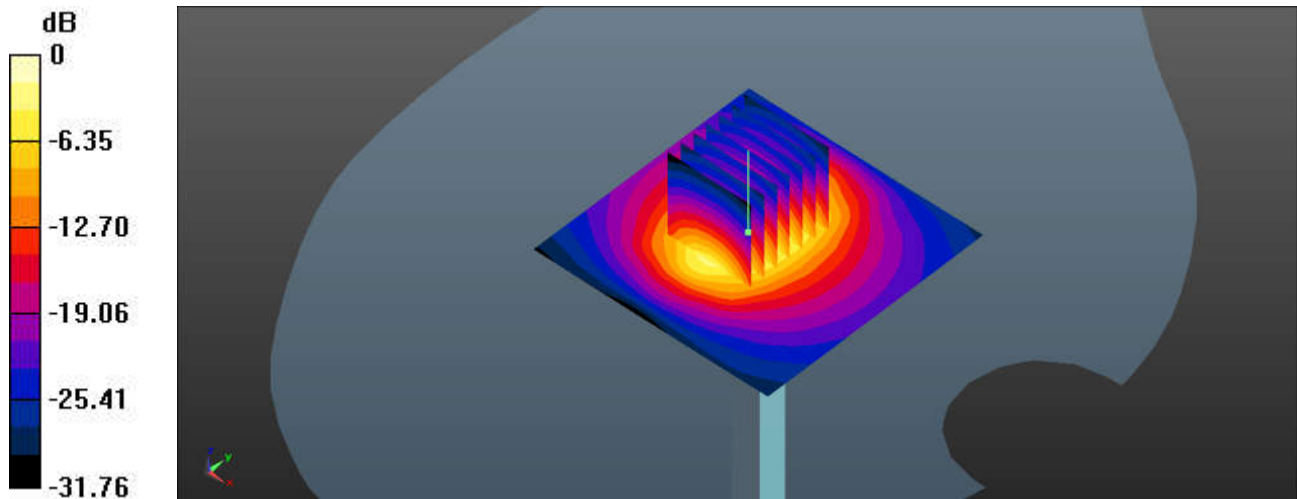

System Check_Head_2600MHz**DUT: D2600V2 - SN:1061**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.036$ S/m; $\epsilon_r = 37.899$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(4.58, 4.58, 4.58); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type: SAM ; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 21.2 W/kg



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.83 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.33 W/kg

Maximum value of SAR (measured) = 20.6 W/kg

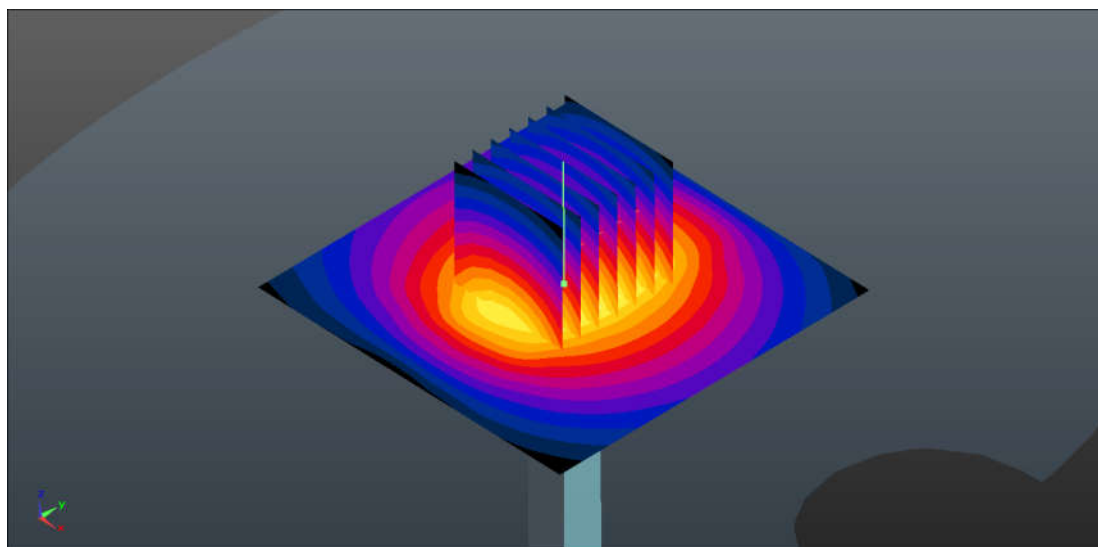

System Check_Head_5250MHz**DUT: D5GHzV2-SN:1006**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.834$ S/m; $\epsilon_r = 37.112$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.98, 4.98, 4.98); Calibrated: 2019.4.25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type:SAM ; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.3 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 37.80 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 34.9 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

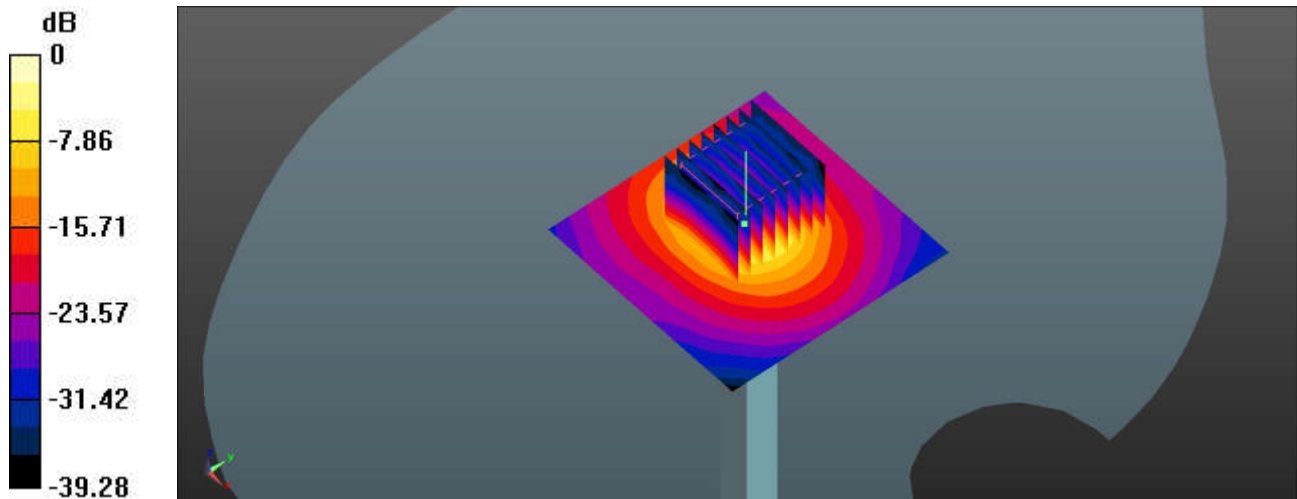

System Check_Head_5600MHz**DUT: D5GHzV2-SN:1006**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.201$ S/m; $\epsilon_r = 36.587$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.51, 4.51, 4.51); Calibrated: 2019.4.25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type: SAM ; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 21.6 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 33.66 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 39.0 W/kg

SAR(1 g) = 8.45 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

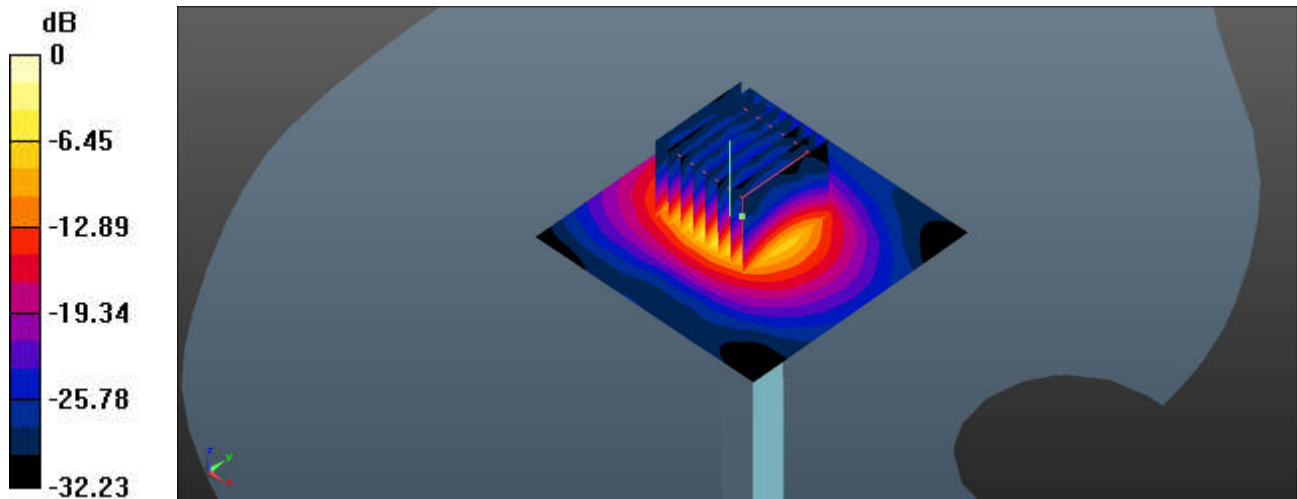

System Check_Head_5750MHz**DUT: D5GHzV2-SN:1006**

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.362$ S/m; $\epsilon_r = 36.382$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.65, 4.65, 4.65); Calibrated: 2019.4.25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type:SAM ; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 21.3 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.9 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 35.72 W/kg

SAR(1 g) = 8.23 W/kg; SAR(10 g) = 1.52 W/kg

Maximum value of SAR (measured) = 20.4 W/kg

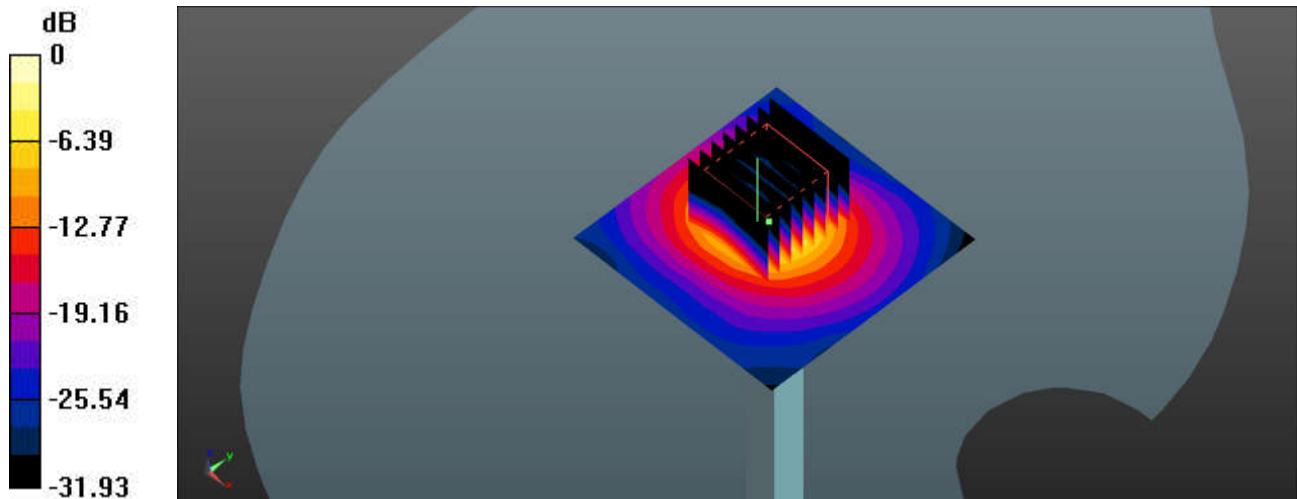



Appendix B. Plots of High SAR Measurement

The plots are shown as follows.

01_GSM850-UAT_GPRS 4 Tx slots_Right Cheek_0mm_Ch128

Communication System: UID 0, GSM850-4UP (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: HSL_850 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 41.29$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.01, 9.01, 9.01); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch128/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.48 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.03 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.955 W/kg; SAR(10 g) = 0.500 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

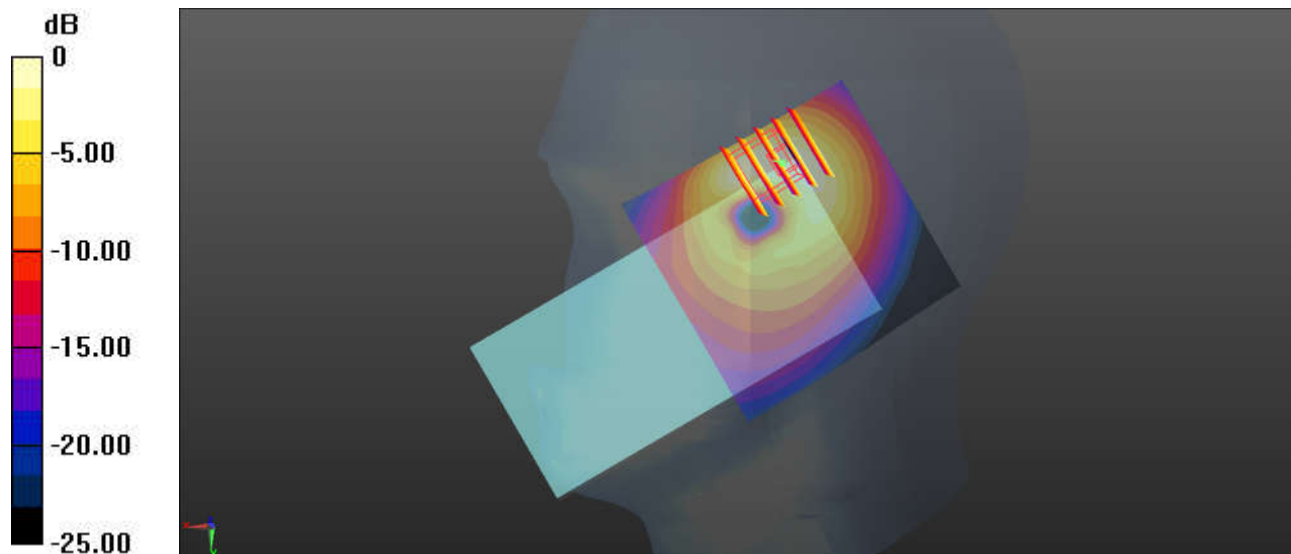

0 dB = 1.48 W/kg = 1.70 dBW/kg

02_GSM1900-UAT_GPRS 4 Tx slots_Right Cheek_0mm_Ch661

Communication System: UID 0, PCS-4UP (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 39.056$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.35, 5.35, 5.35); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type: SAM ; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch661/Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.964 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.78 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 0.851 W/kg

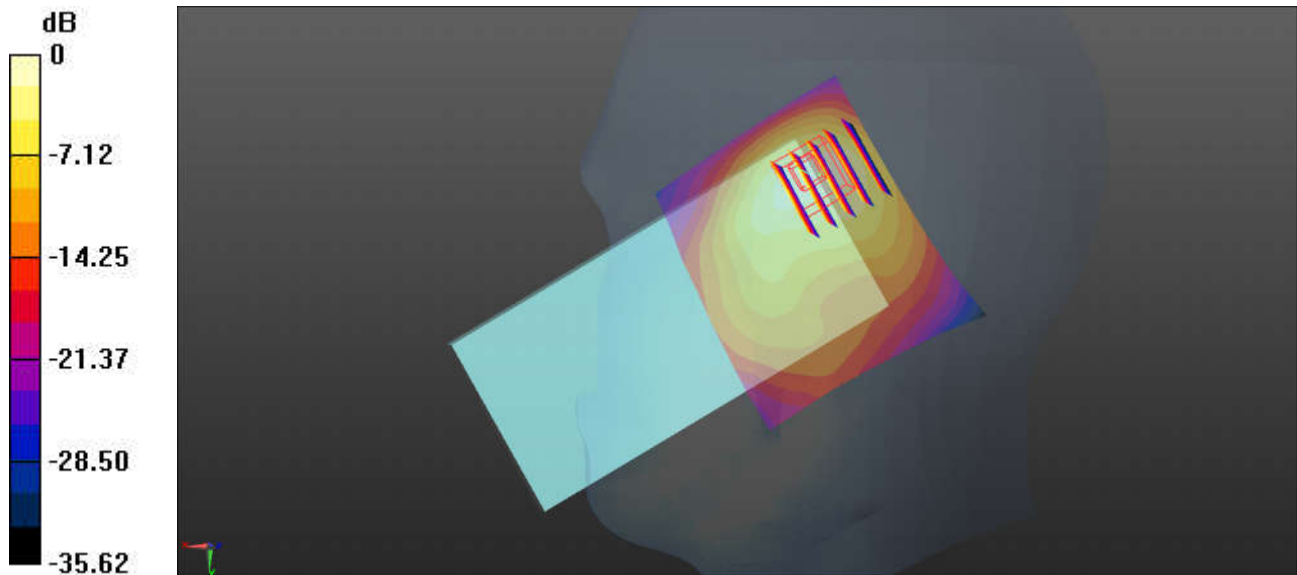

0 dB = 0.964 W/kg = -0.16 dBW/kg

03_WCDMA II-UAT_RMC 12.2Kbps_Right Cheek_0mm_Ch9538


Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.446$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3279; ConvF(5.35, 5.35, 5.35); Calibrated: 2019.3.4
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type: SAM ; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch9538/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.45 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.88 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 2.16 W/kg
SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.531 W/kg
Maximum value of SAR (measured) = 1.43 W/kg

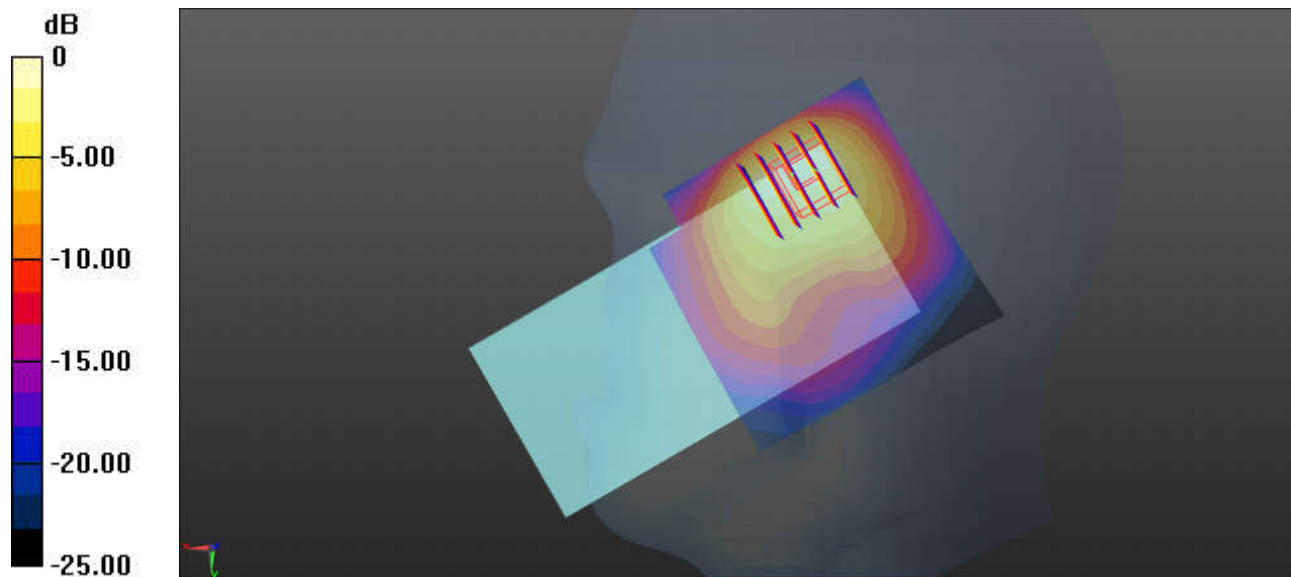

0 dB = 1.45 W/kg = 1.61 dBW/kg

04_WCDMA IV-UAT_RMC 12.2Kbps_Right Cheek_0mm_Ch1312


Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: HSL_1750 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 39.823$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.61, 8.61, 8.61); Calibrated: 2019.4.25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2018.12.3
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch1312/Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.46 W/kg

Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 1.060 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 2.14 W/kg
SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.564 W/kg
Maximum value of SAR (measured) = 1.48 W/kg

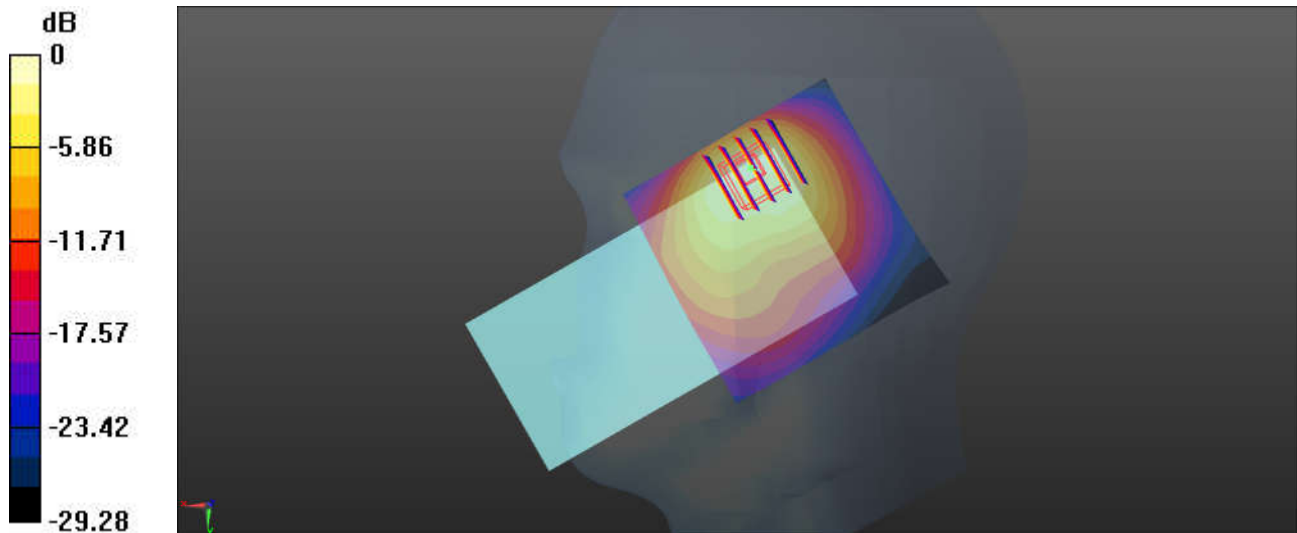

0 dB = 1.46 W/kg = 1.64 dBW/kg

05_WCDMA V-UAT_RMC 12.2Kbps_Right Cheek_0mm_Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.14$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.01, 9.01, 9.01); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Ch4182/Area Scan (81x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.36 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.34 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.971 W/kg; SAR(10 g) = 0.502 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

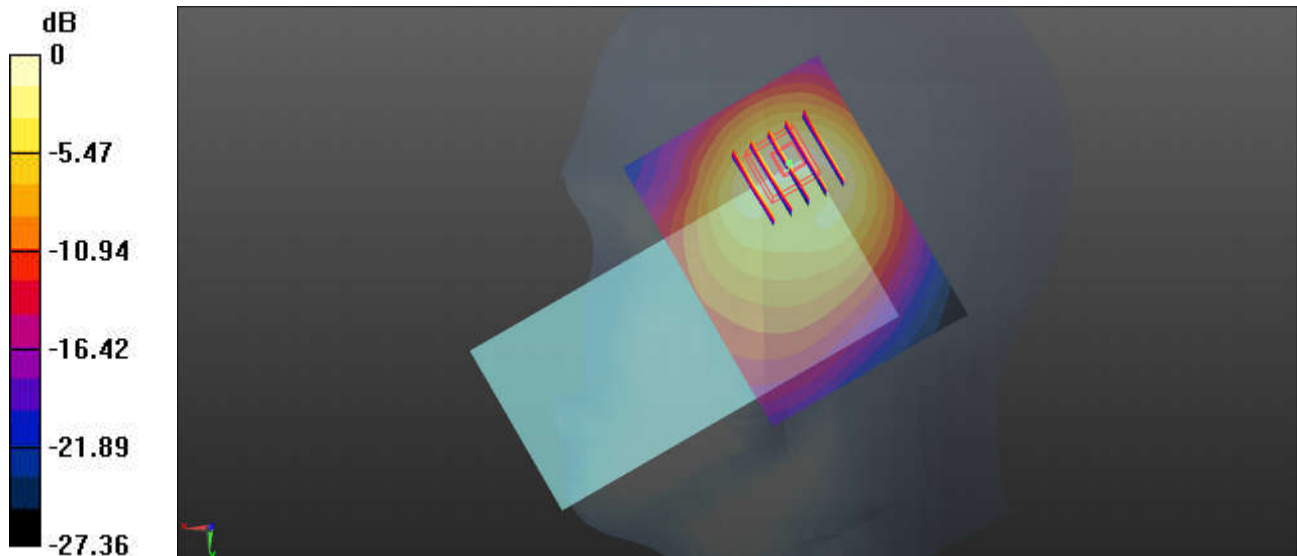

0 dB = 1.36 W/kg = 1.34 dBW/kg