



RF TEST REPORT

Applicant Xiaomi Communications Co., Ltd.
FCC ID 2AFZZ119UY
Product Mobile Phone
Brand Redmi
Model 22011119UY
Report No. R2110A0907-R1
Issue Date November 26, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2020)/ FCC CFR 47 Part 22H (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information	5
2.2. General Information.....	5
3. Applied Standards.....	7
4. Test Configuration.....	8
5. Test Case Results.....	10
5.1. RF Power Output and Effective Radiated Power	10
5.2. Occupied Bandwidth	15
5.3. Band Edge Compliance.....	26
5.4. Peak-to-Average Power Ratio (PAPR)	37
5.5. Frequency Stability.....	40
5.6. Spurious Emissions at Antenna Terminals	44
5.7. Radiates Spurious Emission	49
6. Main Test Instruments	57
ANNEX A: The EUT Appearance	58
ANNEX B: Test Setup Photos	59

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046 22.913(a)(5)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	2.1051 / 22.917(a)	PASS
4	Peak-to-Average Power Ratio	22.913(d) KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 22.355	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
7	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS

Date of Testing: October 26, 2021~ November 22, 2021

Date of Sample Received: October 26, 2021

Note: PASS: The EUT complies with the essential requirements in the standard.

FAIL: The EUT does not comply with the essential requirements in the standard.

All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Xiaomi Communications Co., Ltd.
Applicant address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer	Xiaomi Communications Co., Ltd.
Manufacturer address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

2.2. General Information

EUT Description			
Model	22011119UY		
IMEI	IMEI 1:865366050037984 IMEI 2:865366050037992		
Hardware Version	P2		
Software Version	MIUI12.5		
Antenna Type	PIFA Antenna		
Antenna Gain	Band	Low Antenna	Upper Antenna
	GSM850	-2.4dBi	-6.7dBi
	WCDMA Band V	-2.4dBi	-6.7dBi
	LTE Band 5	-2.4dBi	-6.7dBi
Test Mode(s)	GSM 850; WCDMA Band V; LTE Band 5;		
Test Modulation	(GSM/GPRS)GMSK, (EGPRS) GMSK/ 8PSK; (WCDMA) BPSK, QPSK, 16QAM; (LTE) QPSK, 16QAM, 64QAM;		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
HSDPA UE Category	24		
HSUPA UE Category	7		
LTE Category	7		
Memory	4G+64G, 4G+128G		
Maximum E.R.P.	GSM 850	28.53dBm	
	WCDMA Band V	19.99dBm	
	LTE Band 5	20.21dBm	
Rated Power Supply Voltage	3.87V		
Operating Voltage	Minimum: 3.6V Maximum: 4.45V		
Operating Temperature	Lowest: -10°C Highest: +60°C		
Testing Temperature	Lowest: -30°C Highest: +50°C		



Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 ~ 849	869 ~ 894
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 5	824 ~ 849	869 ~ 894

Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 22H (2020)

FCC CFR47 Part 2 (2020)

Reference standard:

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 850	WCDMA Band V
RF Power Output and Effective Radiated power	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC

Test modes are chosen as the worst case configuration below for LTE Band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM/ 64QAM	1	50%	100%	L	M	H
RF power output and Effective Radiated power	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	-	-	-	O	-
Spurious Emissions at Antenna Terminals	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case Results

5.1. RF Power Output and Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where:dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB)}.$$

Test Setup

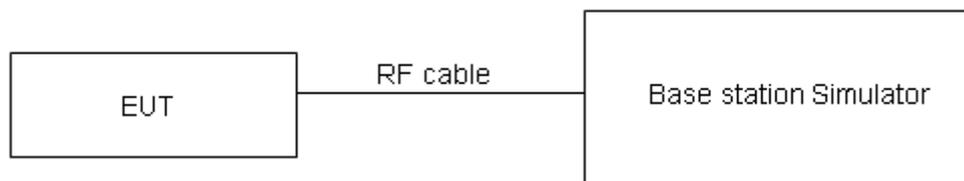

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	≤ 7 W (38.45 dBm)
-------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB for RF power output, $k = 2$, $U = 1.19$ dB for ERP.



Test Results

GSM 850		Maximum Output Power (dBm)			Low Antenna ERP (dBm)			Upper Antenna ERP (dBm)		
		Channel 128	Channel 190	Channel 251	Channel 128	Channel 190	Channel 251	Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)	824.2 (MHz)	836.6 (MHz)	848.8 (MHz)	824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM(GMSK)	Results	32.82	32.94	33.08	28.27	28.39	28.53	23.97	24.09	24.23
GPRS (GMSK)	1TXslot	33.08	32.93	32.80	28.53	28.38	28.25	24.23	24.08	23.95
	2TXslots	32.40	32.22	32.11	27.85	27.67	27.56	23.55	23.37	23.26
	3TXslots	30.44	30.41	30.30	25.89	25.86	25.75	21.59	21.56	21.45
	4TXslots	29.34	29.35	29.21	24.79	24.80	24.66	20.49	20.50	20.36
EGPRS (8PSK)	1TXslot	26.71	26.46	26.21	22.16	21.91	21.66	17.86	17.61	17.36
	2TXslots	24.65	24.47	24.65	20.10	19.92	20.10	15.80	15.62	15.80
	3TXslots	22.45	22.43	22.18	17.90	17.88	17.63	13.60	13.58	13.33
	4TXslots	21.47	21.44	21.56	16.92	16.89	17.01	12.62	12.59	12.71

WCDMA Band V		Maximum Output Power (dBm)			Low Antenna ERP (dBm)			Upper Antenna ERP (dBm)		
		Channel 4132	Channel 4183	Channel 4233	Channel 4132	Channel 4183	Channel 4233	Channel 4132	Channel 4183	Channel 4233
		826.4 (MHz)	836.6 (MHz)	846.6 (MHz)	826.4 (MHz)	836.6 (MHz)	846.6 (MHz)	826.4 (MHz)	836.6 (MHz)	846.6 (MHz)
RMC		24.50	24.49	24.54	19.95	19.94	19.99	15.65	15.64	15.69
HSDPA	Sub - Test 1	23.34	23.59	23.64	18.79	19.04	19.09	14.49	14.74	14.79
	Sub - Test 2	23.60	23.55	23.68	19.05	19.00	19.13	14.75	14.70	14.83
	Sub - Test 3	23.12	23.09	22.90	18.57	18.54	18.35	14.27	14.24	14.05
	Sub - Test 4	23.04	23.03	23.06	18.49	18.48	18.51	14.19	14.18	14.21
HSUPA	Sub - Test 1	22.36	22.59	22.52	17.81	18.04	17.97	13.51	13.74	13.67
	Sub - Test 2	21.40	21.53	21.52	16.85	16.98	16.97	12.55	12.68	12.67
	Sub - Test 3	22.58	22.49	22.64	18.03	17.94	18.09	13.73	13.64	13.79
	Sub - Test 4	21.44	21.37	21.50	16.89	16.82	16.95	12.59	12.52	12.65
	Sub - Test 5	23.52	23.65	23.46	18.97	19.10	18.91	14.67	14.80	14.61
DC-HSDPA	Sub - Test 1	23.54	23.49	23.44	18.99	18.94	18.89	14.69	14.64	14.59
	Sub - Test 2	23.46	23.37	23.48	18.91	18.82	18.93	14.61	14.52	14.63
	Sub - Test 3	22.86	22.85	22.98	18.31	18.30	18.43	14.01	14.00	14.13
	Sub - Test 4	23.02	22.93	23.02	18.47	18.38	18.47	14.17	14.08	14.17



LTE Band 5				Maximum Output Power(dBm)			Low Antenna ERP (dBm)			Upper Antenna ERP (dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)								
				20407 /824.7	20525 /836.5	20643 /848.3	20407 /824.7	20525 /836.5	20643 /848.3	20407 /824.7	20525 /836.5	20643 /848.3
1.4MHz	QPSK	1	0	24.58	24.58	24.56	20.03	20.03	20.01	15.73	15.73	15.71
		1	2	24.76	24.64	24.62	20.21	20.09	20.07	15.91	15.79	15.77
		1	5	24.67	24.56	24.63	20.12	20.01	20.08	15.82	15.71	15.78
		3	0	24.59	24.70	24.63	20.04	20.15	20.08	15.74	15.85	15.78
		3	2	24.60	24.69	24.66	20.05	20.14	20.11	15.75	15.84	15.81
		3	3	24.64	24.70	24.57	20.09	20.15	20.02	15.79	15.85	15.72
		6	0	23.69	23.81	23.71	19.14	19.26	19.16	14.84	14.96	14.86
	16QAM	1	0	23.87	23.84	23.74	19.32	19.29	19.19	15.02	14.99	14.89
		1	2	23.85	23.88	23.94	19.30	19.33	19.39	15.00	15.03	15.09
		1	5	23.85	23.77	23.85	19.30	19.22	19.30	15.00	14.92	15.00
		3	0	23.53	23.59	23.58	18.98	19.04	19.03	14.68	14.74	14.73
		3	2	23.55	23.62	23.62	19.00	19.07	19.07	14.70	14.77	14.77
		3	3	23.60	23.65	23.47	19.05	19.10	18.92	14.75	14.80	14.62
		6	0	22.64	22.75	22.65	18.09	18.20	18.10	13.79	13.90	13.80
	64QAM	1	0	22.68	22.78	22.59	18.13	18.23	18.04	13.83	13.93	13.74
		1	2	22.78	22.88	22.85	18.23	18.33	18.30	13.93	14.03	14.00
		1	5	22.76	22.87	22.76	18.21	18.32	18.21	13.91	14.02	13.91
		3	0	22.50	22.60	22.56	17.95	18.05	18.01	13.65	13.75	13.71
		3	2	22.54	22.61	22.57	17.99	18.06	18.02	13.69	13.76	13.72
		3	3	22.54	22.63	22.45	17.99	18.08	17.90	13.69	13.78	13.60
		6	0	21.62	21.69	21.60	17.07	17.14	17.05	12.77	12.84	12.75
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)								
				20415 /825.5	20525 /836.5	20635 /847.5	20415 /825.5	20525 /836.5	20635 /847.5	20415 /825.5	20525 /836.5	20635 /847.5
3MHz	QPSK	1	0	24.59	24.61	24.58	20.04	20.06	20.03	15.74	15.76	15.73
		1	7	24.75	24.68	24.67	20.20	20.13	20.12	15.90	15.83	15.82
		1	14	24.69	24.60	24.66	20.14	20.05	20.11	15.84	15.75	15.81
		8	0	23.69	23.82	23.76	19.14	19.27	19.21	14.84	14.97	14.91
		8	4	23.73	23.80	23.77	19.18	19.25	19.22	14.88	14.95	14.92
		8	7	23.74	23.83	23.68	19.19	19.28	19.13	14.89	14.98	14.83
		15	0	23.73	23.86	23.76	19.18	19.31	19.21	14.88	15.01	14.91
	16QAM	1	0	23.89	23.85	23.76	19.34	19.30	19.21	15.04	15.00	14.91



		1	7	23.88	23.90	23.98	19.33	19.35	19.43	15.03	15.05	15.13
		1	14	23.87	23.81	23.87	19.32	19.26	19.32	15.02	14.96	15.02
		8	0	22.65	22.73	22.71	18.10	18.18	18.16	13.80	13.88	13.86
		8	4	22.65	22.74	22.73	18.10	18.19	18.18	13.80	13.89	13.88
		8	7	22.70	22.77	22.60	18.15	18.22	18.05	13.85	13.92	13.75
		15	0	22.68	22.80	22.67	18.13	18.25	18.12	13.83	13.95	13.82
	64QAM	1	0	22.70	22.79	22.61	18.15	18.24	18.06	13.85	13.94	13.76
		1	7	22.81	22.90	22.87	18.26	18.35	18.32	13.96	14.05	14.02
		1	14	22.78	22.86	22.78	18.23	18.31	18.23	13.93	14.01	13.93
		8	0	21.62	21.74	21.69	17.07	17.19	17.14	12.77	12.89	12.84
		8	4	21.64	21.73	21.68	17.09	17.18	17.13	12.79	12.88	12.83
		8	7	21.64	21.75	21.58	17.09	17.20	17.03	12.79	12.90	12.73
		15	0	21.66	21.74	21.62	17.11	17.19	17.07	12.81	12.89	12.77
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)								
				20425 /826.5	20525 /836.5	20625 /846.5	20425 /826.5	20525 /836.5	20625 /846.5	20425 /826.5	20525 /836.5	20625 /846.5
5MHz	QPSK	1	0	24.58	24.57	24.56	20.03	20.02	20.01	15.73	15.72	15.71
		1	13	24.73	24.67	24.64	20.18	20.12	20.09	15.88	15.82	15.79
		1	24	24.66	24.55	24.62	20.11	20.00	20.07	15.81	15.70	15.77
		12	0	23.67	23.78	23.73	19.12	19.23	19.18	14.82	14.93	14.88
		12	6	23.70	23.75	23.73	19.15	19.20	19.18	14.85	14.90	14.88
		12	13	23.71	23.80	23.64	19.16	19.25	19.09	14.86	14.95	14.79
		25	0	23.71	23.82	23.71	19.16	19.27	19.16	14.86	14.97	14.86
	16QAM	1	0	23.84	23.83	23.74	19.29	19.28	19.19	14.99	14.98	14.89
		1	13	23.86	23.87	23.96	19.31	19.32	19.41	15.01	15.02	15.11
		1	24	23.84	23.77	23.84	19.29	19.22	19.29	14.99	14.92	14.99
		12	0	22.62	22.71	22.68	18.07	18.16	18.13	13.77	13.86	13.83
		12	6	22.62	22.69	22.69	18.07	18.14	18.14	13.77	13.84	13.84
		12	13	22.68	22.73	22.57	18.13	18.18	18.02	13.83	13.88	13.72
		25	0	22.65	22.75	22.63	18.10	18.20	18.08	13.80	13.90	13.78
	64QAM	1	0	22.65	22.77	22.59	18.10	18.22	18.04	13.80	13.92	13.74
		1	13	22.79	22.87	22.85	18.24	18.32	18.30	13.94	14.02	14.00
		1	24	22.79	22.85	22.79	18.24	18.30	18.24	13.94	14.00	13.94
		12	0	21.61	21.76	21.70	17.06	17.21	17.15	12.76	12.91	12.85
		12	6	21.62	21.70	21.67	17.07	17.15	17.12	12.77	12.85	12.82
		12	13	21.62	21.71	21.55	17.07	17.16	17.00	12.77	12.86	12.70
		25	0	21.63	21.69	21.58	17.08	17.14	17.03	12.78	12.84	12.73



BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)								
				20450 /829	20525 /836.5	20600 /844	20450 /829	20525 /836.5	20600 /844	20450 /829	20525 /836.5	20600 /844
10MHz	QPSK	1	0	24.55	24.53	24.53	20.00	19.98	19.98	15.70	15.68	15.68
		1	25	24.72	24.63	24.62	20.17	20.08	20.07	15.87	15.78	15.77
		1	49	24.64	24.54	24.59	20.09	19.99	20.04	15.79	15.69	15.74
		25	0	23.64	23.73	23.69	19.09	19.18	19.14	14.79	14.88	14.84
		25	13	23.68	23.71	23.70	19.13	19.16	19.15	14.83	14.86	14.85
		25	25	23.68	23.75	23.60	19.13	19.20	19.05	14.83	14.90	14.75
		50	0	23.68	23.77	23.67	19.13	19.22	19.12	14.83	14.92	14.82
	16QAM	1	0	23.67	23.79	23.69	19.12	19.24	19.14	14.82	14.94	14.84
		1	25	23.82	23.85	23.92	19.27	19.30	19.37	14.97	15.00	15.07
		1	49	23.82	23.74	23.82	19.27	19.19	19.27	14.97	14.89	14.97
		25	0	22.59	22.67	22.65	18.04	18.12	18.10	13.74	13.82	13.80
		25	13	22.59	22.67	22.66	18.04	18.12	18.11	13.74	13.82	13.81
		25	25	22.65	22.68	22.53	18.10	18.13	17.98	13.80	13.83	13.68
		50	0	22.63	22.71	22.60	18.08	18.16	18.05	13.78	13.86	13.75
	64QAM	1	0	22.63	22.73	22.54	18.08	18.18	17.99	13.78	13.88	13.69
		1	25	22.75	22.85	22.81	18.20	18.30	18.26	13.90	14.00	13.96
		1	49	22.73	22.79	22.73	18.18	18.24	18.18	13.88	13.94	13.88
		25	0	21.56	21.68	21.63	17.01	17.13	17.08	12.71	12.83	12.78
		25	13	21.58	21.66	21.61	17.03	17.11	17.06	12.73	12.81	12.76
		25	25	21.59	21.66	21.51	17.04	17.11	16.96	12.74	12.81	12.66
		50	0	21.61	21.65	21.55	17.06	17.10	17.00	12.76	12.80	12.70

5.2. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to $\geq 1\%EBW$, VBW is set to 3x RBW.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

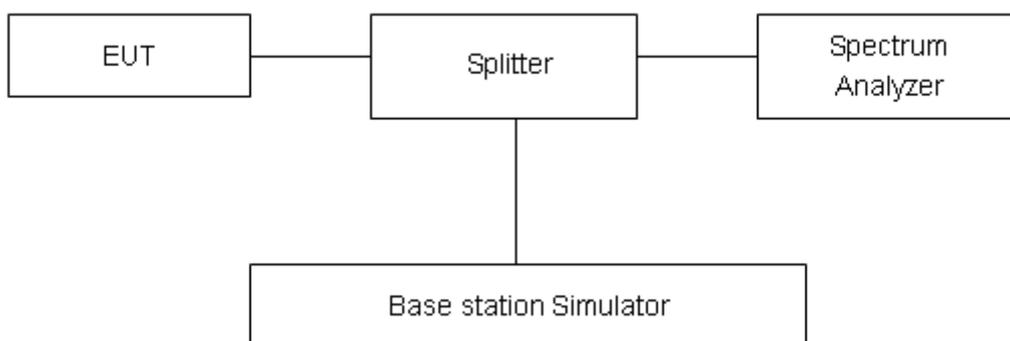

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.




Test Result







Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 850 (GMSK)	128	824.2	0.2485	0.3263
	190	836.6	0.2491	0.3176
	251	848.8	0.2446	0.3172
GPRS 850 (GMSK)	128	824.2	0.2462	0.3171
	190	836.6	0.2466	0.3107
	251	848.8	0.2494	0.3223
EGPRS 850 (8PSK)	128	824.2	0.2446	0.3095
	190	836.6	0.2458	0.3184
	251	848.8	0.2476	0.3090
WCDMA Band V (RMC)	4132	826.4	4.1658	4.693
	4183	836.6	4.1816	4.696
	4233	846.6	4.1739	4.695







LTE Band 5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20407	824.7	1.098	1.289
			20525	836.5	1.097	1.268
			20643	848.3	1.093	1.318
		3	20415	825.5	2.691	2.904
			20525	836.5	2.693	2.913
			20635	847.5	2.694	2.932
		5	20425	826.5	4.511	4.885
			20525	836.5	4.508	4.888
			20625	846.5	4.523	4.946
		10	20450	829	8.969	9.598
			20525	836.5	8.991	9.625
			20600	844	8.975	9.700
	16QAM	1.4	20407	824.7	1.094	1.259
			20525	836.5	1.099	1.299
			20643	848.3	1.098	1.271















		3	20415	825.5	2.692	2.918
			20525	836.5	2.682	2.936
			20635	847.5	2.691	2.902
		5	20425	826.5	4.490	4.910
			20525	836.5	4.511	4.928
			20625	846.5	4.504	4.945
		10	20450	829	8.980	9.687
			20525	836.5	8.985	9.652
			20600	844	8.956	9.690
	64QAM	1.4	20407	824.7	1.097	1.280
			20525	836.5	1.100	1.293
			20643	848.3	1.095	1.282
		3	20415	825.5	2.684	2.926
			20525	836.5	2.692	2.956
			20635	847.5	2.690	2.937
		5	20425	826.5	4.504	4.893
			20525	836.5	4.507	4.901
			20625	846.5	4.511	4.914
		10	20450	829	8.977	9.616
			20525	836.5	9.003	9.744
			20600	844	8.969	9.692






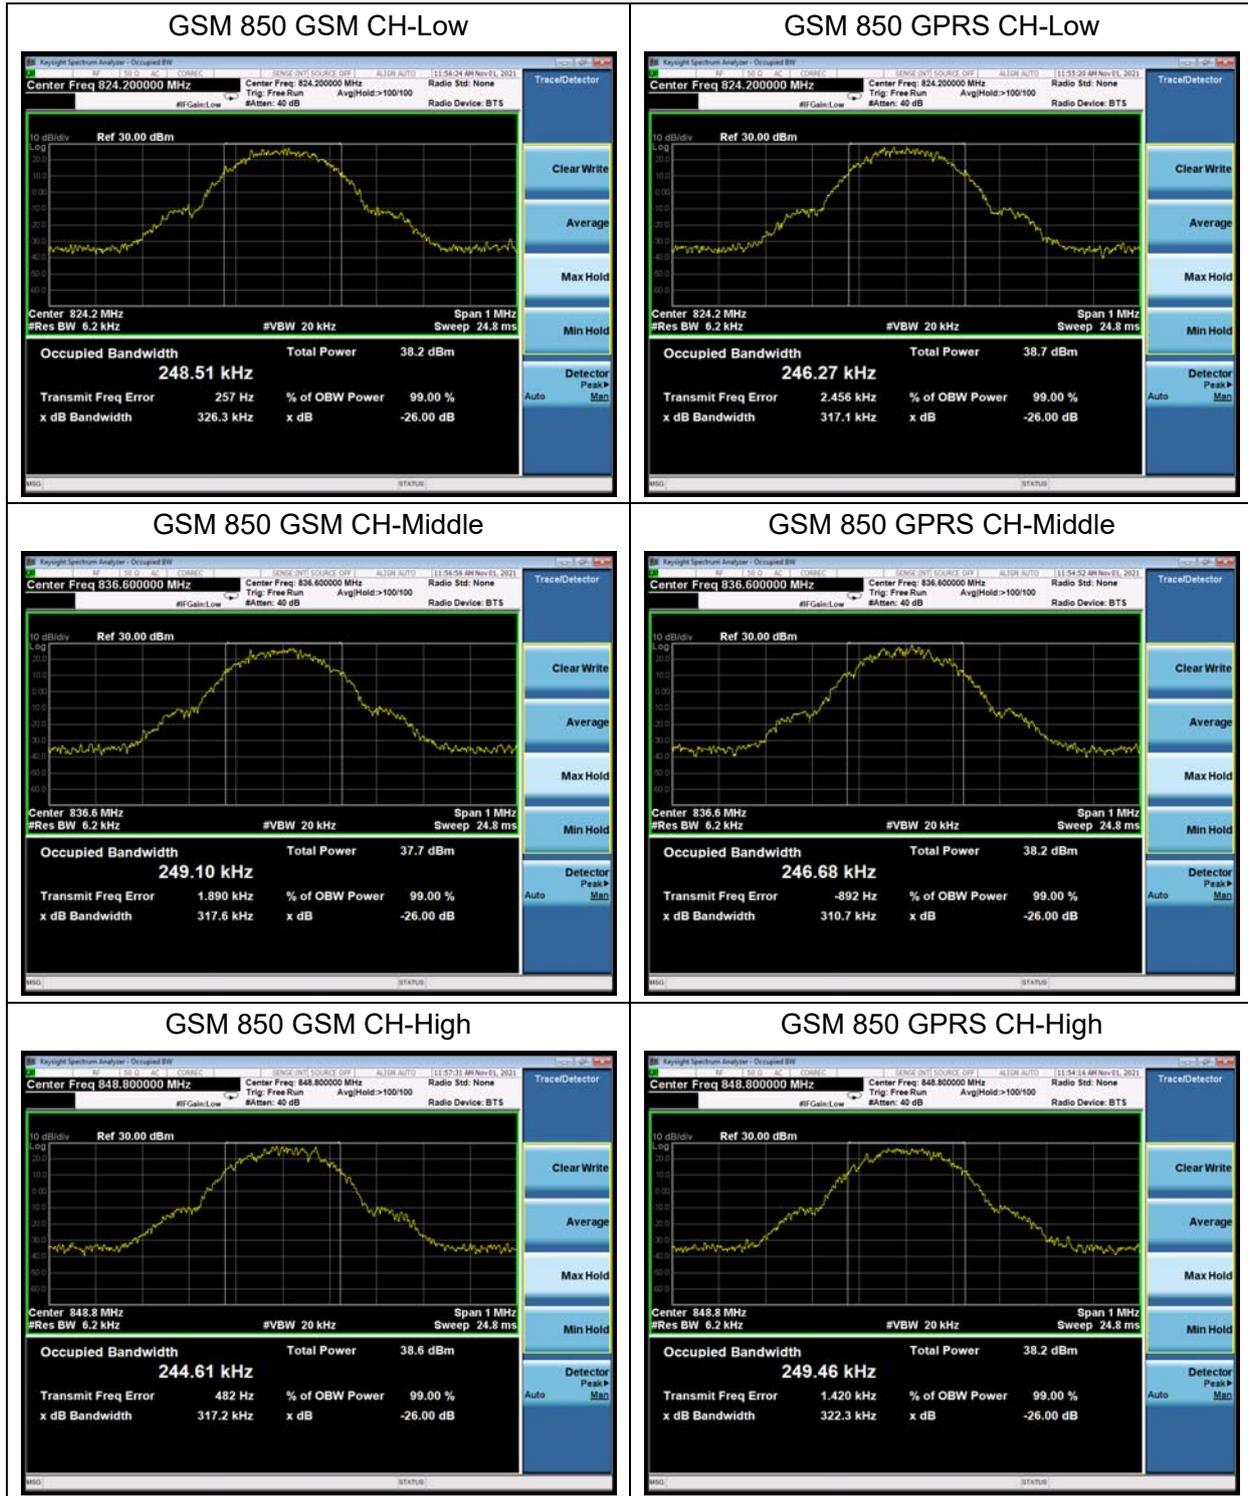


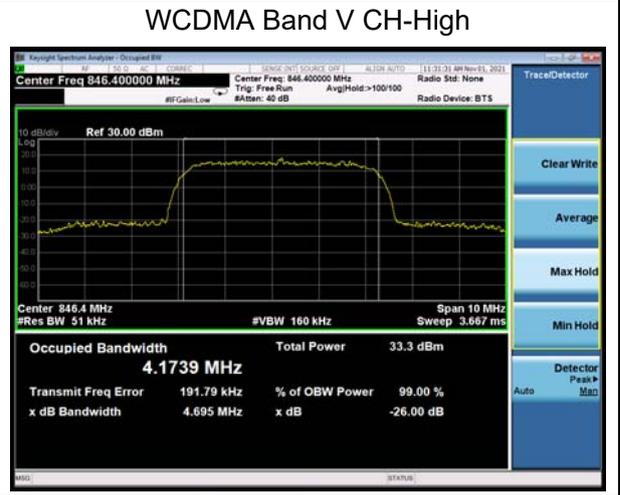
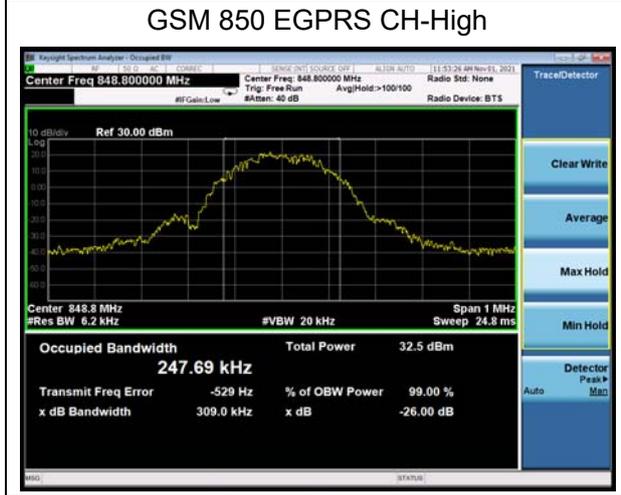
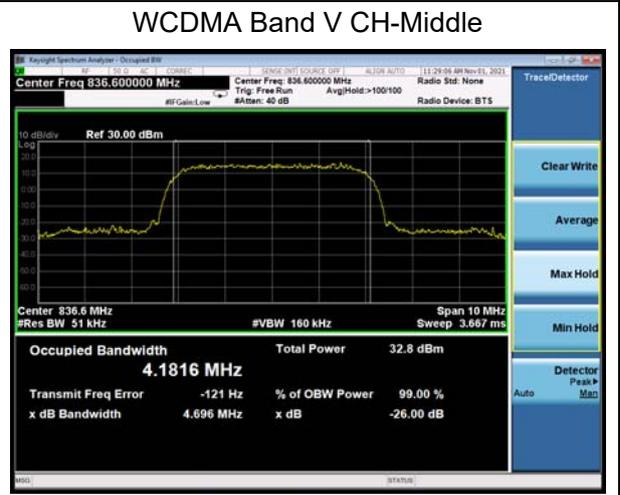
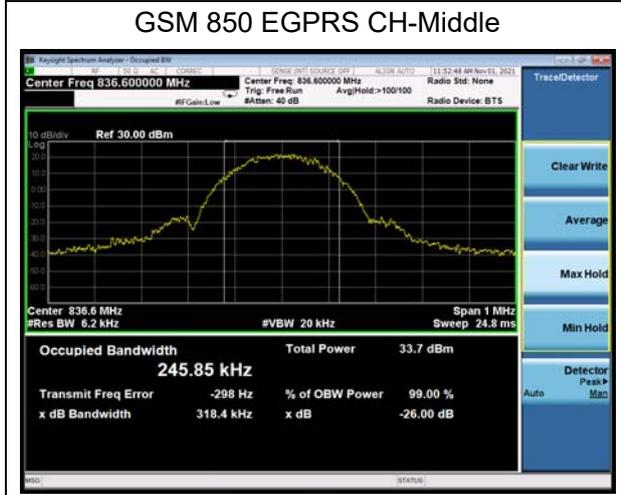
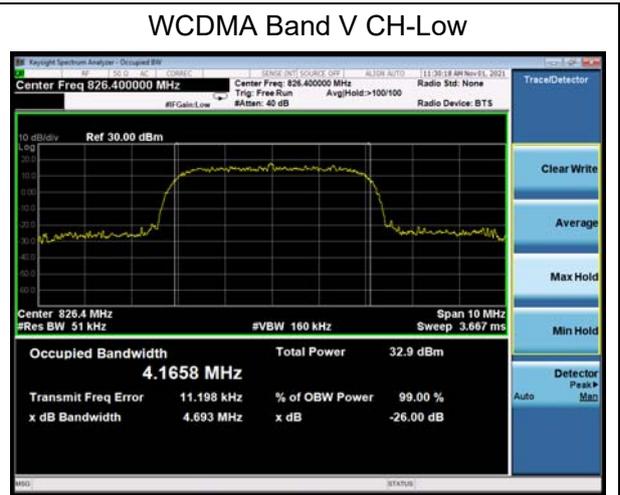
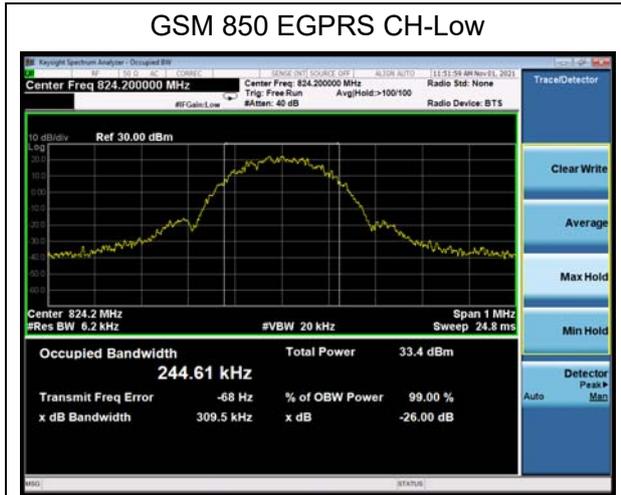


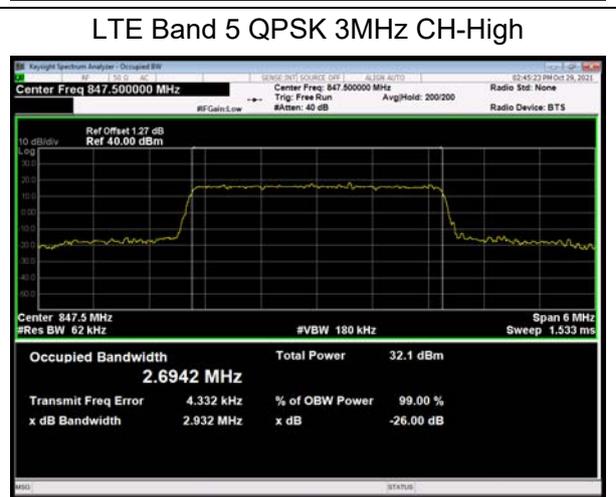
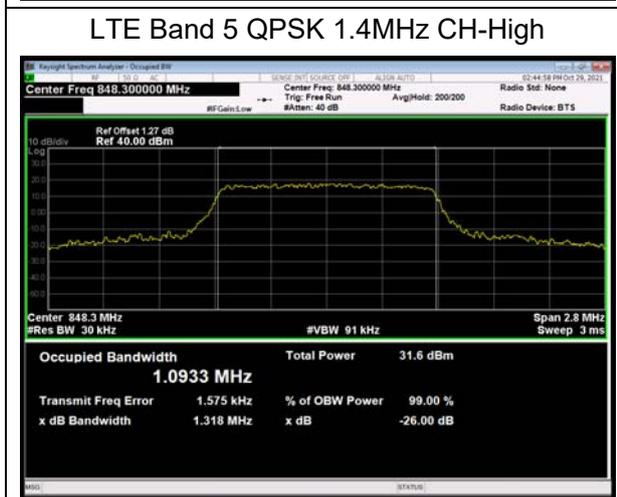
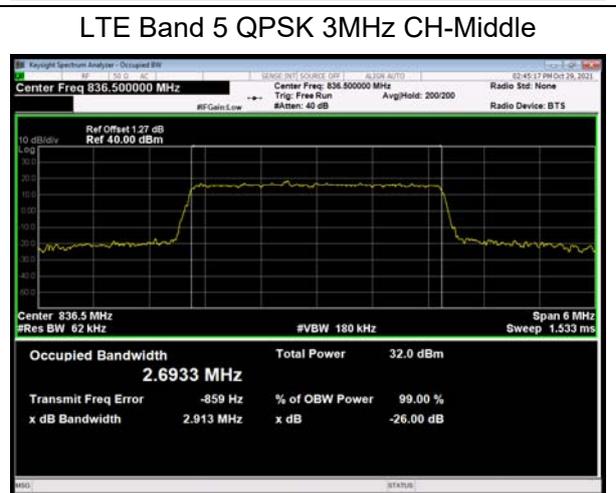
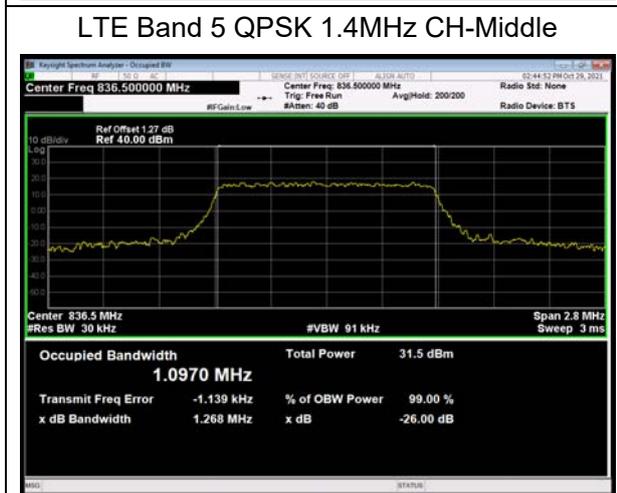
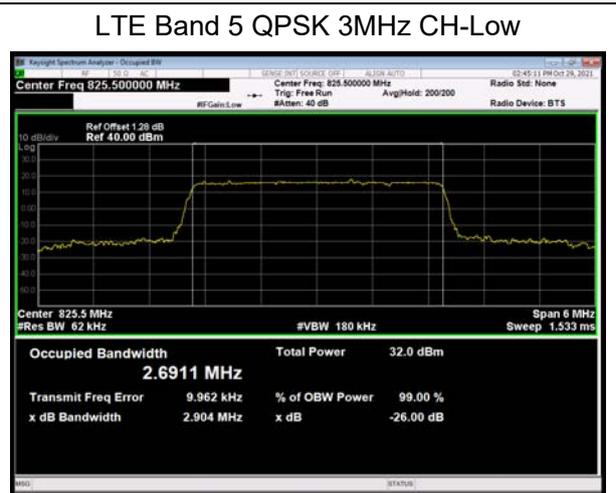
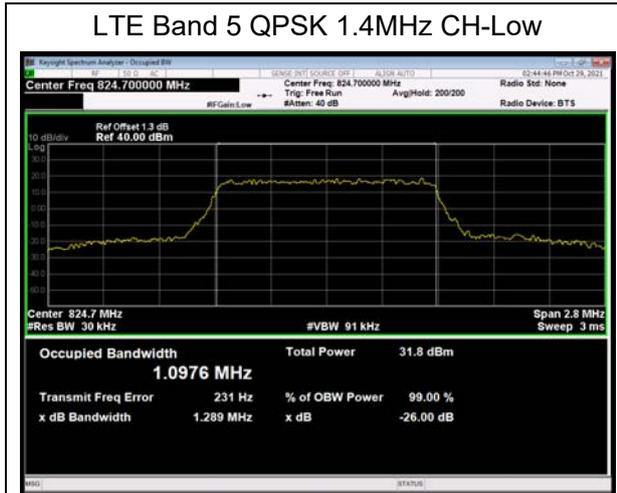


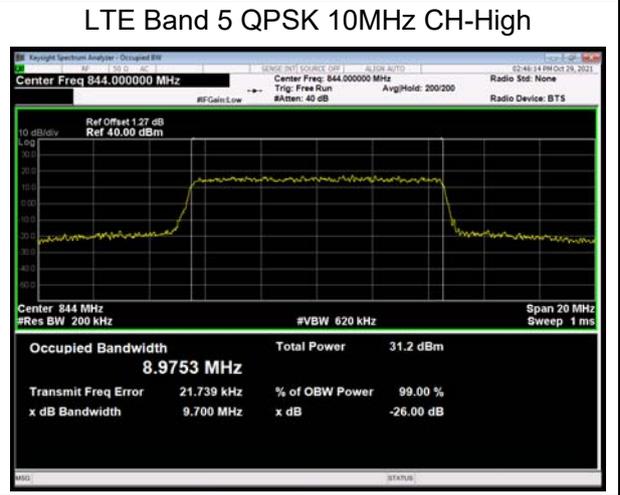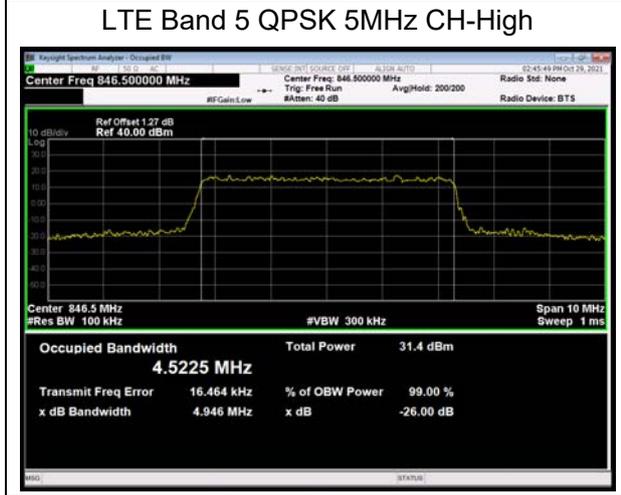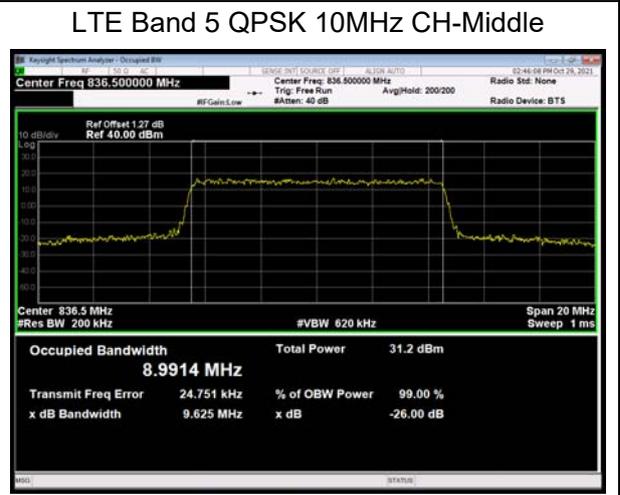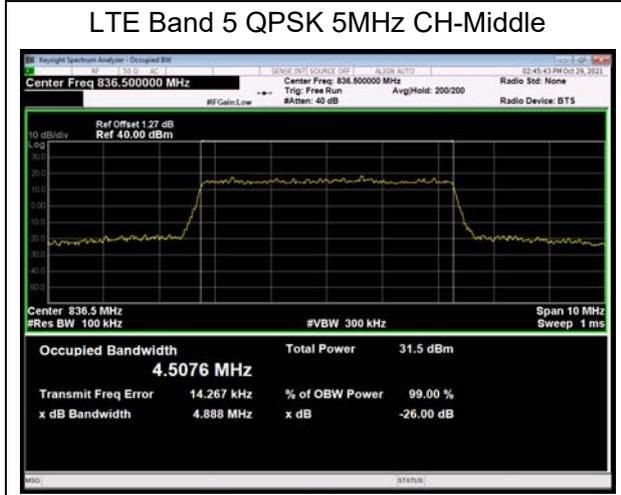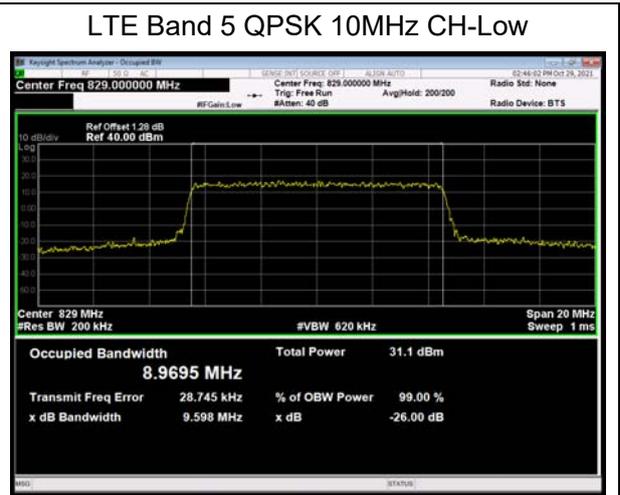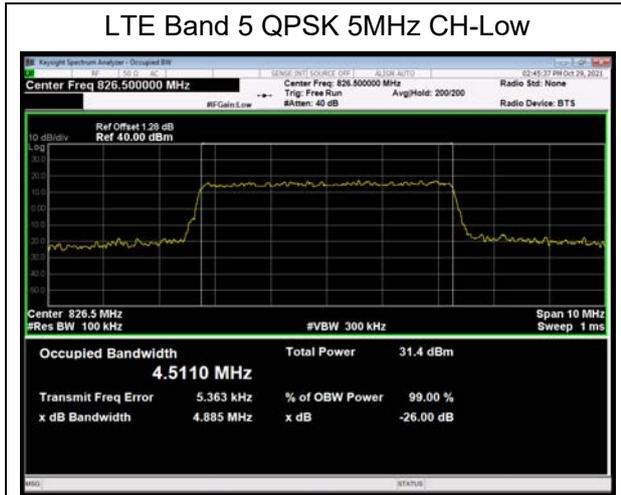

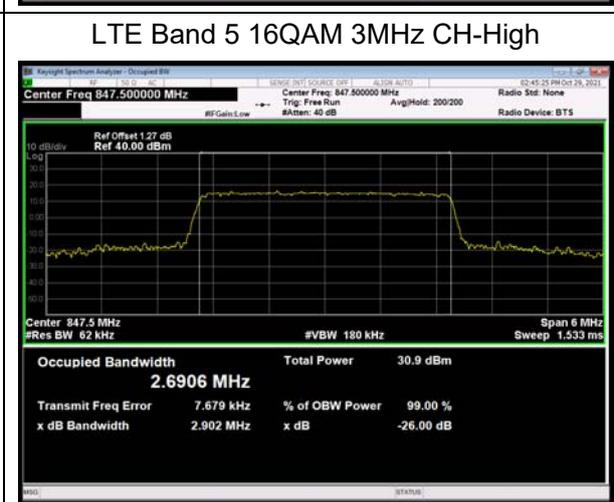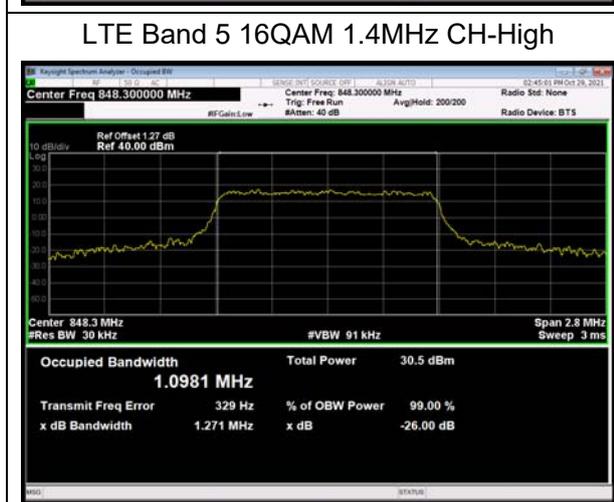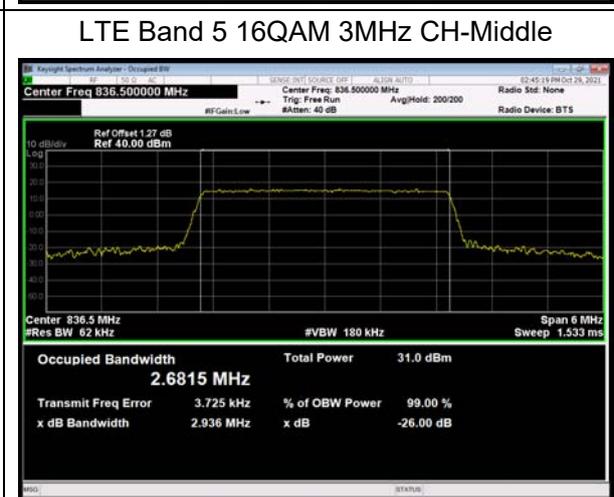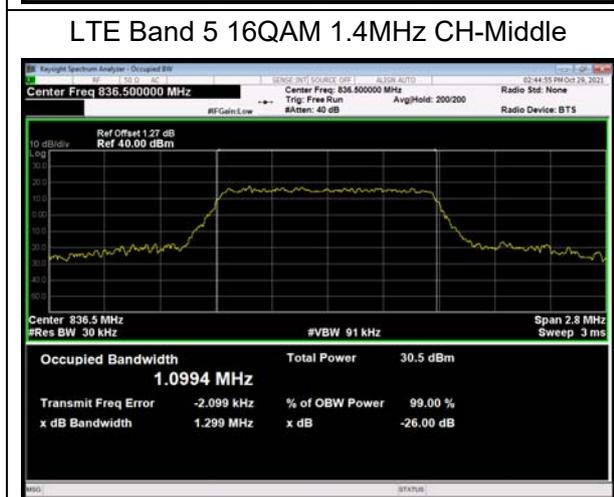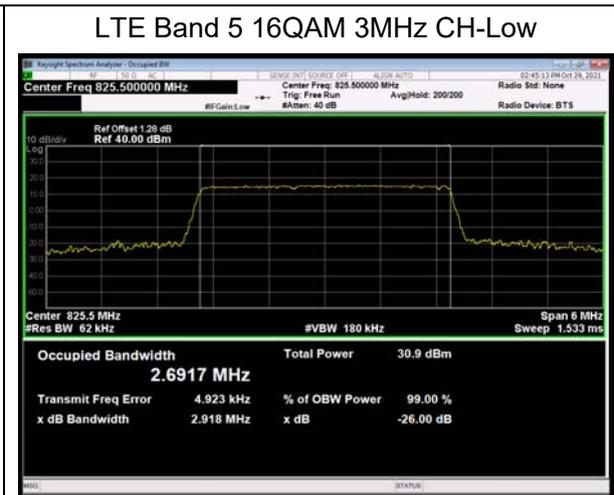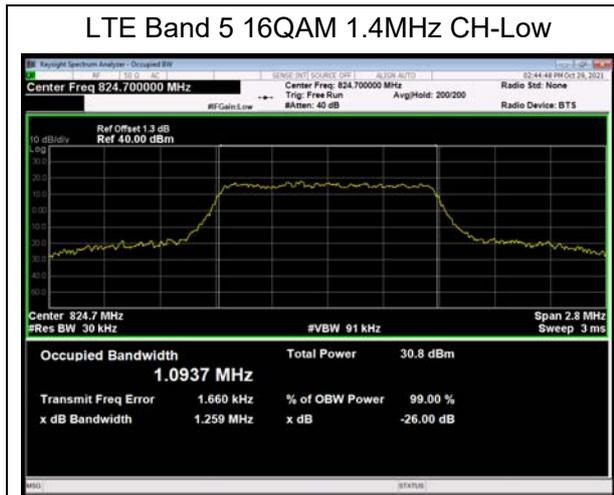

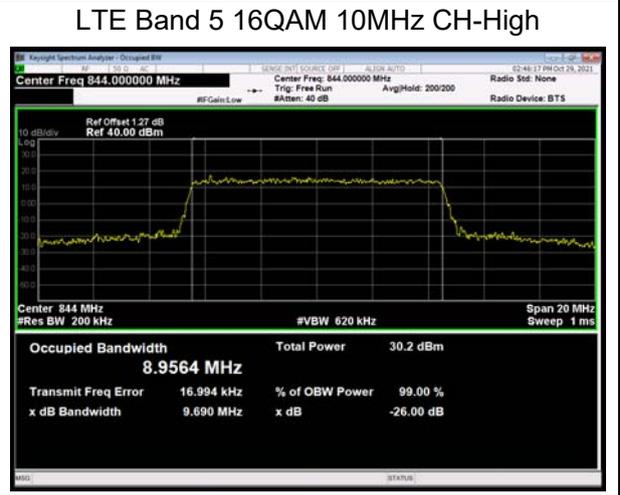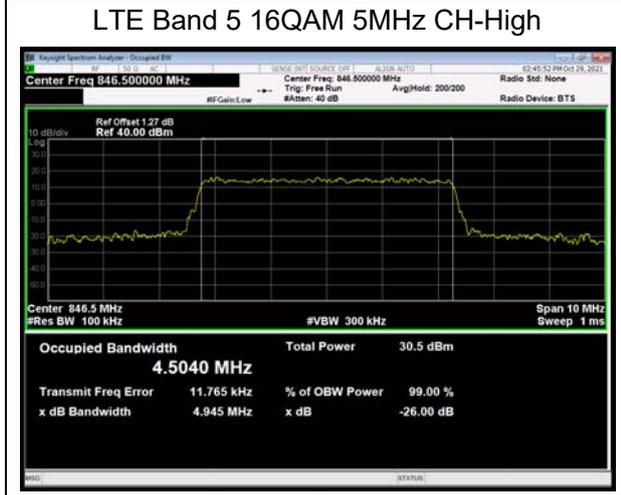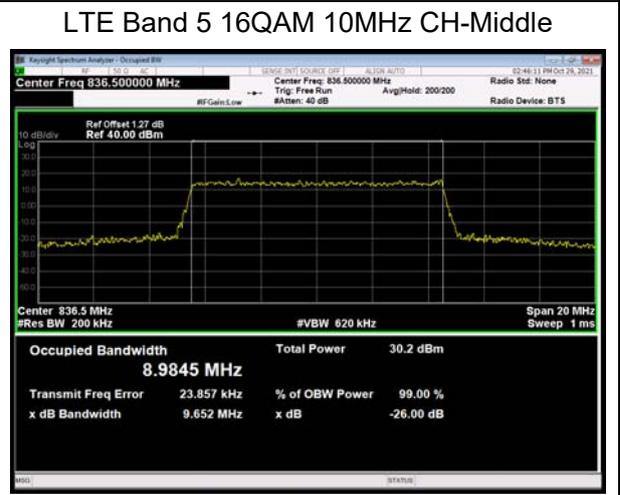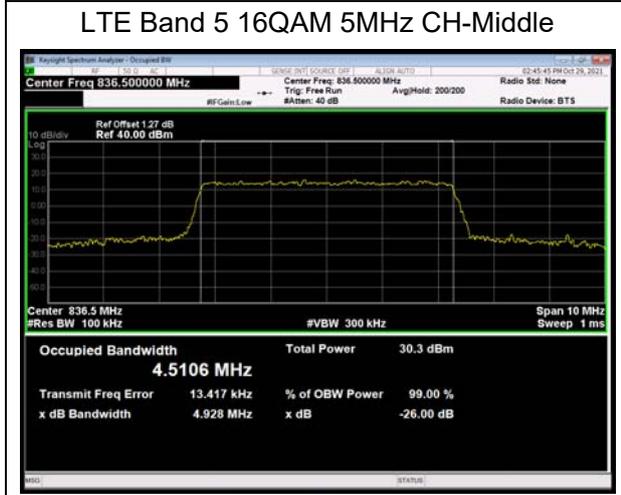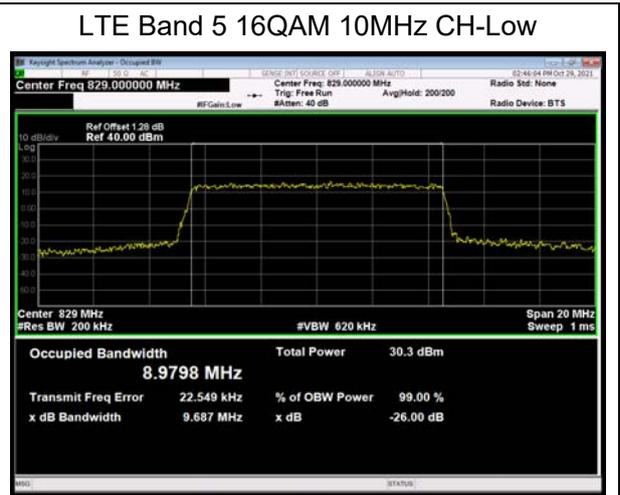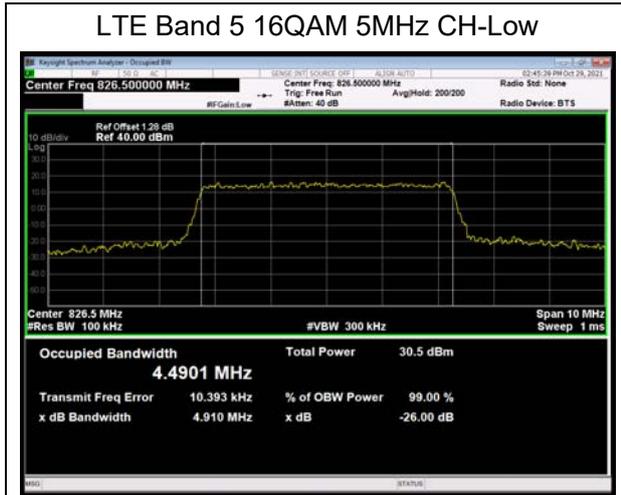

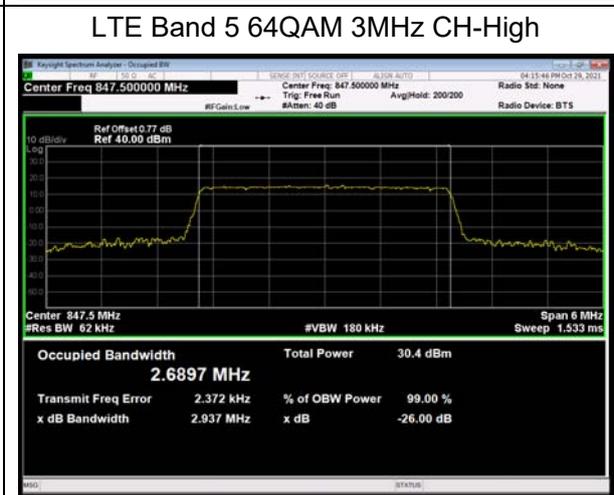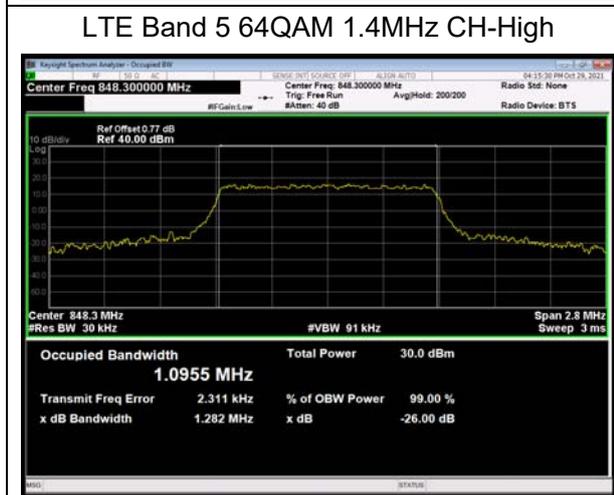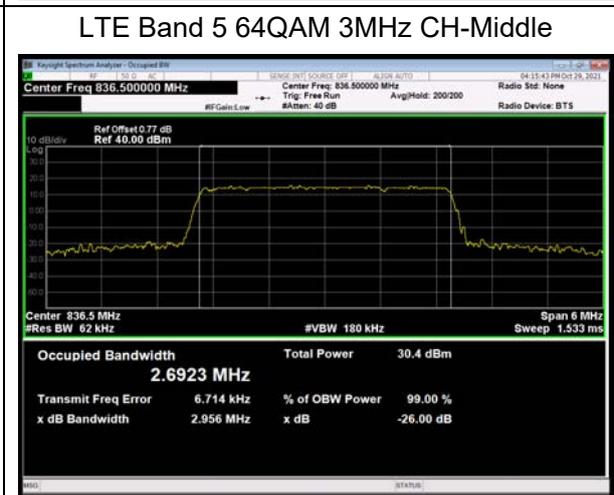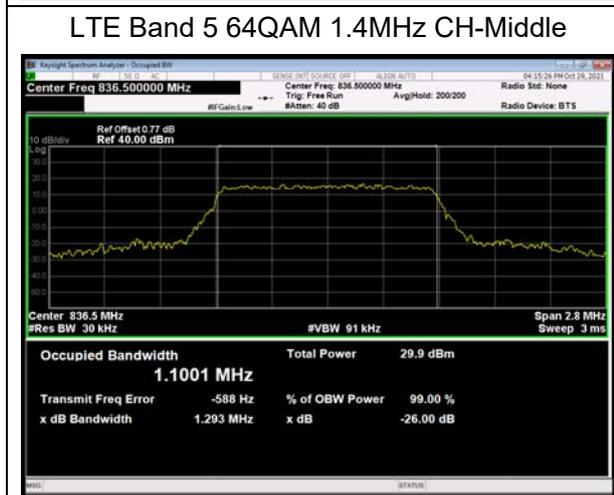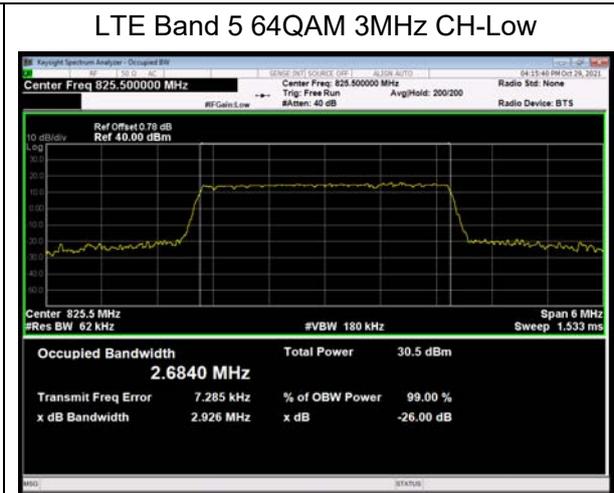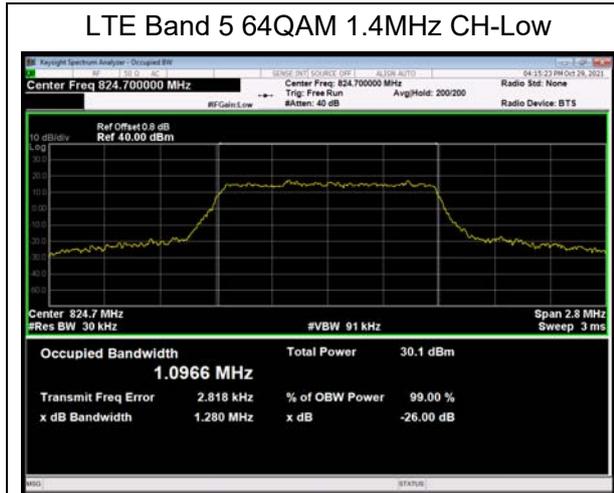

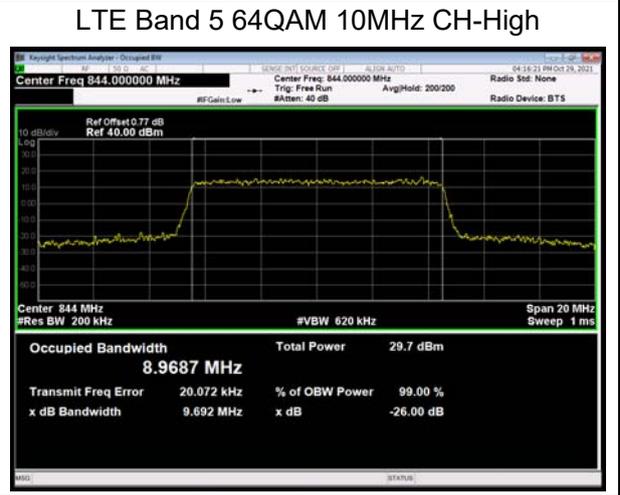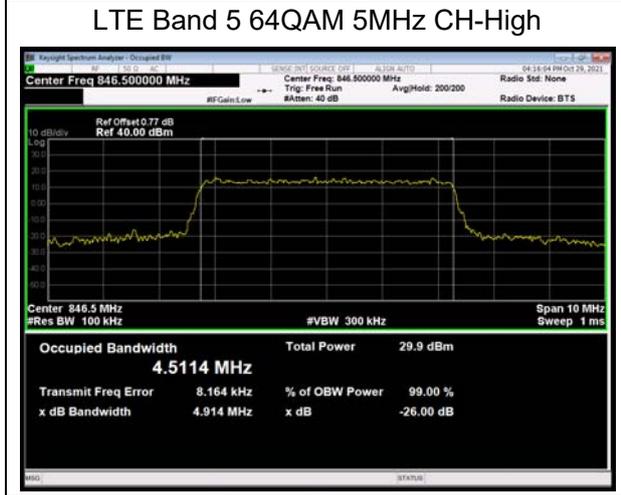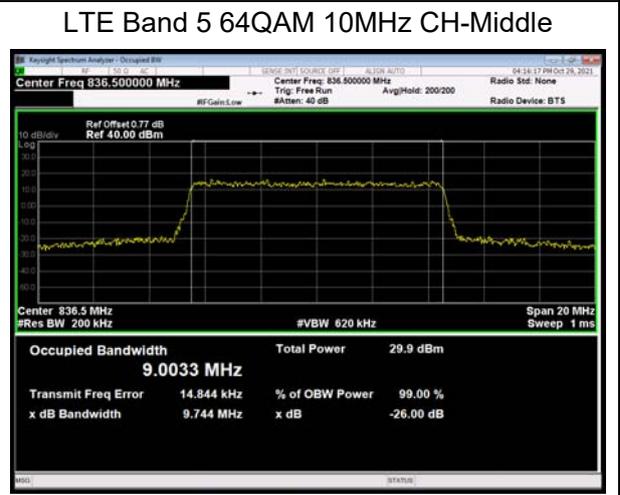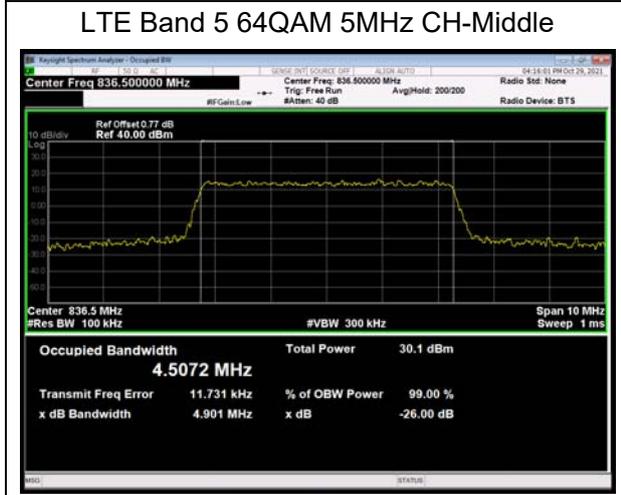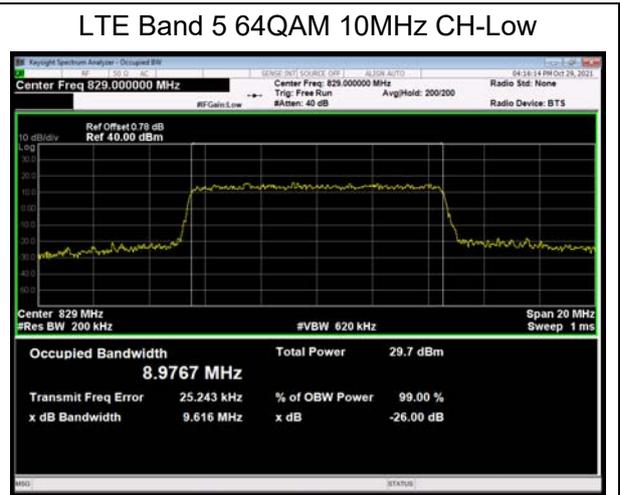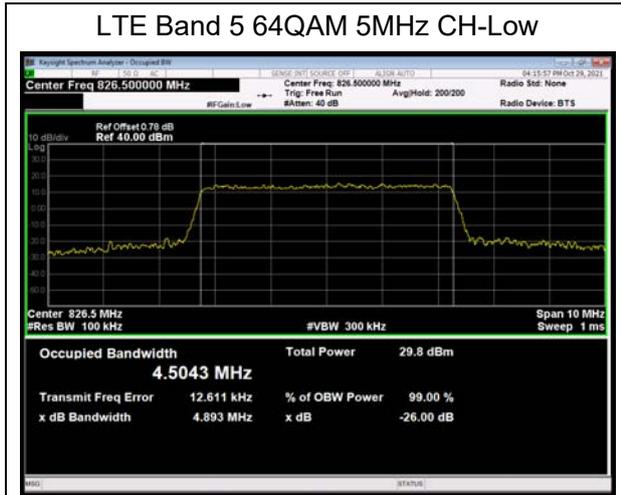

5.3. Band Edge Compliance

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to $\geq 1\%EBW$, VBW is set to 3x RBW.

Spectrum analyzer plots are included on the following pages.

Test Setup

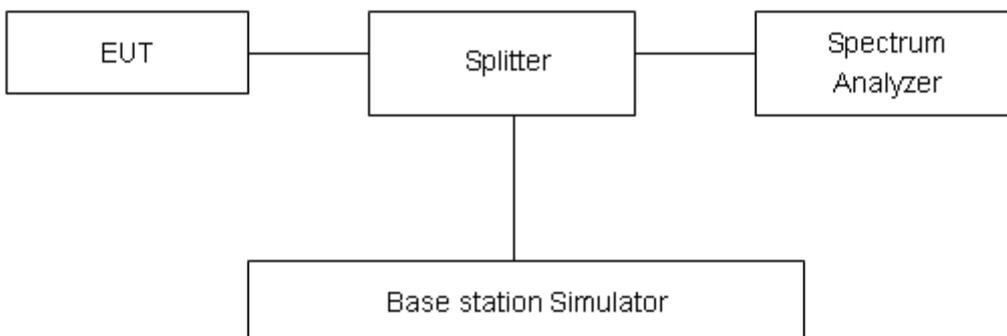

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684dB$.

Test Result:

GSM 850 CH-Low



GSM 850 CH-High




GSM 850 GPRS CH-Low




GSM 850 GPRS CH-High



GSM 850 EGPRS CH-Low

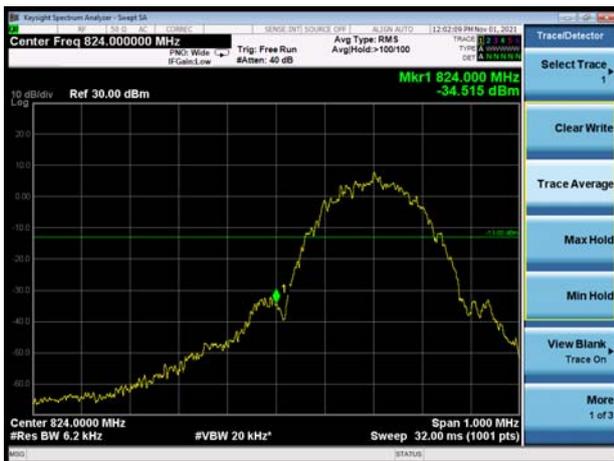

GSM 850 EGPRS CH-High

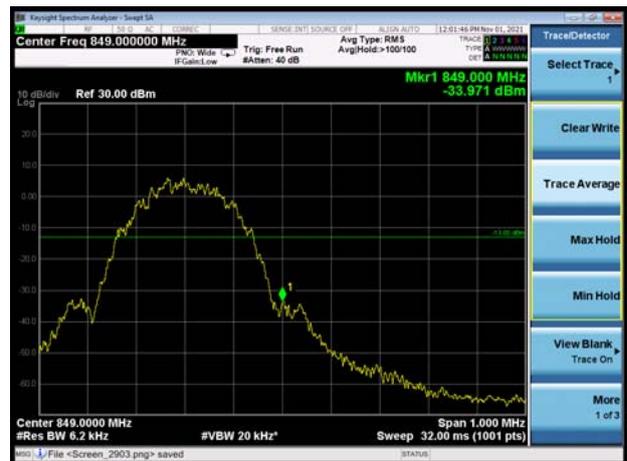



WCDMA Band V CH-Low




WCDMA Band V CH-High







LTE Band 5 QPSK 1.4MHz CH-Low 1RB

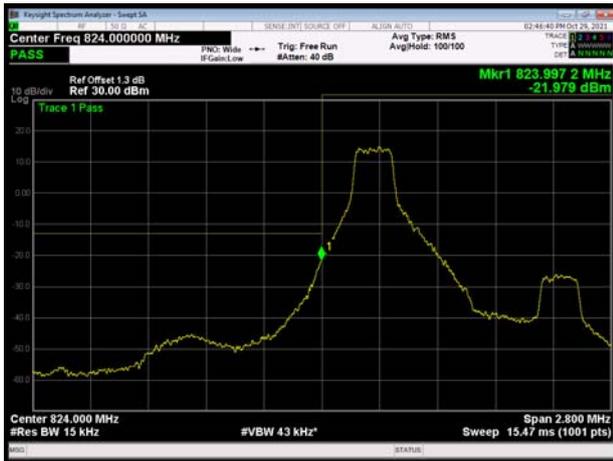

LTE Band 5 QPSK 1.4MHz CH-High 1RB

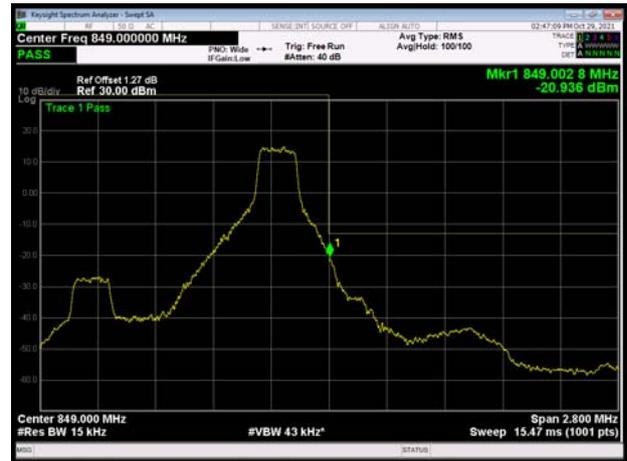


LTE Band 5 QPSK 1.4MHz CH-Low 100%RB

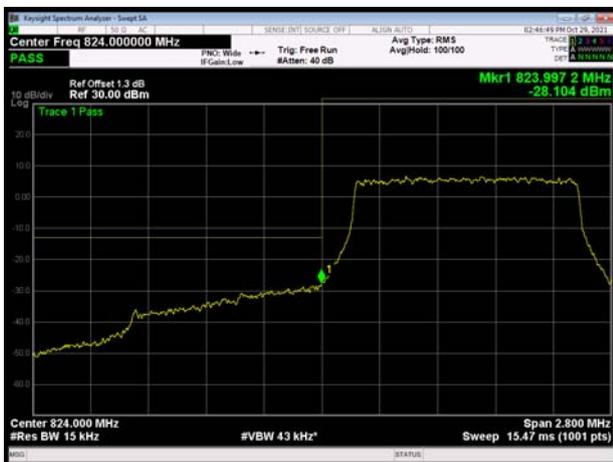


LTE Band 5 QPSK 1.4MHz CH-High 100%RB




LTE Band 5 QPSK 3MHz CH-Low 1RB

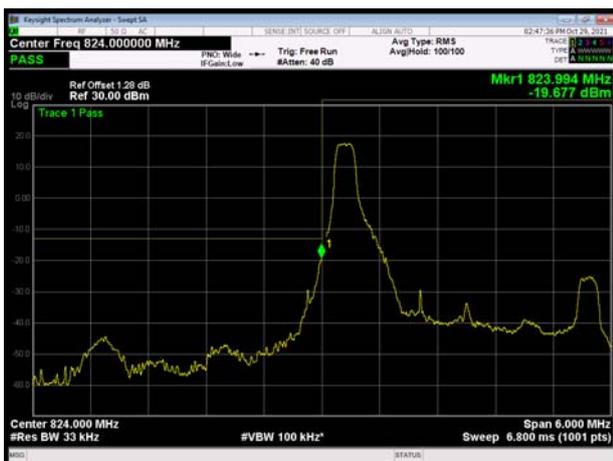


LTE Band 5 QPSK 3MHz CH-High 1RB

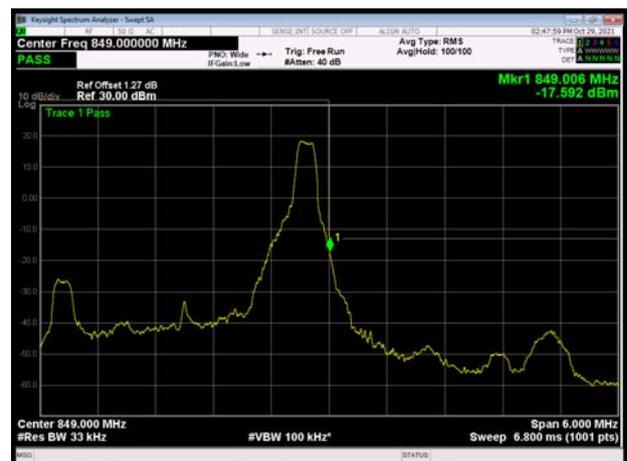

LTE Band 5 QPSK 3MHz CH-Low 100%RB

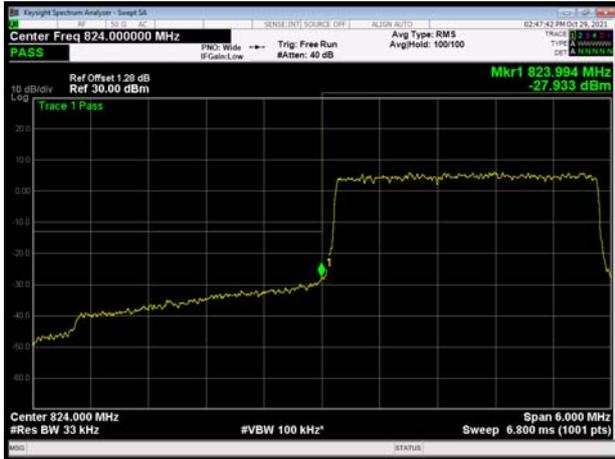


LTE Band 5 QPSK 3MHz CH-High 100%RB

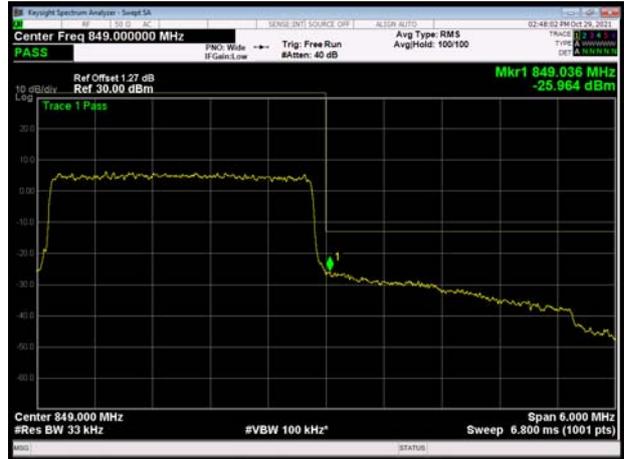


LTE Band 5 QPSK 5MHz CH-Low 1RB




LTE Band 5 QPSK 5MHz CH-High 1RB

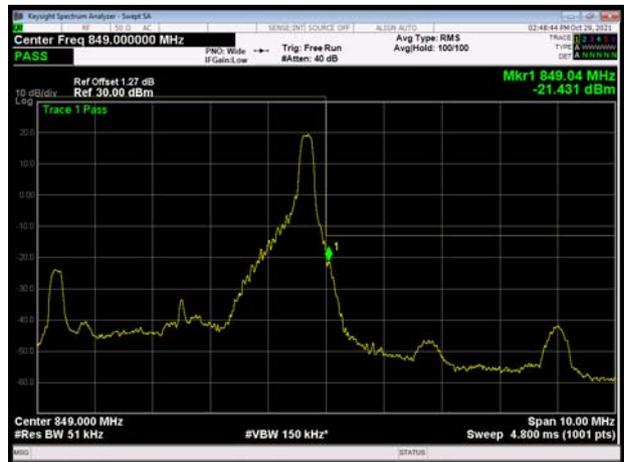

LTE Band 5 QPSK 5MHz CH-Low 100%RB

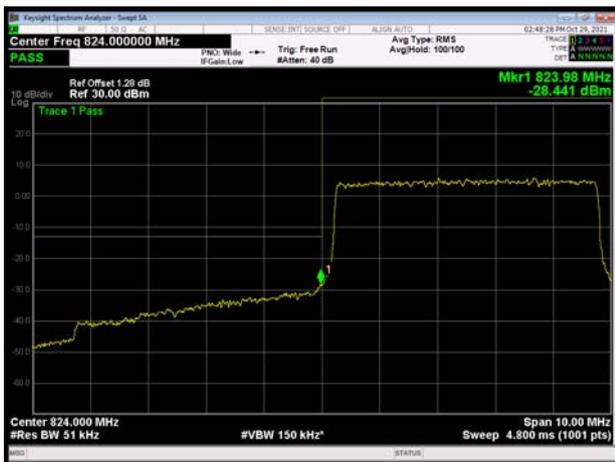

LTE Band 5 QPSK 5MHz CH-High 100%RB

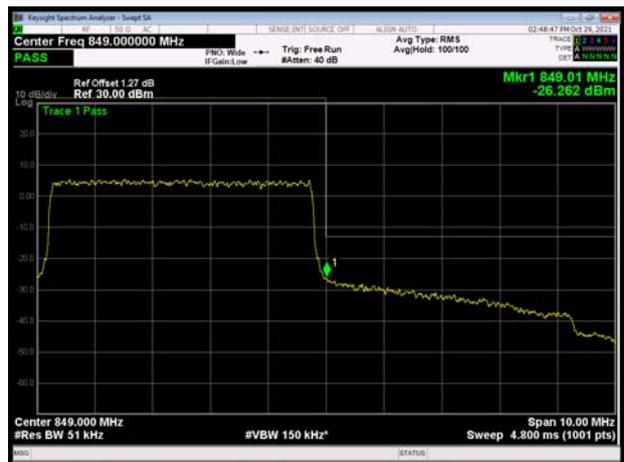


LTE Band 5 QPSK 10MHz CH-Low 1RB



LTE Band 5 QPSK 10MHz CH-High 1RB




LTE Band 5 QPSK 10MHz CH-Low 100%RB

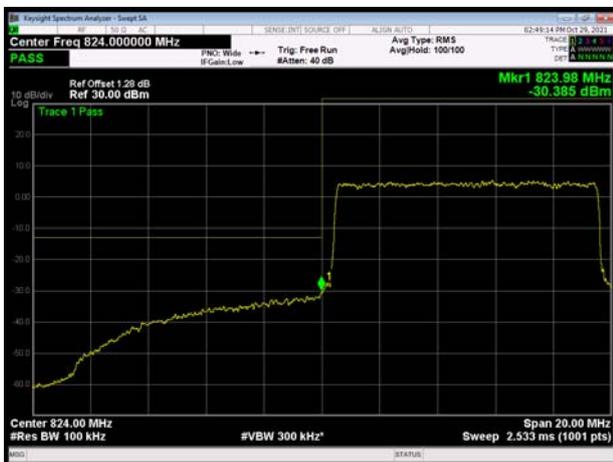


LTE Band 5 QPSK 10MHz CH-High 100%RB



LTE Band 5 16QAM 1.4MHz CH-Low 1RB

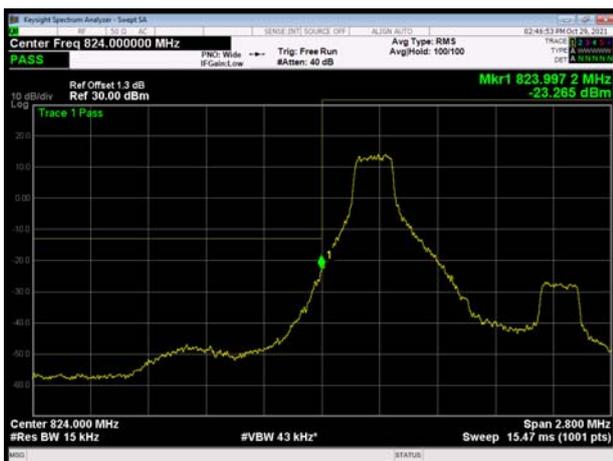


LTE Band 5 16QAM 1.4MHz CH-High 1RB

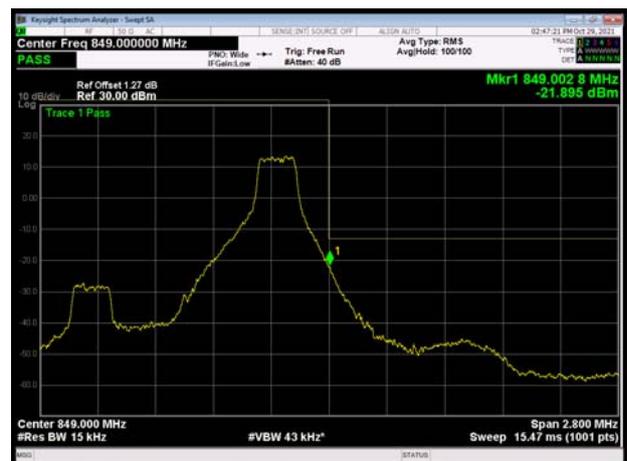




LTE Band 5 16QAM 1.4MHz CH-Low 100%RB

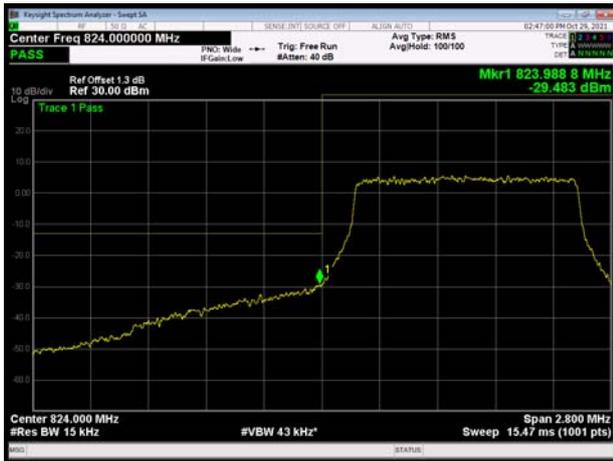


LTE Band 5 16QAM 1.4MHz CH-High 100%RB



LTE Band 5 16QAM 3MHz CH-Low 1RB

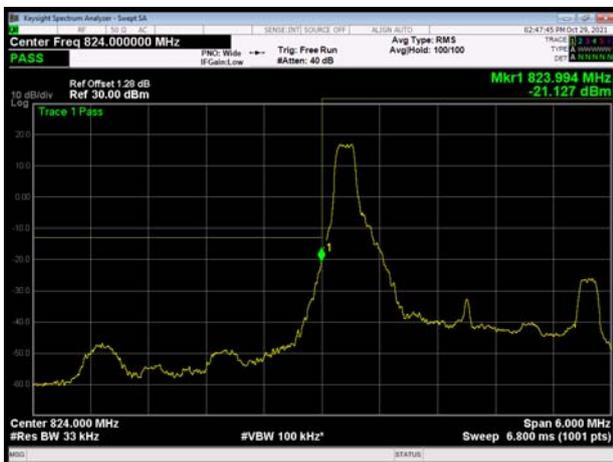


LTE Band 5 16QAM 3MHz CH-High 1RB

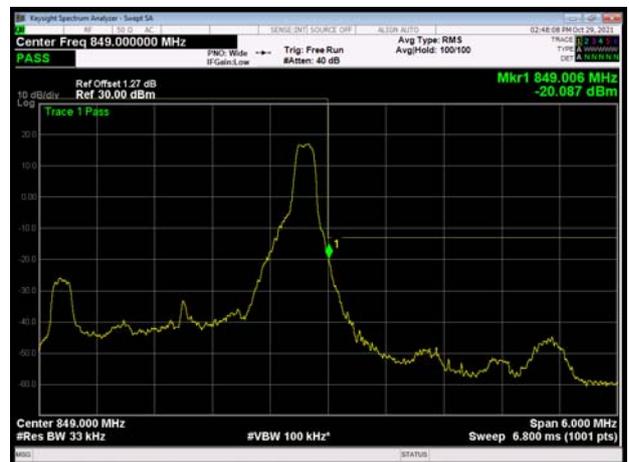


LTE Band 5 16QAM 3MHz CH-Low 100%RB




LTE Band 5 16QAM 3MHz CH-High 100%RB

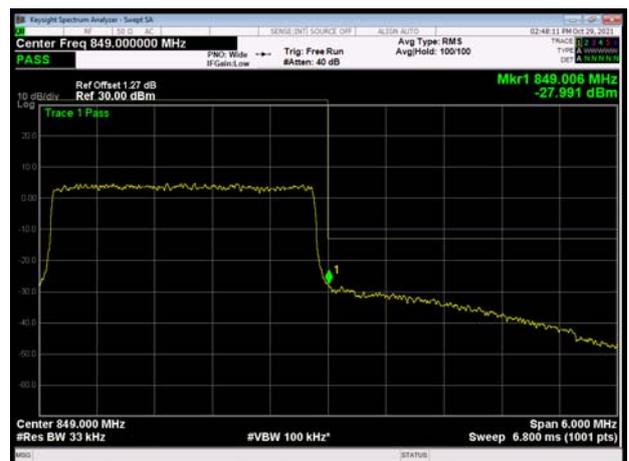


LTE Band 5 16QAM 5MHz CH-Low 1RB

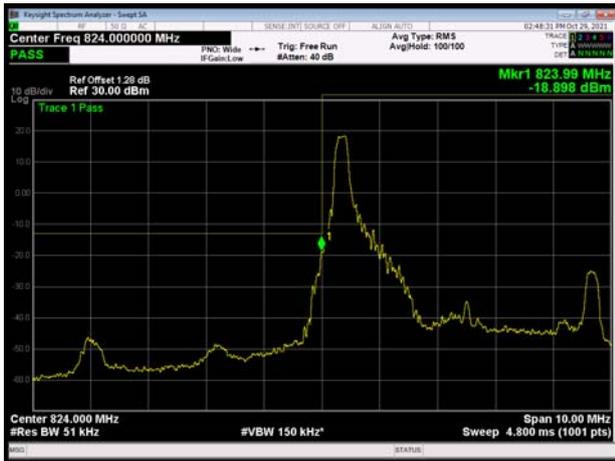

LTE Band 5 16QAM 5MHz CH-High 1RB

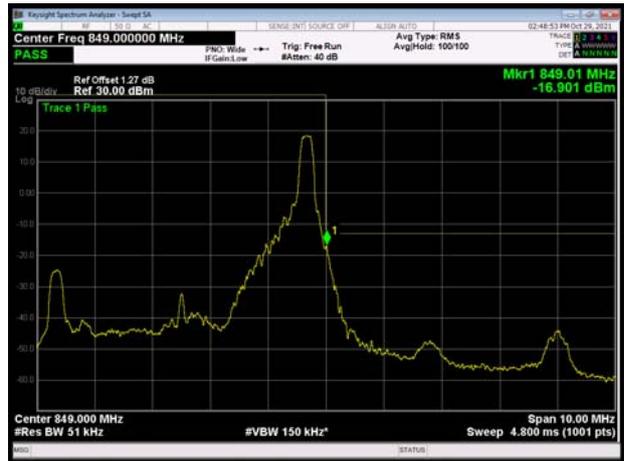

LTE Band 5 16QAM 5MHz CH-Low 100%RB

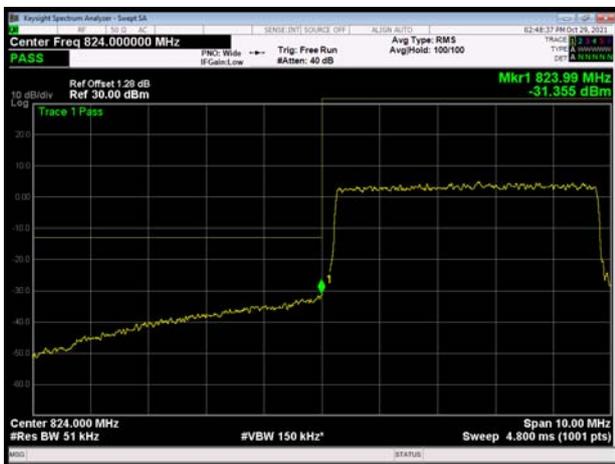


LTE Band 5 16QAM 5MHz CH-High 100%RB



LTE Band 5 16QAM 10MHz CH-Low 1RB




LTE Band 5 16QAM 10MHz CH-High 1RB

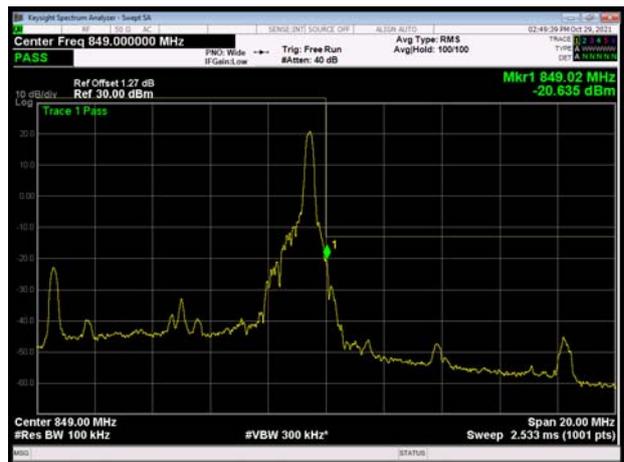




LTE Band 5 16QAM 10MHz CH-Low 100%RB

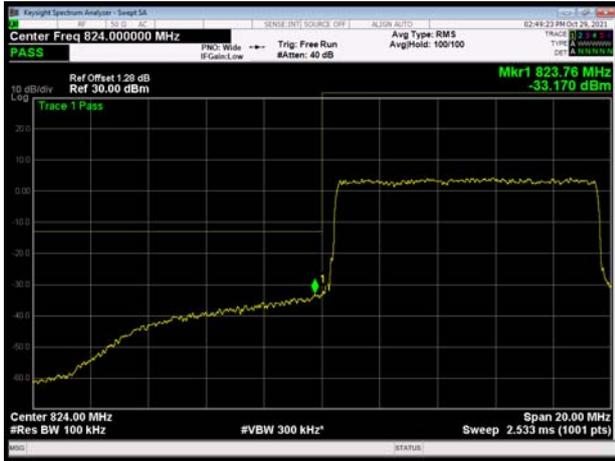

LTE Band 5 16QAM 10MHz CH-High 100%RB




LTE Band 5 64QAM 1.4MHz CH-Low 1RB

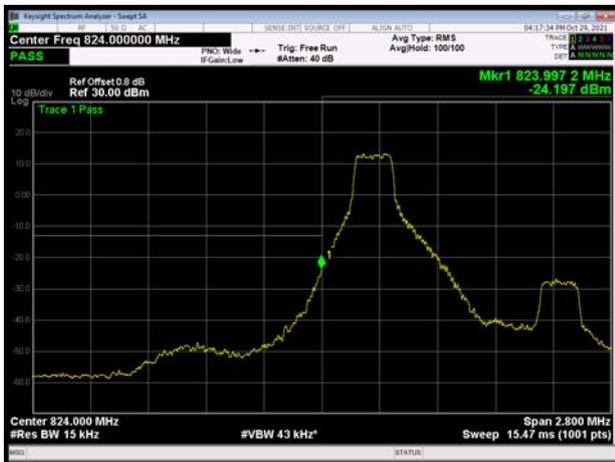

LTE Band 5 64QAM 1.4MHz CH-High 1RB




LTE Band 5 64QAM 1.4MHz CH-Low 100%RB

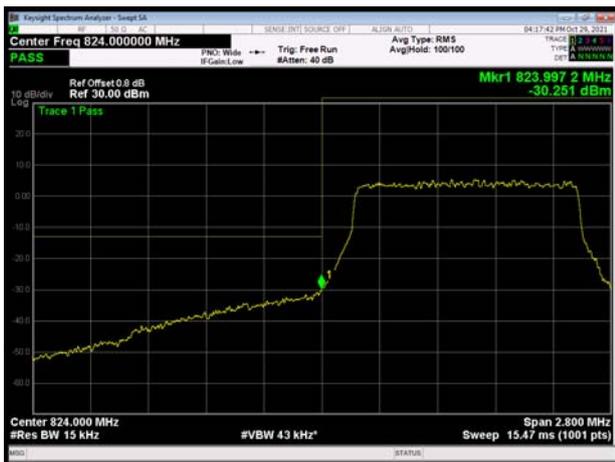


LTE Band 5 64QAM 1.4MHz CH-High 100%RB



LTE Band 5 64QAM 3MHz CH-Low 1RB

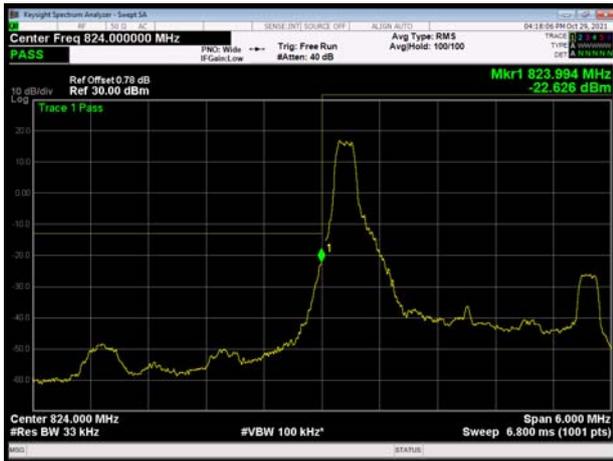


LTE Band 5 64QAM 3MHz CH-High 1RB

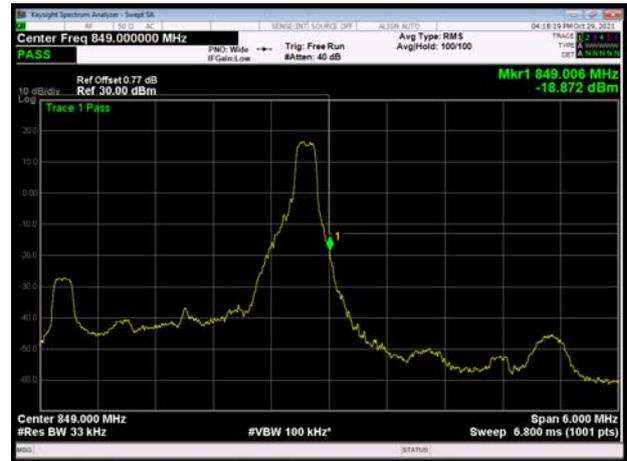


LTE Band 5 64QAM 3MHz CH-Low 100%RB




LTE Band 5 64QAM 3MHz CH-High 100%RB

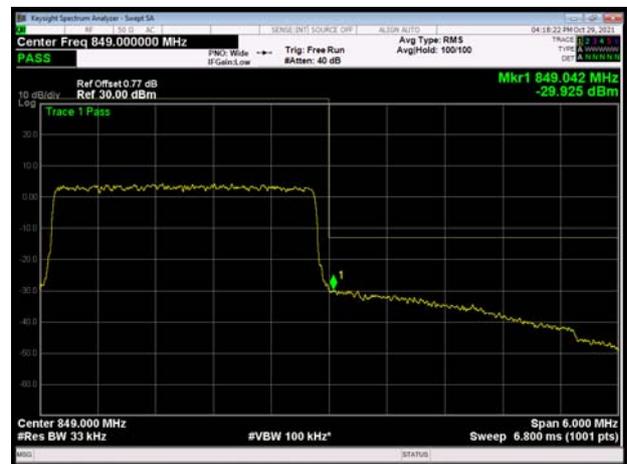


LTE Band 5 64QAM 5MHz CH-Low 1RB

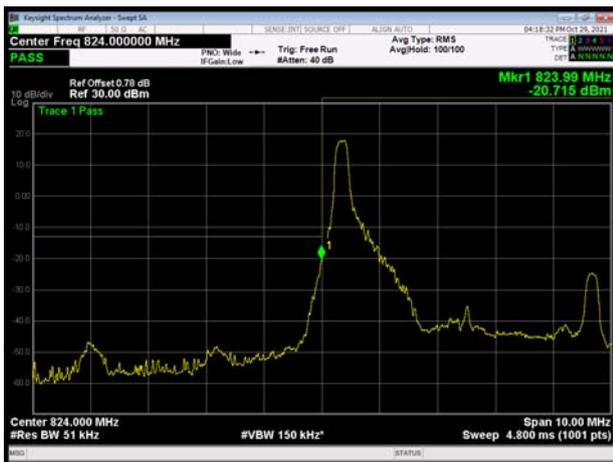

LTE Band 5 64QAM 5MHz CH-High 1RB

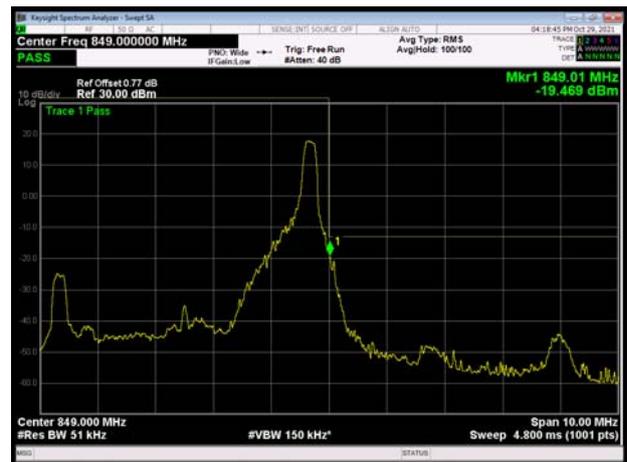

LTE Band 5 64QAM 5MHz CH-Low 100%RB

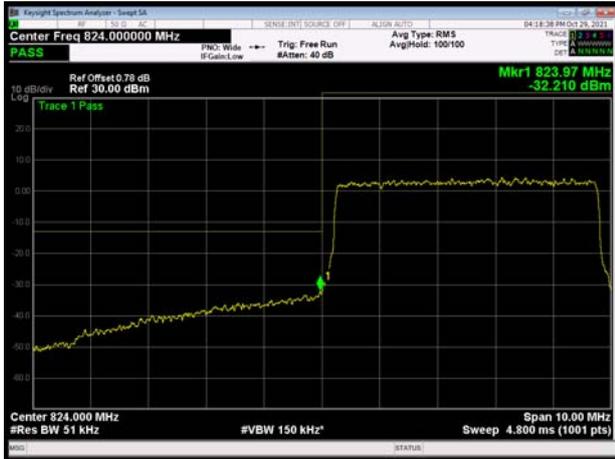

LTE Band 5 64QAM 5MHz CH-High 100%RB




LTE Band 5 64QAM 10MHz CH-Low 1RB



LTE Band 5 64QAM 10MHz CH-High 1RB



LTE Band 5 64QAM 10MHz CH-Low 100%RB

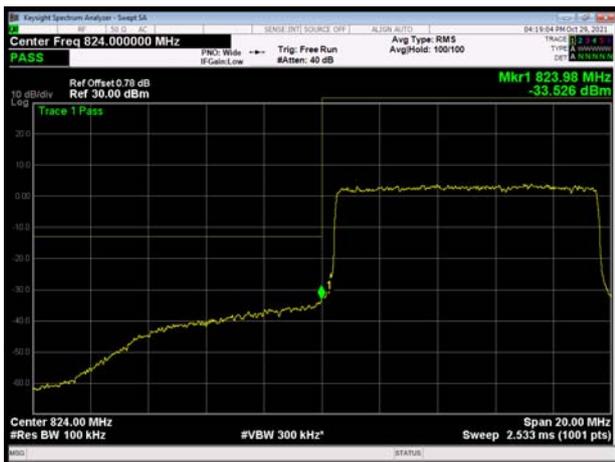

LTE Band 5 64QAM 10MHz CH-High 100%RB



5.4. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

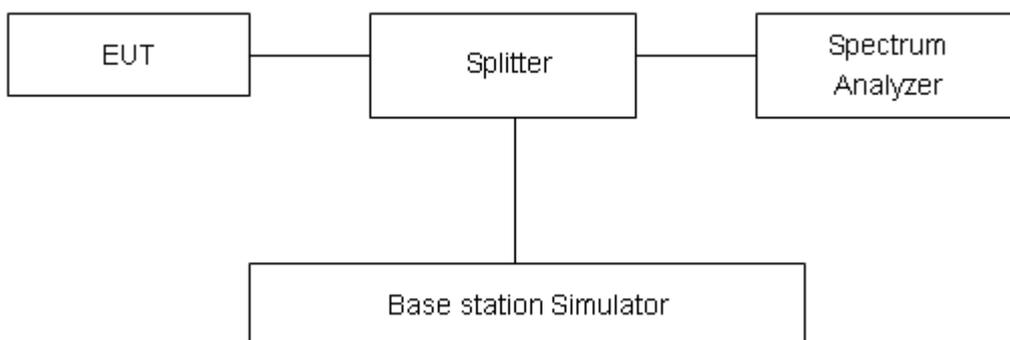

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
GSM 850 (GMSK)	128	824.2	32.62	30.02	2.60	≤13	PASS
	190	836.6	32.52	29.92	2.60	≤13	PASS
	251	848.8	32.44	29.84	2.60	≤13	PASS
GPRS 850 (GMSK)	128	824.2	32.66	30.06	2.60	≤13	PASS
	190	836.6	32.56	29.96	2.60	≤13	PASS
	251	848.8	32.48	29.88	2.60	≤13	PASS
EGPRS 850 (8PSK)	128	824.2	30.46	24.54	5.92	≤13	PASS
	190	836.6	30.33	24.43	5.90	≤13	PASS
	251	848.8	30.19	24.32	5.87	≤13	PASS
WCDMA Band V (RMC)	4132	826.4	26.75	24.11	2.64	≤13	PASS
	4183	836.6	26.79	24.10	2.69	≤13	PASS
	4233	846.6	26.52	24.07	2.45	≤13	PASS

LTE Band 5								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	20407	824.7	28.08	23.59	4.49	≤13	PASS
		20525	836.5	28.13	23.51	4.62	≤13	PASS
		20643	848.3	27.59	23.54	4.05	≤13	PASS
	3	20415	825.5	28.02	23.42	4.60	≤13	PASS
		20525	836.5	28.04	23.39	4.65	≤13	PASS
		20635	847.5	27.64	23.41	4.23	≤13	PASS
	5	20425	826.5	28.05	23.42	4.63	≤13	PASS
		20525	836.5	28.10	23.40	4.70	≤13	PASS
		20625	846.5	27.78	23.39	4.39	≤13	PASS
	10	20450	829	28.12	23.37	4.75	≤13	PASS
		20525	836.5	28.15	23.43	4.72	≤13	PASS
		20600	844	27.89	23.35	4.54	≤13	PASS
16QAM	1.4	20407	824.7	27.86	22.53	5.33	≤13	PASS
		20525	836.5	27.87	22.45	5.42	≤13	PASS
		20643	848.3	27.47	22.50	4.97	≤13	PASS
	3	20415	825.5	27.85	22.39	5.46	≤13	PASS
		20525	836.5	27.91	22.34	5.57	≤13	PASS



	5	20635	847.5	27.50	22.38	5.12	≤13	PASS	
		20425	826.5	27.81	22.40	5.41	≤13	PASS	
		20525	836.5	27.92	22.38	5.54	≤13	PASS	
	10	20625	846.5	27.54	22.36	5.18	≤13	PASS	
		20450	829	27.91	22.37	5.54	≤13	PASS	
		20525	836.5	27.92	22.39	5.53	≤13	PASS	
64QAM	1.4	20600	844	27.72	22.33	5.39	≤13	PASS	
		20407	824.7	27.39	22.00	5.39	≤13	PASS	
		20525	836.5	27.46	22.00	5.46	≤13	PASS	
	3	20643	848.3	27.06	22.02	5.04	≤13	PASS	
		20415	825.5	27.42	21.89	5.53	≤13	PASS	
		20525	836.5	27.44	21.84	5.60	≤13	PASS	
	5	20635	847.5	27.09	21.89	5.20	≤13	PASS	
		20425	826.5	27.40	21.89	5.51	≤13	PASS	
		20525	836.5	27.45	21.88	5.57	≤13	PASS	
	10	20625	846.5	27.17	21.85	5.32	≤13	PASS	
		20450	829	27.43	21.85	5.58	≤13	PASS	
		20525	836.5	27.50	21.91	5.59	≤13	PASS	
			20600	844	27.30	21.81	5.49	≤13	PASS

5.5. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.


(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.45 V, with a nominal voltage of 3.87V.

Test setup

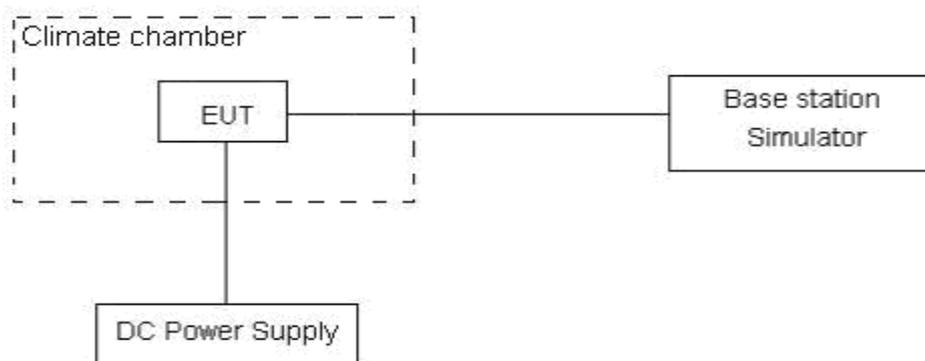

Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result

GSM850						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	GMSK	8PSK	GMSK	8PSK	
Normal (25°C)	Normal	13.96	14.07	0.01668	0.01682	PASS
Extreme (50°C)		11.05	12.91	0.01320	0.01543	PASS
Extreme (40°C)		8.76	5.55	0.01047	0.00664	PASS
Extreme (30°C)		6.18	16.83	0.00739	0.02012	PASS
Extreme (20°C)		11.15	10.81	0.01333	0.01292	PASS
Extreme (10°C)		10.78	3.09	0.01288	0.00369	PASS
Extreme (0°C)		3.68	14.24	0.00440	0.01702	PASS
Extreme (-10°C)		6.08	6.54	0.00727	0.00781	PASS
Extreme (-20°C)		7.86	6.56	0.00939	0.00785	PASS
Extreme (-30°C)		6.22	14.73	0.00743	0.01761	PASS
25°C	LV	15.54	4.50	0.01857	0.00537	PASS
	HV	1.92	3.87	0.00229	0.00463	PASS

WCDMA Band V						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK	
Normal (25°C)	Normal	14.49	11.18	0.01732	0.01336	PASS
Extreme (50°C)		1.75	11.44	0.00209	0.01368	PASS
Extreme (40°C)		10.79	11.87	0.01290	0.01419	PASS
Extreme (30°C)		3.79	14.01	0.00453	0.01674	PASS
Extreme (20°C)		15.83	6.36	0.01892	0.00761	PASS
Extreme (10°C)		9.66	12.08	0.01155	0.01444	PASS
Extreme (0°C)		17.35	15.87	0.02074	0.01897	PASS
Extreme (-10°C)		12.85	8.68	0.01536	0.01038	PASS
Extreme (-20°C)		13.10	8.04	0.01565	0.00961	PASS
Extreme (-30°C)		5.81	3.49	0.00694	0.00417	PASS
25°C	LV	10.47	15.51	0.01251	0.01854	PASS
	HV	8.88	2.68	0.01062	0.00320	PASS



LTE Band 5								
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	16.07	14.54	16.75	0.01921	0.01738	0.02002	PASS
Extreme (50°C)		9.29	5.98	15.51	0.01110	0.00715	0.01854	PASS
Extreme (40°C)		10.49	11.16	12.84	0.01254	0.01334	0.01535	PASS
Extreme (30°C)		3.54	1.02	10.64	0.00423	0.00122	0.01272	PASS
Extreme (20°C)		2.73	8.31	8.95	0.00326	0.00993	0.01070	PASS
Extreme (10°C)		15.22	4.40	6.95	0.01819	0.00526	0.00831	PASS
Extreme (0°C)		2.50	6.34	4.37	0.00299	0.00758	0.00522	PASS
Extreme (-10°C)		5.39	6.88	11.58	0.00644	0.00822	0.01384	PASS
Extreme (-20°C)		11.05	12.13	7.44	0.01321	0.01450	0.00889	PASS
Extreme (-30°C)		9.57	4.26	4.83	0.01144	0.00510	0.00577	PASS
25°C	LV	8.04	2.36	3.63	0.00961	0.00283	0.00433	PASS
	HV	4.79	7.15	5.21	0.00573	0.00854	0.00623	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	15.63	4.07	8.09	0.01869	0.00487	0.00967	PASS
Extreme (50°C)		16.64	3.44	5.01	0.01989	0.00411	0.00599	PASS
Extreme (40°C)		3.04	2.59	5.94	0.00363	0.00310	0.00710	PASS
Extreme (30°C)		2.35	15.57	4.37	0.00281	0.01861	0.00522	PASS
Extreme (20°C)		15.87	1.14	9.27	0.01897	0.00136	0.01108	PASS
Extreme (10°C)		15.62	1.60	15.44	0.01867	0.00191	0.01846	PASS
Extreme (0°C)		14.88	10.13	7.40	0.01779	0.01211	0.00884	PASS
Extreme (-10°C)		2.95	10.43	4.13	0.00353	0.01247	0.00493	PASS
Extreme (-20°C)		4.09	11.29	10.39	0.00489	0.01350	0.01242	PASS
Extreme (-30°C)		10.61	13.60	12.71	0.01268	0.01625	0.01519	PASS
25°C	LV	13.01	5.76	14.02	0.01555	0.00689	0.01676	PASS
	HV	13.19	2.98	17.20	0.01577	0.00356	0.02056	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	11.28	10.84	1.55	0.01349	0.01296	0.00185	PASS
Extreme (50°C)		10.71	12.10	11.13	0.01281	0.01446	0.01330	PASS



Extreme (40℃)		13.98	3.46	7.44	0.01672	0.00414	0.00889	PASS
Extreme (30℃)		13.93	9.92	2.17	0.01665	0.01186	0.00259	PASS
Extreme (20℃)		15.50	3.72	1.60	0.01853	0.00444	0.00191	PASS
Extreme (10℃)		6.23	12.95	5.67	0.00745	0.01548	0.00678	PASS
Extreme (0℃)		17.98	16.85	4.16	0.02149	0.02015	0.00498	PASS
Extreme (-10℃)		13.68	9.92	15.29	0.01636	0.01186	0.01827	PASS
Extreme (-20℃)		17.26	9.80	3.44	0.02063	0.01172	0.00412	PASS
Extreme (-30℃)		4.08	15.75	11.21	0.00488	0.01883	0.01340	PASS
25℃	LV	5.38	2.31	4.63	0.00643	0.00276	0.00554	PASS
	HV	5.52	4.76	11.71	0.00660	0.00569	0.01400	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	3.39	17.23	7.35	0.00405	0.02060	0.00879	PASS
Extreme (50℃)		13.19	9.61	16.49	0.01577	0.01149	0.01972	PASS
Extreme (40℃)		14.01	9.51	5.64	0.01675	0.01136	0.00674	PASS
Extreme (30℃)		3.76	17.11	2.62	0.00449	0.02045	0.00313	PASS
Extreme (20℃)		11.28	14.01	15.90	0.01348	0.01675	0.01900	PASS
Extreme (10℃)		3.59	14.46	10.34	0.00430	0.01728	0.01236	PASS
Extreme (0℃)		6.58	15.78	16.81	0.00786	0.01886	0.02009	PASS
Extreme (-10℃)		4.67	2.11	9.84	0.00558	0.00252	0.01176	PASS
Extreme (-20℃)		16.31	14.22	5.53	0.01950	0.01699	0.00660	PASS
Extreme (-30℃)		4.52	6.82	14.22	0.00541	0.00815	0.01700	PASS
25℃	LV	11.10	9.87	11.96	0.01327	0.01180	0.01430	PASS
	HV	9.66	16.27	9.62	0.01155	0.01944	0.01150	PASS

5.6. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

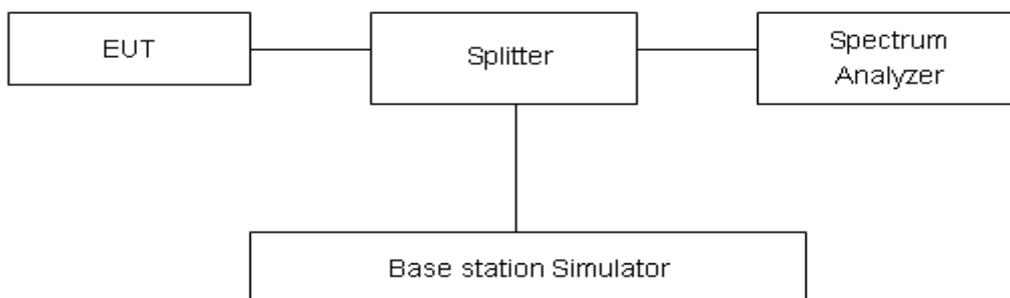

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm


Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB


Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported. The signal beyond the limit is carrier.

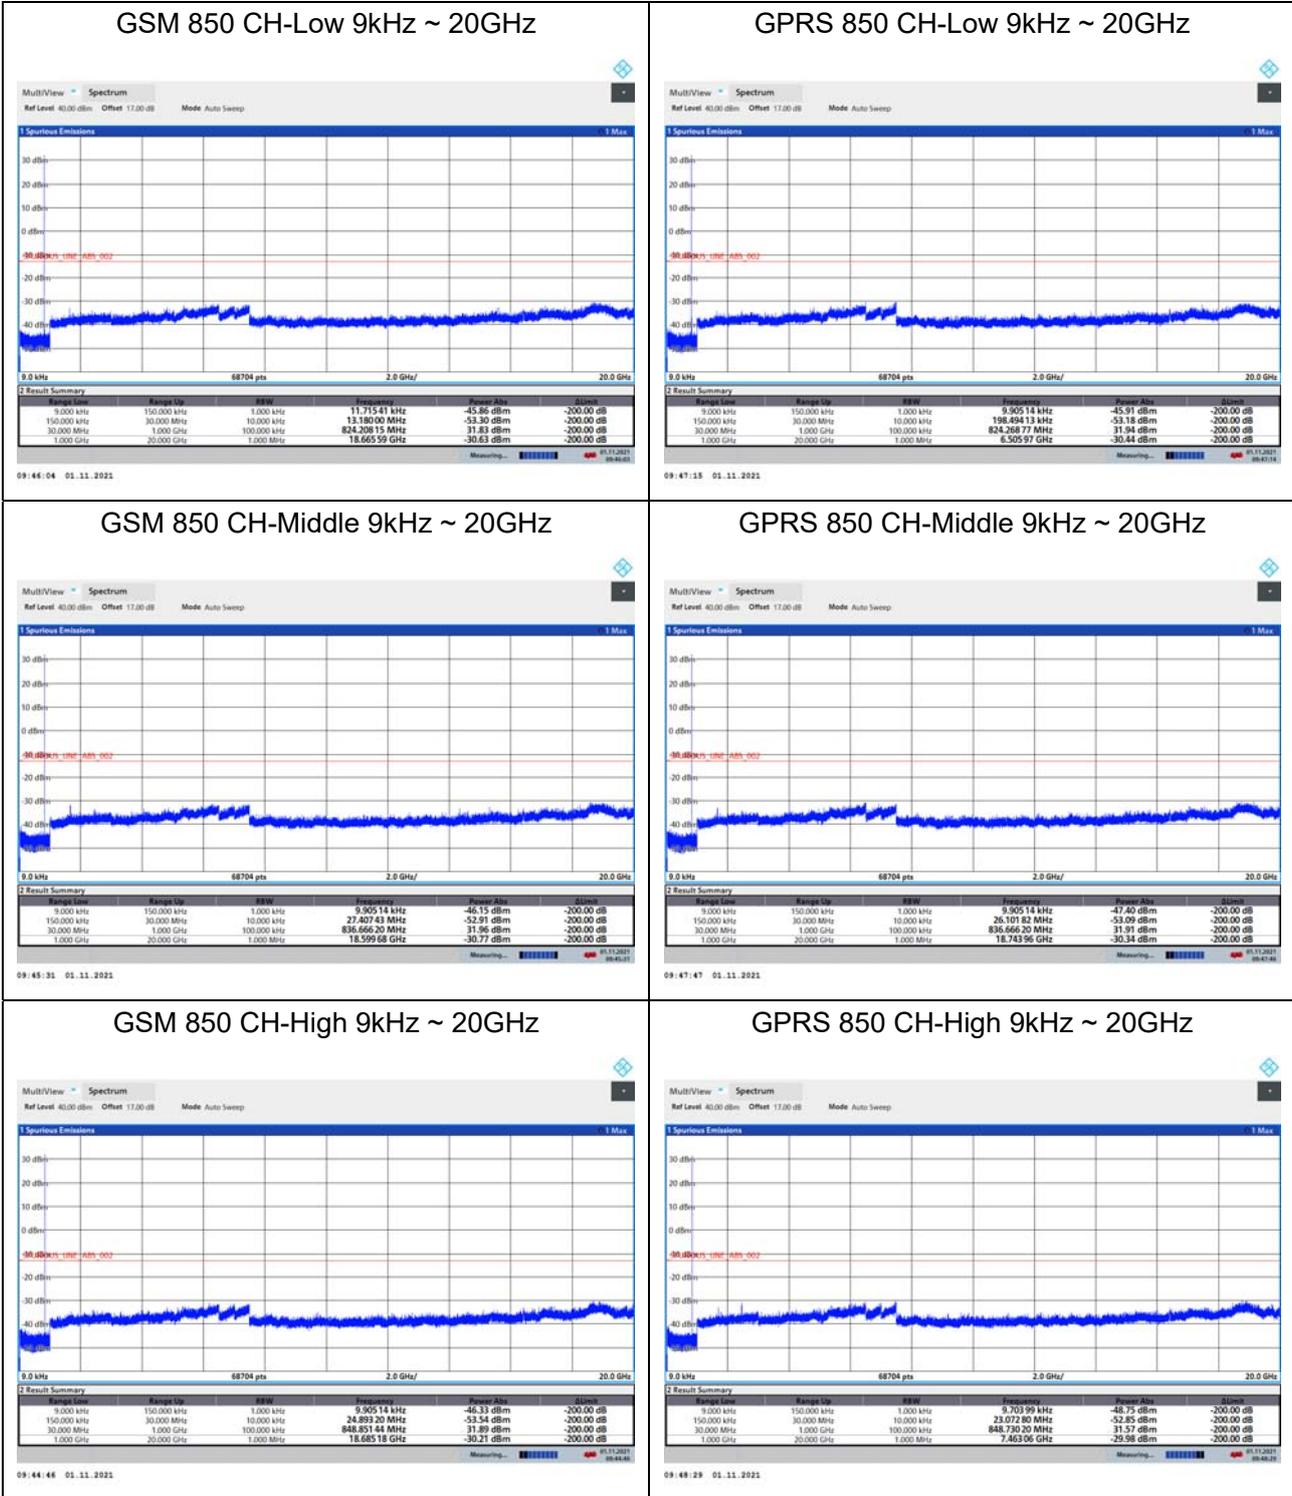




EGPRS 850 CH-Low 9kHz ~ 20GHz

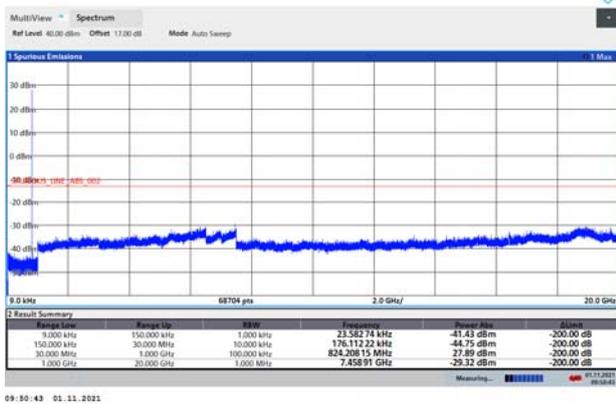


09:50:43 01.11.2021

WCDMA BAND V CH-Low 9kHz ~ 20GHz

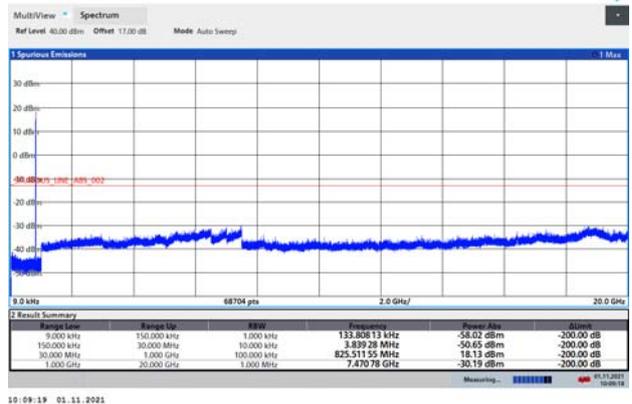


10:09:19 01.11.2021

EGPRS 850 CH-Middle 9kHz ~ 20GHz

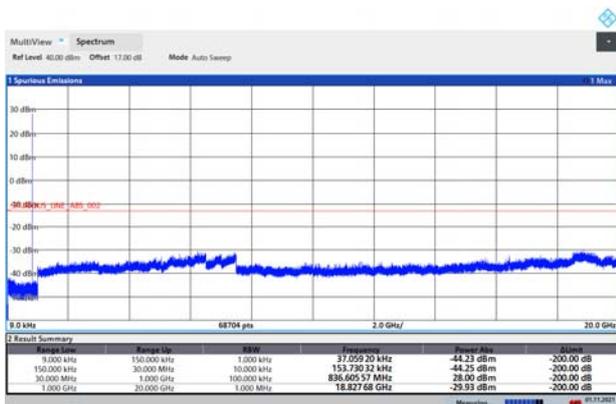


09:50:09 01.11.2021

WCDMA BAND V CH-Middle 9kHz ~ 20GHz

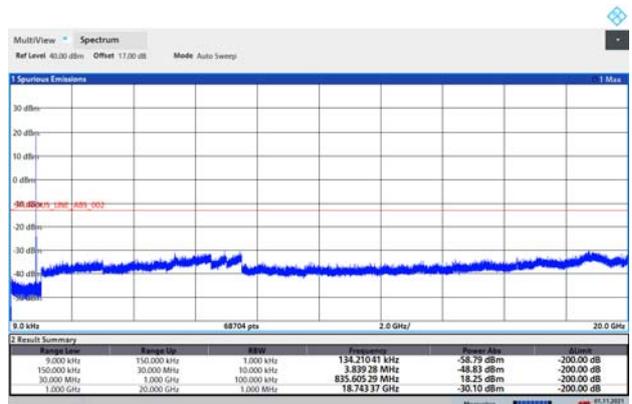


10:09:32 01.11.2021

EGPRS 850 CH-High 9kHz ~ 20GHz

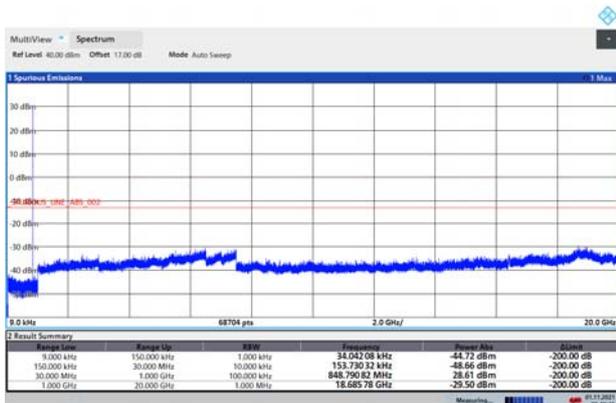


09:49:36 01.11.2021

WCDMA BAND V CH-High 9kHz ~ 20GHz

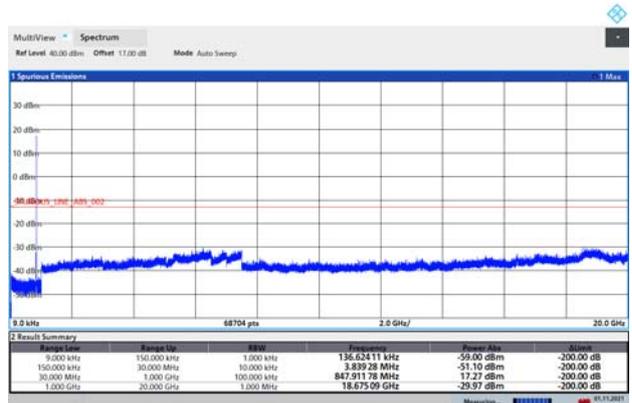


10:10:02 01.11.2021


LTE Band 5 1.4MHz CH-Low 9kHz~10GHz

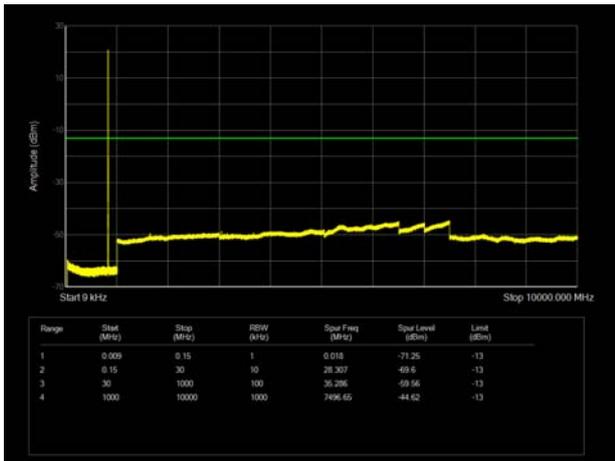


LTE Band 5 3MHz CH-Low 9kHz~10GHz

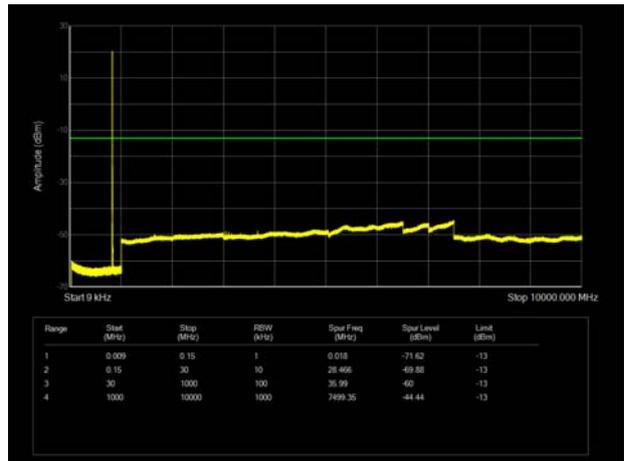

LTE Band 5 1.4MHz CH-Middle 9kHz~10GHz

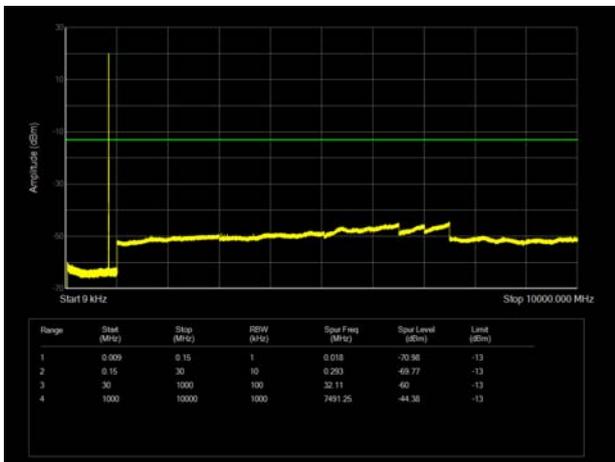


LTE Band 5 3MHz CH-Middle 9kHz~10GHz

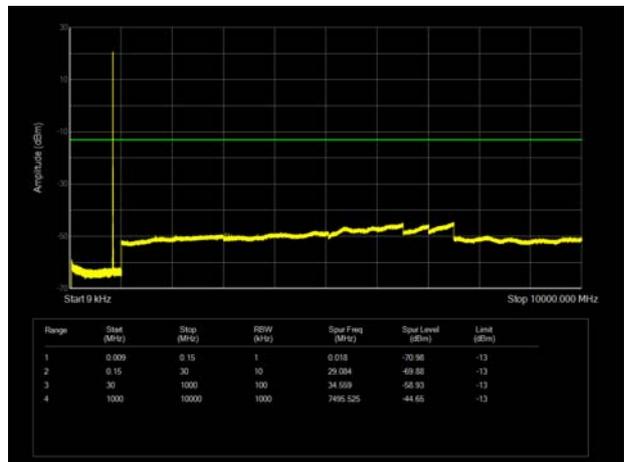


LTE Band 5 1.4MHz CH-High 9kHz~10GHz




LTE Band 5 3MHz CH-High 9kHz~10GHz

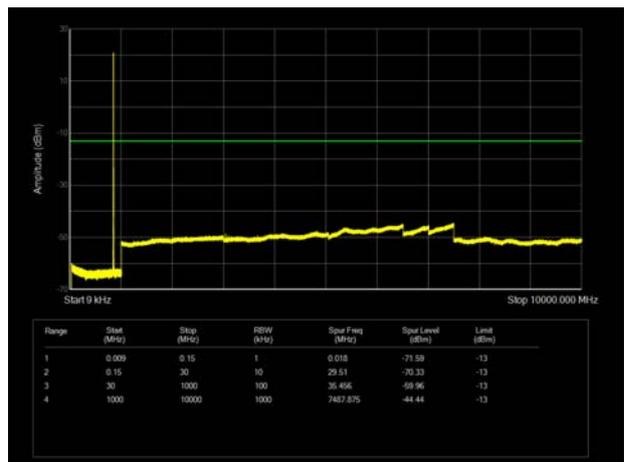


LTE Band 5 5MHz CH-Low 9kHz~10GHz

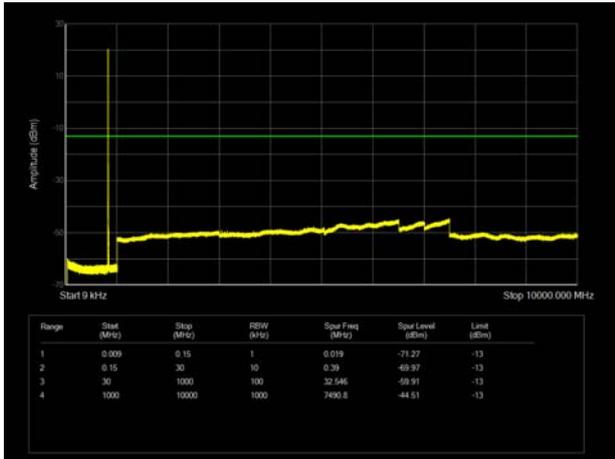


LTE Band 5 10MHz CH-Low 9kHz~10GHz

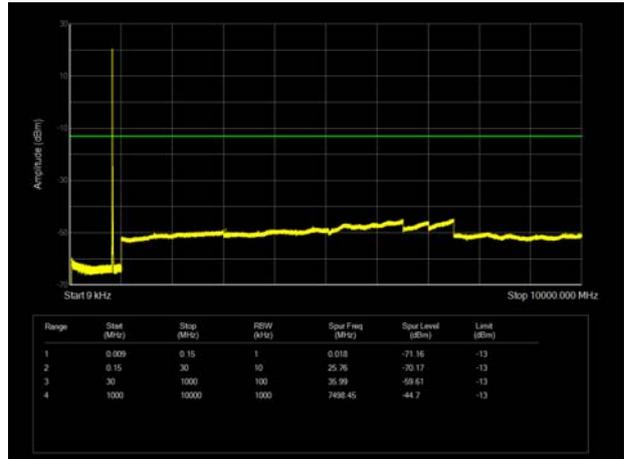


LTE Band 5 5MHz CH-Middle 9kHz~10GHz

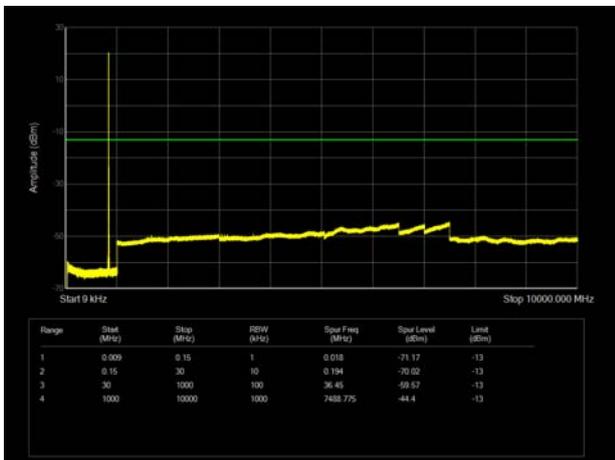


LTE Band 5 10MHz CH-Middle 9kHz~10GHz

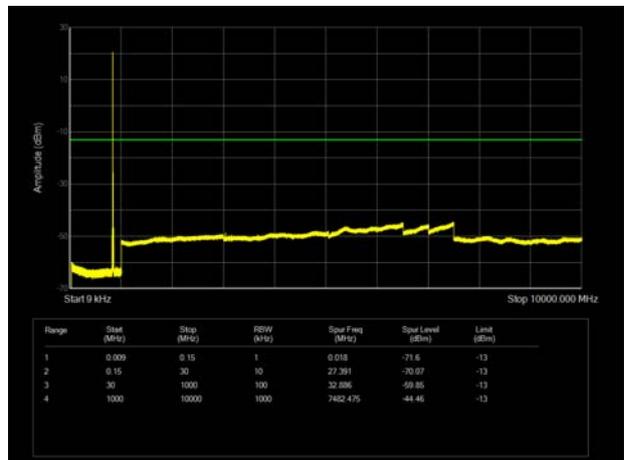

LTE Band 5 5MHz CH-High 9kHz~10GHz

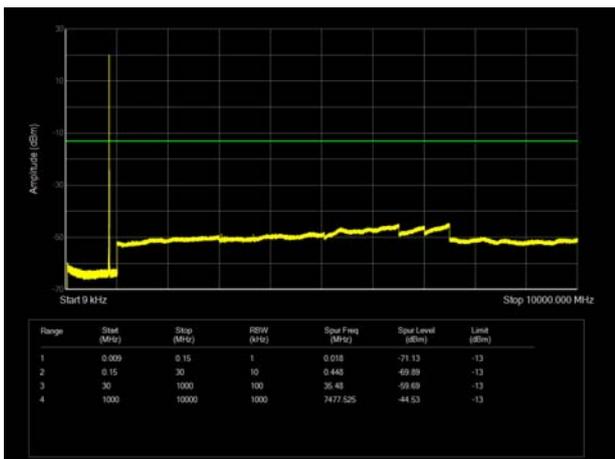

LTE Band 5 10MHz CH-High 9kHz~10GHz

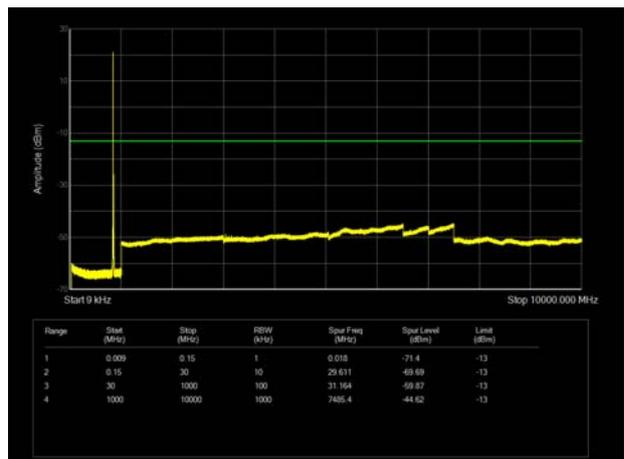

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz,VBW=300kHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dB.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

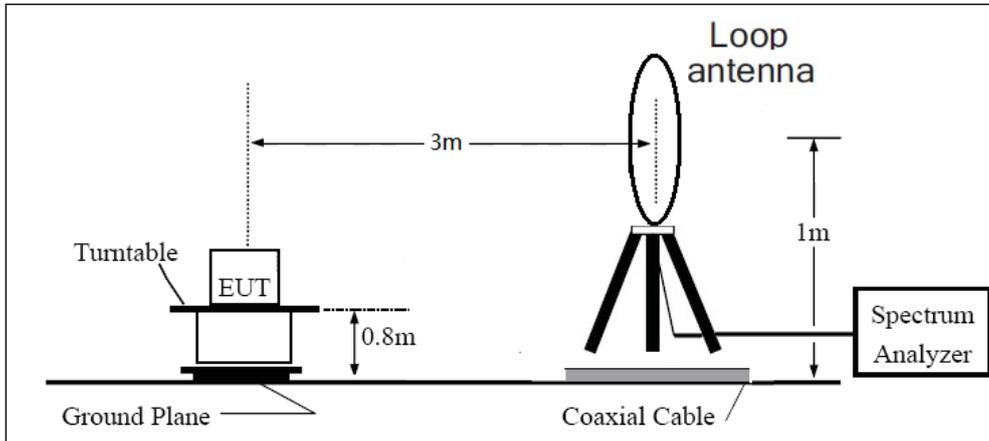

30MHz ~ 1GHz

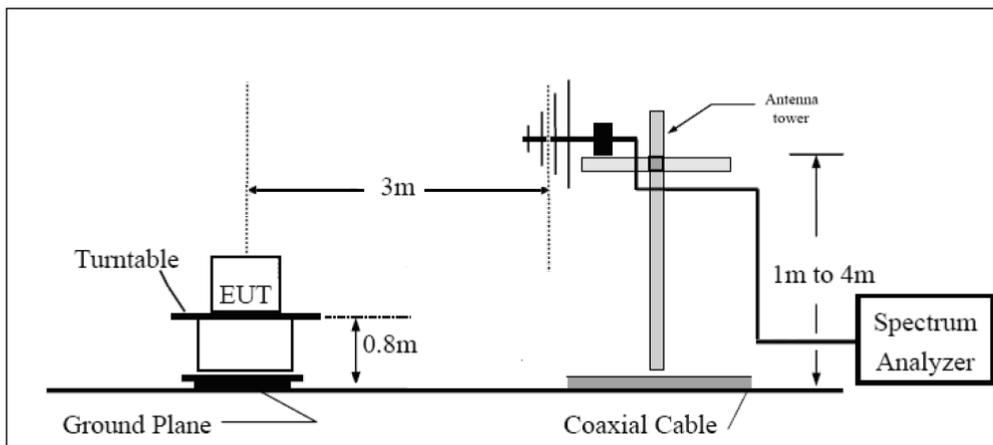

Above 1GHz

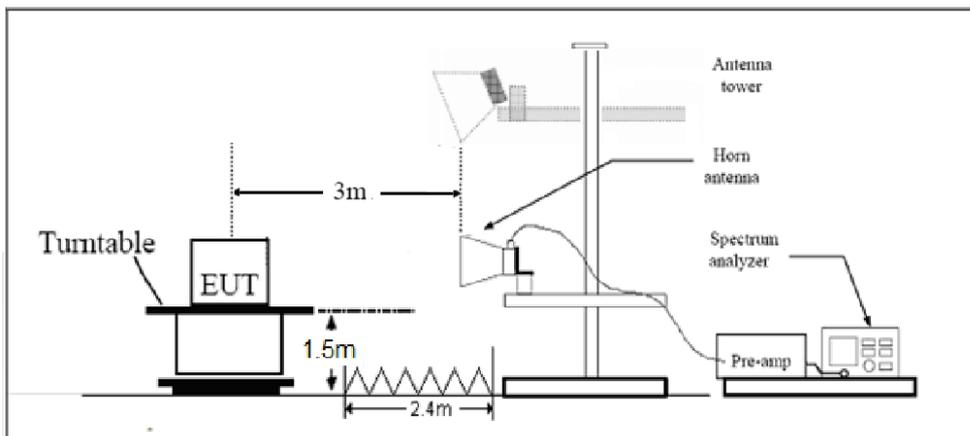

Note: Area side:2.4mX3.6m



Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

Low Antenna

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.20	-48.99	1.70	8.70	Horizontal	-44.14	-13.00	31.14	225
3	2509.85	-51.95	2.30	12.00	Horizontal	-44.40	-13.00	31.40	225
4	3346.40	-66.01	2.70	12.70	Horizontal	-58.16	-13.00	45.16	180
5	4183.00	-63.88	3.00	12.50	Horizontal	-56.53	-13.00	43.53	270
6	5019.60	-61.09	3.40	12.50	Horizontal	-54.14	-13.00	41.14	315
7	5856.20	-62.59	3.40	12.80	Horizontal	-55.34	-13.00	42.34	90
8	6692.80	-56.47	4.10	11.50	Horizontal	-51.22	-13.00	38.22	45
9	7529.40	-56.16	4.20	12.20	Horizontal	-50.31	-13.00	37.31	135
10	8366.00	-55.34	4.30	12.50	Horizontal	-49.29	-13.00	36.29	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1671.20	-64.20	1.70	8.70	Horizontal	-59.35	-13.00	46.35	45
3	2510.40	-65.36	2.30	12.00	Horizontal	-57.81	-13.00	44.81	135
4	3346.40	-65.37	2.70	12.70	Horizontal	-57.52	-13.00	44.52	315
5	4183.00	-63.88	3.00	12.50	Horizontal	-56.53	-13.00	43.53	180
6	5019.60	-61.37	3.40	12.50	Horizontal	-54.42	-13.00	41.42	90
7	5856.20	-62.04	3.40	12.80	Horizontal	-54.79	-13.00	41.79	45
8	6692.80	-58.32	4.10	11.50	Horizontal	-53.07	-13.00	40.07	315
9	7529.40	-55.91	4.20	12.20	Horizontal	-50.06	-13.00	37.06	270
10	8366.00	-55.71	4.30	12.50	Horizontal	-49.66	-13.00	36.66	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1671.95	-60.13	1.70	8.70	Horizontal	-55.28	-13.00	42.28	225
3	2508.40	-60.71	2.30	12.00	Horizontal	-53.16	-13.00	40.16	90
4	3346.00	-65.64	2.70	12.70	Horizontal	-57.79	-13.00	44.79	180
5	4182.50	-61.56	3.00	12.50	Horizontal	-54.21	-13.00	41.21	0
6	5019.00	-61.50	3.40	12.50	Horizontal	-54.55	-13.00	41.55	45
7	5855.50	-62.02	3.40	12.80	Horizontal	-54.77	-13.00	41.77	315
8	6692.00	-57.31	4.10	11.50	Horizontal	-52.06	-13.00	39.06	90
9	7528.50	-55.59	4.20	12.20	Horizontal	-49.74	-13.00	36.74	45
10	8365.00	-56.14	4.30	12.50	Horizontal	-50.09	-13.00	37.09	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.50	-60.65	1.70	8.70	Horizontal	-55.80	-13.00	42.80	225
3	2503.00	-62.34	2.30	12.00	Horizontal	-54.79	-13.00	41.79	45
4	3337.40	-65.29	2.70	12.70	Horizontal	-57.44	-13.00	44.44	315
5	4170.00	-63.65	3.00	12.50	Horizontal	-56.30	-13.00	43.30	90
6	5004.00	-61.68	3.40	12.50	Horizontal	-54.73	-13.00	41.73	45
7	5838.00	-61.53	3.40	12.80	Horizontal	-54.28	-13.00	41.28	270
8	6672.00	-57.88	4.10	11.50	Horizontal	-52.63	-13.00	39.63	90
9	7506.00	-55.65	4.20	12.20	Horizontal	-49.80	-13.00	36.80	45
10	8340.00	-55.53	4.30	12.50	Horizontal	-49.48	-13.00	36.48	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1664.15	-60.96	1.70	8.70	Horizontal	-56.11	-13.00	43.11	135
3	2496.25	-63.36	2.30	12.00	Horizontal	-55.81	-13.00	42.81	45
4	3326.00	-63.31	2.70	12.70	Horizontal	-55.46	-13.00	42.46	0
5	4157.00	-62.30	3.00	12.50	Horizontal	-54.95	-13.00	41.95	45
6	4989.00	-62.36	3.40	12.50	Horizontal	-55.41	-13.00	42.41	315
7	5820.50	-61.19	3.40	12.80	Horizontal	-53.94	-13.00	40.94	90
8	6652.00	-57.57	4.10	11.50	Horizontal	-52.32	-13.00	39.32	45
9	7483.50	-54.71	4.20	12.20	Horizontal	-48.86	-13.00	35.86	270
10	8315.00	-55.42	4.30	12.50	Horizontal	-49.37	-13.00	36.37	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

Upper Antenna

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1672.75	-48.52	1.70	8.70	Horizontal	-43.67	-13.00	30.67	225
3	2509.85	-52.63	2.30	12.00	Horizontal	-45.08	-13.00	32.08	180
4	3346.40	-66.00	2.70	12.70	Horizontal	-58.15	-13.00	45.15	90
5	4183.00	-63.48	3.00	12.50	Horizontal	-56.13	-13.00	43.13	180
6	5019.60	-62.38	3.40	12.50	Horizontal	-55.43	-13.00	42.43	45
7	5856.20	-62.10	3.40	12.80	Horizontal	-54.85	-13.00	41.85	270
8	6692.80	-57.15	4.10	11.50	Horizontal	-51.90	-13.00	38.90	45
9	7529.40	-56.47	4.20	12.20	Horizontal	-50.62	-13.00	37.62	135
10	8366.00	-55.82	4.30	12.50	Horizontal	-49.77	-13.00	36.77	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.



WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1671.20	-64.06	1.70	8.70	Horizontal	-59.21	-13.00	46.21	45
3	2510.40	-65.58	2.30	12.00	Horizontal	-58.03	-13.00	45.03	90
4	3346.40	-66.45	2.70	12.70	Horizontal	-58.60	-13.00	45.60	45
5	4183.00	-64.68	3.00	12.50	Horizontal	-57.33	-13.00	44.33	180
6	5019.60	-62.56	3.40	12.50	Horizontal	-55.61	-13.00	42.61	315
7	5856.20	-62.31	3.40	12.80	Horizontal	-55.06	-13.00	42.06	90
8	6692.80	-58.78	4.10	11.50	Horizontal	-53.53	-13.00	40.53	0
9	7529.40	-56.62	4.20	12.20	Horizontal	-50.77	-13.00	37.77	270
10	8366.00	-57.29	4.30	12.50	Horizontal	-51.24	-13.00	38.24	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1671.95	-61.05	1.70	8.70	Horizontal	-56.20	-13.00	43.20	135
3	2508.40	-54.44	2.30	12.00	Horizontal	-46.89	-13.00	33.89	90
4	3346.00	-66.61	2.70	12.70	Horizontal	-58.76	-13.00	45.76	315
5	4182.50	-64.82	3.00	12.50	Horizontal	-57.47	-13.00	44.47	225
6	5019.00	-61.74	3.40	12.50	Horizontal	-54.79	-13.00	41.79	90
7	5855.50	-61.69	3.40	12.80	Horizontal	-54.44	-13.00	41.44	135
8	6692.00	-58.27	4.10	11.50	Horizontal	-53.02	-13.00	40.02	0
9	7528.50	-56.46	4.20	12.20	Horizontal	-50.61	-13.00	37.61	45
10	8365.00	-56.15	4.30	12.50	Horizontal	-50.10	-13.00	37.10	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.50	-60.51	1.70	8.70	Horizontal	-55.66	-13.00	42.66	45
3	2503.00	-56.13	2.30	12.00	Horizontal	-48.58	-13.00	35.58	225
4	3337.40	-65.93	2.70	12.70	Horizontal	-58.08	-13.00	45.08	0
5	4170.00	-64.09	3.00	12.50	Horizontal	-56.74	-13.00	43.74	90
6	5004.00	-62.37	3.40	12.50	Horizontal	-55.42	-13.00	42.42	315
7	5838.00	-62.94	3.40	12.80	Horizontal	-55.69	-13.00	42.69	0
8	6672.00	-57.48	4.10	11.50	Horizontal	-52.23	-13.00	39.23	180
9	7506.00	-56.34	4.20	12.20	Horizontal	-50.49	-13.00	37.49	45
10	8340.00	-57.14	4.30	12.50	Horizontal	-51.09	-13.00	38.09	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1664.15	-61.60	1.70	8.70	Horizontal	-56.75	-13.00	43.75	135
3	2496.25	-54.35	2.30	12.00	Horizontal	-46.80	-13.00	33.80	45
4	3326.00	-66.28	2.70	12.70	Horizontal	-58.43	-13.00	45.43	90
5	4157.00	-64.47	3.00	12.50	Horizontal	-57.12	-13.00	44.12	135
6	4989.00	-63.18	3.40	12.50	Horizontal	-56.23	-13.00	43.23	0
7	5820.50	-63.52	3.40	12.80	Horizontal	-56.27	-13.00	43.27	180
8	6652.00	-58.23	4.10	11.50	Horizontal	-52.98	-13.00	39.98	315
9	7483.50	-56.13	4.20	12.20	Horizontal	-50.28	-13.00	37.28	45
10	8315.00	-57.18	4.30	12.50	Horizontal	-51.13	-13.00	38.13	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Climate Chamber	WEISS	VT 4002	582261194500 10	2021-05-15	2022-05-14
Wireless Communication Tester	R&S	CMW500	150415	2021-05-15	2022-05-14
Spectrum Analyzer	Keysight	N9020A	MY52330084	2021-05-15	2022-05-14
Universal Radio Communication Tester	Agilent	E5515C	GB44400275	2021-05-15	2022-05-14
Spectrum Analyzer	R&S	FSV3030	101411	2020-12-13	2021-12-12
Spectrum Analyzer	R&S	FSV30	100815	2020-12-17	2021-12-16
Horn Antenna	Schwarzbeck	BBHA 9120D	01799	2019--9-21	2022-09-20
Horn Antenna	Schwarzbeck	VULB 9163	01439	2021-06-30	2024-06-29
Software	R&S	EMC32	10.35.10	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.