



RF TEST REPORT

Applicant Xiaomi Communications Co., Ltd.
FCC ID 2AFZZ119UY
Product Mobile Phone
Brand Redmi
Model 22011119UY
Report No. R2110A0907-R6
Issue Date November 25, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Peng Tao

Prepared by: Peng Tao

Kai Xu

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location.....	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information.....	5
2.2. General information.....	5
3. Applied Standards	6
4. Test Configuration	7
5. Test Case Results	10
5.1. Occupied Bandwidth	10
5.2. Average Power Output.....	29
5.3. Frequency Stability.....	37
5.4. Power Spectral Density.....	41
5.5. Unwanted Emission	58
5.6. Conducted Emission	158
6. Main Test Instruments.....	161
ANNEX A: The EUT Appearance	162
ANNEX B: Test Setup Photos	163

Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Average output power	15.407(a)	PASS
2	Occupied bandwidth	15.407(e)	PASS
3	Frequency stability	15.407(g)	PASS
4	Power spectral density	15.407(a)	PASS
5	Unwanted Emissions	15.407(b)	PASS
6	Conducted Emissions	15.207	PASS
Date of Testing: October 28, 2021 ~ November 23, 2021			
Date of Sample Received: October 26, 2021			
<p>Note: PASS: The EUT complies with the essential requirements in the standard.</p> <p>FAIL: The EUT does not comply with the essential requirements in the standard.</p> <p>All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.</p>			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Xiaomi Communications Co., Ltd.
Applicant address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer	Xiaomi Communications Co., Ltd.
Manufacturer address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

2.2. General information

EUT Description		
Model	22011119UY	
IMEI	IMEI 1: 865366050034320 IMEI 2: 865366050034338	
Hardware Version	P2	
Software Version	MIUI12.5	
Antenna Type	PIFA Antenna	
Antenna Gain	5.15GHz ~ 5.25GHz	0.2 dBi
	5.25GHz ~ 5.35GHz	0.2 dBi
	5.47GHz ~ 5.725GHz	0.0 dBi
	5.725GHz ~ 5.85GHz	0.2 dBi
Directional Gain	NA	
Operating Frequency Range(s)	U-NII-1: 5150MHz-5250MHz U-NII-2A: 5250MHz -5350MHz U-NII-2C: 5470MHz-5725MHz U-NII-3: 5725MHz -5850MHz	
Modulation Type	802.11a/n (HT20/HT40): OFDM 802.11ac (VHT20/VHT40/VHT80): OFDM	
Max. Conducted Power	14.38dBm	
Testing temperature range:	-20 ° C to 50° C	
Operating temperature range:	-10 °C to 60° C	
Operating voltage range:	3.6V to 4.45V	
State DC voltage:	3.87V	
<p>Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.</p> <p>2. This device support automatically discontinue transmission, while the device is not transmitting any information, the device can automatically discontinue transmission and become standby mode for power saving. The device can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.</p>		

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15E (2020) Unlicensed National Information Infrastructure Devices

ANSI C63.10 (2013)

Reference standard:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Mode	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

**Wireless Technology and Frequency Range**

Wireless Technology		Bandwidth	Channel	Frequency	
Wi-Fi	U-NII-1	20 MHz	36	5180MHz	
			40	5200MHz	
			44	5220MHz	
			48	5240MHz	
		40 MHz	38	5190MHz	
			46	5230MHz	
			80 MHz	42	5210MHz
		U-NII-2A	20 MHz	52	5260MHz
				56	5280MHz
	60			5300MHz	
	64			5320MHz	
	40 MHz		54	5270MHz	
			62	5310MHz	
	80 MHz		58	5290MHz	
	U-NII-2C	20 MHz	100	5500MHz	
			104	5520MHz	
			108	5540MHz	
			112	5560MHz	
			116	5580MHz	
			120	5600MHz	
			124	5620MHz	
			128	5640MHz	
			132	5660MHz	
			136	5680MHz	
			140	5700MHz	
			40 MHz	102	5510MHz
		110		5550MHz	
		118		5590MHz	
126		5630MHz			
134		5670MHz			
80 MHz		142	5710MHz		
106		5530MHz			



			122	5610MHz	
			138	5690MHz	
	U-NII-3	20 MHz	149	5745MHz	
			153	5765MHz	
			157	5785MHz	
			161	5805MHz	
			165	5825MHz	
			151	5755MHz	
		40 MHz	159	5795MHz	
			155	5775MHz	
Does this device support TPC Function? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No					
Does this device support TDWR Band? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No					

5. Test Case Results

5.1. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.


For U-NII-1/U-NII-2A/U-NII-2C, set RBW \approx 1% OCB kHz, VBW \geq 3 \times RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

For U-NII-3, Set RBW = 100 kHz, VBW \geq 3 \times RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

Use the 99 % power bandwidth function of the instrument

Test Setup

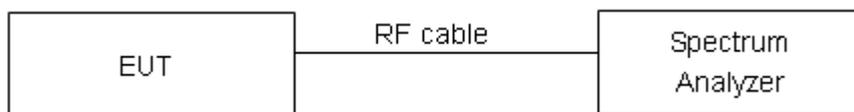

Limits

Rule FCC Part §15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

**Test Results:****U-NII-1**

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5180	16.396	19.73	PASS
	5200	16.388	19.58	PASS
	5240	16.391	19.73	PASS
802.11n HT20	5180	17.525	19.75	PASS
	5200	17.524	19.75	PASS
	5240	17.522	20.03	PASS
802.11n HT40	5190	35.935	39.79	PASS
	5230	35.940	40.28	PASS
802.11ac VHT20	5180	17.543	19.98	PASS
	5200	17.540	20.06	PASS
	5240	17.516	19.89	PASS
802.11ac VHT40	5190	35.920	40.03	PASS
	5230	35.956	40.27	PASS
802.11ac VHT80	5210	75.284	80.42	PASS

U-NII-2A

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5260	16.385	19.74	PASS
	5300	16.405	19.50	PASS
	5320	16.377	19.38	PASS
802.11n HT20	5260	17.517	19.88	PASS
	5300	17.559	20.12	PASS
	5320	17.532	19.86	PASS
802.11n HT40	5270	35.935	40.21	PASS
	5310	35.913	39.93	PASS
802.11ac VHT20	5260	17.549	20.12	PASS
	5300	17.567	20.06	PASS
	5320	17.511	19.99	PASS
802.11ac VHT40	5270	35.911	39.72	PASS
	5310	35.915	39.99	PASS
802.11ac VHT80	5290	75.244	80.51	PASS



U-NII-2C

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5500	16.387	19.62	PASS
	5580	16.397	19.74	PASS
	5700	16.407	19.69	PASS
	5720	16.396	19.64	PASS
802.11n HT20	5500	17.529	19.96	PASS
	5600	17.543	20.00	PASS
	5700	17.528	19.85	PASS
	5720	17.514	19.93	PASS
802.11n HT40	5510	35.988	39.83	PASS
	5590	35.987	40.01	PASS
	5670	35.918	40.30	PASS
	5710	35.942	40.25	PASS
802.11ac VHT20	5500	17.542	19.93	PASS
	5600	17.532	19.93	PASS
	5700	17.529	20.18	PASS
	5720	17.508	19.95	PASS
802.11ac VHT40	5510	35.938	40.17	PASS
	5590	35.914	40.33	PASS
	5670	35.955	40.14	PASS
	5710	35.927	40.13	PASS
802.11ac VHT80	5610	75.290	80.71	PASS
	5690	75.322	80.77	PASS



U-NII-3

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11a	5745	16.404	15.90	500	PASS
	5785	16.385	13.21	500	PASS
	5825	16.391	15.26	500	PASS
802.11n HT20	5745	17.532	16.10	500	PASS
	5785	17.531	12.31	500	PASS
	5825	17.518	15.05	500	PASS
802.11n HT40	5755	36.022	35.09	500	PASS
	5795	35.873	32.54	500	PASS
802.11ac VHT20	5745	17.549	15.07	500	PASS
	5785	17.530	15.81	500	PASS
	5825	17.539	13.99	500	PASS
802.11ac VHT40	5755	36.024	35.00	500	PASS
	5795	35.890	35.08	500	PASS
802.11ac VHT80	5775	75.262	75.03	500	PASS


U-NII-1, 802.11a
Carrier frequency (MHz): 5180



U-NII-1, 802.11n HT20
Carrier frequency (MHz): 5180



U-NII-1, 802.11a
Carrier frequency (MHz): 5200

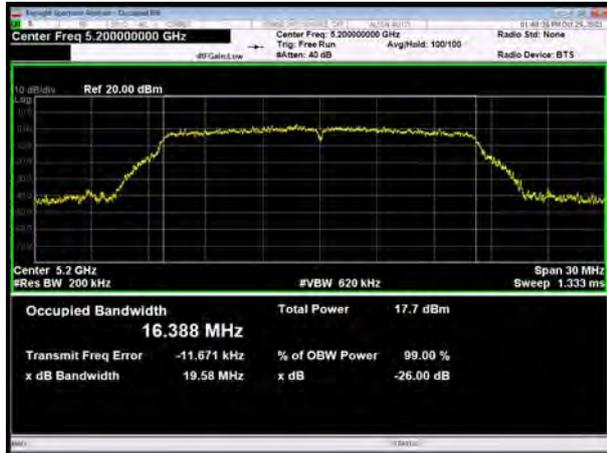

U-NII-1, 802.11n HT20
Carrier frequency (MHz): 5200



U-NII-1, 802.11a
Carrier frequency (MHz):5240



U-NII-1, 802.11n HT20
Carrier frequency (MHz):5240



U-NII-1, 802.11n HT40
Carrier frequency (MHz): 5190



U-NII-1, 802.11ac VHT20
Carrier frequency (MHz): 5180



U-NII-1, 802.11n HT40
Carrier frequency (MHz): 5230




U-NII-1, 802.11ac VHT20
Carrier frequency (MHz): 5200



U-NII-1, 802.11ac VHT40
Carrier frequency (MHz): 5190




U-NII-1, 802.11ac VHT20
Carrier frequency (MHz): 5240

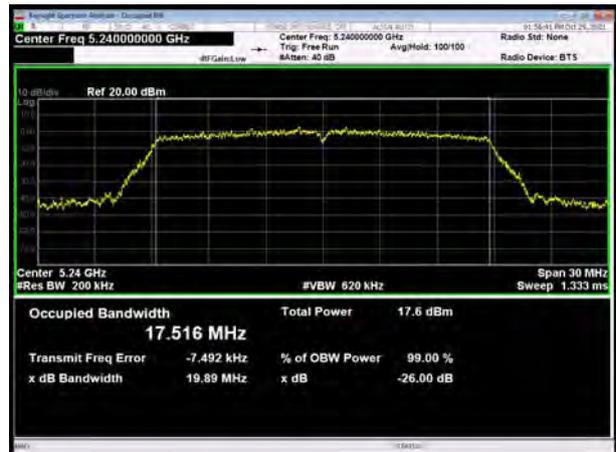

U-NII-1, 802.11ac VHT40
Carrier frequency (MHz): 5230



U-NII-1, 802.11ac VHT80
Carrier frequency (MHz): 5210

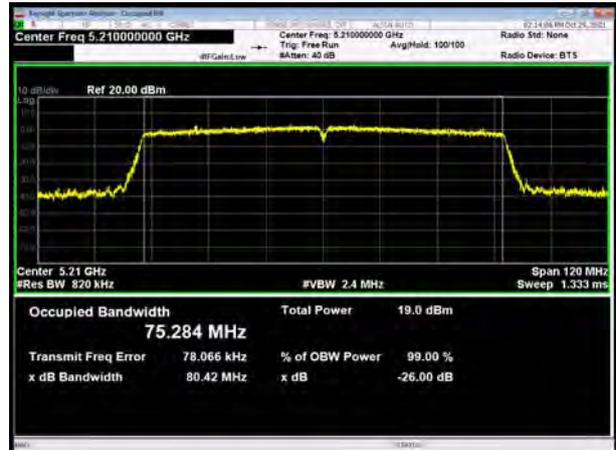


U-NII-2A, 802.11a
Carrier frequency (MHz): 5260



U-NII-2A, 802.11n HT20
Carrier frequency (MHz): 5260



U-NII-2A, 802.11a
Carrier frequency (MHz): 5300

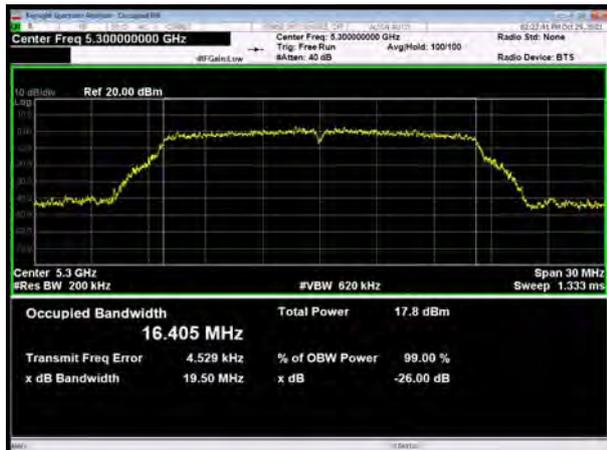


U-NII-2A, 802.11n HT20
Carrier frequency (MHz): 5300



U-NII-2A, 802.11a
Carrier frequency (MHz):5320



U-NII-2A, 802.11n HT20
Carrier frequency (MHz):5320

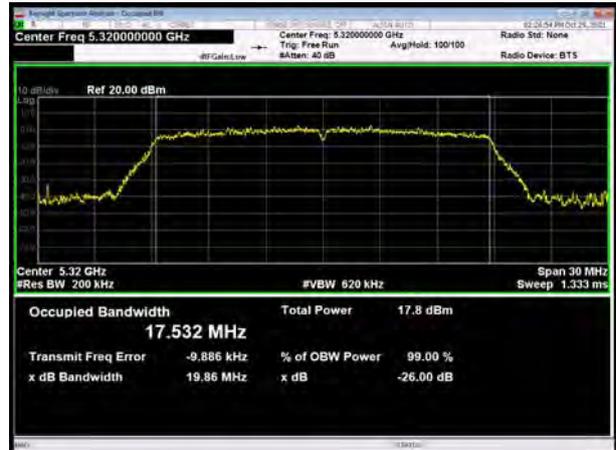

U-NII-2A, 802.11n HT40
Carrier frequency (MHz): 5270



U-NII-2A, 802.11ac VHT20
Carrier frequency (MHz):5260



U-NII-2A, 802.11n HT40
Carrier frequency (MHz): 5310



U-NII-2A, 802.11ac VHT20
Carrier frequency (MHz): 5300



U-NII-2A, 802.11ac VHT40
Carrier frequency (MHz): 5270



U-NII-2A, 802.11ac VHT20
Carrier frequency (MHz): 5320



U-NII-2A, 802.11ac VHT40
Carrier frequency (MHz): 5310



U-NII-2A, 802.11ac VHT80
Carrier frequency (MHz): 5290




U-NII-2C, 802.11a
Carrier frequency (MHz): 5500




U-NII-2C, 802.11n HT20
Carrier frequency (MHz): 5500




U-NII-2C, 802.11a
Carrier frequency (MHz): 5600

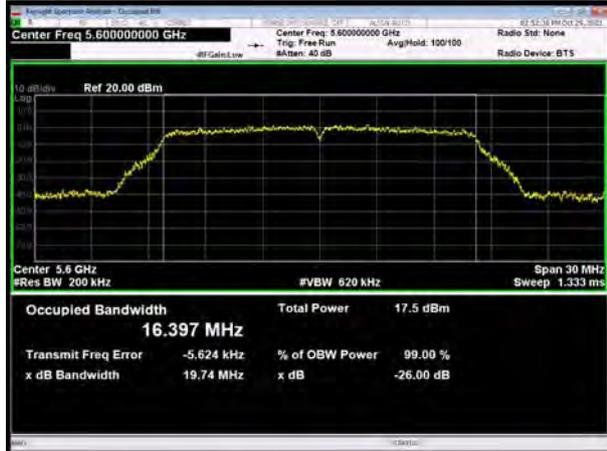


U-NII-2C, 802.11n HT20
Carrier frequency (MHz): 5600

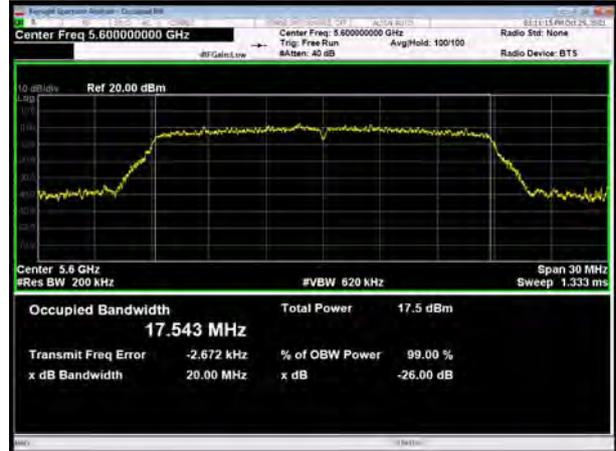


U-NII-2C, 802.11a
Carrier frequency (MHz): 5700

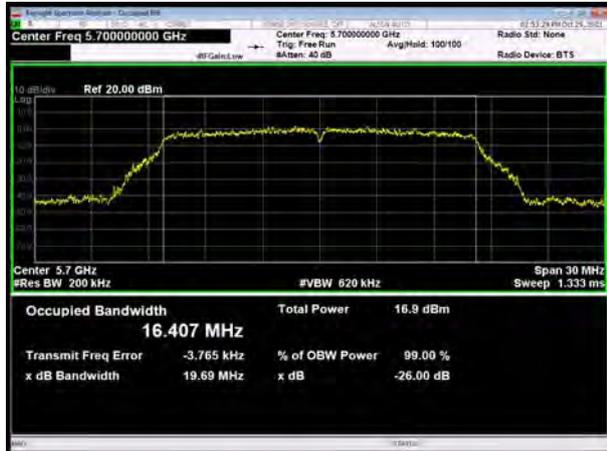


U-NII-2C, 802.11n HT20
Carrier frequency (MHz): 5700

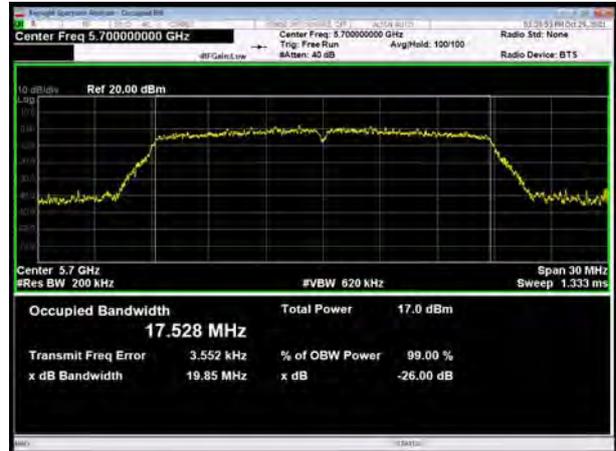

U-NII-2C, 802.11a
Carrier frequency (MHz):5720

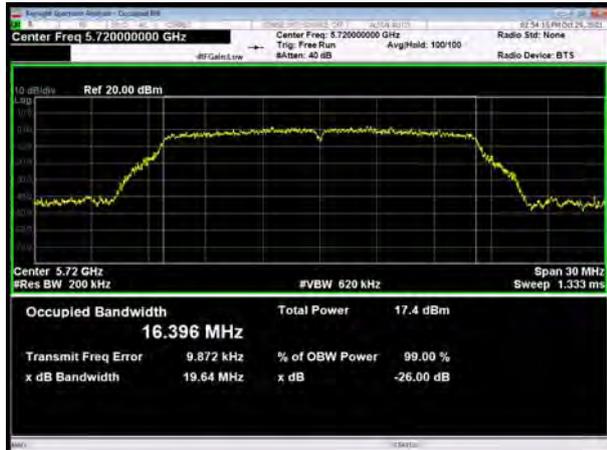

U-NII-2C, 802.11n HT20
Carrier frequency (MHz):5720

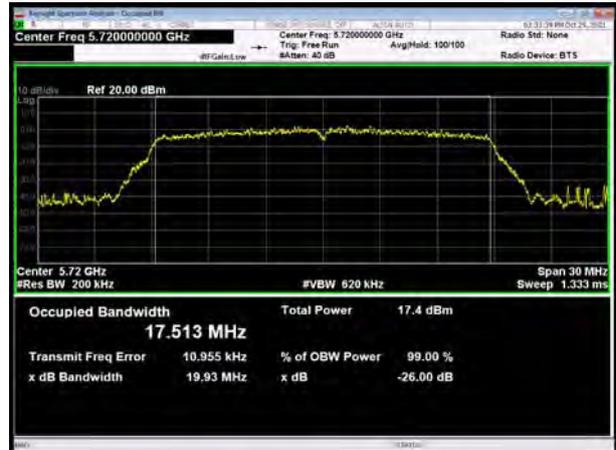

U-NII-2C, 802.11n HT40
Carrier frequency (MHz): 5510



U-NII-2C, 802.11ac VHT20
Carrier frequency (MHz): 5500



U-NII-2C, 802.11n HT40
Carrier frequency (MHz): 5590




U-NII-2C, 802.11ac VHT20
Carrier frequency (MHz): 5600





U-NII-2C, 802.11n HT40
Carrier frequency (MHz): 5670

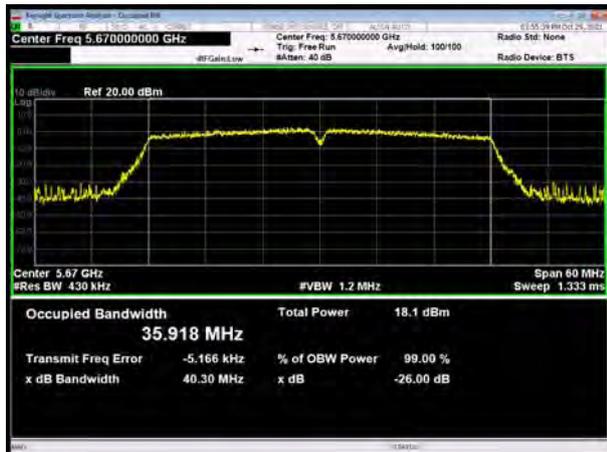

U-NII-2C, 802.11ac VHT20
Carrier frequency (MHz): 5700



U-NII-2C, 802.11n HT40
Carrier frequency (MHz): 5710



U-NII-2C, 802.11ac VHT20
Carrier frequency (MHz): 5720



U-NII-2C, 802.11ac VHT40
Carrier frequency (MHz): 5510



U-NII-2C, 802.11ac VHT40
Carrier frequency (MHz): 5590





U-NII-2C, 802.11ac VHT40
Carrier frequency (MHz): 5670



U-NII-2C, 802.11ac VHT80
Carrier frequency (MHz): 5610



U-NII-2C, 802.11ac VHT40
Carrier frequency (MHz): 5710




U-NII-2C, 802.11ac VHT80
Carrier frequency (MHz): 5690





99% bandwidth

U-NII-3, 802.11a
Carrier frequency (MHz): 5745

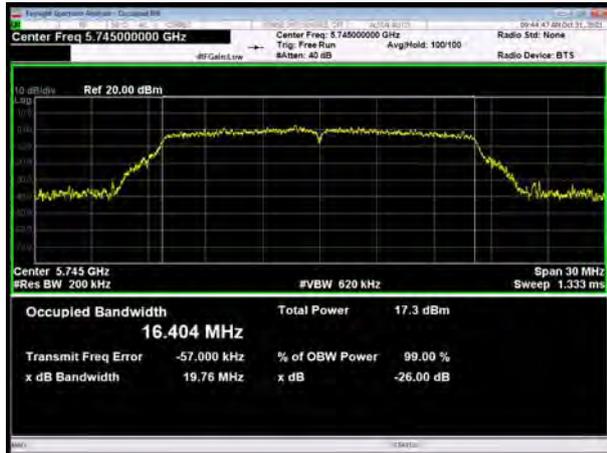


U-NII-3, 802.11n HT20
Carrier frequency (MHz): 5745



U-NII-3, 802.11a
Carrier frequency (MHz): 5785



U-NII-3, 802.11n HT20
Carrier frequency (MHz): 5785

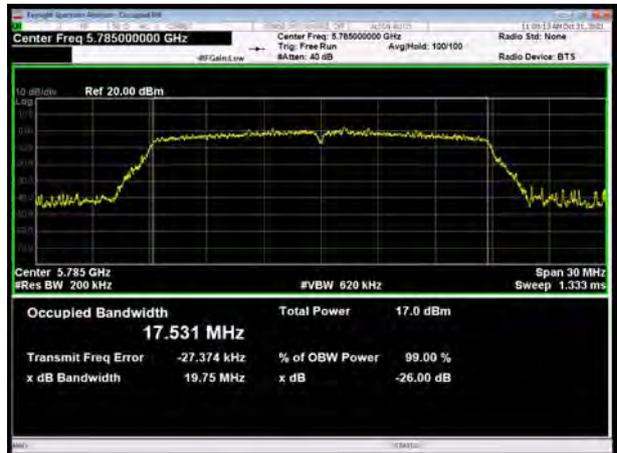

U-NII-3, 802.11a
Carrier frequency (MHz): 5825




U-NII-3, 802.11n HT20
Carrier frequency (MHz): 5825



U-NII-3, 802.11n HT40
Carrier frequency (MHz): 5755



U-NII-3, 802.11ac VHT20
Carrier frequency (MHz): 5745

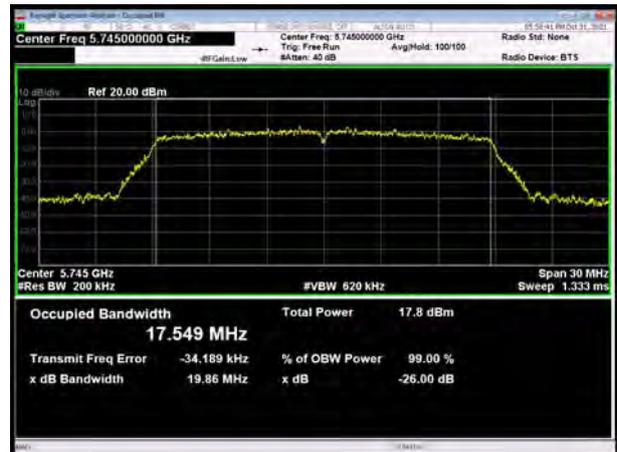

U-NII-3, 802.11n HT40
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT20
Carrier frequency (MHz): 5785



U-NII-3, 802.11ac VHT40
Carrier frequency (MHz): 5755



U-NII-3, 802.11ac VHT20
Carrier frequency (MHz): 5825





U-NII-3, 802.11ac VHT40
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT80
Carrier frequency (MHz): 5775





Minimum 6 dB bandwidth


U-NII-3, 802.11a

Carrier frequency (MHz): 5745



U-NII-3, 802.11n HT20

Carrier frequency (MHz): 5745

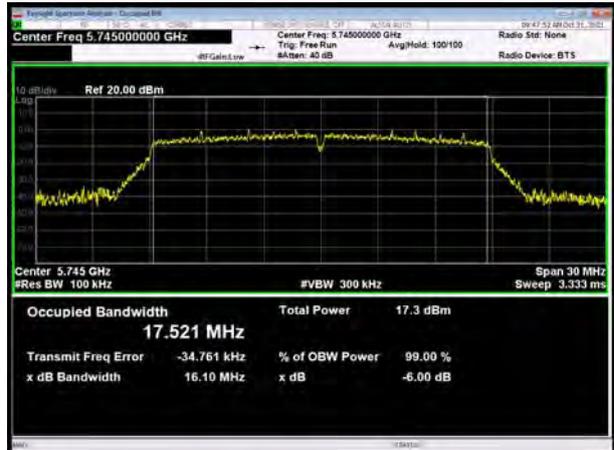

U-NII-3, 802.11a

Carrier frequency (MHz): 5785



U-NII-3, 802.11n HT20

Carrier frequency (MHz): 5785



U-NII-3, 802.11a

Carrier frequency (MHz): 5825




U-NII-3, 802.11n HT20


Carrier frequency (MHz): 5825



U-NII-3, 802.11n HT40
Carrier frequency (MHz): 5755

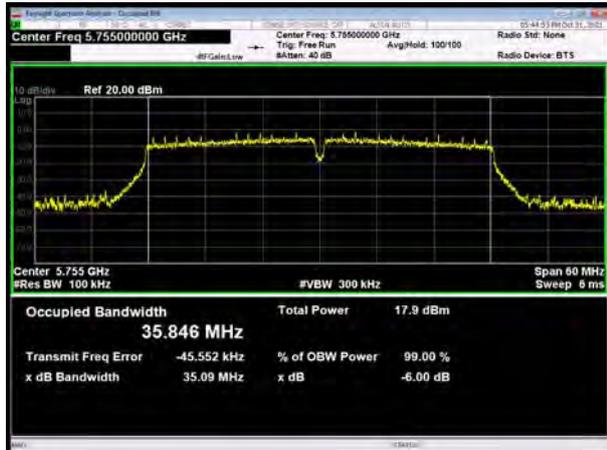

U-NII-3, 802.11ac VHT20
Carrier frequency (MHz): 5745

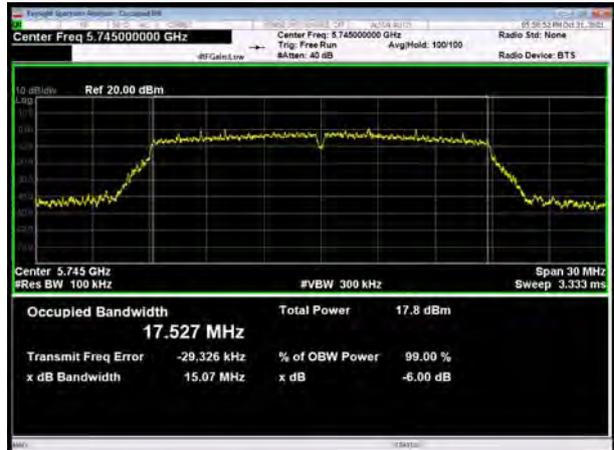

U-NII-3, 802.11n HT40
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT20
Carrier frequency (MHz): 5785



U-NII-3, 802.11ac VHT40
Carrier frequency (MHz): 5755



U-NII-3, 802.11ac VHT20
Carrier frequency (MHz): 5825






U-NII-3, 802.11ac VHT40
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT80
Carrier frequency (MHz): 5775

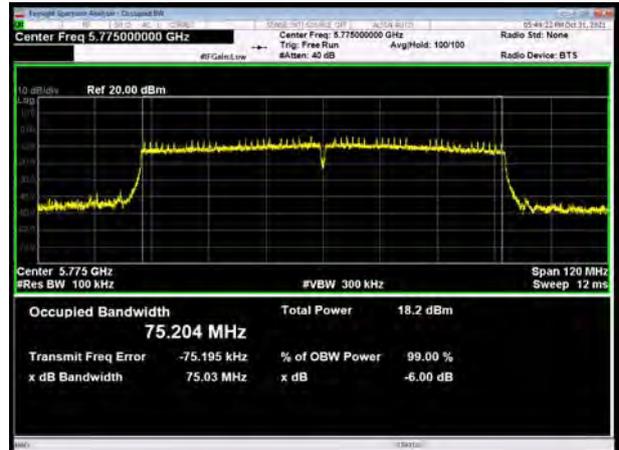

5.2. Average Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the average power meter through an external attenuator and a known loss cable. The EUT is max power transmission with proper modulation. We use Maximum average Conducted Output Power Level Method in KDB789033 for this test

Test Setup

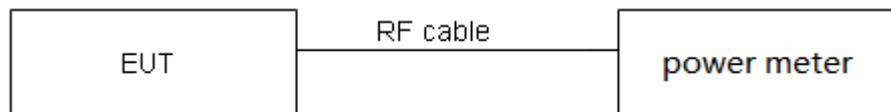

Limits

Rule FCC Part 15.407(a)(1)(2)(3)

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude



the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

Mode	T _{on} (ms)	T _(on+off) (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11a	1.39	1.43	0.97	0.12
802.11n HT20	1.29	1.34	0.96	0.17
802.11n HT40	0.65	0.69	0.94	0.26
802.11ac VHT20	1.31	1.36	0.96	0.16
802.11ac VHT40	0.65	0.70	0.93	0.32
802.11ac VHT80	0.32	0.37	0.86	0.63

Note: when Duty cycle ≥ 0.98 , Duty cycle correction Factor not required.

Power Index								
Channel	802.11a	802.11n HT20	802.11ac VHT20	Channel	802.11n HT40	802.11ac VHT40	Channel	802.11ac VHT80
CH36	14.5	14.5	15	CH38	15	15	CH42	15
CH40	14.5	14.5	15	CH46	15	15	/	/
CH48	14.5	14.5	15	/	/	/	/	/
CH52	14.5	14.5	15	CH54	15	15	CH58	15
CH60	14.5	14.5	15	CH62	15	15	/	/
CH64	14.5	14.5	15	/	/	/	/	/
CH100	14.5	14.5	15	CH102	15	15	CH122	15
CH120	14.5	14.5	15	CH118	15	15	CH138	15
CH140	14.5	14.5	15	CH134	15	15	/	/
CH144	14.5	14.5	15	CH142	15	15	/	/
CH149	14.5	14.5	15	CH151	15	15	CH155	15
CH157	14.5	14.5	15	CH159	15	15	/	/
CH165	14.5	14.5	15	/	/	/	/	/

Test Mode		Channel/Frequency (MHz)	B=26 dB bandwidth (MHz)	Limit 11 dBm + 10 log B (dBm)	Final Limit(dBm)
U-NII-2A	802.11a	52/5260	19.74	23.95<24	23.95
		60/5300	19.50	23.90<24	23.90
		64/5320	19.38	23.87<24	23.87
	802.11n HT20	52/5260	19.88	23.98<24	23.98
		60/5300	20.12	24.04>24	24.00
		64/5320	19.86	23.98<24	23.98
	802.11n HT40	54/5270	40.21	27.04>24	24.00
		62/5310	39.93	27.01>24	24.00
	802.11ac VHT20	52/5260	20.12	24.04>24	24.00
		60/5300	20.06	24.02>24	24.00
		64/5320	19.99	24.01>24	24.00
802.11ac VHT40	54/5270	39.72	26.99>24	24.00	
	62/5310	39.99	27.02>24	24.00	
802.11ac VHT80	58/5290	80.51	30.06 >24	24	
U-NII-2C	802.11a	100/5500	19.62	23.93<24	23.93
		120/5600	19.74	23.95<24	23.95
		140/5700	19.69	23.94<24	23.94
		144/5720	19.64	23.93<24	23.93
	802.11n HT20	100/5500	19.96	24.00	24.00
		120/5600	20.00	24.01>24	24.00
		140/5700	19.85	23.98<24	23.98
		144/5720	19.93	24.00	24.00
	802.11n HT40	102/5510	39.83	27.00>24	24.00
		118/5590	60.00	28.78>24	24.00
		134/5670	40.30	27.05>24	24.00
		142/5710	40.25	27.05>24	24.00
	802.11ac VHT20	100/5500	19.93	24.00>24	24.00
		120/5600	19.93	24.00	24.00
		140/5700	20.18	24.05>24	24.00
		144/5720	19.98	24.01>24	24.00
	802.11ac VHT40	102/5510	40.17	27.04>24	24.00
		118/5590	40.33	27.06>24	24.00
		134/5670	40.14	27.04>24	24.00
		142/5710	40.13	27.03>24	24.00
	802.11ac VHT80	122/5610	80.71	30.07>24	24.00
138/5690		80.77	30.07>24	24.00	

Note: 250mW=24dBm

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

U-NII-1

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	36/5180	13.48	13.60	24	PASS
	40/5200	13.25	13.37	24	PASS
	48/5240	13.60	13.72	24	PASS
802.11n HT20	36/5180	13.33	13.50	24	PASS
	40/5200	13.30	13.47	24	PASS
	48/5240	13.44	13.61	24	PASS
802.11n HT40	38/5190	13.90	14.16	24	PASS
	46/5230	13.87	14.13	24	PASS
802.11ac VHT20	36/5180	13.31	13.47	24	PASS
	40/5200	13.32	13.48	24	PASS
	48/5240	13.39	13.55	24	PASS
802.11ac VHT40	38/5190	13.88	14.20	24	PASS
	46/5230	13.88	14.20	24	PASS
802.11ac VHT80	42/5210	13.56	14.19	24	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

U-NII-2A

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	52/5260	13.59	13.71	23.95	PASS
	60/5300	13.55	13.67	23.90	PASS
	64/5320	13.65	13.77	23.87	PASS
802.11n HT20	52/5260	13.43	13.60	23.98	PASS
	60/5300	13.37	13.54	24.00	PASS
	64/5320	13.51	13.68	23.98	PASS
802.11n HT40	54/5270	13.84	14.10	24.00	PASS
	62/5310	14.04	14.30	24.00	PASS
802.11ac VHT20	52/5260	13.88	14.04	24.00	PASS
	60/5300	13.87	14.03	24.00	PASS
	64/5320	14.22	14.38	24.00	PASS
802.11ac VHT40	54/5270	13.82	14.14	24.00	PASS
	62/5310	13.83	14.15	24.00	PASS
802.11ac VHT80	58/5290	13.65	14.28	24.00	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



U-NII-2C

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	100/5500	13.27	13.39	23.93	PASS
	120/5600	13.31	13.43	23.95	PASS
	140/5700	12.69	12.81	23.94	PASS
	144/5720	13.15	13.27	23.93	PASS
802.11n HT20	100/5500	13.05	13.22	24.00	PASS
	120/5600	13.13	13.30	24.00	PASS
	140/5700	12.61	12.78	23.98	PASS
	144/5720	13.00	13.17	24.00	PASS
802.11n HT40	102/5510	13.57	13.83	24.00	PASS
	118/5590	13.22	13.48	24.00	PASS
	134/5670	13.46	13.72	24.00	PASS
	142/5710	13.25	13.51	24.00	PASS
802.11ac VHT20	100/5500	13.79	13.95	24.00	PASS
	120/5600	13.77	13.93	24.00	PASS
	140/5700	13.07	13.23	24.00	PASS
	144/5720	13.50	13.66	24.00	PASS
802.11ac VHT40	102/5510	13.58	13.90	24.00	PASS
	118/5590	13.76	14.08	24.00	PASS
	134/5670	13.54	13.86	24.00	PASS
	142/5710	13.28	13.60	24.00	PASS
802.11ac VHT80	122/5610	13.39	14.02	24.00	PASS
	138/5690	13.20	13.83	24.00	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

U-NII-3

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	149/5745	12.99	13.11	30	PASS
	157/5785	12.71	12.83	30	PASS
	165/5825	12.32	12.44	30	PASS
802.11n HT20	149/5745	12.94	13.11	30	PASS
	157/5785	12.73	12.90	30	PASS
	165/5825	12.32	12.49	30	PASS
802.11n HT40	151/5755	13.23	13.49	30	PASS
	159/5795	13.05	13.31	30	PASS
802.11ac VHT20	149/5745	13.56	13.72	30	PASS
	157/5785	13.31	13.47	30	PASS
	165/5825	12.88	13.04	30	PASS
802.11ac VHT40	151/5755	13.18	13.50	30	PASS
	159/5795	13.17	13.49	30	PASS
802.11ac VHT80	155/5775	12.71	13.34	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

5.3. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. Frequency stability with respect to ambient temperature

- a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.
- b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.
- c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- g) Measure the frequency at each of frequencies specified in 5.6.
- h) Switch OFF the EUT but do not switch OFF the oscillator heater.
- i) Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.
- j) Repeat step f) through step i) down to the lowest specified temperature.

2. Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15°C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

- a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.



- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage.

Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936\text{Hz}$

**Test Results**

Voltage (V)	Temperature (°C)	U-NII-1 Test Results			
		5200MHz			
		1min	2min	5min	10min
3.87	-20	5200.007152	5199.998764	5199.996103	5199.995025
3.87	-10	5200.003572	5199.994757	5199.987859	5199.985530
3.87	0	5199.996482	5199.992684	5199.984933	5199.981957
3.87	10	5199.995026	5199.990427	5199.978927	5199.977322
3.87	20	5199.992251	5199.985636	5199.977882	5199.974271
3.87	30	5199.988975	5199.978074	5199.970839	5199.964726
3.87	40	5199.988907	5199.973527	5199.964372	5199.961822
3.87	50	5199.985609	5199.966295	5199.958739	5199.956531
3.6	20	5199.977036	5199.958873	5199.956873	5199.949308
4.45	20	5199.967571	5199.954714	5199.956505	5199.947415
Max. ΔMHz		-0.032429	-0.045286	-0.043495	-0.052585
PPM		-6.236428	-8.708781	-8.364426	-10.112443

Voltage (V)	Temperature (°C)	U-NII-2A Test Results			
		5300MHz			
		1min	2min	5min	10min
3.87	-20	5300.006573	5299.998344	5299.994322	5299.985820
3.87	-10	5300.004104	5299.994774	5299.985194	5299.981640
3.87	0	5299.997698	5299.985499	5299.981008	5299.979072
3.87	10	5299.994789	5299.977257	5299.980903	5299.969821
3.87	20	5299.990544	5299.972476	5299.976589	5299.966180
3.87	30	5299.987132	5299.963978	5299.975772	5299.957275
3.87	40	5299.979809	5299.959054	5299.972182	5299.955312
3.87	50	5299.972090	5299.949591	5299.970027	5299.952372
3.6	20	5299.972017	5299.949439	5299.965704	5299.942432
4.45	20	5299.970899	5299.940683	5299.963283	5299.933362
Max. ΔMHz		-0.029101	-0.059317	-0.036717	-0.066638
PPM		-5.490849	-11.191824	-6.927684	-12.573116



Voltage (V)	Temperature (°C)	U-NII-2C Test Results			
		5580MHz			
		1min	2min	5min	10min
3.87	-20	5579.997844	5579.988222	5579.983824	5579.981738
3.87	-10	5579.997595	5579.982557	5579.981977	5579.975021
3.87	0	5579.990457	5579.976511	5579.972480	5579.972464
3.87	10	5579.985232	5579.967770	5579.963640	5579.964292
3.87	20	5579.980128	5579.958291	5579.959542	5579.958868
3.87	30	5579.975702	5579.951921	5579.950308	5579.957897
3.87	40	5579.969590	5579.951788	5579.946419	5579.957319
3.87	50	5579.965316	5579.945361	5579.945943	5579.952152
3.6	20	5579.962689	5579.937198	5579.945602	5579.943405
4.45	20	5579.960233	5579.929102	5579.944492	5579.937737
Max. ΔMHz		-0.039767	-0.070898	-0.055508	-0.062263
PPM		-7.126624	-12.705785	-9.947727	-11.158269

Voltage (V)	Temperature (°C)	U-NII-3 Test Results			
		5785MHz			
		1min	2min	5min	10min
3.87	-20	5784.996433	5784.994850	5784.988705	5784.981502
3.87	-10	5784.988637	5784.991357	5784.984064	5784.973782
3.87	0	5784.981757	5784.984708	5784.974886	5784.968101
3.87	10	5784.979188	5784.975948	5784.967751	5784.963765
3.87	20	5784.978995	5784.970416	5784.965560	5784.960149
3.87	30	5784.975968	5784.966278	5784.958138	5784.956411
3.87	40	5784.973157	5784.961173	5784.951160	5784.947733
3.87	50	5784.963971	5784.958153	5784.941655	5784.944441
3.6	20	5784.961047	5784.953362	5784.937916	5784.943197
4.45	20	5784.960948	5784.952892	5784.933737	5784.935374
Max. ΔMHz		-0.039052	-0.047108	-0.066263	-0.064626
PPM		-6.750527	-8.143109	-11.454329	-11.171243

5.4. Power Spectral Density

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

Set RBW = 1MHz, VBW =3MHz for the band 5.150-5.250GHz, 5.250-5.350GHz, 5.470-5.725GHz.
Set RBW = 470kHz, VBW =1.5MHz for the band 5.725-5.850GHz

The conducted PSD is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Test setup

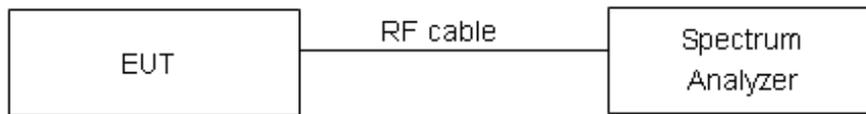

Limits

Rule FCC Part 15.407(a)(1)/ Part 15.407(a)(2) / Part 15.407(a)(3)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the



amount in dB that the directional gain of the antenna exceeds 6 dBi.

Frequency Bands/MHz	Limits
5150-5250	17/11dBm/MHz
5.25-5.35 GHz and 5.47-5.725 GHz	11dBm/MHz
5725-5850	30dBm/500kHz

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:

Note: Power Spectral Density =Read Value+Duty cycle correction factor

U-NII-1

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	36/5180	3.85	3.97	11	PASS
	40/5200	4.30	4.42	11	PASS
	48/5240	4.01	4.13	11	PASS
802.11n HT20	36/5180	3.74	3.91	11	PASS
	40/5200	3.55	3.72	11	PASS
	48/5240	3.67	3.84	11	PASS
802.11n HT40	38/5190	1.11	1.37	11	PASS
	46/5230	1.45	1.71	11	PASS
802.11ac VHT20	36/5180	3.76	3.92	11	PASS
	40/5200	3.62	3.78	11	PASS
	48/5240	3.78	3.94	11	PASS
802.11ac VHT40	38/5190	1.05	1.37	11	PASS
	46/5230	1.12	1.44	11	PASS
802.11ac VHT80	42/5210	-2.54	-1.91	11	PASS

U-NII-2A

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	52/5260	4.14	4.26	11	PASS
	60/5300	4.18	4.30	11	PASS
	64/5320	4.17	4.29	11	PASS
802.11n HT20	52/5260	3.59	3.76	11	PASS
	60/5300	3.60	3.77	11	PASS
	64/5320	3.94	4.11	11	PASS
802.11n HT40	54/5270	1.01	1.27	11	PASS
	62/5310	1.25	1.51	11	PASS
802.11ac VHT20	52/5260	4.11	4.27	11	PASS
	60/5300	4.45	4.61	11	PASS
	64/5320	4.31	4.47	11	PASS
802.11ac VHT40	54/5270	1.17	1.49	11	PASS
	62/5310	1.36	1.68	11	PASS
802.11ac VHT80	58/5290	-2.43	-1.80	11	PASS



U-NII-2C

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	100/5500	3.47	3.59	11	PASS
	120/5600	3.91	4.03	11	PASS
	140/5700	3.02	3.14	11	PASS
	144/5720	3.53	3.65	11	PASS
802.11n HT20	100/5500	3.63	3.80	11	PASS
	120/5600	3.28	3.45	11	PASS
	140/5700	2.89	3.06	11	PASS
	144/5720	3.29	3.46	11	PASS
802.11n HT40	102/5510	0.87	1.13	11	PASS
	118/5590	0.43	0.69	11	PASS
	134/5670	1.03	1.29	11	PASS
	142/5710	0.47	0.73	11	PASS
802.11ac VHT20	100/5500	4.06	4.22	11	PASS
	120/5600	3.97	4.13	11	PASS
	140/5700	3.25	3.41	11	PASS
	144/5720	3.87	4.03	11	PASS
802.11ac VHT40	102/5510	0.76	1.08	11	PASS
	118/5590	0.96	1.28	11	PASS
	134/5670	1.22	1.54	11	PASS
	142/5710	0.72	1.04	11	PASS
802.11ac VHT80	122/5610	-2.50	-1.87	11	PASS
	138/5690	-2.93	-2.30	11	PASS

U-NII-3

Mode	Channel Number	Read Value (dBm/470kHz)	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Conclusion
802.11a	149/5745	0.15	0.54	30	PASS
	157/5785	-0.17	0.22	30	PASS
	165/5825	-0.66	-0.27	30	PASS
802.11n HT20	149/5745	-0.01	0.43	30	PASS
	157/5785	-0.35	0.09	30	PASS
	165/5825	-0.41	0.03	30	PASS
802.11n HT40	151/5755	-3.08	-2.55	30	PASS
	159/5795	-2.81	-2.28	30	PASS
802.11ac VHT20	149/5745	0.46	0.89	30	PASS
	157/5785	0.10	0.53	30	PASS
	165/5825	-0.05	0.38	30	PASS
802.11ac VHT40	151/5755	-3.03	-2.44	30	PASS
	159/5795	-3.02	-2.43	30	PASS
802.11ac VHT80	155/5775	-6.51	-5.61	30	PASS

Note: PSD=Read Value + Duty cycle correction factor+10*LOG10(500/470)



U-NII-1, 802.11a, Channel No.: 36




U-NII-1, 802.11n HT20, Channel No.: 36




U-NII-1, 802.11a, Channel No.: 40



U-NII-1, 802.11n HT20, Channel No.: 40

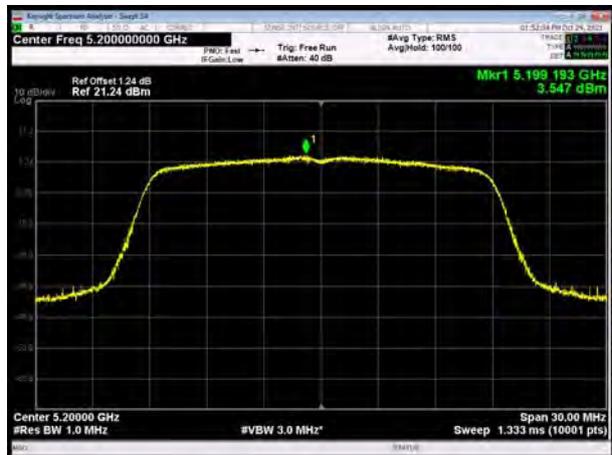

U-NII-1, 802.11a, Channel No.: 48

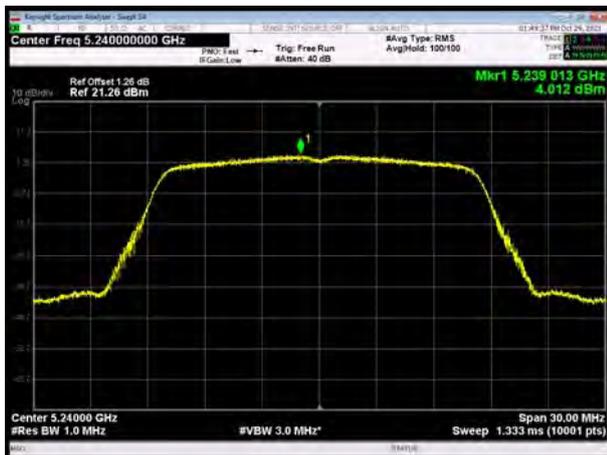


U-NII-1, 802.11n HT20, Channel No.: 48



U-NII-1, 802.11n HT40, Channel No.: 38



U-NII-1, 802.11ac VHT20, Channel No.: 36

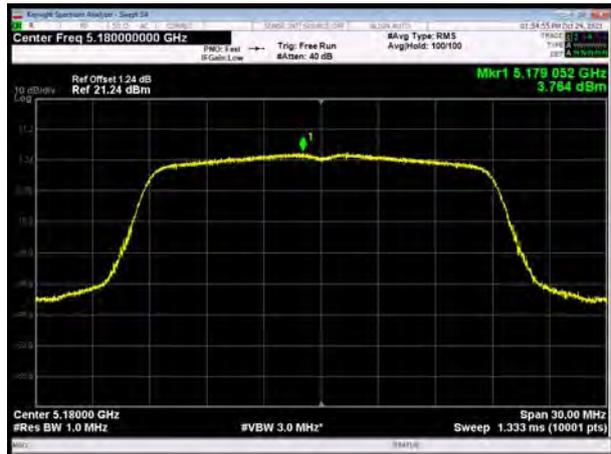


U-NII-1, 802.11n HT40, Channel No.: 46




U-NII-1, 802.11ac VHT20, Channel No.: 40



U-NII-1, 802.11ac VHT40, Channel No.: 38

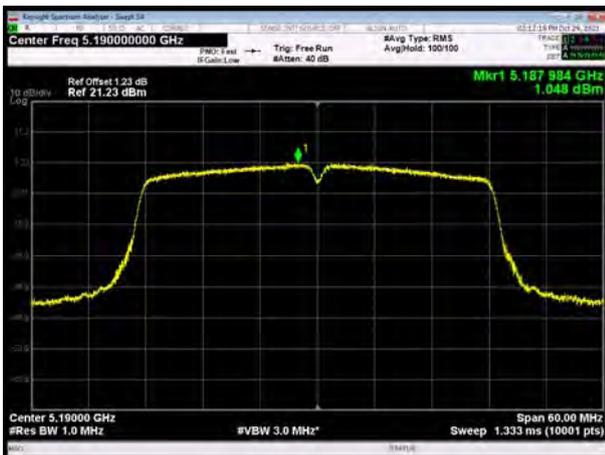


U-NII-1, 802.11ac VHT20, Channel No.: 48

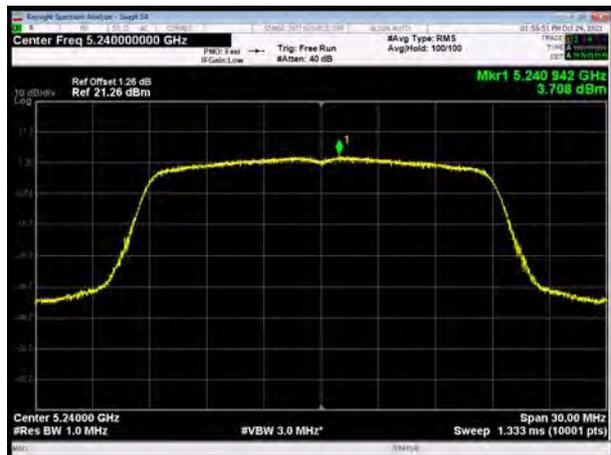

U-NII-1, 802.11ac VHT40, Channel No.: 46




U-NII-1, 802.11ac VHT80, Channel No.: 42

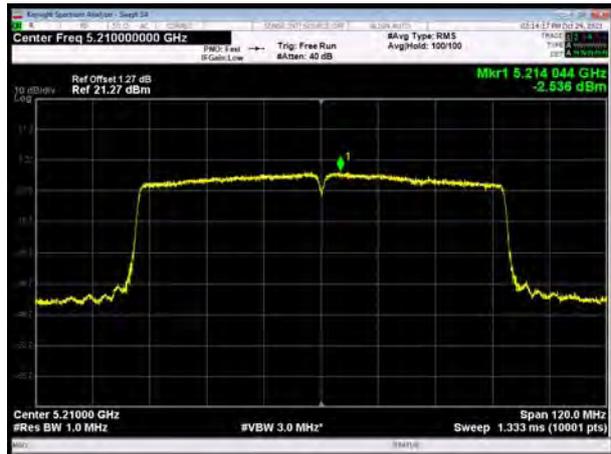

U-NII-2A, 802.11a, Channel No.: 52



U-NII-2A, 802.11n HT20, Channel No.: 52

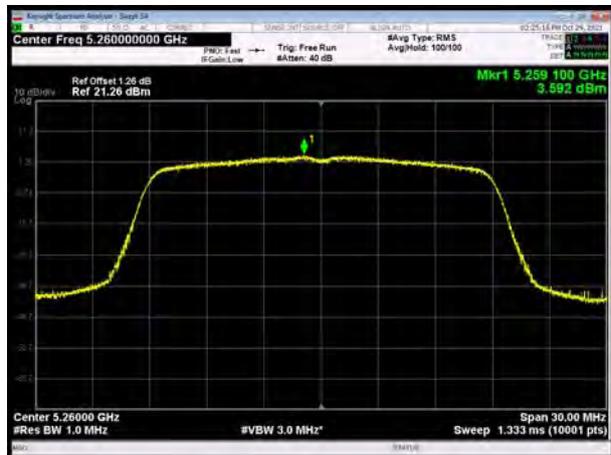

U-NII-2A, 802.11a, Channel No.: 60



U-NII-2A, 802.11n HT20, Channel No.: 60



U-NII-2A, 802.11a, Channel No.: 64




U-NII-2A, 802.11n HT20, Channel No.: 64



U-NII-2A, 802.11n HT40, Channel No.: 54



U-NII-2A, 802.11ac VHT20, Channel No.:52

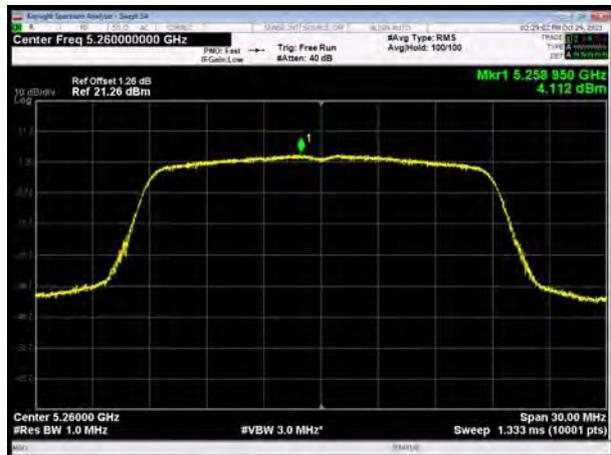


U-NII-2A, 802.11n HT40, Channel No.: 62



U-NII-2A, 802.11ac VHT20, Channel No.: 60



U-NII-2A, 802.11ac VHT40, Channel No.: 54

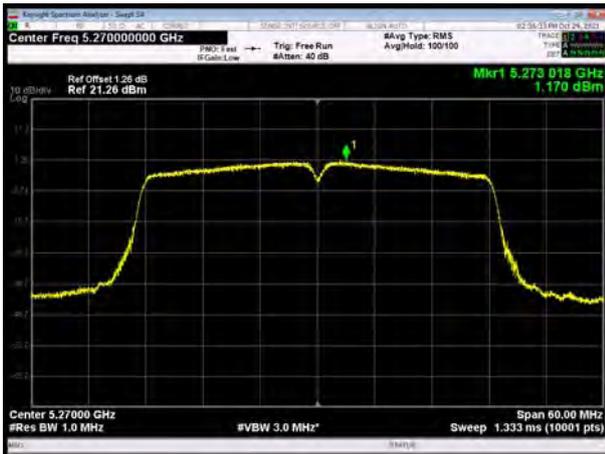


U-NII-2A, 802.11ac VHT20, Channel No.: 64



U-NII-2A, 802.11ac VHT40, Channel No.: 62



U-NII-2A, 802.11ac VHT80, Channel No.: 58

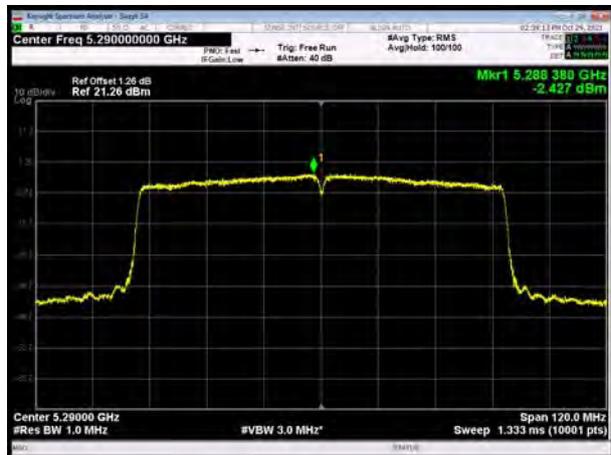

U-NII-2C, 802.11a, Channel No.: 100



U-NII-2C, 802.11n HT20, Channel No.: 100



U-NII-2C, 802.11a, Channel No.: 120




U-NII-2C, 802.11n HT20, Channel No.: 120



U-NII-2C, 802.11a, Channel No.: 140




U-NII-2C, 802.11n HT20, Channel No.: 140

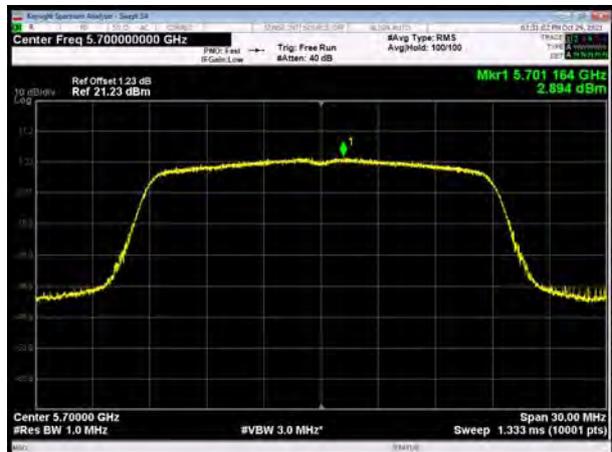

U-NII-2C, 802.11a, Channel No.: 144



U-NII-2C, 802.11n HT20, Channel No.: 144

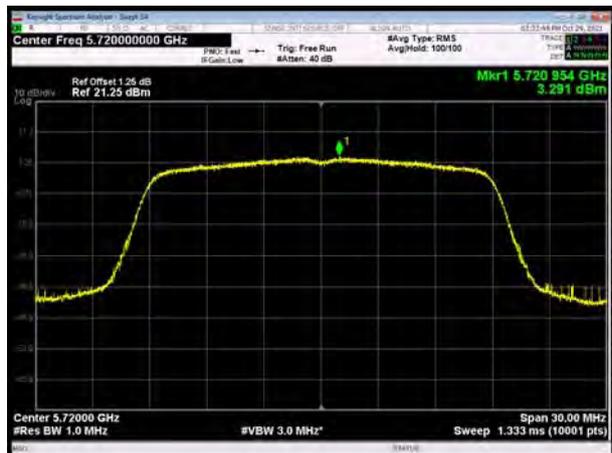

U-NII-2C, 802.11n HT40, Channel No.: 102




U-NII-2C, 802.11ac VHT20, Channel No.: 100



U-NII-2C, 802.11n HT40, Channel No.: 118



U-NII-2C, 802.11ac VHT20, Channel No.: 120

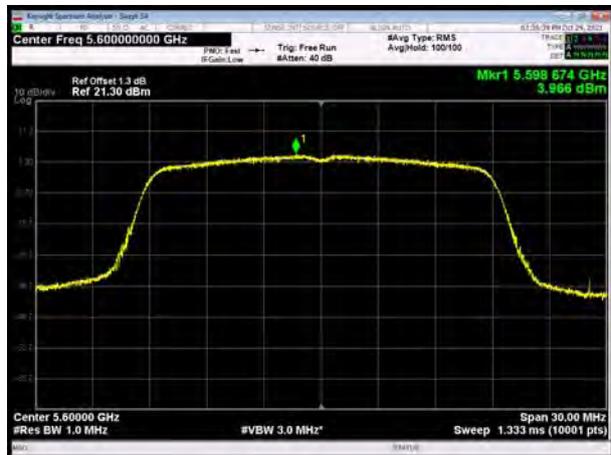

U-NII-2C, 802.11n HT40, Channel No.: 134




U-NII-2C, 802.11ac VHT20, Channel No.: 140



U-NII-2C, 802.11n HT40, Channel No.: 142



U-NII-2C, 802.11ac VHT20, Channel No.: 144

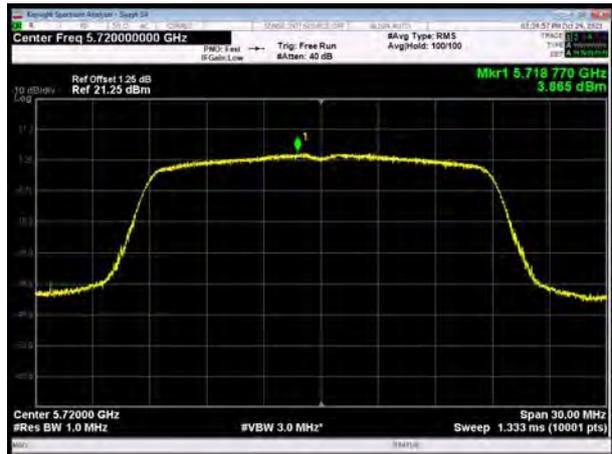

U-NII-2C, 802.11ac VHT40, Channel No.: 102



U-NII-2C, 802.11ac VHT40, Channel No.: 118



U-NII-2C, 802.11ac VHT40, Channel No.: 134



U-NII-2C, 802.11ac VHT40, Channel No.: 142



U-NII-2C, 802.11ac VHT80, Channel No.: 122



U-NII-2C, 802.11ac VHT80, Channel No.: 138



U-NII-3, 802.11a, Channel No.: 149



U-NII-3, 802.11n HT20, Channel No.: 149



U-NII-3, 802.11a, Channel No.: 157



U-NII-3, 802.11n HT20, Channel No.: 157





U-NII-3, 802.11a, Channel No.: 165



U-NII-3, 802.11n HT20, Channel No.: 165




U-NII-3, 802.11n HT40, Channel No.: 151



U-NII-3, 802.11ac VHT20, Channel No.: 149




U-NII-3, 802.11n HT40, Channel No.: 159

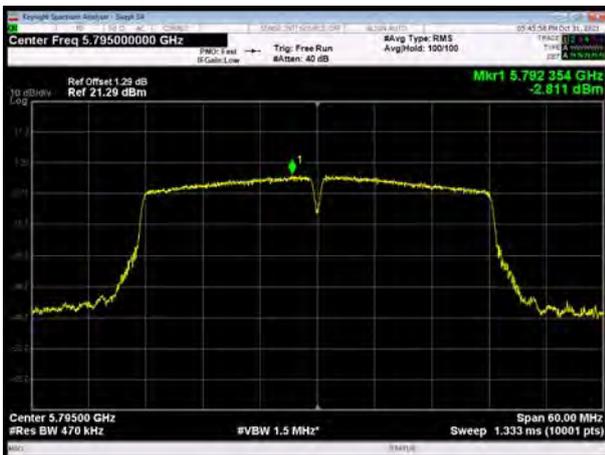

U-NII-3, 802.11ac VHT20, Channel No.: 157




U-NII-3, 802.11ac VHT40, Channel No.: 151

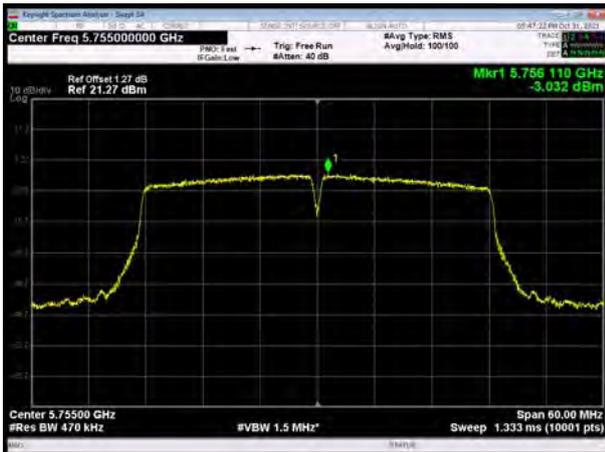

U-NII-3, 802.11ac VHT20, Channel No.: 165



U-NII-3, 802.11ac VHT40, Channel No.: 159

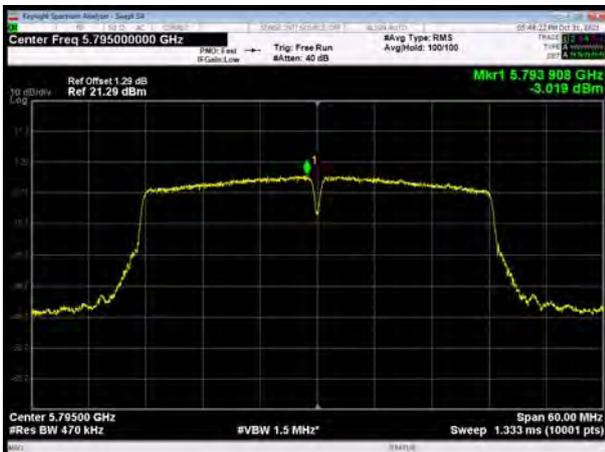

U-NII-3, 802.11ac VHT80, Channel No.: 155



5.5. Unwanted Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific



emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than $[1 / (\text{minimum transmitter on time})]$ and no less than 1 Hz.


The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.

The test is in transmitting mode.


9KHz~~~30MHz

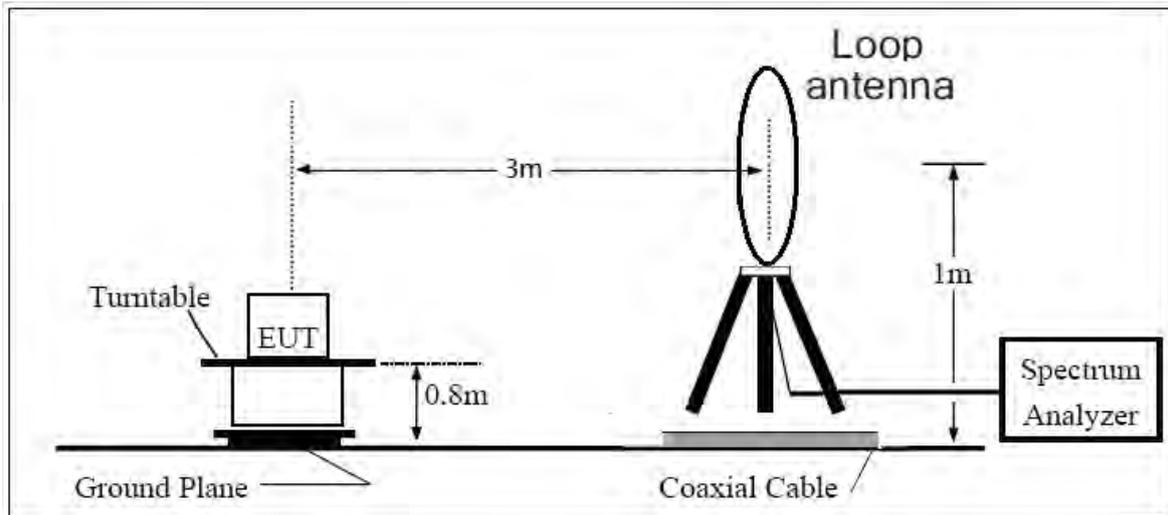

30MHz~~~ 1GHz

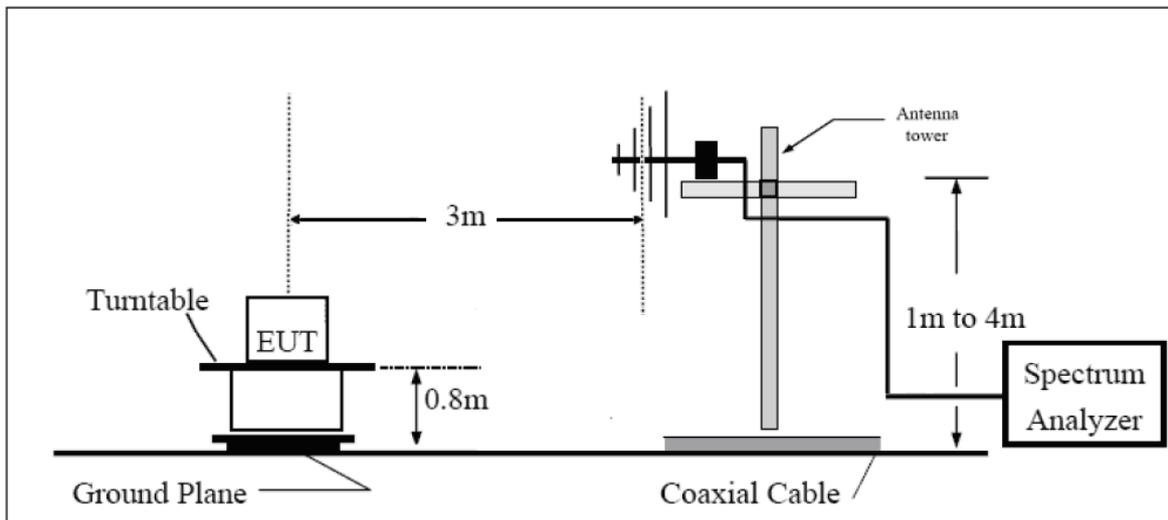

Above 1GHz

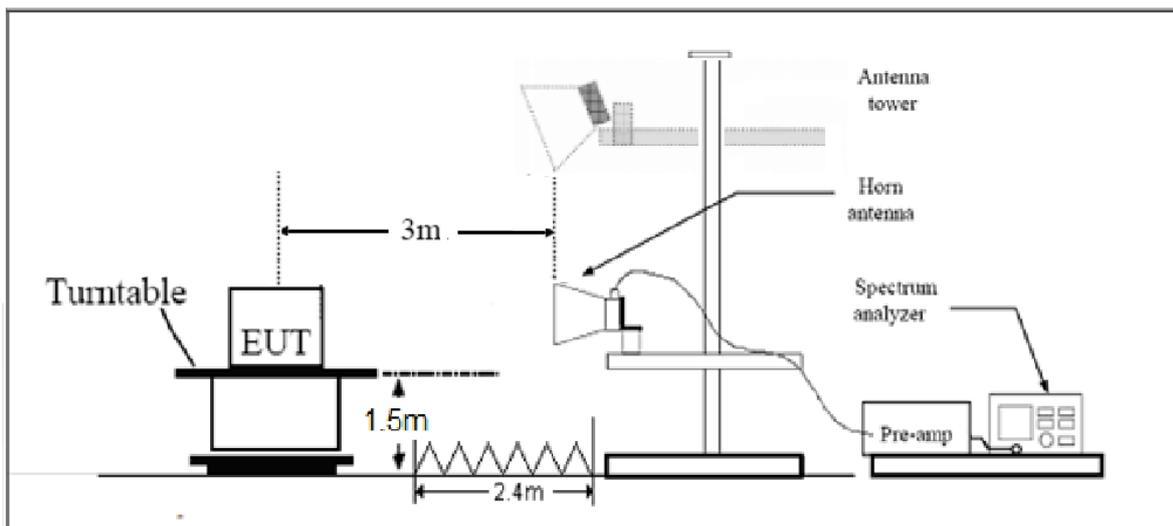

Note: Area side:2.4mX3.6m

Limits

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).

Note: the following formula is used to convert the EIRP to field strength

§1、 $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2、 $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for d = 3 meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54



MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB


Test Results:

The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for V20MHz/V40MHz, therefore investigated worst case to representative mode in test report.


The signal beyond the limit is carrier.

Note: A font (dB μ V) in the test plot =(dB μ V/m)

U-NII-1

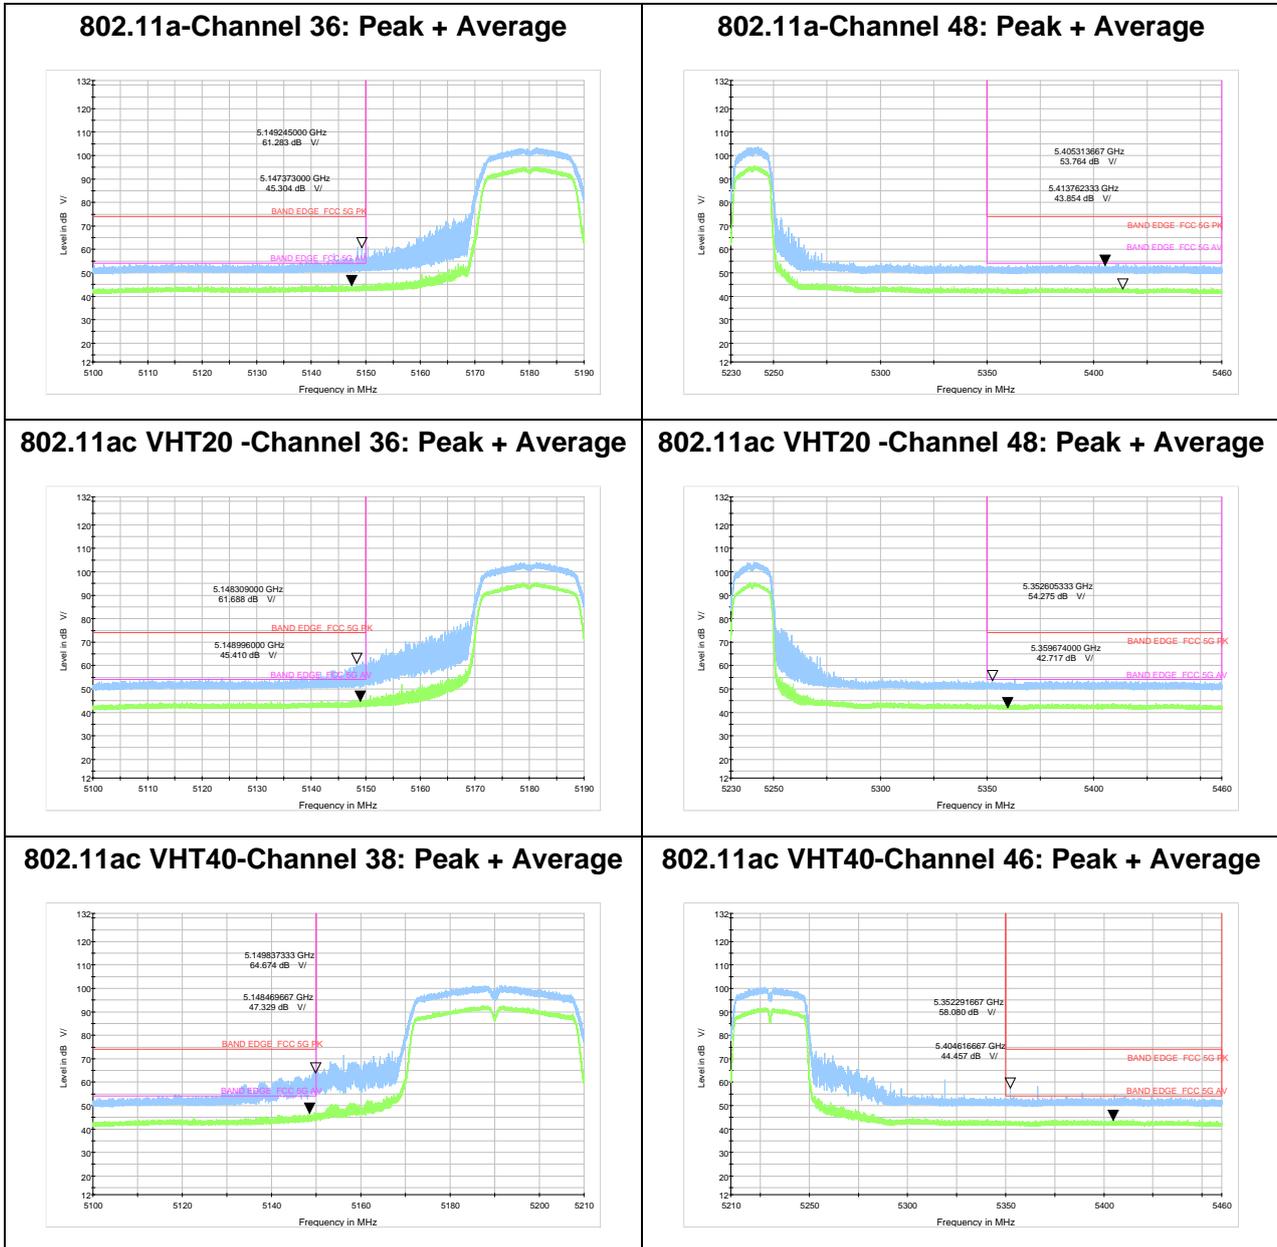


802.11ac VHT80 –Channel 42: Peak + Average

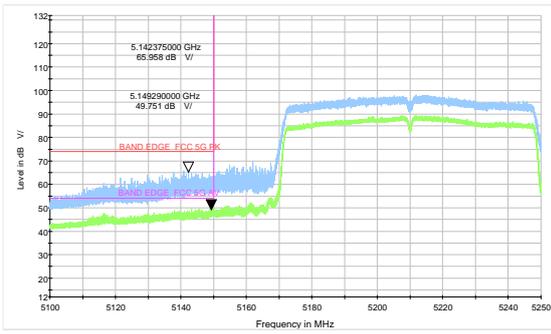




U-NII-2A


802.11a-Channel 52: Peak + Average

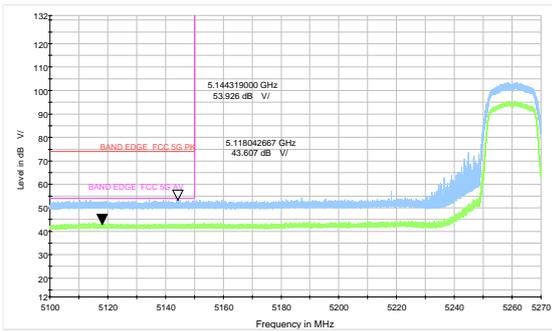


802.11a-Channel 64: Peak + Average

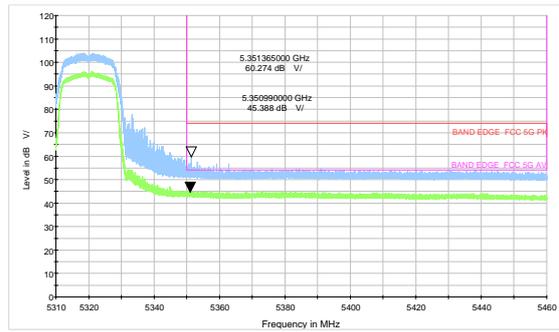


802.11ac VHT20 -Channel 52: Peak + Average

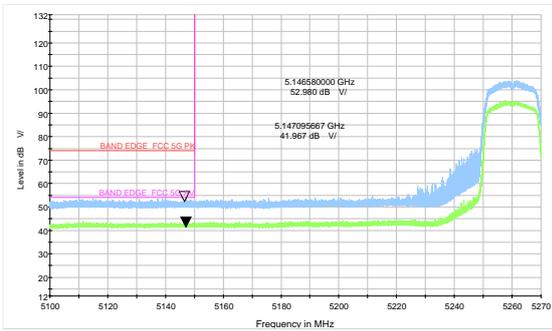


802.11ac VHT20 -Channel 64: Peak + Average

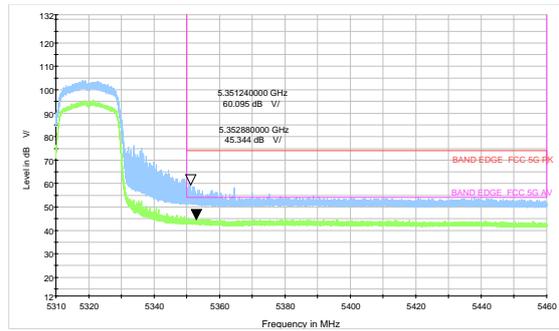


802.11ac VHT40-Channel 54: Peak + Average

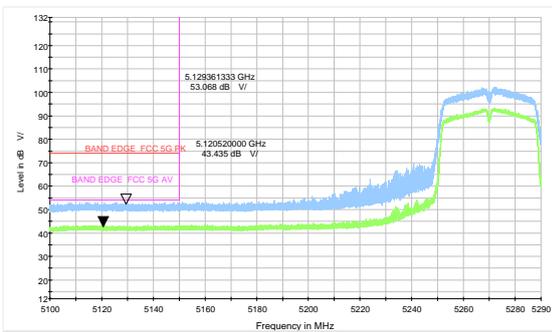

802.11ac VHT40-Channel 62: Peak + Average

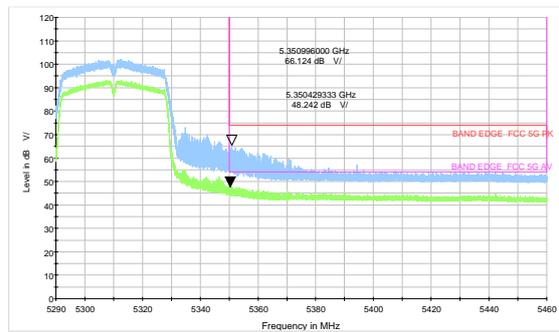


802.11ac VHT80 -Channel 58: Peak + Average

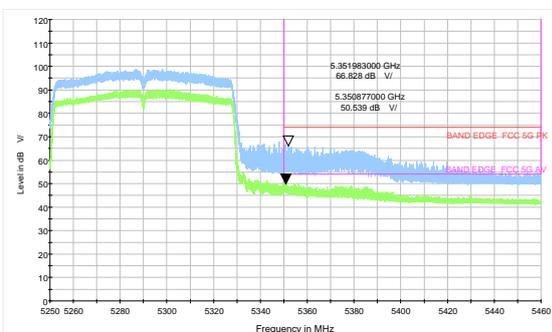




U-NII-2C


802.11a-Channel 100: Peak + Average

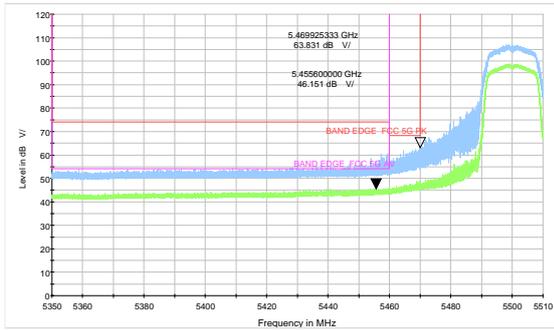


802.11ac VHT20 -Channel 100: Peak + Average

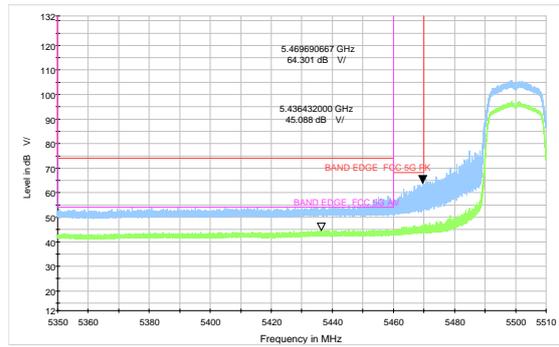


802.11a-Channel 140: Peak

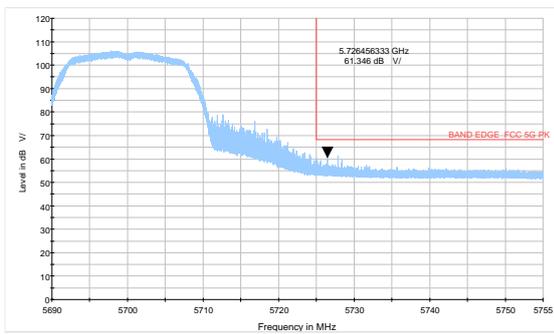


802.11ac VHT20 -Channel 140: Peak

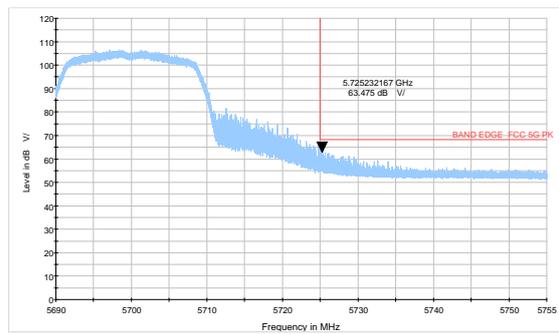


802.11a-Channel 144: Peak

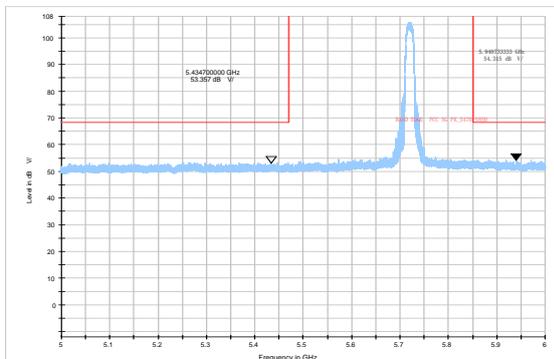


802.11ac VHT20 -Channel 144: Peak

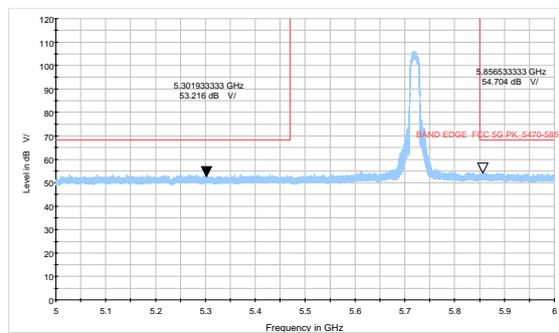

802.11ac VHT40 -Channel 102: Peak + Average

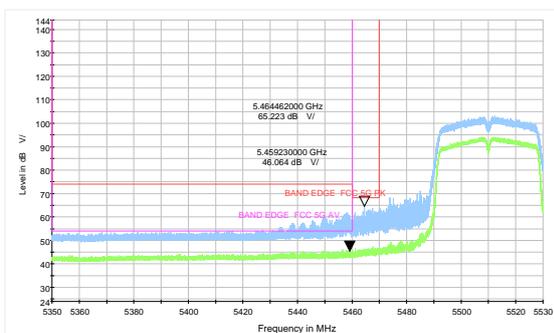


802.11ac VHT40 -Channel 134: Peak

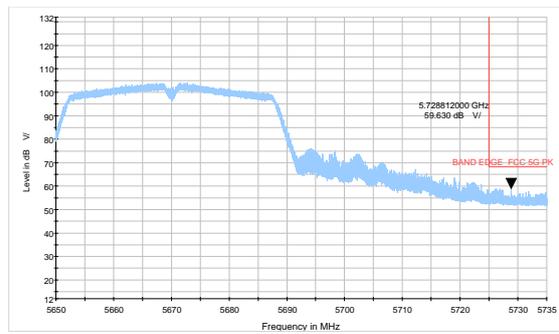





802.11ac VHT20-Channel 106: Peak

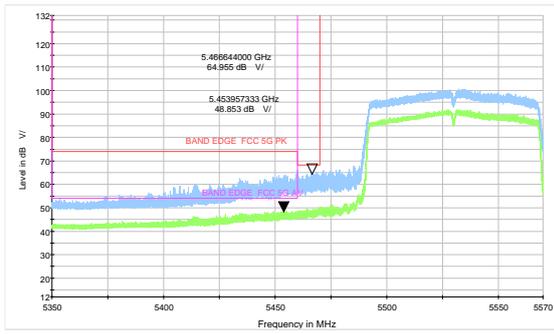

802.11ac VHT20-Channel 122: Peak

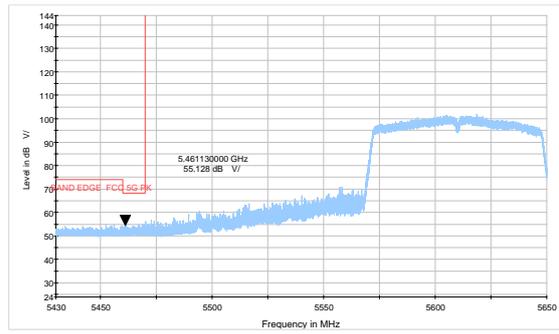


802.11ac VHT20-Channel 138: Peak

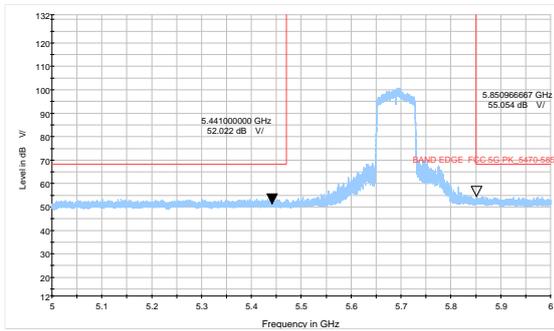




U-NII-3


802.11a-Channel 149: Peak

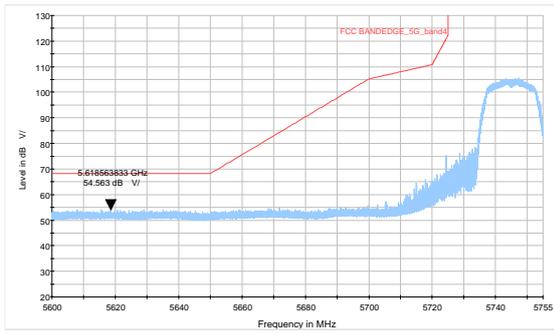


802.11a-Channel 165: Peak

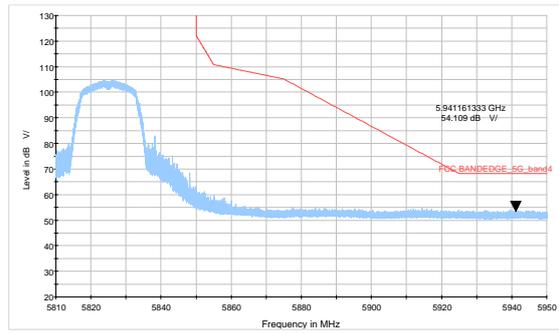


802.11ac VHT20-Channel 149: Peak

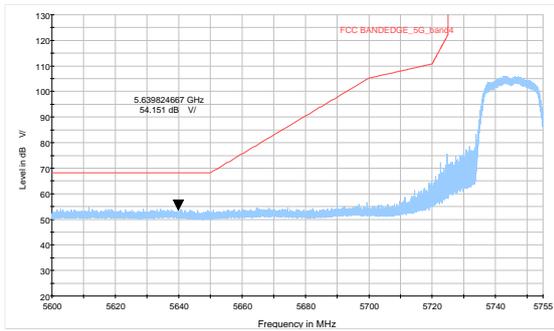


802.11ac VHT20-Channel 165: Peak

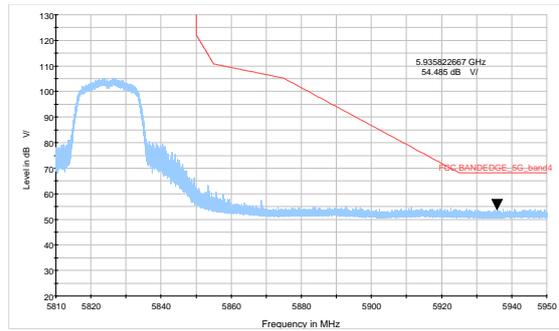


802.11ac VHT40-Channel 151: Peak

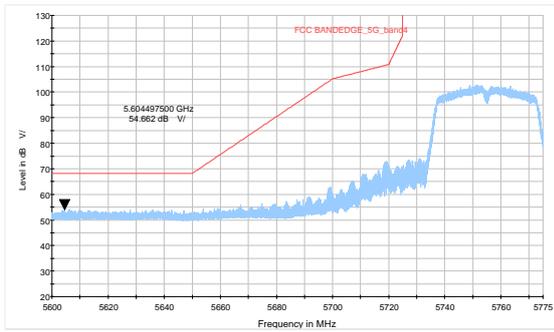

802.11ac VHT40-Channel 159: Peak

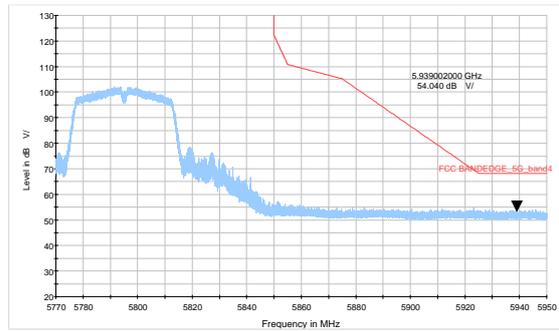

802.11ac VHT80- Channel 155: Peak

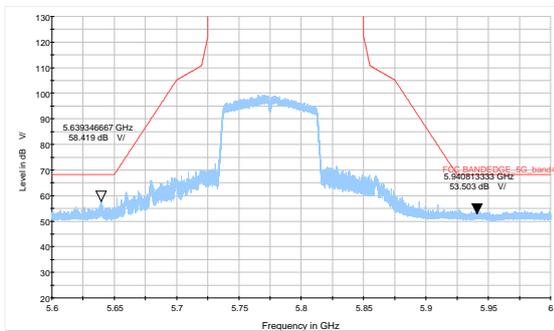

Result of RE

Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 26.5GHz-40GHz are more than 20dB below the limit are not reported.


Note: A font (Level in dB μ V/) in the test plot =(level in dB μ V/m)

A font (dB μ V/) in the test plot =(level in dB μ V/m)

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11a, Channel 116 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


Continuous TX mode:

FCC RE 9K-90KHz AV

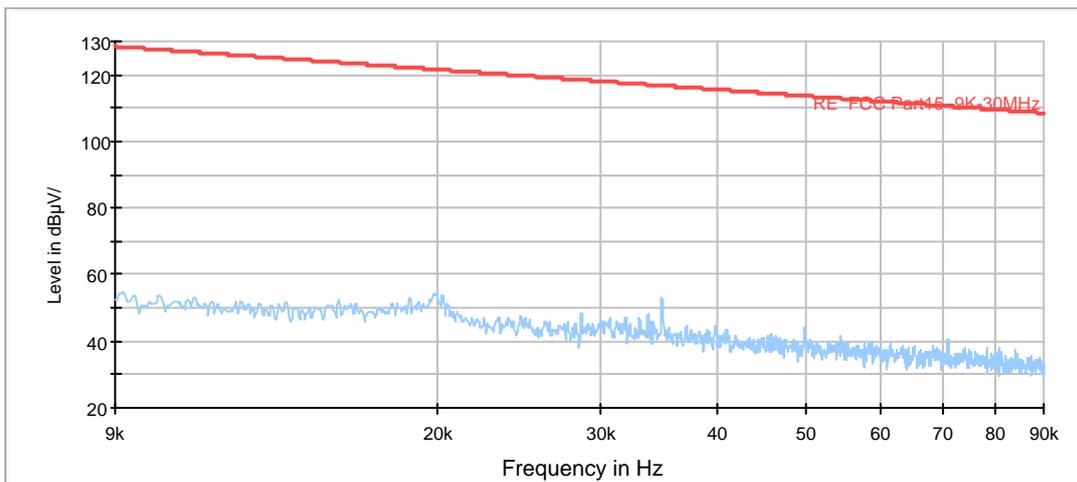

Radiates Emission from 9KHz to 90KHz


FCC RE 90K-110KHz QP

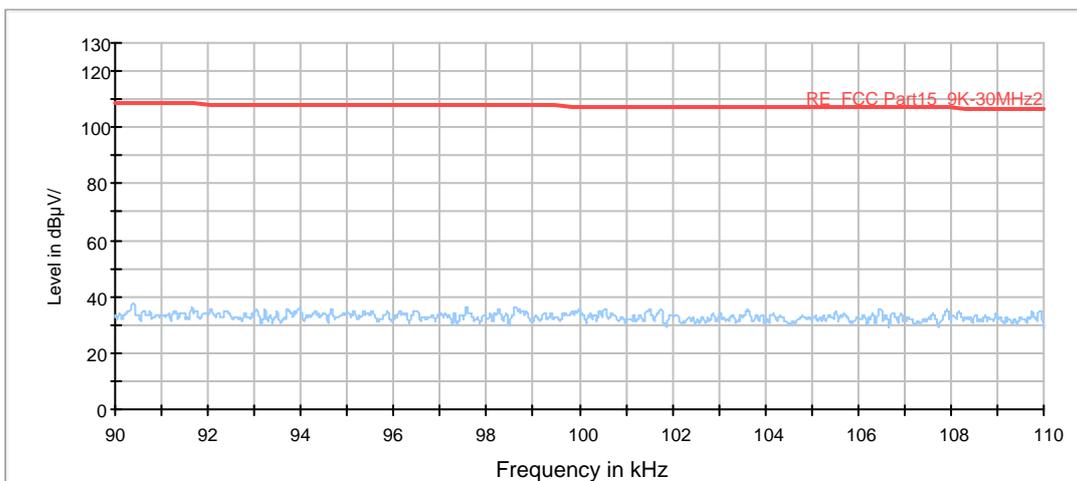

Radiates Emission from 90KHz to 110KHz




FCC RE 110K-490KHz AV

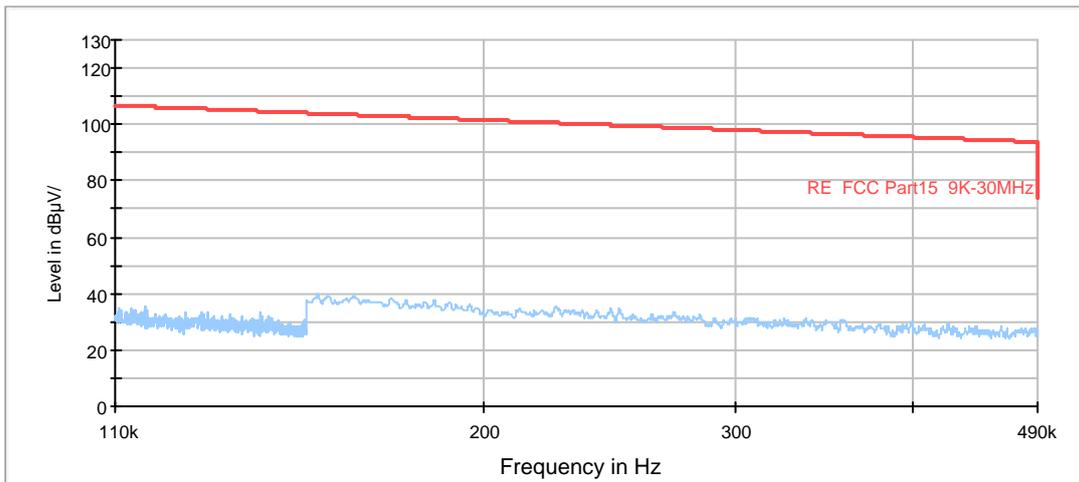


Radiates Emission from 110KHz to 490KHz

FCC RE 490K-30MHz QP

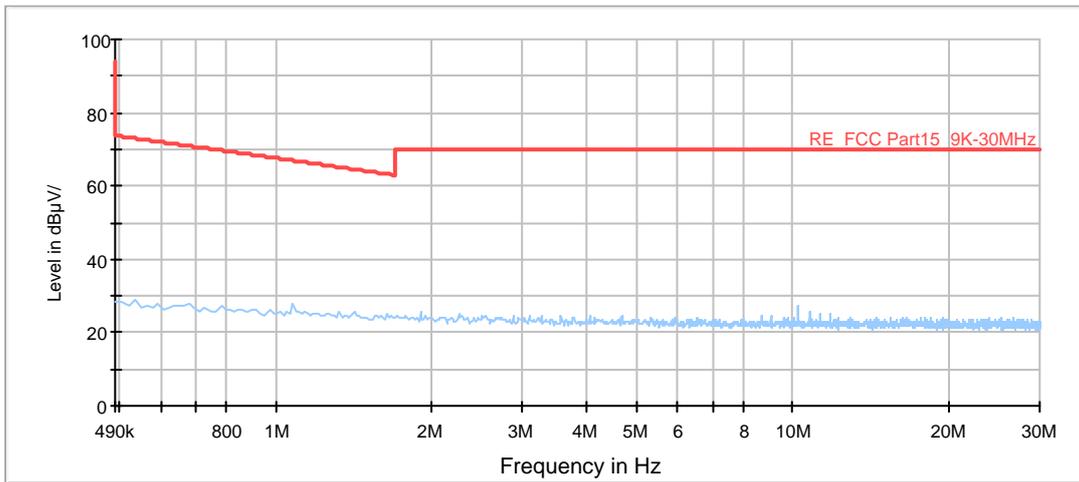

Radiates Emission from 490KHz to 30MHz

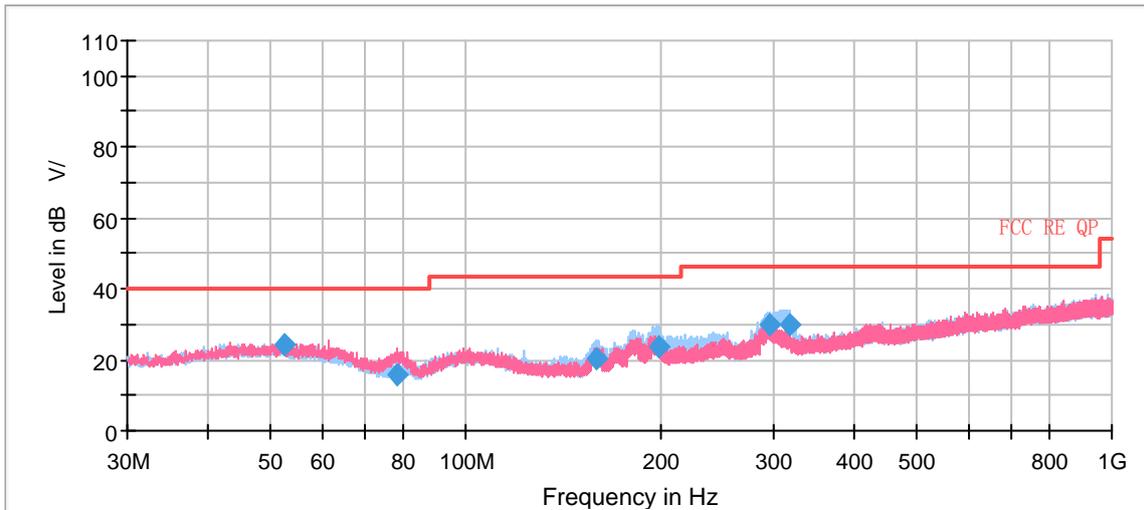


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
52.391667	24.31	100.0	V	285.0	20	15.69	40.00
78.561333	15.86	109.0	V	346.0	14	24.14	40.00
159.629333	20.40	175.0	H	266.0	15	23.10	43.50
198.580000	23.52	225.0	H	270.0	18	19.98	43.50
294.763333	29.93	100.0	H	291.0	20	16.07	46.00
317.490000	29.77	100.0	H	68.0	21	16.23	46.00


Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)
 2. Margin = Limit – Quasi-Peak



802.11a CH36

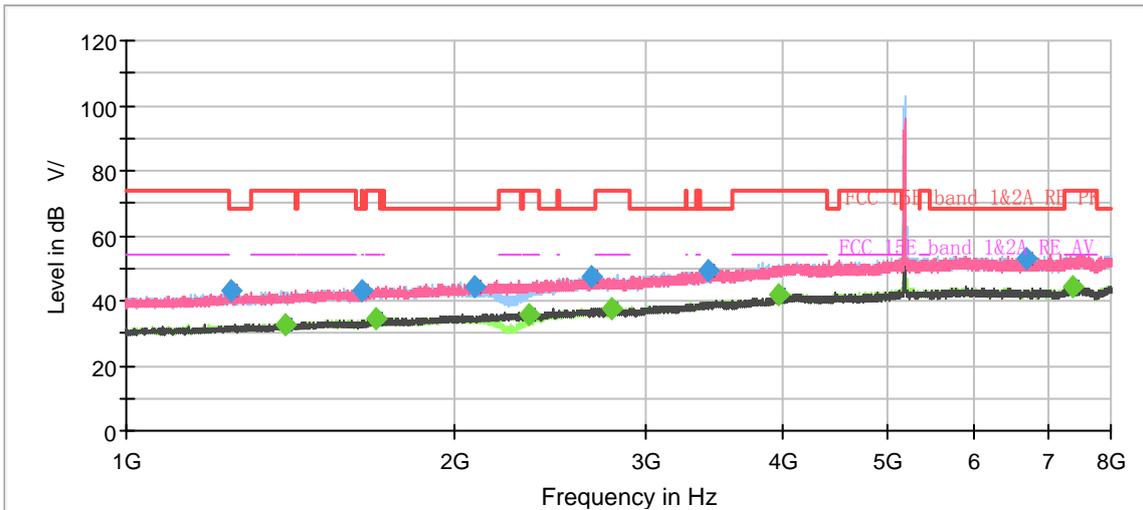

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

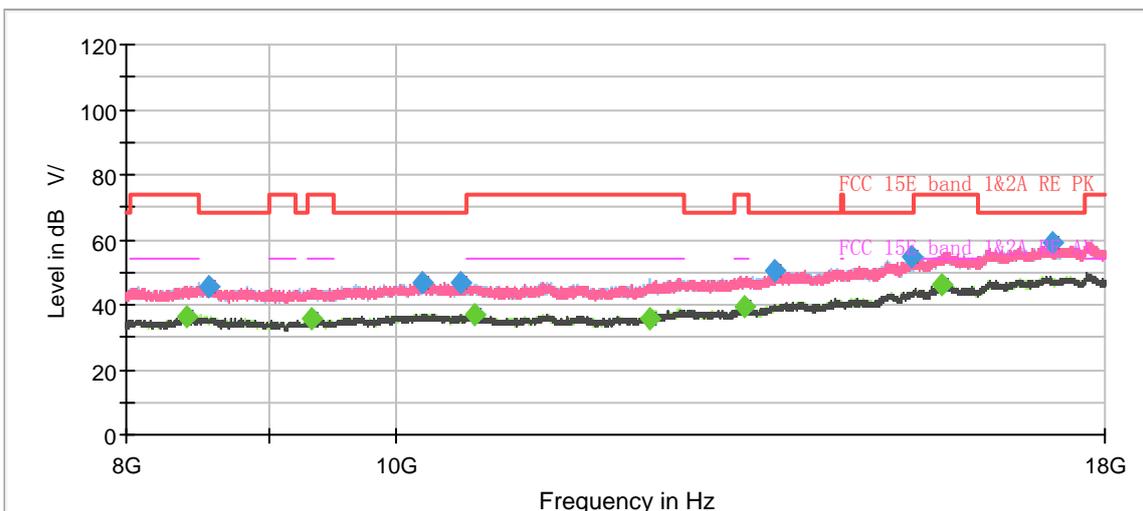


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1248.266667	42.89	---	68.20	25.31	200.0	V	231.0	-7
1400.633333	---	32.92	54.00	21.08	200.0	V	0.0	-6
1642.366667	42.78	---	68.20	25.42	200.0	H	335.0	-5
1692.066667	---	34.32	54.00	19.68	100.0	V	180.0	-5
2086.166667	44.46	---	68.20	23.74	200.0	H	106.0	-3
2344.233333	---	35.84	54.00	18.16	100.0	V	202.0	-1
2676.266667	47.37	---	68.20	20.83	100.0	H	242.0	0
2787.333333	---	37.47	54.00	16.53	200.0	V	187.0	1
3419.433333	49.22	---	68.20	18.98	100.0	V	77.0	4
3959.366667	---	41.54	54.00	12.46	100.0	V	272.0	6
6699.400000	52.78	---	68.20	15.42	100.0	H	46.0	10
7383.066667	---	44.49	54.00	9.51	200.0	V	22.0	11


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH40

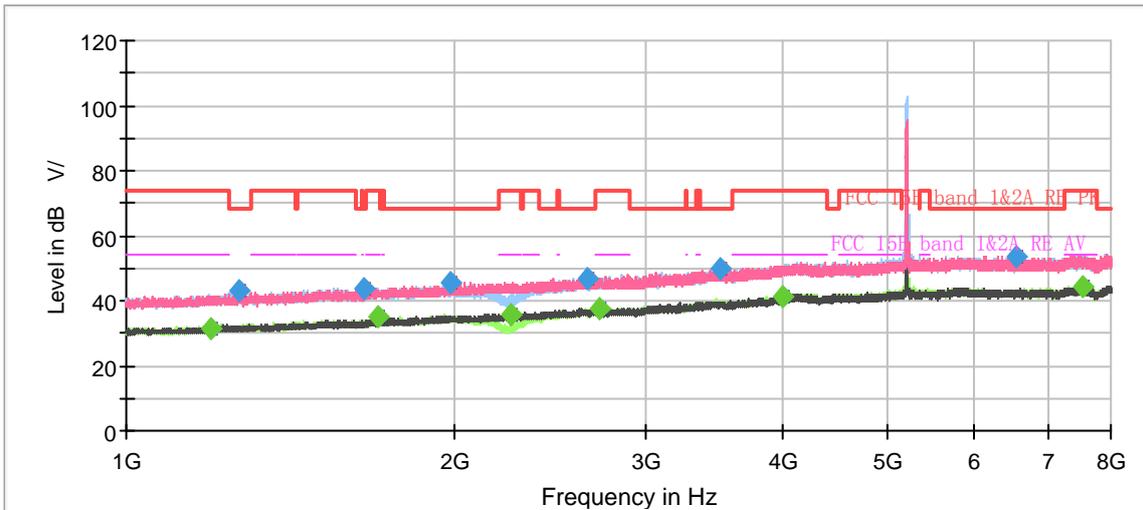

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

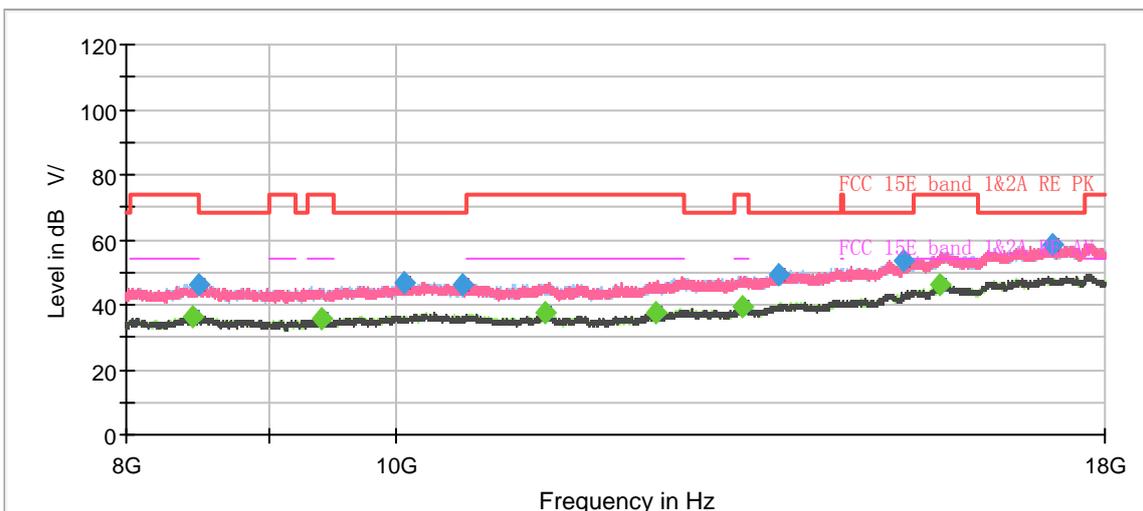


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1194.366667	---	31.54	54.00	22.46	200.0	H	97.0	-8
1271.133333	43.13	---	68.20	25.07	100.0	H	317.0	-7
1651.000000	43.63	---	68.20	24.57	100.0	H	283.0	-5
1703.733333	---	34.80	54.00	19.20	200.0	H	323.0	-5
1986.533333	45.34	---	68.20	22.86	100.0	V	61.0	-3
2257.200000	---	35.64	54.00	18.36	200.0	V	0.0	-2
2650.600000	46.92	---	68.20	21.28	100.0	H	328.0	0
2713.833333	---	37.48	54.00	16.52	200.0	V	112.0	1
3504.133333	49.67	---	68.20	18.53	100.0	H	110.0	4
3997.400000	---	41.39	54.00	12.61	200.0	V	353.0	6
6548.666667	53.36	---	68.20	14.84	100.0	H	156.0	10
7525.866667	---	44.58	54.00	9.42	100.0	V	249.0	11


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH48

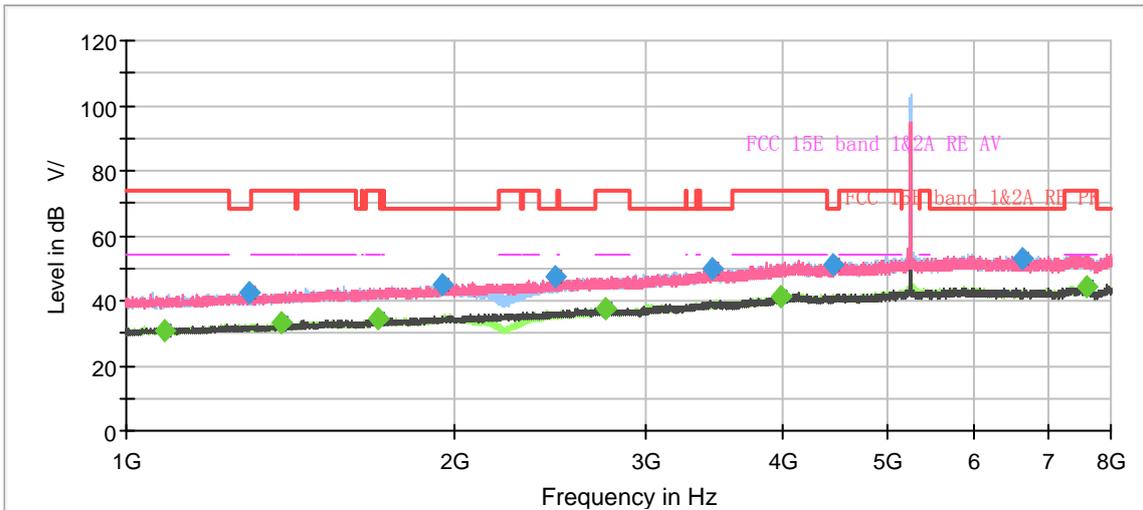

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

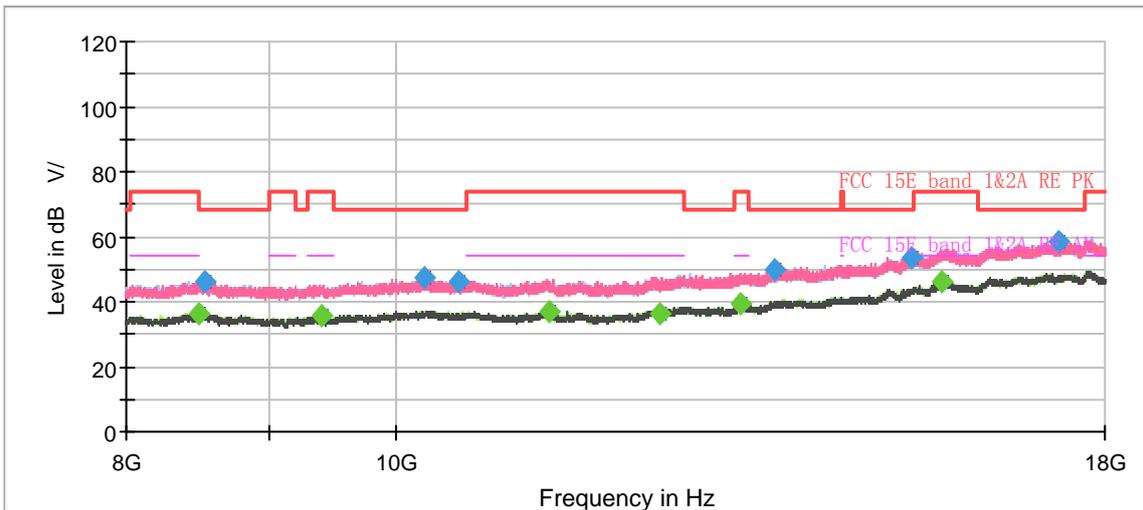


Radiates Emission from 8GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1082.833333	---	31.01	54.00	22.99	100.0	H	321.0	-8
1295.866667	42.22	---	68.20	25.98	200.0	H	110.0	-7
1385.700000	---	33.15	54.00	20.85	200.0	V	110.0	-6
1700.933333	---	34.52	54.00	19.48	100.0	V	313.0	-5
1953.400000	44.74	---	68.20	23.46	200.0	V	167.0	-3
2474.900000	47.09	---	68.20	21.11	100.0	V	21.0	-1
2750.466667	---	37.36	54.00	16.64	100.0	H	0.0	1
3449.066667	49.77	---	68.20	18.43	200.0	V	317.0	4
3988.300000	---	41.37	54.00	12.63	200.0	V	0.0	6
4451.000000	51.29	---	68.20	16.91	200.0	V	0.0	7
6641.533333	52.80	---	68.20	15.40	200.0	V	45.0	10
7601.700000	---	44.28	54.00	9.72	200.0	V	190.0	11

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH52

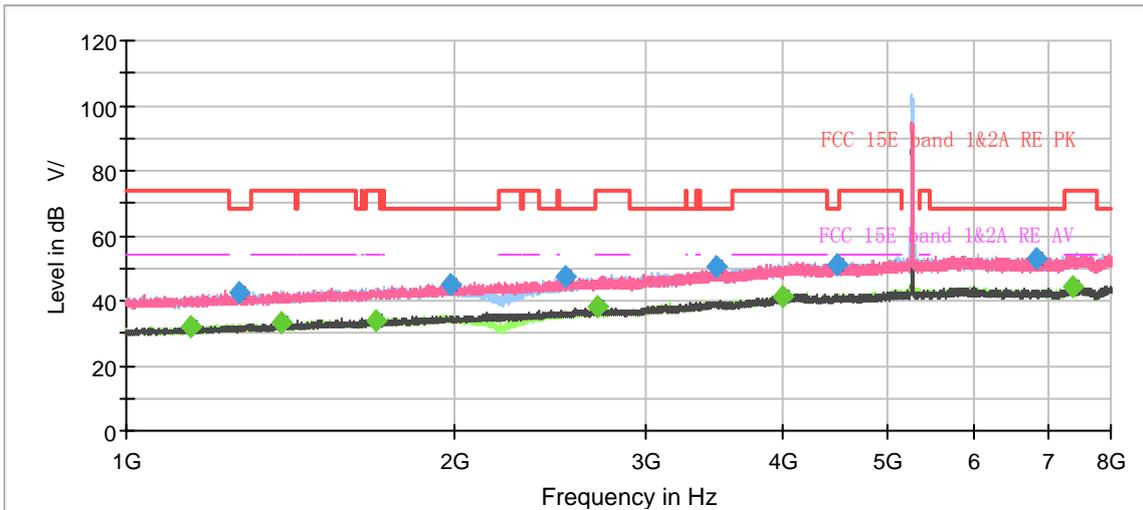

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

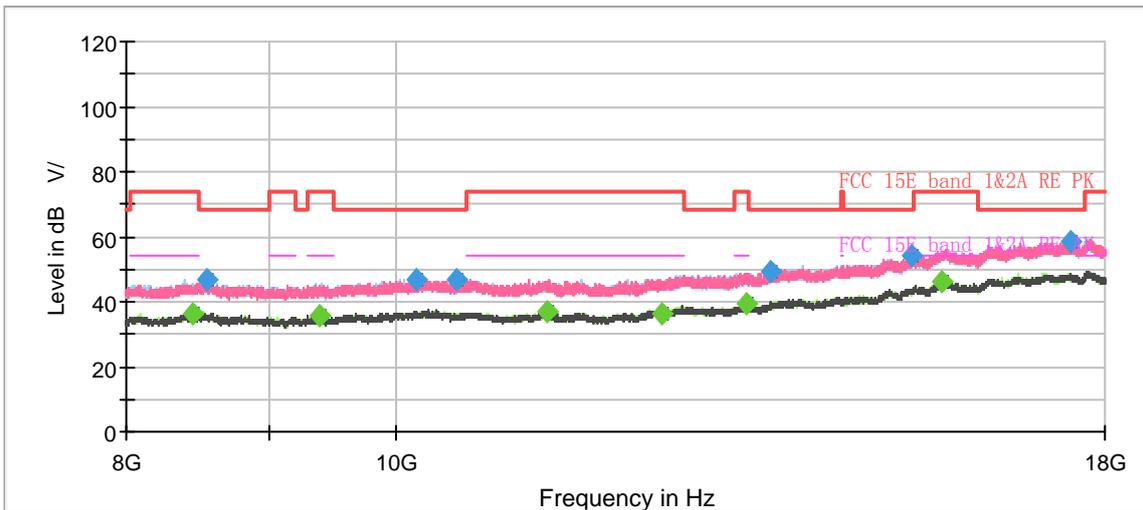


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1147.466667	---	31.88	54.00	22.12	200.0	V	0.0	-8
1268.800000	42.26	---	68.20	25.94	200.0	H	38.0	-7
1385.233333	---	33.25	54.00	20.75	100.0	V	0.0	-6
1694.166667	---	33.96	54.00	20.04	200.0	H	0.0	-5
1985.833333	45.17	---	68.20	23.03	200.0	H	49.0	-3
2526.233333	47.09	---	68.20	21.11	200.0	H	322.0	0
2710.333333	---	38.09	54.00	15.91	100.0	H	215.0	1
3476.833333	50.28	---	68.20	17.92	100.0	V	75.0	4
3999.733333	---	41.51	54.00	12.49	100.0	H	331.0	6
4489.966667	50.93	---	68.20	17.27	100.0	H	134.0	7
6844.533333	52.94	---	68.20	15.26	100.0	V	0.0	10
7373.266667	---	44.33	54.00	9.67	100.0	V	224.0	11


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH60

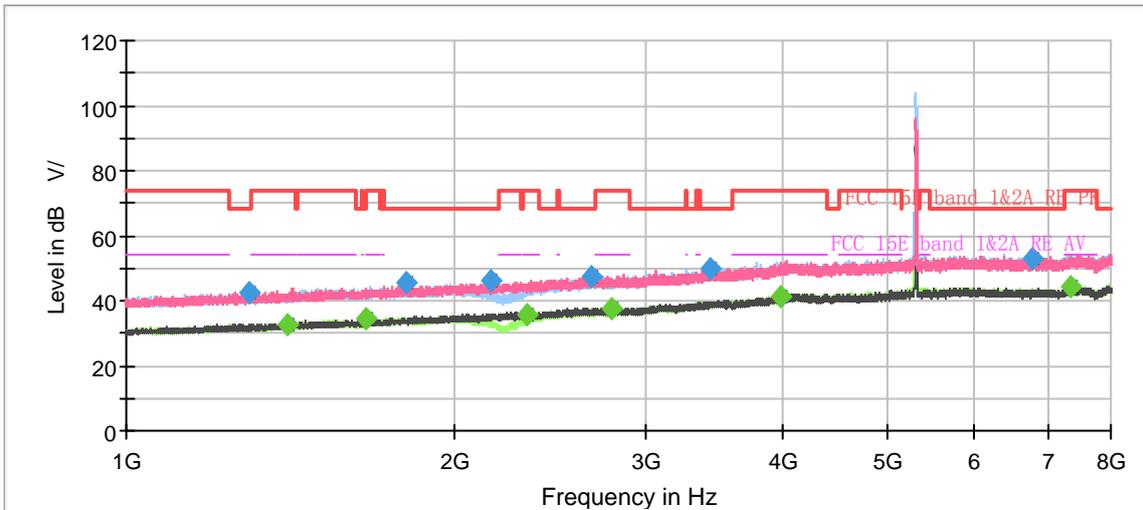

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

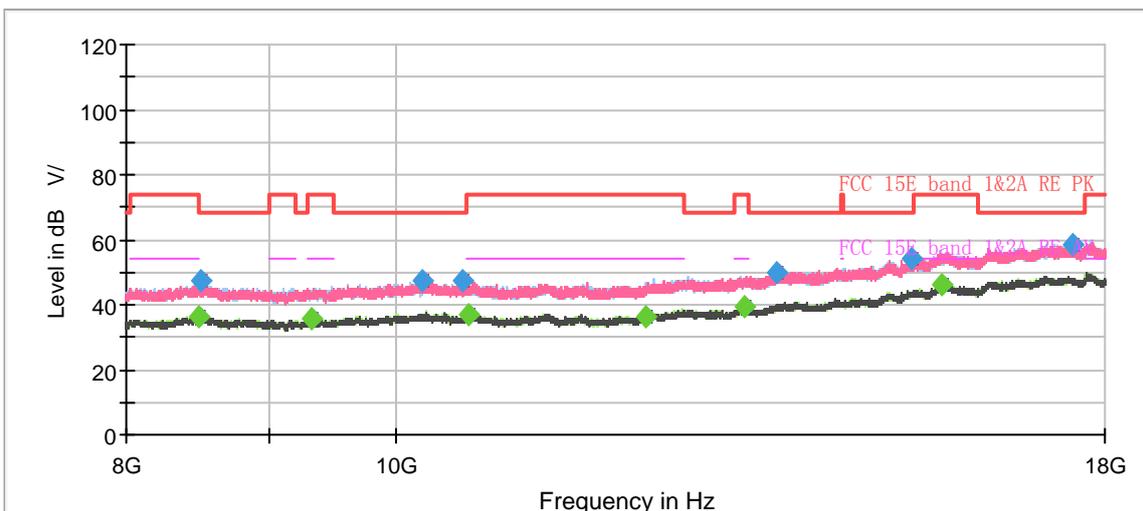

Radiates Emission from 8GHz to 18GHz