





<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

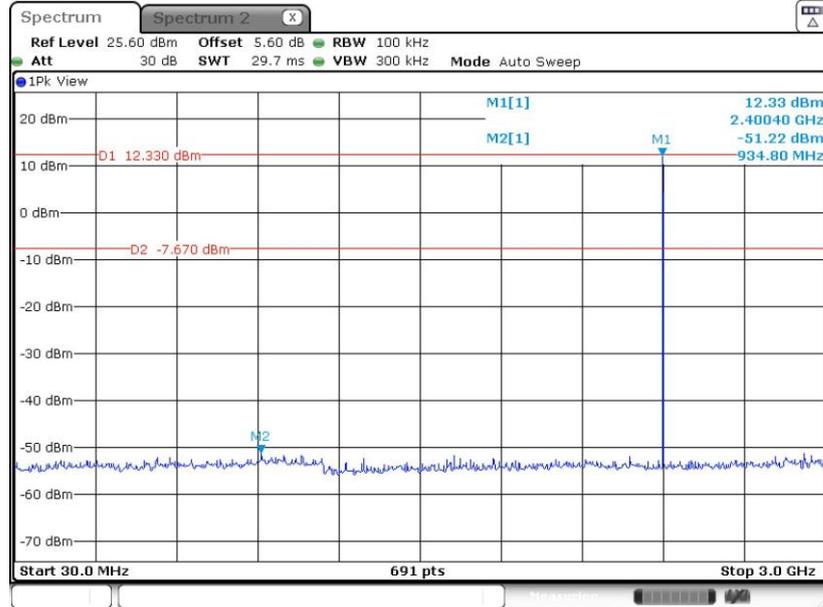

Date: 16.DEC.2021 01:28:04


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

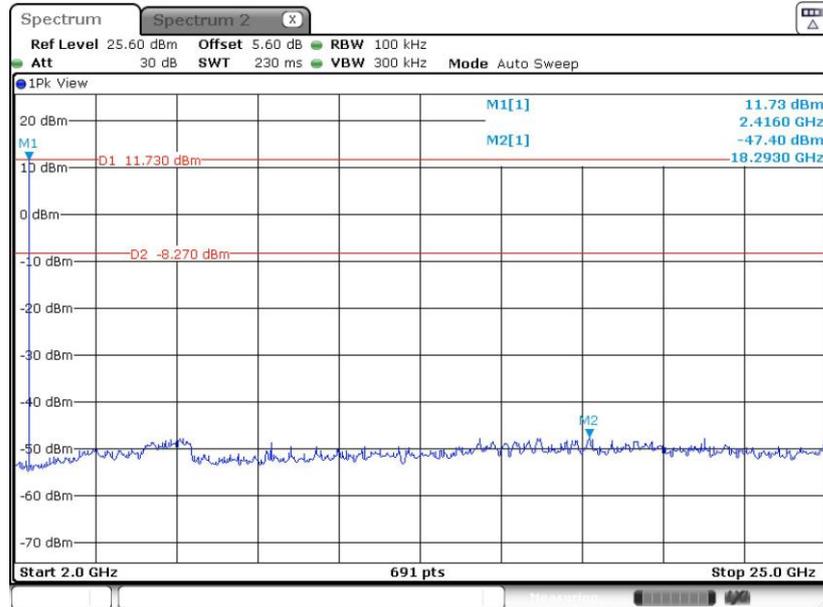

Date: 16.DEC.2021 01:28:33




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

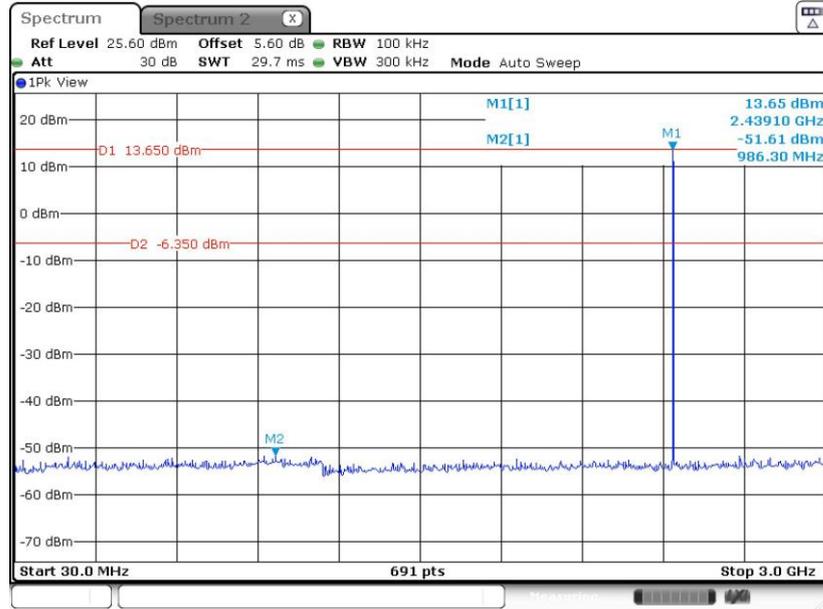

Date: 16,DEC,2021 01:22:17


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

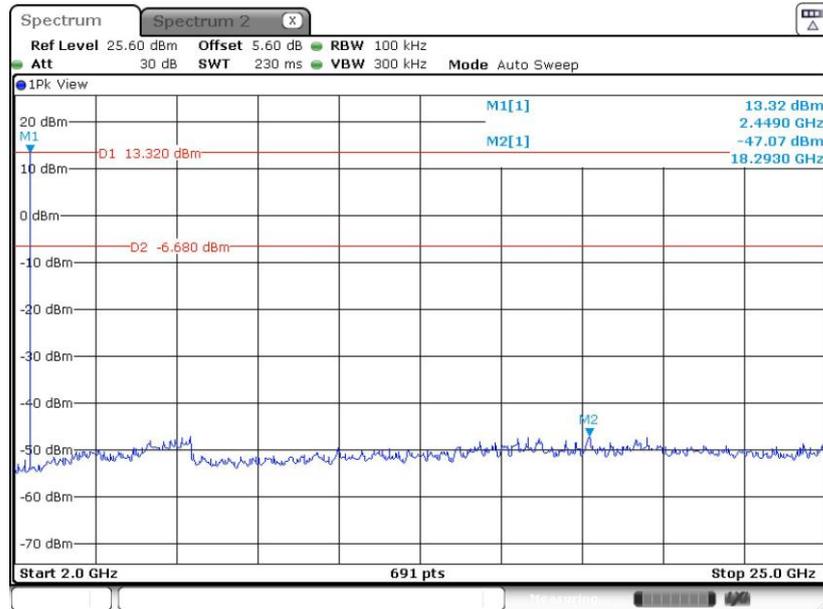

Date: 16,DEC,2021 01:22:47




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

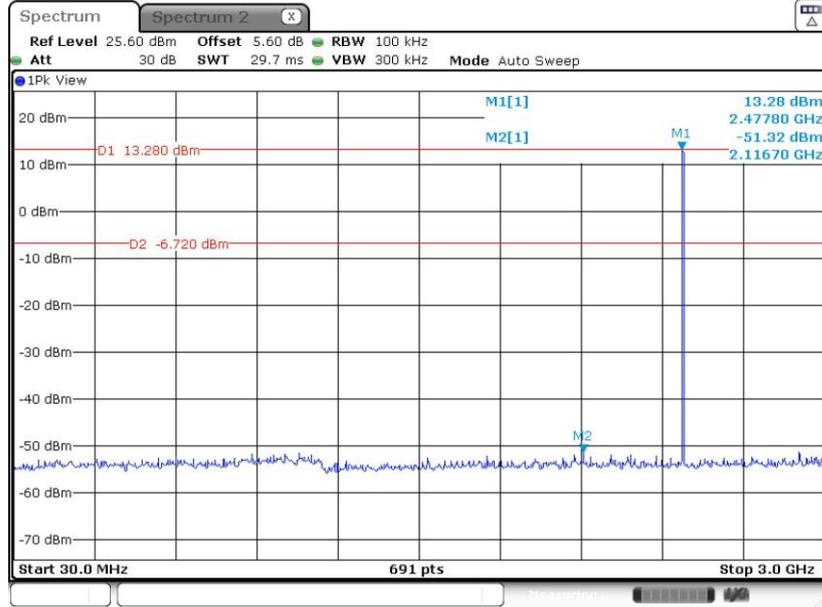

Date: 16,DEC,2021 01:15:34

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

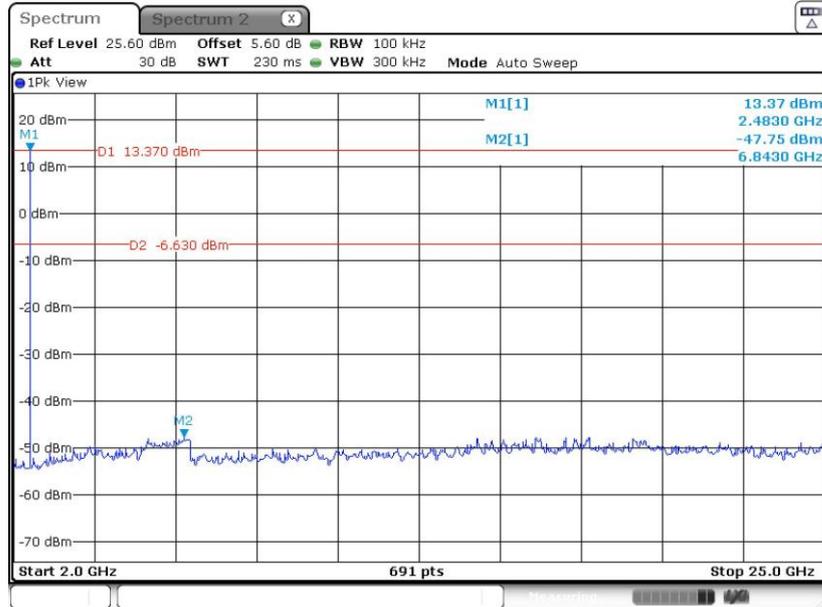


Date: 16,DEC,2021 01:16:02




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

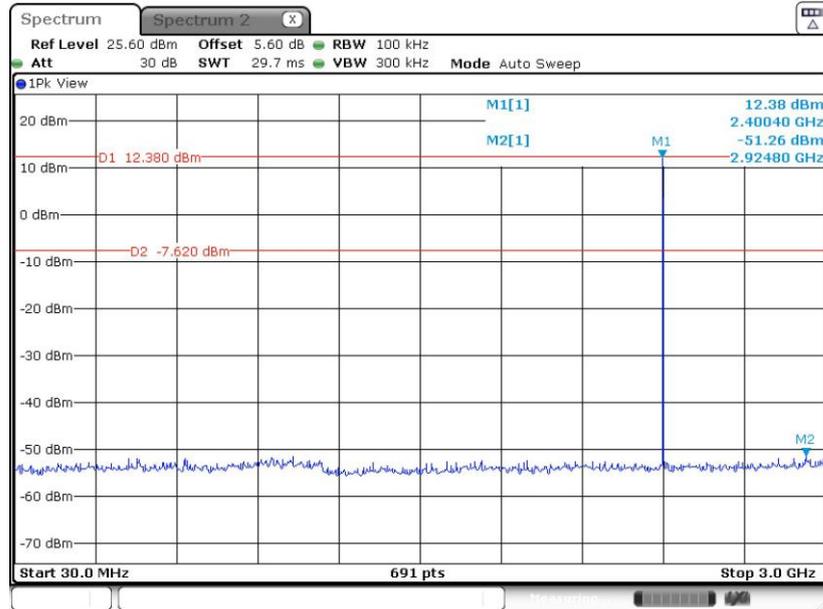

Date: 16.DEC.2021 01:57:51


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

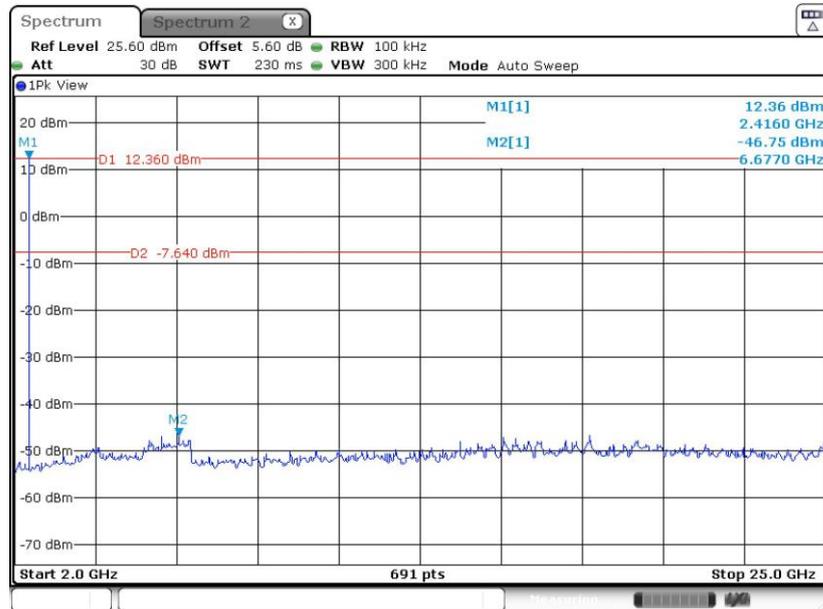

Date: 16.DEC.2021 01:58:20




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

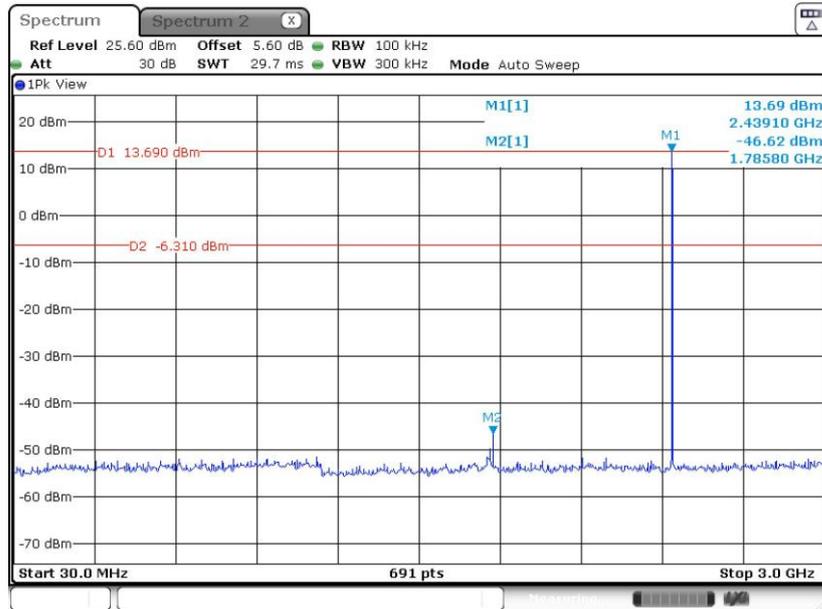

Date: 16,DEC,2021 02:00:50


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

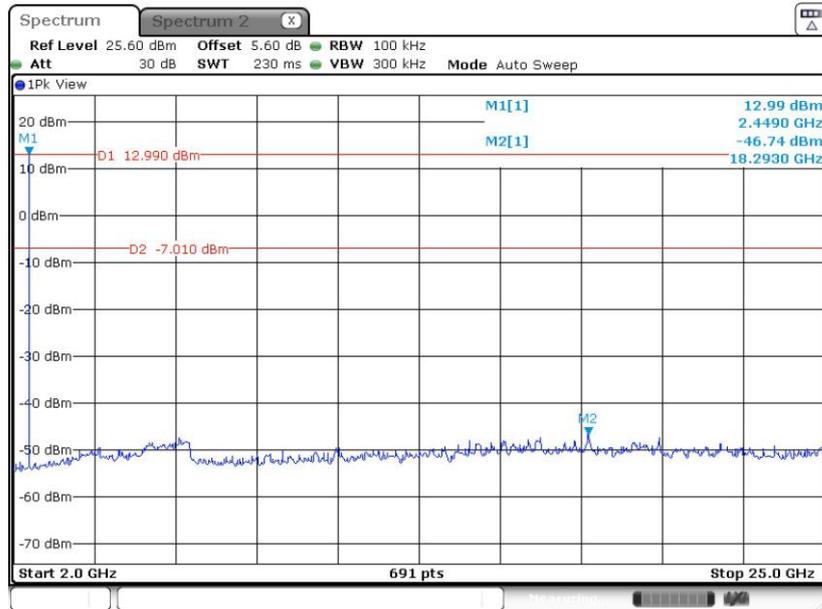

Date: 16,DEC,2021 02:01:19




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

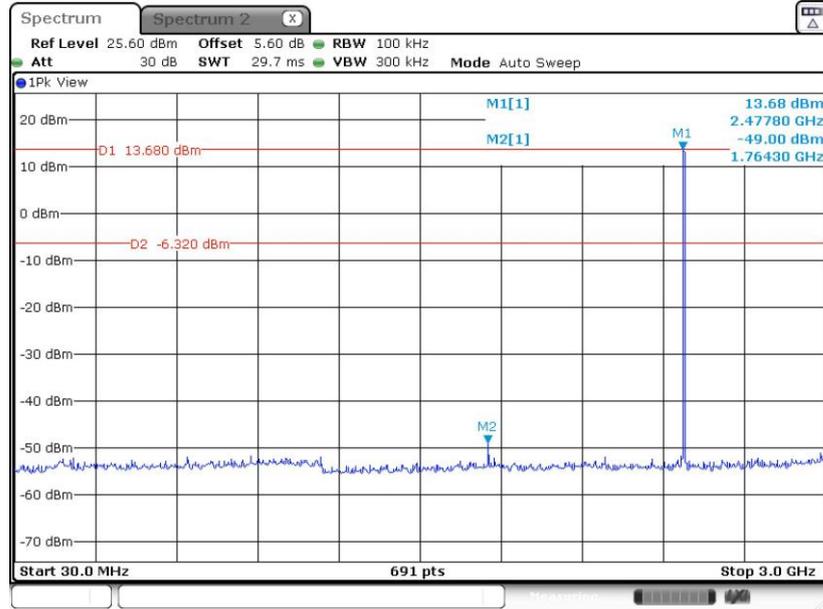

Date: 16,DEC,2021 02:08:55

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

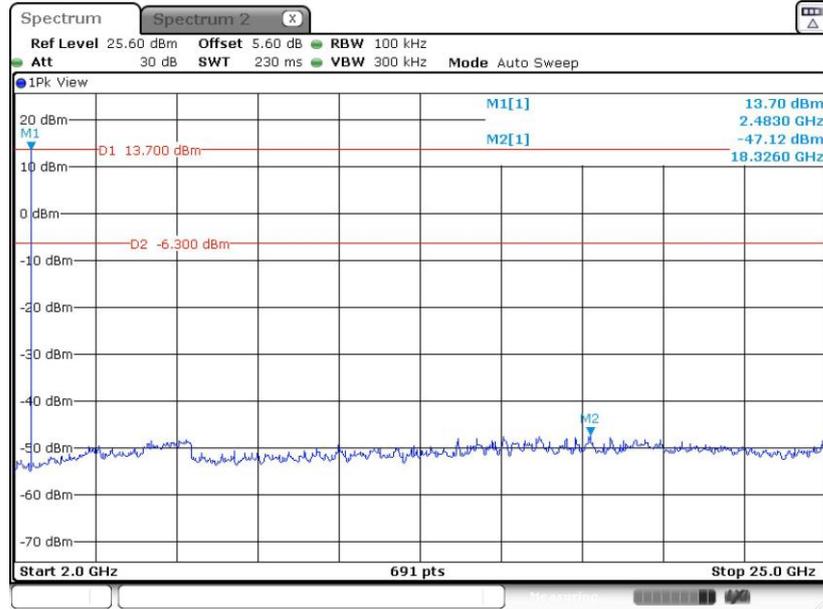


Date: 16,DEC,2021 02:09:46



<Ant 2>:


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

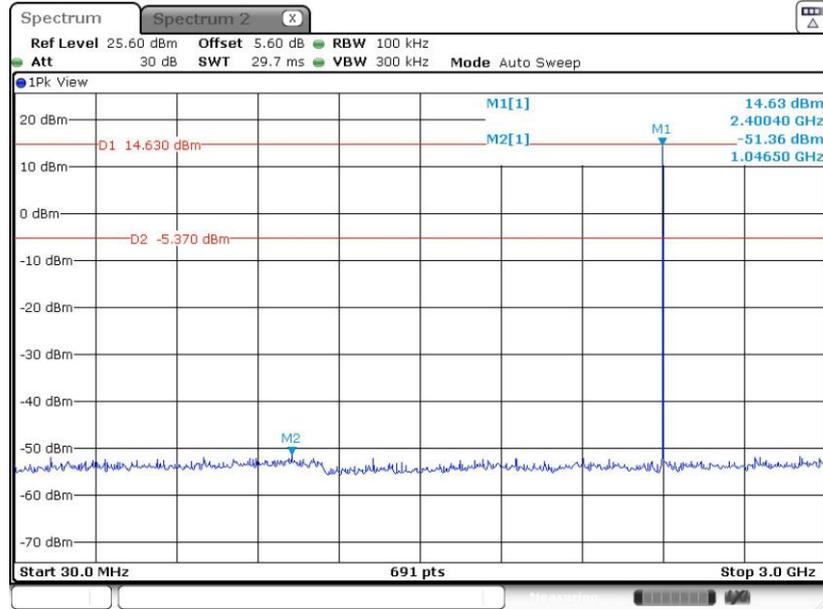

Date: 16,DEC,2021 08:13:29


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

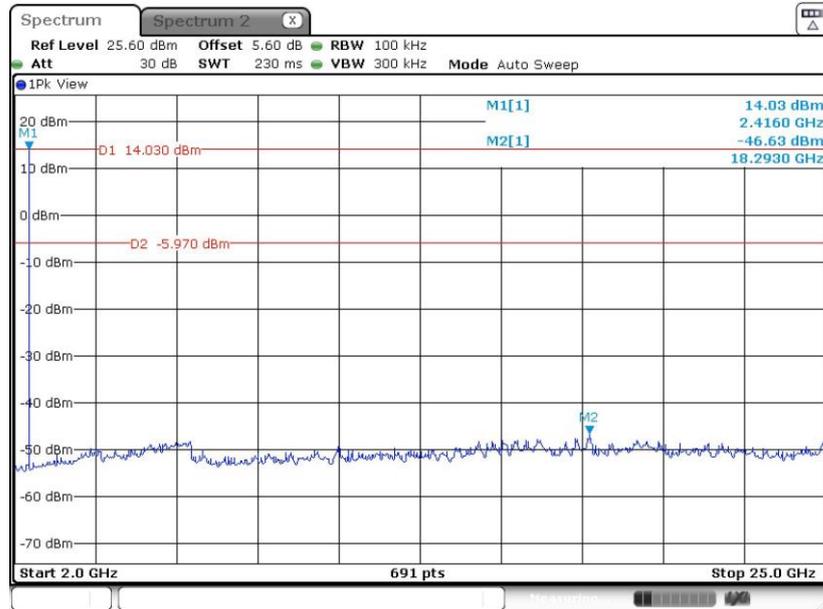

Date: 16,DEC,2021 08:14:00




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

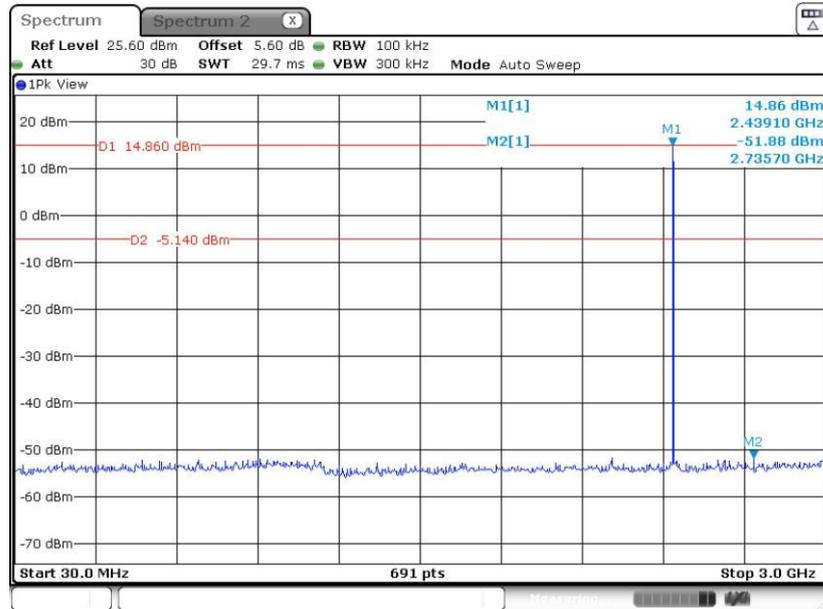

Date: 16,DEC,2021 08:19:38


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

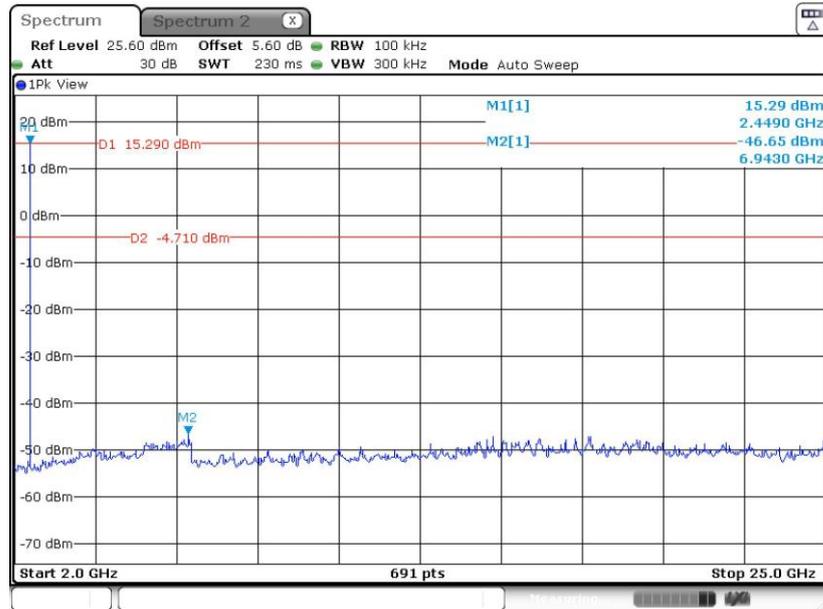

Date: 16,DEC,2021 08:20:15




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

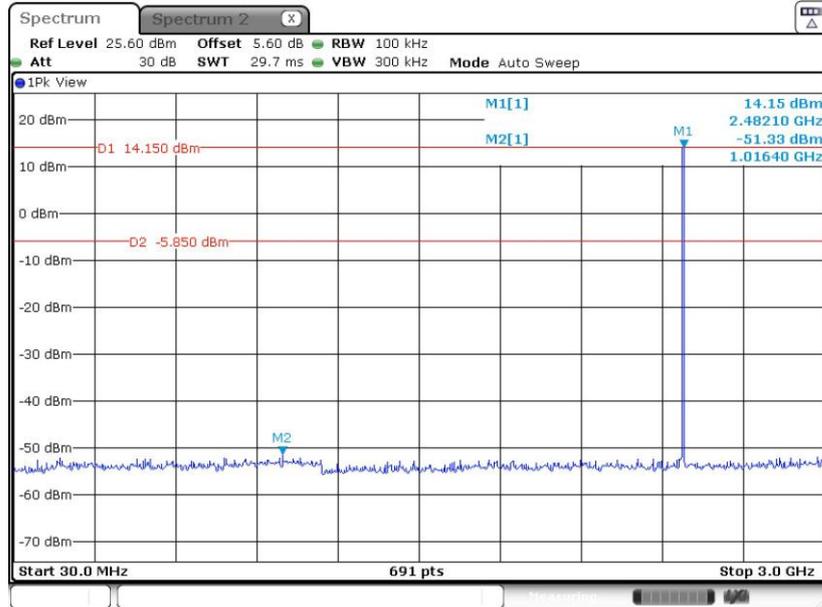

Date: 16, DEC. 2021 08:32:25

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

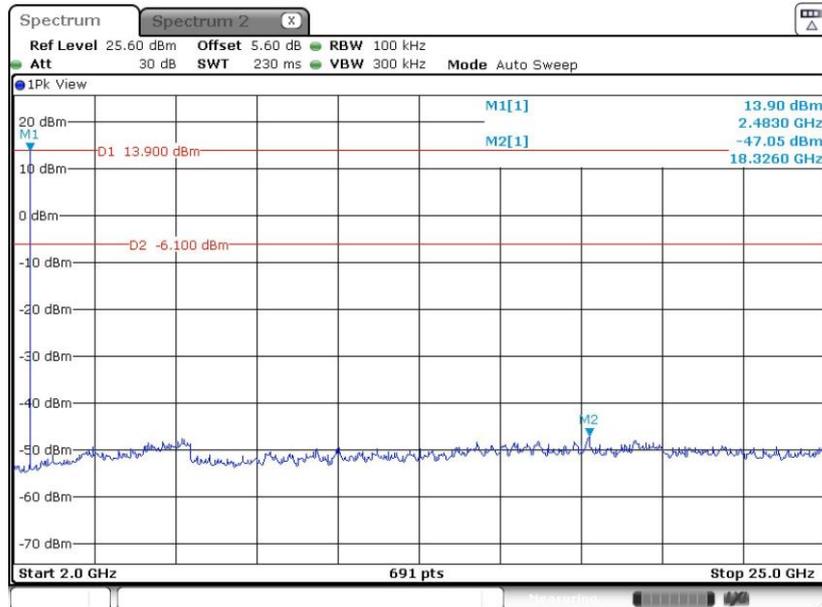


Date: 16, DEC. 2021 08:32:55




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

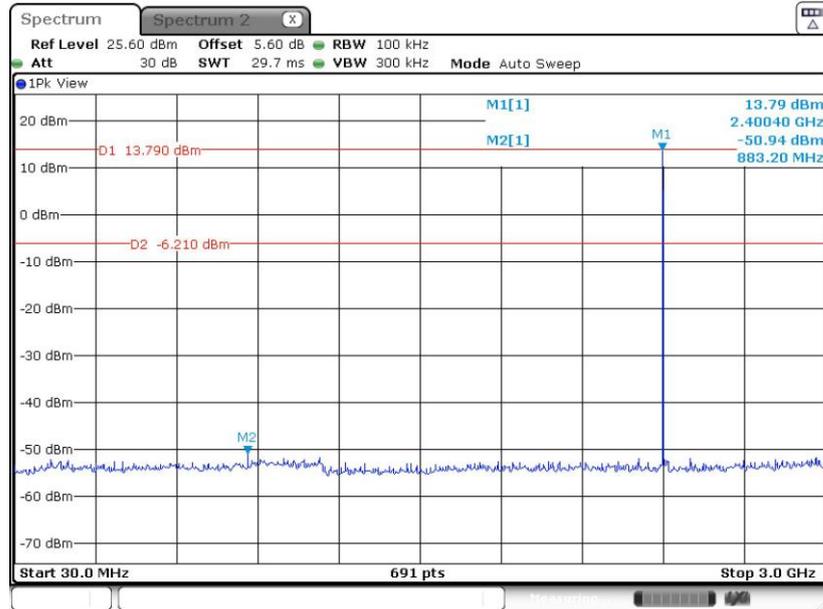

Date: 16.DEC.2021 08:43:51


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

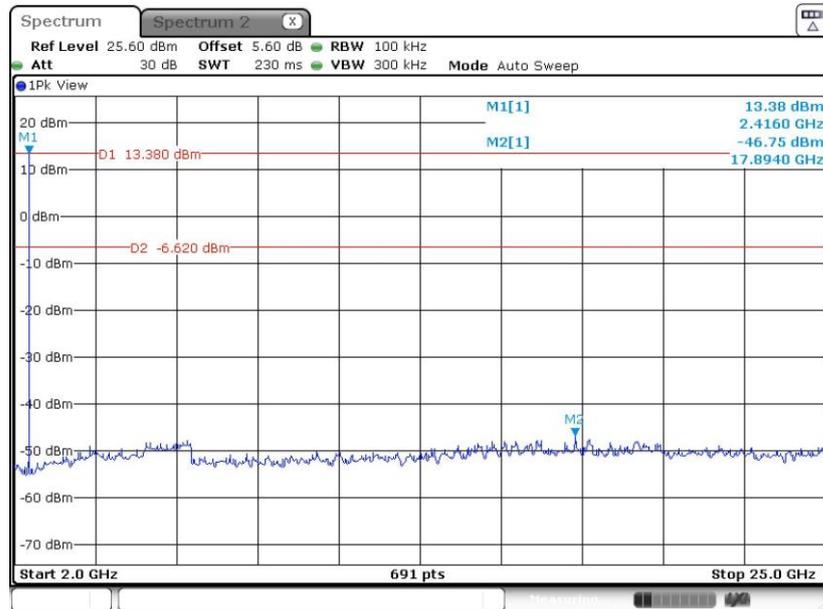

Date: 16.DEC.2021 08:44:21




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

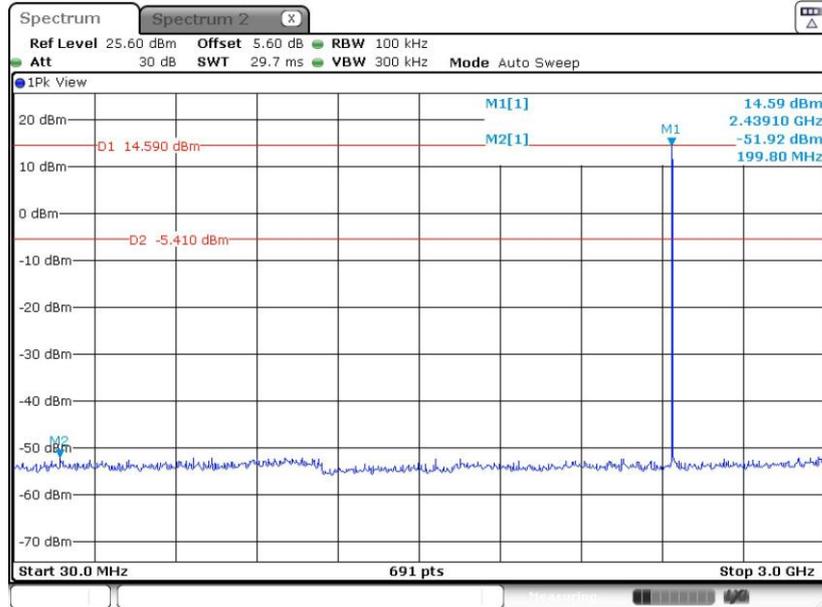

Date: 16,DEC,2021 08:56:15


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

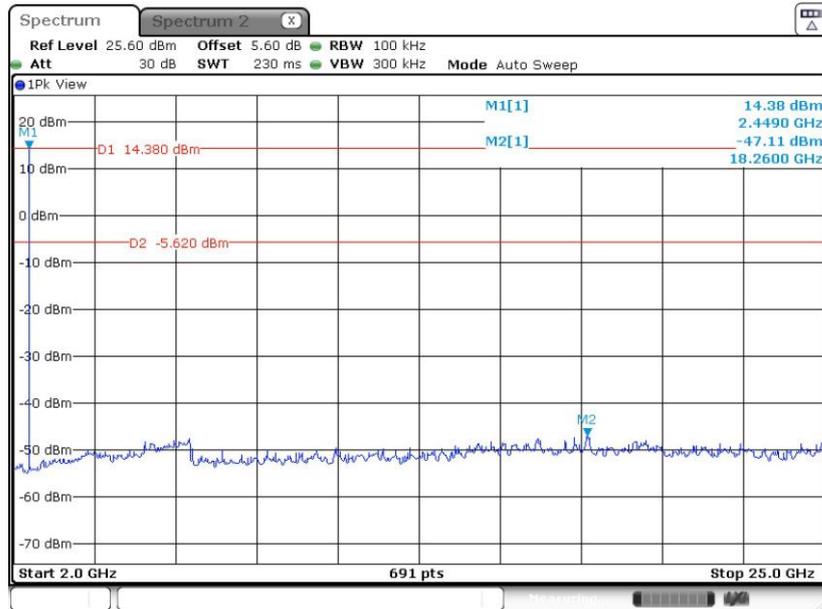

Date: 16,DEC,2021 08:56:44




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

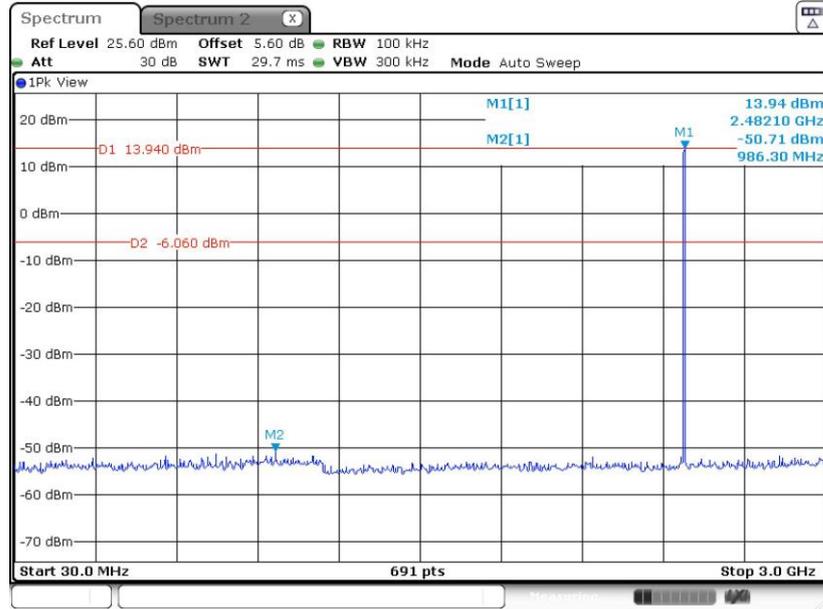

Date: 16, DEC. 2021 09:01:48

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

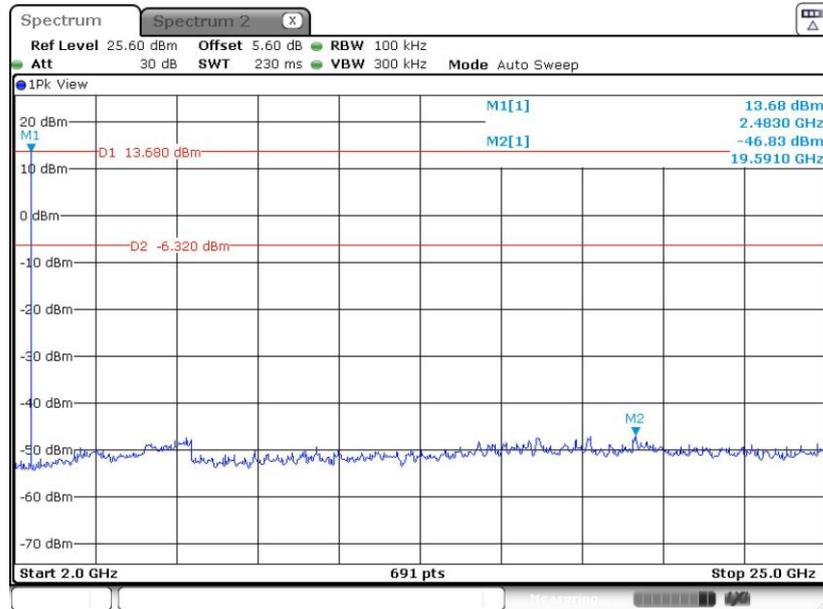


Date: 16, DEC. 2021 09:02:20






CSE Plot on Ch 39 between 30MHz ~ 3 GHz

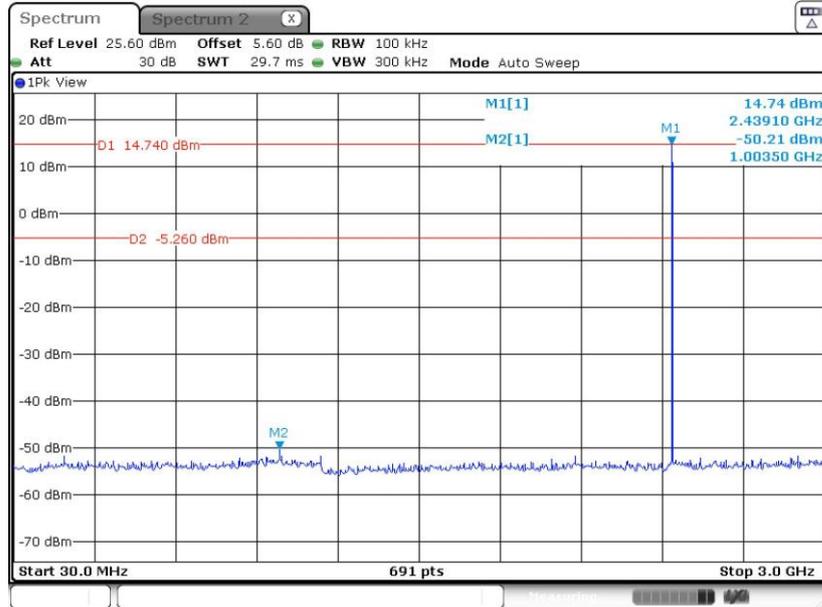

Date: 16,DEC.2021 09:14:54


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

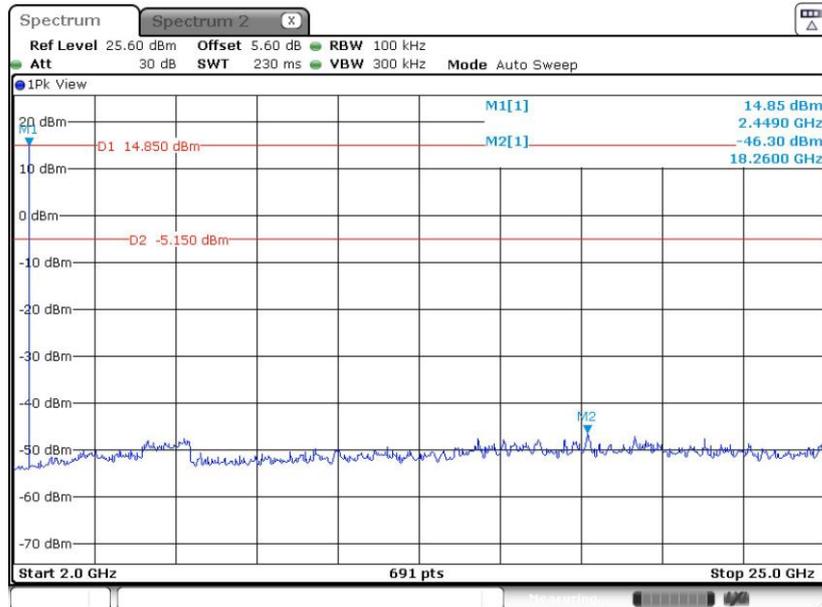

Date: 16,DEC.2021 09:15:24




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

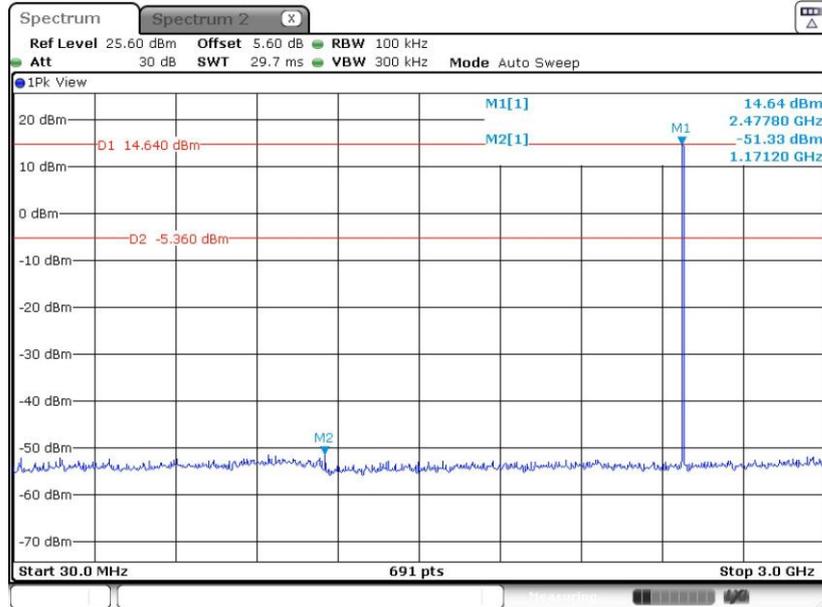

Date: 16,DEC,2021 09:27:50

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

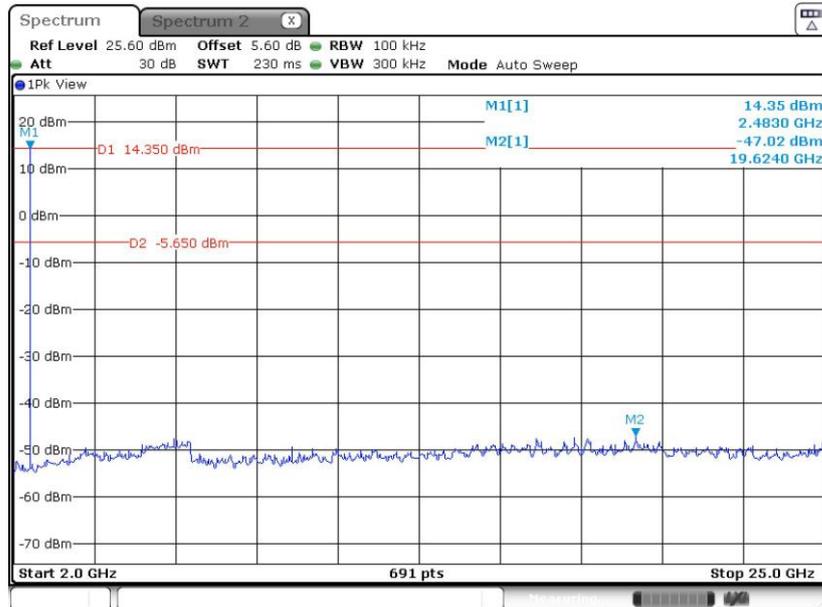

Date: 16,DEC,2021 09:28:21



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1\text{GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

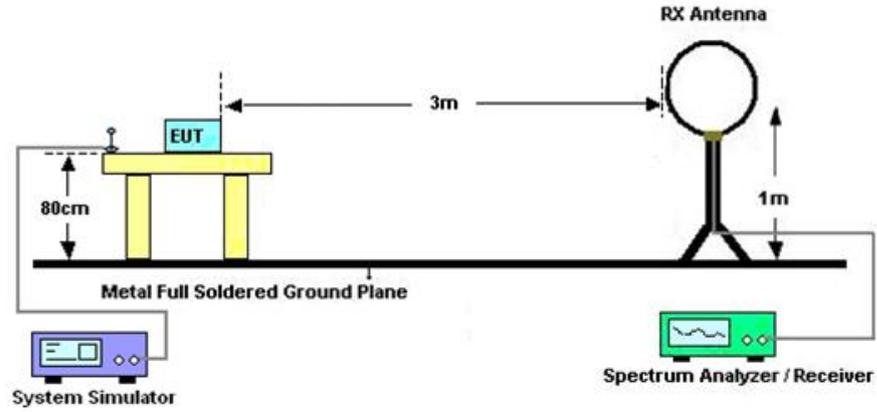

For radiated emissions from 30MHz to 1GHz

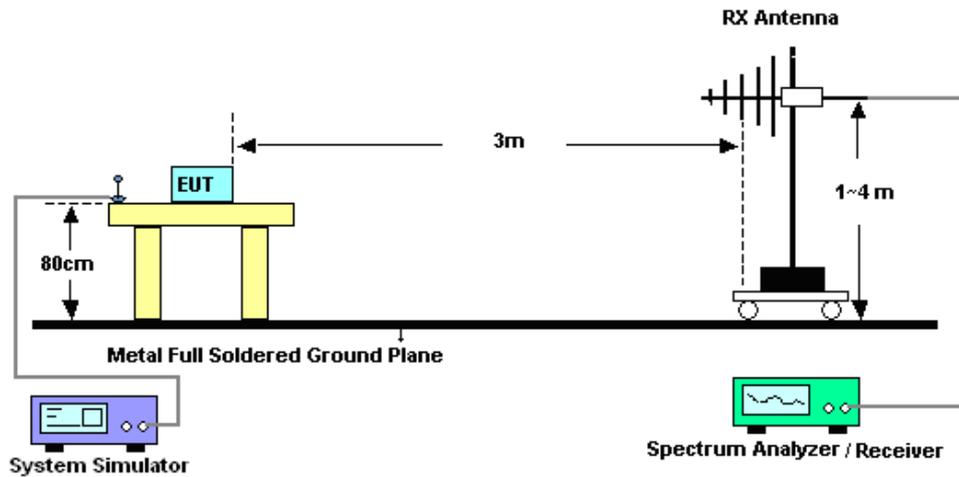

For radiated emissions above 1GHz

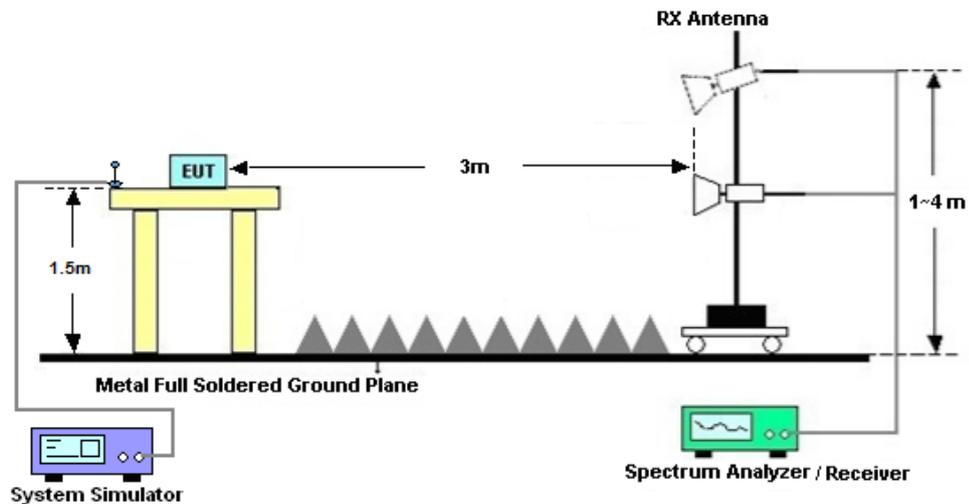



### **3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.8.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.

### **3.8.8 Duty cycle correction factor for average measurement**

Please refer to Appendix D.

## 3.9 AC Conducted Emission Measurement

### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

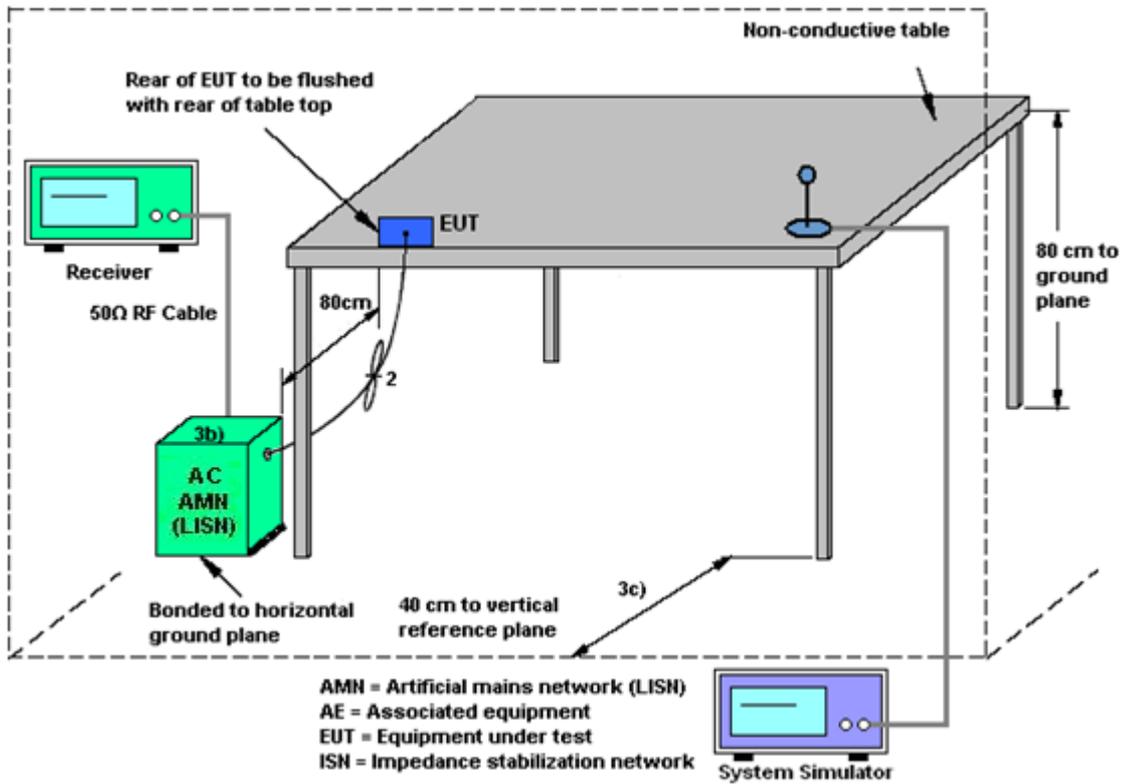

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2020	Oct. 08, 2021~ Dec. 16, 2021	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	Oct. 08, 2021~ Dec. 16, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	Oct. 08, 2021~ Dec. 16, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 12, 2021	Oct. 08, 2021~ Dec. 16, 2021	Jul. 11, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Ma x 30dBm	Oct. 16, 2021	Dec. 08, 2021	Oct. 15, 2022	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44GHz	Apr. 12, 2021	Dec. 08, 2021	Apr.11, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Dec. 08, 2021	Oct. 29, 2022	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	May 27, 2021	Dec. 08, 2021	May 26, 2022	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 25, 2021	Dec. 08, 2021	Apr. 24, 2022	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Jan. 06, 2021	Dec. 08, 2021	Jan. 05 2022	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 12, 2021	Dec. 08, 2021	Apr. 11, 2022	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 06, 2021	Dec. 08, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jan. 06, 2021	Dec. 08, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 13, 2021	Dec. 08, 2021	Apr. 12, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 08, 2021	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 08, 2021	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 08, 2021	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Dec. 17, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Dec. 17, 2021	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Apr. 13, 2021	Dec. 17, 2021	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Dec. 17, 2021	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



## **Appendix A. Conducted Test Results**

**Bluetooth ANT.1**

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2021/10/08~2021/12/16	Relative Humidity:	40~51	%

**TEST RESULTS DATA****20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.938	0.834	1002.900	0.6252	Pass
DH	1Mbps	1	39	2441	0.941	0.834	1002.900	0.6271	Pass
DH	1Mbps	1	78	2480	0.938	0.831	994.200	0.6252	Pass
2DH	2Mbps	1	0	2402	1.259	1.166	1306.800	0.8393	Pass
2DH	2Mbps	1	39	2441	1.285	1.164	1206.900	0.8567	Pass
2DH	2Mbps	1	78	2480	1.285	1.164	1246.000	0.8567	Pass
3DH	3Mbps	1	0	2402	1.233	1.146	1298.100	0.8220	Pass
3DH	3Mbps	1	39	2441	1.233	1.149	1007.200	0.8220	Pass
3DH	3Mbps	1	78	2480	1.233	1.152	1302.500	0.8220	Pass

**TEST RESULTS DATA****Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass

**TEST RESULTS DATA****Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	15.29	20.97	Pass
	39	1	<b>15.72</b>	20.97	Pass
	78	1	14.79	20.97	Pass

2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	15.58	20.97	Pass
	39	1	<b>16.18</b>	20.97	Pass
	78	1	14.78	20.97	Pass

3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	15.88	20.97	Pass
	39	1	<b>16.38</b>	20.97	Pass
	78	1	15.22	20.97	Pass

**TEST RESULTS DATA****Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass

**Bluetooth ANT.2**

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2021/10/08~2021/12/16	Relative Humidity:	40~51	%

**TEST RESULTS DATA****20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.938	0.834	998.600	0.6252	Pass
DH	1Mbps	1	39	2441	0.938	0.834	998.600	0.6252	Pass
DH	1Mbps	1	78	2480	0.941	0.831	998.600	0.6271	Pass
2DH	2Mbps	1	0	2402	1.259	1.166	1150.500	0.8567	Pass
2DH	2Mbps	1	39	2441	1.285	1.166	985.500	0.8567	Pass
2DH	2Mbps	1	78	2480	1.285	1.164	998.600	0.8509	Pass
3DH	3Mbps	1	0	2402	1.233	1.146	1128.800	0.8220	Pass
3DH	3Mbps	1	39	2441	1.233	1.152	1002.900	0.8220	Pass
3DH	3Mbps	1	78	2480	1.233	1.149	1081.000	0.8220	Pass

**TEST RESULTS DATA****Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass

**TEST RESULTS DATA****Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	15.48	20.97	Pass
	39	1	<b>16.05</b>	20.97	Pass
	78	1	15.05	20.97	Pass
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	15.52	20.97	Pass
	39	1	<b>16.45</b>	20.97	Pass
	78	1	15.55	20.97	Pass
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	16.15	20.97	Pass
	39	1	<b>16.82</b>	20.97	Pass
	78	1	15.68	20.97	Pass

**TEST RESULTS DATA****Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass

**TEST RESULTS DATA Peak Power Table  
for sample 2**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	13.60	20.97	Pass
	39	1	<b>14.20</b>	20.97	Pass
	78	1	12.60	20.97	Pass


2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	14.27	20.97	Pass
	39	1	<b>14.72</b>	20.97	Pass
	78	1	12.82	20.97	Pass

3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	14.72	20.97	Pass
	39	1	<b>15.24</b>	20.97	Pass
	78	1	13.43	20.97	Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line

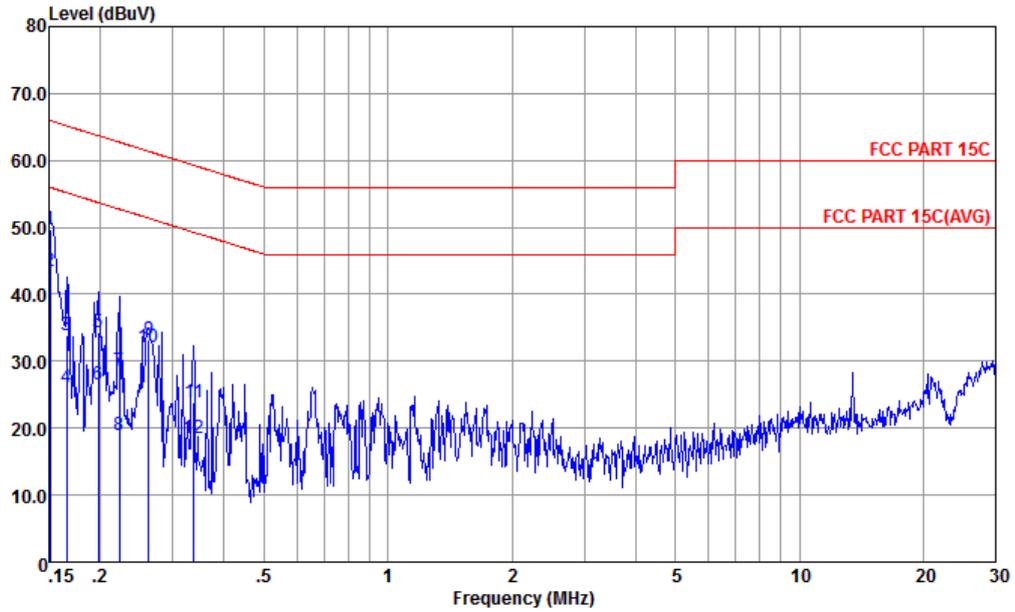


Site : CO01-KS  
 Condition : FCC PART 15C LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.151	49.60	-16.36	65.96	39.10	0.02	10.48	QP
2 *	0.151	43.50	-12.46	55.96	33.00	0.02	10.48	Average
3	0.166	33.97	-31.19	65.16	23.50	0.03	10.44	QP
4	0.166	25.97	-29.19	55.16	15.50	0.03	10.44	Average
5	0.198	34.21	-29.50	63.71	23.80	0.04	10.37	QP
6	0.198	26.61	-27.10	53.71	16.20	0.04	10.37	Average
7	0.222	28.60	-34.14	62.74	18.20	0.05	10.35	QP
8	0.222	19.00	-33.74	52.74	8.60	0.05	10.35	Average
9	0.262	33.29	-28.09	61.38	22.90	0.06	10.33	QP
10	0.262	32.19	-19.19	51.38	21.80	0.06	10.33	Average
11	0.337	23.87	-35.40	59.27	13.50	0.08	10.29	QP
12	0.337	18.57	-30.70	49.27	8.20	0.08	10.29	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

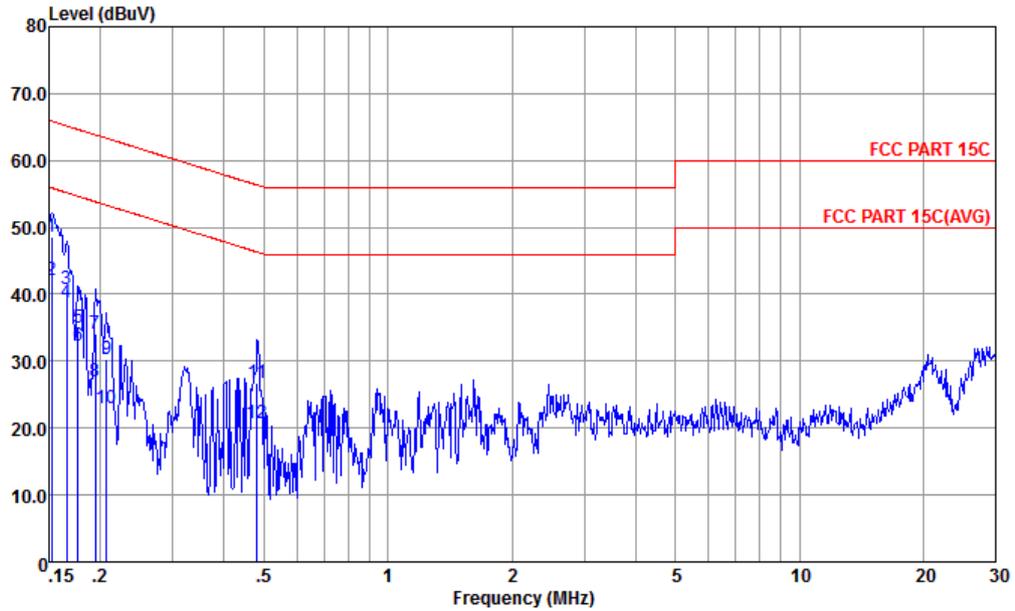

Site : CO01-KS  
 Condition : FCC PART 15C LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	48.68	-17.19	65.87	38.10	0.11	10.47	QP
2 *	0.152	42.18	-13.69	55.87	31.60	0.11	10.47	Average
3	0.166	40.75	-24.41	65.16	30.20	0.11	10.44	QP
4	0.166	38.75	-16.41	55.16	28.20	0.11	10.44	Average
5	0.177	35.02	-29.62	64.64	24.51	0.10	10.41	QP
6	0.177	32.32	-22.32	54.64	21.81	0.10	10.41	Average
7	0.194	34.08	-29.76	63.84	23.61	0.10	10.37	QP
8	0.194	26.98	-26.86	53.84	16.51	0.10	10.37	Average
9	0.207	30.26	-33.06	63.32	19.80	0.10	10.36	QP
10	0.207	22.96	-30.36	53.32	12.50	0.10	10.36	Average
11	0.481	26.85	-29.47	56.32	16.50	0.11	10.24	QP
12	0.481	20.65	-25.67	46.32	10.30	0.11	10.24	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT—ANT 2 (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH00 2402MHz		2344.45	53.96	-20.04	74	49.04	30.77	7.07	32.92	246	21	P	H
	*	2344.45	29.17	-24.83	54	-	-	-	-	-	-	A	H
		2402	98.41	-	-	93.09	31	7.16	32.84	246	21	P	H
		2402	73.62	-	-	-	-	-	-	-	-	A	H
		2321.44	53.48	-20.52	74	48.69	30.71	7.04	32.96	289	335	P	V
	*	2321.44	28.69	-25.31	54	-	-	-	-	-	-	A	V
		2402	98.02	-	-	92.7	31	7.16	32.84	289	335	P	V
		2402	73.23	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2341.33	54.34	-19.66	74	49.42	30.77	7.07	32.92	163	16	P	H
	*	2341.33	29.55	-24.45	54	-	-	-	-	-	-	A	H
		2442	100.62	-	-	95.03	31.07	7.23	32.71	163	16	P	H
		2442	75.83	-	-	-	-	-	-	-	-	A	H
		2497.72	54.03	-19.97	74	48.13	31.17	7.3	32.57	163	16	P	H
		2497.72	29.24	-24.76	54	-	-	-	-	-	-	A	H
		2387.09	53.71	-20.29	74	48.49	30.94	7.16	32.88	284	343	P	V
	*	2387.09	28.92	-25.08	54	-	-	-	-	-	-	A	V
		2442	98.94	-	-	93.35	31.07	7.23	32.71	284	343	P	V
		2442	74.15	-	-	-	-	-	-	-	-	A	V
	2499.94	53.72	-20.28	74	47.82	31.17	7.3	32.57	284	343	P	V	
	2499.94	28.93	-25.07	54	-	-	-	-	-	-	A	V	



BT CH 78 2480MHz		2496.22	54.52	-19.48	74	48.62	31.17	7.3	32.57	181	0	P	H
	*	2496.22	29.73	-24.27	54	-	-	-	-	-	-	A	H
		2480	96.67	-	-	90.91	31.13	7.27	32.64	181	0	P	H
		2480	71.88	-	-	-	-	-	-	-	-	A	H
		2492.38	53.71	-20.29	74	47.81	31.17	7.3	32.57	194	342	P	V
	*	2492.38	28.92	-25.08	54	-	-	-	-	-	-	A	V
		2480	99.33	-	-	93.57	31.13	7.27	32.64	194	342	P	V
		2480	74.54	-	-	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz  
BT—ANT 2 (Harmonic @ 3m)**

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH 00 2402MHz		4806	37.68	-36.32	74	54.72	34.54	10.24	61.82	100	360	P	H
		4806	37.31	-36.69	74	54.35	34.54	10.24	61.82	100	360	P	V
BT CH 39 2441MHz		4884	39.86	-34.14	74	56.65	34.66	10.32	61.77	100	360	P	H
		7320	40.83	-33.17	74	53.56	36.56	12.77	62.06	100	360	P	H
		4884	38.84	-35.16	74	55.63	34.66	10.32	61.77	100	360	P	V
		7320	41.18	-32.82	74	53.91	36.56	12.77	62.06	100	360	P	V
BT CH 78 2480MHz		4962	39	-35	74	55.47	34.81	10.43	61.71	100	360	P	H
		7440	40.98	-33.02	74	53.58	36.59	12.88	62.07	100	360	P	H
		4962	38	-36	74	54.47	34.81	10.43	61.71	100	360	P	V
		7440	40.29	-33.71	74	52.89	36.59	12.88	62.07	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT—ANT 1(Worse From ANT 2) (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	Limit Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH 78 2480MHz		2494.12	54.24	-19.76	74	48.34	31.17	7.3	32.57	146	137	P	H	
	*	2494.12	29.45	-24.55	54	-	-	-	-	-	-	A	H	
		2480	99.18	-	-	93.42	31.13	7.27	32.64	146	137	P	H	
		2480	74.39	-	-	-	-	-	-	-	-	A	H	
		2490.16	53.98	-20.02	74	48.15	31.17	7.3	32.64	359	101	P	V	
	*	2490.16	29.19	-24.81	54	-	-	-	-	-	-	-	A	V
		2480	97.01	-	-	91.25	31.13	7.27	32.64	359	101	P	V	
		2480	72.22	-	-	-	-	-	-	-	-	-	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.													

2.4GHz 2400~2483.5MHz

BT—ANT 1(Worse From ANT 2) (Harmonic @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Limit Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH 78 2480MHz		4962	41.48	-32.52	74	56.25	34.81	10.43	60.01	100	360	P	H
		7440	42.03	-31.97	74	53.1	36.59	12.88	60.54	100	360	P	H
		4962	40.01	-33.99	74	54.78	34.81	10.43	60.01	100	360	P	V
		7440	42.05	-31.95	74	53.12	36.59	12.88	60.54	100	360	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT—ANT 2 With WPC(Worse From ANT 2) (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Limit Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH 78 2480MHz		2483.92	58.05	-15.95	74	52.29	31.13	7.27	32.64	144	347	P	H
	*	2483.92	33.26	-20.74	54	-	-	-	-	-	-	A	H
		2480	97.70	-	-	91.94	31.13	7.27	32.64	144	347	P	H
		2480	72.91	-	-	-	-	-	-	-	-	A	H
		2489.08	54.49	-19.51	74	48.66	31.17	7.3	32.64	327	26	P	V
	*	2489.08	29.70	-24.30	54	-	-	-	-	-	-	A	V
		2480	96.04	-	-	90.28	31.13	7.27	32.64	327	26	P	V
		2480	71.25	-	-	-	-	-	-	-	-	A	V
Remark	5. No other spurious found. 6. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BT—ANT 2 With WPC(Worse From ANT 2) (Harmonic @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Limit Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH 78 2480MHz		4962	40.97	-33.03	74	55.74	34.81	10.43	60.01	100	360	P	H
		7440	42.06	-31.94	74	53.13	36.59	12.88	60.54	100	360	P	H
		4962	41.17	-32.83	74	55.94	34.81	10.43	60.01	100	360	P	V
		7440	43.32	-30.68	74	54.39	36.59	12.88	60.54	100	360	P	V
Remark	5. No other spurious found. 6. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BT LF		30	22.56	-17.44	40	28.06	25.15	0.58	31.23	-	-	P	H
		56.19	24.54	-15.46	40	41.57	13.34	0.97	31.34	-	-	P	H
		108.57	17.06	-26.44	43.5	29.87	17.26	1.7	31.77	-	-	P	H
		142.52	22.96	-20.54	43.5	35.72	16.72	1.92	31.4	-	-	P	H
		182.29	31.23	-12.27	43.5	44.52	15.86	2.18	31.33	-	-	P	H
		951.5	30.19	-15.81	46	28.28	27.21	5.03	30.33	-	-	P	H
		30	33.1	-6.9	40	38.25	25.5	0.58	31.23	-	-	P	V
		56.19	34.4	-5.6	40	50.73	14.04	0.97	31.34	100	159	QP	V
		94.99	23.73	-19.77	43.5	37.06	17.05	1.56	31.94	-	-	P	V
		175.5	29.97	-13.53	43.5	42.27	16.89	2.14	31.33	-	-	P	V
		638.19	28.1	-17.9	46	29.49	25.81	4.11	31.31	-	-	P	V
		949.56	30.36	-15.64	46	27.76	27.9	5.02	30.32	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



2.4GHz BT With WPC (LF)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
2.4GHz BT LF		30.97	24.2	-15.8	40	30.27	24.59	0.59	31.25	-	-	P	H
		56.19	23.36	-16.64	40	40.39	13.34	0.97	31.34	-	-	P	H
		185.2	32.73	-10.77	43.5	46.07	15.79	2.2	31.33	-	-	P	H
		287.05	33.89	-12.11	46	43.69	19.03	2.74	31.57	-	-	P	H
		338.46	31.59	-14.41	46	40.13	20.13	2.98	31.65	-	-	P	H
		575.14	28.9	-17.1	46	31.31	25.14	3.9	31.45	-	-	P	H
		30.97	35.8	-4.2	40	41.48	24.98	0.59	31.25	-	-	P	V
		56.19	34.06	-5.94	40	50.39	14.04	0.97	31.34	112	151	QP	V
		175.5	33.71	-9.79	43.5	46.01	16.89	2.14	31.33	-	-	P	V
		280.26	32.15	-13.85	46	41.08	19.89	2.71	31.53	-	-	P	V
		312.27	32.11	-13.89	46	40.39	20.5	2.86	31.64	-	-	P	V
		558.65	32.79	-13.21	46	34.7	25.83	3.84	31.58	-	-	P	V
Remark	3. No other spurious found. 4. All results are PASS against limit line.												

Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)


**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.

## Appendix D. Duty Cycle Plots

### 3DH5 on time (One Pulse) Plot on Channel 39

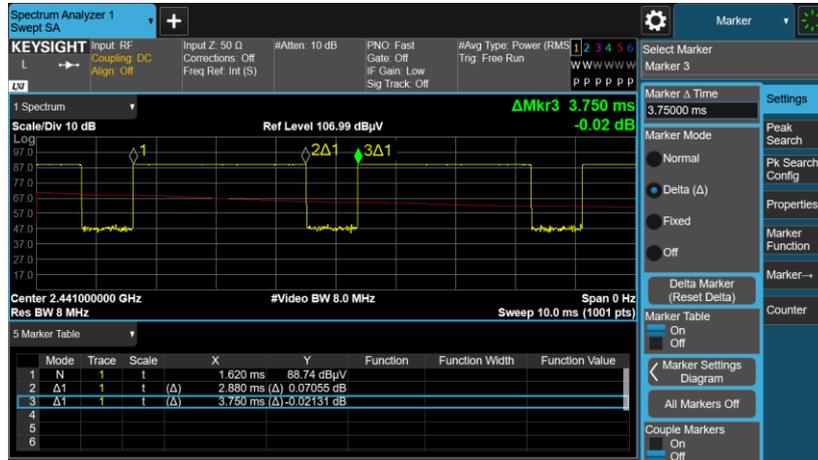

### 3DH5 on time (Count Pulses) Plot on Channel 39

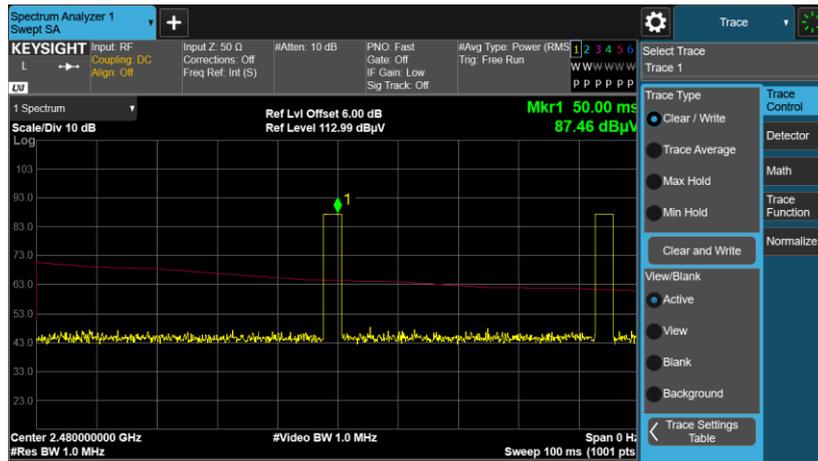

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.