

## System Check\_Head\_835MHz

**DUT: D835V2-SN:4d258**

Communication System: ; Frequency: 835.0

Medium: HSL. Medium parameters used:  $f= 835.0$  MHz;  $\sigma= 0.928$  S/m;  $\epsilon_r = 42.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 90.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.476 W/kg; SAR (10g) = 0.315 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0mm

Power Drift = -0.01 dB

SAR (1g) = 0.480 W/kg; SAR (10g) = 0.312 W/kg;

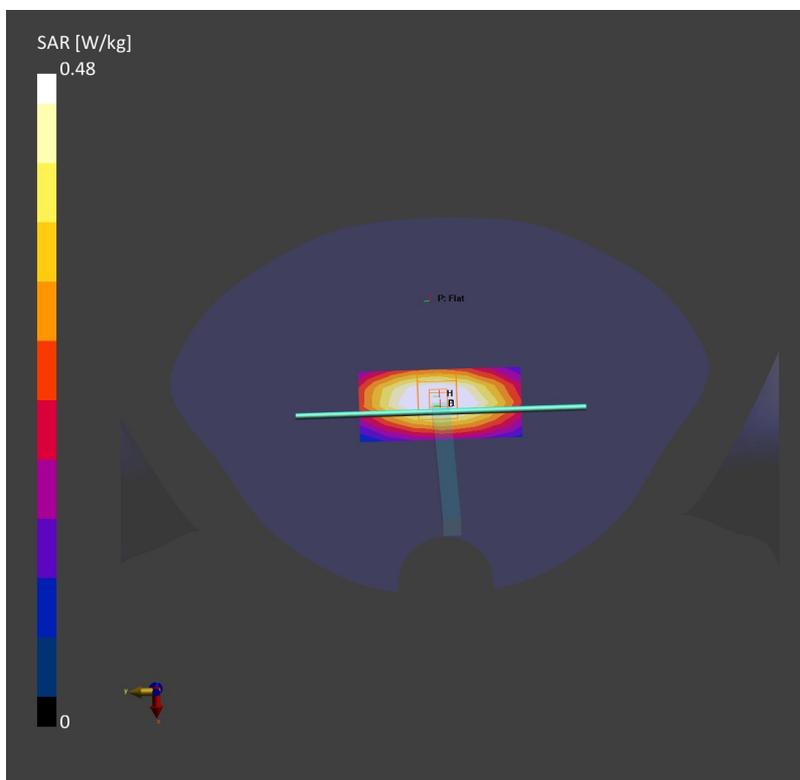

## System Check\_Head\_1750MHz

**DUT: D1750V2-SN:1090**

Communication System: ; Frequency: 1750.0

Medium: HSL. Medium parameters used:  $f= 1750.0$  MHz;  $\sigma= 1.38$  S/m;  $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 90.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.75 W/kg; SAR (10g) = 0.956 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0mm

Power Drift = -0.01 dB

SAR (1g) = 1.80 W/kg; SAR (10g) = 0.959 W/kg;

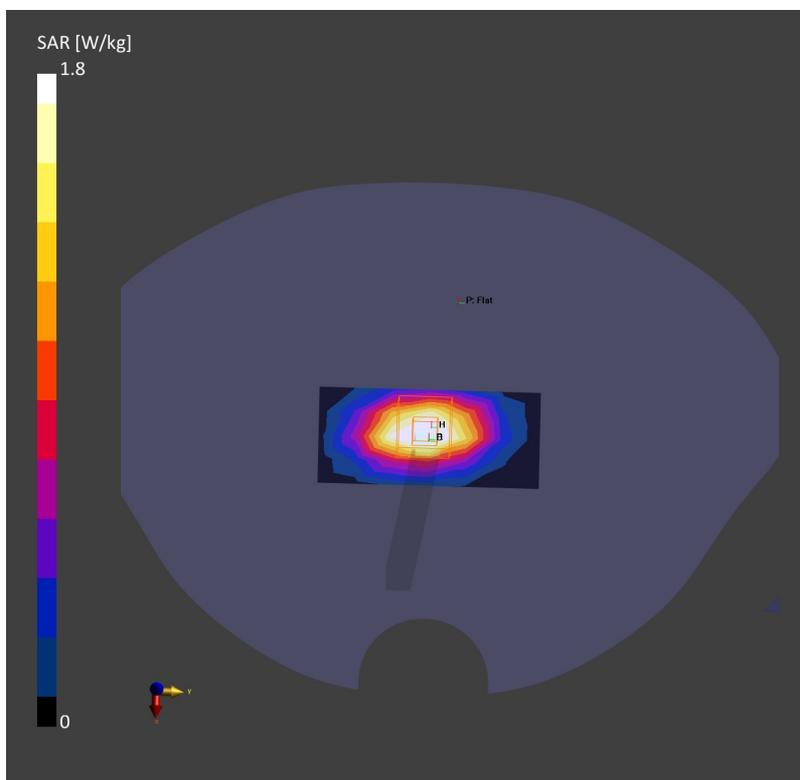

## System Check\_Head\_1900MHz

**DUT: D1900V2-SN:5d170**

Communication System: ; Frequency: 1900.0

Medium: HSL. Medium parameters used:  $f= 1900.0$  MHz;  $\sigma= 1.46$  S/m;  $\epsilon_r = 39.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.13, 8.13, 8.13); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 90.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.01 W/kg; SAR (10g) = 1.04 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0mm

Power Drift = -0.05 dB

SAR (1g) = 2.00 W/kg; SAR (10g) = 1.03 W/kg;

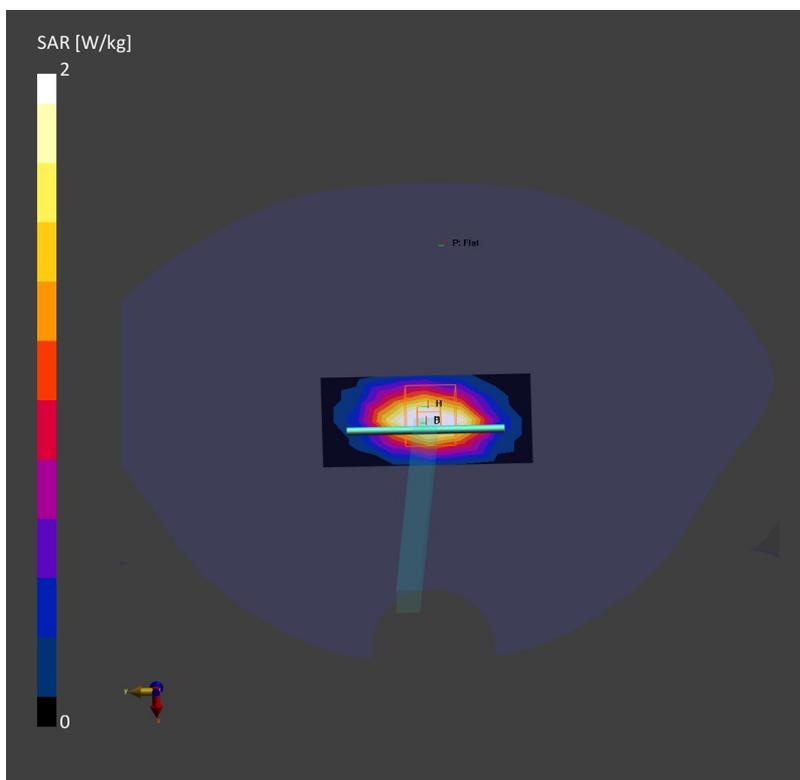

## System Check\_Head\_2600MHz

**DUT: D2600V2-SN:1061**

Communication System: ; Frequency: 2600.0

Medium: HSL. Medium parameters used:  $f= 2600.0$  MHz;  $\sigma= 1.98$  S/m;  $\epsilon_r = 40.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.26, 7.26, 7.26); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 96.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 2.54 W/kg; SAR (10g) = 1.15 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0mm

Power Drift = -0.01 dB

SAR (1g) = 2.01 W/kg; SAR (10g) = 1.04 W/kg;

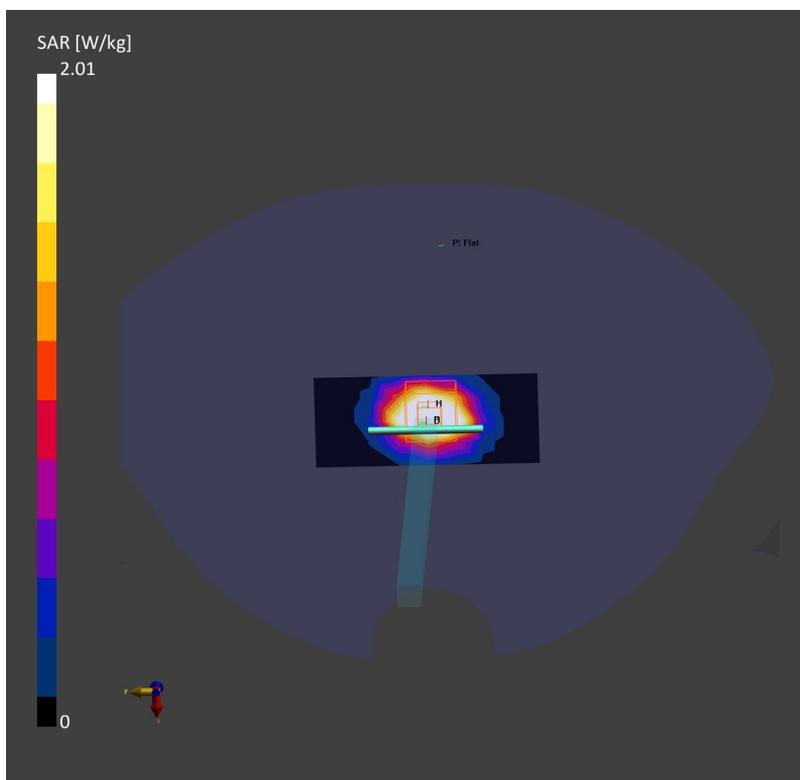

## System Check\_Head\_3500MHz

**DUT: D3500V2-SN:1037**

Communication System: ; Frequency: 3500.0

Medium: HSL. Medium parameters used:  $f= 3500.0$  MHz;  $\sigma= 2.85$  S/m;  $\epsilon_r = 38.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(6.69, 6.69, 6.69); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.86 W/kg; SAR (10g) = 1.15 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 3.05 W/kg; SAR (10g) = 1.18 W/kg;

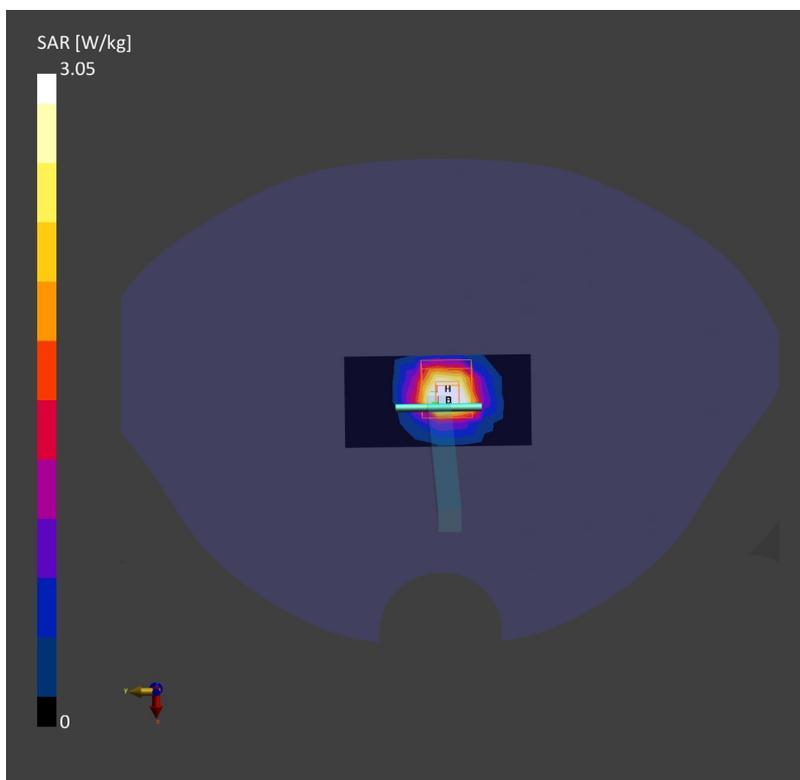

## System Check\_Head\_3700MHz

**DUT: D3700V2-SN:1008**

Communication System: ; Frequency: 3700.0

Medium: HSL. Medium parameters used:  $f= 3700.0$  MHz;  $\sigma= 3.04$  S/m;  $\epsilon_r = 38.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(6.64, 6.64, 6.64); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.96 W/kg; SAR (10g) = 1.15 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 3.17 W/kg; SAR (10g) = 1.19 W/kg;

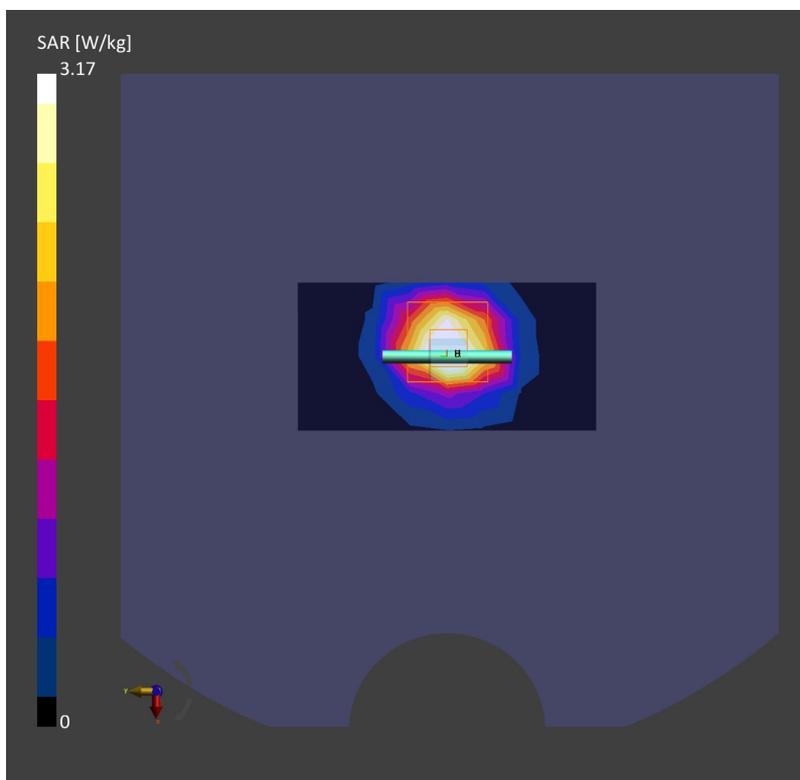

## System Check\_Head\_3900MHz

**DUT: D3900V2-SN:1048**

Communication System: ; Frequency: 3900.0

Medium: HSL. Medium parameters used:  $f= 3900.0$  MHz;  $\sigma= 3.25$  S/m;  $\epsilon_r = 37.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(6.5, 6.5, 6.5); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.96 W/kg; SAR (10g) = 1.09 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 3.18 W/kg; SAR (10g) = 1.15 W/kg;

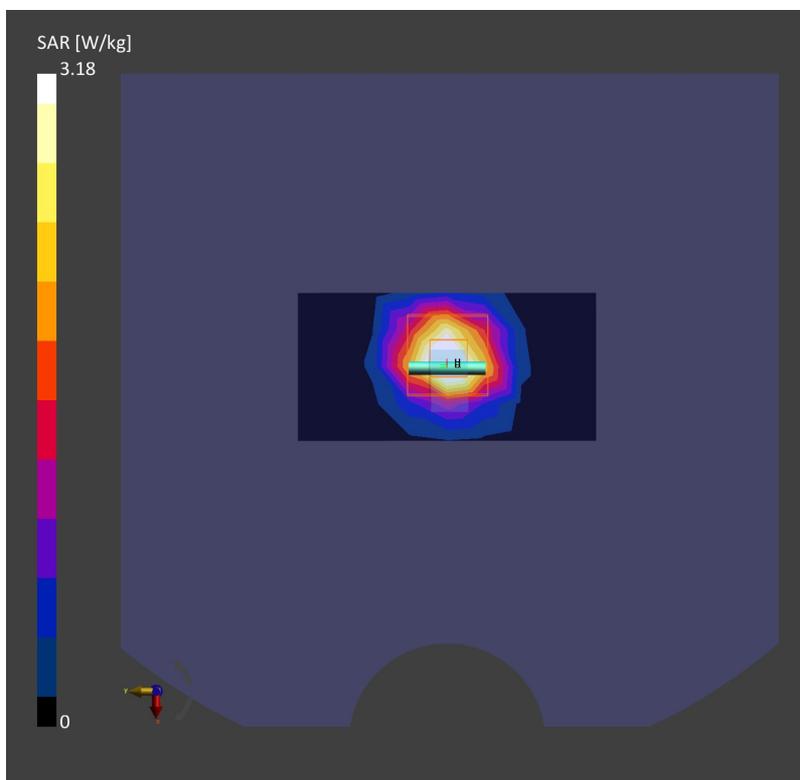

## System Check\_Head\_2450MHz

**DUT: D2450V2-SN:908**

Communication System: ; Frequency: 2450.0

Medium: MSL. Medium parameters used:  $f= 2450.0$  MHz;  $\sigma= 1.81$  S/m;  $\epsilon_r = 38.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.53, 7.53, 7.53); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 96.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 2.47 W/kg; SAR (10g) = 1.15 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 2.52 W/kg; SAR (10g) = 1.17 W/kg;

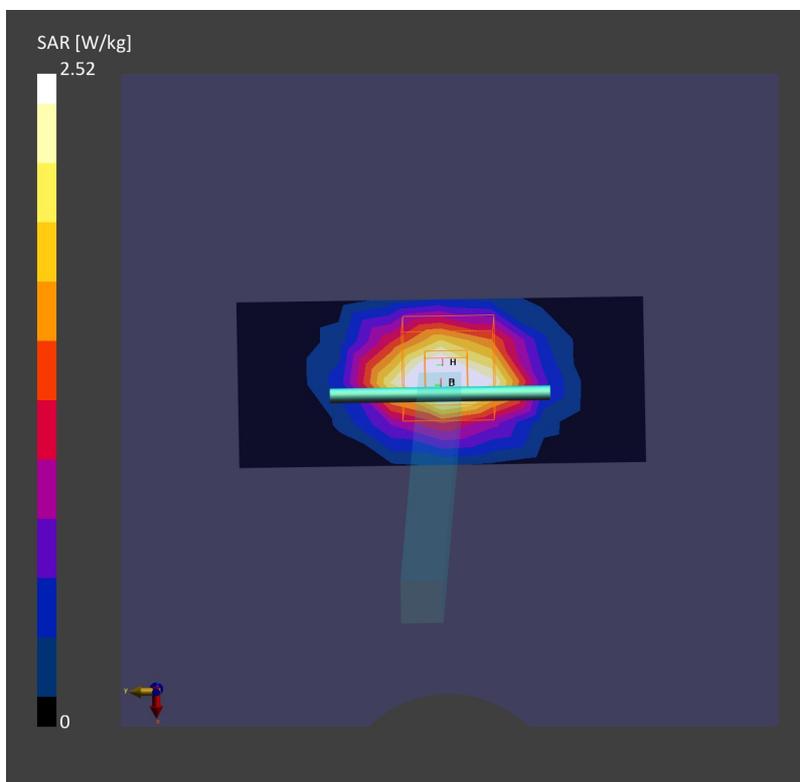

## System Check\_Head\_5250MHz

**DUT: D5GHzV2-SN:1113**

Communication System: ; Frequency: 5250.0

Medium: MSL. Medium parameters used:  $f= 5250.0$  MHz;  $\sigma= 4.59$  S/m;  $\epsilon_r = 36.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(5.38, 5.38, 5.38); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.28 W/kg; SAR (10g) = 0.948 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 3.71 W/kg; SAR (10g) = 1.12 W/kg;

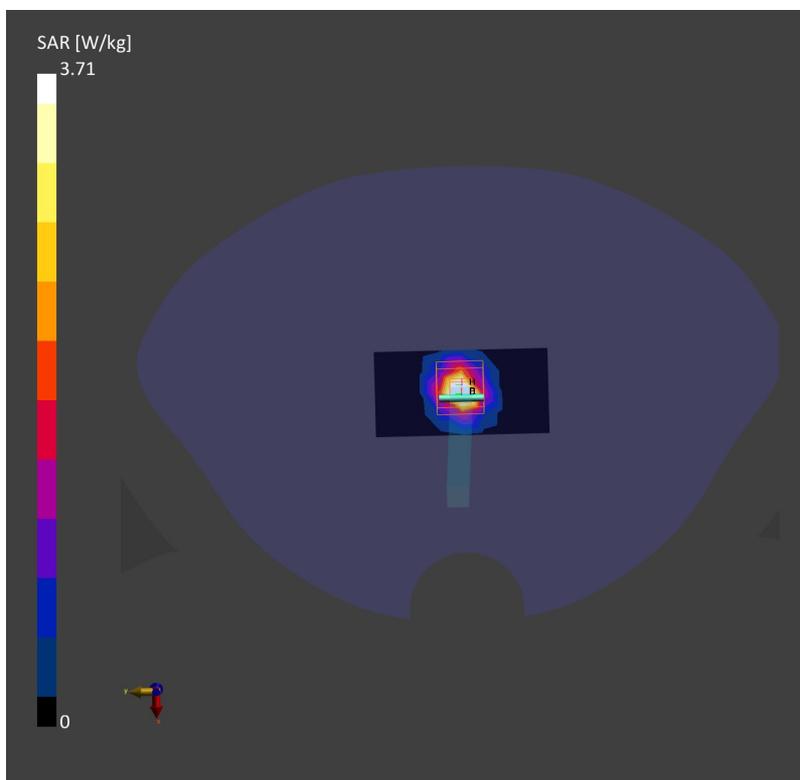

## System Check\_Head\_5600MHz

**DUT: D5GHzV2-SN:1113**

Communication System: ; Frequency: 5600.0

Medium: MSL. Medium parameters used:  $f= 5600.0$  MHz;  $\sigma= 4.96$  S/m;  $\epsilon_r = 35.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.68, 4.68, 4.68); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.64 W/kg; SAR (10g) = 1.04 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 3.99 W/kg; SAR (10g) = 1.14 W/kg;

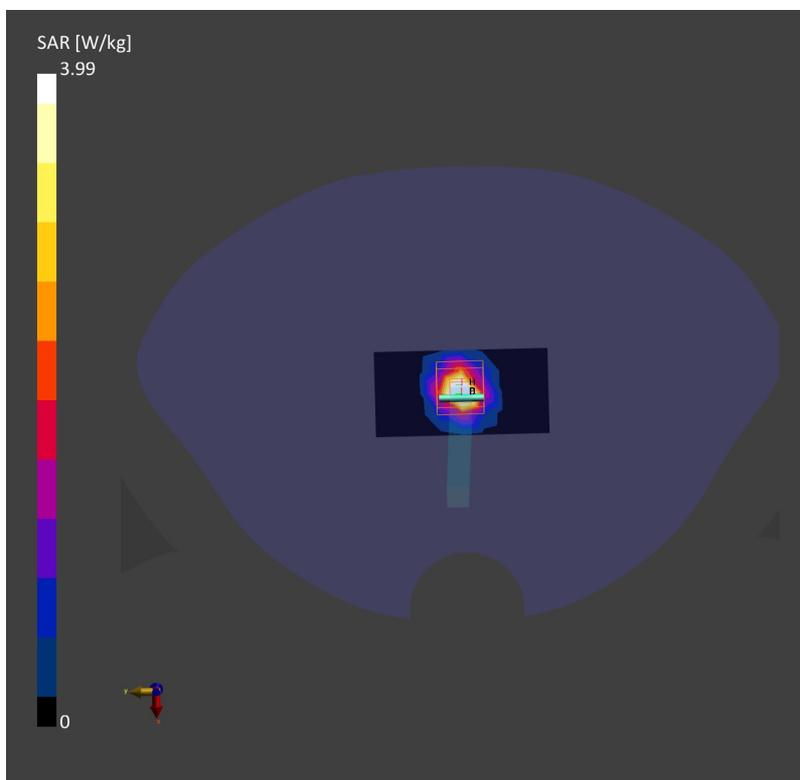

## System Check\_Head\_5600MHz

### DUT: D5GHzV2-SN:1113

Communication System: ; Frequency: 5750.0

Medium: MSL. Medium parameters used:  $f= 5750.0$  MHz;  $\sigma= 5.14$  S/m;  $\epsilon_r = 35.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.82, 4.82, 4.82); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.26 W/kg; SAR (10g) = 0.938 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 4.15 W/kg; SAR (10g) = 1.21 W/kg;

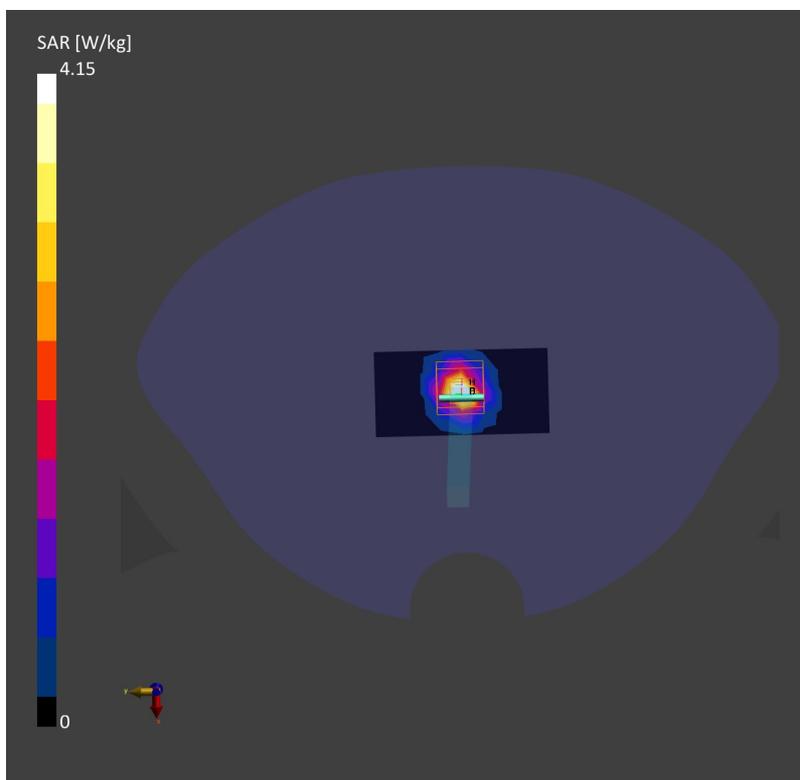

### System Check\_Head\_2600MHz

**DUT: D2600V2 - SN:1061**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.93$  S/m;  $\epsilon_r = 39.043$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4-SN3857; ConvF(7.28, 7.28, 7.28); Calibrated: 2021.11.24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Pin=50mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 4.05 W/kg

**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 47.90 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 5.14 W/kg  
**SAR(1 g) = 2.61 W/kg; SAR(10 g) = 1.17 W/kg**  
Maximum value of SAR (measured) = 4.15 W/kg

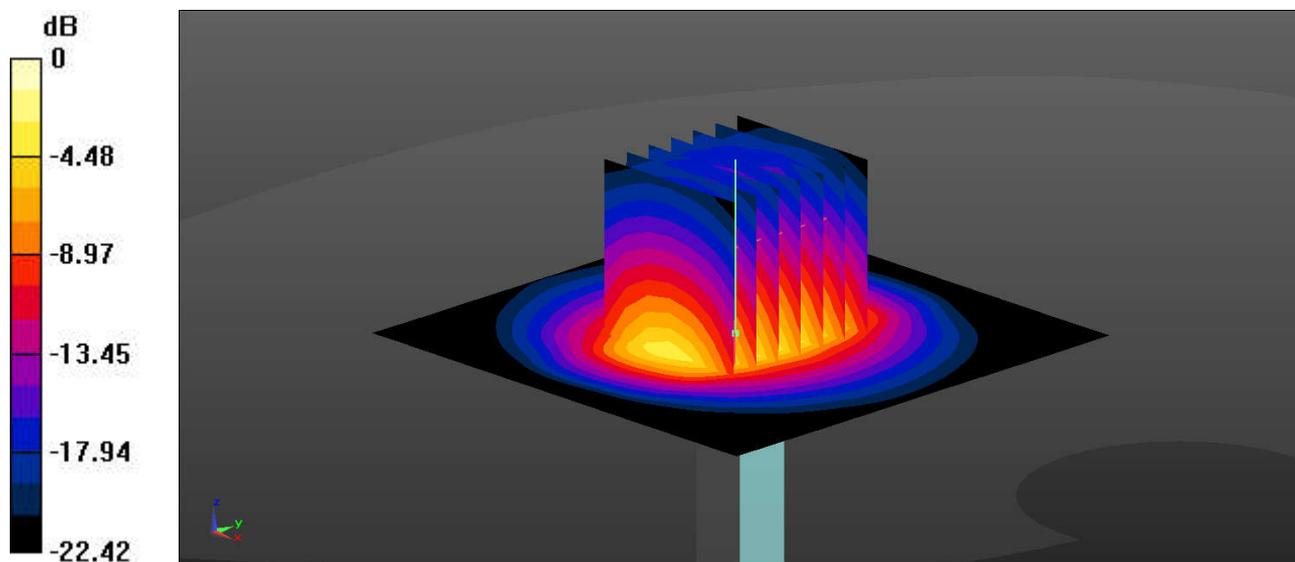

0 dB = 4.15 W/kg = 6.18 dBW/kg



**Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.

## 01\_LTE Band 12\_10M\_QPSK\_25RB\_0Offset\_Left Cheek\_0mm\_Ch23095

Communication System: Band 12, E-UTRA/FDD; Frequency: 707.5  
Medium: HSL. Medium parameters used:  $f= 707.5$  MHz;  $\sigma= 0.87$  S/m;  $\epsilon_r = 44.0$   
Ambient Temperature: 23.2°C; Fiquid Temperature: 22.6°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(10.25, 10.25, 10.25); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.428 W/kg; SAR (10g) = 0.265 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.14 dB

SAR (1g) = 0.409 W/kg; SAR (10g) = 0.219 W/kg;

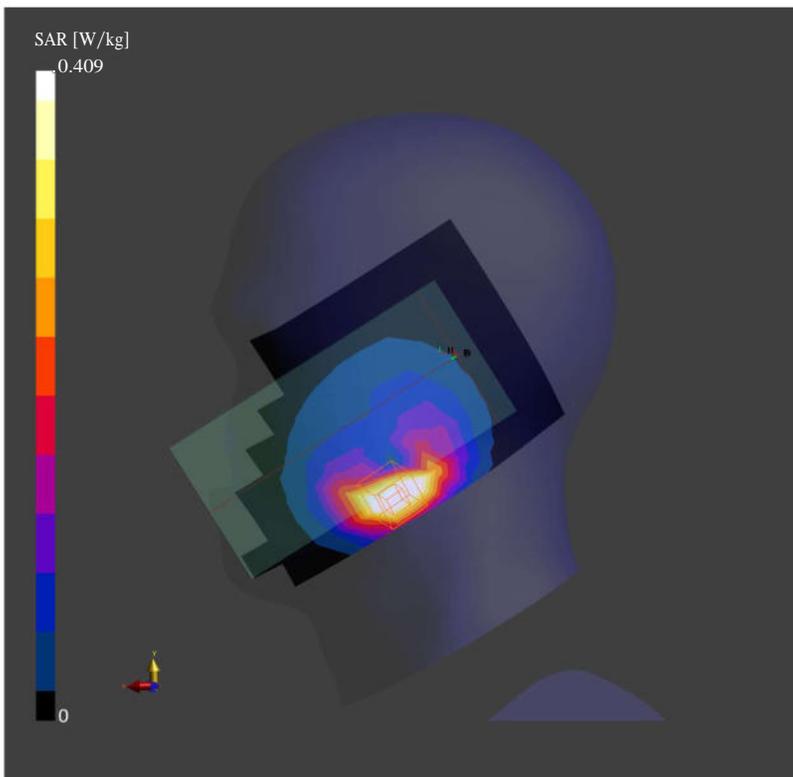

## 02\_LTE Band 13\_10M\_QPSK\_25RB\_0Offset\_Left Cheek\_0mm\_Ch23230

Communication System: Band 13, E-UTRA/FDD; Frequency: 782.0  
Medium: HSL. Medium parameters used:  $f=782.0$  MHz;  $\sigma=0.90$  S/m;  $\epsilon_r=43.6$   
Ambient Temperature: 23.2°C; Fiquid Temperature: 22.6°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(10.25, 10.25, 10.25); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.408 W/kg; SAR (10g) = 0.261 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.06 dB

SAR (1g) = 0.406 W/kg; SAR (10g) = 0.221 W/kg;

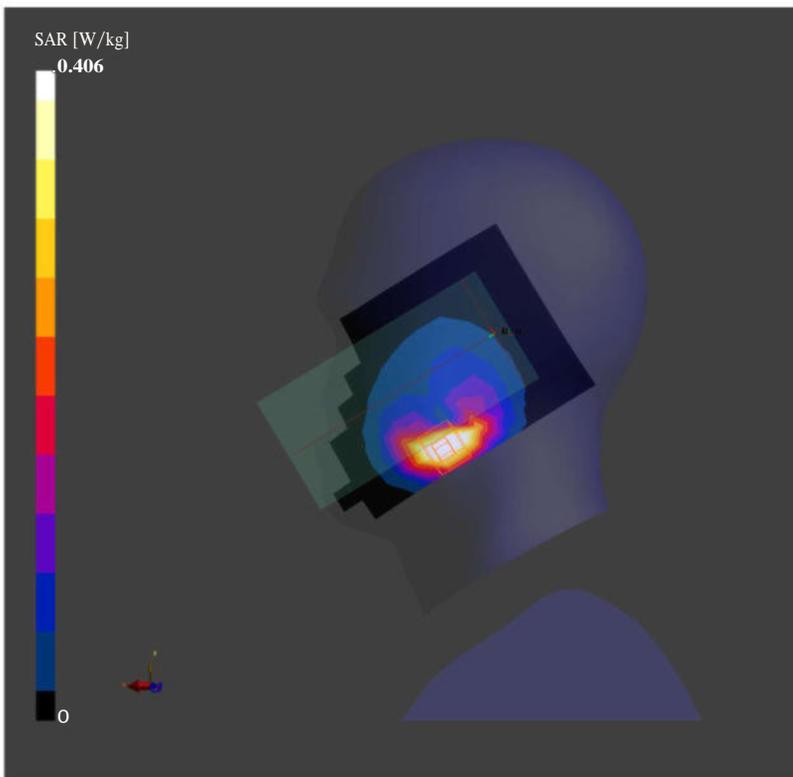

### 03\_GSM 850\_GPRS (4 Tx slots)\_Left Cheek\_0mm\_Ch189

Communication System: GSM 850; Frequency: 836.4

Medium: HSL. Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 43.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead

- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.426 W/kg; SAR (10g) = 0.253 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.1 dB

SAR (1g) = 0.404 W/kg; SAR (10g) = 0.214 W/kg;

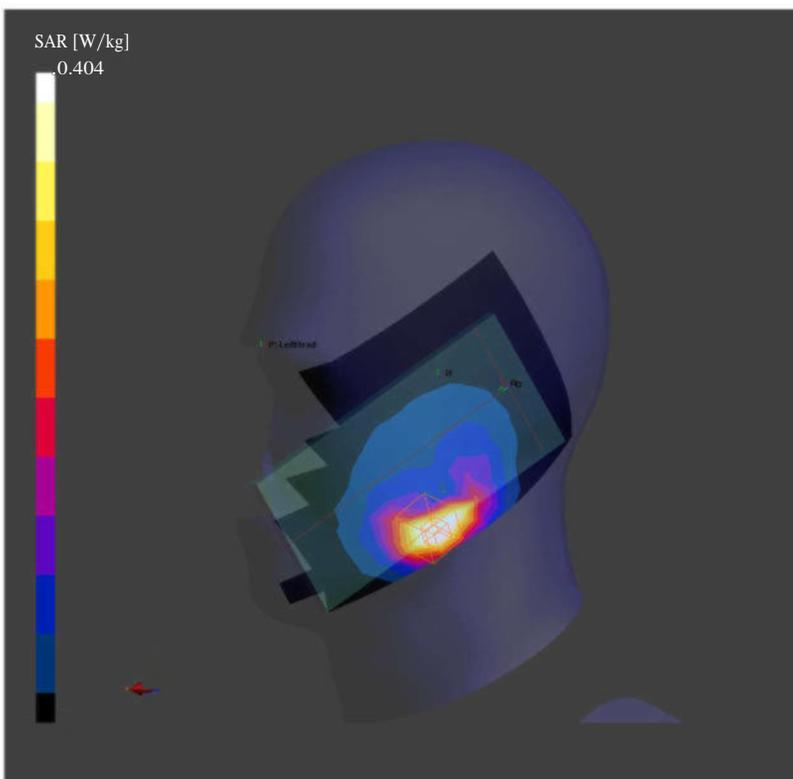

## 04\_WCDMA V\_RMC 12.2Kbps\_Left Cheek\_0mm\_Ch4182

Communication System: Band 5, UTRA/FDD; Frequency: 836.4  
Medium: HSL. Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 43.6$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.501 W/kg; SAR (10g) = 0.303 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.06 dB

SAR (1g) = 0.484 W/kg; SAR (10g) = 0.255 W/kg;

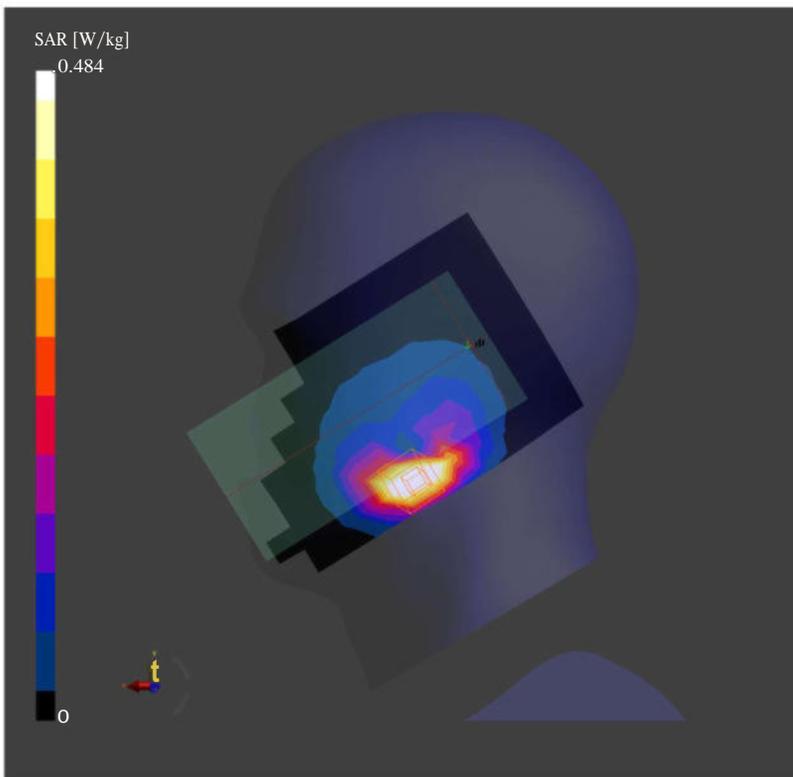

**05\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch26865**

Communication System: Band 26 E-UTRA/FDD; Frequency: 831.5  
Medium: HSL. Medium parameters used:  $f= 831.5$  MHz;  $\sigma= 0.91$  S/m;  $\epsilon_r = 43.7$   
Ambient Temperature: 23.2°C; Fiquid Temperature: 22.7°C


**DASY6 Configuration:**

- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.274 W/kg; SAR (10g) = 0.168 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.09 dB  
SAR (1g) = 0.281 W/kg; SAR (10g) = 0.157 W/kg;

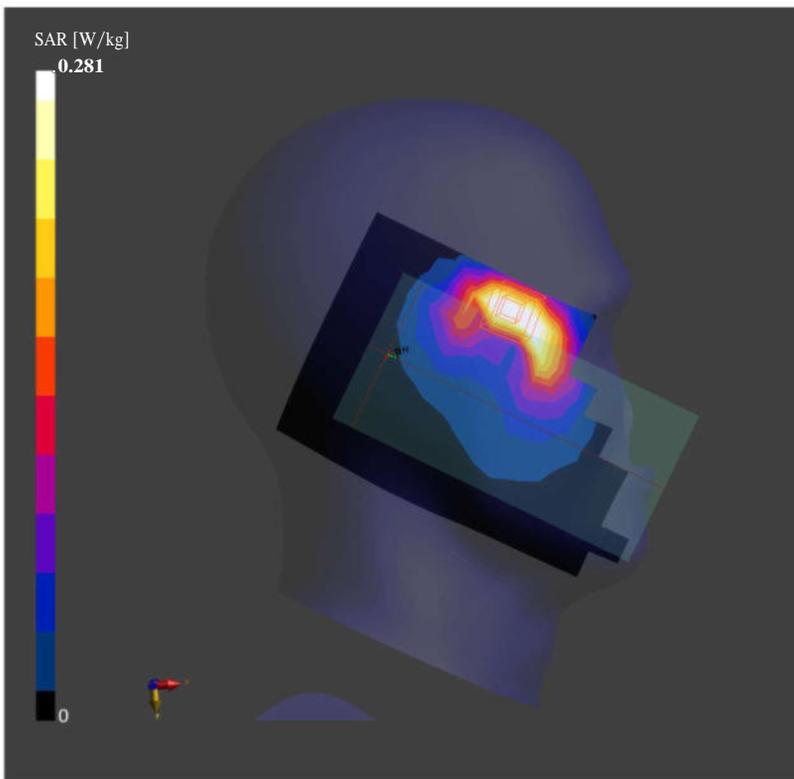

**06\_FR1 n5\_20M\_QPSK\_50RB\_28Offset\_Leftt Cheek\_0mm\_Ch167300**

Communication System: Band n5; Frequency: 836.5

Medium: HSL. Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 43.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead

- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.498 W/kg; SAR (10g) = 0.304 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.477 W/kg; SAR (10g) = 0.251 W/kg;

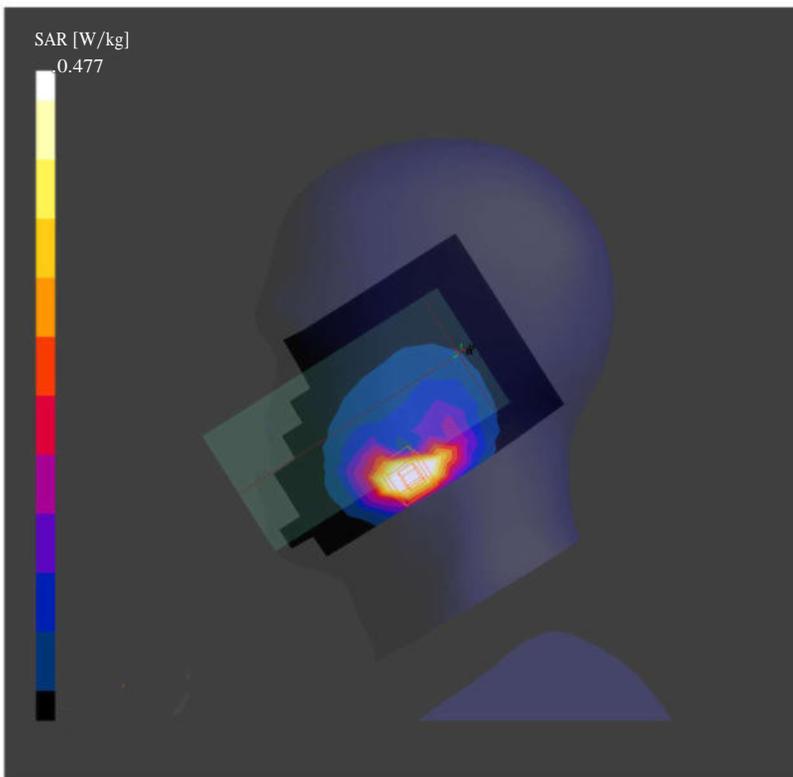

## 07\_WCDMA IV\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch1413

Communication System: Band 4, UTRA/FDD; Frequency: 1732.6  
Medium: HSL. Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 41.9$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.452 W/kg; SAR (10g) = 0.246 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.03 dB

SAR (1g) = 0.405 W/kg; SAR (10g) = 0.206 W/kg;

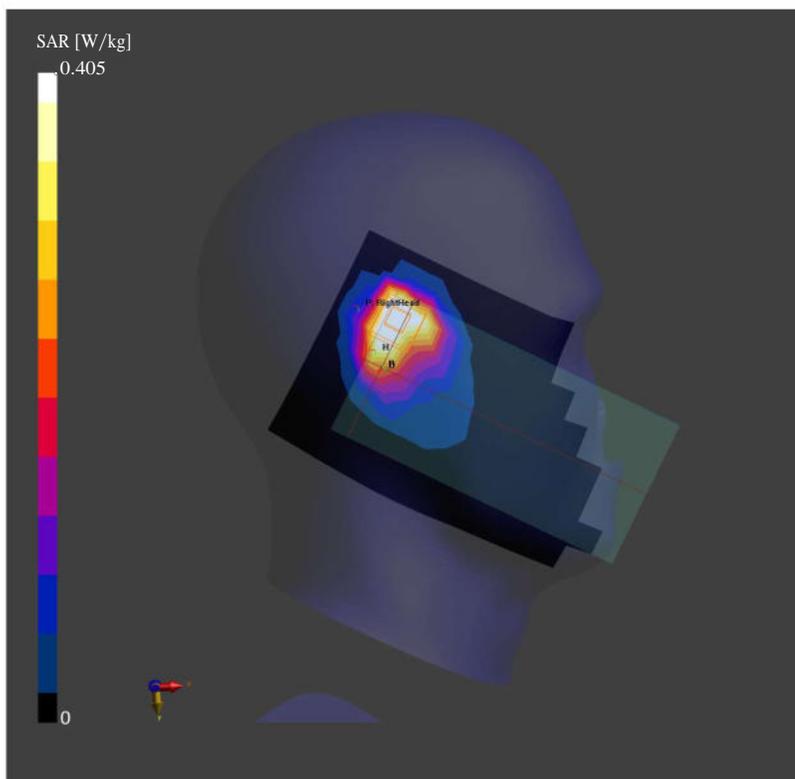

**08\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch132572**

Communication System: Band 66, E-UTRA/FDD; Frequency: 1770.0  
Medium: HSL. Medium parameters used:  $f= 1770.0$  MHz;  $\sigma= 1.34$  S/m;  $\epsilon_r = 41.9$   
Ambient Temperature: 23.5°C; Fiquid Temperature: 22.5°C

**DASY6 Configuration:**


- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.513 W/kg; SAR (10g) = 0.272 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.05 dB

SAR (1g) = 0.638 W/kg; SAR (10g) = 0.296 W/kg;

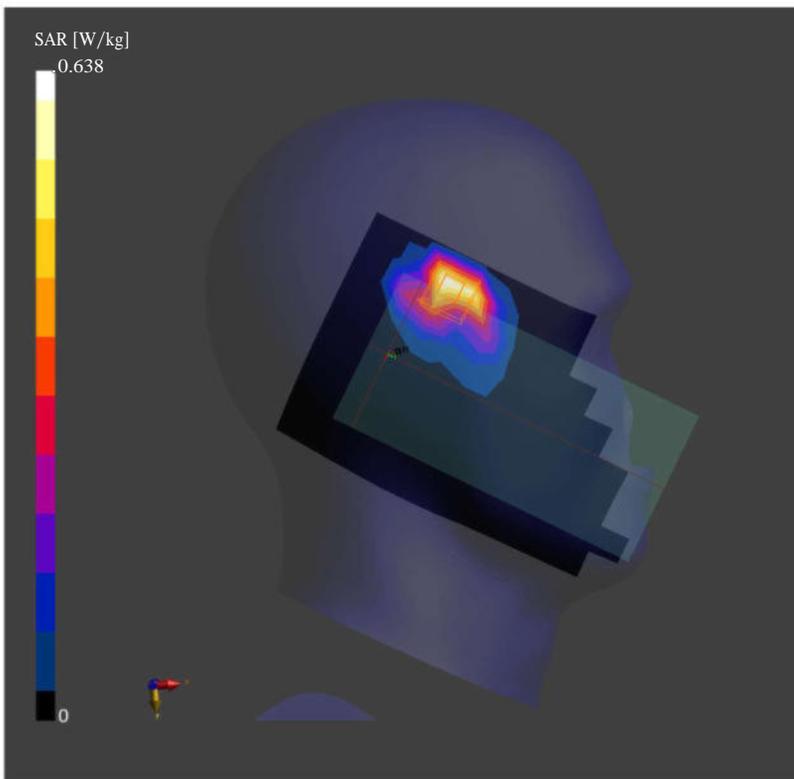

**09\_FR1 n66\_40M\_QPSK\_108RB\_54Offset\_Right Cheek \_0mm\_Ch349000**

Communication System: Band n66; Frequency: 1745.0  
Medium: HSL. Medium parameters used:  $f= 1745.0$  MHz;  $\sigma= 1.34$  S/m;  $\epsilon_r = 41.9$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

**DASY6 Configuration:**


- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.690 W/kg; SAR (10g) = 0.363 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.1 dB

SAR (1g) = 0.522 W/kg; SAR (10g) = 0.369 W/kg;

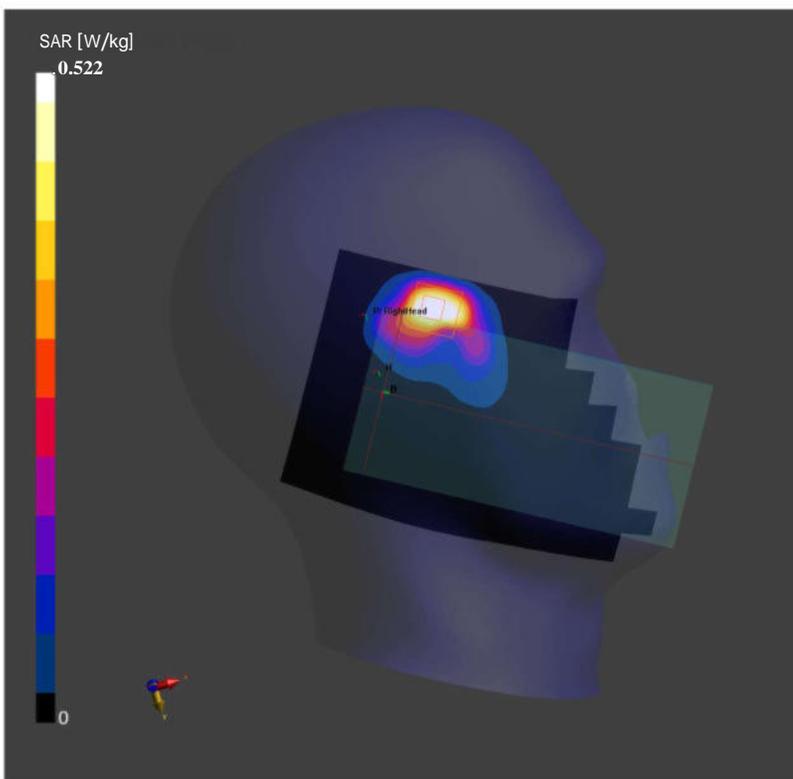

## 10\_GSM1900\_GPRS (1 Tx slots)\_Right Tilted\_0mm\_Ch661

Communication System: PCS 1900; Frequency: 1880.0  
Medium: HSL. Medium parameters used:  $f= 1880.0$  MHz;  $\sigma= 1.44$  S/m;  $\epsilon_r = 41.7$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(8.13, 8.13, 8.13); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.613 W/kg; SAR (10g) = 0.304 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.1 dB

SAR (1g) = 0.564 W/kg; SAR (10g) = 0.276 W/kg;

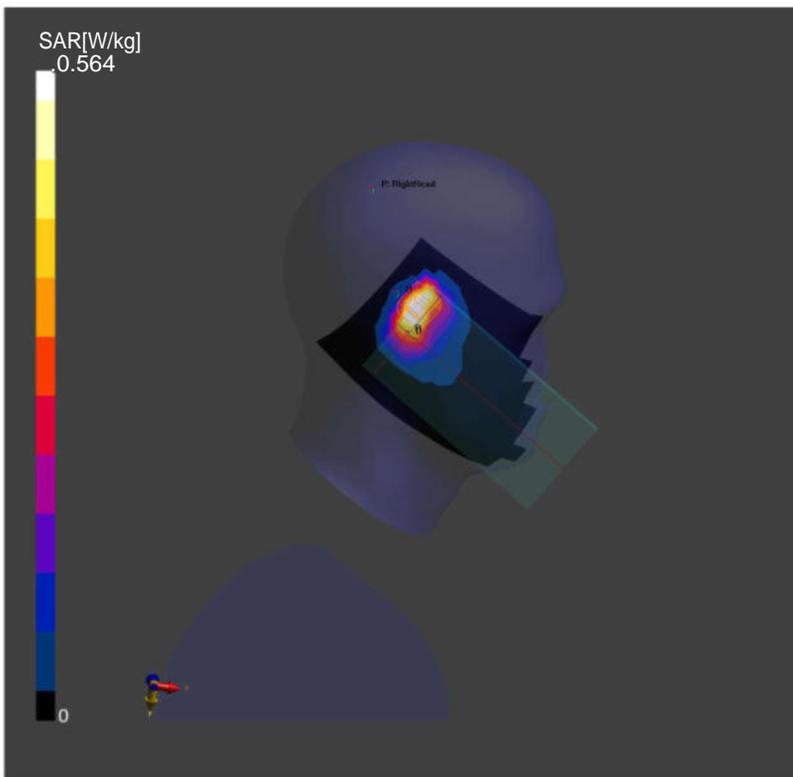

## 11\_WCDMA II\_RMC 12.2Kbps\_Right Tilted\_0mm\_Ch9400

Communication System: Band 2, UTRA/FDD; Frequency: 1880.0  
Medium: HSL. Medium parameters used:  $f= 1880.0$  MHz;  $\sigma= 1.44$  S/m;  $\epsilon_r = 41.7$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(8.13, 8.13, 8.13); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.486 W/kg; SAR (10g) = 0.237 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.06 dB

SAR (1g) = 0.472 W/kg; SAR (10g) = 0.224 W/kg;

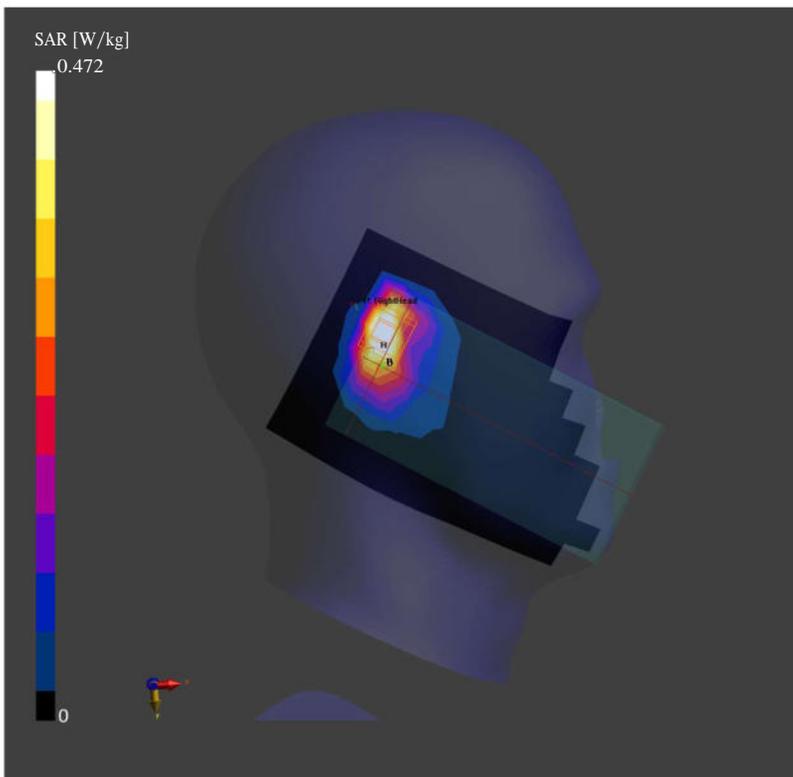

## 12\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Right Titted\_0mm\_Ch26340

Communication System: Band 25, E-UTRA/FDD; Frequency: 1880.0  
Medium: HSL. Medium parameters used:  $f= 1880.0$  MHz;  $\sigma= 1.44$  S/m;  $\epsilon_r = 41.7$   
Ambient Temperature: 23.3°C; Fiquid Temperature: 22.5°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(8.13, 8.13, 8.13); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.558 W/kg; SAR (10g) = 0.274 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.16 dB

SAR (1g) = 0.522 W/kg; SAR (10g) = 0.250 W/kg;

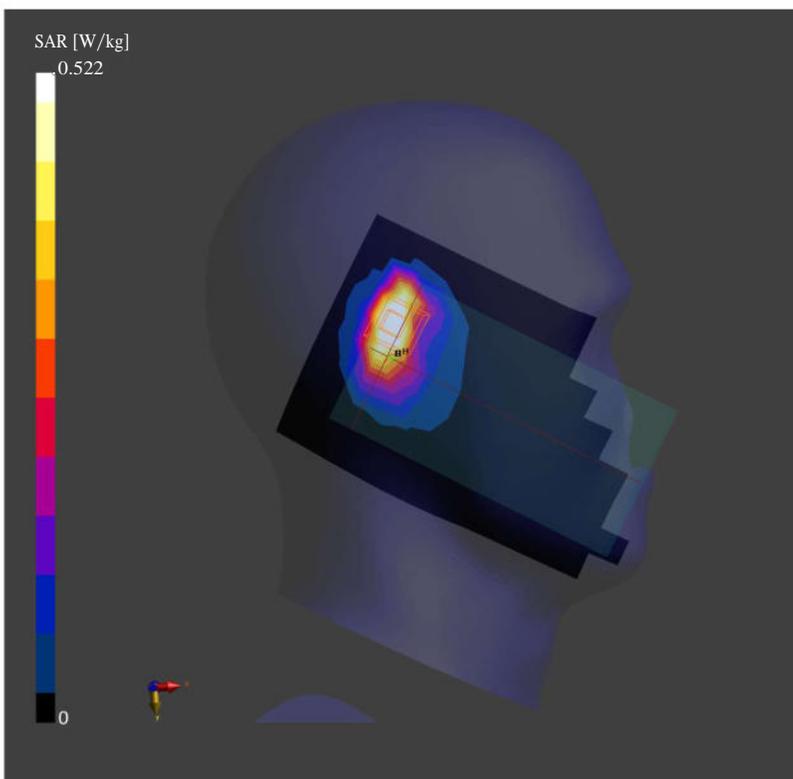

### 13\_LTE Band 7\_20M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch21100

Communication System: Band 7, E-UTRA/FDD; Frequency: 2535.0  
Medium: HSL. Medium parameters used:  $f = 2535.0$  MHz;  $\sigma = 1.93$  S/m;  $\epsilon_r = 40.8$   
Ambient Temperature: 23.3°C; Fiquid Temperature: 22.8°C

#### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(7.26, 7.26, 7.26); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 192.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.569 W/kg; SAR (10g) = 0.257 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm  
Power Drift = 0.02 dB

SAR (1g) = 0.649 W/kg; SAR (10g) = 0.259 W/kg;

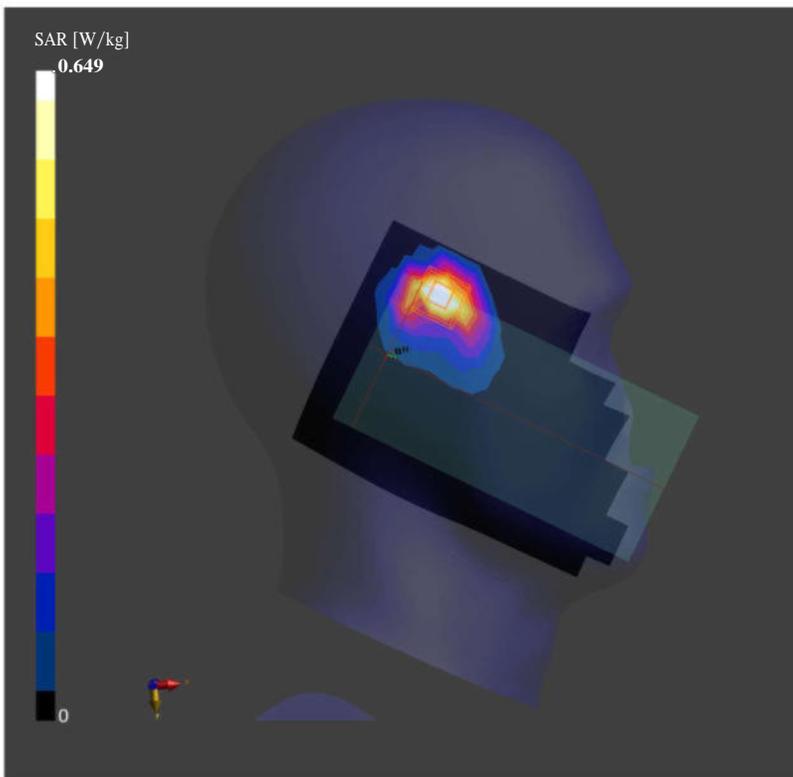

## 14\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Right Tilted\_0mm\_Ch40620

Communication System: Band 41, E-UTRA/TDD; Frequency: 2593.0  
Medium: HSL. Medium parameters used:  $f = 2593.0$  MHz;  $\sigma = 1.94$  S/m;  $\epsilon_r = 40.7$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(7.26, 7.26, 7.26); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 192.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.470 W/kg; SAR (10g) = 0.203 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm  
Power Drift = 0.15 dB

SAR (1g) = 0.470 W/kg; SAR (10g) = 0.196 W/kg;

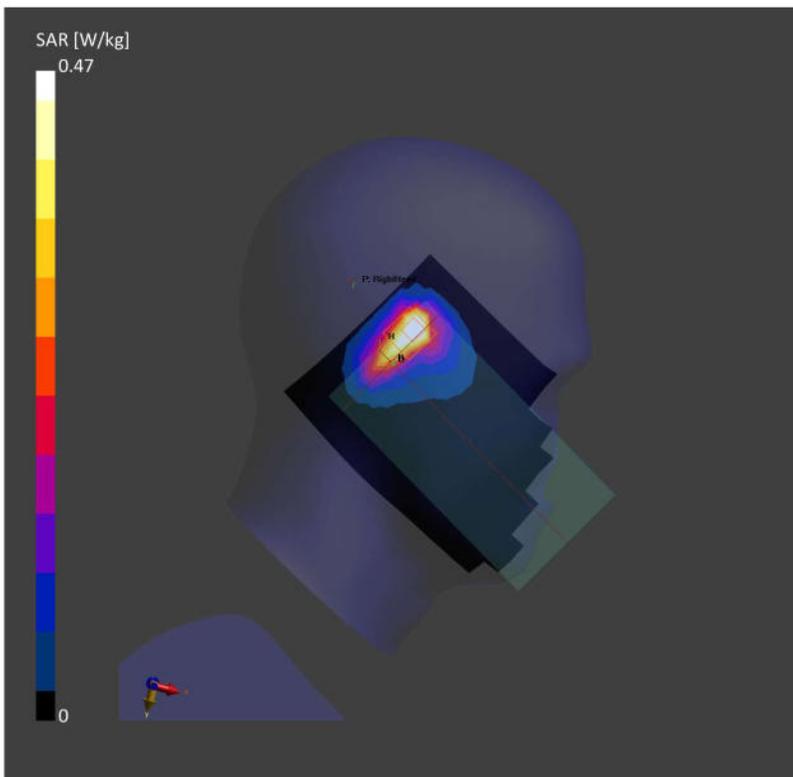

## 15\_FR1 n7\_40M\_QPSK\_1RB\_1Offset\_Right Cheek\_0mm\_Ch507000

Communication System: Band n7; Frequency: 2535.0

Medium: HSL. Medium parameters used:  $f = 2535.0$  MHz;  $\sigma = 1.93$  S/m;  $\epsilon_r = 40.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.26, 7.26, 7.26); Calibrated: 2021-06-24

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead

- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.686 W/kg; SAR (10g) = 0.343 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.780 W/kg; SAR (10g) = 0.380 W/kg;

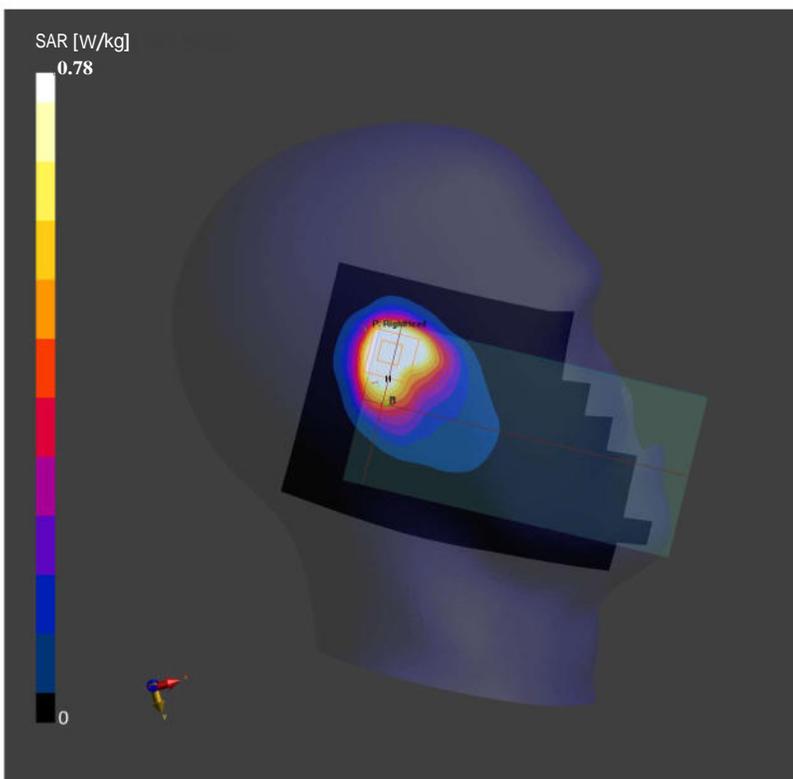

## 16\_FR1 n41\_100M\_QPSK\_1RB\_1Offset\_Right Tilted\_0mm\_Ch518598

Communication System: Band n41; Frequency: 2593.0  
Medium: HSL. Medium parameters used:  $f = 2593.0$  MHz;  $\sigma = 1.94$  S/m;  $\epsilon_r = 40.7$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(7.26, 7.26, 7.26); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 192.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.869 W/kg; SAR (10g) = 0.391 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm  
Power Drift = 0.01 dB

SAR (1g) = 0.911 W/kg; SAR (10g) = 0.388 W/kg;

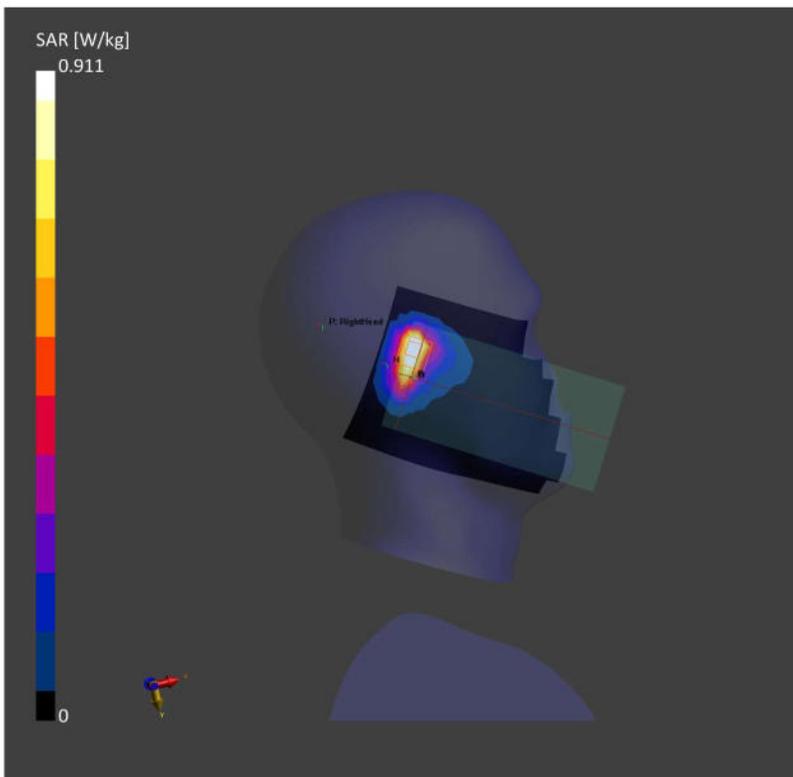

## 17\_LTE Band 42\_20M\_QPSK\_50RB\_0Offset\_Right Tilted\_0mm\_Ch42590

Communication System: Band 42, E-UTRA/TDD; Frequency: 3500.0  
Medium: HSL. Medium parameters used:  $f = 3500.0$  MHz;  $\sigma = 2.76$  S/m;  $\epsilon_r = 39.1$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.4°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(6.69, 6.69, 6.69); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.689 W/kg; SAR (10g) = 0.269 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.14 dB

SAR (1g) = 0.694 W/kg; SAR (10g) = 0.289 W/kg;

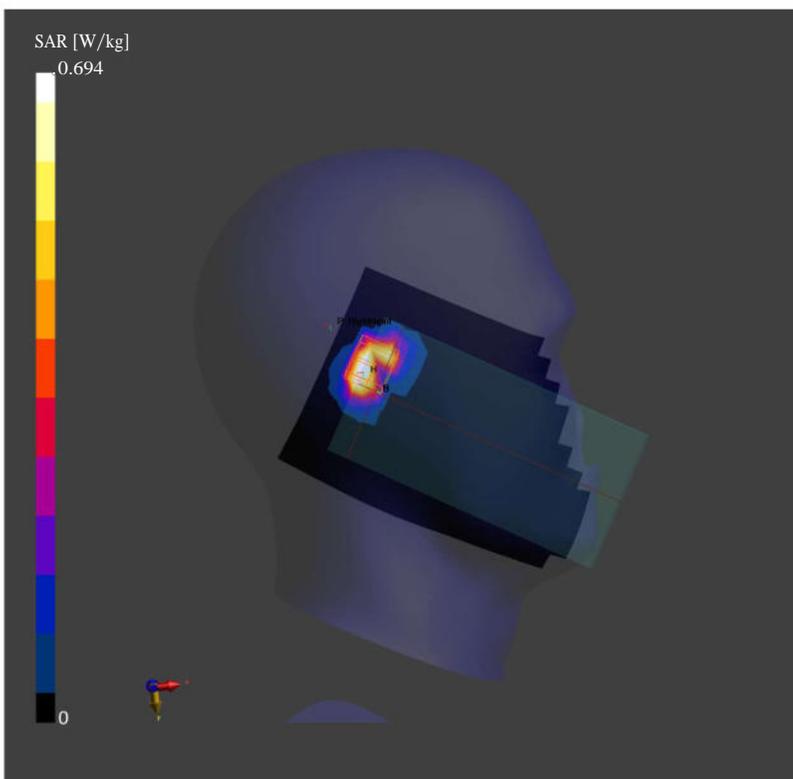

## 18\_LTE Band 48\_20M\_QPSK\_1RB\_0Offset\_Right Tilted\_0mm\_Ch56640

Communication System: Band 48, E-UTRA/TDD; Frequency: 3690.0  
Medium: HSL. Medium parameters used:  $f= 3690.0$  MHz;  $\sigma= 2.90$  S/m;  $\epsilon_r = 38.9$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(6.64, 6.64, 6.64); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.778 W/kg; SAR (10g) = 0.268 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.03 dB

SAR (1g) = 0.714 W/kg; SAR (10g) = 0.306 W/kg;

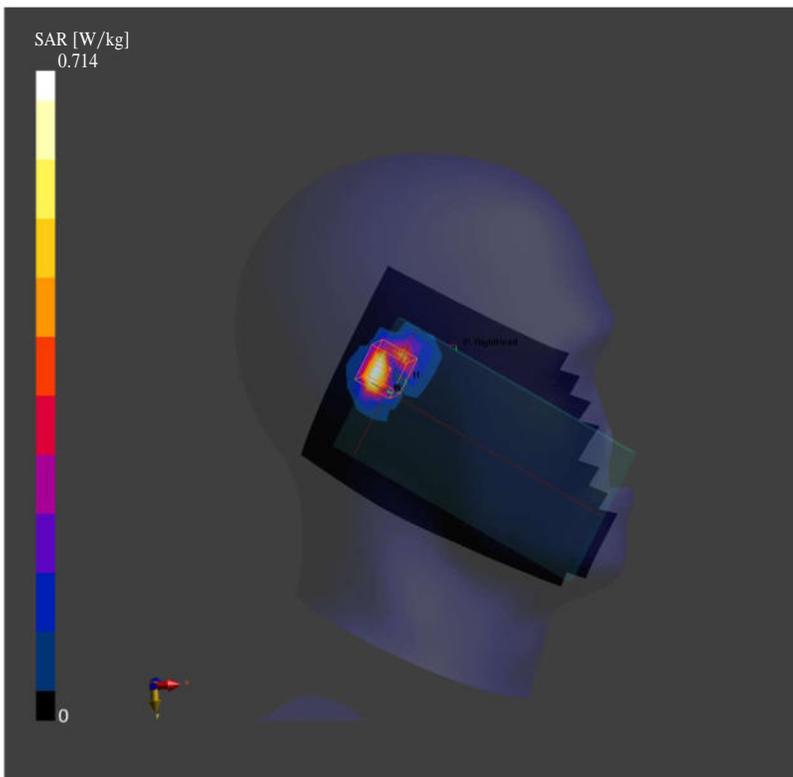

## 19\_FR1 n77\_100M\_QPSK\_1RB\_1Offset\_Right Cheek\_0mm\_Ch633334

Communication System: Band n77; Frequency: 3500.0

Medium: HSL. Medium parameters used:  $f = 3500.0$  MHz;  $\sigma = 2.85$  S/m;  $\epsilon_r = 38.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(6.69, 6.69, 6.69); Calibrated: 2021-06-24

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead


- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.465 W/kg; SAR (10g) = 0.200 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.11 dB

SAR (1g) = 0.593 W/kg; SAR (10g) = 0.208 W/kg;

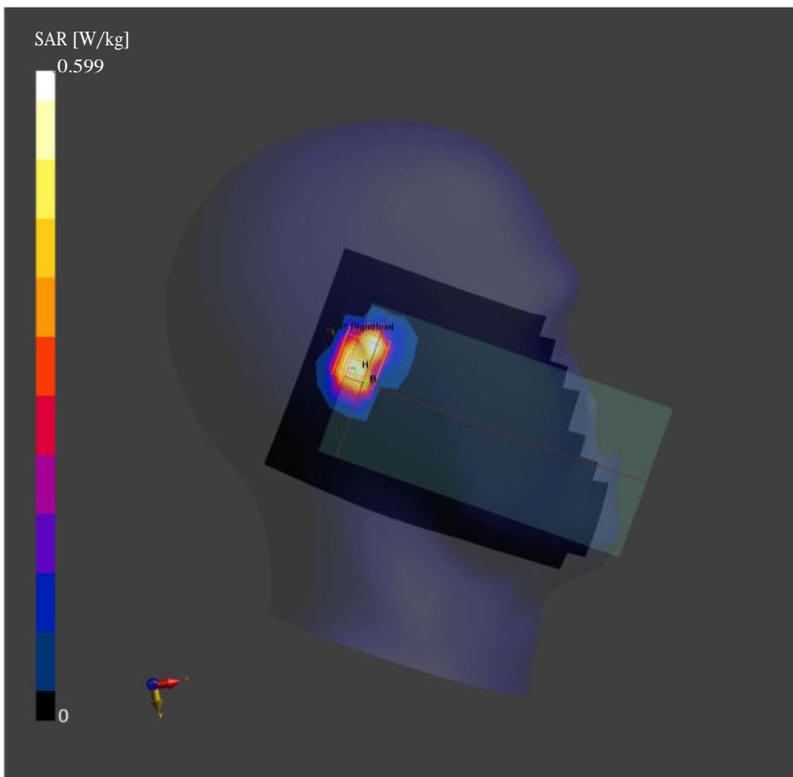

**20\_FR1 n78\_100M\_QPSK\_1RB\_1Offset\_Right Cheek\_0mm\_Ch633334**

Communication System: Band n78; Frequency: 3500.01

Medium: HSL. Medium parameters used:  $f= 3500.01$  MHz;  $\sigma= 2.85$  S/m;  $\epsilon_r= 38.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(6.69, 6.69, 6.69); Calibrated: 2021-06-24

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: RightHead

- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.344 W/kg; SAR (10g) = 0.139 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.712 W/kg; SAR (10g) = 0.139 W/kg;

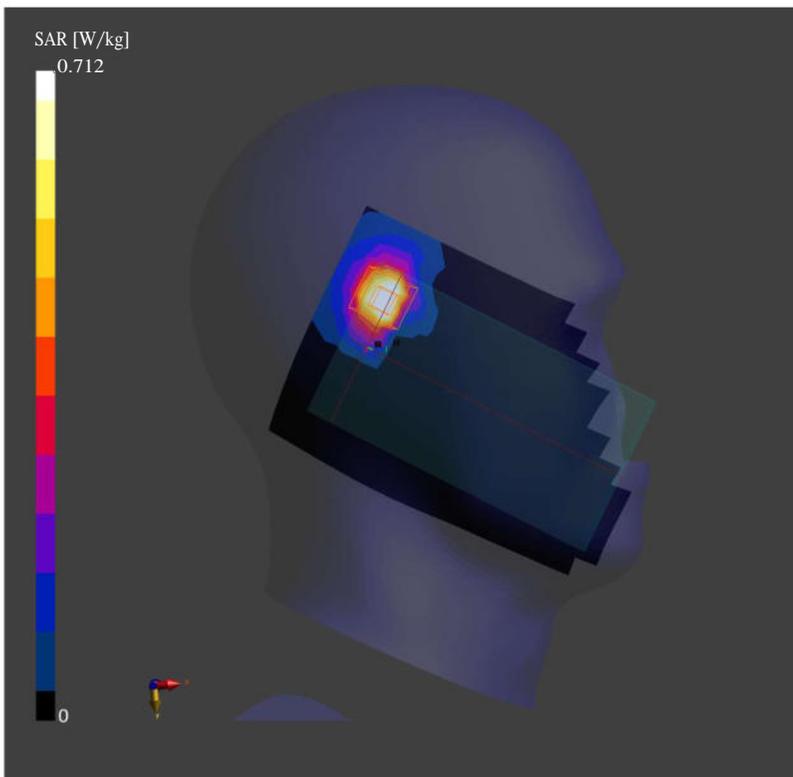

## 21\_WLAN 2.4G\_802.11b\_1 Mbps\_Left Tilted\_0mm Ch11


Communication System: WLAN 2.4GHz; Frequency: 2462.0  
Medium: HSL. Medium parameters used:  $f= 2462.0$  MHz;  $\sigma= 1.82$  S/m;  $\epsilon_r = 41.0$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.53, 7.53, 7.53); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 192.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm  
SAR (1g) = 0.591 W/kg; SAR (10g) = 0.275 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm  
Power Drift = -0.02 dB  
SAR (1g) = 0.587 W/kg; SAR (10g) = 0.245 W/kg;

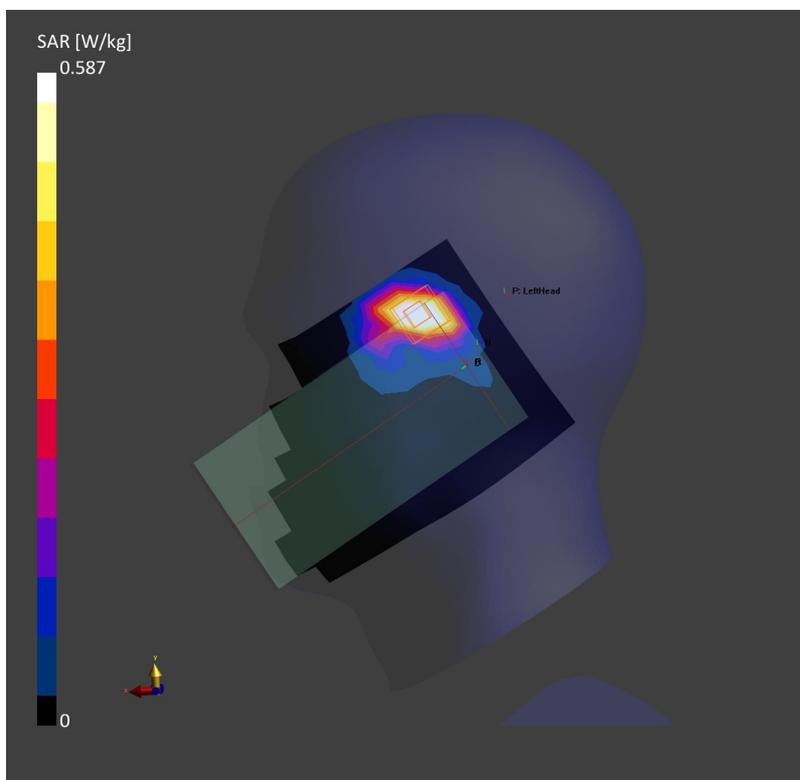

## 22\_Bluetooth\_1 Mbps\_Left Tilted\_0mm Ch39

Communication System: ISM 2.4 GHz Band; Frequency: 2441.0

Medium: HSL. Medium parameters used:  $f= 2441.0$  MHz;  $\sigma= 1.80$  S/m;  $\epsilon_r = 41.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.53, 7.53, 7.53); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (120.0 mm x 192.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.371 W/kg; SAR (10g) = 0.168 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.455 W/kg; SAR (10g) = 0.176 W/kg;

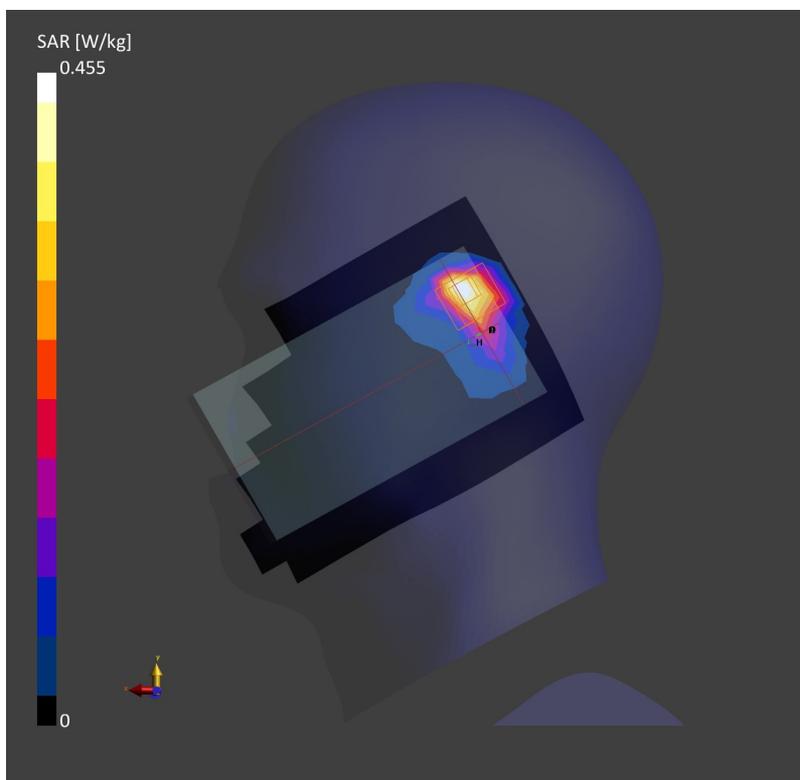

### 23\_WLAN 5G\_802.11a\_6 Mbps\_Left Cheek\_0mm Ch64


Communication System: WLAN 5GHz; Frequency: 5320.0  
Medium: HSL. Medium parameters used:  $f= 5320.0$  MHz;  $\sigma= 4.65$  S/m;  $\epsilon_r = 36.2$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(5.38, 5.38, 5.38); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.652 W/kg; SAR (10g) = 0.221 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.03 dB  
SAR (1g) = 0.640 W/kg; SAR (10g) = 0.207 W/kg;

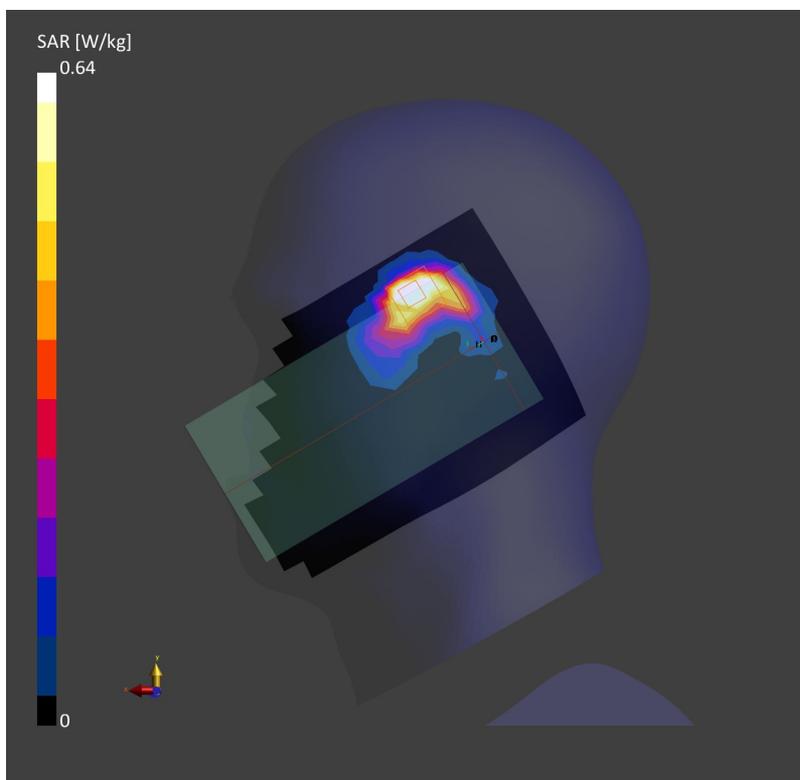

## 24\_WLAN 5G\_802.11a\_6 Mbps\_Left Cheek\_0mm Ch116

Communication System: WLAN 5GHz; Frequency: 5580.0

Medium: MSL. Medium parameters used:  $f= 5580.0$  MHz;  $\sigma= 4.95$  S/m;  $\epsilon_r = 35.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.68, 4.68, 4.68); Calibrated: 2021-06-24
- Sensor-Surface: 1.4mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.381 W/kg; SAR (10g) = 0.143 W/kg;

**Zoom Scan ( 24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.386W/kg; SAR (10g) = 0.145W/kg;

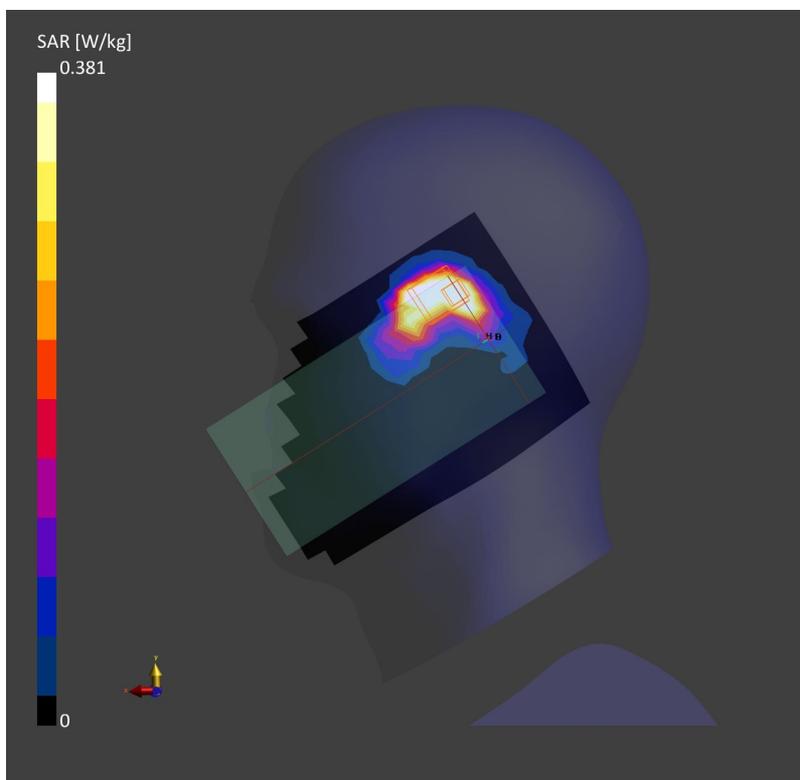

## 25\_WLAN 5G\_802.11a\_6 Mbps\_Left Tilted\_0mm Ch157


Communication System: WLAN 5GHz; Frequency: 5785.0  
Medium: HSL. Medium parameters used:  $f= 5785.0$  MHz;  $\sigma= 5.23$  S/m;  $\epsilon_r = 35.3$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.82, 4.82, 4.82); Calibrated: 2021-06-24
- Sensor-Surface: 1.4mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.713 W/kg; SAR (10g) = 0.215 W/kg;

**Zoom Scan ( 24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.09 dB  
SAR (1g) = 0.713W/kg; SAR (10g) = 0.234W/kg;

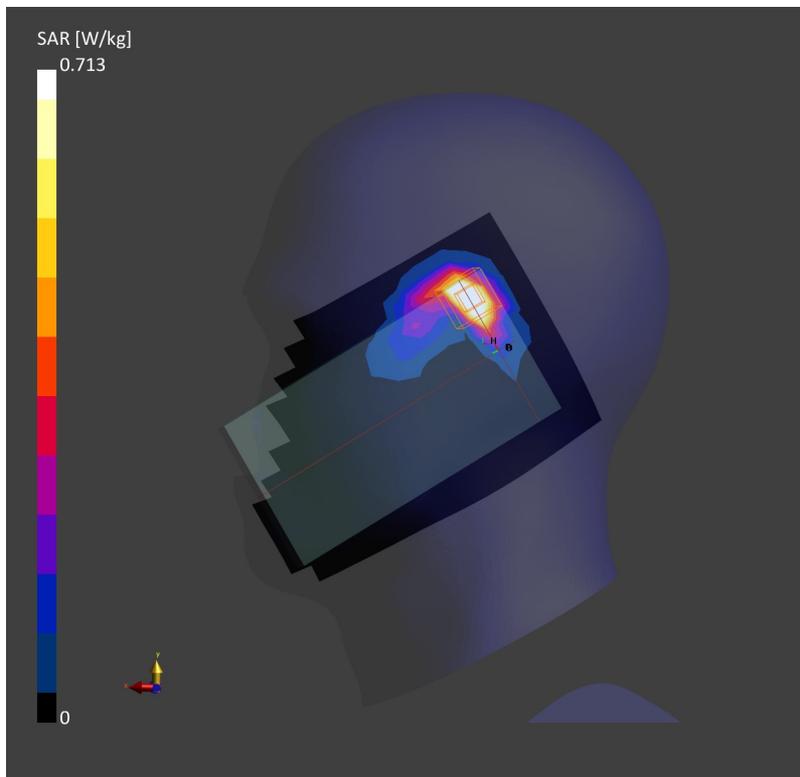

**26\_LTE Band 12\_10M\_QPSK\_25RB\_0Offset\_Left Side\_10mm\_Ch23095**

Communication System: Band 12, E-UTRA/FDD; Frequency: 707.5  
Medium: HSL. Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.882$  S/m;  $\epsilon_r = 42.5$   
Ambient Temperature: 23.3°C; Fiquid Temperature: 22.6°C

**DASY6 Configuration:**


- Probe: EX3DV4 - SN7592; ConvF(10.25, 10.25, 10.25); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (48.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.446 W/kg; SAR (10g) = 0.266 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = 0.01 dB

SAR (1g) = 0.443 W/kg; SAR (10g) = 0.254 W/kg;

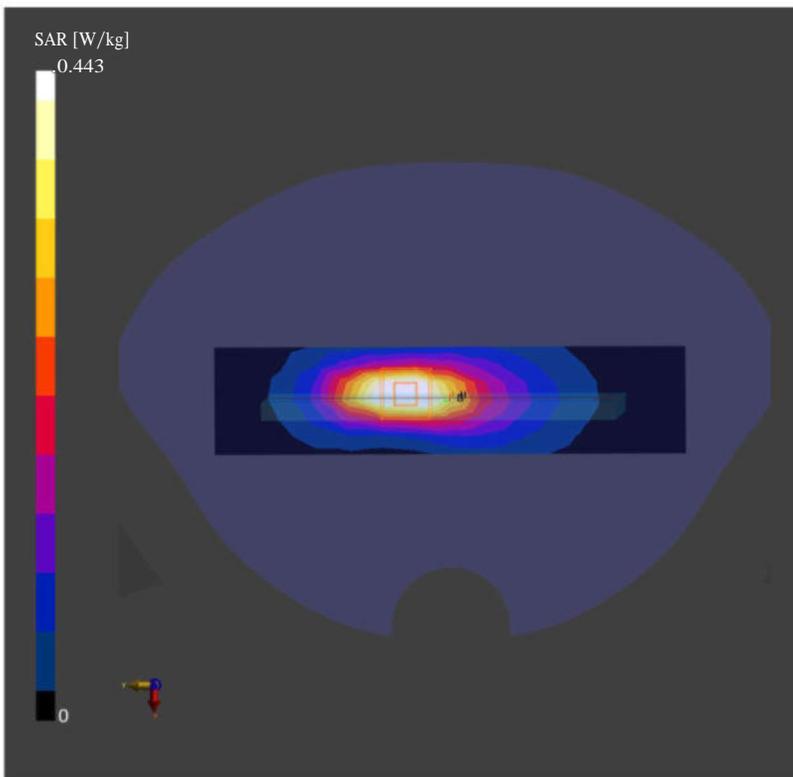

## 27\_LTE Band 13\_10M\_QPSK\_1RB\_0Offset\_Left Side\_10mm\_Ch23230

Communication System: Band 13, E-UTRA/FDD; Frequency: 782.0  
Medium: HSL. Medium parameters used:  $f= 782.0$  MHz;  $\sigma= 0.910$  S/m;  $\epsilon_r = 42.3$   
Ambient Temperature: 23.3°C; Fiquid Temperature: 22.6°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(10.25, 10.25, 10.25); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (48.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.502 W/kg; SAR (10g) = 0.300 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.03 dB

SAR (1g) = 0.502 W/kg; SAR (10g) = 0.285 W/kg;

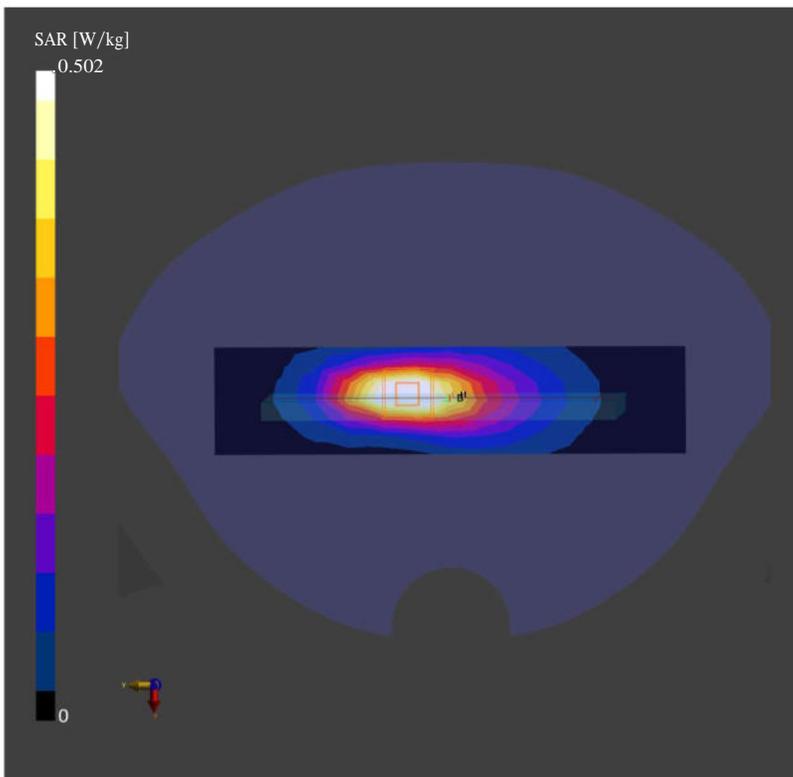

## 28\_GSM850\_GPRS (4 Tx slots)\_Left Side\_10mm\_Ch189

Communication System: GSM 850; Frequency: 836.4

Medium: HSL. Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.929$  S/m;  $\epsilon_r = 42.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (48.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.474 W/kg; SAR (10g) = 0.280 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.471 W/kg; SAR (10g) = 0.267 W/kg;

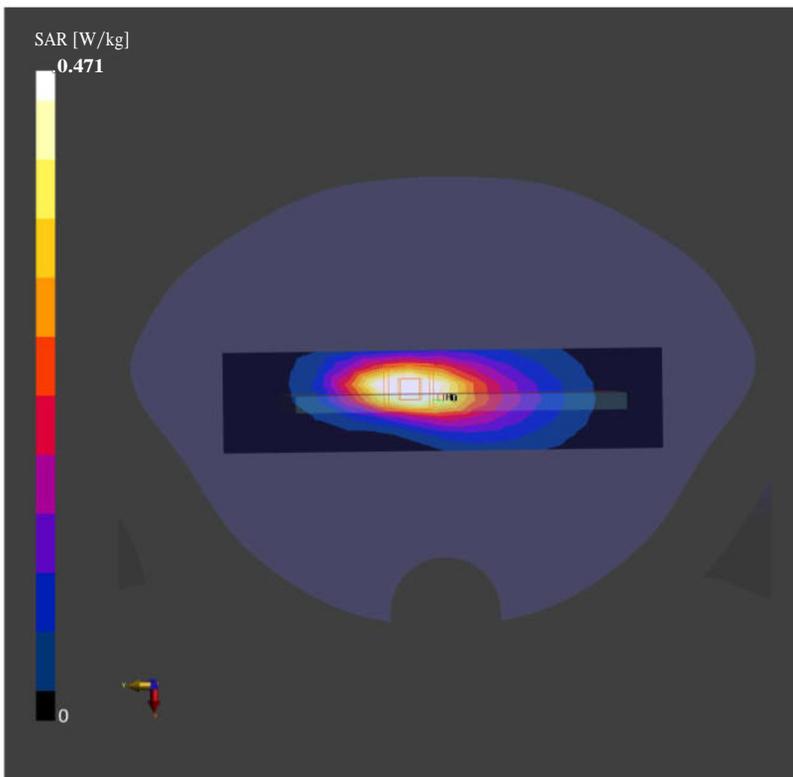

## 29\_WCDMA V\_RMC 12.2Kbps\_Left Side\_10mm\_Ch4182

Communication System: Band 5, UTRA/FDD; Frequency: 836.4  
Medium: HSL. Medium parameters used:  $f= 836.4$  MHz;  $\sigma= 0.929$  S/m;  $\epsilon_r = 42.1$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (48.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.533 W/kg; SAR (10g) = 0.314 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.520 W/kg; SAR (10g) = 0.282 W/kg;

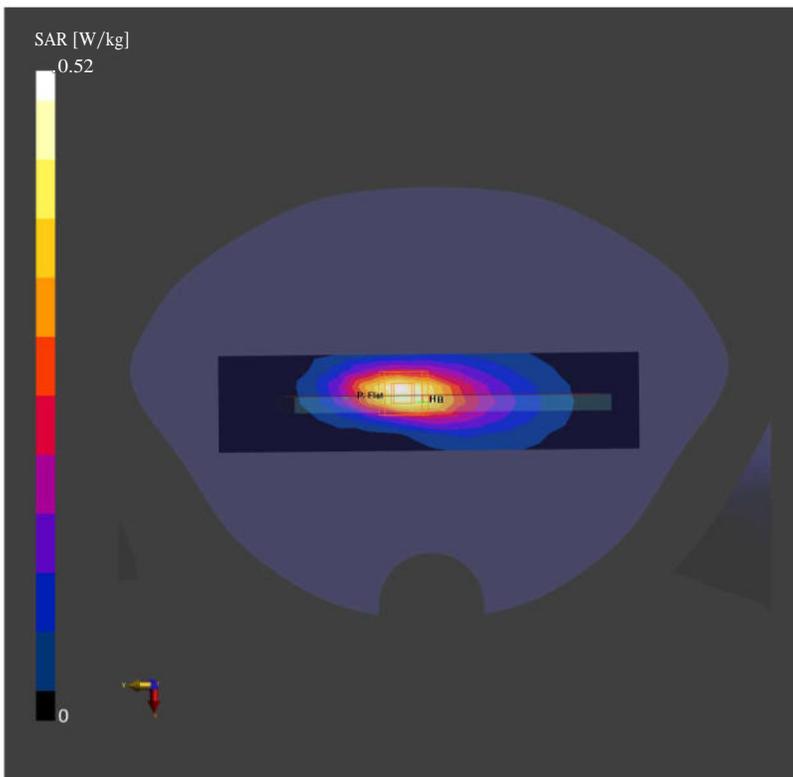

### 30\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch26865

Communication System: Band 26 E-UTRA/FDD; Frequency: 831.5  
Medium: HSL. Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 42.1$   
Ambient Temperature: 23.2°C; Fiquid Temperature: 22.7°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.461 W/kg; SAR (10g) = 0.300 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.05 dB

SAR (1g) = 0.467 W/kg; SAR (10g) = 0.277 W/kg;

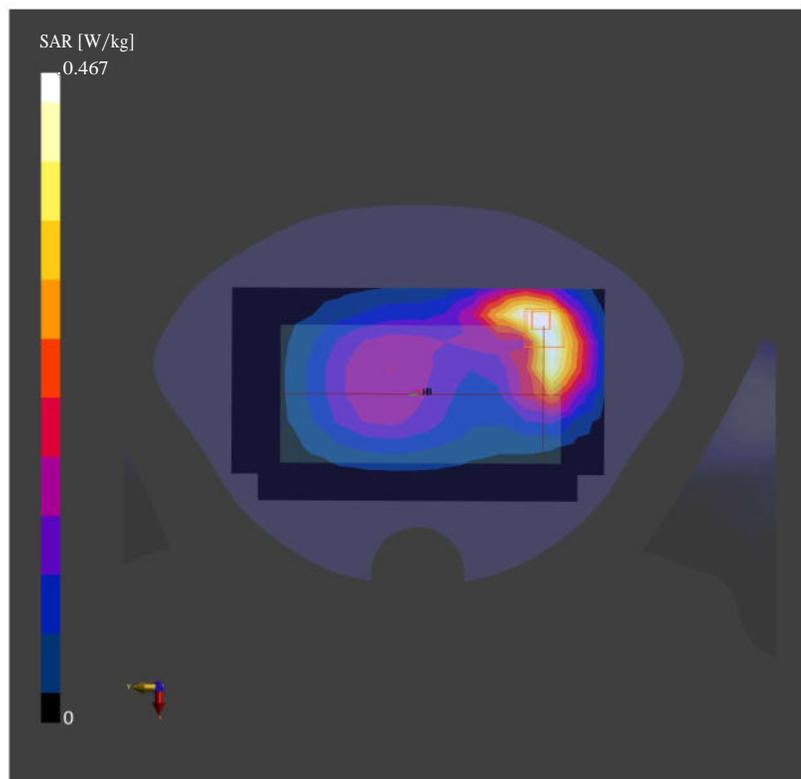

**31\_FR1 n5\_20M\_QPSK\_50RB\_28Offset\_Left Side \_10mm\_Ch167300**

Communication System: Band n5; Frequency: 836.5

Medium: HSL. Medium parameters used:  $f= 836.5$  MHz;  $\sigma= 0.929$  S/m;  $\epsilon_r = 42.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(9.98, 9.98, 9.98); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (60.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.474 W/kg; SAR (10g) = 0.298 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.572 W/kg; SAR (10g) = 0.314 W/kg;

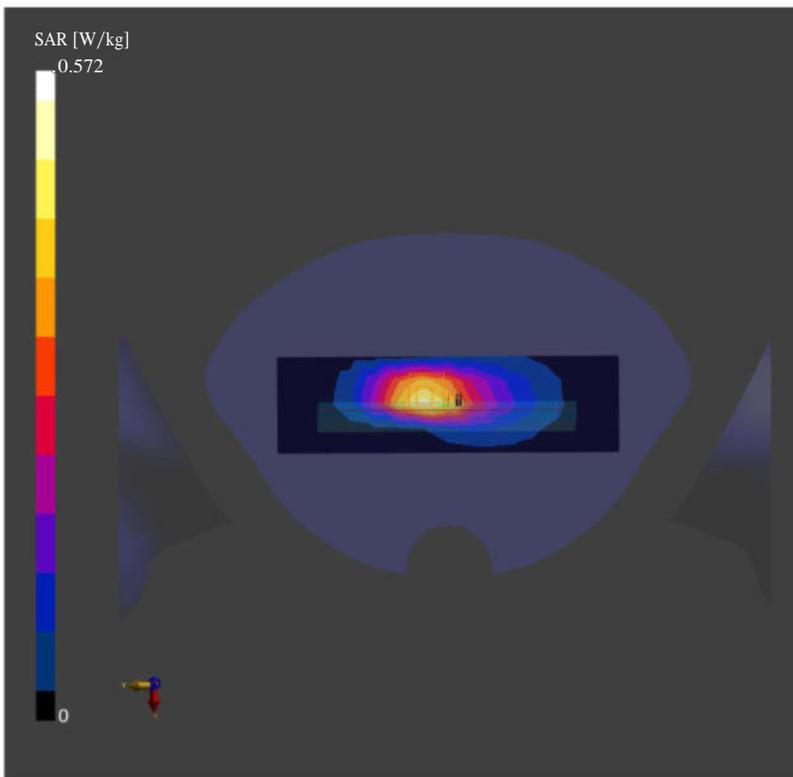

### 32\_WCDMA IV\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch1413

Communication System: Band 4, UTRA/FDD; Frequency: 1732.6  
Medium: HSL. Medium parameters used:  $f= 1732.6$  MHz;  $\sigma= 1.37$  S/m;  $\epsilon_r = 40.1$   
Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926


**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.735 W/kg; SAR (10g) = 0.405 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.738 W/kg; SAR (10g) = 0.409 W/kg;

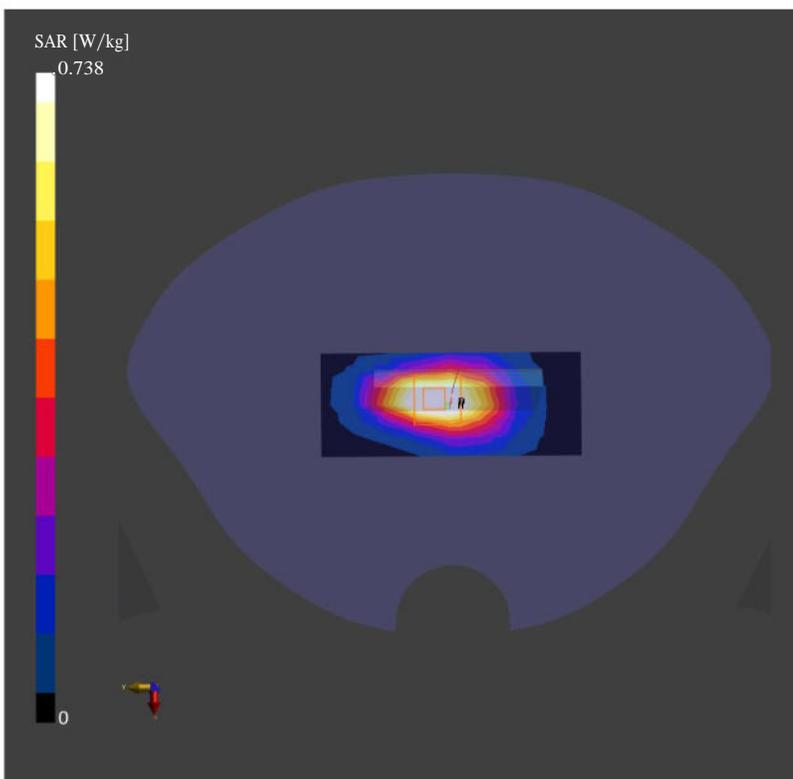

### 33\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_10mm\_Ch132572

Communication System: Band 66, E-UTRA/FDD; Frequency: 1770.0  
Medium: HSL. Medium parameters used:  $f= 1770.0$  MHz;  $\sigma= 0.882$  S/m;  $\epsilon_r = 39.9$   
Ambient Temperature: 23.1°C; Fiquid Temperature: 22.6°C

#### DASY6 Configuration:


- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.851 W/kg; SAR (10g) = 0.468 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm  
Power Drift = -0.01 dB

SAR (1g) = 0.857 W/kg; SAR (10g) = 0.472 W/kg;

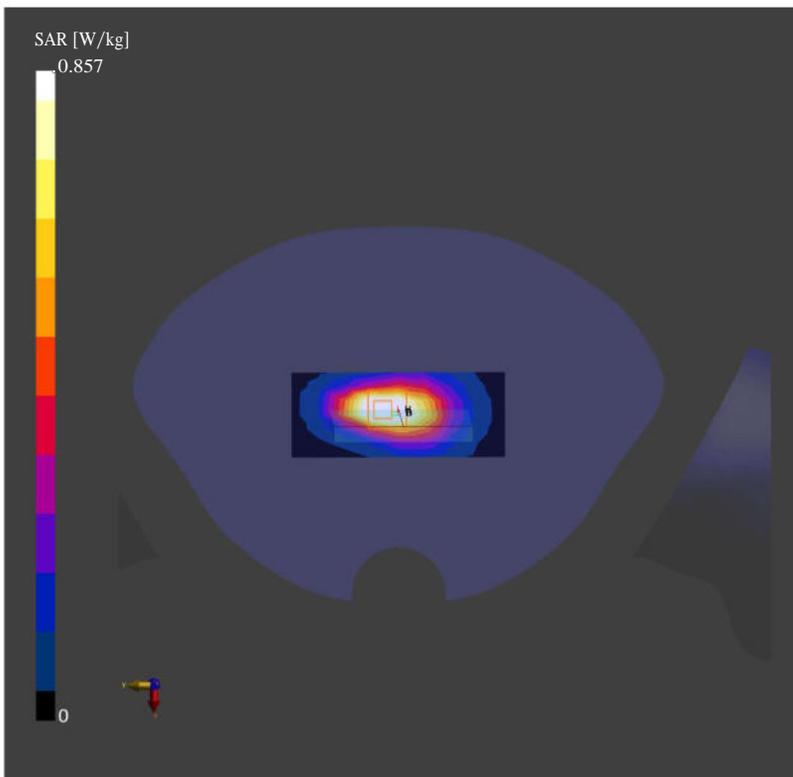

**34\_FR1 n66\_40M\_QPSK\_108RB\_54Offset\_Bottom Side \_10mm\_Ch349000**

Communication System: Band n66; Frequency: 1745.0  
Medium: HSL. Medium parameters used:  $f= 1745.0$  MHz;  $\sigma= 1.38$  S/m;  $\epsilon_r = 40.0$   
Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7592; ConvF(8.45, 8.45, 8.45); Calibrated: 2021-06-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Snl 691; Calibrated: 2021-10-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926

**Area Scan (60.0 mm x 120.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.540 W/kg; SAR (10g) = 0.311 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.591 W/kg; SAR (10g) = 0.332 W/kg;

