



FCC RADIO TEST REPORT

FCC ID : 2AFZZ123G
Equipment : Mobile Phone
Brand Name : XIAOMI
Model Name : 2201123G
Applicant : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi Middle
Road, Haidian District, Beijing, China, 100085
Manufacturer : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi Middle
Road, Haidian District, Beijing, China, 100085
Standard : FCC Part 15 Subpart C §15.247

The product was received on Nov. 15, 2021 and testing was performed from Nov. 19, 2021 to Dec. 08, 2021. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	20
3.3 Power Spectral Density Measurement	21
3.4 Conducted Band Edges and Spurious Emission Measurement	30
3.5 Radiated Band Edges and Spurious Emission Measurement	41
3.6 AC Conducted Emission Measurement.....	45
3.7 Antenna Requirements	47
4 List of Measuring Equipment	48
5 Uncertainty of Evaluation.....	50
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR1N0901B	01	Initial issue of report	Dec. 20, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	6.13 dB under the limit at 31.940 MHz
3.6	15.207	AC Conducted Emission	Pass	15.90 dB under the limit at 2.396 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Lewis Ho

Report Producer: Ruby Zou



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11ax, NFC, WPC/WPT, and GNSS.

Product Feature	
Sample 1	EMMC 8G + 256GB
Sample 2	EMMC 12G + 256GB
Sample 3	EMMC 8G + 128GB
Antenna Type	WWAN: PIFA Antenna WLAN 2.4GHz: <Ant. 16>: PIFA Antenna <Ant. 18>: PIFA Antenna WLAN 5GHz: <Ant. 17>: PIFA Antenna <Ant. 18>: PIFA Antenna WLAN 6GHz: <Ant. 17>: PIFA Antenna <Ant. 18>: PIFA Antenna Bluetooth: <Ant. 16>: PIFA Antenna <Ant. 18>: PIFA Antenna GPS/Glonass/BDS/Galileo/SBAS/QZSS: PIFA Antenna NFC: Planar Antenna WPC/WPT: Coil Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Ant. 16>: -2.5 <Ant. 18>: -3.0

Remark: The above EUT's information is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and WPC Charging Mode, and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane and WPC Charging Mode as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	<Ant. 18>:
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
	Mode 7: Bluetooth Tx CH39_2480 MHz_2Mbps with Wireless Charger
<Ant. 16>:	
Mode 1: Bluetooth Tx CH39_2480 MHz_2Mbps	
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + MPEG4 + USB Cable 1 (Charging from AC Adapter) for Sample 1
Remark: For Radiated Test Cases, the tests were performed with USB Cable 1 and Sample 1	

2.3 Connection Diagram of Test System

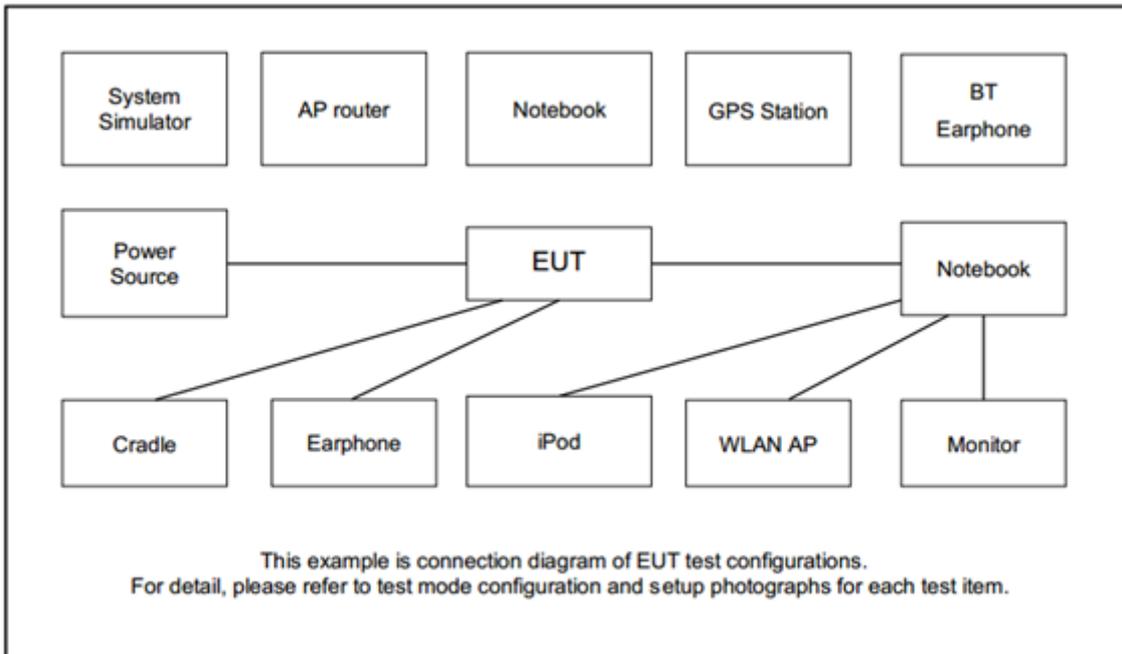

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Wireless Charger	YU-live	K8	N/A	N/A	N/A
2.	Notebook	DELL	Latitude5310	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	DELL	Latitude3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
5.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

The RF test items, make the EUT (SW: MIUI13) get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

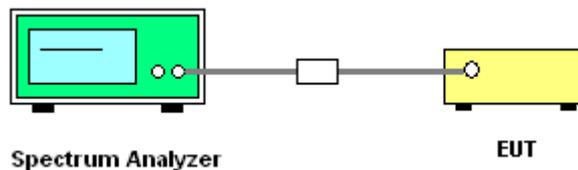




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


<Ant. 16>

<1Mbps>

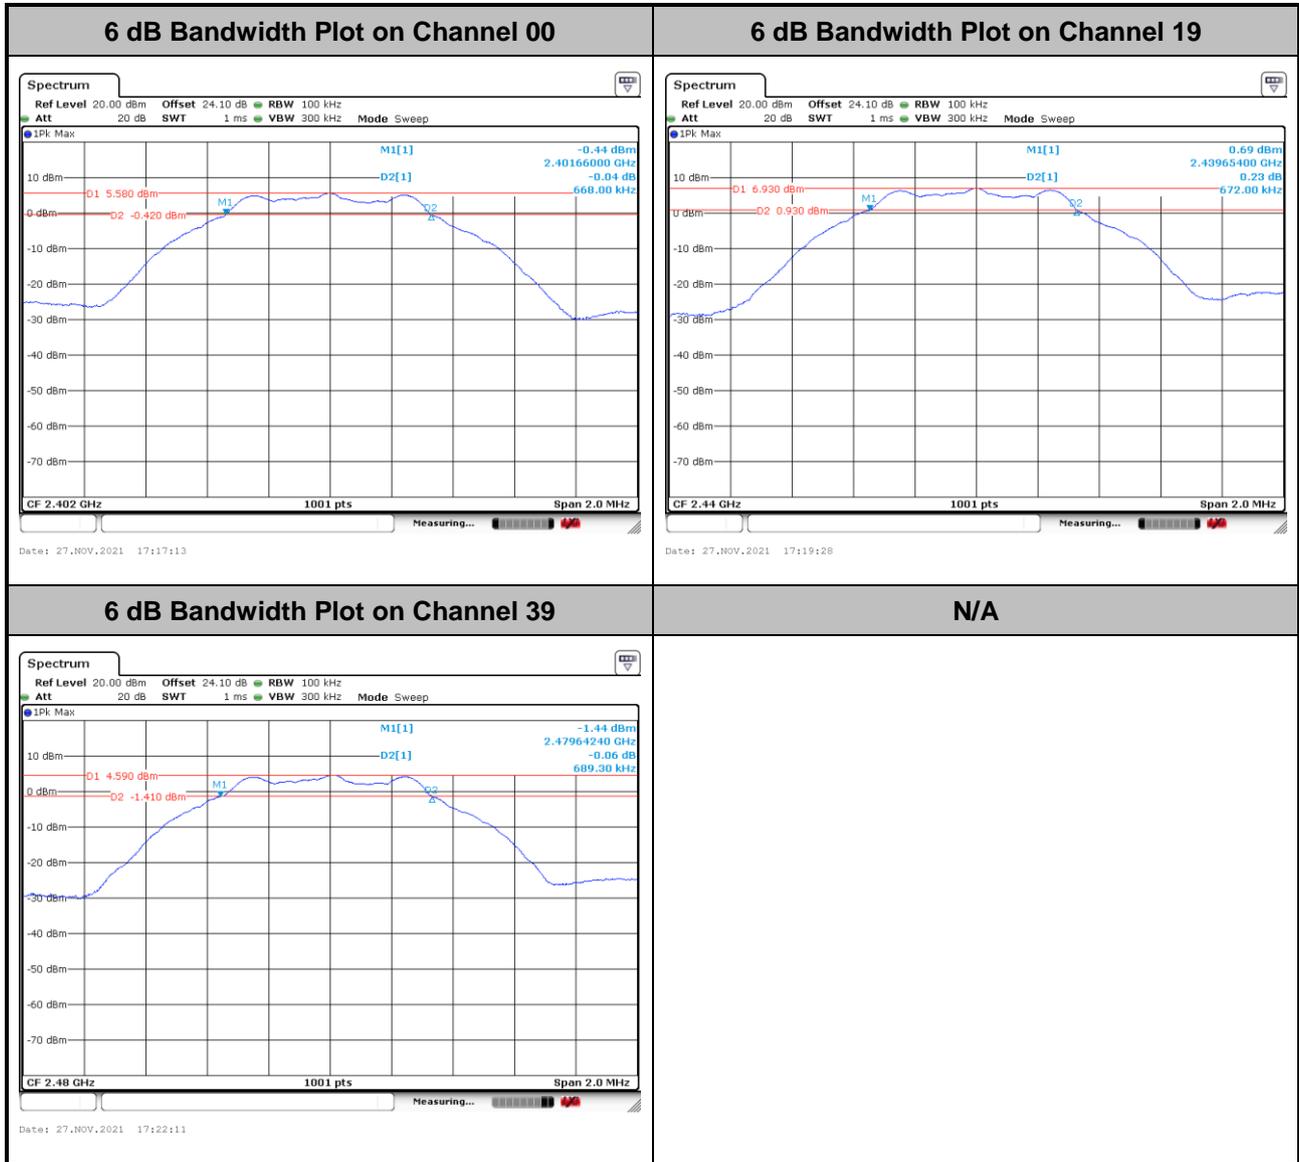




<2Mbps>

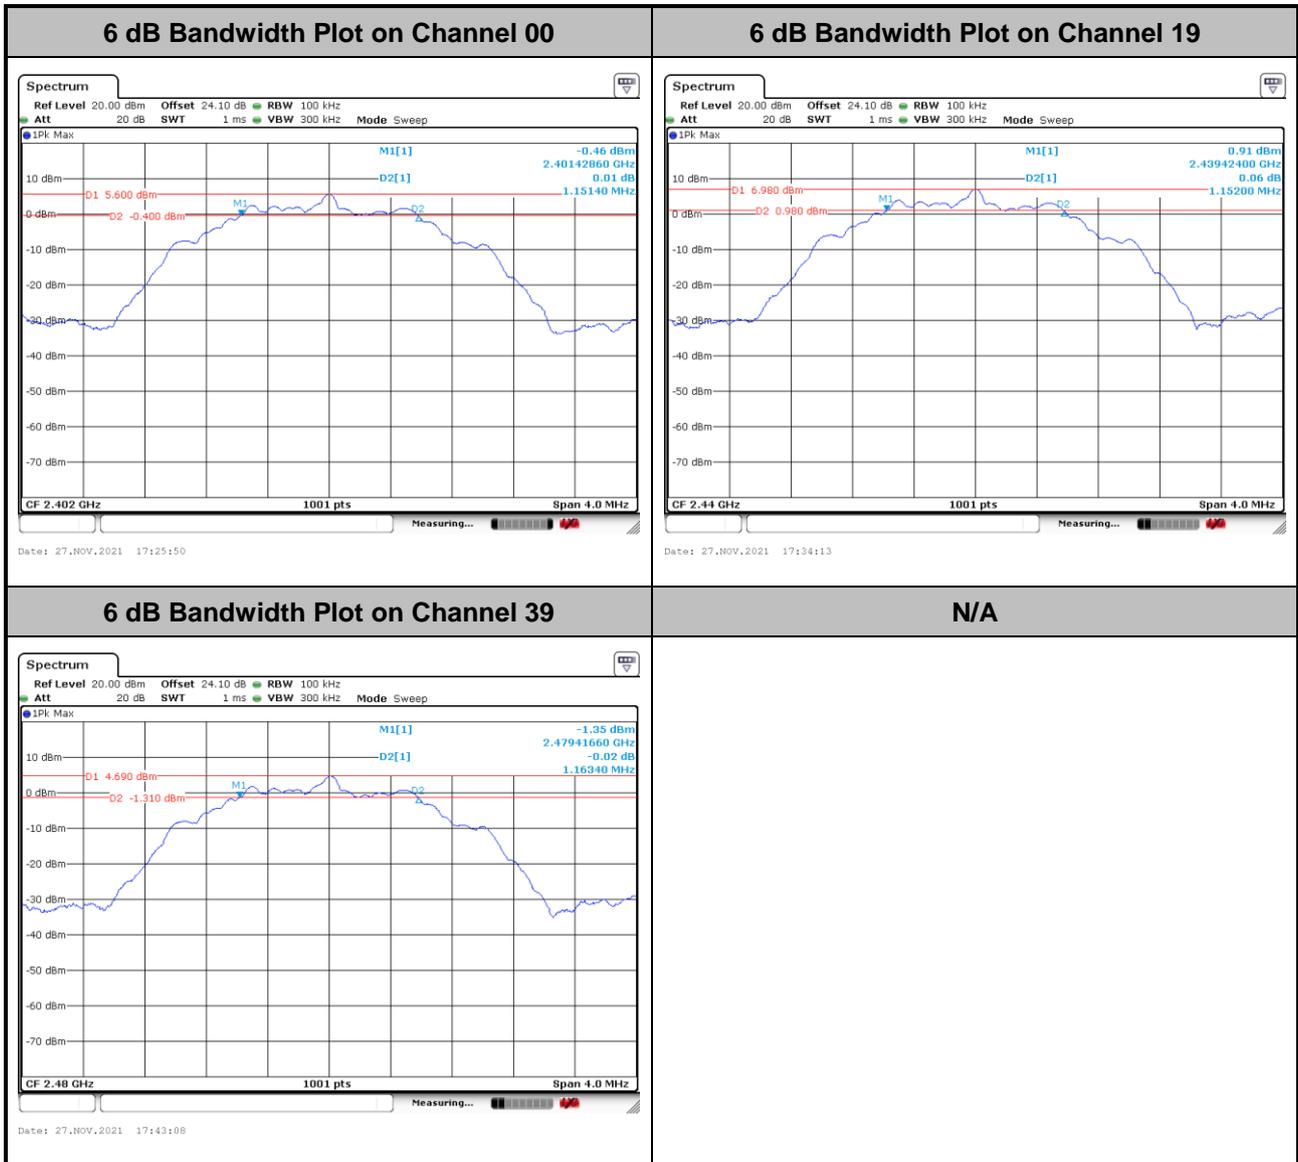




<Ant. 18>

<1Mbps>

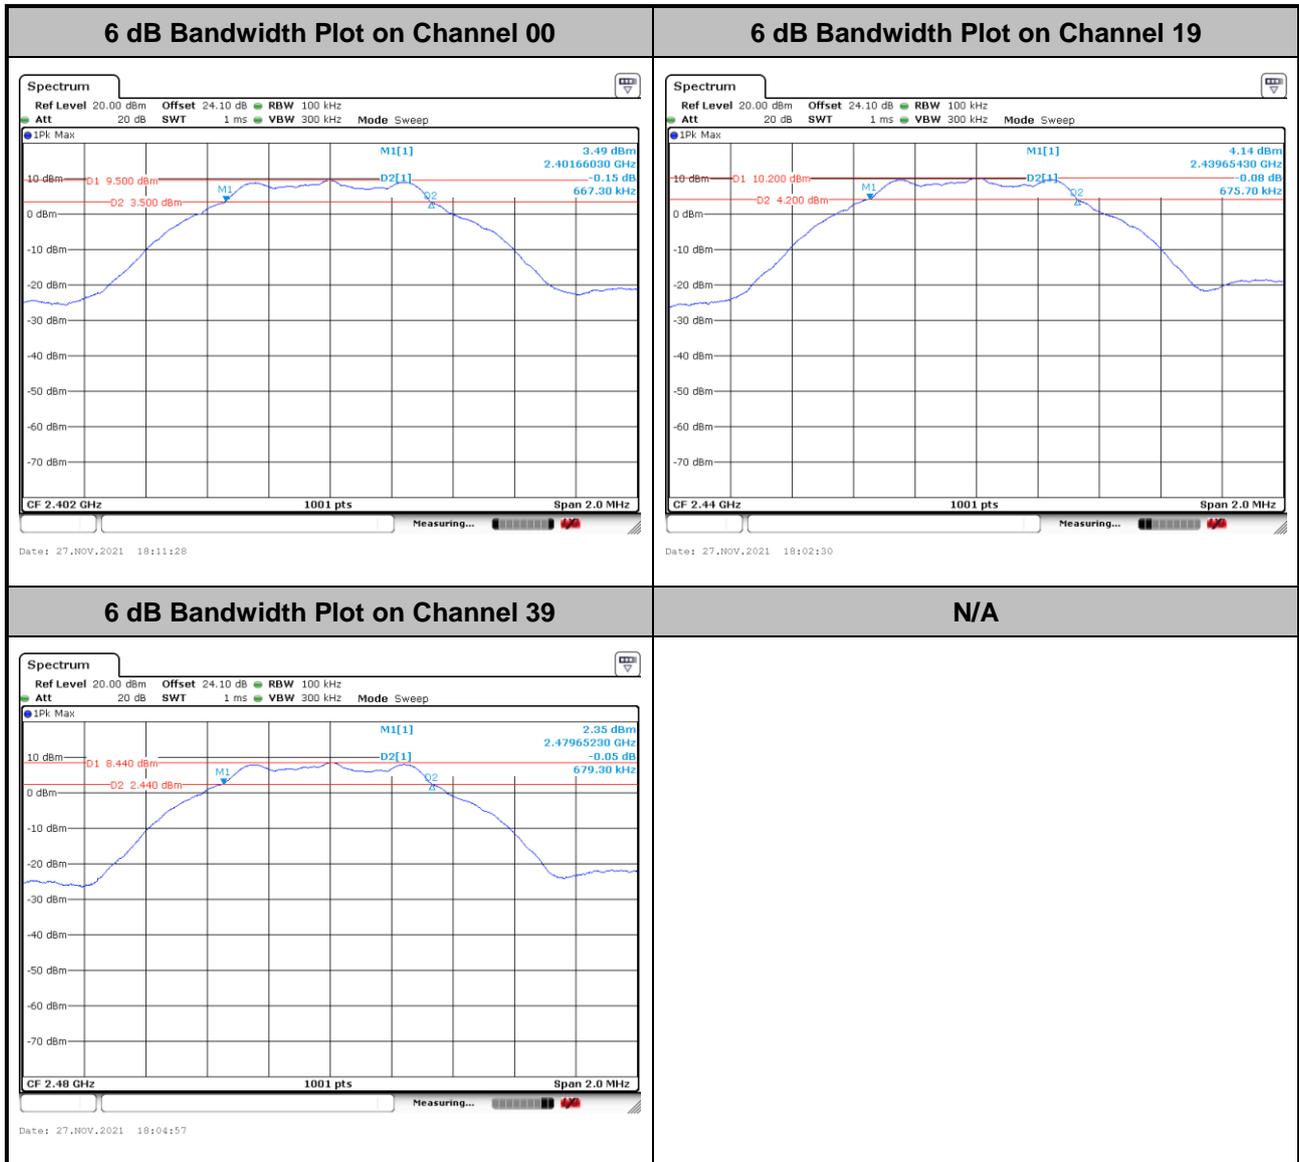



<2Mbps>

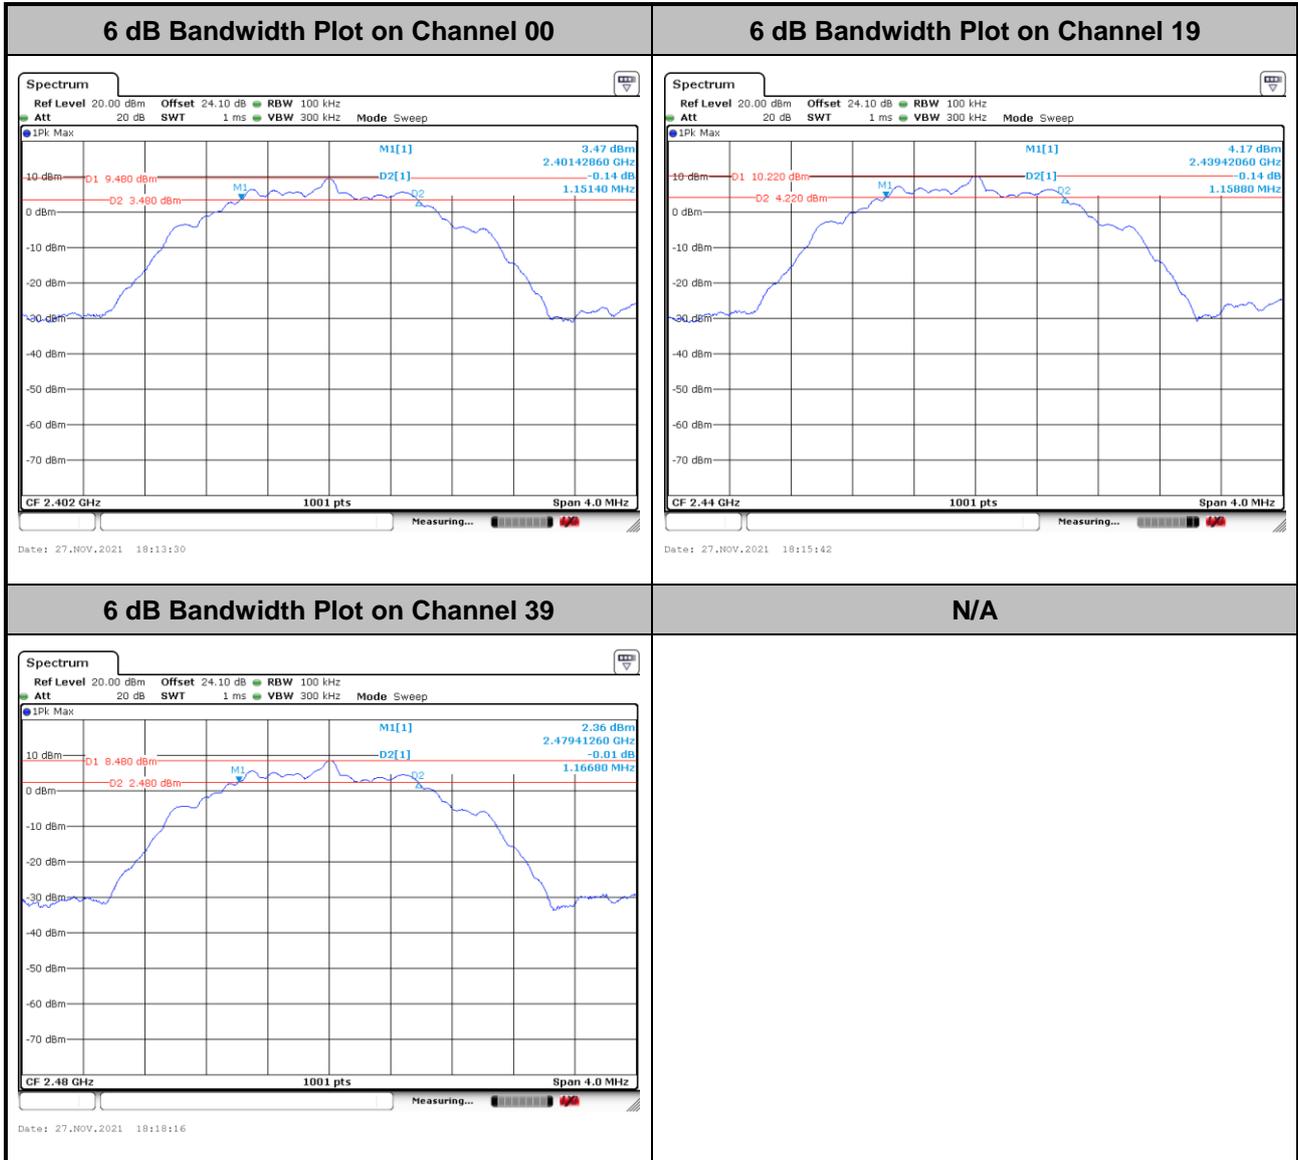




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<Ant. 16>


<1Mbps>

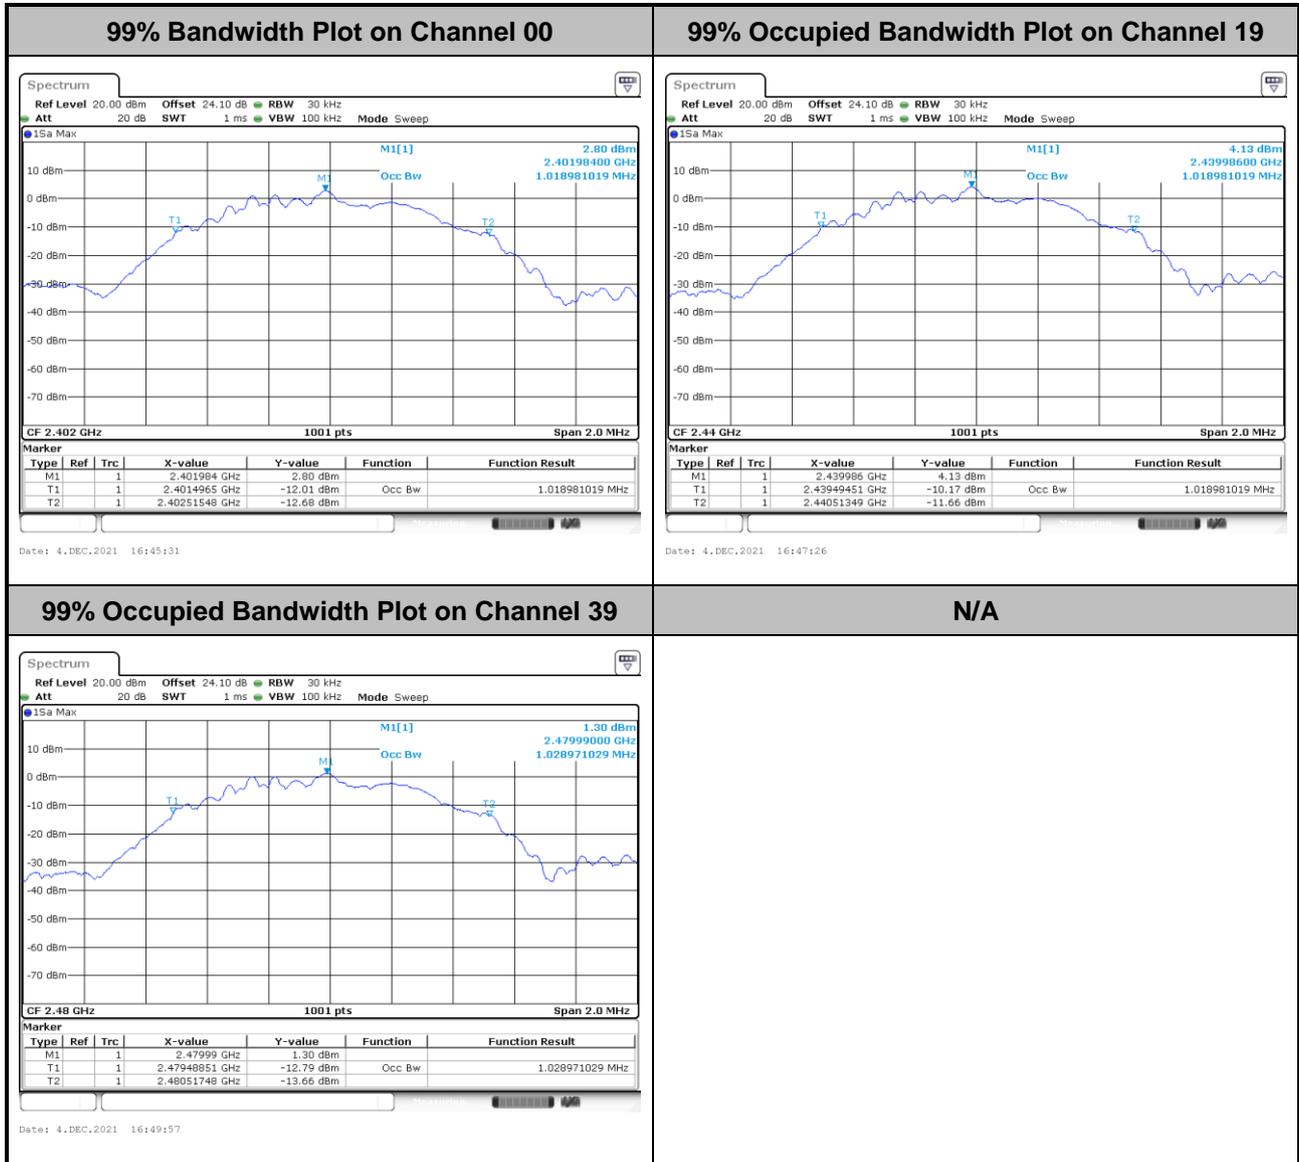

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

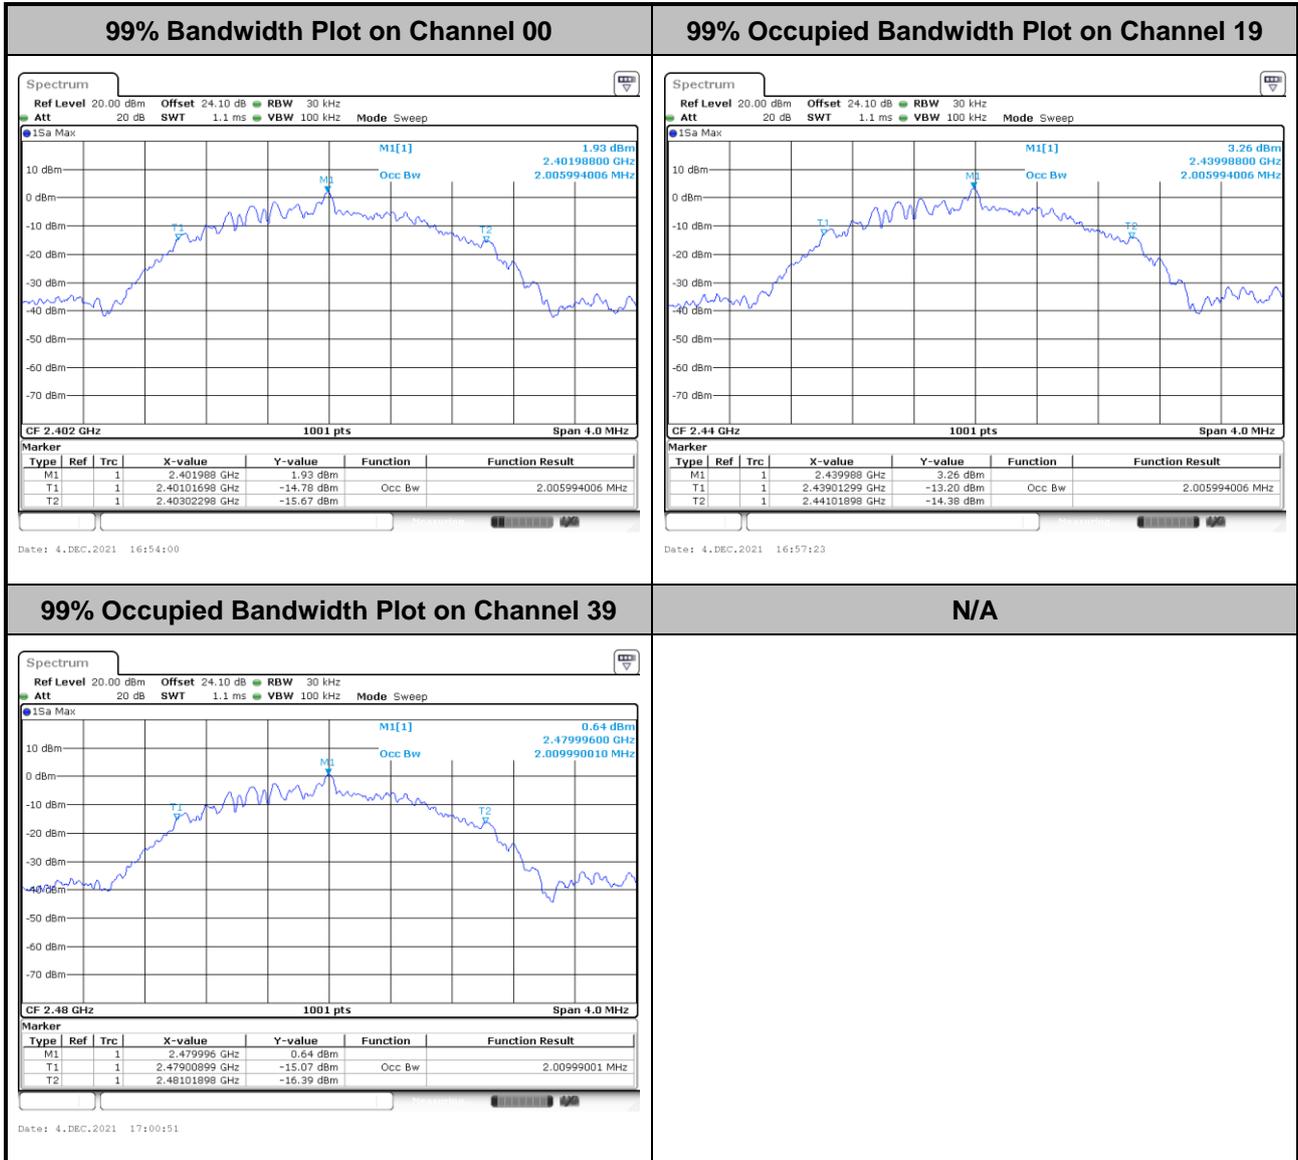


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<Ant. 18>


<1Mbps>

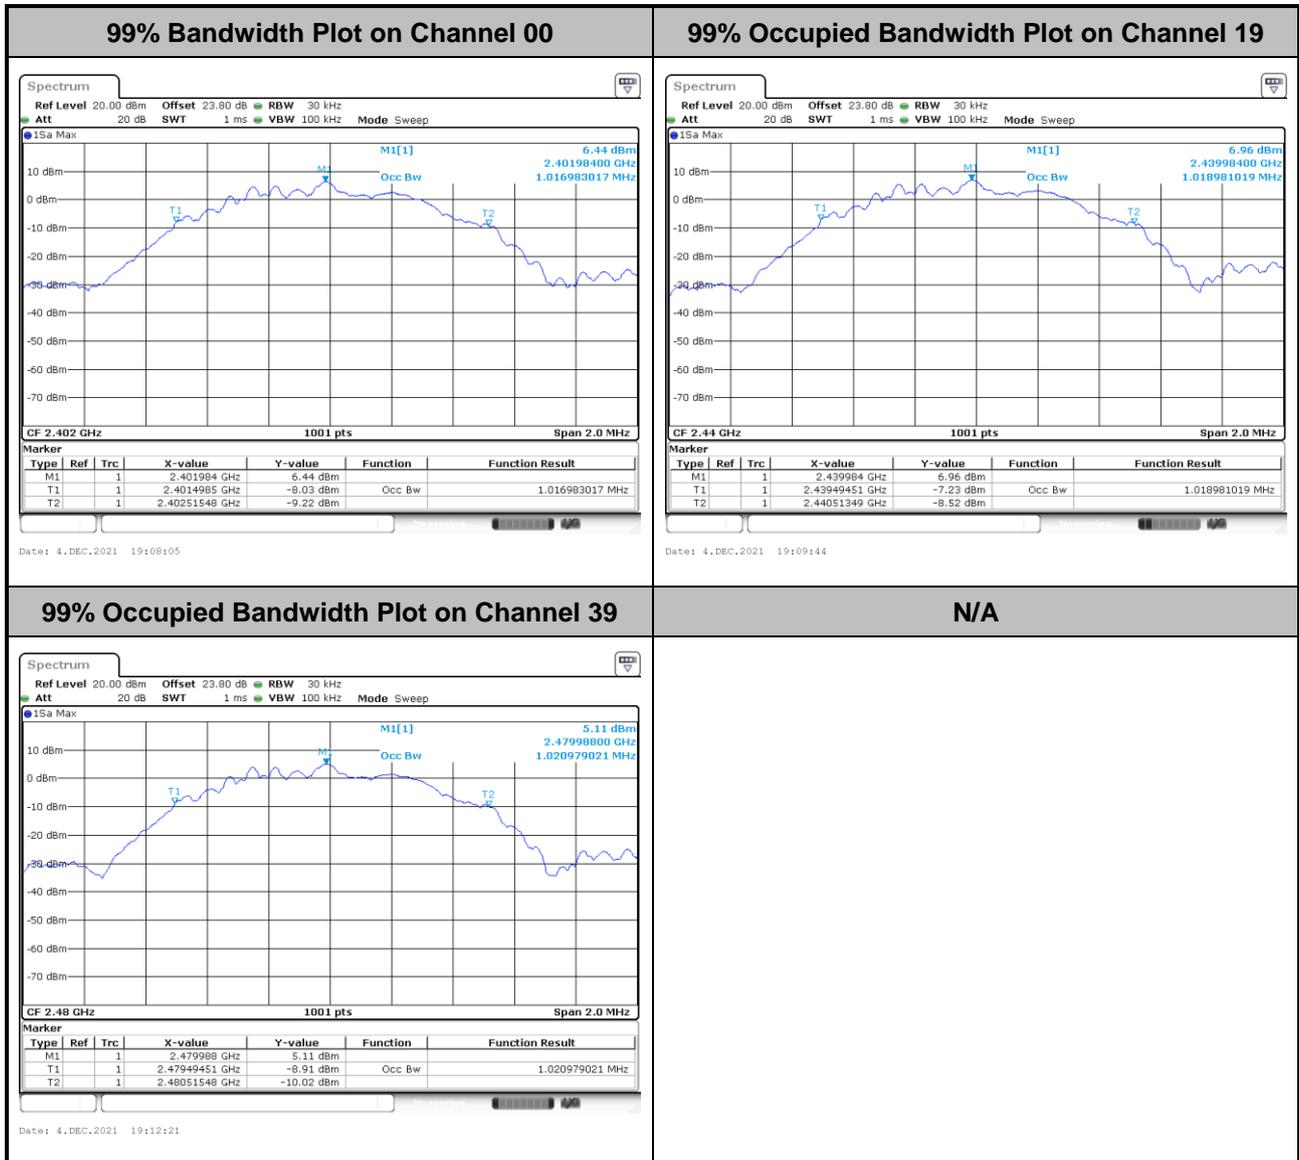

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

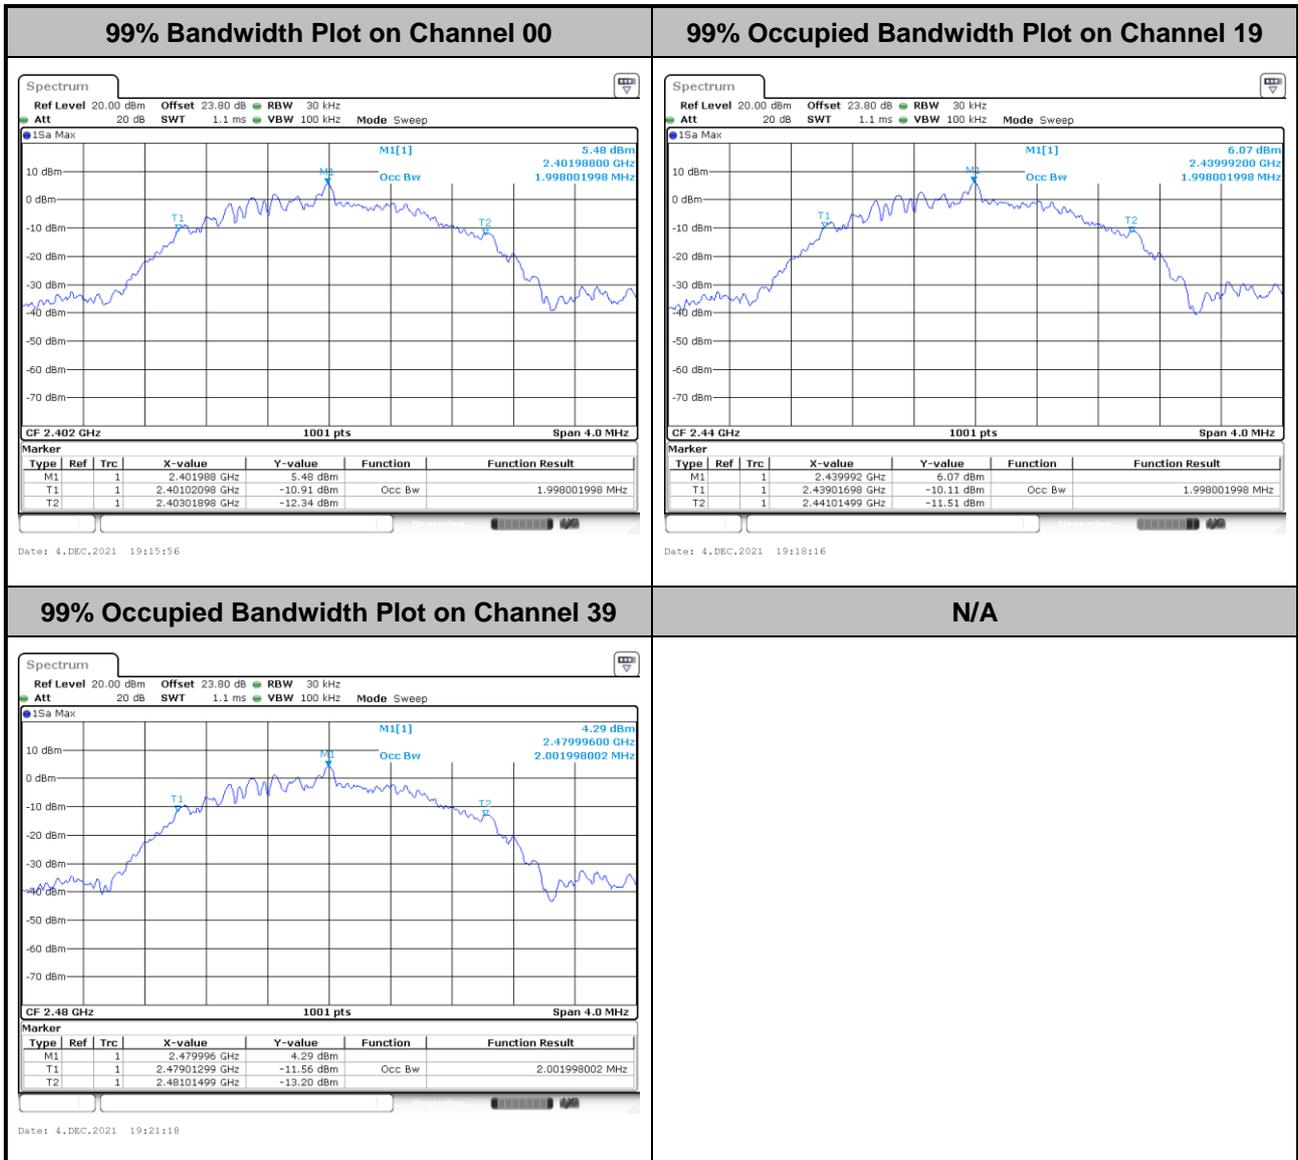

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

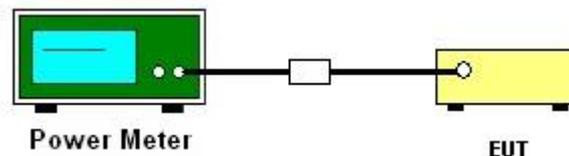

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

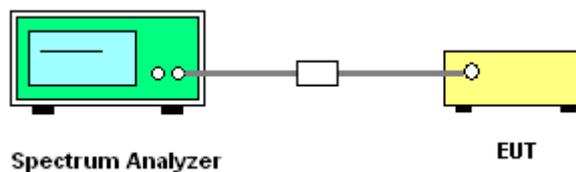

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


<Ant. 16>

<1Mbps>

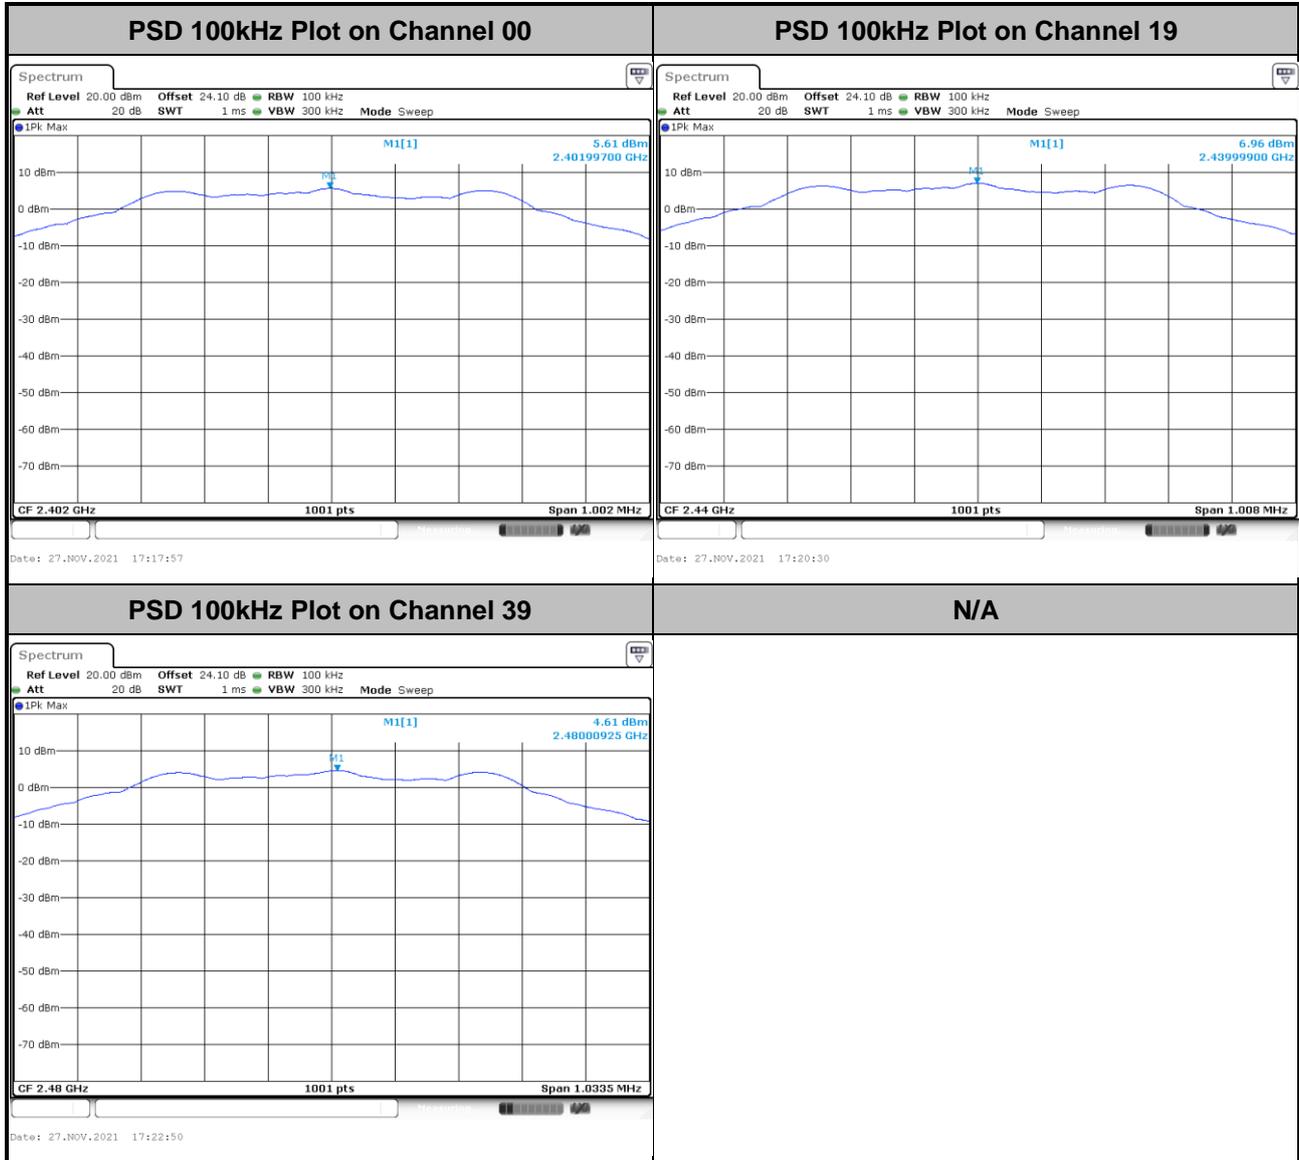




<2Mbps>

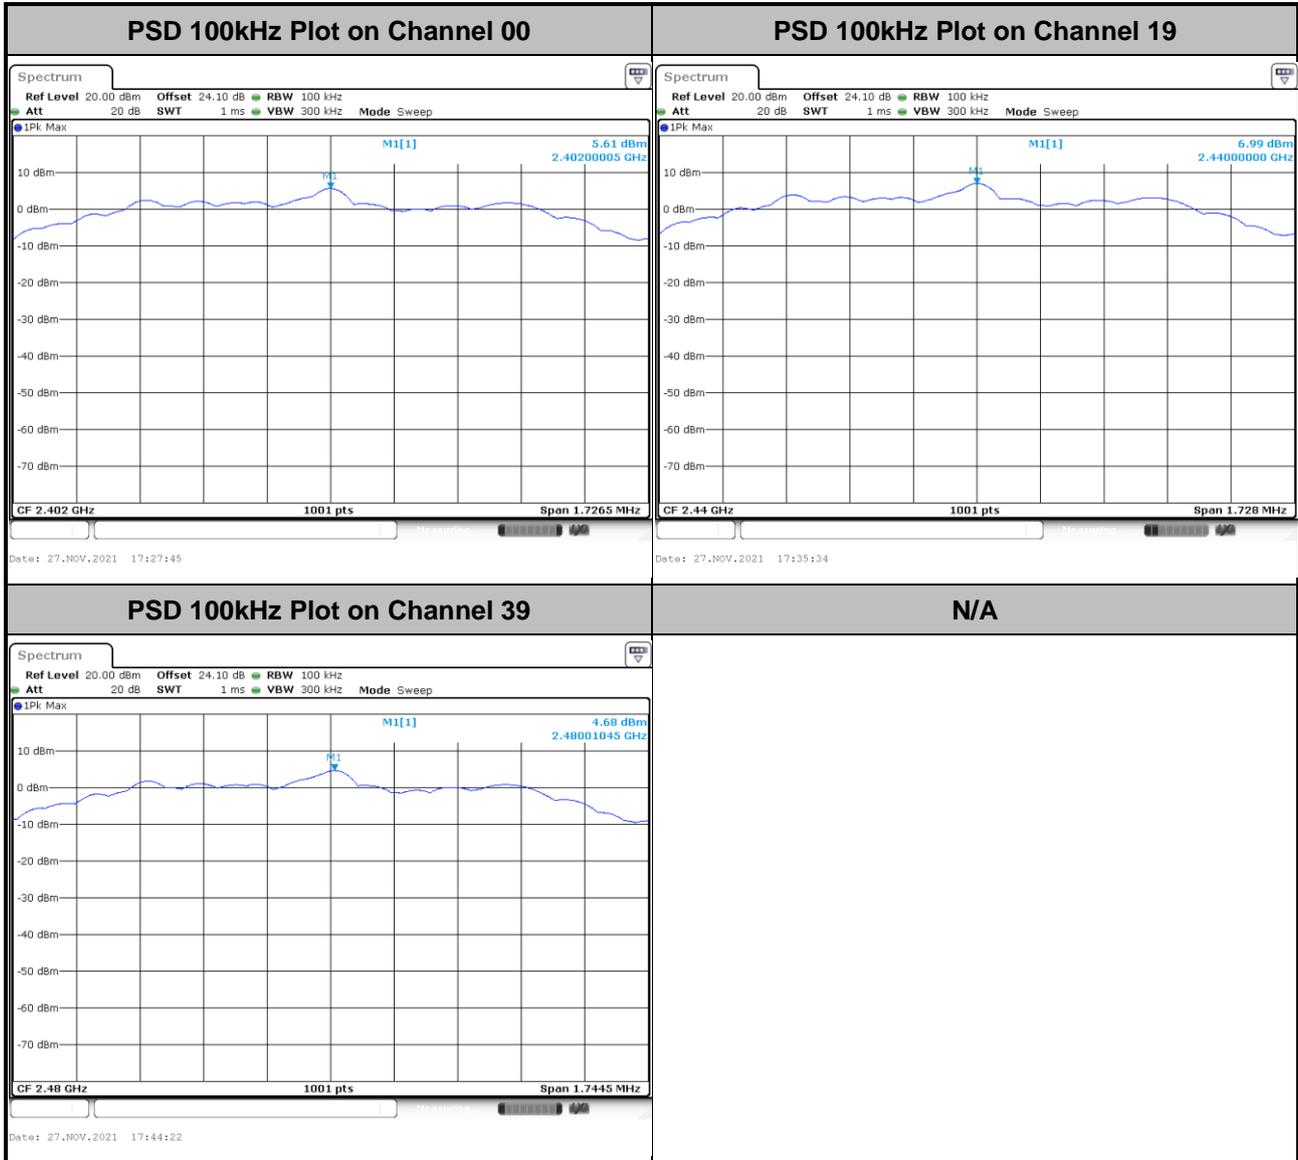




<Ant. 18>

<1Mbps>

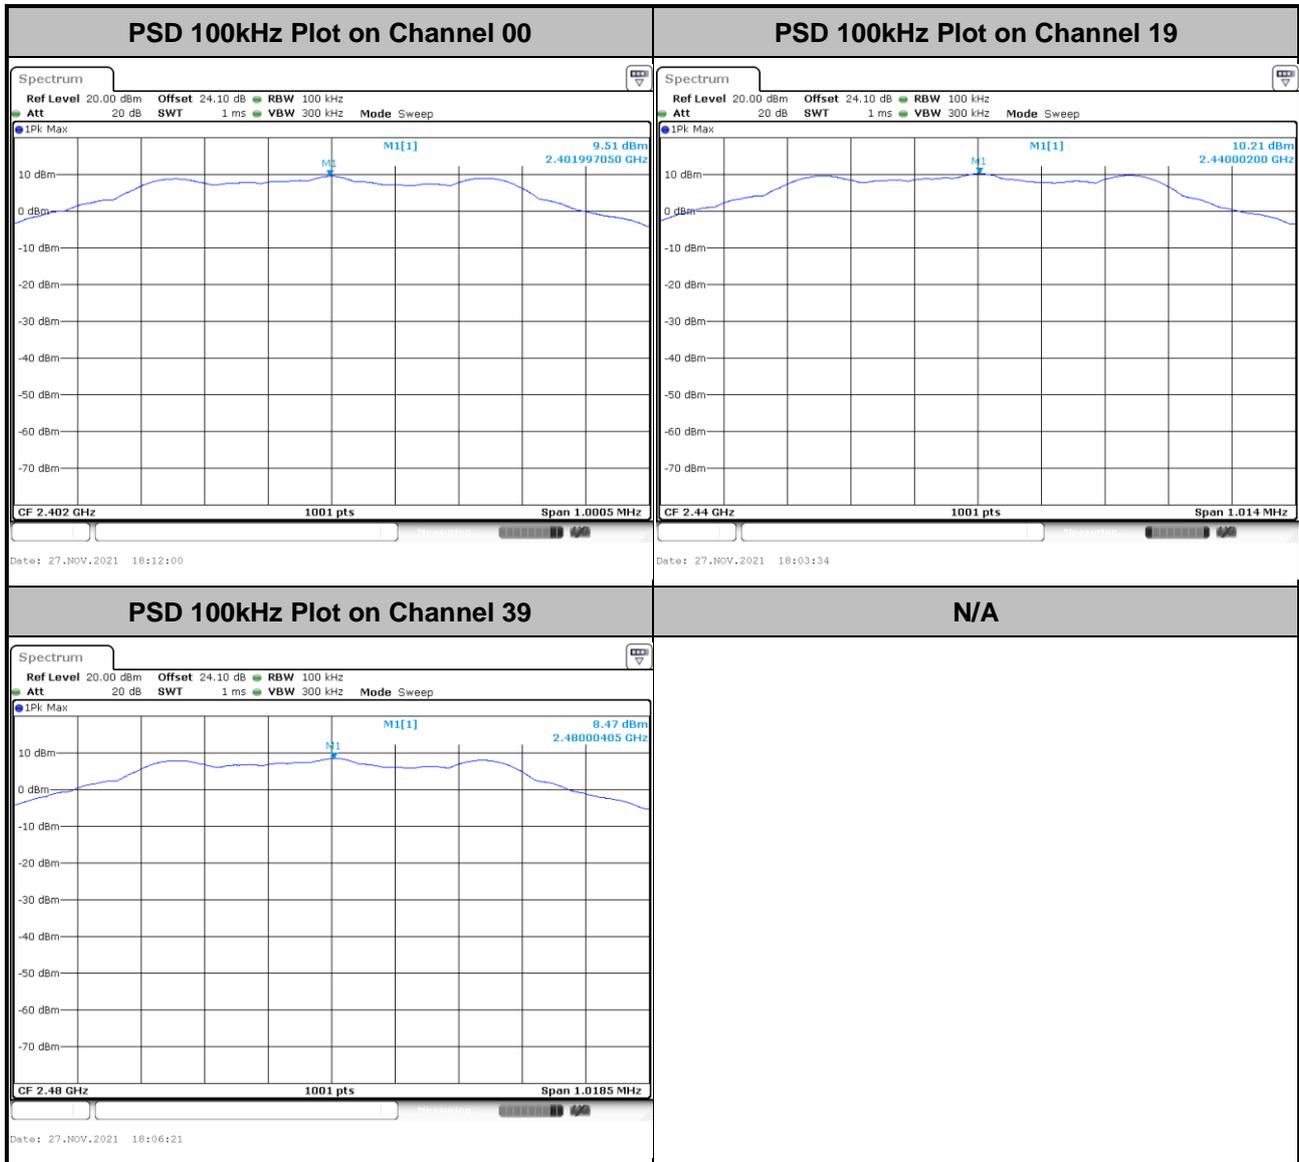



<2Mbps>

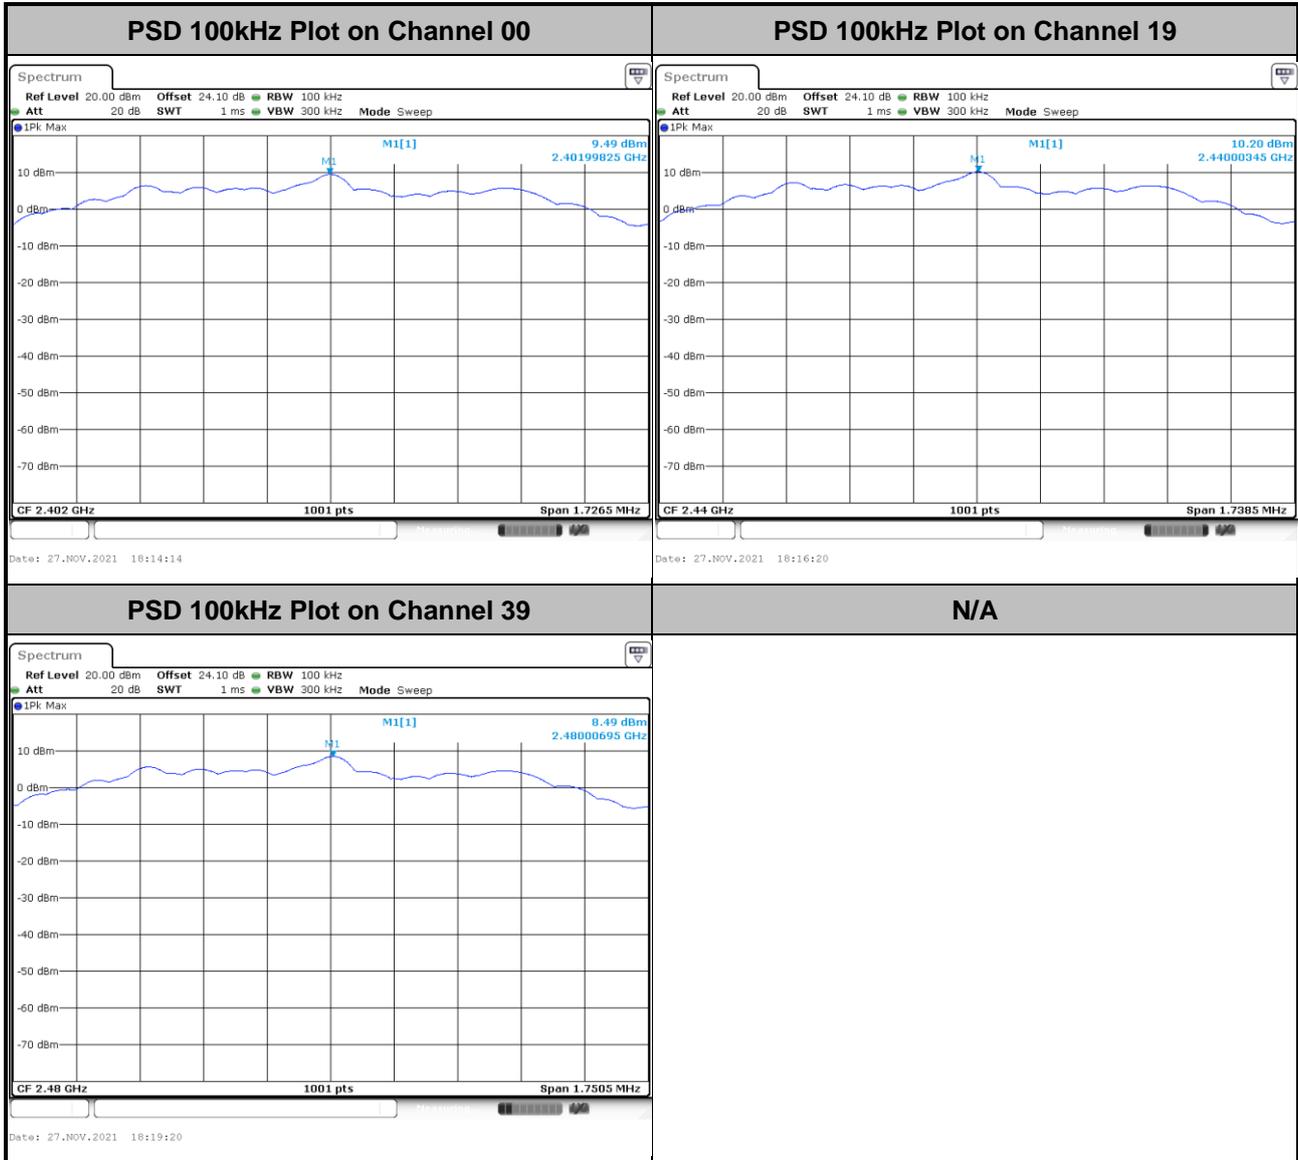




3.3.7 Test Result of Power Spectral Density Plots (3kHz)


<Ant. 16>

<1Mbps>

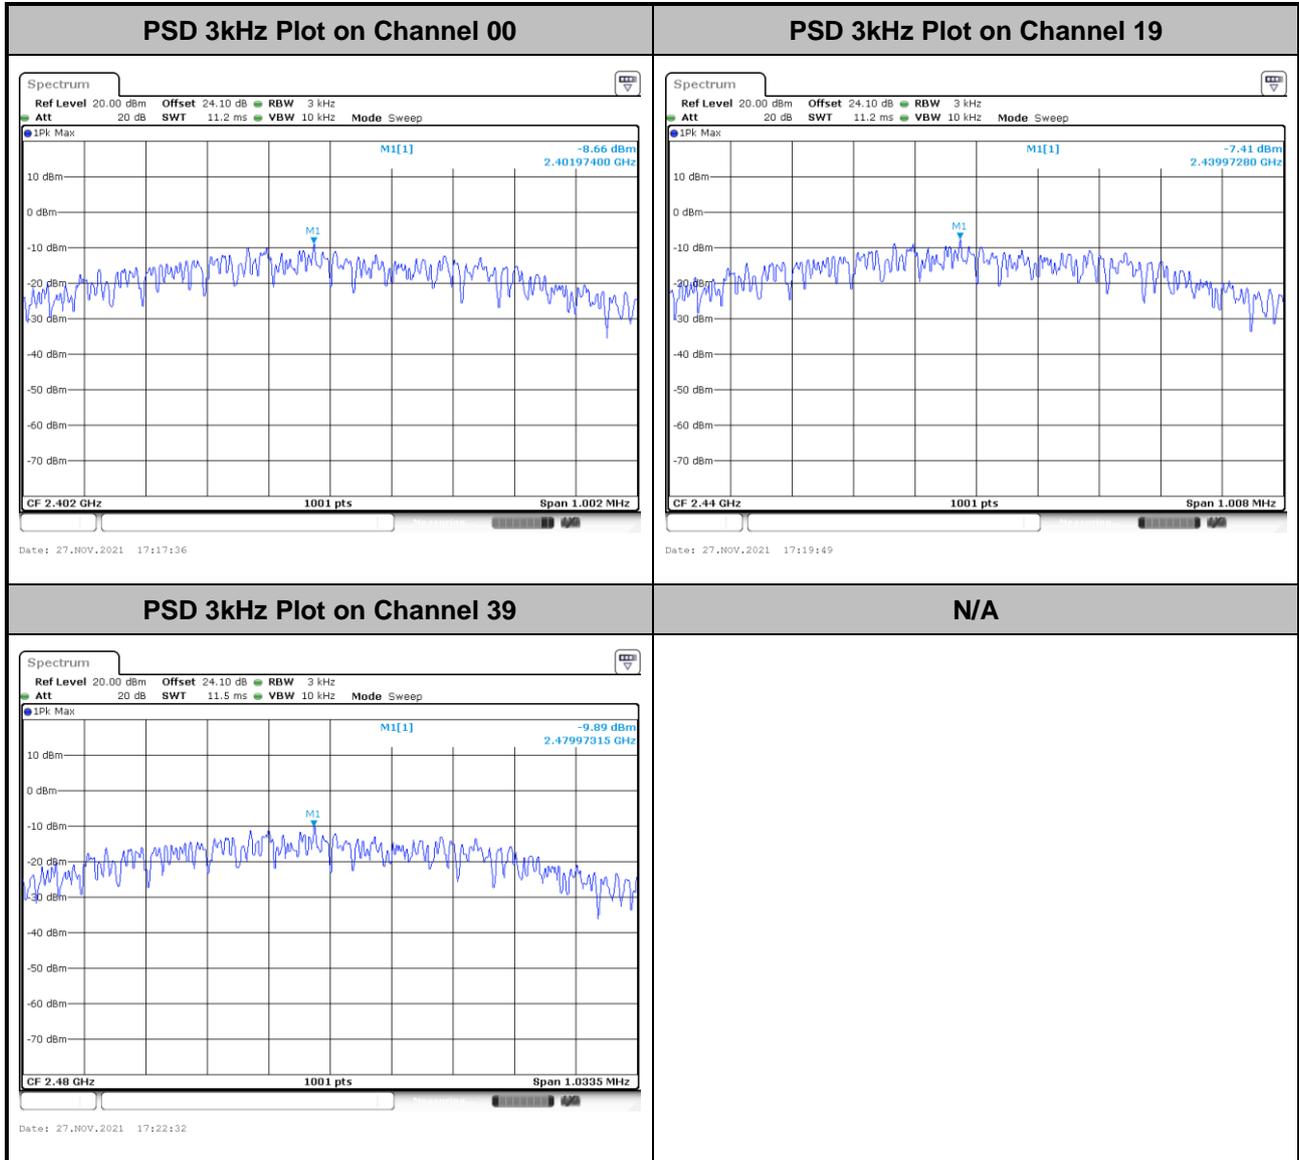




<2Mbps>

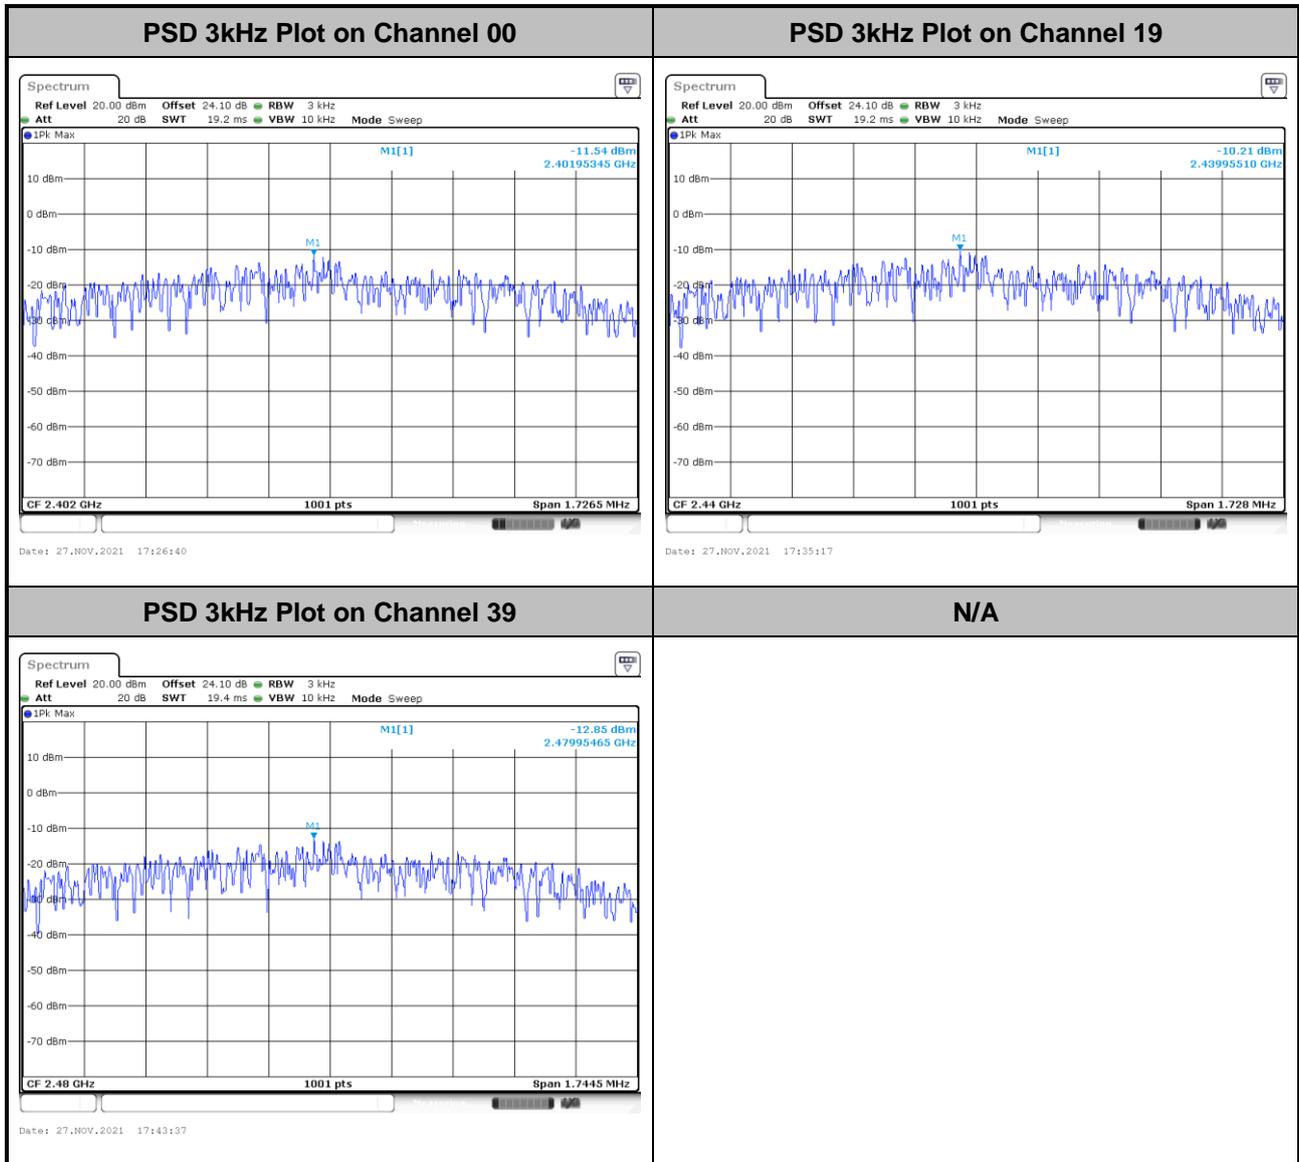




<Ant. 18>

<1Mbps>

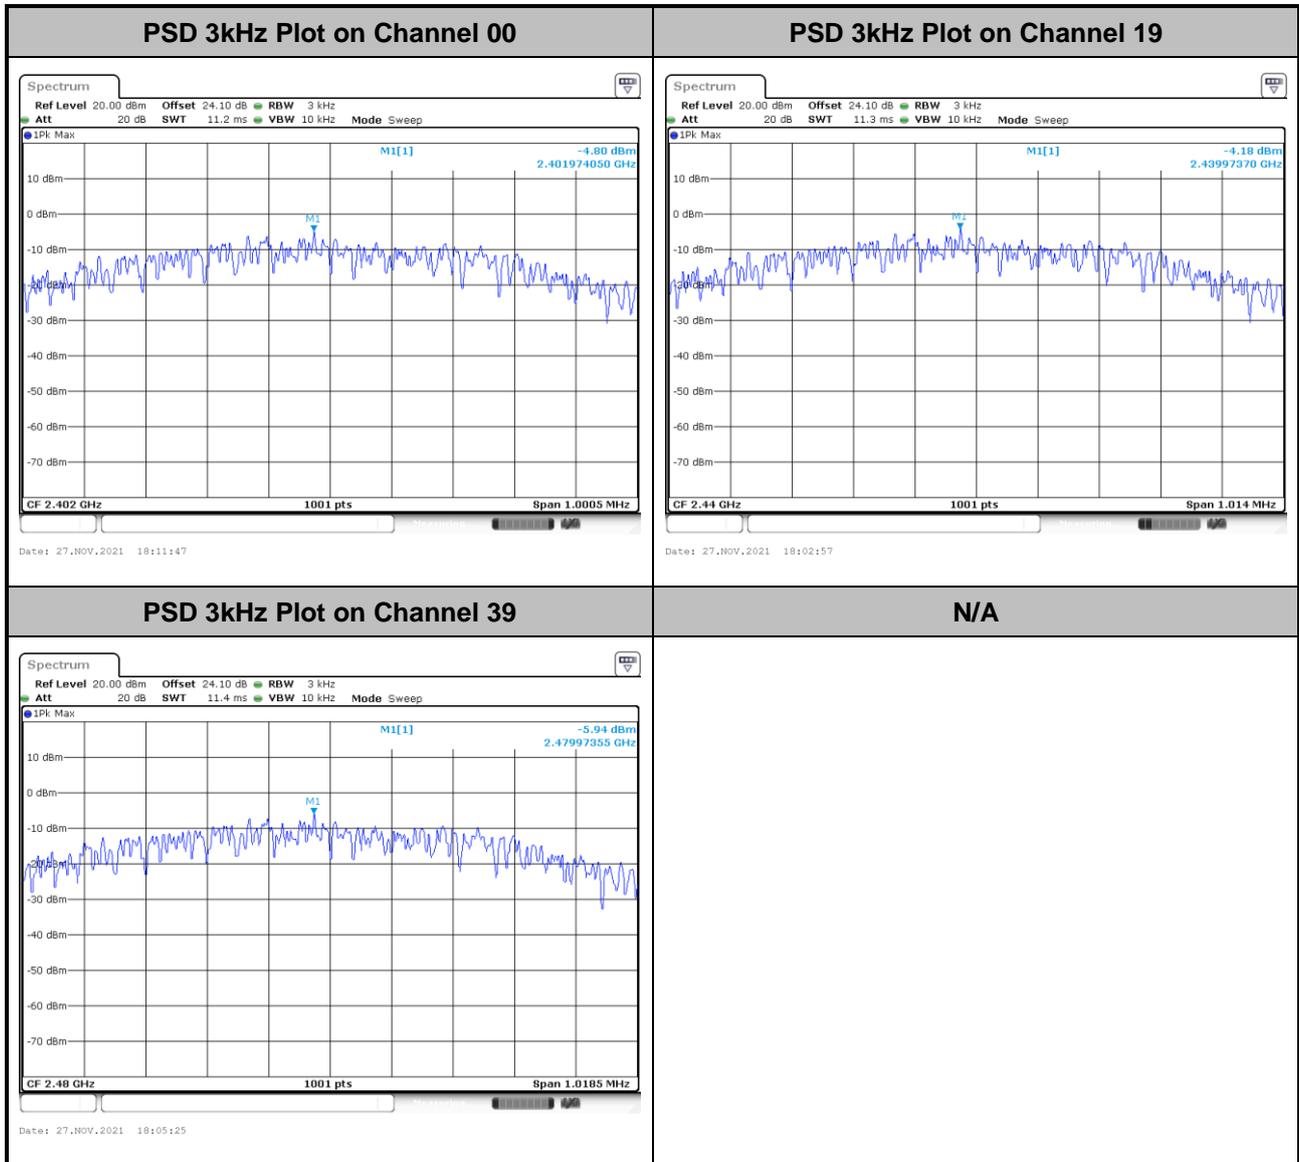



<2Mbps>

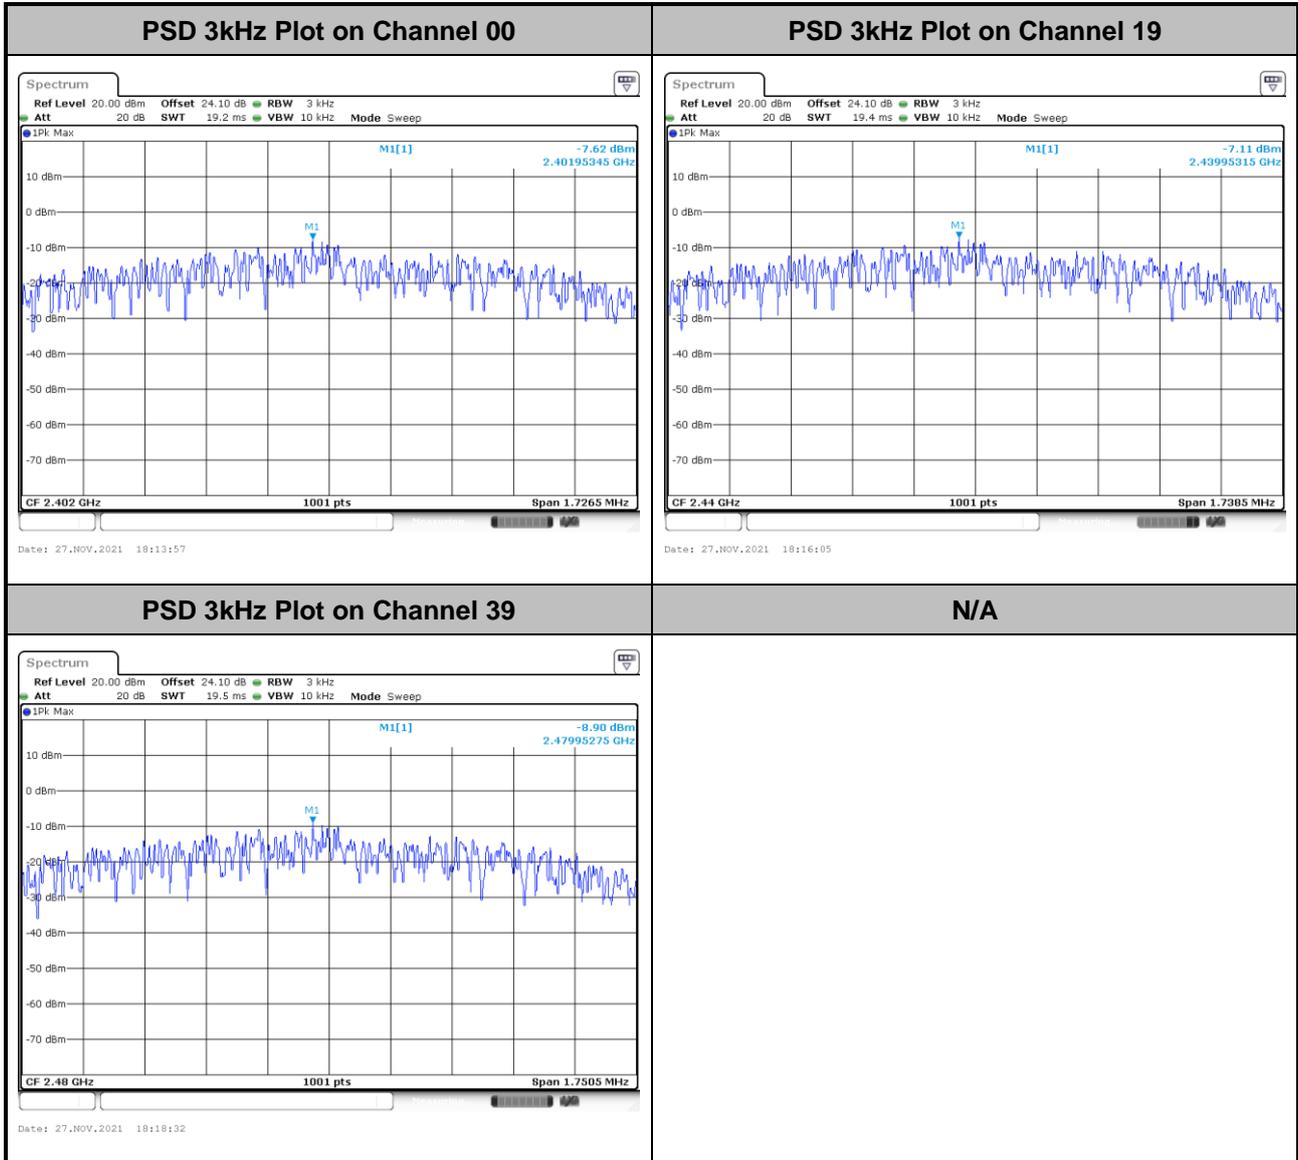

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

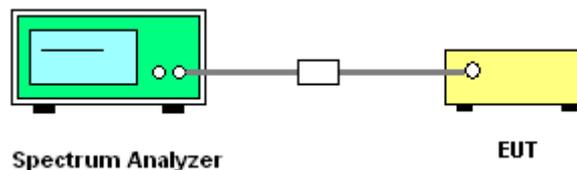





3.4.5 Test Result of Conducted Band Edges Plots

<Ant. 16>

<1Mbps>

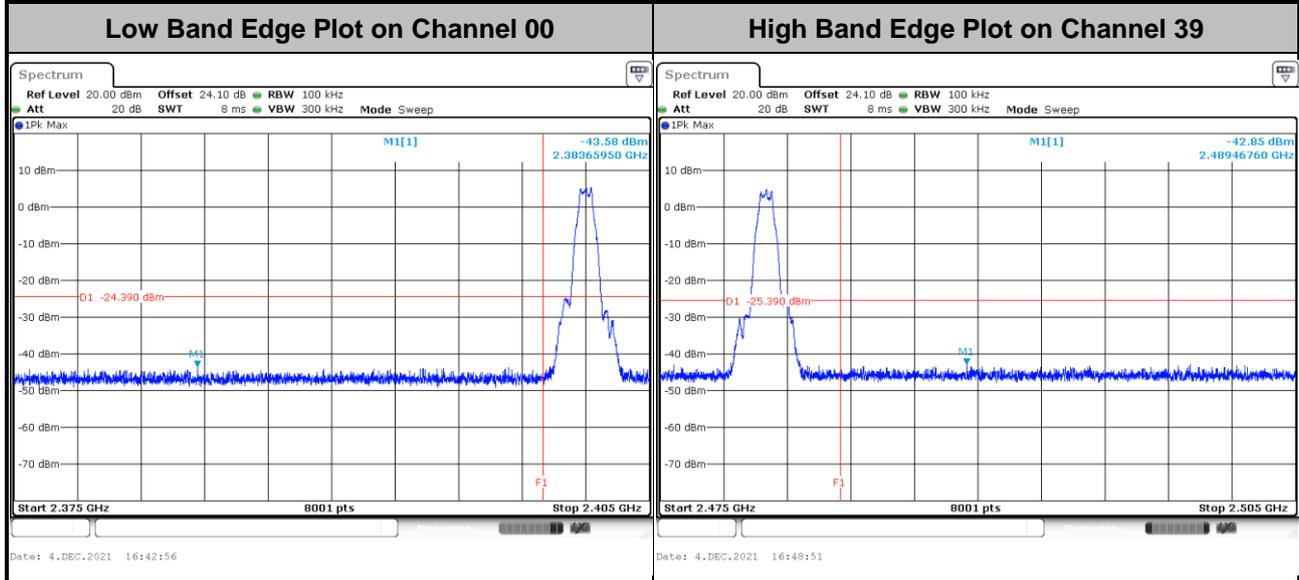


<2Mbps>

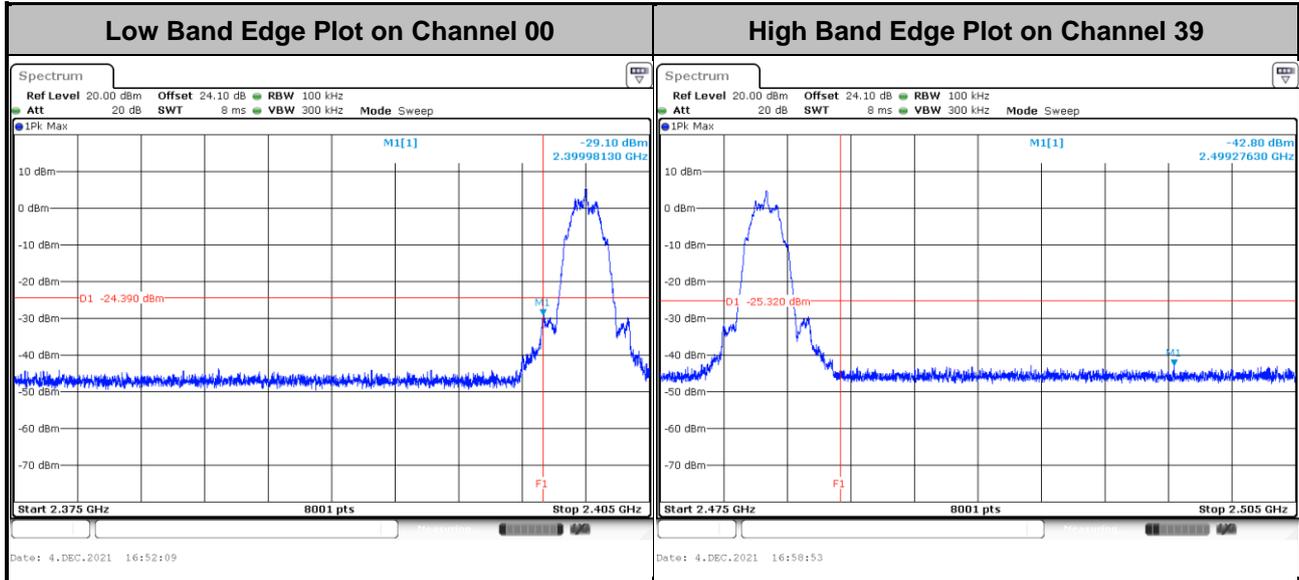




<Ant. 18>

<1Mbps>

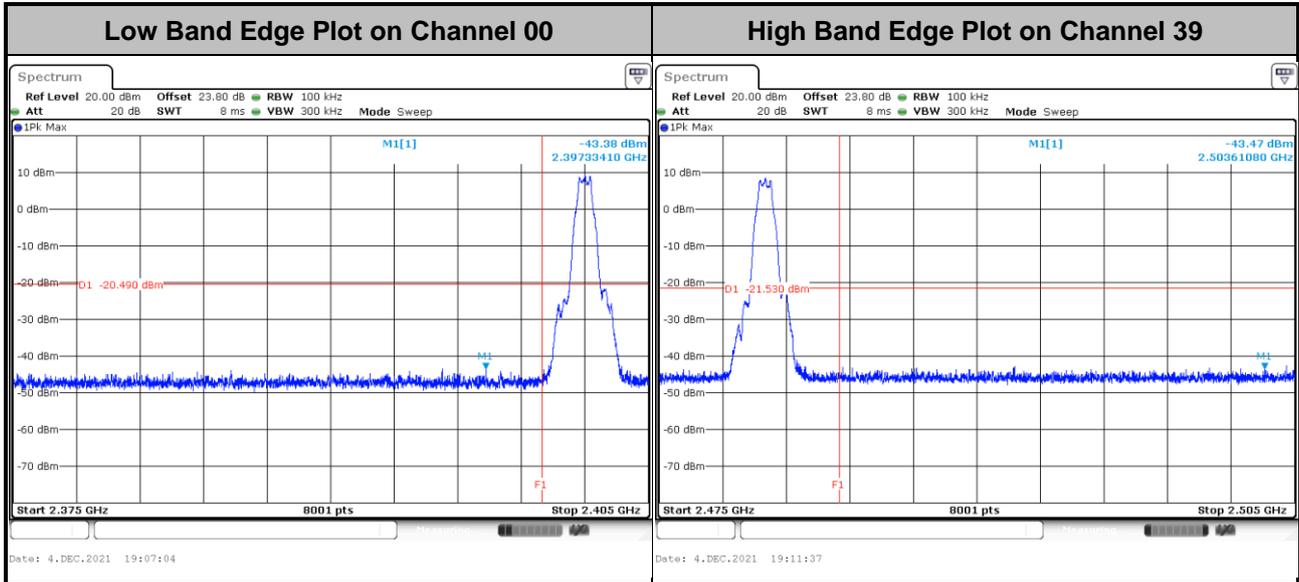

<2Mbps>

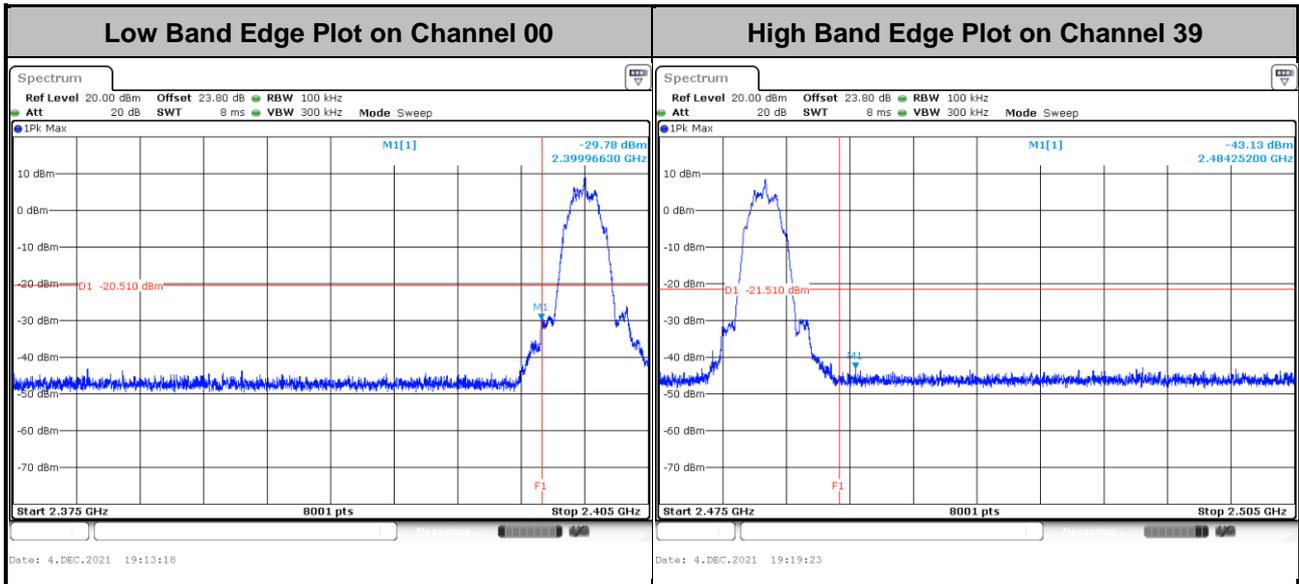





3.4.6 Test Result of Conducted Spurious Emission Plots

<Ant. 16>


<1Mbps>

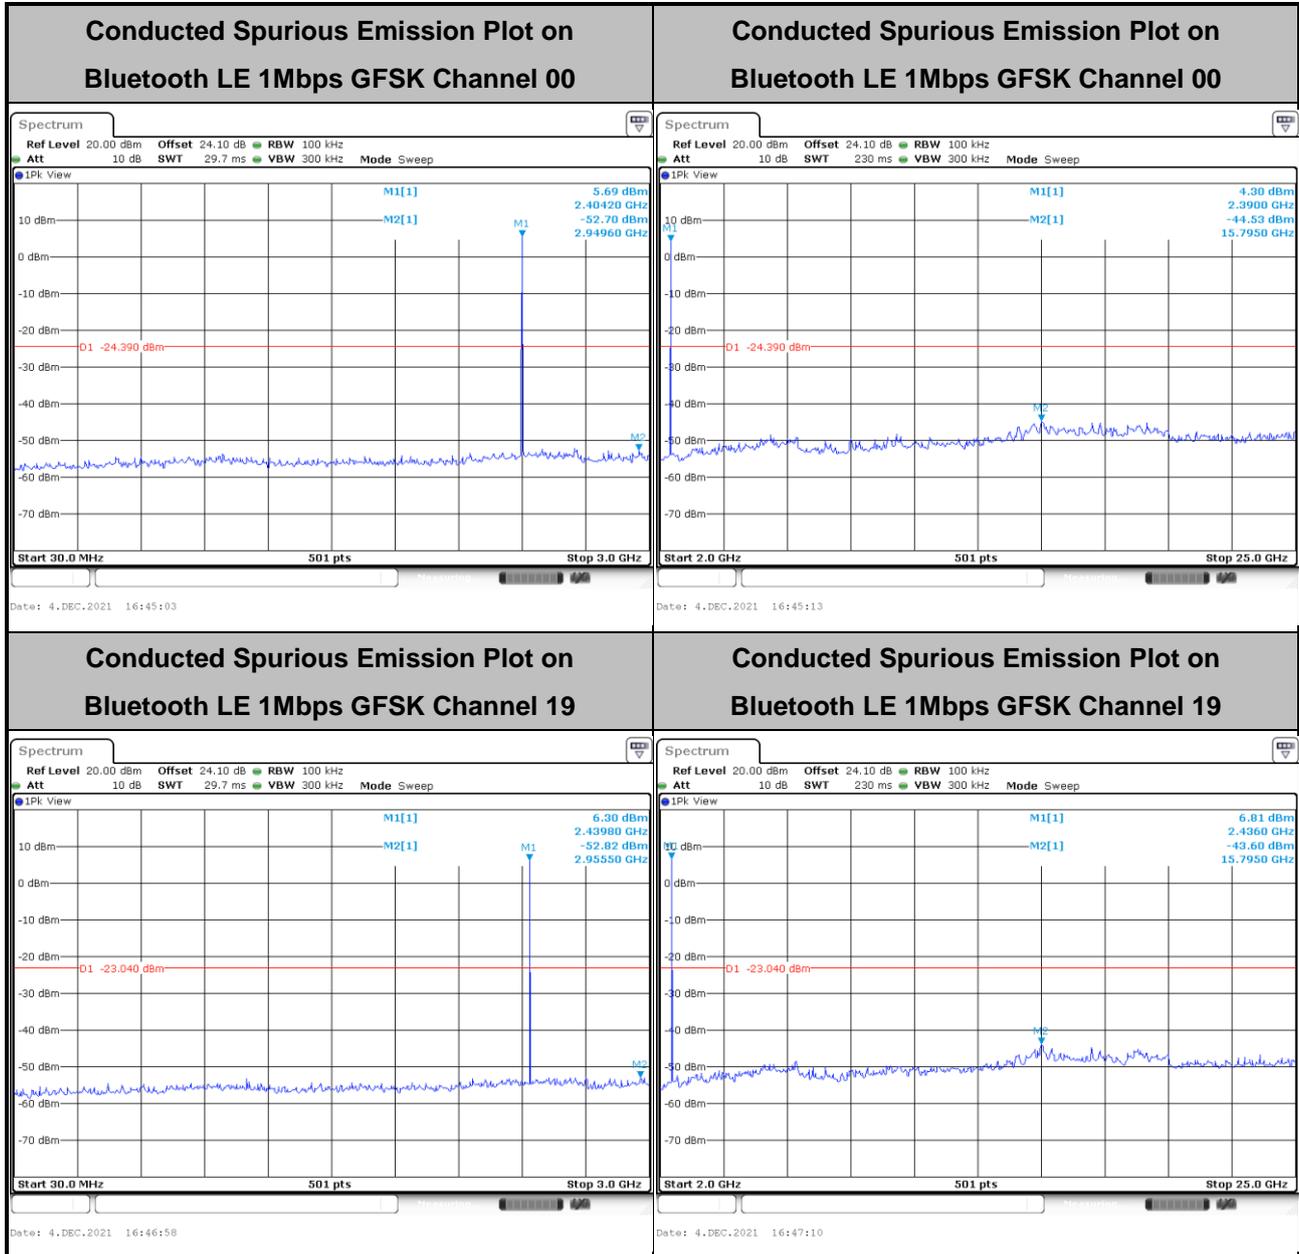


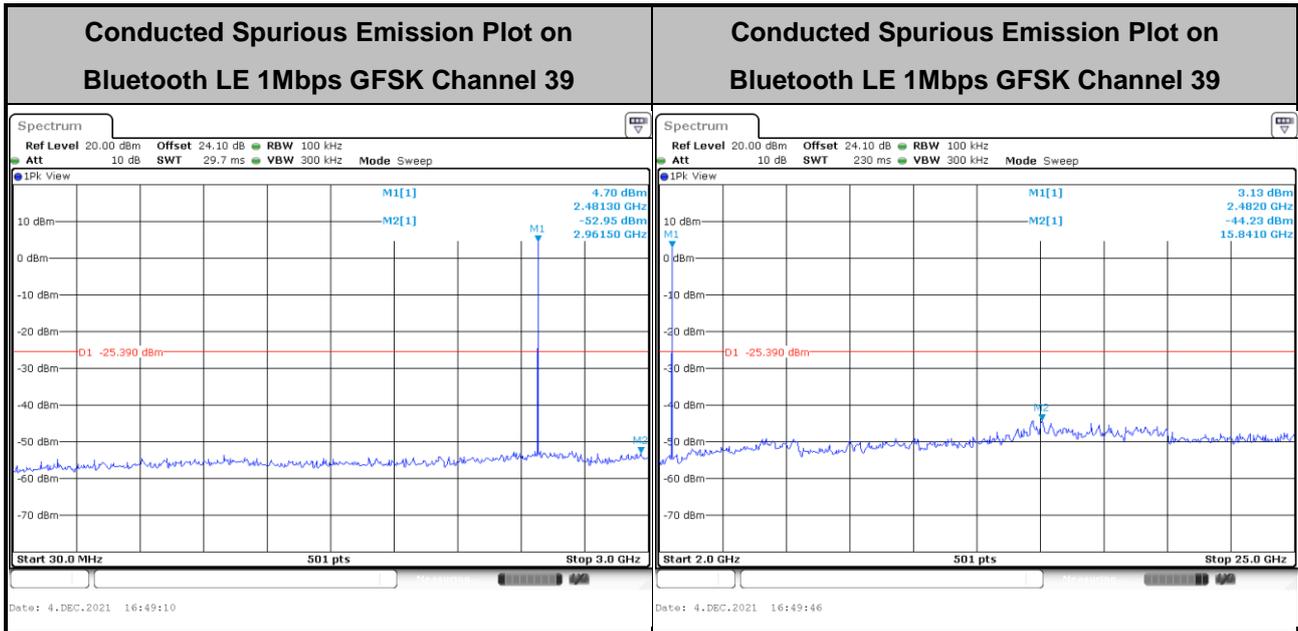



<2Mbps>

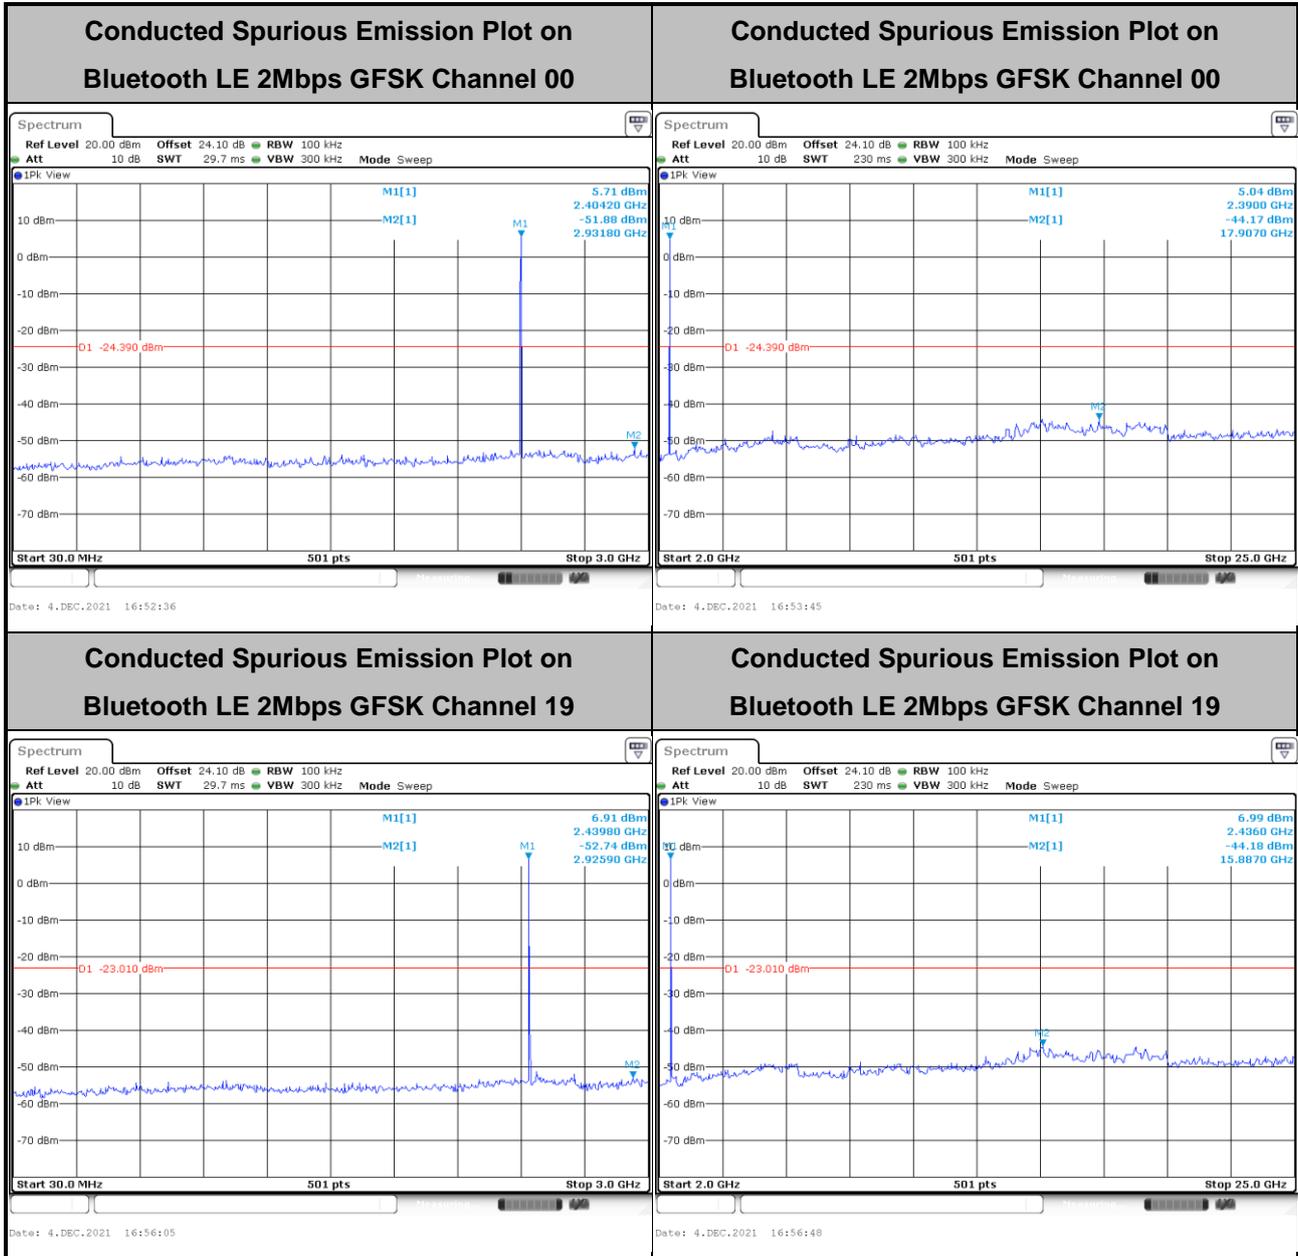


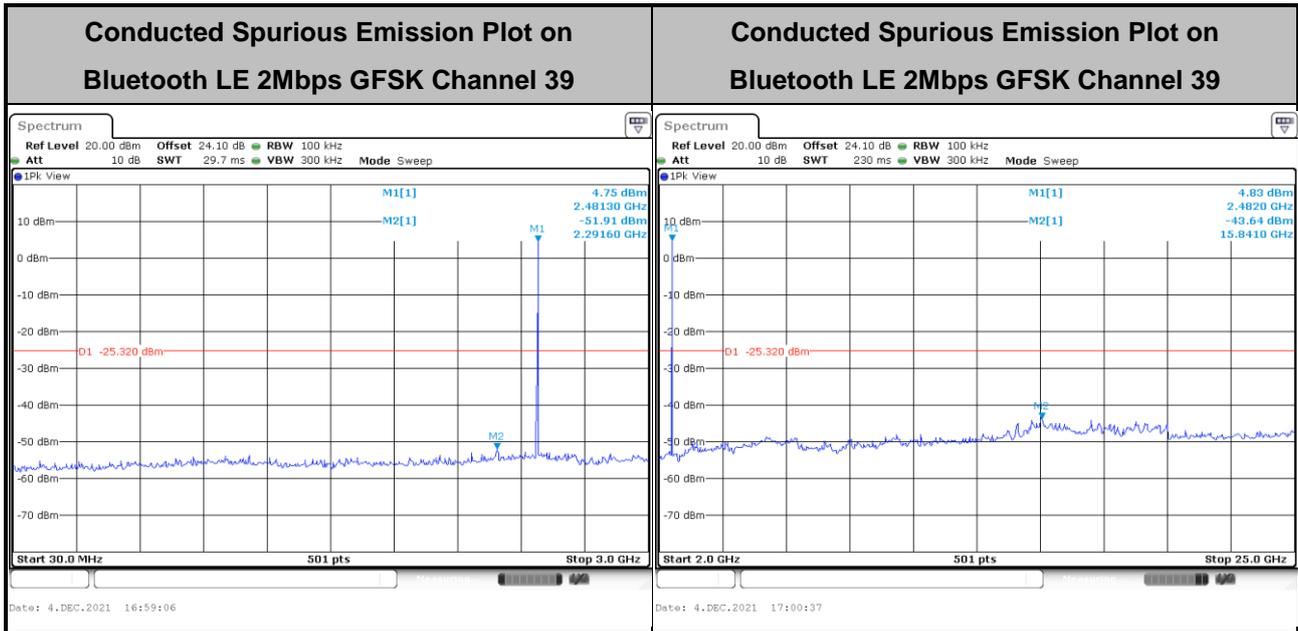




<Ant. 18>


<1Mbps>

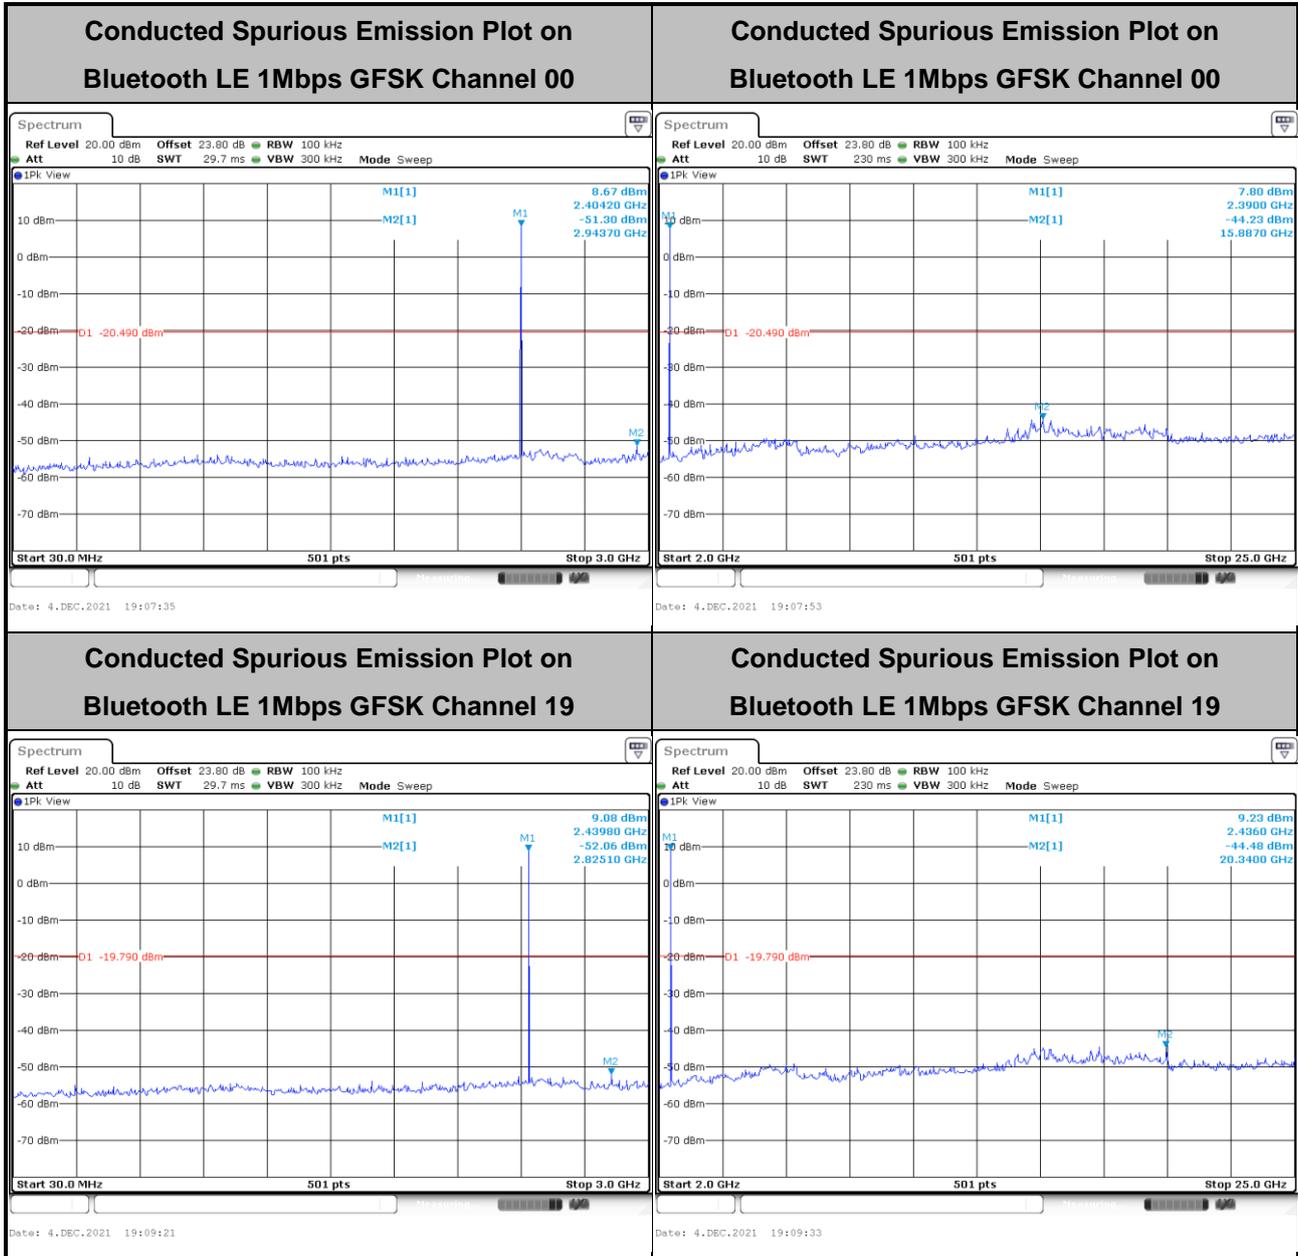


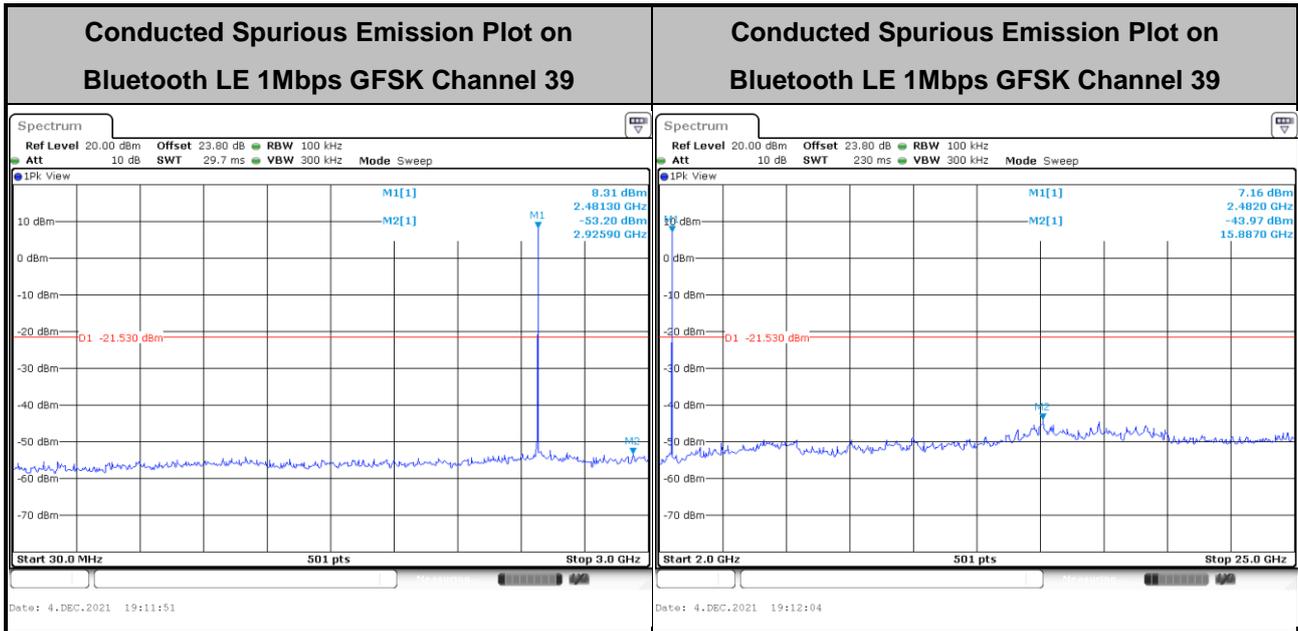



<2Mbps>

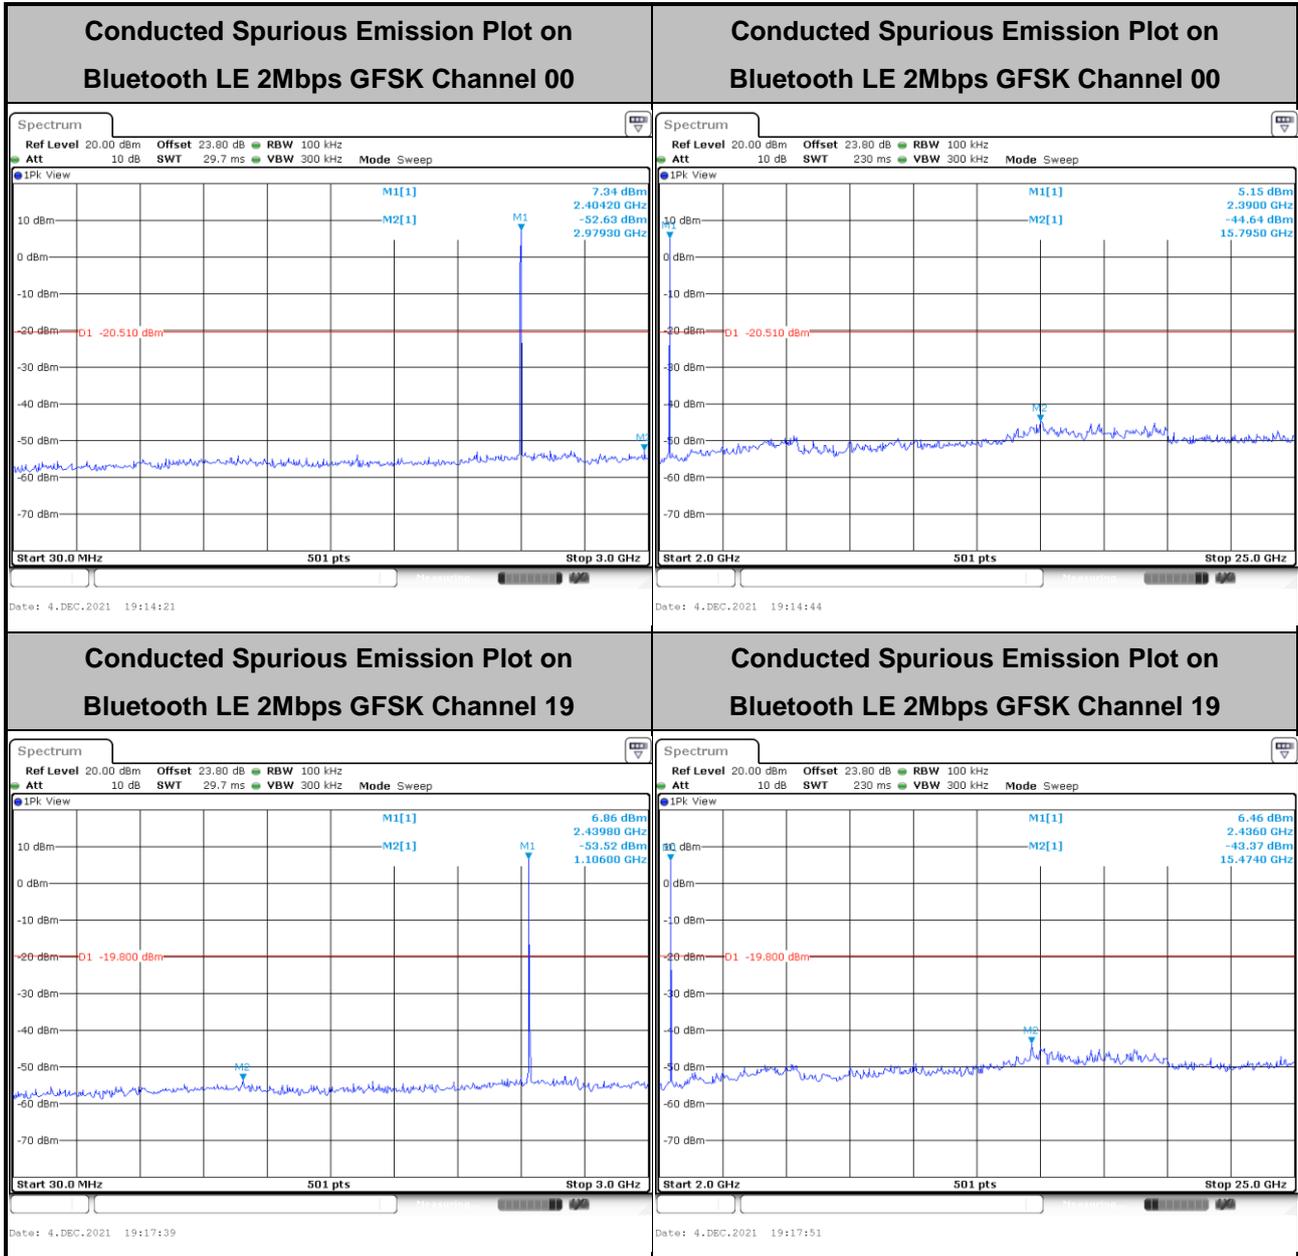

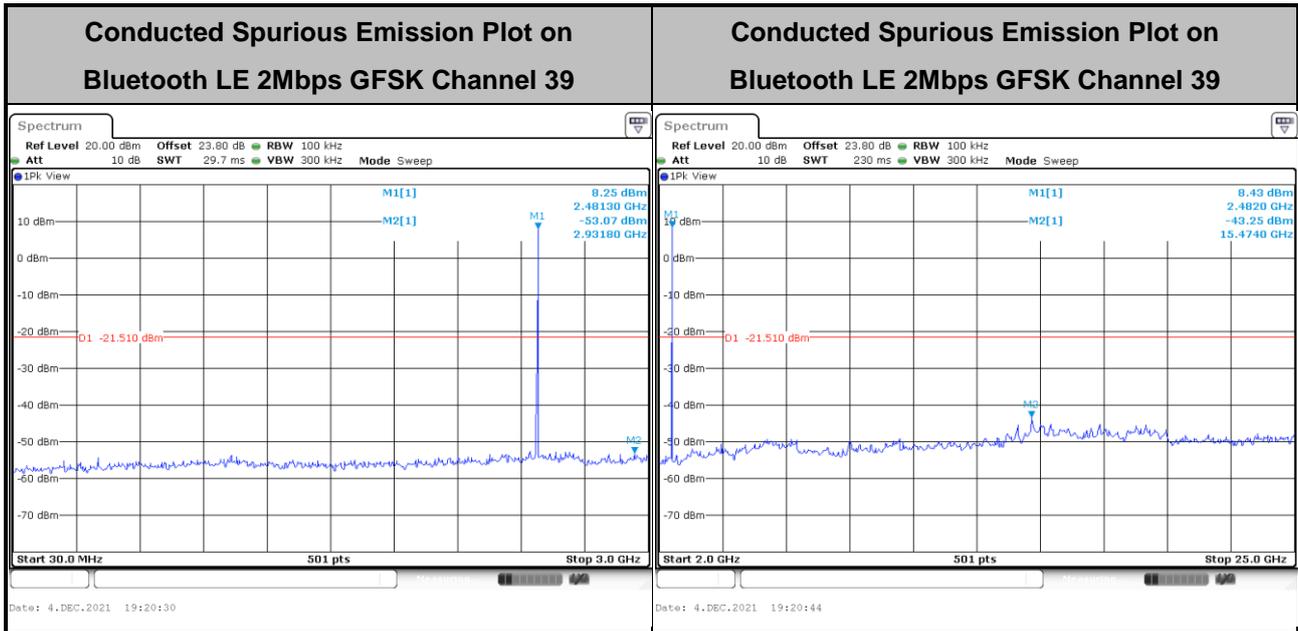



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as "-".
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

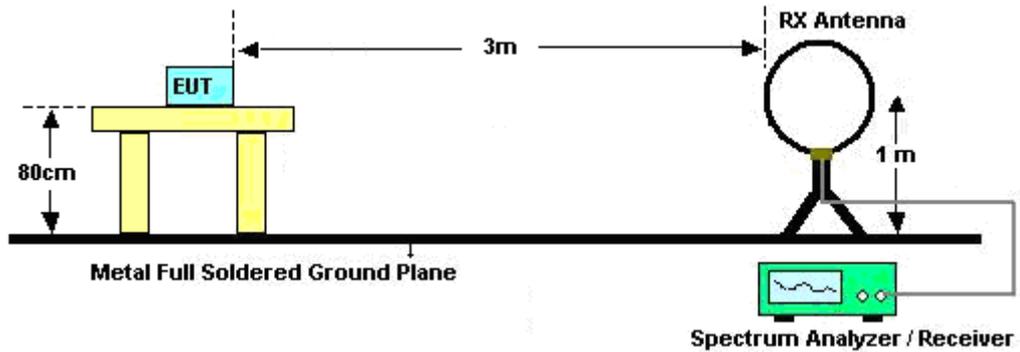


For radiated test from 30MHz to 1GHz

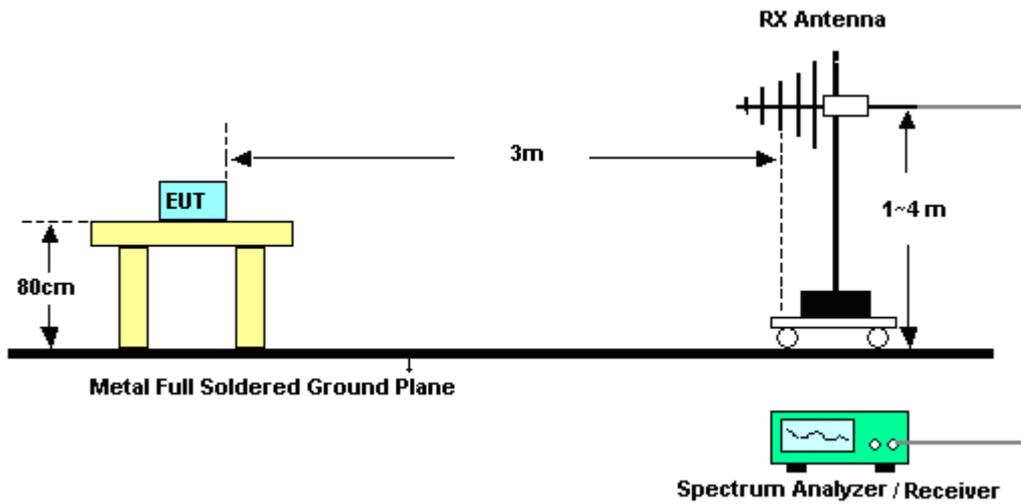

For radiated test from 1GHz to 18GHz

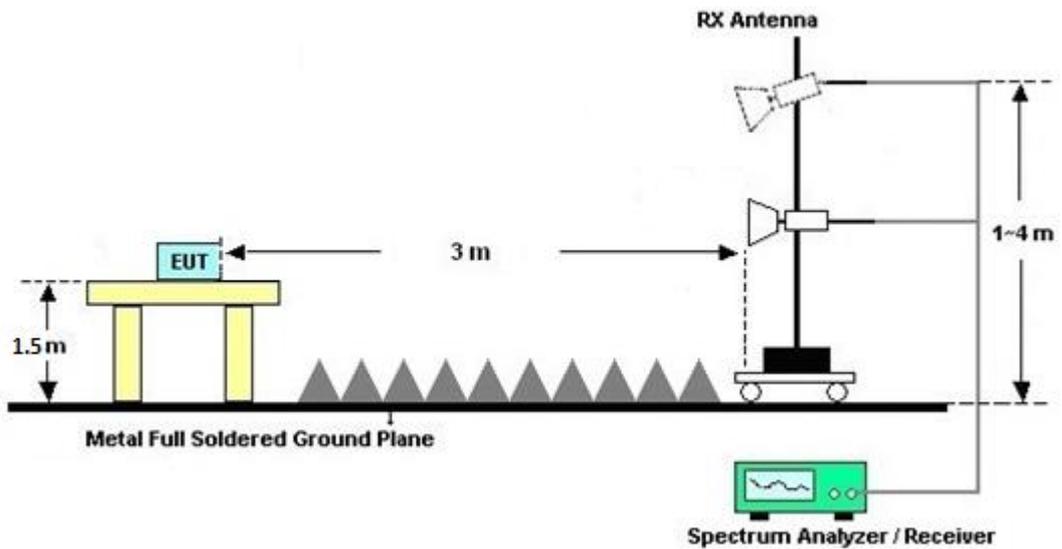

For radiated test above 18GHz

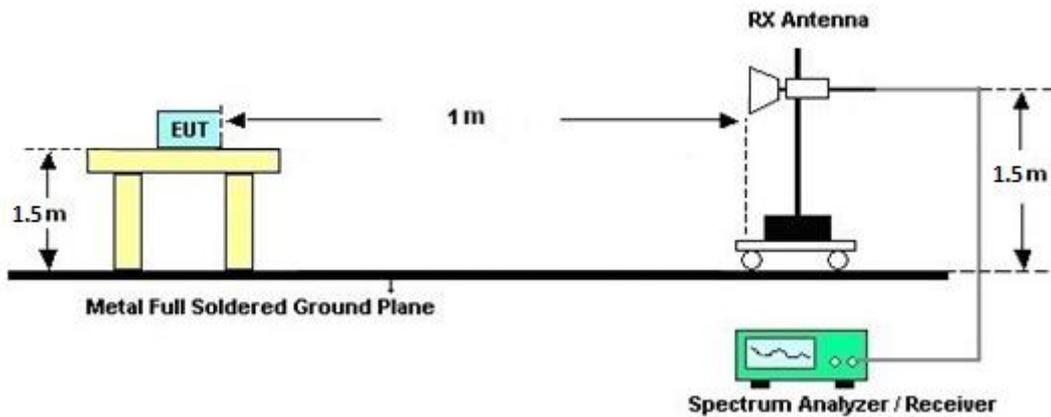

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

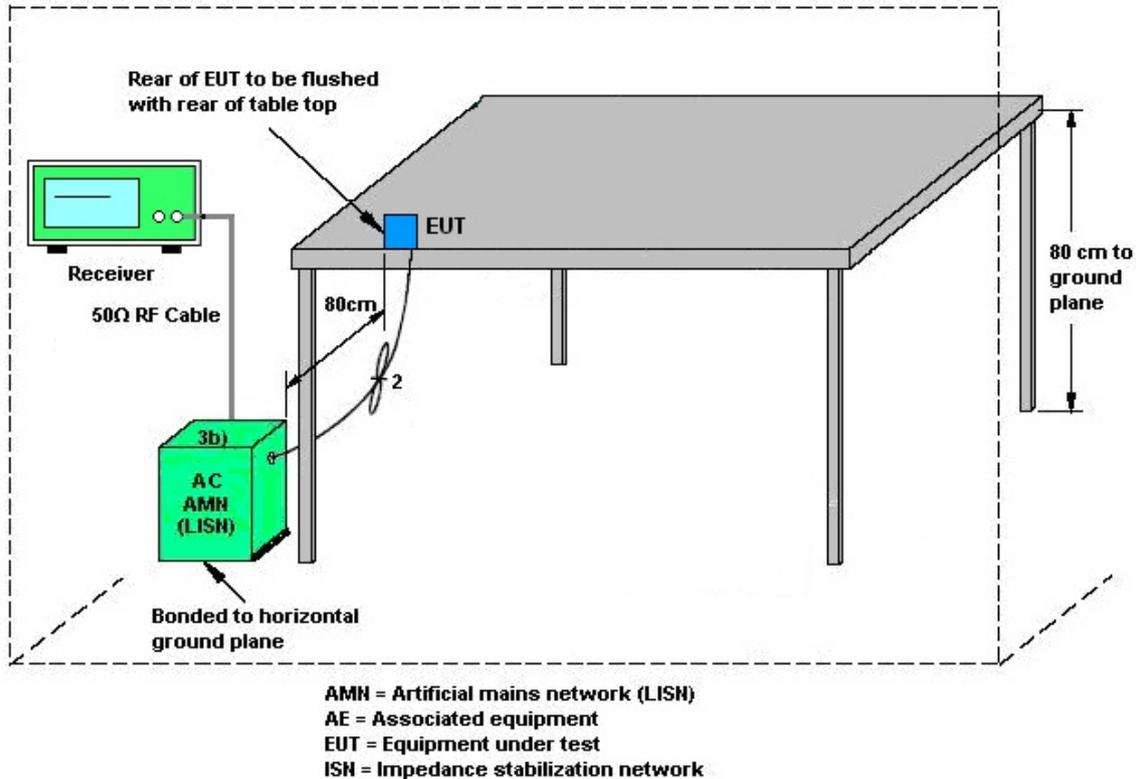

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9010B	MY60241055	10Hz~44GHz	Jul. 12, 2021	Nov. 22, 2021~Dec. 08, 2021	Jul. 11, 2022	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Jan. 04, 2021	Nov. 22, 2021~Dec. 08, 2021	Jan. 03, 2022	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 15, 2021	Nov. 22, 2021~Dec. 08, 2021	Nov. 14, 2022	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 22, 2021	Nov. 22, 2021~Dec. 08, 2021	Jun. 21, 2022	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Nov. 22, 2021~Dec. 08, 2021	Jan. 03, 2022	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N1 D01N-06	55606 & 08	30MHz~1GHz	Oct. 17, 2021	Nov. 22, 2021~Dec. 08, 2021	Oct. 16, 2022	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02294	1GHz~18GHz	Jun. 23, 2021	Nov. 22, 2021~Dec. 08, 2021	Jun. 22, 2022	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00991	18GHz-40GHz	May 12, 2021	Nov. 22, 2021~Dec. 08, 2021	May 11, 2022	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303B	TP200728	N/A	Mar. 09, 2021	Nov. 22, 2021~Dec. 08, 2021	Mar. 08, 2022	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804015/2,804027/2	N/A	Jan. 20, 2021	Nov. 22, 2021~Dec. 08, 2021	Jan. 19, 2022	Radiation (03CH20-HY)
1.53GHz Low Pass Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN27	N/A	May 25, 2021	Nov. 22, 2021~Dec. 08, 2021	May 24, 2022	Radiation (03CH20-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN8	N/A	Mar. 26, 2021	Nov. 22, 2021~Dec. 08, 2021	Mar. 25, 2022	Radiation (03CH20-HY)
Filter	Wainwright	WHKX8-6090-7000-18000-40SS	SN99	N/A	Nov. 04, 2021	Nov. 22, 2021~Dec. 08, 2021	Nov. 03, 2022	Radiation (03CH20-HY)
Filter	Wainwright	WRCQV14-5425-5825-6525-6925-60SS	SN2	N/A	Jan. 08, 2021	Nov. 22, 2021~Dec. 08, 2021	Jan. 07, 2022	Radiation (03CH20-HY)
Filter	Wainwright	WRCQV14-6025-6425-7125-7525-60SS	SN1	N/A	Jan. 08, 2021	Nov. 22, 2021~Dec. 08, 2021	Jan. 07, 2022	Radiation (03CH20-HY)
Filter	Wainwright	WHW2-7100-10000-18000-40CC	SN3	N/A	May 25, 2021	Nov. 22, 2021~Dec. 08, 2021	May 24, 2022	Radiation (03CH20-HY)
Software	Audix	E3 6.2009-8-24	RK-002156	N/A	N/A	Nov. 22, 2021~Dec. 08, 2021	N/A	Radiation (03CH20-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Nov. 22, 2021~Dec. 08, 2021	N/A	Radiation (03CH20-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Nov. 22, 2021~Dec. 08, 2021	N/A	Radiation (03CH20-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 22, 2021~Dec. 08, 2021	N/A	Radiation (03CH20-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 19, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 30, 2020	Nov. 19, 2021	Nov. 29, 2021	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP201973	N/A	Oct. 22, 2021	Nov. 19, 2021	Oct. 21, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 01, 2020	Nov. 19, 2021	Nov. 30, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 19, 2021	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2021	Nov. 19, 2021	Jul. 27, 2022	Conduction (CO05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Nov. 24, 2021~ Dec. 06, 2021	Nov. 15, 2022	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31(NO:182)	10MHz~6GHz	Dec. 30, 2020	Nov. 24, 2021~ Dec. 06, 2021	Dec. 29, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Nov. 24, 2021~ Dec. 06, 2021	Aug. 29, 2022	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW191204(B OX8)	N/A	Jan. 07, 2021	Nov. 24, 2021~ Dec. 06, 2021	Jan. 06, 2022	Conducted (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Jacob Yu	Temperature:	22.2~24.1	°C
Test Date:	2021/11/24-2021/12/6	Relative Humidity:	48.2~52.2	%

<Ant. 16>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.019	0.668	0.50	Pass
BLE	1Mbps	1	19	2440	1.019	0.672	0.50	Pass
BLE	1Mbps	1	39	2480	1.029	0.689	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.80	30.00	-2.50	3.30	36.00	Pass
BLE	1Mbps	1	19	2440	7.20	30.00	-2.50	4.70	36.00	Pass
BLE	1Mbps	1	39	2480	4.80	30.00	-2.50	2.30	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.61	-8.66	-2.50	8.00	Pass
BLE	1Mbps	1	19	2440	6.96	-7.41	-2.50	8.00	Pass
BLE	1Mbps	1	39	2480	4.61	-9.89	-2.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.006	1.151	0.50	Pass
BLE	2Mbps	1	19	2440	2.006	1.152	0.50	Pass
BLE	2Mbps	1	39	2480	2.010	1.163	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	5.90	30.00	-2.50	3.40	36.00	Pass
BLE	2Mbps	1	19	2440	7.30	30.00	-2.50	4.80	36.00	Pass
BLE	2Mbps	1	39	2480	4.90	30.00	-2.50	2.40	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	5.61	-11.54	-2.50	8.00	Pass
BLE	2Mbps	1	19	2440	6.99	-10.21	-2.50	8.00	Pass
BLE	2Mbps	1	39	2480	4.68	-12.85	-2.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

<Ant. 18>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.017	0.667	0.50	Pass
BLE	1Mbps	1	19	2440	1.019	0.676	0.50	Pass
BLE	1Mbps	1	39	2480	1.021	0.679	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	9.50	30.00	-3.00	6.50	36.00	Pass
BLE	1Mbps	1	19	2440	10.20	30.00	-3.00	7.20	36.00	Pass
BLE	1Mbps	1	39	2480	8.50	30.00	-3.00	5.50	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	9.51	-4.80	-3.00	8.00	Pass
BLE	1Mbps	1	19	2440	10.21	-4.18	-3.00	8.00	Pass
BLE	1Mbps	1	39	2480	8.47	-5.94	-3.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	1.998	1.151	0.50	Pass
BLE	2Mbps	1	19	2440	1.998	1.159	0.50	Pass
BLE	2Mbps	1	39	2480	2.002	1.167	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	9.60	30.00	-3.00	6.60	36.00	Pass
BLE	2Mbps	1	19	2440	10.30	30.00	-3.00	7.30	36.00	Pass
BLE	2Mbps	1	39	2480	8.60	30.00	-3.00	5.60	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	9.49	-7.62	-3.00	8.00	Pass
BLE	2Mbps	1	19	2440	10.20	-7.11	-3.00	8.00	Pass
BLE	2Mbps	1	39	2480	8.49	-8.90	-3.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 1N0901
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

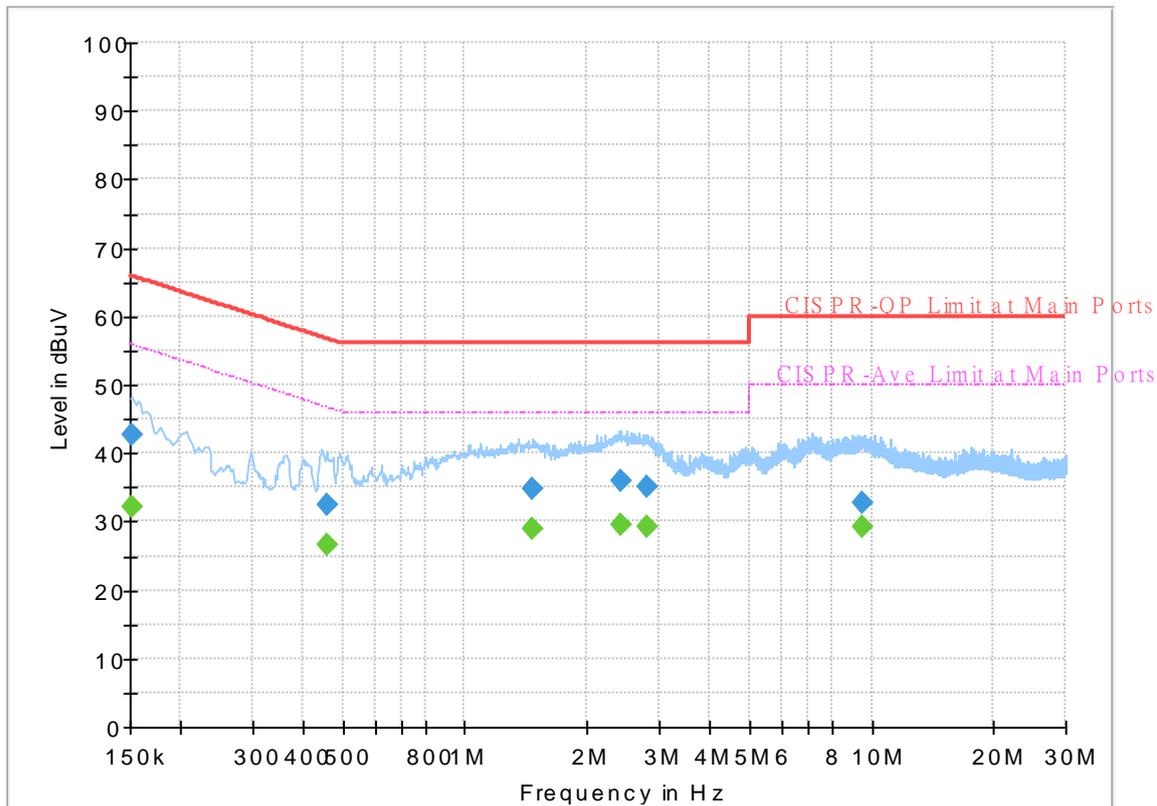


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	32.17	55.88	23.71	L1	OFF	19.7
0.152250	42.58	---	65.88	23.30	L1	OFF	19.7
0.456000	---	26.62	46.77	20.15	L1	OFF	19.8
0.456000	32.56	---	56.77	24.21	L1	OFF	19.8
1.459500	---	29.02	46.00	16.98	L1	OFF	20.2
1.459500	34.94	---	56.00	21.06	L1	OFF	20.2
2.420250	---	29.45	46.00	16.55	L1	OFF	20.1
2.420250	36.10	---	56.00	19.90	L1	OFF	20.1
2.798250	---	29.21	46.00	16.79	L1	OFF	20.1
2.798250	35.02	---	56.00	20.98	L1	OFF	20.1
9.494250	---	29.24	50.00	20.76	L1	OFF	20.1
9.494250	32.83	---	60.00	27.17	L1	OFF	20.1

EUT Information

Report NO : 1N0901
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

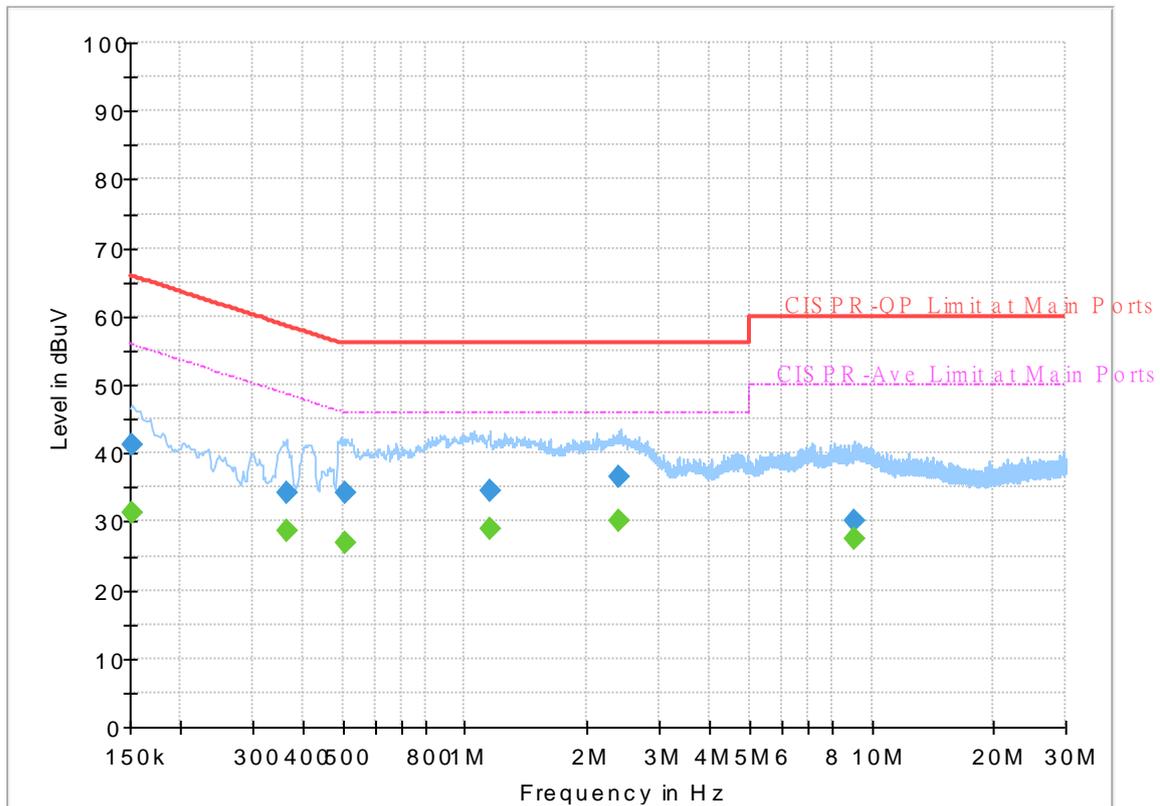

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	31.41	55.88	24.47	N	OFF	19.7
0.152250	41.20	---	65.88	24.68	N	OFF	19.7
0.363750	---	28.68	48.64	19.96	N	OFF	19.7
0.363750	34.30	---	58.64	24.34	N	OFF	19.7
0.505500	---	26.77	46.00	19.23	N	OFF	19.8
0.505500	34.34	---	56.00	21.66	N	OFF	19.8
1.151250	---	29.00	46.00	17.00	N	OFF	20.2
1.151250	34.45	---	56.00	21.55	N	OFF	20.2
2.395500	---	30.10	46.00	15.90	N	OFF	20.1
2.395500	36.70	---	56.00	19.30	N	OFF	20.1
9.080250	---	27.50	50.00	22.50	N	OFF	20.1
9.080250	30.01	---	60.00	29.99	N	OFF	20.1



Appendix C. Radiated Spurious Emission

Test Engineer :	Bill Chang, JC Liang and Nick Yu	Temperature :	18~20°C
		Relative Humidity :	65~68%

<Ant. 18>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		2365.545	48.9	-25.1	74	39.62	27.16	18.38	36.26	120	142	P	H	
		2388.855	39.51	-14.49	54	30.1	27.26	18.42	36.27	120	142	A	H	
	*	2402	98.46	-	-	88.99	27.31	18.44	36.28	120	142	P	H	
	*	2402	97.66	-	-	88.19	27.31	18.44	36.28	120	142	A	H	
													H	
														H
			2343.075	48.41	-25.59	74	39.23	27.1	18.33	36.25	400	71	P	V
			2373.84	39.35	-14.65	54	30.02	27.2	18.39	36.26	400	71	A	V
	*		2402	95.22	-	-	85.75	27.31	18.44	36.28	400	71	P	V
	*		2402	94.64	-	-	85.17	27.31	18.44	36.28	400	71	A	V
														V
														V
BLE CH 19 2440MHz		2365.68	48.43	-25.57	74	39.15	27.16	18.38	36.26	115	144	P	H	
		2371.76	39.34	-14.66	54	30.02	27.19	18.39	36.26	115	144	A	H	
	*	2440	99.95	-	-	90.27	27.46	18.51	36.29	115	144	P	H	
	*	2440	99.5	-	-	89.82	27.46	18.51	36.29	115	144	A	H	
			2483.68	48.98	-25.02	74	39.07	27.63	18.59	36.31	115	144	P	H
			2491.2	40.17	-13.83	54	30.23	27.66	18.6	36.32	115	144	A	H
			2365.68	48.35	-25.65	74	39.07	27.16	18.38	36.26	397	68	P	V
			2364.88	39.38	-14.62	54	30.1	27.16	18.38	36.26	397	68	A	V
	*		2440	98	-	-	88.32	27.46	18.51	36.29	397	68	P	V
	*		2440	97.44	-	-	87.76	27.46	18.51	36.29	397	68	A	V
			2492.48	49.35	-24.65	74	39.4	27.67	18.6	36.32	397	68	P	V
			2497.68	39.99	-14.01	54	30.01	27.69	18.61	36.32	397	68	A	V



BLE CH 39 2480MHz	*	2480	98.67	-	-	88.78	27.62	18.58	36.31	115	141	P	H
	*	2480	98.05	-	-	88.16	27.62	18.58	36.31	115	141	A	H
		2498.68	49.29	-24.71	74	39.31	27.69	18.61	36.32	115	141	P	H
		2490.52	40	-14	54	30.06	27.66	18.6	36.32	115	141	A	H
													H
													H
	*	2480	95.69	-	-	85.8	27.62	18.58	36.31	381	70	P	V
	*	2480	95.11	-	-	85.22	27.62	18.58	36.31	381	70	A	V
		2494.36	50.42	-23.58	74	40.45	27.68	18.61	36.32	381	70	P	V
		2491.04	39.97	-14.03	54	30.03	27.66	18.6	36.32	381	70	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	41.64	-32.36	74	34.25	32.22	12.71	37.54	-	-	P	H
													H
													H
		4804	41.93	-32.07	74	34.54	32.22	12.71	37.54	-	-	P	V
													V
BLE CH 19 2440MHz		4880	42.93	-31.07	74	35.18	32.58	12.77	37.6	-	-	P	H
		7320	46.98	-27.02	74	33.36	36.76	15.39	38.53	-	-	P	H
													H
													H
		4880	42.6	-31.4	74	34.85	32.58	12.77	37.6	-	-	P	V
		7320	47.22	-26.78	74	33.6	36.76	15.39	38.53	-	-	P	V
													V
BLE CH 39 2480MHz		4960	43.9	-30.1	74	35.72	33.02	12.82	37.66	-	-	P	H
		7440	46.65	-27.35	74	33.7	36.22	15.36	38.63	-	-	P	H
													H
													H
		4960	43.89	-30.11	74	35.71	33.02	12.82	37.66	-	-	P	V
		7440	46.4	-27.6	74	33.45	36.22	15.36	38.63	-	-	P	V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		2383.815	48.76	-25.24	74	39.38	27.24	18.41	36.27	114	144	P	H	
		2373.525	40.85	-13.15	54	31.53	27.19	18.39	36.26	114	144	A	H	
	*	2402	98.39	-	-	88.92	27.31	18.44	36.28	114	144	P	H	
	*	2402	97.04	-	-	87.57	27.31	18.44	36.28	114	144	A	H	
													H	
													H	
			2370.375	49	-25	74	39.69	27.18	18.39	36.26	400	69	P	V
			2383.605	40.84	-13.16	54	31.47	27.23	18.41	36.27	400	69	A	V
	*		2402	95.34	-	-	85.87	27.31	18.44	36.28	400	69	P	V
	*		2402	94.12	-	-	84.65	27.31	18.44	36.28	400	69	A	V
													V	
													V	
BLE CH 19 2440MHz		2389.66	49.15	-24.85	74	39.74	27.26	18.42	36.27	116	143	P	H	
		2389.94	41.13	-12.87	54	31.72	27.26	18.42	36.27	116	143	A	H	
	*	2440	100	-	-	90.32	27.46	18.51	36.29	116	143	P	H	
	*	2440	98.77	-	-	89.09	27.46	18.51	36.29	116	143	A	H	
			2495.87	49.09	-24.91	74	39.12	27.68	18.61	36.32	116	143	P	H
			2497.41	41.25	-12.75	54	31.27	27.69	18.61	36.32	116	143	A	H
			2371.88	48.97	-25.03	74	39.65	27.19	18.39	36.26	394	68	P	V
			2369.78	40.96	-13.04	54	31.66	27.18	18.38	36.26	394	68	A	V
	*		2440	98.12	-	-	88.44	27.46	18.51	36.29	394	68	P	V
	*		2440	96.87	-	-	87.19	27.46	18.51	36.29	394	68	A	V
			2484.88	49.13	-24.87	74	39.21	27.64	18.59	36.31	394	68	P	V
			2492.72	41.58	-12.42	54	31.63	27.67	18.6	36.32	394	68	A	V



BLE CH 39 2480MHz	*	2480	98.87	-	-	88.98	27.62	18.58	36.31	121	145	P	H
	*	2480	97.47	-	-	87.58	27.62	18.58	36.31	121	145	A	H
		2486.96	49.35	-24.65	74	39.42	27.65	18.59	36.31	121	145	P	H
		2484.56	41.59	-12.41	54	31.67	27.64	18.59	36.31	121	145	A	H
													H
													H
	*	2480	95.87	-	-	85.98	27.62	18.58	36.31	377	69	P	V
	*	2480	94.4	-	-	84.51	27.62	18.58	36.31	377	69	A	V
		2487.8	49.61	-24.39	74	39.68	27.65	18.59	36.31	377	69	P	V
		2491.72	42.03	-11.97	54	32.08	27.67	18.6	36.32	377	69	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.57	-31.43	74	35.18	32.22	12.71	37.54	-	-	P	H
													H
													H
		4804	41.84	-32.16	74	34.45	32.22	12.71	37.54	-	-	P	V
													V
BLE CH 19 2440MHz		4880	41.78	-32.22	74	34.03	32.58	12.77	37.6	-	-	P	H
		7320	47.28	-26.72	74	33.66	36.76	15.39	38.53	-	-	P	H
													H
													H
		4880	42.44	-31.56	74	34.69	32.58	12.77	37.6	-	-	P	V
		7320	46.88	-27.12	74	33.26	36.76	15.39	38.53	-	-	P	V
													V
BLE CH 39 2480MHz		4960	43.8	-30.2	74	35.62	33.02	12.82	37.66	-	-	P	H
		7440	46.1	-27.9	74	33.15	36.22	15.36	38.63	-	-	P	H
													H
													H
		4960	43.84	-30.16	74	35.66	33.02	12.82	37.66	-	-	P	V
		7440	45.53	-28.47	74	32.58	36.22	15.36	38.63	-	-	P	V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



<EUT with WPC Charging Mode>

<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	98.97	-	-	89.08	27.62	8.55	36.31	117	112	P	H
	*	2480	97.53	-	-	87.64	27.62	8.55	36.31	117	112	A	H
		2488.28	49.52	-24.48	74	39.59	27.65	8.56	36.31	117	112	P	H
		2492.04	42.51	-11.49	54	32.56	27.67	8.57	36.32	117	112	A	H
													H
													H
	*	2480	96.36	-	-	86.47	27.62	8.55	36.31	376	70	P	V
	*	2480	94.88	-	-	84.99	27.62	8.55	36.31	376	70	A	V
		2486.84	49.76	-24.24	74	39.83	27.65	8.56	36.31	376	70	P	V
		2490.08	41.77	-12.23	54	31.83	27.66	8.57	36.32	376	70	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	43.46	-30.54	74	35.28	33.02	12.35	37.66	-	-	P	H
		7440	46.62	-27.38	74	33.67	36.22	14.88	38.63	-	-	P	H
													H
													H
		4960	44.46	-29.54	74	36.28	33.02	12.35	37.66	-	-	P	V
		7440	47.02	-26.98	74	34.07	36.22	14.88	38.63	-	-	P	V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



<Ant. 16>

<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	97.88	-	-	87.99	27.62	18.58	36.31	337	282	P	H
	*	2480	96.56	-	-	86.67	27.62	18.58	36.31	337	282	A	H
		2486.12	49.88	-24.12	74	39.96	27.64	18.59	36.31	337	282	P	H
		2493.56	41.75	-12.25	54	31.8	27.67	18.6	36.32	337	282	A	H
													H
													H
	*	2480	92.85	-	-	82.96	27.62	18.58	36.31	389	51	P	V
	*	2480	91.54	-	-	81.65	27.62	18.58	36.31	389	51	A	V
		2494.28	49.94	-24.06	74	39.98	27.68	18.6	36.32	389	51	P	V
		2489.12	41.8	-12.2	54	31.86	27.66	18.6	36.32	389	51	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	43.74	-30.26	74	35.56	33.02	12.82	37.66	-	-	P	H
		7440	46.88	-27.12	74	33.93	36.22	15.36	38.63	-	-	P	H
													H
													H
		4960	43.59	-30.41	74	35.41	33.02	12.82	37.66	-	-	P	V
		7440	47.35	-26.65	74	34.4	36.22	15.36	38.63	-	-	P	V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Bill Chang, JC Liang and Nick Yu	Temperature :	18~20°C
		Relative Humidity :	65~68%

Note symbol

-L	Low channel location
-R	High channel location







<Ant. 18>
<1Mbps>





2.4GHz 2400~2483.5MHz
BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
18	Horizontal	Fundamental
Peak	<p>Site : 03CH20-HV Condition : PEAK_BE_74 3m 91200_02294_1110622 HORIZONTAL -RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH20-HV Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL -RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-HV Condition : AVG_BE_54 3m 91200_02294_1110622 HORIZONTAL -RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>	<p>Site : 03CH20-HV Condition : AVG_54 3m 91200_02294_1110622 HORIZONTAL -RBW:1000.000kHz VBW:3.000kHz SWT:Auto</p>

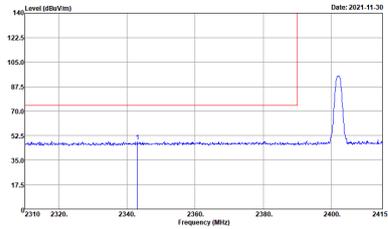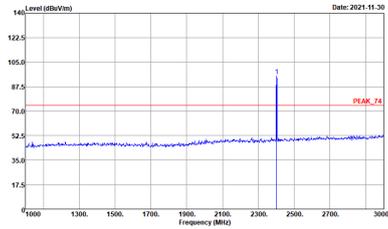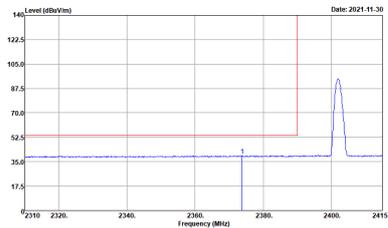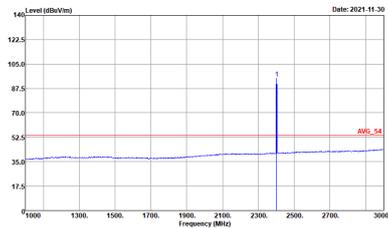

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
18	Vertical	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	 <p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>

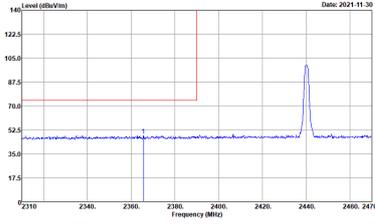
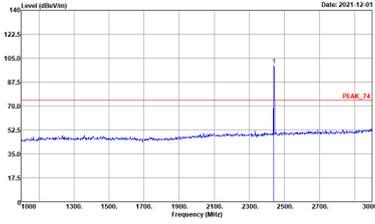
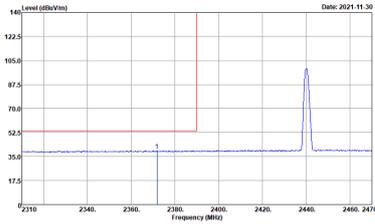
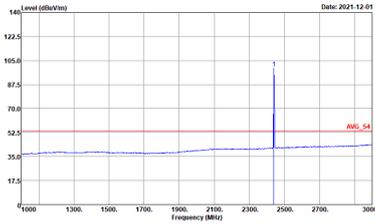


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
18	Horizontal	Fundamental
Peak	 <p>Level (dBm/1m) vs Frequency (MHz) plot for Peak Horizontal. The plot shows a sharp peak at approximately 2440 MHz. The y-axis ranges from 17.5 to 140 dBm/1m, and the x-axis ranges from 2310 to 2470 MHz. A red horizontal line is drawn at approximately 75 dBm/1m. The date is 2021-11-30.</p> <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot for Peak Fundamental. The plot shows a sharp peak at approximately 2440 MHz. The y-axis ranges from 17.5 to 140 dBm/1m, and the x-axis ranges from 1900 to 3000 MHz. A red horizontal line is drawn at approximately 75 dBm/1m. The date is 2021-12-01.</p> <p>Site : 03CH20-HY Condition : PEAK_F1 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/1m) vs Frequency (MHz) plot for Avg Horizontal. The plot shows a sharp peak at approximately 2440 MHz. The y-axis ranges from 17.5 to 140 dBm/1m, and the x-axis ranges from 2310 to 2470 MHz. A red horizontal line is drawn at approximately 75 dBm/1m. The date is 2021-11-30.</p> <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot for Avg Fundamental. The plot shows a sharp peak at approximately 2440 MHz. The y-axis ranges from 17.5 to 140 dBm/1m, and the x-axis ranges from 1900 to 3000 MHz. A red horizontal line is drawn at approximately 75 dBm/1m. The date is 2021-12-01.</p> <p>Site : 03CH20-HY Condition : AVG_F4 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
18	Horizontal	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank

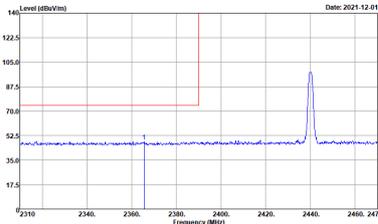
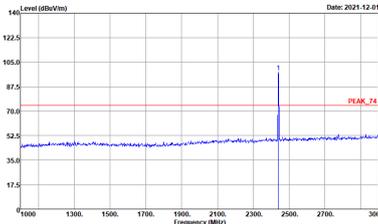
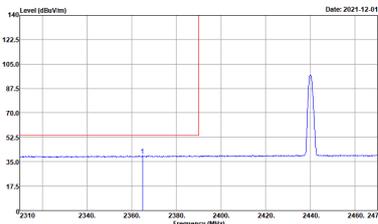
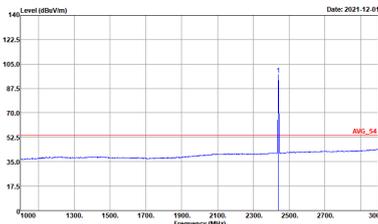


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
18	Vertical	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>

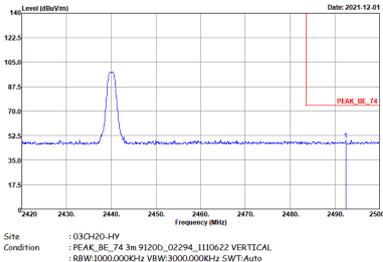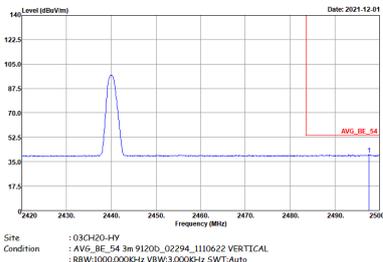

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
18	Vertical	Fundamental
Peak		Left blank
Avg.		Left blank

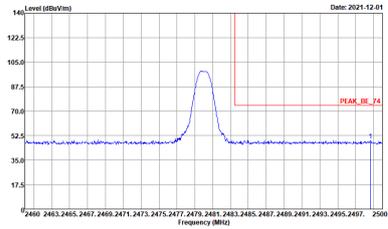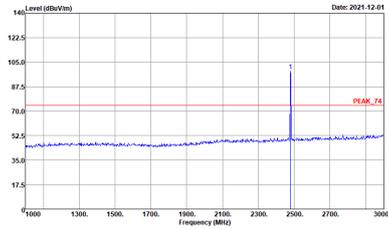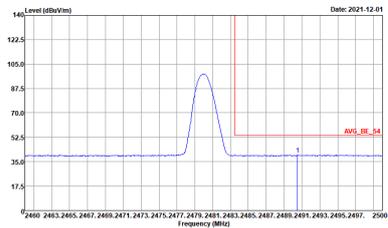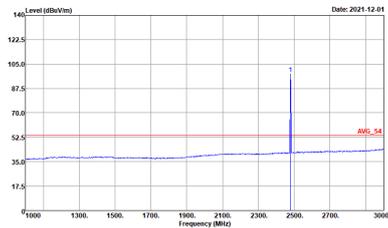

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
18	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
18	Vertical	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02294_1110622 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02294_1110622 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

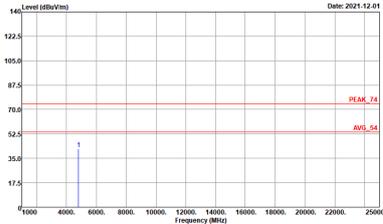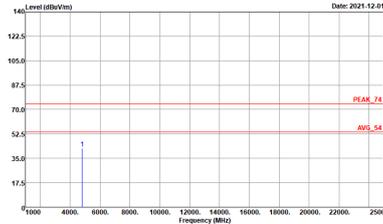BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
18	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
18	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL Detector : Peak</p>







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
18	Horizontal	Vertical
Peak	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL Detector : Peak</p>







<2Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

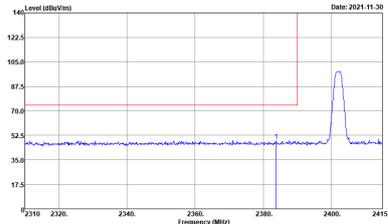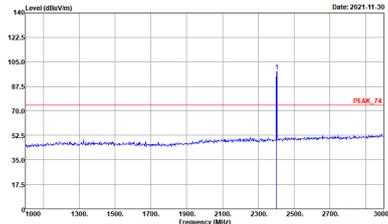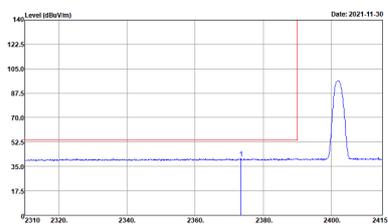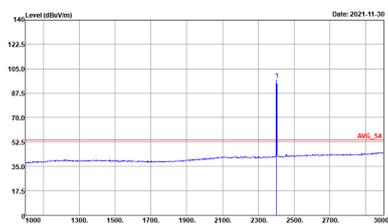BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
18	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HV Condition : PEAK_BE_74 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-HV Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HV Condition : AV6_BE_54 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>	 <p>Site : 03CH20-HV Condition : AV6_54 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>

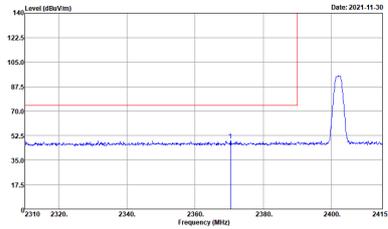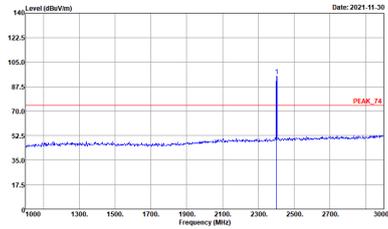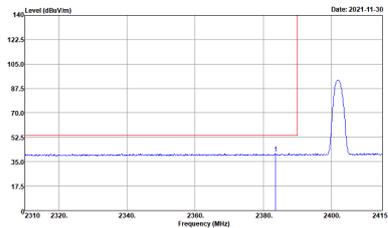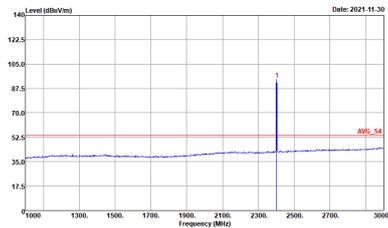

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
18	Vertical	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p>
Avg	 <p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.0000Hz VBW:10.0000Hz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.0000Hz VBW:10.0000Hz SWT:Auto</p>

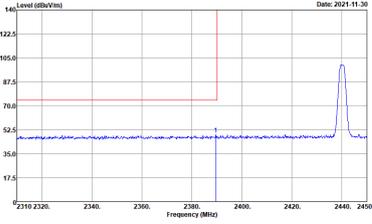
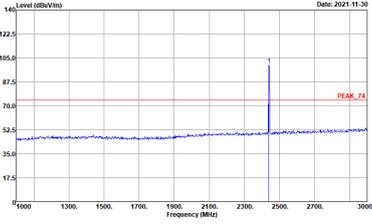
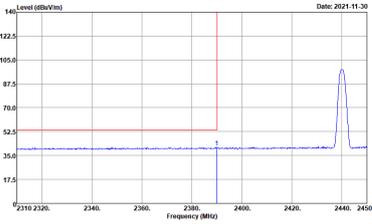
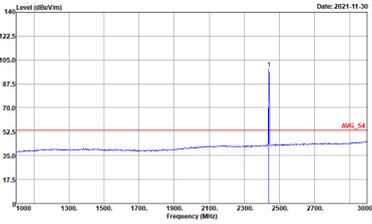


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
18	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 HORIZONTAL Detector : Peak Project : IN0901</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL Detector : Peak Project : IN0901</p>
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02294_1110622 HORIZONTAL Detector : Peak Project : IN0901</p>	 <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02294_1110622 HORIZONTAL Detector : Peak Project : IN0901</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
18	Horizontal	Fundamental
Peak		Left blank
Avg.		Left blank

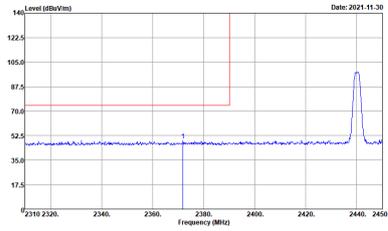
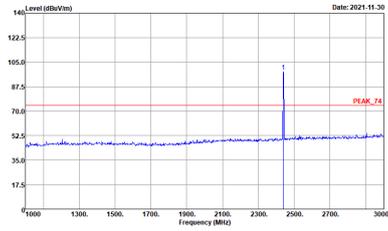
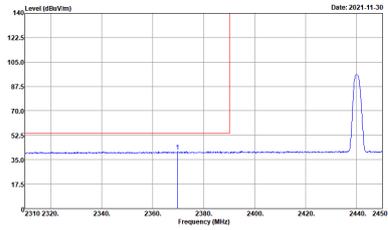
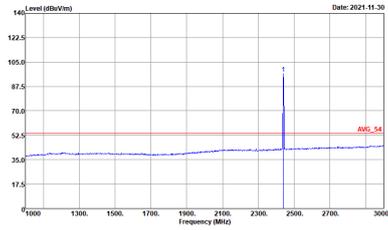


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
18	Vertical	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.0000Hz VBW:10.0000Hz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.0000Hz VBW:10.0000Hz SWT:Auto</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
18	Vertical	Fundamental
Peak		Left blank
Avg.		Left blank

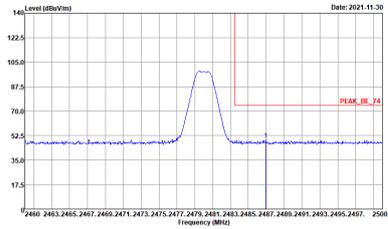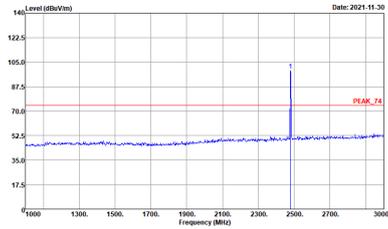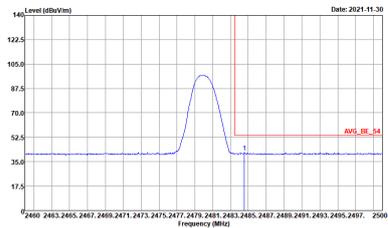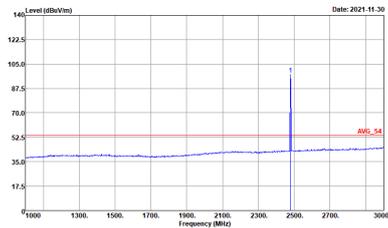

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
18	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HV Condition : PEAK_BE_74 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HV Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HV Condition : AV6_BE_54 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HV Condition : AV6_54 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
18	Vertical	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
18	Horizontal	Vertical
<p>Peak Avg.</p>	<p>Site : 03CH20-HV Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH20-HV Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL Detector : Peak</p>

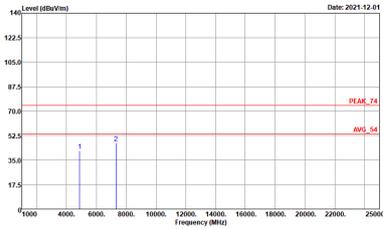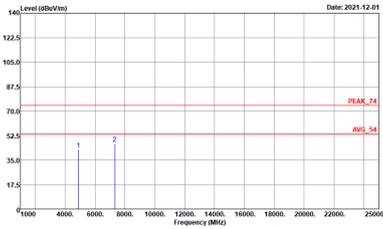



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
18	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
18	Horizontal	Vertical
Peak	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL Detector : Peak</p>



Emission below 1GHz
2.4GHz BLE (LF)

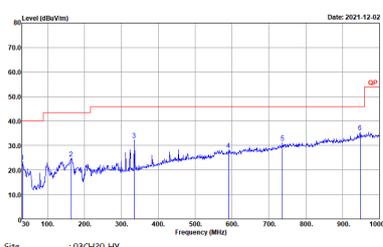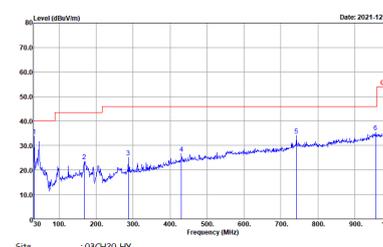BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
18	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH20-IV Condition : QP 3m LF_55606&08_1101017 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH20-IV Condition : QP 3m LF_55606&08_1101017 VERTICAL Detector : Peak</p>



<EUT with WPC Charging Mode>





<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
18	Horizontal	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02294_1110622 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>

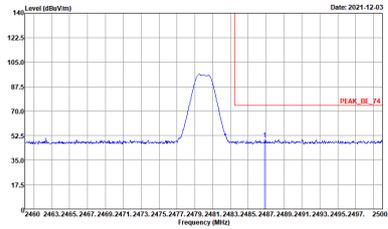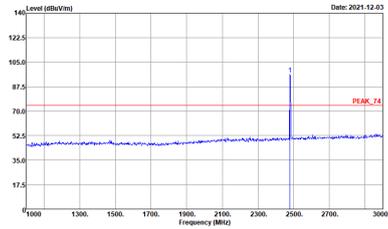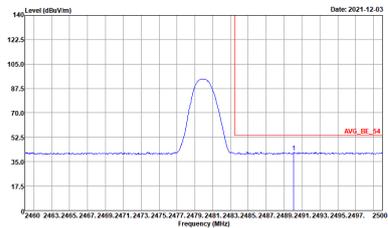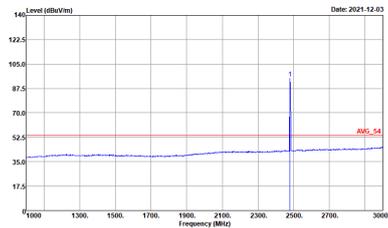

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
18	Vertical	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02294_1110622 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02294_1110622 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
18	Horizontal	Vertical
Peak	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL Detector : Peak</p>







Emission below 1GHz
2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
18	Horizontal	Vertical
QP / Peak	<p>Site : 03CH20-1V Condition : QP 3m LF_55606&08_1101017 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH20-1V Condition : QP 3m LF_55606&08_1101017 VERTICAL Detector : Peak</p>



<Ant. 16>
<2Mbps>

2.4GHz 2400~2483.5MHz
BLE (Band Edge @ 3m)

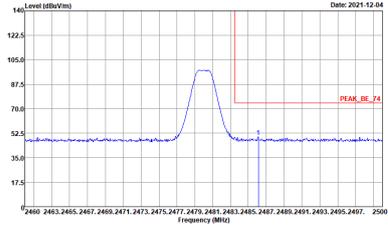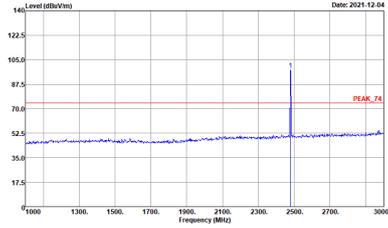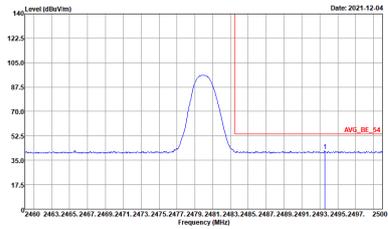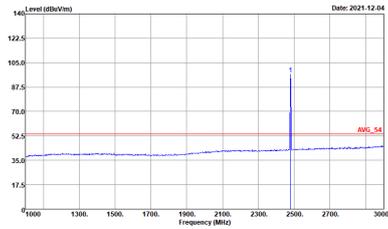BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
16	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HV Condition : PEAK_BE_74 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-HV Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HV Condition : AV6_BE_54 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>	 <p>Site : 03CH20-HV Condition : AV6_54 3m 91200_02294_1110622 HORIZONTAL RBW:1000.000kHz VBW:10.000kHz SWT:Auto</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
16	Vertical	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02294_1110622 VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
16	Horizontal	Vertical
Peak	<p>Site : 03CH20-HV Condition : PEAK_74 3m 91200_02294_1110622 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH20-HV Condition : PEAK_74 3m 91200_02294_1110622 VERTICAL Detector : Peak</p>



Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
18	Bluetooth –LE for 1Mbps	62.17	389.8	2.57	3kHz
18	Bluetooth –LE for 2Mbps	32.63	203.4	4.92	10kHz
16	Bluetooth –LE for 2Mbps	32.52	203.4	4.92	10kHz

<Ant. 18>

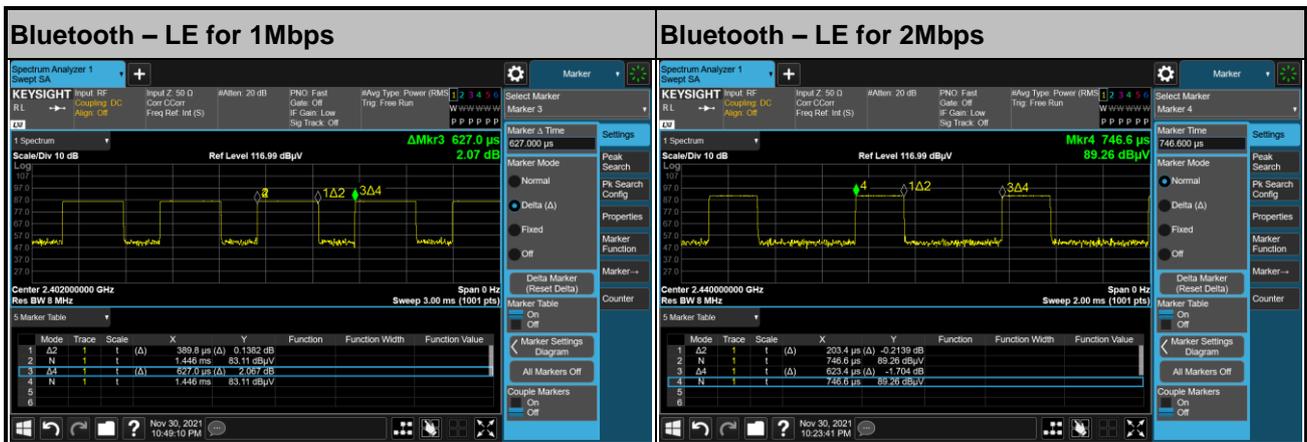

<Ant. 16>

