



FCC Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : XIAOMI
MODEL NAME : 2201123G
FCC ID : 2AFZZ123G
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Nov. 27, 2021 ~ Dec. 02, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 8

 1.6. Test Location..... 8

 1.7. Test Software 8

 1.8. Applicable Standards 8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 9

 2.1. Test Mode 9

 2.2. Connection Diagram of Test System 11

 2.3. Support Unit used in test configuration and system..... 12

 2.4. EUT Operation Test Setup 13

3. TEST RESULT..... 14

 3.1. Test of AC Conducted Emission Measurement 14

 3.2. Test of Radiated Emission Measurement 18

4. LIST OF MEASURING EQUIPMENT 22

5. UNCERTAINTY OF EVALUATION..... 23

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 4.05 dB at 0.155 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 9.10 dB at 38.730 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2. Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	XIAOMI
Model Name	2201123G
FCC ID	2AFZZ123G
EUT supports Radios application	GSM/WCDMA/LTE/5G NR/NFC WLAN 2.4GHz 802.11b/g/n (HT20/HT40) WLAN 2.4GHz 802.11ax (HE20/ HE40) WLAN 5GHz 802.11a/n (HT20/HT40) WLAN 5GHz 802.11ac (VHT20/VHT40/VHT80/VHT160) WLAN 5GHz 802.11ax (HE20/HE40/HE80/HE160) WLAN 6GHz 802.11ax (HE20/HE40/HE80/HE160) Bluetooth BR/EDR/LE GNSS/WPT
IMEI Code	Conduction: 860978050063011/860978050063029 for Sample 1 860978050068515/860978050068523 for Sample 2 860978050078019/860978050078027 for Sample 3 Radiation: 860978050068515/860978050068523 for Sample 1 860978050078734/860978050078742 for Sample 2 860978050078147/860978050078152 for Sample 3
HW Version	P2.1
SW Version	MIUI13
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three samples with different memory capacity: sample 1 is 8+256G, sample 2 is 8+128G, sample 3 is 12+256G. According to the difference, sample 1 perform full test and sample 2/3 verify the related cases.



	<p>LTE Band 42 : 3450 MHz ~ 3600 MHz LTE Band 48 : 3550 MHz ~ 3700 MHz LTE Band 66 : 2110 MHz~ 2200 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 2110 MHz~ 2200 MHz 5G NR n77: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz 802.11b/g/n/ax : 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax : 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz 802.11ax: 5925 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz GNSS : 1559 MHz ~ 1610 MHz, 1164 MHz ~ 1215 MHz WPT: 110kHz ~ 148kHz</p>
Antenna Type	<p>WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna NFC: Planar antenna WPT: Coil antenna</p>
Type of Modulation	<p>GSM/GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK HSDPA/DC-HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM (uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM / 256QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) :$\pi/4$-DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK WPT: ASK</p>

Note: GNSS = GPS + Glonass + Beidou + Galileo + SBAS + QZSS + NavIC



1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH04-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle CH) + ANT 1 + Sample 1 + USB Cable1(Charging from Adapter) + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + SIM 1
	Mode 2: WCDMA V Rx(High CH) + ANT 4 + Sample 1 + USB Cable2(Charging from Adapter) + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Battery + SIM 2
	Mode 3: LTE Band 5 Rx(Low CH) + ANT 1 + Sample 1 + USB Cable1(Charging from Adapter) + Bluetooth Idle + WLAN (6G) Idle + MPEG4(Run Color Bar) + Battery + SIM 1
	Mode 4: LTE Band 12 Rx(Middle CH) + ANT 4 + Sample 1 + USB Cable1(Charging from Adapter) + Bluetooth Idle + WLAN (2.4G) Idle + NFC On + Battery + SIM 2
	Mode 5: LTE Band 13 Rx(Low CH) + ANT 1 + Sample 1 + USB Cable1(Charging from Adapter) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + SIM 1
	Mode 6: LTE Band 17 Rx(Low CH) + ANT 4 + Sample 1 + USB Cable1(Data Link with Notebook) + Bluetooth Idle + WLAN (6G) Idle + GNSS Rx + Battery + SIM 2
	Mode 7: LTE Band 26 Rx(Middle CH) + ANT 1 + Sample 1 + USB Cable2(Data Link with Notebook) + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Battery + SIM 1
	Mode 8: GSM 850 Rx(Middle CH) + ANT 1 + Sample 2 + USB Cable1(Data Link with Notebook) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + SIM 2
	Mode 9: GSM 850 Rx(Middle CH) + ANT 1 + Sample 3 + USB Cable1(Data Link with Notebook) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + SIM 1
	Mode 10 : GSM 850 Rx(Middle CH) + ANT 1 + Sample 1 + USB Cable1(EUT Charging from Adapter) + Bluetooth Idle + WLAN (2.4G) Link + WPC(Charge the other phones) + Battery + SIM 2
	Mode 11 : GSM 850 Rx(Middle CH) + ANT 1 + Sample 1 + USB Cable1(Wireless Charger Connect to Adapter) + Bluetooth Idle + WLAN (5G) Link +WPC(EUT Power From Wireless Charger) + Earphone + Battery + SIM 1



Radiated Emissions	<p>Mode 1: GSM 850 Rx(Middle CH) + ANT 1 + Sample 1 + USB Cable1(Charging from Adapter) + Bluetooth Link + WLAN (2.4G) Idle + Camera(Rear) + Battery + SIM 1</p> <p>Mode 2: WCDMA V Rx(High CH) + ANT 4 + Sample 1 + USB Cable2(Charging from Adapter) + Bluetooth Link + WLAN (5G) Idle + Camera(Front) + Battery + SIM 2</p> <p>Mode 3: LTE Band 5 Rx(Low CH) + ANT 1 + Sample 1 + Bluetooth Link + WLAN (6G) Idle + MPEG4(Run Color Bar) + Earphone + Battery + SIM1</p> <p>Mode 4: LTE Band 12 Rx(Middle CH) + ANT 4 + Sample 1 + USB Cable1(Charging from Adapter) + Bluetooth Link + WLAN (2.4G) Idle + NFC On + Battery + SIM 2</p> <p>Mode 5: LTE Band 13 Rx(Low CH) + ANT 1 + Sample 1 + USB Cable1(Charging from Adapter) + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + SIM 1</p> <p>Mode 6: LTE Band 17 Rx(Low CH) + ANT 4 + Sample 1 + USB Cable1(Data Link with Notebook) + Bluetooth Link + WLAN (6G) Idle + GNSS Rx + Battery + SIM 2</p> <p>Mode 7: LTE Band 26 Rx(Middle CH) + ANT 1 + Sample 1 + USB Cable2(Data Link with Notebook) + Bluetooth Link + WLAN (2.4G) Idle + GNSS Rx + Battery + SIM 1</p> <p>Mode 8: LTE Band 17 Rx(Low CH) + ANT 4 + Sample 2 + USB Cable1(Data Link with Notebook) + Bluetooth Link + WLAN (5G) Idle + GNSS Rx + Battery + SIM 2</p> <p>Mode 9: LTE Band 17 Rx(Low CH) + ANT 4 + Sample 3 + USB Cable1(Data Link with Notebook) + Bluetooth Link + WLAN (5G) Idle + GNSS Rx + Battery + SIM 1</p> <p>Mode 10: LTE Band 17 Rx(Low CH) + ANT 4 + Sample 1 + USB Cable(EUT Charging from Adapter) + Bluetooth Link + WLAN (2.4G) Link + WPC(Charge the other phones) + Battery + SIM 2</p> <p>Mode 11: LTE Band 17 Rx(Low CH) + ANT 4 + Sample 1 + USB Cable(Wireless Charger Connect to Adapter) + Bluetooth Link + WLAN (5G) Link + WPC(EUT Power From Wireless Charger) + Earphone + Battery</p>
Remark:	
<ol style="list-style-type: none"> 1. The worst case of AC is mode 1; only the test data of this mode is reported. 2. The worst case of RE is mode 11; only the test data of this mode is reported. 3. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report. 	

2.2. Connection Diagram of Test System

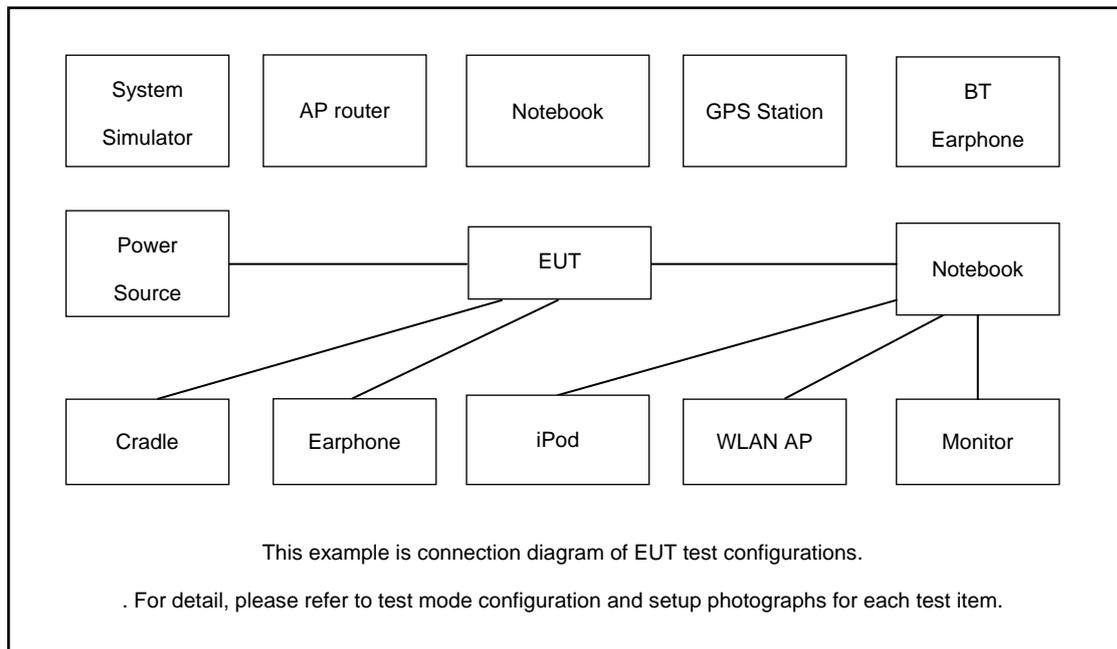

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
3.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
4.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A
5.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
6.	Notebook	Lenovo	V130-14IKB001	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
7.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
8.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
9.	Vector Signal Generator	R&S	SMBV100A	N/A	N/A	Unshielded,1.8m
10.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
11.	SD Card	Kingston	8GB	N/A	N/A	N/A
12.	Earphone	MI	EM023	N/A	Unshielded,1.2m	N/A
13.	NFC Card	N/A	N/A	N/A	N/A	N/A
14.	Wireless Charger	MI	MDY-12-EN	N/A	N/A	N/A
15.	Phone	MI	N/A	N/A	N/A	N/A



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function..
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
5. Turn on NFC function
6. Turn on WPT function



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

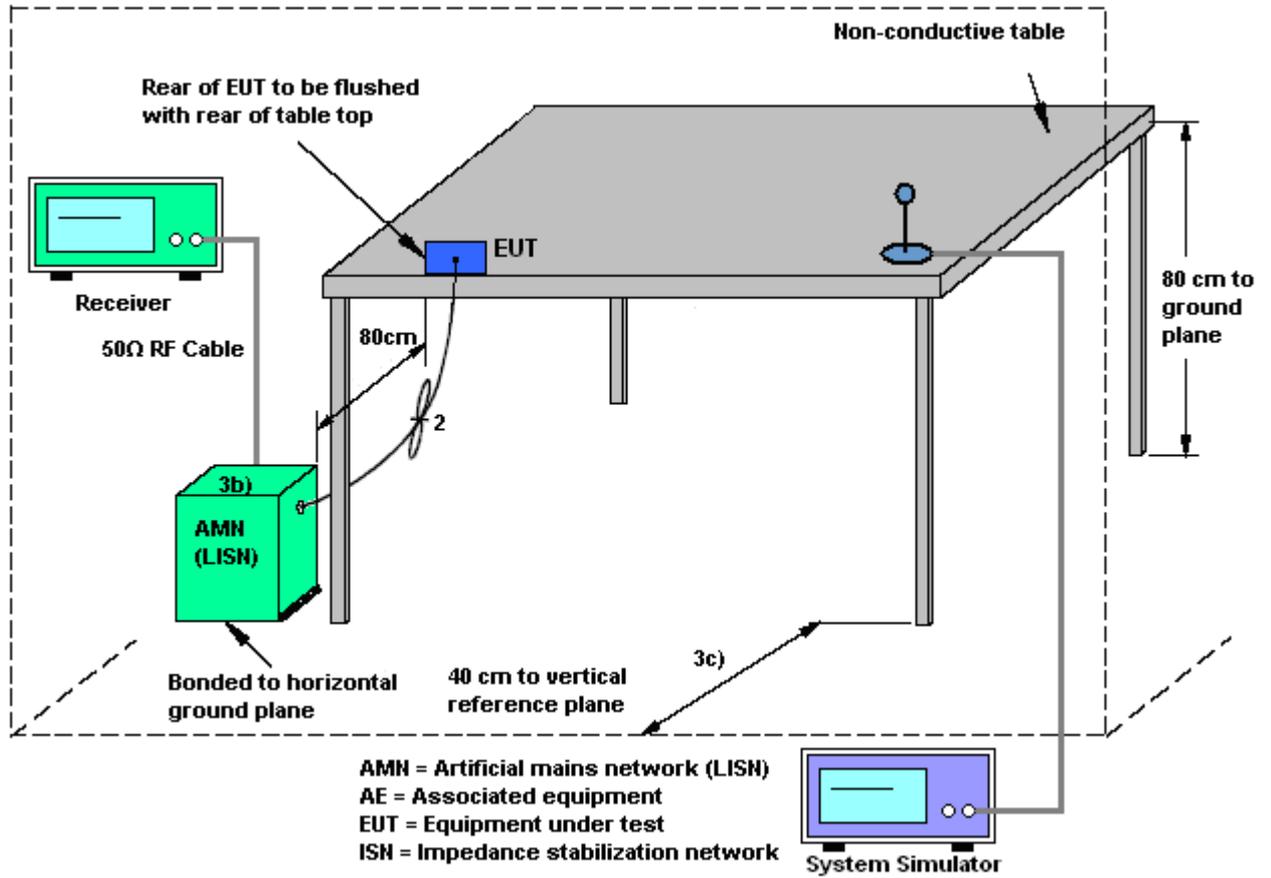



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Wang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

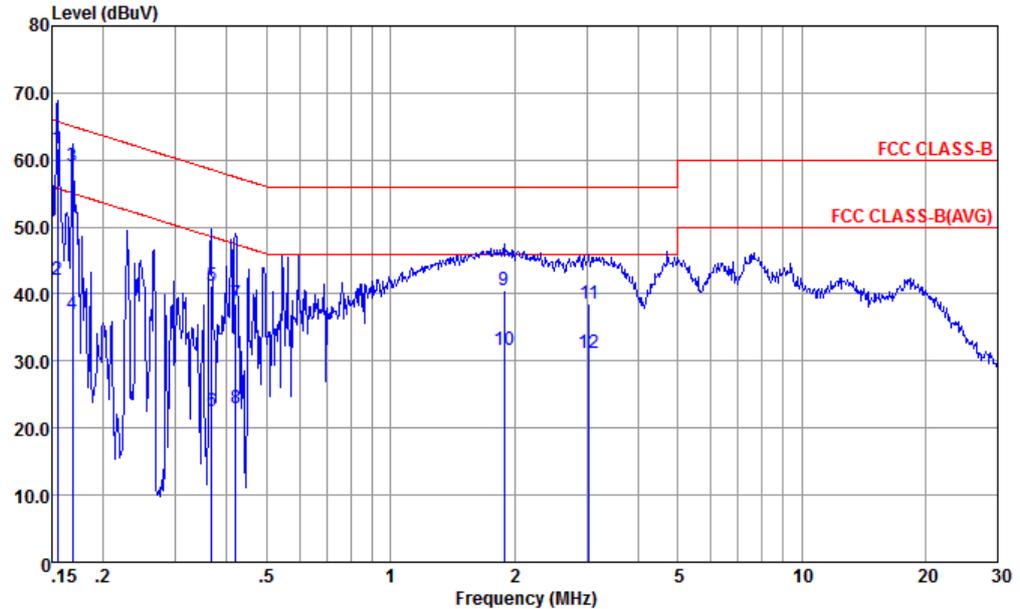


Site : CO01-KS
 Condition : FCC CLASS-B LISN-060105-L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.155	61.69	-4.05	65.74	51.20	0.02	10.47	QP
2	0.155	42.09	-13.65	55.74	31.60	0.02	10.47	Average
3	0.169	59.06	-5.97	65.03	48.60	0.03	10.43	QP
4	0.169	37.06	-17.97	55.03	26.60	0.03	10.43	Average
5	0.367	41.16	-17.40	58.56	30.80	0.08	10.28	QP
6	0.367	22.56	-26.00	48.56	12.20	0.08	10.28	Average
7	0.419	38.55	-18.91	57.46	28.20	0.09	10.26	QP
8	0.419	22.85	-24.61	47.46	12.50	0.09	10.26	Average
9	1.888	40.57	-15.43	56.00	30.20	0.14	10.23	QP
10	1.888	31.57	-14.43	46.00	21.20	0.14	10.23	Average
11	3.041	38.59	-17.41	56.00	28.20	0.15	10.24	QP
12	3.041	31.19	-14.81	46.00	20.80	0.15	10.24	Average



Test Engineer :	Amos Wang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

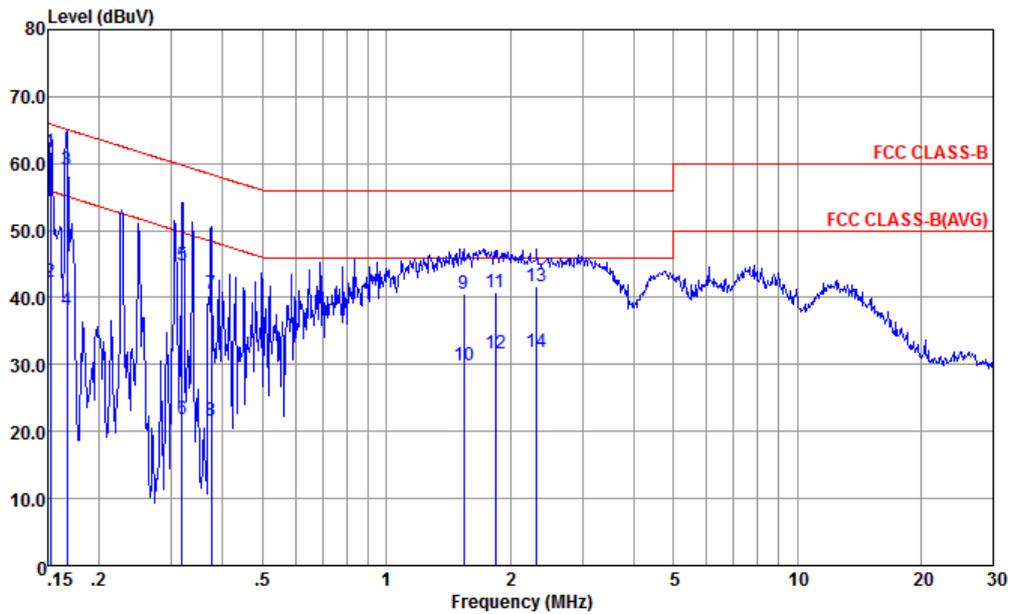

Site : CO01-KS
 Condition : FCC CLASS-B LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	61.68	-4.19	65.87	51.10	0.11	10.47	QP
2	0.152	42.38	-13.49	55.87	31.80	0.11	10.47	Average
3	0.167	59.14	-5.98	65.12	48.59	0.11	10.44	QP
4	0.167	38.04	-17.08	55.12	27.49	0.11	10.44	Average
5	0.318	44.90	-14.85	59.75	34.50	0.10	10.30	QP
6	0.318	21.90	-27.85	49.75	11.50	0.10	10.30	Average
7	0.375	40.58	-17.81	58.39	30.20	0.10	10.28	QP
8	0.375	21.68	-26.71	48.39	11.30	0.10	10.28	Average
9	1.544	40.56	-15.44	56.00	30.20	0.13	10.23	QP
10	1.544	29.96	-16.04	46.00	19.60	0.13	10.23	Average
11	1.839	40.87	-15.13	56.00	30.50	0.14	10.23	QP
12	1.839	31.57	-14.43	46.00	21.20	0.14	10.23	Average
13	2.321	41.58	-14.42	56.00	31.21	0.14	10.23	QP
14	2.321	31.88	-14.12	46.00	21.51	0.14	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


- Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

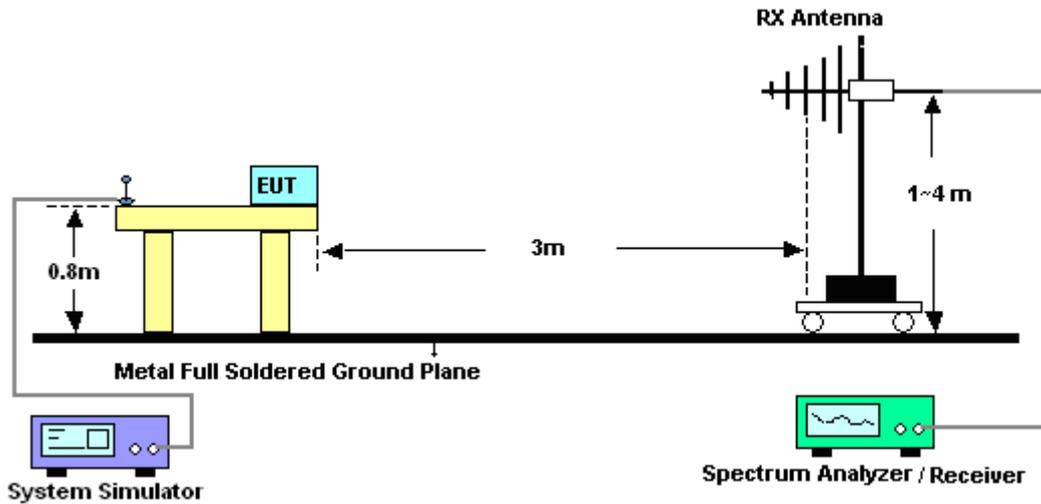


For radiated emissions above 1GHz

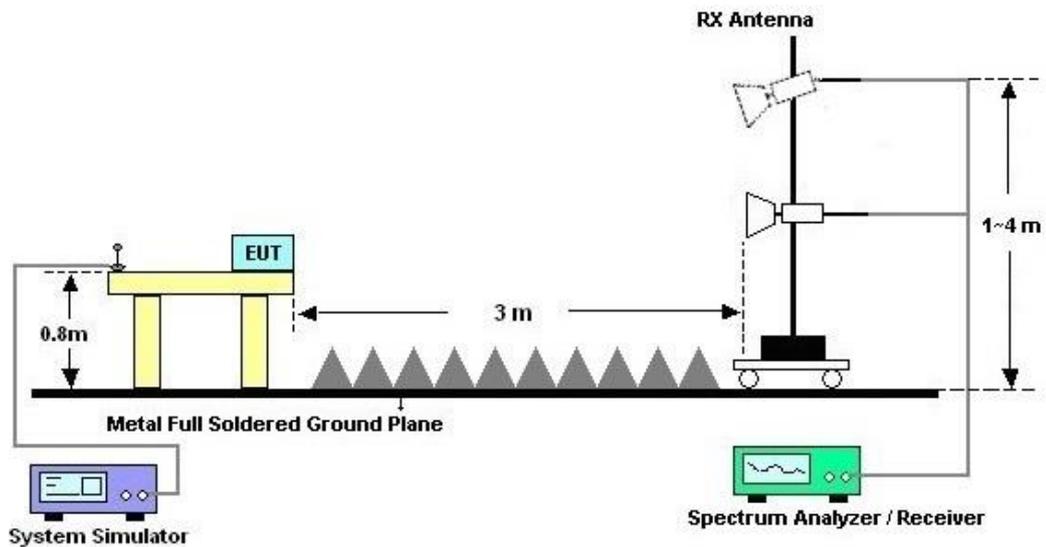



3.2.5. Test Result of Radiated Emission

Test Engineer :	Yoke Si	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored.		

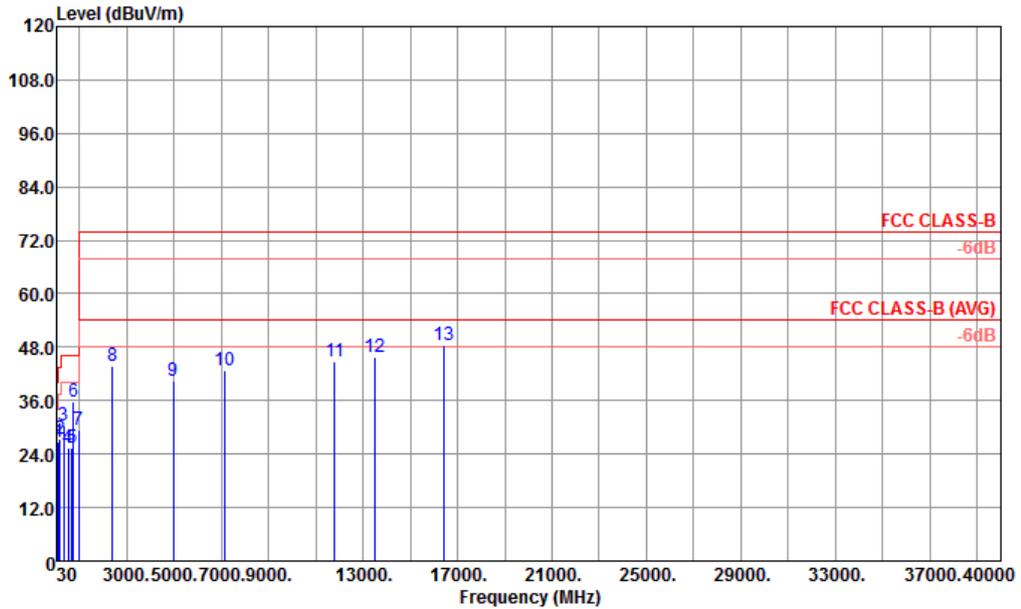


Site : 03ch04-KS
 Condition : FCC CLASS-B 3m CBL6112D SN49922NEW HORIZONTAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	96.93	26.65	-16.85	43.50	42.62	15.55	1.46	32.98	---	Peak
2	166.77	27.38	-16.12	43.50	42.72	15.75	1.88	32.97	---	Peak
3	333.61	30.42	-15.58	46.00	40.76	19.75	2.68	32.77	---	Peak
4	524.70	25.34	-20.66	46.00	30.03	24.63	3.38	32.70	---	Peak
5	667.29	25.50	-20.50	46.00	27.90	26.36	3.81	32.57	---	Peak
6	739.07	35.60			36.67	27.53	3.98	32.58	---	Peak
7	951.50	29.26	-16.74	46.00	26.02	30.83	4.51	32.10	---	Peak
8	2408.00	43.69	-30.31	74.00	68.35	32.18	7.21	64.05	---	Peak
9	4984.00	40.35	-33.65	74.00	60.29	34.39	10.48	64.81	---	Peak
10	7152.00	42.86	-31.14	74.00	58.13	35.97	12.61	63.85	---	Peak
11	11799.00	44.69	-29.31	74.00	51.85	38.61	16.41	62.18	---	Peak
12	13500.00	45.84	-28.16	74.00	52.62	38.90	17.57	63.25	---	Peak
13	16407.00	48.34	-25.66	74.00	52.81	41.80	19.38	65.65	---	Peak



Test Engineer :	Yoke Si	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#5 is system simulator signal which can be ignored.		

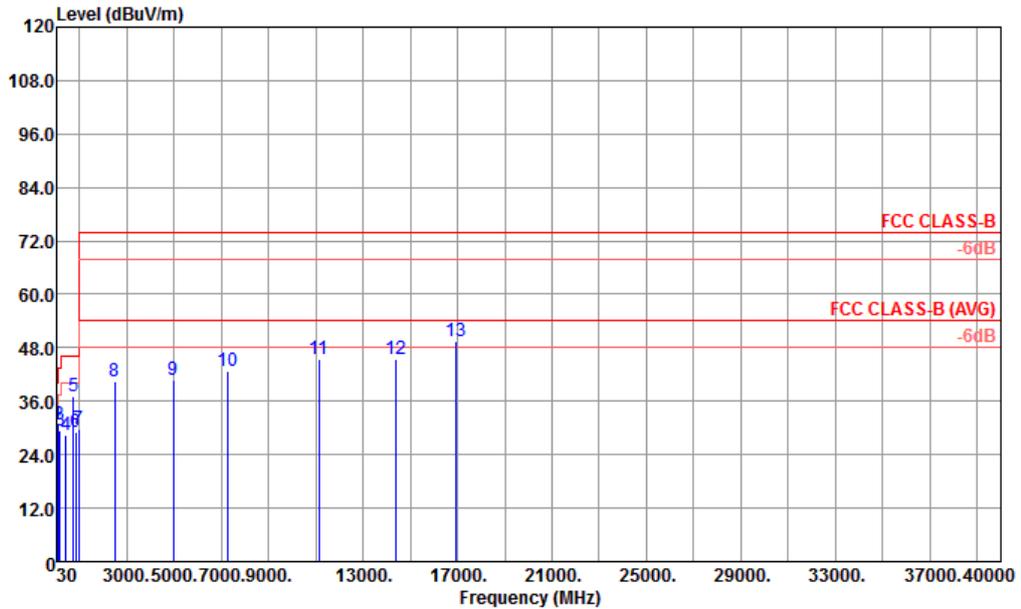

Site : 03ch04-KS
 Condition : FCC CLASS-B 3m CBL6112D SN49922NEW VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	38.73	30.90	-9.10	40.00	43.01	20.11	0.86	33.08	---	---	Peak
2	96.93	30.79	-12.71	43.50	46.76	15.55	1.46	32.98	---	---	Peak
3	162.89	29.41	-14.09	43.50	44.52	16.01	1.85	32.97	---	---	Peak
4	429.64	28.55	-17.45	46.00	35.27	22.48	3.04	32.24	---	---	Peak
5	739.07	37.06			38.13	27.53	3.98	32.58	---	---	Peak
6	831.22	29.19	-16.81	46.00	28.40	28.80	4.22	32.23	---	---	Peak
7	963.14	29.83	-24.17	54.00	26.74	30.62	4.54	32.07	---	---	Peak
8	2504.00	40.55	-33.45	74.00	65.22	32.10	7.35	64.12	---	---	Peak
9	4960.00	40.80	-33.20	74.00	60.78	34.38	10.45	64.81	---	---	Peak
10	7256.00	42.80	-31.20	74.00	58.19	35.95	12.69	64.03	---	---	Peak
11	11124.00	45.62	-28.38	74.00	54.07	37.98	15.96	62.39	---	---	Peak
12	14409.00	45.62	-28.38	74.00	52.50	39.46	18.19	64.53	---	---	Peak
13	16911.00	49.62	-24.38	74.00	53.03	42.50	19.75	65.66	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Nov. 27, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Nov. 27, 2021	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 14, 2021	Nov. 27, 2021	Oct. 13, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Nov. 27, 2021	Oct. 13, 2022	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 17, 2021	Dec. 02, 2021	Jul. 16, 2022	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz, Max 30dB	Apr. 13, 2021	Dec. 02, 2021	Apr. 12, 2022	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 30, 2021	Dec. 02, 2021	May 29, 2022	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 18, 2021	Dec. 02, 2021	Apr. 17, 2022	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 09, 2021	Dec. 02, 2021	Nov. 08, 2022	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 07, 2021	Dec. 02, 2021	Jan. 06, 2022	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz~3000MHz	Oct. 30, 2021	Dec. 02, 2021	Oct. 29, 2022	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 13, 2021	Dec. 02, 2021	Oct. 12, 2022	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 02, 2021	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 02, 2021	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 02, 2021	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------