



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : XIAOMI
MODEL NAME : 22071212AG
FCC ID : 2AFZZ12AG
STANDARD : 47 CFR Part 2, 22, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jun. 03, 2022 ~ Jun. 13, 2022

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	7
1.6 Maximum ERP/EIRP Power and Emission Designator	7
1.7 Testing Location	9
1.8 Test Software	9
1.9 Applicable Standards	10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	11
2.1 Test Mode	11
2.2 Connection Diagram of Test System	13
2.3 Support Unit used in test configuration and system	13
2.4 Measurement Results Explanation Example	13
2.5 Frequency List of Low/Middle/High Channels	14
3 CONDUCTED TEST ITEMS	20
3.1 Measuring Instruments	20
3.2 Test Setup	20
3.3 Test Result of Conducted Test	20
3.4 Conducted Output Power and ERP/EIRP	21
3.5 Peak-to-Average Ratio	22
3.6 Occupied Bandwidth	23
3.7 Conducted Band Edge	24
3.8 Conducted Spurious Emission	26
3.9 Frequency Stability	27
4 RADIATED TEST ITEMS	28
4.1 Measuring Instruments	28
4.2 Test Setup	28
4.3 Test Result of Radiated Test	29
4.4 Radiated Spurious Emission	30
5 LIST OF MEASURING EQUIPMENT	31
6 UNCERTAINTY OF EVALUATION	32
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG250504F	Rev. 01	Initial issue of report	Jun. 20, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5)	ERP < 7 Watt		
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7, n41, n38)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (5G NR n66)	EIRP < 1Watt		
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §27.53(h)	Conducted Band Edge Measurement (5G NR n5) (5G NR n66)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7, n41, n38)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §27.53(h)	Conducted Spurious Emission (5G NR n5) (5G NR n66)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §27.53(h)	Radiated Spurious Emission (5G NR n5) (5G NR n66)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 27.88 dB at 10140.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])		

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	XIAOMI
Model Name	22071212AG
FCC ID	2AFZZ12AG
IMEI Code	Conducted : 860232060096466 Radiation : 860232060096565/860232060096573
HW Version	P2
SW Version	MIUI 13
EUT Stage	Identical Prototype

Remark: Only 5G NR bands are tested in this report, all the other RF bands are tested in the other reports separately.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz
Rx Frequency	5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 2110 MHz ~ 2200 MHz
SCS	15kHz, 30kHz
Bandwidth	n5 (15kHz): 5MHz / 10MHz / 15MHz / 20MHz / 25MHz n5 (30kHz): 10MHz / 15MHz / 20MHz / 25MHz n7 (15kHz): 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz / 50MHz n7 (30kHz): 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz / 50MHz n38 (15kHz): 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz /

	40MHz n38 (30kHz) : 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz n41 (15kHz): 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz n41 (30kHz): 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz n66 (15kHz): 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz n66 (30kHz): 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz
Antenna Gain	<Ant. 0>: n5: -5.4 dBi n7: -3.5 dBi n38: -3.5 dBi n41: -3.5 dBi n66: -3.7 dBi <Ant. 1>: n5: -5.4 dBi n7: -1.6 dBi n38: -1.6 dBi n41: -1.6 dBi n66: -1.4 dBi <Ant. 2>: n7: -1.44 dBi n38: -1.44 dBi n41: -1.44 dBi n66: -1.77 dBi <Ant. 3>: n7: -3.37 dBi n38: -3.37 dBi n41: -3.37 dBi n66: -4.72 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Note:

1. The maximum ERP/EIRP is calculated from max output power and antenna gain, only the maximum ERP/EIRP is shown in the report: 5G NR n5 for Ant. 0, n38/66 for Ant. 1 and n7/n41 for Ant. 2.
2. The device supports two PAs for 5G NR n7/n41/n66(main PA for SA mode and other PA for NSA mode), the maximum power of other PA is higher than the main PA for n7/n41 and high main PA power for n66, therefore, we chose higher power PA to calculate the EIRP and show in the report.
3. 5G NR support SA mode and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode for all bands.
4. 5G NR bands support SCS 15kHz and SCS 30kHz. According to the maximum power, n5 SCS 15kHz covers SCS 30kHz for BW 10/15/20/25MHz, n7 SCS 15kHz covers SCS 30kHz for BW 10/15/20/25/30/40/50MHz, n38/n66 SCS 15kHz covers SCS 30kHz for BW 10/15/20/25/30/40MHz, n41 SCS 15kHz covers SCS 30kHz for BW 10/15/20/30/40/50MHz.
5. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
6. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power and Emission Designator

5G NR n5 SA SCS 15KHz		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0543	4M47G7D	0.0406	4M48W7D
10	829.0 ~ 844.0	0.0550	9M30G7D	0.0406	9M29W7D
15	831.5 ~ 841.5	0.0551	14M1G7D	0.0417	14M1W7D
20	834.0 ~ 839.0	0.0551	18M9G7D	0.0419	18M9W7D
25	836.5	0.0552	23M7G7D	0.0410	23M7W7D

5G NR n7 SA/EN DC_66A-n7A SCS 15KHz		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.1841	4M51G7D	0.1483	4M50W7D
10	2505 ~ 2565	0.1972	9M35G7D	0.1489	9M35W7D
15	2507.5 ~ 2562.5	0.2009	14M2G7D	0.1479	14M2W7D
20	2510 ~ 2560	0.1968	19M1G7D	0.1496	19M1W7D
25	2512.5 ~ 2557.5	0.1675	23M9G7D	0.1225	23M9W7D
30	2515 ~ 2555	0.2009	28M9G7D	0.1483	28M9W7D
40	2520 ~ 2550	0.1871	39M0G7D	0.1493	39M0W7D
50	2525 ~ 2545	0.2014	48M6G7D	0.1626	48M7W7D

5G NR n38 SA SCS 15KHz		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2572.5 ~ 2617.5	0.1888	4M48G7D	0.1923	4M47W7D
10	2575.0 ~ 2615.0	0.2004	9M29G7D	0.1706	9M30W7D
15	2577.5 ~ 2612.5	0.2004	14M1G7D	0.1710	14M2W7D
20	2580.0 ~ 2610.0	0.2014	18M9G7D	0.1718	18M9W7D
25	2582.5 ~ 2607.5	0.1710	23M7G7D	0.1419	23M7W7D
30	2585.0 ~ 2605.0	0.2028	28M6G7D	0.1694	28M6W7D
40	2590.0 ~ 2600.0	0.2032	38M7G7D	0.1683	38M6W7D



5G NR n41 SA/EN DC_66A-n41A SCS 15KHz		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2501.010 ~ 2685.000	0.2004	9M29G7D	0.1641	9M30W7D
15	2503.500 ~ 2682.495	0.2000	14M1G7D	0.1633	14M2W7D
20	2506.005 ~ 2679.990	0.1968	18M9G7D	0.1641	18M9W7D
30	2511.000 ~ 2674.995	0.1986	28M6G7D	0.1629	28M6W7D
40	2516.010 ~ 2670.000	0.2004	38M7G7D	0.1633	38M6W7D
50	2521.005 ~ 2664.990	0.2009	48M2G7D	0.1641	48M3W7D

5G NR n41 SA/EN DC_66A-n41A SCS 30KHz		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2501.01 ~ 2685.00	0.1841	8M60G7D	0.1493	8M59W7D
15	2503.50 ~ 2682.48	0.1849	13M6G7D	0.1500	13M6W7D
20	2506.02 ~ 2679.99	0.1858	18M2G7D	0.1496	18M2W7D
30	2511.00 ~ 2674.98	0.1841	27M9G7D	0.1489	27M9W7D
40	2516.01 ~ 2670.00	0.1837	37M8G7D	0.1479	37M9W7D
50	2521.02 ~ 2664.99	0.1837	47M6G7D	0.1489	47M5W7D
60	2526.00 ~ 2659.98	0.1837	57M9G7D	0.1479	57M9W7D
70	2531.01 ~ 2655.00	0.1824	67M6G7D	0.1476	67M6W7D
80	2536.02 ~ 2649.99	0.1828	77M6G7D	0.1483	77M6W7D
90	2541.00 ~ 2644.98	0.1837	87M7G7D	0.1479	87M6W7D
100	2546.01 ~ 2640.00	0.1986	97M7G7D	0.1570	97M6W7D

5G NR n66 SA SCS 15KHz		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1712.5 ~ 1777.5	0.1875	4M51G7D	0.1503	4M51W7D
10	1715.0 ~ 1775.0	0.1879	9M36G7D	0.1517	9M36W7D
15	1717.5 ~ 1772.5	0.1884	14M3G7D	0.1500	14M3W7D
20	1720.0 ~ 1770.0	0.1888	19M1G7D	0.1517	19M1W7D
25	1722.5 ~ 1767.5	0.1633	24M0G7D	0.1306	24M0W7D
30	1725.0 ~ 1765.0	0.1901	28M9G7D	0.1524	28M9W7D
40	1730.0 ~ 1760.0	0.1919	39M0G7D	0.1521	39M0W7D

Note:



1. 5G NR Band n41 overlaps the entire frequency range of Band n38. Therefore, the conducted test results provided in this report covers Band n41 as well as Band n38, and 5G NR n38 supports BW 5/25MHz for SCS 15kHz, it is tested in the report.
2. All modulations have been tested, only maximum bandwidth and the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22, 24, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)									Modulation					RB #		Test Channel		
		5	10/ 15	20	25	30	40	50	60- 90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n5	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n7	v	v	v	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	n38	v	v	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
	n41	-	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
Peak-to- Average Ratio	n5			v		-	-	-	-	-	v	v				v	v	v	v	v
	n7			v					-	-	v	v				v	v	v	v	v
	n38				v			-	-	-	v	v				v	v	v	v	v
	n41	-		v	-						v	v				v	v	v	v	v
	n66			v							v	v				v	v	v	v	v
26dB and 99% Bandwidth	n5	v	v	v	v	-	-	-	-	-	v	v	v	v	v		v		v	
	n7	v	v	v	v	v	v	v	-	-	v	v	v	v	v		v		v	
	n38	v			v			-	-	-	v	v	v	v	v		v		v	
	n41	-	v	v	-	v	v	v	v	v	v	v	v	v	v		v		v	
	n66	v	v	v	v	v	v				v	v	v	v	v		v		v	



Test Items	5G NR	Bandwidth (MHz)									Modulation					RB #		Test Channel		
		5	10/15	20	25	30	40	50	60-90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Conducted Band Edge	n5	v	v			-	-	-	-	-	v	v				v	v	v		v
					v						v	v				v	v		v	
	n7	v		v				v	-	-	v	v				v	v	v		v
	n38	v			v			-	-	-	v	v				v	v	v		v
	n41	-	v	v	-			v		v	v	v				v	v	v		v
	n66	v		v			v				v	v				v	v	v		v
Conducted Spurious Emission	n5	v	v			-	-	-	-	-	v	v				v		v	v	v
					v						v	v				v			v	
	n7	v		v				v	-	-	v	v				v		v	v	v
	n38	v			v			-	-	-	v	v				v		v	v	v
	n41	-	v	v	-			v		v	v	v				v		v	v	v
	n66	v		v			v				v	v				v		v	v	v
Frequency Stability	n5			v		-	-	-	-	-		v					v		v	
	n7			v					-	-		v					v		v	
	n38				v			-	-	-		v					v		v	
	n41	-		v	-							v					v		v	
	n66			v								v					v		v	
E.R.P / E.I.R.P	n5	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n7	v	v	v	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	n38	v	v	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
	n41	-	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n5	Worst Case																	v	
	n7	Worst Case																	v	
	n38	Worst Case																	v	
	n41	Worst Case																	v	
	n66	Worst Case																	v	
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "- " means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All modulations (BPSK/QPSK/16QAM/64QAM/256QAM) have been tested, and only the worst test results are shown in the report . 5. Frequency Stability : Normal Voltage = 3.85V ; Low Voltage =3.6V. ; High Voltage =4.25V																			

2.2 Connection Diagram of Test System

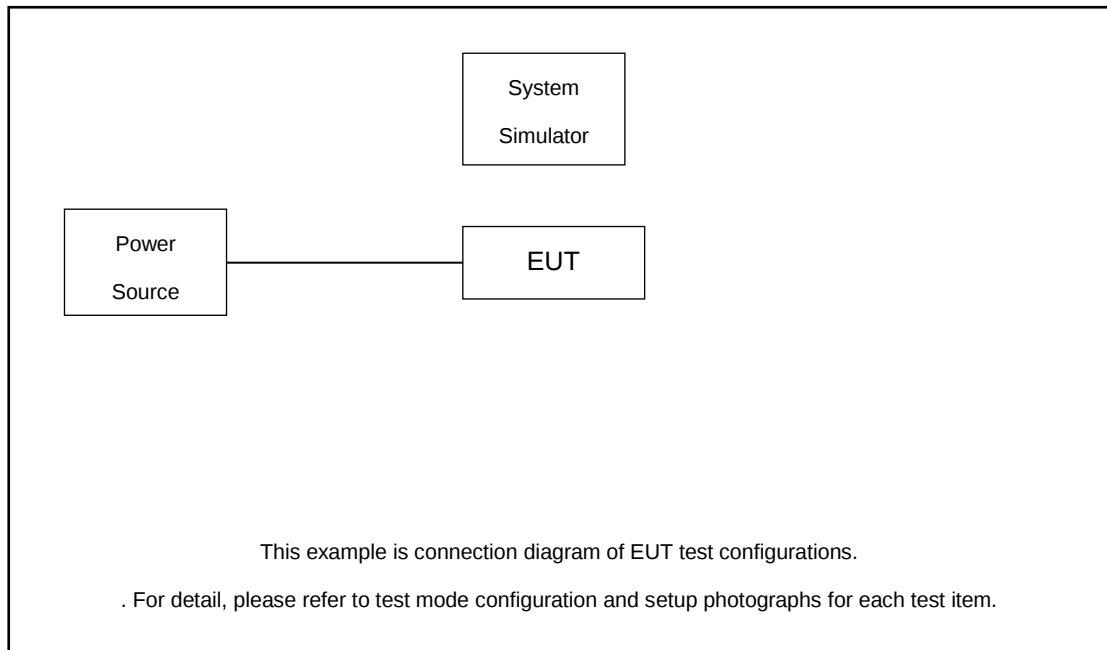

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.99 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.99 + 10 = 14.99 \text{ (dB)}
 \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n5 Channel and Frequency List for SCS 15kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
25	Channel	-	176300	-
	Frequency	-	836.5	-
20	Channel	175800	176300	176800
	Frequency	834	836.5	839
15	Channel	175300	176300	177300
	Frequency	831.5	836.5	841.5
10	Channel	174800	176300	177800
	Frequency	829	836.5	844
5	Channel	174300	176300	178300
	Frequency	826.5	836.5	846.5

5G NR n5 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
25	Channel	-	176300	-
	Frequency	-	836.5	-
20	Channel	175800	176300	176800
	Frequency	834	836.5	839
15	Channel	175300	176300	177300
	Frequency	831.5	836.5	841.5
10	Channel	174800	176300	177800
	Frequency	829	836.5	844



5G NR n7 Channel and Frequency List for SCS 15kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	529000	531000	533000
	Frequency	2525	2535	2545
40	Channel	528000	531000	534000
	Frequency	2520	2535	2550
30	Channel	527000	531000	535000
	Frequency	2515	2535	2555
25	Channel	526500	531000	535500
	Frequency	2512.5	2535	2557.5
20	Channel	526000	531000	536000
	Frequency	2510	2535	2560
15	Channel	525500	531000	536500
	Frequency	2507.5	2535	2562.5
10	Channel	525000	531000	537000
	Frequency	2505	2535	2565
5	Channel	524500	531000	537500
	Frequency	2502.5	2535	2567.5

5G NR n7 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	529000	531000	533000
	Frequency	2525	2535	2545
40	Channel	528000	531000	534000
	Frequency	2520	2535	2550
30	Channel	527000	531000	535000
	Frequency	2515	2535	2555
25	Channel	526500	531000	535500
	Frequency	2512.5	2535	2557.5
20	Channel	526000	531000	536000
	Frequency	2510	2535	2560
15	Channel	525500	531000	536500
	Frequency	2507.5	2535	2562.5
10	Channel	525000	531000	537000
	Frequency	2505	2535	2565



5G NR n38 Channel and Frequency List for SCS 15kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
25	Channel	516500	519000	521500
	Frequency	2582.5	2595	2607.5
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615
5	Channel	514500	519000	523500
	Frequency	2572.5	2595	2617.5

5G NR n38 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
25	Channel	516500	519000	521500
	Frequency	2582.5	2595	2607.5
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615



5G NR n41 Channel and Frequency List for SCS 15kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	504201	518601	532998
	Frequency	2521.005	2593.005	2664.99
40	Channel	503202	518601	534000
	Frequency	2516.01	2593.005	2670
30	Channel	502200	518601	534999
	Frequency	2511	2593.005	2674.995
20	Channel	501201	518601	535998
	Frequency	2506.005	2593.005	2679.99
15	Channel	500700	518601	536499
	Frequency	2503.5	2593.005	2682.495
10	Channel	500202	518601	537000
	Frequency	2501.01	2593.005	2685



5G NR n41 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518601	534999
	Frequency	2511	2593.005	2674.995
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685



5G NR n66 Channel and Frequency List for SCS 15kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	426000	429000	432000
	Frequency	1730	1745	1760
30	Channel	425000	429000	433000
	Frequency	1725	1745	1765
25	Channel	424500	429000	433500
	Frequency	1722.5	1745	1767.5
20	Channel	424000	429000	434000
	Frequency	1720	1745	1770
15	Channel	423500	429000	434500
	Frequency	1717.5	1745	1772.5
10	Channel	423000	429000	435000
	Frequency	1715	1745	1775
5	Channel	422500	429000	435500
	Frequency	1712.5	1745	1777.5

5G NR n66 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	426000	429000	432000
	Frequency	1730	1745	1760
30	Channel	425000	429000	433000
	Frequency	1725	1745	1765
25	Channel	424500	429000	433500
	Frequency	1722.5	1745	1767.5
20	Channel	424000	429000	434000
	Frequency	1720	1745	1770
15	Channel	423500	429000	434500
	Frequency	1717.5	1745	1772.5
10	Channel	423000	429000	435000
	Frequency	1715	1745	1775


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

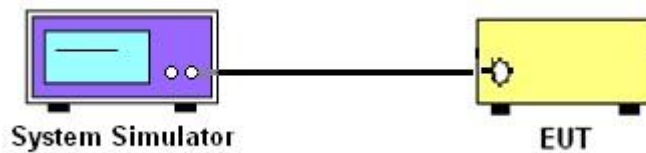

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

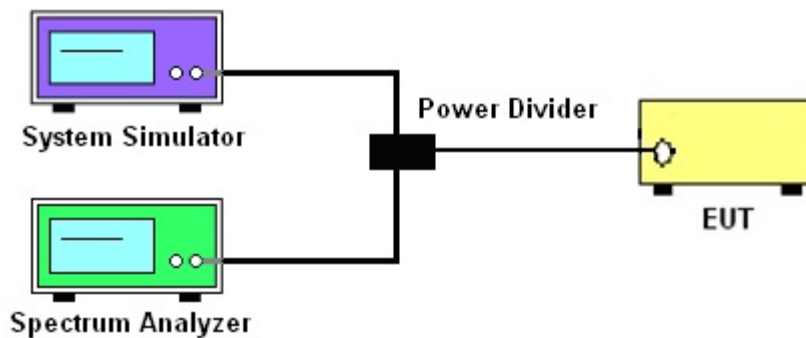

3.2.3 Frequency Stability

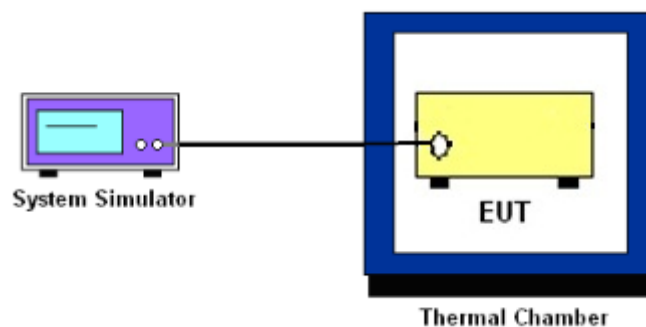

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n7, n38 and n41.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. For 5G NR n7/n38/n41, the other 40 dB, and 55 dB have additionally applied same calculation above.
10. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. For 5G NR n7/n38/n41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

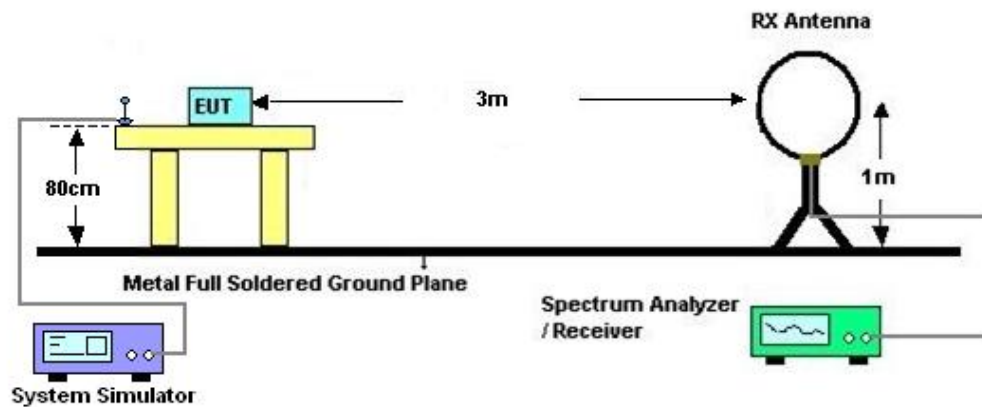

4.2.2 For radiated test from 30MHz to 1GHz

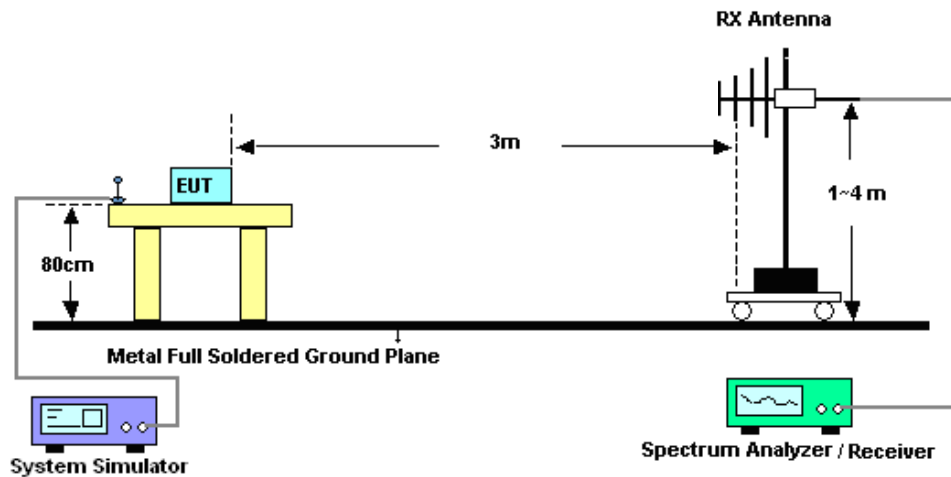

4.2.3 For radiated test above 1GHz

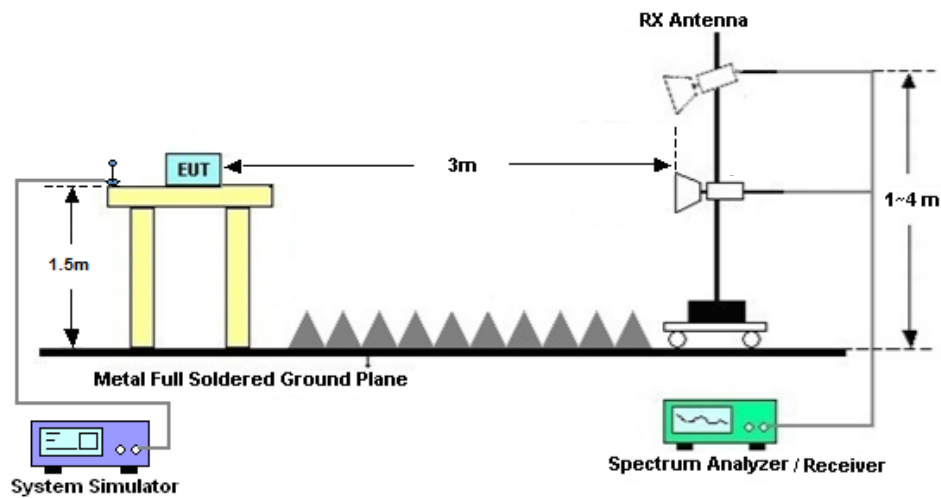

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For 5G NR n7/n38/n41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Jun. 03, 2022~Jun. 13, 2022	Apr. 07, 2022	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 25, 2021	Jun. 03, 2022~Jun. 13, 2022	Oct. 24, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2021	Jun. 03, 2022~Jun. 13, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhonggroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	Jun. 03, 2022~Jun. 13, 2022	Jul. 13, 2022	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 06, 2022	Jun. 11, 2022	Apr. 05, 2023	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Jun. 11, 2022	Jun. 21, 2022	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 06, 2022	Jun. 11, 2022	Apr. 05, 2023	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Jun. 22, 2020	Jun. 11, 2022	Jun. 21, 2022	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2022	Jun. 11, 2022	Apr. 07, 2023	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 22, 2021	Jun. 11, 2022	Oct. 21, 2022	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Oct. 22, 2021	Jun. 11, 2022	Oct. 21, 2022	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 10, 2022	Jun. 11, 2022	Apr. 09, 2023	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 30, 2020	Jun. 11, 2022	Dec. 29, 2021	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jun. 11, 2022	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 11, 2022	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 11, 2022	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required



6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.6dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.8dB
---	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Guo	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N5 (ANT0) for SCS 15KHz

Transmitter Conducted Output Power And ERP, (G_T-L_C)=-5.4dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP(dBm)	ERP(W)
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@1	24.81	17.26	0.0532
5	15	5	174300	826.5	DFT-s-OFDM 16 QAM	1@1	23.6	16.05	0.0403
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@1	24.9	17.35	0.0543
5	15	5	176300	836.5	DFT-s-OFDM 16 QAM	1@1	23.56	16.01	0.0399
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@1	24.87	17.32	0.0540
5	15	5	178300	846.5	DFT-s-OFDM 16 QAM	1@1	23.63	16.08	0.0406
5	15	10	174800	829	DFT-s-OFDM QPSK	1@1	24.8	17.25	0.0531
5	15	10	174800	829	DFT-s-OFDM 16 QAM	1@1	23.55	16	0.0398
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@1	24.95	17.4	0.0550
5	15	10	176300	836.5	DFT-s-OFDM 16 QAM	1@1	23.63	16.08	0.0406
5	15	10	177800	844	DFT-s-OFDM QPSK	1@1	24.78	17.23	0.0528
5	15	10	177800	844	DFT-s-OFDM 16 QAM	1@1	23.45	15.9	0.0389
5	15	15	175300	831.5	DFT-s-OFDM QPSK	1@1	24.82	17.27	0.0533
5	15	15	175300	831.5	DFT-s-OFDM 16 QAM	1@1	23.5	15.95	0.0394
5	15	15	176300	836.5	DFT-s-OFDM QPSK	1@1	24.96	17.41	0.0551
5	15	15	176300	836.5	DFT-s-OFDM 16 QAM	1@1	23.75	16.2	0.0417
5	15	15	177300	841.5	DFT-s-OFDM QPSK	1@1	24.87	17.32	0.0540
5	15	15	177300	841.5	DFT-s-OFDM 16 QAM	1@1	23.64	16.09	0.0406
5	15	20	175800	834	DFT-s-OFDM QPSK	1@1	24.83	17.28	0.0535
5	15	20	175800	834	DFT-s-OFDM 16 QAM	1@1	23.52	15.97	0.0395
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@1	24.96	17.41	0.0551
5	15	20	176300	836.5	DFT-s-OFDM 16 QAM	1@1	23.66	16.11	0.0408
5	15	20	176800	839	DFT-s-OFDM QPSK	1@1	24.96	17.41	0.0551
5	15	20	176800	839	DFT-s-OFDM 16 QAM	1@1	23.77	16.22	0.0419
5	15	25	176300	836.5	DFT-s-OFDM PI/2 BPSK	64@32	24.64	17.09	0.0512
5	15	25	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	24.02	16.47	0.0444
5	15	25	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@131	24.08	16.53	0.0450
5	15	25	176300	836.5	DFT-s-OFDM QPSK	64@32	24.97	17.42	0.0552

5	15	25	176300	836.5	DFT-s-OFDM QPSK	1@1	24.03	16.48	0.0445
5	15	25	176300	836.5	DFT-s-OFDM QPSK	1@131	23.98	16.43	0.0440
5	15	25	176300	836.5	DFT-s-OFDM 16 QAM	64@32	23.68	16.13	0.0410
5	15	25	176300	836.5	DFT-s-OFDM 16 QAM	1@1	22.94	15.39	0.0346
5	15	25	176300	836.5	DFT-s-OFDM 16 QAM	1@131	22.93	15.38	0.0345
5	15	25	176300	836.5	DFT-s-OFDM 64 QAM	64@32	22.1	14.55	0.0285
5	15	25	176300	836.5	DFT-s-OFDM 64 QAM	1@1	21.45	13.9	0.0245
5	15	25	176300	836.5	DFT-s-OFDM 64 QAM	1@131	21.41	13.86	0.0243
5	15	25	176300	836.5	DFT-s-OFDM 256 QAM	64@32	20.2	12.65	0.0184
5	15	25	176300	836.5	DFT-s-OFDM 256 QAM	1@1	19.51	11.96	0.0157
5	15	25	176300	836.5	DFT-s-OFDM 256 QAM	1@131	19.55	12	0.0158
5	15	25	176300	836.5	CP-OFDM QPSK	67@33	23.17	15.62	0.0365
5	15	25	176300	836.5	CP-OFDM QPSK	1@1	22.55	15	0.0316
5	15	25	176300	836.5	CP-OFDM QPSK	1@131	22.46	14.91	0.0310

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00627	PASS	NV
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00437	PASS	LV
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00299	PASS	HV
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00274	PASS	-30°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00035	PASS	-20°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00031	PASS	-10°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00564	PASS	0°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00515	PASS	10°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00305	PASS	20°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00207	PASS	30°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00367	PASS	40°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00302	PASS	50°C

Peak to Average Radio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	100@0	4.69	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	1@0	3.66	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	100@0	5.62	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@0	5.02	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	100@0	4.29	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@0	3.4	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	5.46	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@0	4.57	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	100@0	4.32	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	1@0	3.22	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	5.43	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@0	4.23	13	PASS

N5(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Low_CH



N5(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Low_CH



N5(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH



N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH



N5(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH



N5(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Mid_CH



N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH



N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



N5(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH



N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH



N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH



N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	25@0	4.4528	4.801
5	15	5	176300	836.5	DFT-s-OFDM QPSK	25@0	4.4711	4.813
5	15	5	176300	836.5	CP-OFDM QPSK	25@0	4.4639	4.823
5	15	5	176300	836.5	CP-OFDM 16 QAM	25@0	4.4833	4.828
5	15	5	176300	836.5	CP-OFDM 64 QAM	25@0	4.4729	4.785
5	15	5	176300	836.5	CP-OFDM 256 QAM	25@0	4.4611	4.78
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	50@0	8.922	9.369
5	15	10	176300	836.5	DFT-s-OFDM QPSK	50@0	8.9212	9.339
5	15	10	176300	836.5	CP-OFDM QPSK	52@0	9.296	9.745
5	15	10	176300	836.5	CP-OFDM 16 QAM	52@0	9.2942	9.719
5	15	10	176300	836.5	CP-OFDM 64 QAM	52@0	9.2687	9.726
5	15	10	176300	836.5	CP-OFDM 256 QAM	52@0	9.2728	9.729
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	75@0	13.382	14.03
5	15	15	176300	836.5	DFT-s-OFDM QPSK	75@0	13.361	14.0
5	15	15	176300	836.5	CP-OFDM QPSK	79@0	14.069	14.7
5	15	15	176300	836.5	CP-OFDM 16 QAM	79@0	14.109	14.7
5	15	15	176300	836.5	CP-OFDM 64 QAM	79@0	14.103	14.7
5	15	15	176300	836.5	CP-OFDM 256 QAM	79@0	14.078	14.72
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	100@0	17.847	18.62
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	17.837	18.61
5	15	20	176300	836.5	CP-OFDM QPSK	106@0	18.897	19.72
5	15	20	176300	836.5	CP-OFDM 16 QAM	106@0	18.894	19.66
5	15	20	176300	836.5	CP-OFDM 64 QAM	106@0	18.938	19.66
5	15	20	176300	836.5	CP-OFDM 256 QAM	106@0	18.892	19.7

5	15	25	176300	836.5	DFT-s-OFDM PI/2 BPSK	128@0	22.827	27.07
5	15	25	176300	836.5	DFT-s-OFDM QPSK	128@0	22.777	23.69
5	15	25	176300	836.5	CP-OFDM QPSK	133@0	23.667	24.58
5	15	25	176300	836.5	CP-OFDM 16 QAM	133@0	23.723	24.61
5	15	25	176300	836.5	CP-OFDM 64 QAM	133@0	23.603	24.62
5	15	25	176300	836.5	CP-OFDM 256 QAM	133@0	23.692	24.63


N5(5M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

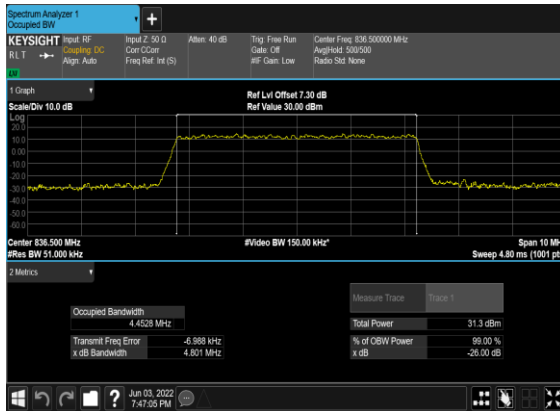


N5(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

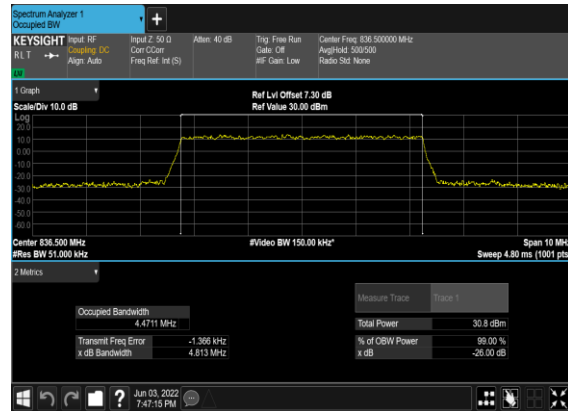


N5(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

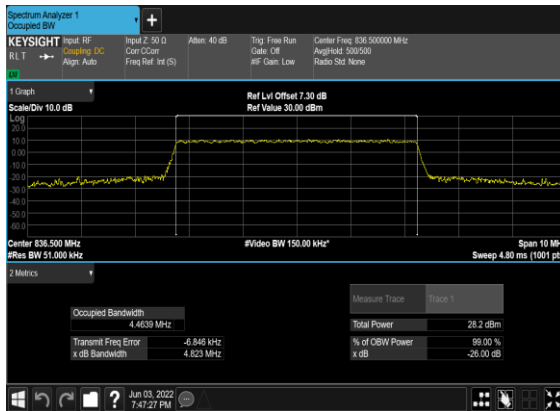


N5(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

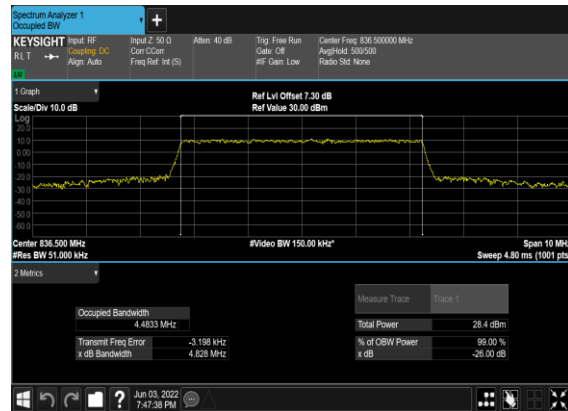


N5(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

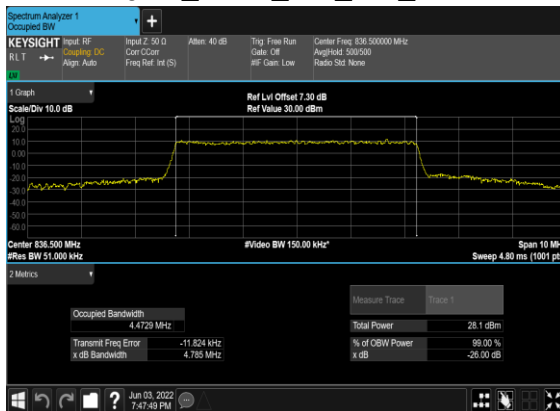


N5(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

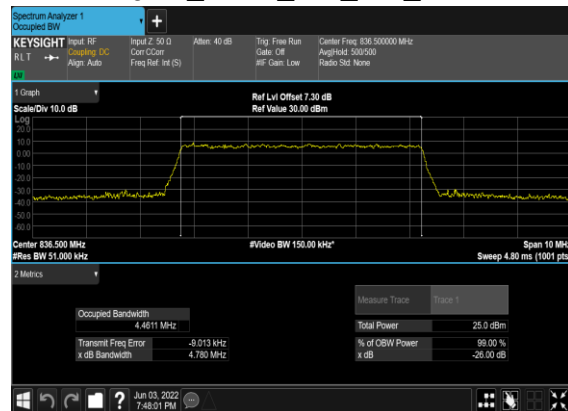


N5(10M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

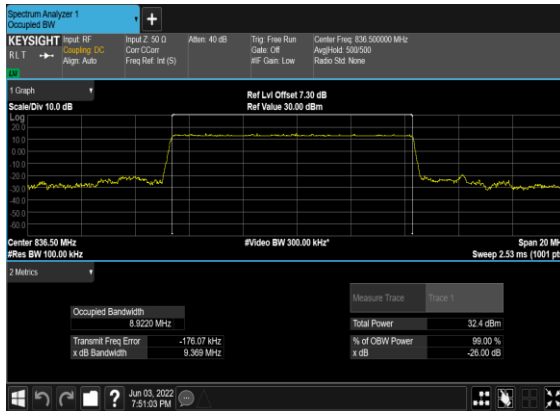


N5(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

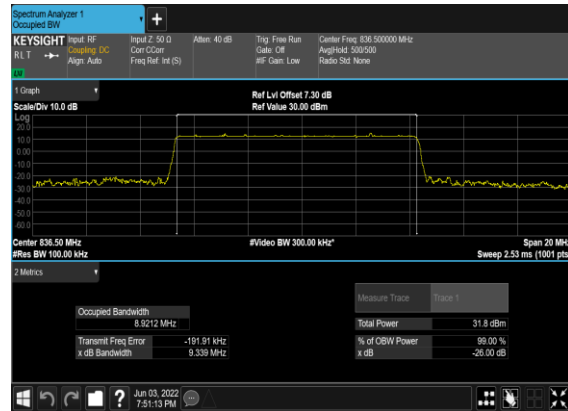


N5(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

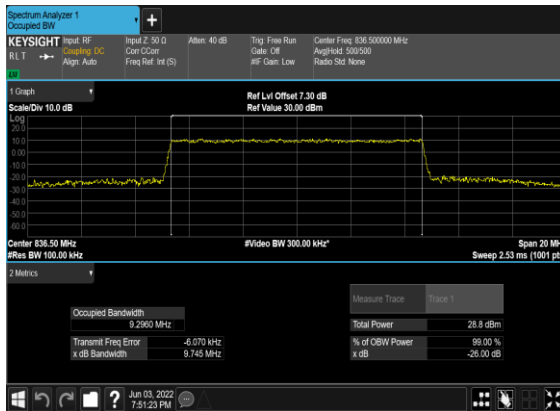


N5(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

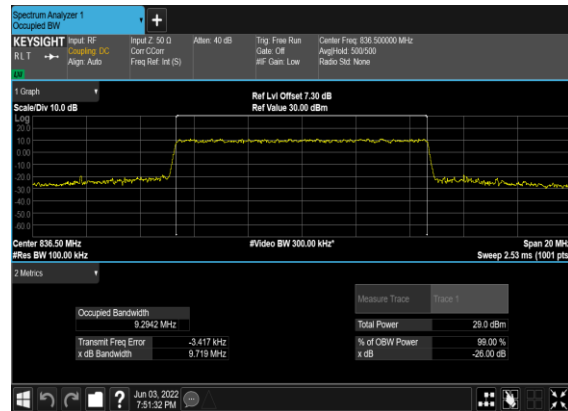


N5(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

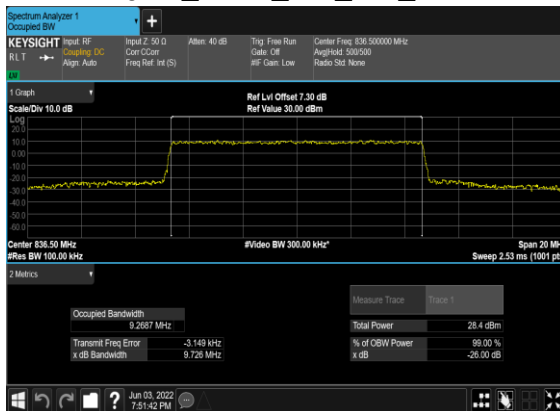


N5(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

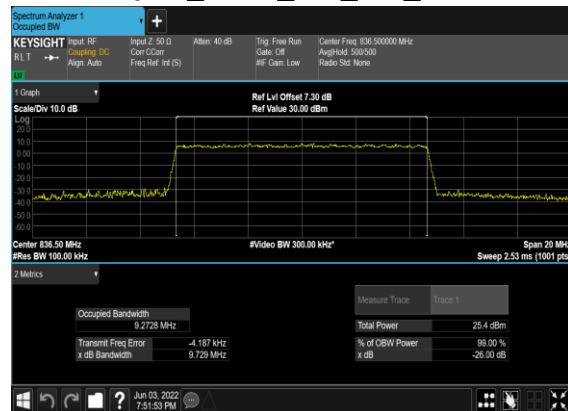


N5(15M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

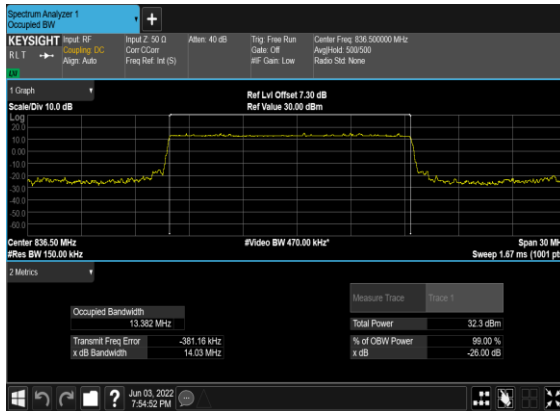


N5(15M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

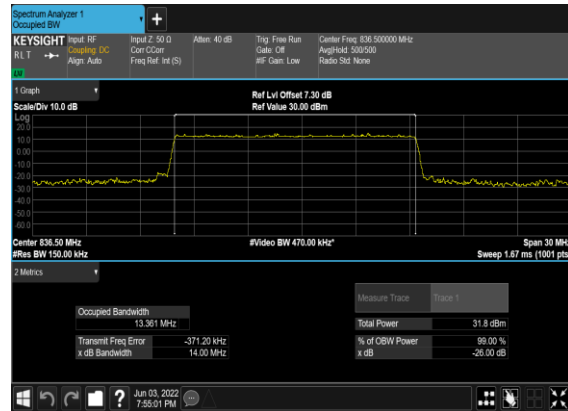


N5(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

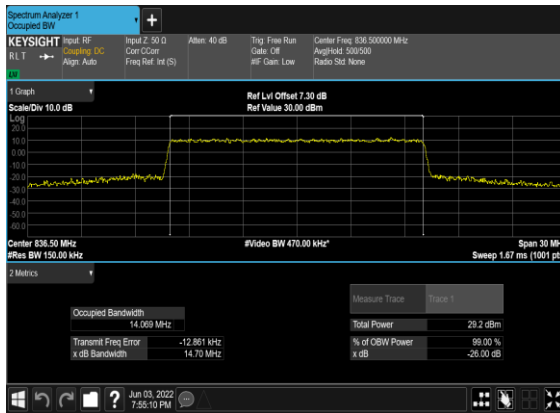


N5(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

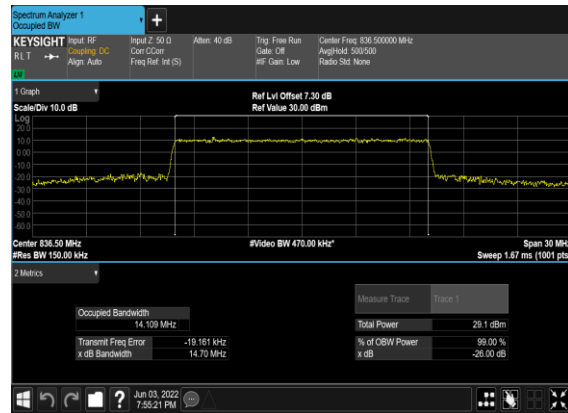


N5(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

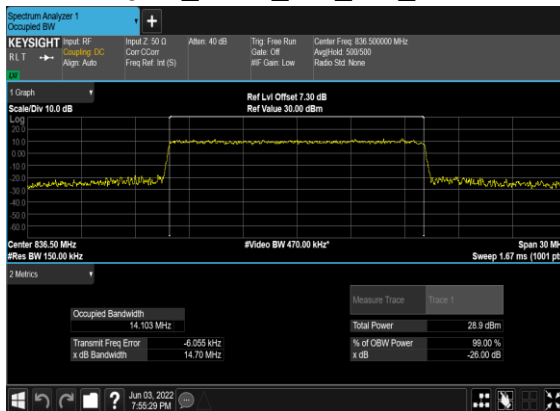


N5(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

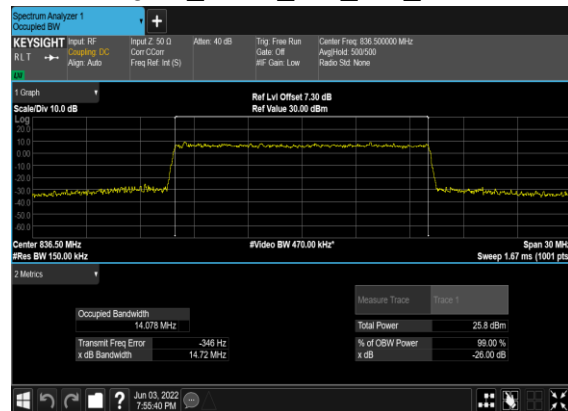


N5(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

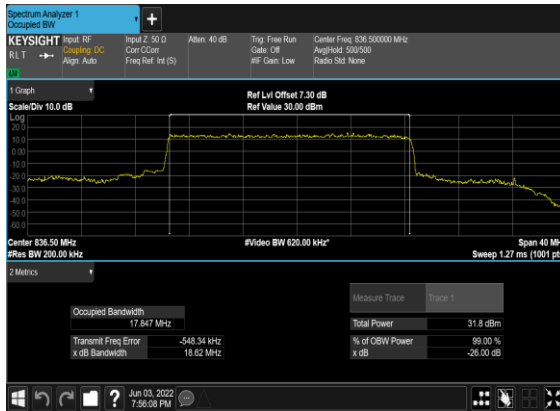


N5(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

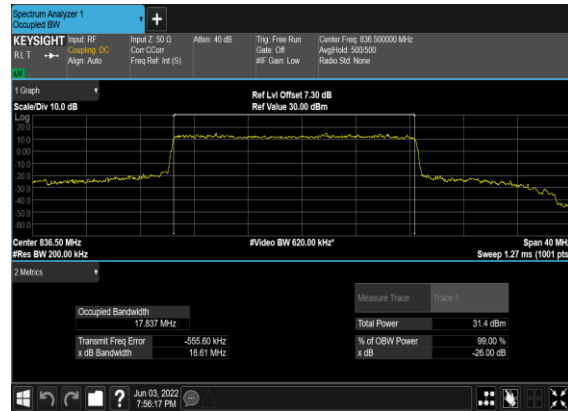


N5(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

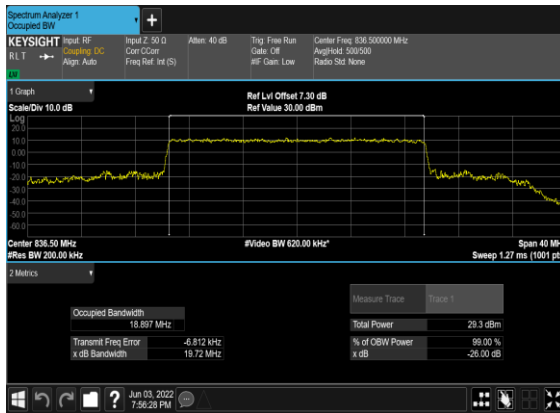


N5(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

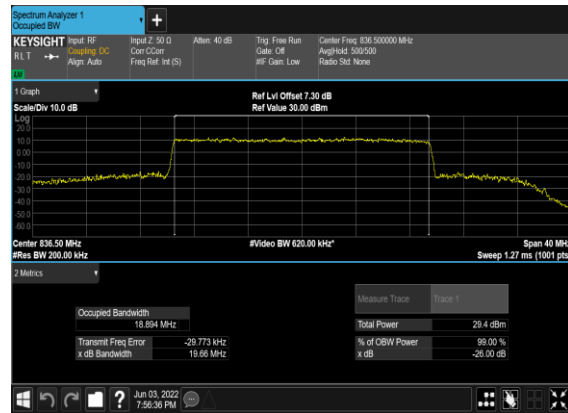


N5(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

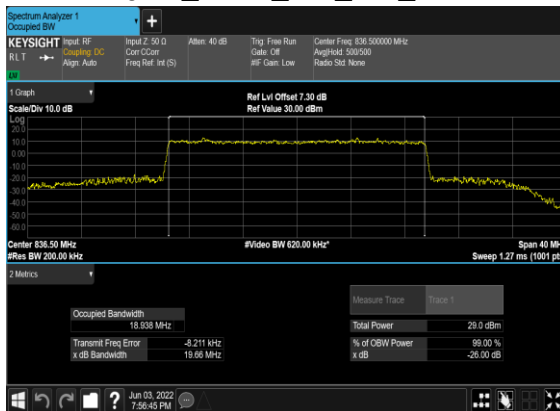


N5(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

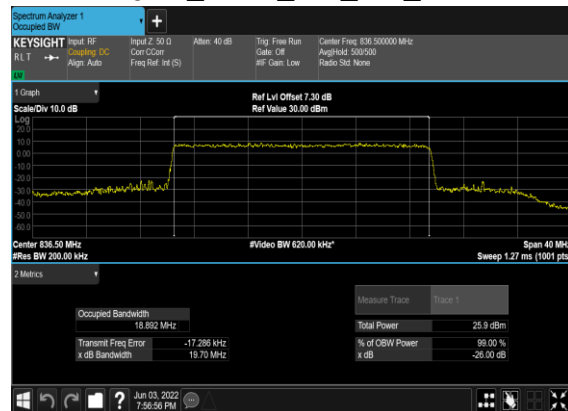


N5(25M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

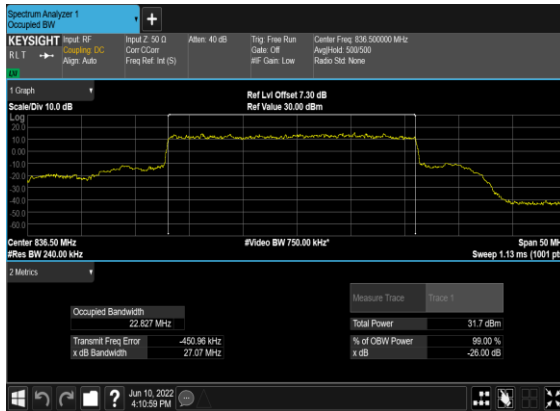


N5(25M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

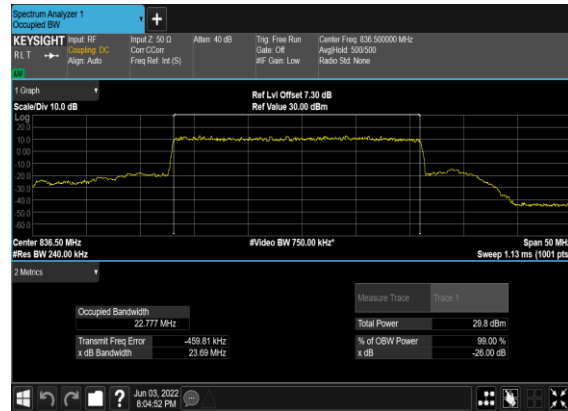


N5(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

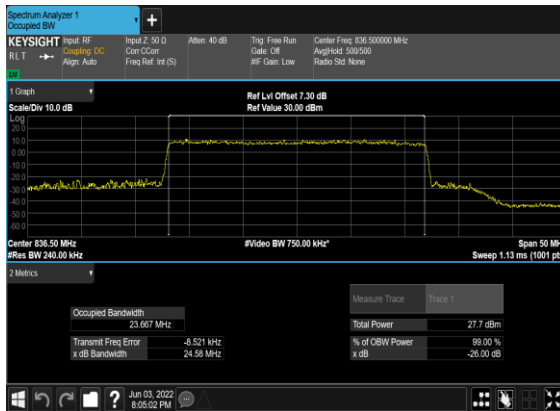


N5(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

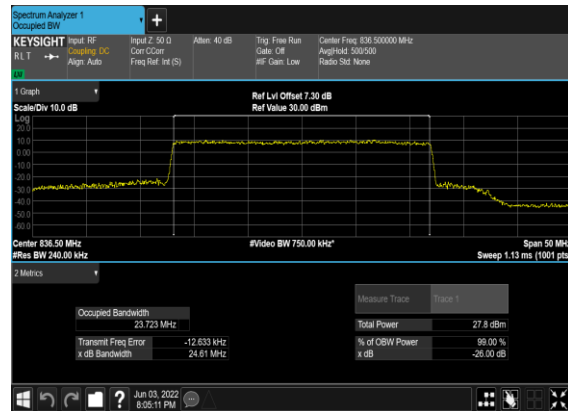

N5(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

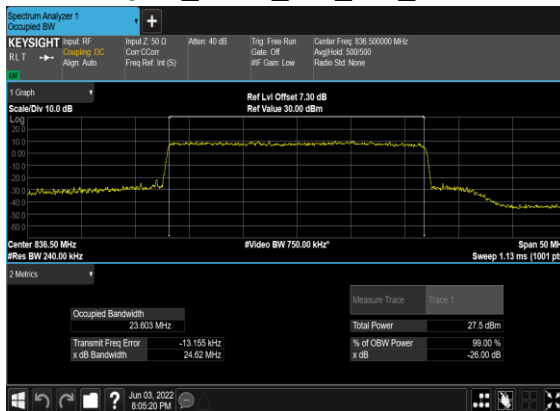

N5(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

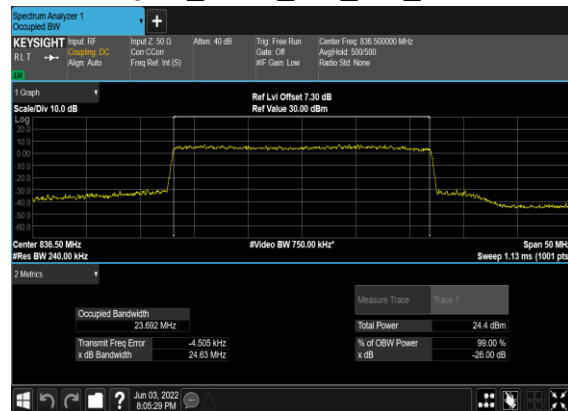


Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	5	174300	826.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	174300	826.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	178300	846.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	15	175300	831.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	15	175300	831.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	15	175300	831.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	15	175300	831.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	15	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	15	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	15	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	15	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	15	177300	841.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	15	177300	841.5	DFT-s-OFDM BPSK	1@0	see graph	PASS

5	15	15	177300	841.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	15	177300	841.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	25	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	25	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	25	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	25	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS


N5(5M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

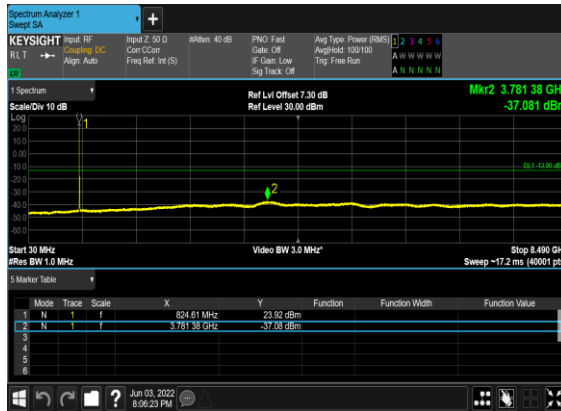


N5(5M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

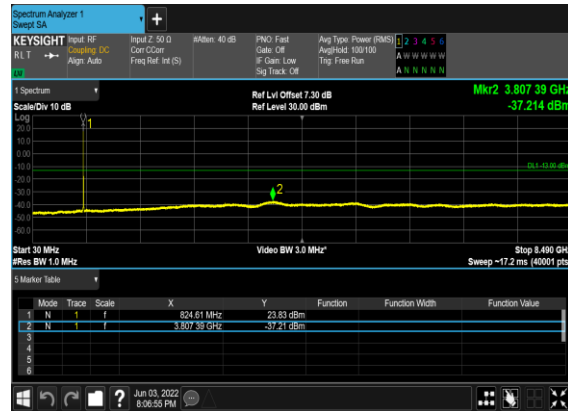


N5(5M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

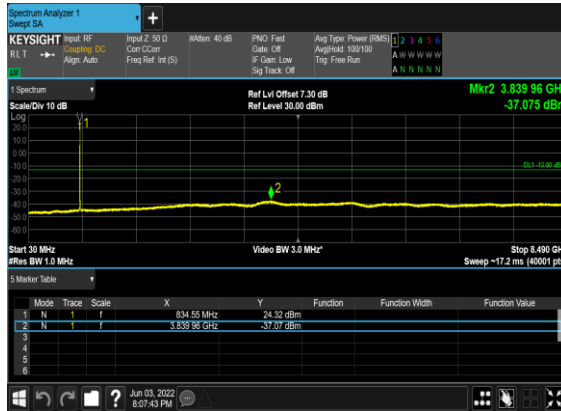


N5(5M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

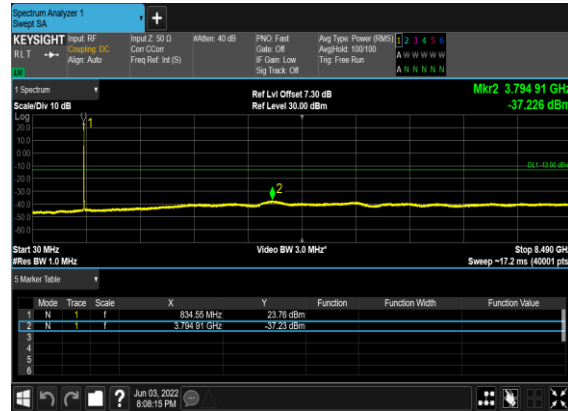


N5(5M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

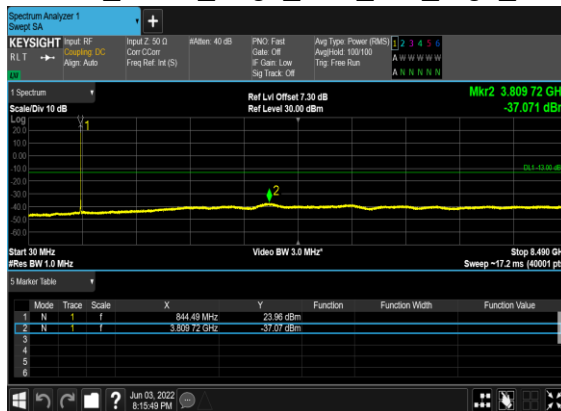


N5(5M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

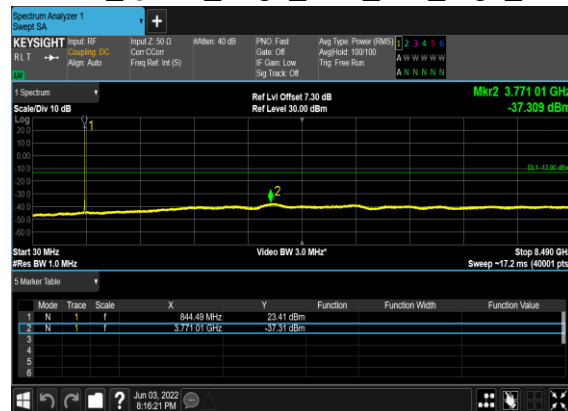


N5(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

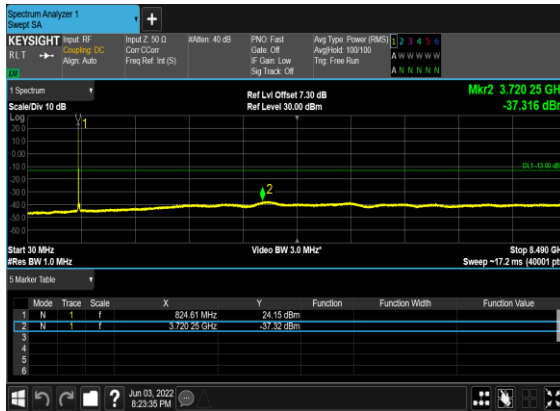


N5(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

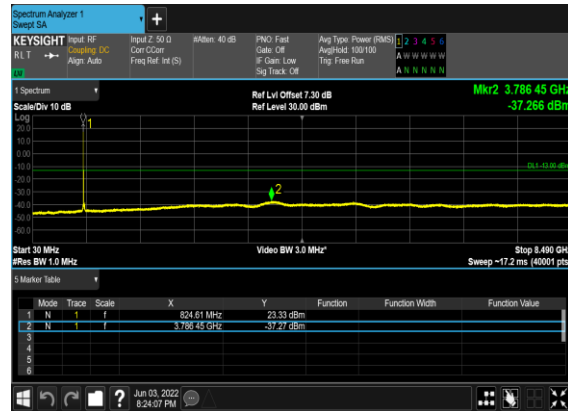


N5(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

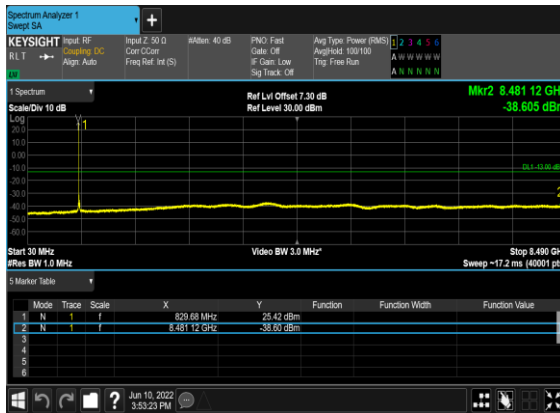


N5(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

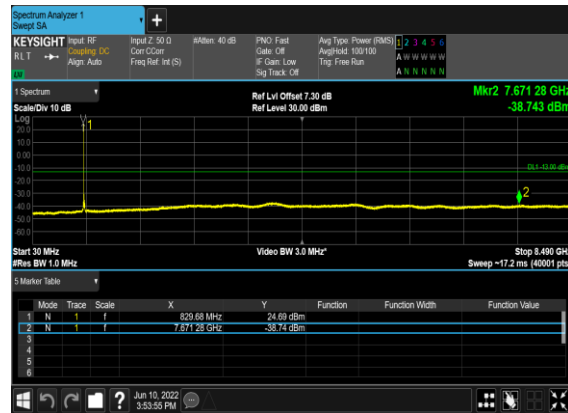


N5(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

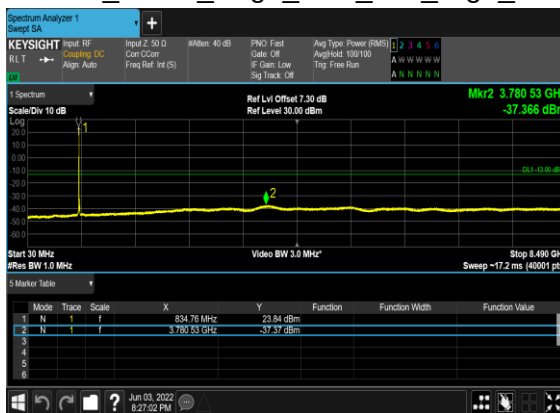


N5(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

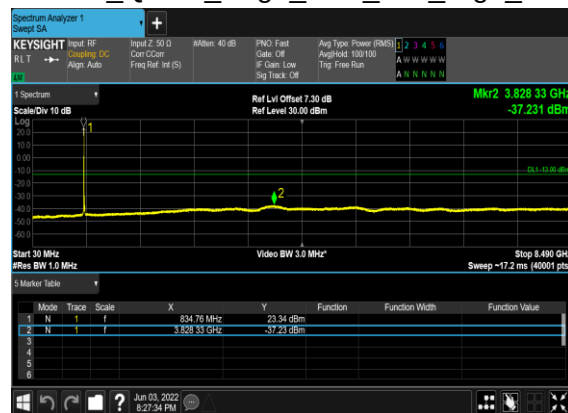

N5(25M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

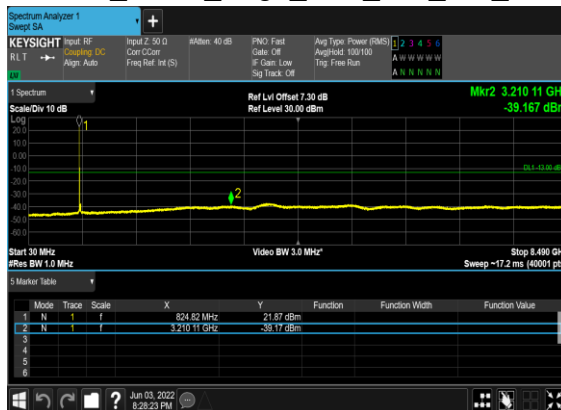


N5(25M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

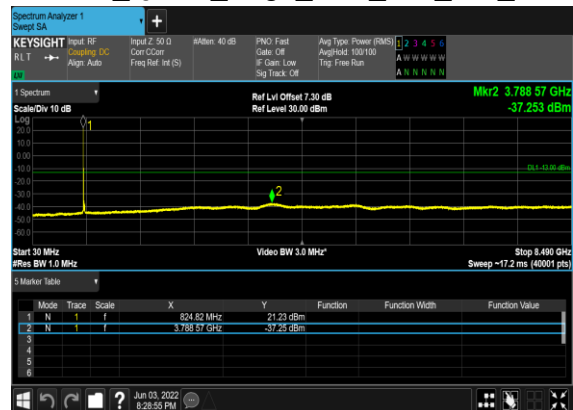


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	5	174300	826.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
5	15	15	175300	831.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	15	175300	831.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	15	175300	831.5	DFT-s-OFDM BPSK	75@0	see graph	PASS
5	15	15	175300	831.5	DFT-s-OFDM QPSK	75@0	see graph	PASS
5	15	15	177300	841.5	DFT-s-OFDM BPSK	1@78	see graph	PASS
5	15	15	177300	841.5	DFT-s-OFDM QPSK	1@78	see graph	PASS
5	15	15	177300	841.5	DFT-s-OFDM BPSK	75@0	see graph	PASS
5	15	15	177300	841.5	DFT-s-OFDM QPSK	75@0	see graph	PASS
5	15	25	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	25	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	25	176300	836.5	DFT-s-OFDM BPSK	1@132	see graph	PASS
5	15	25	176300	836.5	DFT-s-OFDM QPSK	1@132	see graph	PASS
5	15	25	176300	836.5	DFT-s-OFDM BPSK	128@0	see graph	PASS
5	15	25	176300	836.5	DFT-s-OFDM QPSK	128@0	see graph	PASS


N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

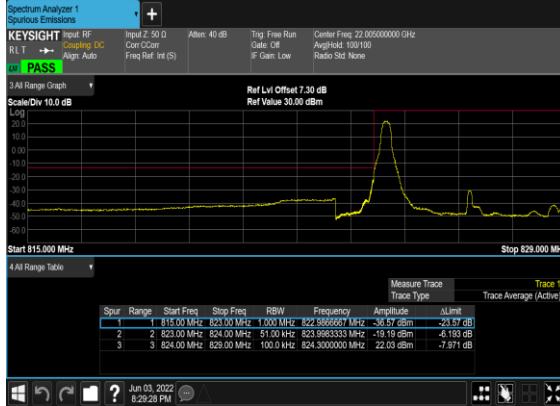


N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

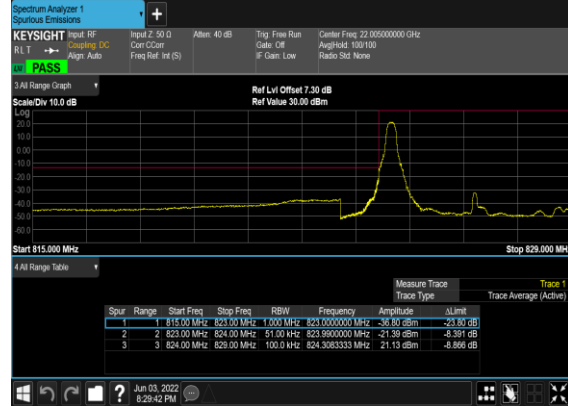


N5(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

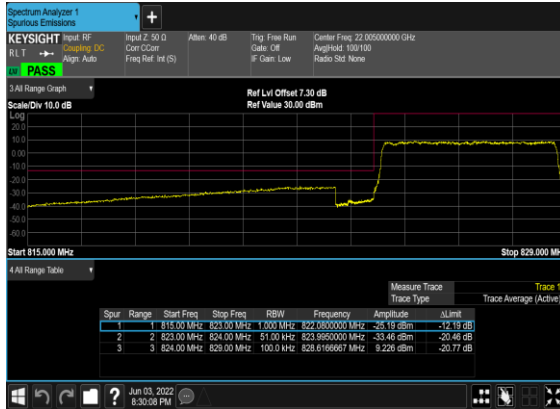


N5(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

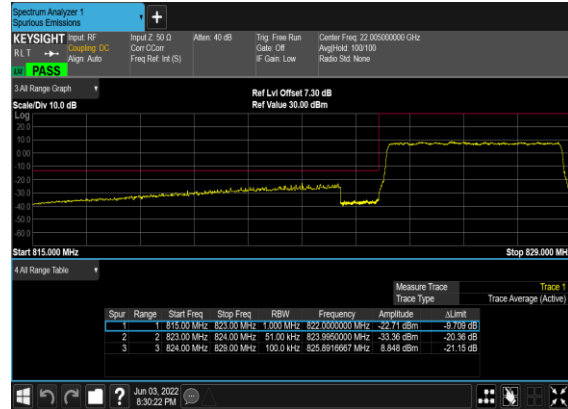


N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

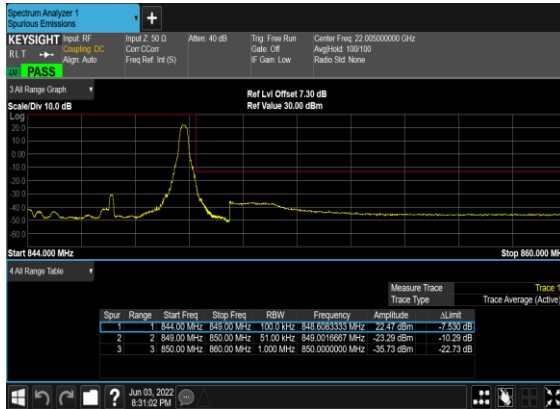

N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

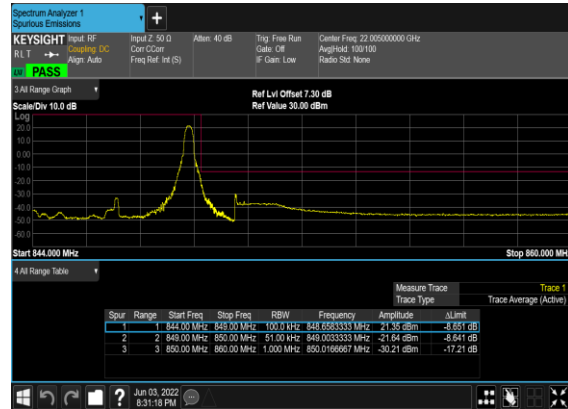


N5(5M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

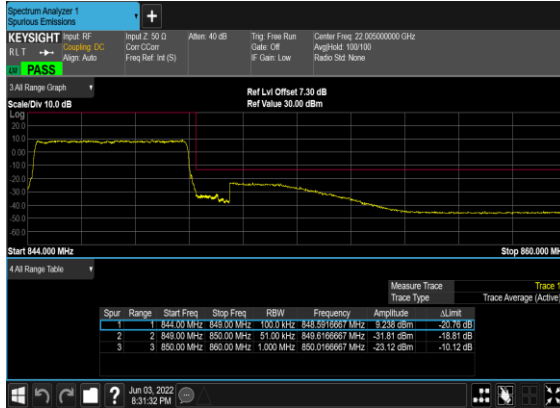


N5(5M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH




N5(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

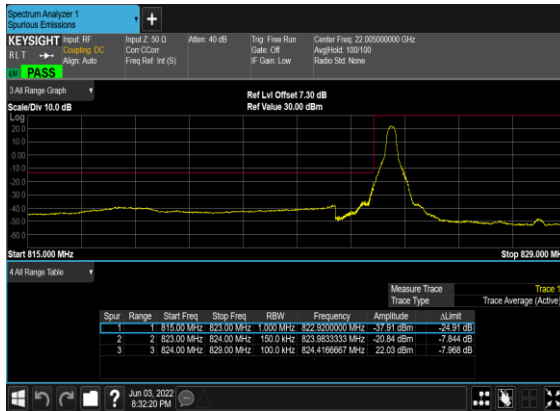


N5(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

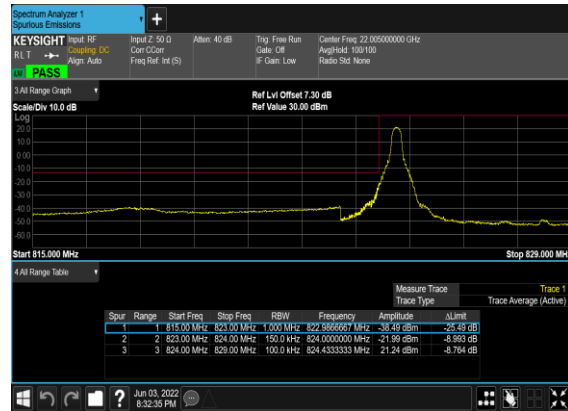


N5(15M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

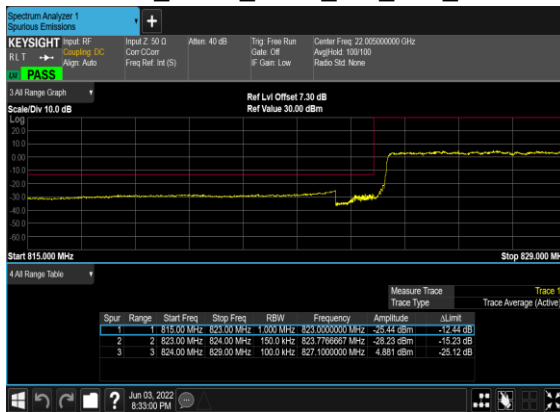


N5(15M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

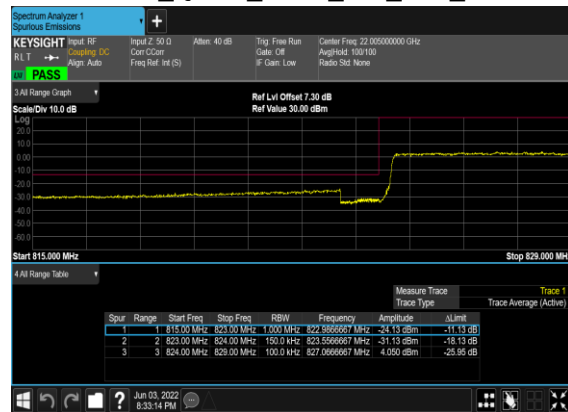

N5(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

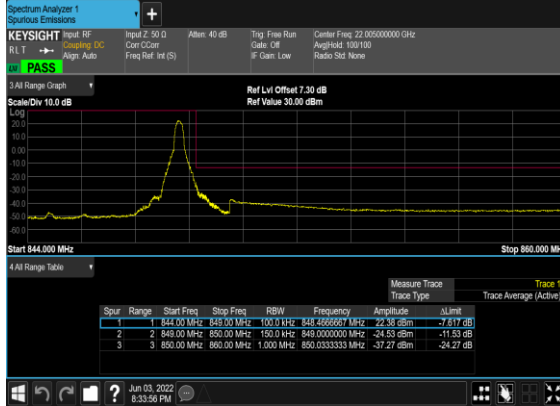

N5(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

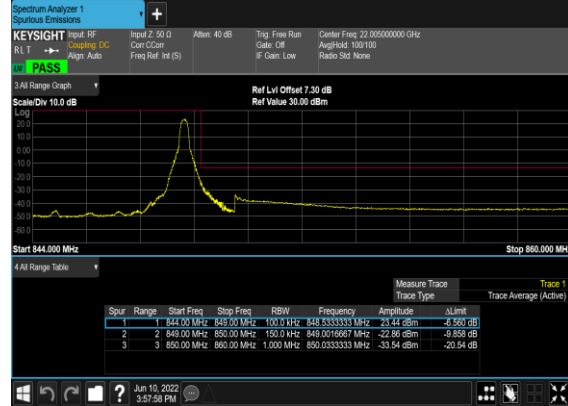


N5(15M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH




N5(15M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH




N5(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

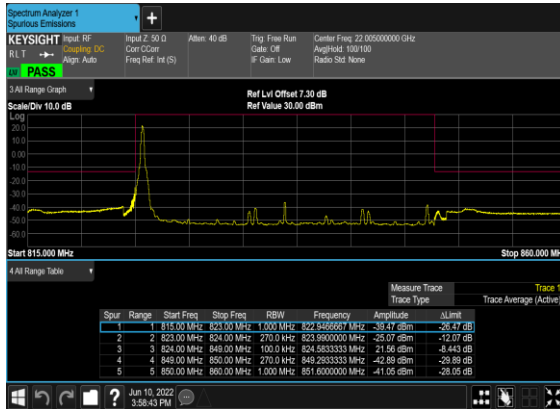


N5(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

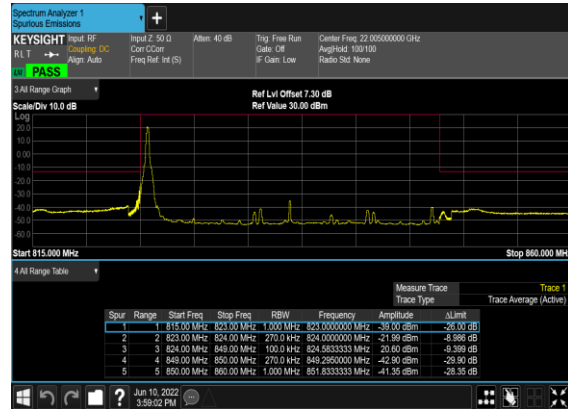


N5(25M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_Mid_CH

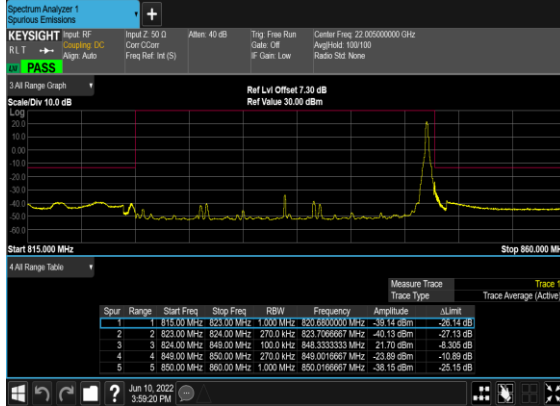


N5(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

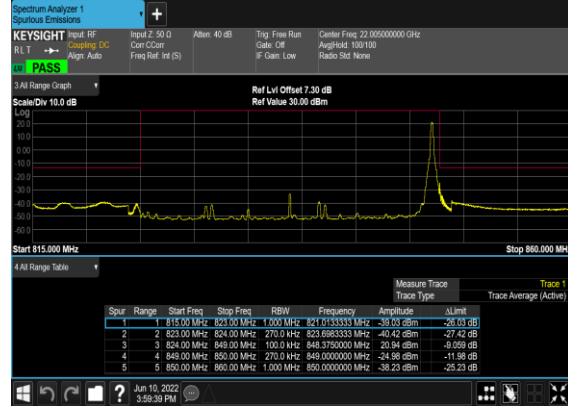


N5(25M)_DFT-s-OFDM_BPSK_Outer_Full_Mid_CH

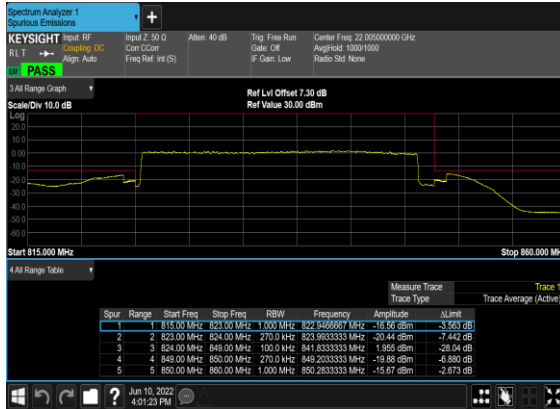

N5(25M)_DFT-s-OFDM_BPSK_Outer_Full_Mid_CH_chp_PASS

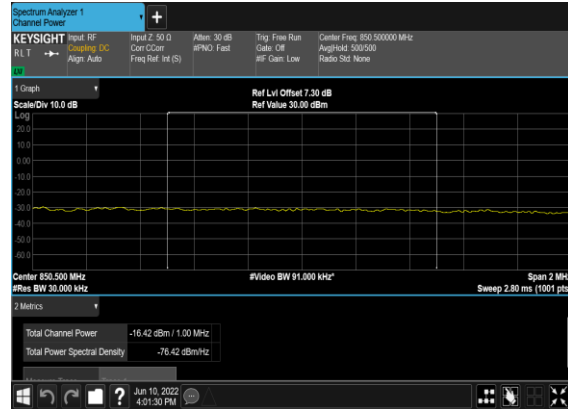

N5(25M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

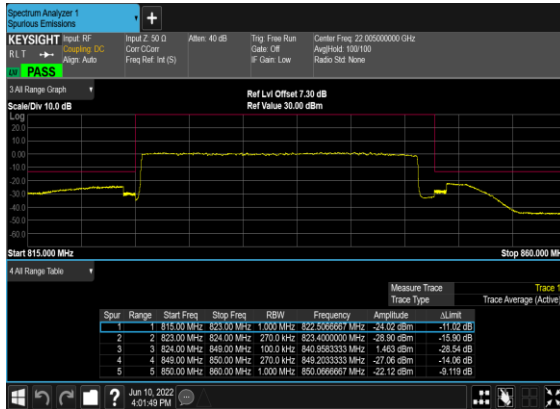

FR1 N7 (ANT1) for SCS 15KHz

Transmitter Conducted Output Power And ERP, (G_T-L_C)=-1.6dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	5	524500	2502.5	DFT-s-OFDM QPSK	1@1	23.87	22.27	0.1687
7	15	5	524500	2502.5	DFT-s-OFDM 16 QAM	1@1	23.25	21.65	0.1462
7	15	5	531000	2535	DFT-s-OFDM QPSK	1@1	24.26	22.66	0.1845
7	15	5	531000	2535	DFT-s-OFDM 16 QAM	1@1	23.29	21.69	0.1476
7	15	5	537500	2567.5	DFT-s-OFDM QPSK	1@1	23.76	22.16	0.1644
7	15	5	537500	2567.5	DFT-s-OFDM 16 QAM	1@1	23.21	21.61	0.1449
7	15	10	525000	2505	DFT-s-OFDM QPSK	1@1	24.2	22.6	0.1820
7	15	10	525000	2505	DFT-s-OFDM 16 QAM	1@1	23.24	21.64	0.1459
7	15	10	531000	2535	DFT-s-OFDM QPSK	1@1	24.03	22.43	0.1750
7	15	10	531000	2535	DFT-s-OFDM 16 QAM	1@1	23.26	21.66	0.1466
7	15	10	537000	2565	DFT-s-OFDM QPSK	1@1	24.17	22.57	0.1807
7	15	10	537000	2565	DFT-s-OFDM 16 QAM	1@1	23.17	21.57	0.1435
7	15	15	525500	2507.5	DFT-s-OFDM QPSK	1@1	24.21	22.61	0.1824
7	15	15	525500	2507.5	DFT-s-OFDM 16 QAM	1@1	23.23	21.63	0.1455
7	15	15	531000	2535	DFT-s-OFDM QPSK	1@1	24.26	22.66	0.1845
7	15	15	531000	2535	DFT-s-OFDM 16 QAM	1@1	23	21.4	0.1380
7	15	15	536500	2562.5	DFT-s-OFDM QPSK	1@1	24.02	22.42	0.1746
7	15	15	536500	2562.5	DFT-s-OFDM 16 QAM	1@1	23.02	21.42	0.1387
7	15	20	526000	2510	DFT-s-OFDM QPSK	1@1	24.02	22.42	0.1746
7	15	20	526000	2510	DFT-s-OFDM 16 QAM	1@1	22.83	21.23	0.1327
7	15	20	531000	2535	DFT-s-OFDM QPSK	1@1	23.04	21.44	0.1393
7	15	20	531000	2535	DFT-s-OFDM 16 QAM	1@1	22.98	21.38	0.1374
7	15	20	536000	2560	DFT-s-OFDM QPSK	1@1	24.12	22.52	0.1786
7	15	20	536000	2560	DFT-s-OFDM 16 QAM	1@1	23.13	21.53	0.1422
7	15	25	526500	2512.5	DFT-s-OFDM QPSK	1@1	23.45	21.85	0.1531
7	15	25	526500	2512.5	DFT-s-OFDM 16 QAM	1@1	22.34	20.74	0.1186
7	15	25	531000	2535	DFT-s-OFDM QPSK	1@1	23.5	21.9	0.1549
7	15	25	531000	2535	DFT-s-OFDM 16 QAM	1@1	22.38	20.78	0.1197

7	15	25	535500	2557.5	DFT-s-OFDM QPSK	1@1	23.42	21.82	0.1521
7	15	25	535500	2557.5	DFT-s-OFDM 16 QAM	1@1	22.33	20.73	0.1183
7	15	30	527000	2515	DFT-s-OFDM QPSK	1@1	24.13	22.53	0.1791
7	15	30	527000	2515	DFT-s-OFDM 16 QAM	1@1	23.1	21.5	0.1413
7	15	30	531000	2535	DFT-s-OFDM QPSK	1@1	24.13	22.53	0.1791
7	15	30	531000	2535	DFT-s-OFDM 16 QAM	1@1	23.12	21.52	0.1419
7	15	30	535000	2555	DFT-s-OFDM QPSK	1@1	24.12	22.52	0.1786
7	15	30	535000	2555	DFT-s-OFDM 16 QAM	1@1	23.07	21.47	0.1403
7	15	40	528000	2520	DFT-s-OFDM QPSK	1@1	24.09	22.49	0.1774
7	15	40	528000	2520	DFT-s-OFDM 16 QAM	1@1	23.08	21.48	0.1406
7	15	40	531000	2535	DFT-s-OFDM QPSK	1@1	24.1	22.5	0.1778
7	15	40	531000	2535	DFT-s-OFDM 16 QAM	1@1	23	21.4	0.1380
7	15	40	534000	2550	DFT-s-OFDM QPSK	1@1	24.25	22.65	0.1841
7	15	40	534000	2550	DFT-s-OFDM 16 QAM	1@1	23.23	21.63	0.1455
7	15	50	529000	2525	DFT-s-OFDM PI/2 BPSK	135@67	24.12	22.52	0.1786
7	15	50	529000	2525	DFT-s-OFDM PI/2 BPSK	1@1	23.69	22.09	0.1618
7	15	50	529000	2525	DFT-s-OFDM PI/2 BPSK	1@268	23.61	22.01	0.1589
7	15	50	529000	2525	DFT-s-OFDM QPSK	135@67	24.12	22.52	0.1786
7	15	50	529000	2525	DFT-s-OFDM QPSK	1@1	23.64	22.04	0.1600
7	15	50	529000	2525	DFT-s-OFDM QPSK	1@268	23.62	22.02	0.1592
7	15	50	529000	2525	DFT-s-OFDM 16 QAM	135@67	23.17	21.57	0.1435
7	15	50	529000	2525	DFT-s-OFDM 16 QAM	1@1	22.63	21.03	0.1268
7	15	50	529000	2525	DFT-s-OFDM 16 QAM	1@268	22.58	20.98	0.1253
7	15	50	529000	2525	DFT-s-OFDM 64 QAM	135@67	21.68	20.08	0.1019
7	15	50	529000	2525	DFT-s-OFDM 64 QAM	1@1	21.23	19.63	0.0918
7	15	50	529000	2525	DFT-s-OFDM 64 QAM	1@268	21.26	19.66	0.0925
7	15	50	529000	2525	DFT-s-OFDM 256 QAM	135@67	19.67	18.07	0.0641
7	15	50	529000	2525	DFT-s-OFDM 256 QAM	1@1	19.78	18.18	0.0658
7	15	50	529000	2525	DFT-s-OFDM 256 QAM	1@268	19.76	18.16	0.0655
7	15	50	529000	2525	CP-OFDM QPSK	135@67	22.6	21	0.1259
7	15	50	529000	2525	CP-OFDM QPSK	1@1	22.16	20.56	0.1138
7	15	50	529000	2525	CP-OFDM QPSK	1@268	22.1	20.5	0.1122
7	15	50	531000	2535	DFT-s-OFDM PI/2 BPSK	135@67	24.16	22.56	0.1803
7	15	50	531000	2535	DFT-s-OFDM PI/2 BPSK	1@1	23.73	22.13	0.1633
7	15	50	531000	2535	DFT-s-OFDM PI/2 BPSK	1@268	23.72	22.12	0.1629

7	15	50	531000	2535	DFT-s-OFDM QPSK	135@67	24.12	22.52	0.1786
7	15	50	531000	2535	DFT-s-OFDM QPSK	1@1	23.68	22.08	0.1614
7	15	50	531000	2535	DFT-s-OFDM QPSK	1@268	23.7	22.1	0.1622
7	15	50	531000	2535	DFT-s-OFDM 16 QAM	135@67	23.2	21.6	0.1445
7	15	50	531000	2535	DFT-s-OFDM 16 QAM	1@1	22.59	20.99	0.1256
7	15	50	531000	2535	DFT-s-OFDM 16 QAM	1@268	22.66	21.06	0.1276
7	15	50	531000	2535	DFT-s-OFDM 64 QAM	135@67	21.72	20.12	0.1028
7	15	50	531000	2535	DFT-s-OFDM 64 QAM	1@1	21.28	19.68	0.0929
7	15	50	531000	2535	DFT-s-OFDM 64 QAM	1@268	21.31	19.71	0.0935
7	15	50	531000	2535	DFT-s-OFDM 256 QAM	135@67	19.7	18.1	0.0646
7	15	50	531000	2535	DFT-s-OFDM 256 QAM	1@1	19.67	18.07	0.0641
7	15	50	531000	2535	DFT-s-OFDM 256 QAM	1@268	19.78	18.18	0.0658
7	15	50	531000	2535	CP-OFDM QPSK	135@67	22.6	21	0.1259
7	15	50	531000	2535	CP-OFDM QPSK	1@1	22.18	20.58	0.1143
7	15	50	531000	2535	CP-OFDM QPSK	1@268	22.18	20.58	0.1143
7	15	50	533000	2545	DFT-s-OFDM PI/2 BPSK	135@67	24.28	22.68	0.1854
7	15	50	533000	2545	DFT-s-OFDM PI/2 BPSK	1@1	24.19	22.59	0.1816
7	15	50	533000	2545	DFT-s-OFDM PI/2 BPSK	1@268	23.87	22.27	0.1687
7	15	50	533000	2545	DFT-s-OFDM QPSK	135@67	24.18	22.58	0.1811
7	15	50	533000	2545	DFT-s-OFDM QPSK	1@1	23.68	22.08	0.1614
7	15	50	533000	2545	DFT-s-OFDM QPSK	1@268	23.9	22.3	0.1698
7	15	50	533000	2545	DFT-s-OFDM 16 QAM	135@67	23.18	21.58	0.1439
7	15	50	533000	2545	DFT-s-OFDM 16 QAM	1@1	22.62	21.02	0.1265
7	15	50	533000	2545	DFT-s-OFDM 16 QAM	1@268	22.9	21.3	0.1349
7	15	50	533000	2545	DFT-s-OFDM 64 QAM	135@67	21.69	20.09	0.1021
7	15	50	533000	2545	DFT-s-OFDM 64 QAM	1@1	21.31	19.71	0.0935
7	15	50	533000	2545	DFT-s-OFDM 64 QAM	1@268	21.48	19.88	0.0973
7	15	50	533000	2545	DFT-s-OFDM 256 QAM	135@67	19.66	18.06	0.0640
7	15	50	533000	2545	DFT-s-OFDM 256 QAM	1@1	19.81	18.21	0.0662
7	15	50	533000	2545	DFT-s-OFDM 256 QAM	1@268	20.02	18.42	0.0695
7	15	50	533000	2545	CP-OFDM QPSK	135@67	22.65	21.05	0.1274
7	15	50	533000	2545	CP-OFDM QPSK	1@1	22.21	20.61	0.1151
7	15	50	533000	2545	CP-OFDM QPSK	1@268	22.32	20.72	0.1180

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00205	PASS	NV
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00562	PASS	LV
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00572	PASS	HV
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00297	PASS	-30°C
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00678	PASS	-20°C
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00064	PASS	-10°C
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00401	PASS	0°C
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00294	PASS	10°C
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00579	PASS	20°C
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00384	PASS	30°C
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00309	PASS	40°C
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	0.00364	PASS	50°C

Peak to Average Radio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
7	15	20	526000	2510.0	DFT-s-OFDM PI/2 BPSK	100@0	4.36	13	PASS
7	15	20	526000	2510.0	DFT-s-OFDM PI/2 BPSK	1@0	3.38	13	PASS
7	15	20	526000	2510.0	DFT-s-OFDM QPSK	100@0	5.35	13	PASS
7	15	20	526000	2510.0	DFT-s-OFDM QPSK	1@0	4.23	13	PASS
7	15	20	531000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	4.25	13	PASS
7	15	20	531000	2535.0	DFT-s-OFDM PI/2 BPSK	1@0	3.52	13	PASS
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	5.23	13	PASS
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	1@0	4.3	13	PASS
7	15	20	536000	2560.0	DFT-s-OFDM PI/2 BPSK	100@0	4.27	13	PASS
7	15	20	536000	2560.0	DFT-s-OFDM PI/2 BPSK	1@0	3.36	13	PASS
7	15	20	536000	2560.0	DFT-s-OFDM QPSK	100@0	5.21	13	PASS
7	15	20	536000	2560.0	DFT-s-OFDM QPSK	1@0	4.23	13	PASS

N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Low_CH



N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Low_CH



N7(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH



N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH



N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH



N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Mid_CH



N7(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH



N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH



N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_High_CH



N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_High_CH



N7(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH



N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH



Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
7	15	5	531000	2535.0	DFT-s-OFDM PI/2 BPSK	25@0	4.4495	4.796
7	15	5	531000	2535.0	DFT-s-OFDM QPSK	25@0	4.4686	4.804
7	15	5	531000	2535.0	CP-OFDM QPSK	25@0	4.4677	4.821
7	15	5	531000	2535.0	CP-OFDM 16 QAM	25@0	4.4853	4.825
7	15	5	531000	2535.0	CP-OFDM 64 QAM	25@0	4.4734	4.774
7	15	5	531000	2535.0	CP-OFDM 256 QAM	25@0	4.4561	4.813
7	15	10	531000	2535.0	DFT-s-OFDM PI/2 BPSK	50@0	8.912	9.373
7	15	10	531000	2535.0	DFT-s-OFDM QPSK	50@0	8.9117	9.343
7	15	10	531000	2535.0	CP-OFDM QPSK	52@0	9.2975	9.759
7	15	10	531000	2535.0	CP-OFDM 16 QAM	52@0	9.2913	9.726
7	15	10	531000	2535.0	CP-OFDM 64 QAM	52@0	9.2654	9.722
7	15	10	531000	2535.0	CP-OFDM 256 QAM	52@0	9.266	9.703
7	15	15	531000	2535.0	DFT-s-OFDM PI/2 BPSK	75@0	13.385	14.03
7	15	15	531000	2535.0	DFT-s-OFDM QPSK	75@0	13.372	14.02
7	15	15	531000	2535.0	CP-OFDM QPSK	79@0	14.076	14.74
7	15	15	531000	2535.0	CP-OFDM 16 QAM	79@0	14.106	14.72
7	15	15	531000	2535.0	CP-OFDM 64 QAM	79@0	14.104	14.69
7	15	15	531000	2535.0	CP-OFDM 256 QAM	79@0	14.078	14.7
7	15	20	531000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	17.854	18.61
7	15	20	531000	2535.0	DFT-s-OFDM QPSK	100@0	17.863	18.62
7	15	20	531000	2535.0	CP-OFDM QPSK	106@0	18.898	21.76
7	15	20	531000	2535.0	CP-OFDM 16 QAM	106@0	18.901	19.67
7	15	20	531000	2535.0	CP-OFDM 64 QAM	106@0	18.949	19.65
7	15	20	531000	2535.0	CP-OFDM 256 QAM	106@0	18.911	19.64

7	15	25	531000	2535.0	DFT-s-OFDM PI/2 BPSK	128@0	22.793	23.71
7	15	25	531000	2535.0	DFT-s-OFDM QPSK	128@0	22.843	23.72
7	15	25	531000	2535.0	CP-OFDM QPSK	133@0	23.681	24.56
7	15	25	531000	2535.0	CP-OFDM 16 QAM	133@0	23.736	24.59
7	15	25	531000	2535.0	CP-OFDM 64 QAM	133@0	23.628	24.62
7	15	25	531000	2535.0	CP-OFDM 256 QAM	133@0	23.702	24.6
7	15	30	531000	2535.0	DFT-s-OFDM PI/2 BPSK	160@0	28.543	29.66
7	15	30	531000	2535.0	DFT-s-OFDM QPSK	160@0	28.529	29.67
7	15	30	531000	2535.0	CP-OFDM QPSK	160@0	28.521	29.8
7	15	30	531000	2535.0	CP-OFDM 16 QAM	160@0	28.528	29.79
7	15	30	531000	2535.0	CP-OFDM 64 QAM	160@0	28.603	29.66
7	15	30	531000	2535.0	CP-OFDM 256 QAM	160@0	28.556	29.71
7	15	40	531000	2535.0	DFT-s-OFDM PI/2 BPSK	216@0	38.584	39.96
7	15	40	531000	2535.0	DFT-s-OFDM QPSK	216@0	38.636	40.03
7	15	40	531000	2535.0	CP-OFDM QPSK	216@0	38.526	39.89
7	15	40	531000	2535.0	CP-OFDM 16 QAM	216@0	38.52	39.97
7	15	40	531000	2535.0	CP-OFDM 64 QAM	216@0	38.603	39.92
7	15	40	531000	2535.0	CP-OFDM 256 QAM	216@0	38.5	39.95
7	15	50	531000	2535.0	DFT-s-OFDM PI/2 BPSK	270@0	48.044	49.86
7	15	50	531000	2535.0	DFT-s-OFDM QPSK	270@0	48.18	49.87
7	15	50	531000	2535.0	CP-OFDM QPSK	270@0	48.086	49.93
7	15	50	531000	2535.0	CP-OFDM 16 QAM	270@0	48.149	49.8
7	15	50	531000	2535.0	CP-OFDM 64 QAM	270@0	48.146	49.82
7	15	50	531000	2535.0	CP-OFDM 256 QAM	270@0	48.093	49.89