

Report No.: ZR/2020/5004201-01

Page: 1 of 29

### **FCC TEST REPORT**

Application No: ZR/2020/50042

Applicant: Xiaomi Communications Co., Ltd.

Address of Applicant #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District,

Beijing, China, 100085

Manufacturer: Xiaomi Communications Co., Ltd.

Address of Manufacturer: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District,

Beijing, China, 100085

**EUT Description:** Mobile Phone **Model No.:** M2006C3LVG

Trade Mark: Redmi

FCC ID: 2AFZZC3LVG Standards: 47 CFR Part 2

47 CFR Part 22 subpart H 47 CFR Part 24 subpart E 47 CFR Part 27 subpart C

Test Method: FCC KDB 971168 D01 Power Meas License Digital Systems V03r01

C63.26 (2015)

Date of Receipt: 2020/6/1

**Date of Test:** 2020/6/2 to 2020/7/4

**Date of Issue:** 2021/5/26

Test Result: PASS \*

Authorized Signature:

Derde yang

Derek Yang Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

<sup>\*</sup> In the configuration tested, the EUT detailed in this report complied with the standards specified above.

2 of 29 Page:

#### **Version** 1

	Revision Record					
Version	Chapter	Date	Modifier	Remark		
01		2020/7/4		Original		
02		2021/5/26	Stephen liang	Add test site Information     Updated equipment list		

<sup>\*</sup>This report supersedes our previous report ZR/2020/5004201, issued on 2020/7/4, which is hereby deemed null and void.

Authorized for issue by:	
Prepared By	Stephen liang / Engineer
Checked By	Dand Chen  (David Chen) /Reviewer



age: 3 of 29

### Content

1 VERSION	2
2 TEST SUMMARY	5
2.1 GSM850/UMTS BAND 5 & LTE BAND 5	5
2.2 GSM 1900/UMTS BAND 2 /LTE BAND 2	5
2.3 UMTS BAND 4 /LTE BAND 4	6
2.4 LTE BAND 7/38	6
3 GENERAL INFORMATION	8
3.1 CLIENT INFORMATION	8
3.2 TEST LOCATION	8
3.3	8
3.4 TEST FACILITY	9
3.5 GENERAL DESCRIPTION OF EUT	10
3.6 TEST MODE	10
3.7 TEST ENVIRONMENT	11
3.8 TECHNICAL SPECIFICATION	11
3.9 TEST FREQUENCIES	13
4 DESCRIPTION OF TESTS	17
4.1 CONDUCTED OUTPUT POWER	17
4.2 EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	17
4.3 OCCUPIED BANDWIDTH	17
4.4 BAND EDGE AT ANTENNA TERMINALS	18
4.5 Spurious And Harmonic Emissions at Antenna Terminal	18
4.6 PEAK-AVERAGE RATIO	19
4.7 FIELD STRENGTH OF SPURIOUS RADIATION	20
4.8 FREQUENCY STABILITY / TEMPERATURE VARIATION	21
4.9 TEST SETUPS	22
4.9.1 Test Setup 1	22
4.9.2 Test Setup 2	22
4.9.3 Test Setup 3	23
4.9.4 Test Setup 4	23



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate\*\*.



Report No.: ZR/2020/5004201-01

4 of 29 Page:

4.10 TEST CONDITIONS	24
5 MAIN TEST INSTRUMENTS	26
6 MEASUREMENT UNCERTAINTY	28
7 APPENDIXES	29



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate\*\*.

Report No.: ZR/2020/5004201-01

Page: 5 of 29

## 2 Test Summary

### 2.1 GSM850/UMTS Band 5 & LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass	А
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	А
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	А
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	А
Remark: For the v	erdict, the "N/A" d	lenotes "not applicable", the "N/T" deno	tes "not tested		

#### 2.2 GSM 1900/UMTS Band 2 /LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046, §24.232	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	Α
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	А
Spurious Emission at Antenna	§2.1051, §24.238	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency	Section 6 of Appendix B	Pass	А



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate\*\*.



Report No.: ZR/2020/5004201-01

Page: 6 of 29

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Terminals		ranges.			
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §24.235	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	Α
Remark: For the v	Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

### 2.3 UMTS Band 4 /LTE Band 4

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass	А
Peak-Average Ratio	§2.1046, §27.50(d)	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	А
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	Α
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	А
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	Α
Remark: For the ve	Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

### 2.4 LTE Band 7/38

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP ≤ 2W	Section 1 of Appendix B	Pass	А
Peak-Average Ratio	§27.50(a)	≤13 dB	Section 2 of Appendix B	Pass	А
Modulation	§2.1047	Digital modulation	Section 3 of	Pass	Α



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,



Report No.: ZR/2020/5004201-01

7 of 29 Page:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Characteristics			Appendix B		Lub
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	Α
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.	Section 5 of Appendix B	Pass	Α
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz × MHz 10 <sup>th</sup> harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B	Pass	А
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz X MHz 10th harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block. enotes "not applicable", the "N/T" denotes "not	Section 8 of Appendix B	Pass	А

#### Remark:

All test were performed by Lab A and B.

Parts of test items above were subcontracted to Lab B.

Lab A SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Lab B SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755)

8 of 29 Page:

#### 3 **General Information**

### 3.1 Client Information

Applicant:	Xiaomi Communications Co., Ltd.
Address of Applicant:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer:	Xiaomi Communications Co., Ltd.
Address of Manufacturer:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

#### 3.2 Test Location

#### Lab A:

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Test engineer:	Dee Zheng,Mike Hu

#### Lab B:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.			
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China			
Post code:	710086			
Test engineer:	Ben Huang, Leah Chen			



Page: 9 of 29

### 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### Lab A:

#### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

#### Lab B:

#### A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

• FCC -Designation Number: CN1271.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) served are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

Page: 10 of 29

## 3.4 General Description of EUT

EUT Description::	Mobile Phone
Model No.:	M2006C3LVG
Trade Mark:	Redmi
Hardware Version:	P2
Software Version:	MIUI 12
Sample Type:	□ Portable Device, □ Module
Antenna Type:	☐ External, ☐ Integrated
Antenna Gain:	GSM850: Main/ -3.04dBi; Div/-4.45 dBi, GSM1900:0dBi WCDMA Band II:0dBi WCDMA Band IV:-0.5dBi WCDMA Band V: Main/ -3.04dBi; Div/-4.45 dBi, LTE Band 2:0dBi; LTE Band 4:-0.5dBi; LTE Band 5: Main/ -3.04dBi; Div/-4.45 dBi, LTE Band 7: 0.7dBi LTE Band 38:0dBi;
Accsessories	AC Adapter 1:Model :MDY-09-EQ; Input:100-240V,0.35A;Output:5V,2A AC Adapter 2:Model :MDY-09-EQ; Input:100-240V,0.35A;Output:5V,2A Li-ion Battery: Model :BN56;3.85V,4900mAh USB: Model :H52210; 0.8 meter, shielded cable, with-out ferrite core

#### 3.5 Test Mode

Test Mode	Test Modes Description
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation
GSM/TM2	GSM system, EGPRS, 8PSK modulation
UMTS/TM1	UMTS system, WCDMA, QPSK modulation
UMTS/TM2	UMTS system, WCDMA, 16QAM modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation
LTE/TM3	LTE system, 64QAM modulation

Remark: The test mode(s) are selected according to relevant radio technology specifications.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.agpx">http://www.sgs.com/en/Terms-and-Conditions.agpx</a> and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

Page: 11 of 29

#### 3.6 Test Environment

Environment Parameter	Selected Values During Tests		
Relative Humidity	52%		
Atmospheric Pressure:	101.32 KPa		
Temperature	NT	25 °C	
	LV	3.6V	
Voltage:	NV	3.85V	
	HV	4.4V	

Remark: LV= lower extreme test voltage; NV= nominal voltage HV= upper extreme test voltage; NT= normal temperature

## 3.7 Technical Specification

Characteristics	Description			
	⊠ GSM			
Radio System Type	∪MTS			
	Band	TX	RX	
	GSM850	824 to 849 MHz	869 to 894 MHz	
	GSM1900	1850 to 1910 MHz	1930 to 1990 MHz	
	UMTS Band II	1850 to 1910 MHz	1930 to 1990 MHz	
	UMTS Band IV	1710 to 1755 MHz	2110 to 2155 MHz	
Supported Frequency Range	UMTS Band V	824 to 849 MHz	869 to 894 MHz	
rango	LTE Band 2	1850 to 1910 MHz	1930 to 1990 MHz	
	LTE Band 4	1710 to 1755 MHz	2110 to 2155 MHz	
	LTE Band 5	824 to 849 MHz	869 to 894 MHz	
	LTE Band 7	2500 to 2570 MHz	2620 to 2690 MHz	
	LTE Band 38	2570 to 2620 MHz	2570 to 2620 MHz	
Target TX Output Power	GSM850:33 dBm GSM1900: 30dBm UMTS Band II: 23dBm UMTS Band IV: 23dBm UMTS Band V: 23dBm LTE Band 2: 23dBm LTE Band 4: 23dBm LTE Band 5: 23.5dBm LTE Band 7: 23dBm LTE Band 38: 23dBm			
Supported Channel Bandwidth	GSM system: UMTS system: LTE Band 2		5 MHz; ⊠10 MHz;	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate\*\*.



Report No.: ZR/2020/5004201-01

12 of 29

	T	Mas Mul Moo Mul
		∑15 MHz, ∑20 MHz
	LTE Band 4	
	LTE Band 5	$\boxtimes$ 1.4 MHz; $\boxtimes$ 3 MHz; $\boxtimes$ 5 MHz; $\boxtimes$ 10 MHz
	LTE Band 7	□ 5 MHz; □ 10 MHz; □ 15 MHz, □ 20 MHz
	LTE Band38	
Characteristics	Description	
	GSM850	249KGXW; 252KG7W
	GSM1900	245KGXW; 256KG7W
	UMTS Band II	4M17F9W;
	UMTS Band IV	4M18F9W;
	UMTS Band V	4M20F9W;
		1M09G7D;1M09W7D;
		2M69G7D;2M69W7D;
	LTE Dond 2	4M48G7D;4M49W7D;
	LTE Band 2	8M93G7D;8M97W7D;
Designation of		13M5G7D;13M5W7D;
Emissions		18M0G7D;17M9W7D;
(Remark: the necessary		1M09G7D;1M09W7D;
bandwidth of which is		2M69G7D;2M68W7D;
the worst value from	LTE Band 4	4M48G7D;4M49W7D;
	LIE Band 4	8M95G7D;8M93W7D;
the measured occupied		13M6G7D;13M5W7D;
bandwidths for each		18M0G7D;17M9W7D;
type of channel		1M09G7D;1M09W7D;
bandwidth	LTE Band 5	2M69G7D;2M68W7D;
configuration.)	LIE Ballu 5	4M49G7D;4M50W7D;
,		8M95G7D;8M93W7D;
		4M49G7D;4M49W7D;
	LTE Band 7	8M97G7D;8M95W7D;
	LIE Band /	13M6G7D;13M6W7D;
		18M1G7D;18M1W7D;
	LTE Band 38	4M49G7D;4M49W7D;
		8M97G7D;8M97W7D;
		13M6G7D;13M6W7D;
		18M1G7D;18M1W7D;



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.agpx">http://www.sgs.com/en/Terms-and-Conditions.agpx</a> and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

Report No.: ZR/2020/5004201-01

Page: 13 of 29

## 3.8 Test Frequencies

Toot Mode	TX / RX	RF Channel		
Test Mode	IA/KA	Low (L)	Middle (M)	High (H)
GSM850	TX RX	Channel 128	Channel 190	Channel 251
		824.2MHz	836.6 MHz	848.8 MHz
		Channel 128	Channel 190	Channel 251
		869.2 MHz	881.6 MHz	893.8 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
GSM1900 -	TX RX	Channel 512	Channel 661	Channel 810
		1850.2MHz	1880.0 MHz	1909.8 MHz
		Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA Band II	TX	Channel 9262	Channel 9400	Channel 9538
		1852.4 MHz	1880.0 MHz	1907.6 MHz
	DV	Channel 9662	Channel 9800	Channel 9938
	RX	1932.4 MHz	1960.0 MHz	1987.6 MHz

Test Mode	TX / RX RF Channel			
rest Mode	IA/KA	Low (L)	Middle (M)	High (H)
WCDMA Band IV	TX RX	Channel 1312	Channel 1413	Channel 1513
		1712.4MHz	1732.6 MHz	1752.6 MHz
		Channel 1537	Channel 1638	Channel 1738
		2112.4 MHz	2132.6 MHz	2152.6 MHz

Test Mode	TX / RX	RF Channel		
Test Mode	IA/KA	Low (L)	Middle (M)	High (H)
WCDMA Band V	TX	Channel 4132	Channel 4182	Channel 4233
		826.4MHz	836.4 MHz	846.6 MHz
	RX	Channel 4357	Channel 4407	Channel 4458
		871.4 MHz	881.4 MHz	891.6 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,



Report No.: ZR/2020/5004201-01

14 of 29

To at Marila	Devil 110	TX/RX		RF Channel									
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)								
		T)/	Channel 18607	Channel 18900	Channel 19193								
	4 48411-	TX	1850.7 MHz	1880 MHz	1909.3 MHz								
	1.4MHz	DV	Channel 607	Channel 900	Channel 1193								
		RX	1930.7 MHz	1960 MHz	1989.3 MHz								
		TX	Channel 18615	Channel 18900	Channel 19185								
	OML-	1.	1851.5 MHz	1880 MHz	1908.5 MHz								
	3MHz	RX	Channel 615	Channel 900	Channel 1185								
		KΛ	1931.5 MHz	1960 MHz	1988.5 MHz								
		TX	Channel 18625	Channel 18900	Channel 19175								
	5MHz	1.7	1852.5 MHz	1880 MHz	1907.5 MHz								
		RX	Channel 625	Channel 900	Channel1175								
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz								
LIE Danu Z	10MHz	TX	Channel 18650	Channel 18900	Channel 19150								
			1855 MHz	1880 MHz	1905 MHz								
		RX	Channel 650	Channel 900	Channel 1150								
			1935 MHz	1960 MHz	1985 MHz								
		TX	Channel 18675	Channel 18900	Channel 19125								
	15MHz		1857.5 MHz	1880 MHz	1902.5 MHz								
	TOIVITZ	RX	Channel 675	Channel 900	Channel 1125								
		KA	1937.5 MHz	1960 MHz	1982.5 MHz								
		TX	Channel 18700	Channel 18900	Channel 19100								
	20MHz	1.	1860 MHz	1880 MHz	1900 MHz								
	ZUIVITZ	DV	Channel 700	Channel 900	Channel 1100								
										RX	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.agpx">http://www.sgs.com/en/Terms-and-Conditions.agpx</a> and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: ZR/2020/5004201-01

Page: 15 of 29

Toot Mode	Dondwidth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
		TX	Channel 19957	Channel 20175	Channel 20393
	4 48411-	1.7	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		KΛ	2112.5 MHz	2132.5MHz	2152.5 MHz
	3MHz	TX	Channel 19965	Channel 20175	Channel 20385
		1.7	1711.5 MHz	1732.5 MHz	1753.5 MHz
		DV	Channel 2000	Channel 2175	Channel 2350
		RX	2115 MHz	2132.5MHz	2150 MHz
		TX	Channel 19975	Channel 20175	Channel 20375
			1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5MHz	RX	Channel 1975	Channel 2175	Channel 2375
			2112.5 MHz	2132.5MHz	2152.5 MHz
LIE Danu 4		TX	Channel 20000	Channel 20175	Channel 20350
	10MHz		1715 MHz	1732.5 MHz	1750 MHz
	TUIVITZ	RX	Channel 2000	Channel 2175	Channel 2350
		KA	2115 MHz	2132.5MHz	2150 MHz
		TV	Channel 20025	Channel 20175	Channel 20325
	15MHz	TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
	TOIVITZ	DV	Channel 2025	Channel 2175	Channel 2325
		RX	2117.5 MHz	2132.5MHz	2147.5 MHz
		TV	Channel 20050	Channel 20175	Channel 20300
	20MHz	TX	1720 MHz	1732.5 MHz	1745 MHz
	ZUIVITZ	RX	Channel 2050	Channel 2175	Channel 2300
		ΓΛ	2120 MHz	2132.5MHz	2145 MHz

Toot Mode	Dondwidth	TV / DV	RF Channel			
Test Mode	Bandwidth	Bandwidth TX / RX	Low (L)	Middle (M)	High (H)	
		TV	Channel 20407	Channel 20525	Channel 20643	
	1 41411-	TX	824.7 MHz	836.5 MHz	848.3 MHz	
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643	
		KA	869.7 MHz	881.5 MHz	893.3 MHz	
		TX	Channel 20415	Channel 20525	Channel 20635	
3MH	2MH-	1.7	825.5 MHz	836.5 MHz	847.5 MHz	
	SIVITZ	RX	Channel 2415	Channel 2525	Channel 2635	
			870.5 MHz	881.5 MHz	892.5 MHz	
LIE Dallu 3		TX	Channel 20425	Channel 20525	Channel 20625	
	5MHz		826.5 MHz	836.5 MHz	846.5 MHz	
	SIVITZ	RX	Channel 2425	Channel 2525	Channel 2625	
			871.5 MHz	881.5 MHz	891.5 MHz	
		TX	Channel 20450	Channel 20525	Channel 20600	
	10MU=	1.7	829 MHz	836.5 MHz	844 MHz	
	10MHz RX	-	Channel 2450	Channel 2525	Channel 2600	
		874 MHz	881.5 MHz	889 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate\*\*.



Report No.: ZR/2020/5004201-01

Page: 16 of 29

Toot Made	Dondwidth	TV / DV		RF Channel				
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)			
		TX	Channel 20775	Channel 21100	Channel 21425			
	5MHz	1.7	2502.5 MHz	2535 MHz	2567.5 MHz			
	SIVITZ	RX	Channel 2775	Channel 3100	Channel 5825			
		KA	2622.5 MHz	2655 MHz	2687.5 MHz			
		TX	Channel 20800	Channel 21100	Channel 21400			
	10MHz		2505 MHz	2535 MHz	2565 MHz			
	TUIVITZ	RX	Channel 2800	Channel 3100	Channel 3400			
LTE Band 7			2625 MHz	2655 MHz	2685 MHz			
LIE Dallu I		15MHz	Channel 20825	Channel 21100	Channel 21375			
	15MU-		2507.5 MHz	2535 MHz	2562.5 MHz			
	20MHz	ISIVITZ	TOWINZ	IOIVITZ	RX	Channel 2825	Channel 3100	Channel 3375
				NΛ	2627.5 MHz	2655 MHz	2682.5 MHz	
		TX	Channel 20850	Channel 21100	Channel 21350			
			2510 MHz	2535 MHz	2560 MHz			
			Channel 2850	Channel 3100	Channel 3350			
			RX	2630 MHz	2655 MHz	2680 MHz		

Test Mode	Bandwidth	TX / RX	RF Channel			
i est ivioue	Dariuwiuiri	1/ 5/	Low (L)	Middle (M)	High (H)	
		TX/RX	Channel 37775	Channel38000	Channel 38225	
	5MHz	IA/IXA	2572.5 MHz	2595 MHz	2617.5 MHz	
	10MHz	TX/RX	Channel 37800	Channel38000	Channel 38200	
LTE Band 38			2575 MHz	2595 MHz	2615 MHz	
LIE Danu 30	15MU-	15MHz TX/RX	Channel 37825	Channel38000	Channel 38175	
	TOIVIEZ		2577.5 MHz	2595 MHz	2612.5 MHz	
	201411-	OOMALI- TY/DY	Channel 37850	Channel38000	Channel 38150	
	20MHz TX/RX	2580 MHz	2595 MHz	2610 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate\*\*.

Page: 17 of 29

## 4 Description of Tests

### 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

## 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01; C63.26 (2015)

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

## 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, please contact us at telephone: (86-7

Page: 18 of 29

#### Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7

### 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

#### Remark: Reference test setup 1

#### Test Settings

- Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

## 4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

Page: 19 of 29

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### Remark: Reference test setup 1

#### Test Settings

- Start frequency was set to 30MHz and stop frequency was set to at least 10 \* the fundamental frequency (separated into at least two plots per channel)
- Detector = RMS
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- The trace was allowed to stabilize
- Please see test notes below for RBW and VBW settings

### 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

Page: 20 of 29

#### Test Settings

- The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

## 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

#### Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

#### Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

www.sasaroup.com.cn

Page: 21 of 29

EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi) EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete

Remark: Reference test setup 3

### 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

#### **Time Period and Procedure:**

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 4




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms

Report No.: ZR/2020/5004201-01

22 of 29 Page:

## 4.9 Test Setups

#### 4.9.1 Test Setup 1

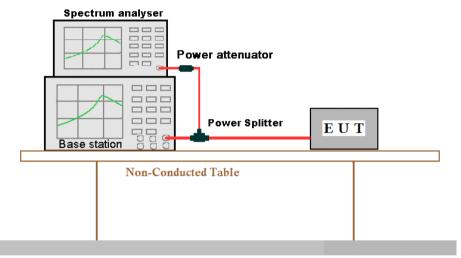

**Ground Reference Plane** 

### 4.9.2 Test Setup 2

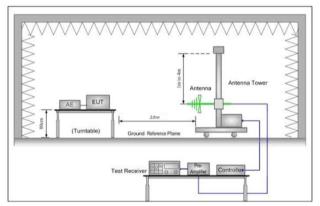


Figure 1. 30MHz to 1GHz

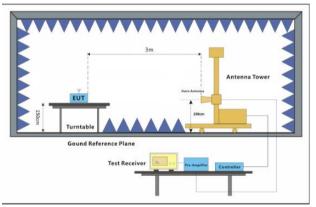


Figure 2. above 1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.agpx">http://www.sgs.com/en/Terms-and-Conditions.agpx</a> and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057

t (86-755) 26012053 f (86-755) 26710594

www.sasaroup.com.cn sgs.china@sgs.com

Report No.: ZR/2020/5004201-01

Page: 23 of 29

#### 4.9.3 Test Setup 3


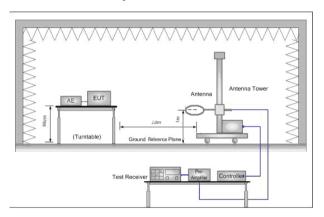


Figure 1. Below 30MHz

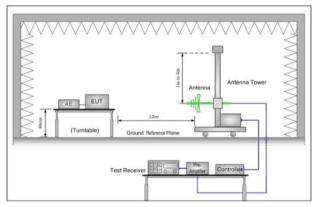

Antenna Tower

Hern Antenna

Turntable

Gound Reference Plane

Test Receiver


Test Receiver

Test Receiver

Figure 2. 30MHz to 1GHz

Figure 3. above 1GHz

#### 4.9.4 Test Setup 4

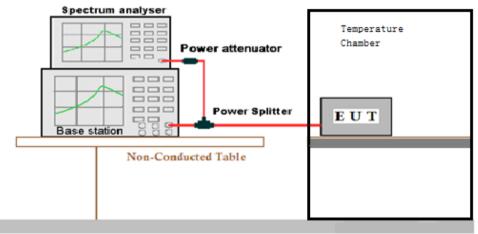

Ground Reference Plane



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, 1800 the contact us at telephone: (86-755) 8307 1443, 1800 the contact us at telephone: (86-755) 8307 1443, 1800 the contact us at telephone: (86-755) 8307 1443, 1800 the contact us at telephone: (86-755) 8307 1443, 1800 the contact us at telephone: (86-755) 8307 1443, 1800 the contact us at telephone: (86-755) 8307 1443, 1800 the contact us at telephone: (86-755) 8307 1443, 1800 the contact us at telephone: (86-755) 8307 1443, 1800 the contact us at tele

Page: 24 of 29

### 4.10 Test Conditions

Test Case		Test Conditions	s	
		Test Environment	Ambient Climate & Rated Voltage	
	Average	Test Setup	Test Setup 1	
	Power, Total	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
Transmit Output		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2	
Power Data	Average	Test Environment	Ambient Climate & Rated Voltage	
	Power,	Test Setup	Test Setup 1	
Spectral Density (if	Density (if	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
	required)	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2	
		Test Environment	Ambient Climate & Rated Voltage	
Peak-to-Ave	erane Ratio	Test Setup	Test Setup 1	
(if required)	srage Natio	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2	
		Test Environment	Ambient Climate & Rated Voltage	
Modulation		Test Setup	Test Setup 1	
Characteris	tics	RF Channels (TX)	M (M= middle channel )	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2	
Occupi Bandwidth Bandw		Test Environment	Ambient Climate & Rated Voltage	
	Occupied	Test Setup	Test Setup 1	
	Bandwidth	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2	
	Emission	Test	Ambient Climate & Rated Voltage	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate\*\*.



Report No.: ZR/2020/5004201-01

age: 25 of 29

	Bandwidth	Environment			
	(if	Test Setup	Test Setup 1		
required)		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2		
		Test Environment	Ambient Climate & Rated Voltage		
Pand Edges		Test Setup	Test Setup 1		
Band Edges Compliance		RF Channels (TX)	L, H (L= low channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2		
		Test Environment	Ambient Climate & Rated Voltage		
Spurious En	nission at	Test Setup	Test Setup 1		
Antenna Te	rminals	RF Channels (TX)	L,M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;UMTS/TM1; LTE/TM1		
		Test Environment	Ambient Climate & Rated Voltage		
		Test Setup	Test Setup 2		
Field Streng Spurious Ra		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2; LTE/TM1;LTE/TM2; Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.		
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate.		
		Test Setup	Test Setup 4		
Frequency S	Stability	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
	Test Mode		GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate\*\*.

Page: 26 of 29

## 5 Main Test Instruments

RF conducted test						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date (yyyy-mm-	
				dd)	dd)	
Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66311B	W009-09	2019/10/22	2020/10/21	
Signal Analyzer	Rohde & Schwarz	FSV	W005-02	2020/4/16	2021/4/15	
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11	
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A	
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2019/10/22	2020/10/21	
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-17	2019/10/22	2020/10/21	
Temperature Chamber	GIANT FORCE	ICT-150- 40-CP-AR	W027-03	2019/10/22	2020/10/21	
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15	
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2019/10/22	2020/10/21	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.agpx">http://www.sgs.com/en/Terms-and-Conditions.agpx</a> and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,



Report No.: ZR/2020/5004201-01

27 of 29

	RSE Test System							
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date			
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10			
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2020-04-02	2021-04-01			
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2019-09-07	2020-09-06			
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12			
Receiving antenna (1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2019-10-13	2021-10-12			
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12			
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR			
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR			
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR			
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR			
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2019-11-18	2020-11-17			
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2019-11-18	2020-11-17			
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2019-12-03	2020-12-02			
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2019-11-18	2020-11-17			
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2019-12-06	2020-12-05			
Measurement Software	Tonscend	TS+ RSE V3.0.0.2	XAW02-05-01	NCR	NCR			
5G UXM	Keysight	E7515B	XAW01-19-02	2019-08-17	2020-08-16			
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	XAW01-03-02	2020-04-02	2021-04-01			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate\*\*.

28 of 29

#### **Measurement Uncertainty** 6

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

#### Lab A:

Test Item	Extended Uncertainty	Data
Transmit Output Power Data	Power [dBm]	U =±0.37 dB
Bandwidth	Magnitude [%]	U =± 0.2%
Band Edge Compliance	Disturbance Power [dBm]	$U = \pm 2.0 \text{ dB}$
Spurious Emissions, Conducted	Disturbance Power [dBm]	$U = \pm 2.0 \text{ dB}$
Frequency Stability	Frequency Accuracy [ppm]	U = ±0.24 ppm

#### Lab B:

No.	Item	Measurement Uncertainty
		± 4.8dB (Below 1GHz)
	5	± 4.8dB (1GHz to 6GHz)
1	Radiated Emission	± 4.5dB (6GHz to 18GHz)
		± 5.02dB (Above 18GHz)



sgs.china@sgs.com

Page: 29 of 29

## 7 Appendixes

Appendix A	Photographs of Set-Up for ZR202050042.	
Appendix B.1	GSM 850 & 1900	
Appendix B.2	WCDMA Band II & IV & V	
Appendix B.3	LTE Band 2	
Appendix B.4	LTE Band 4	
Appendix B.5	LTE Band 5	
Appendix B.6	LTE Band 7	
Appendix B.7	LTE Band 38	

The End



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,