



No. I19Z62195-SEM01

For

Xiaomi Communications Co., Ltd.

Mobile Phone

Model name: M2001J1G/ M2001J2G

With

Hardware Version: P2.2

Software Version: MIUI 11

FCC ID: 2AFZZJAG

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

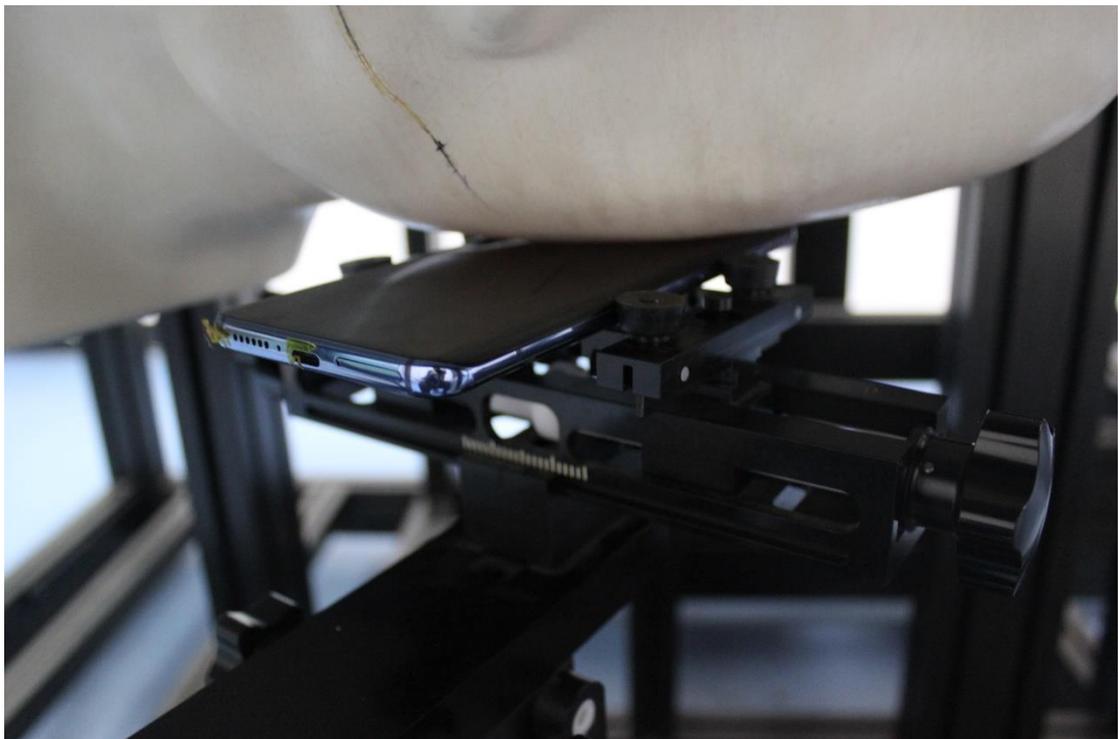


Picture 2: Left Hand Touch Cheek Position

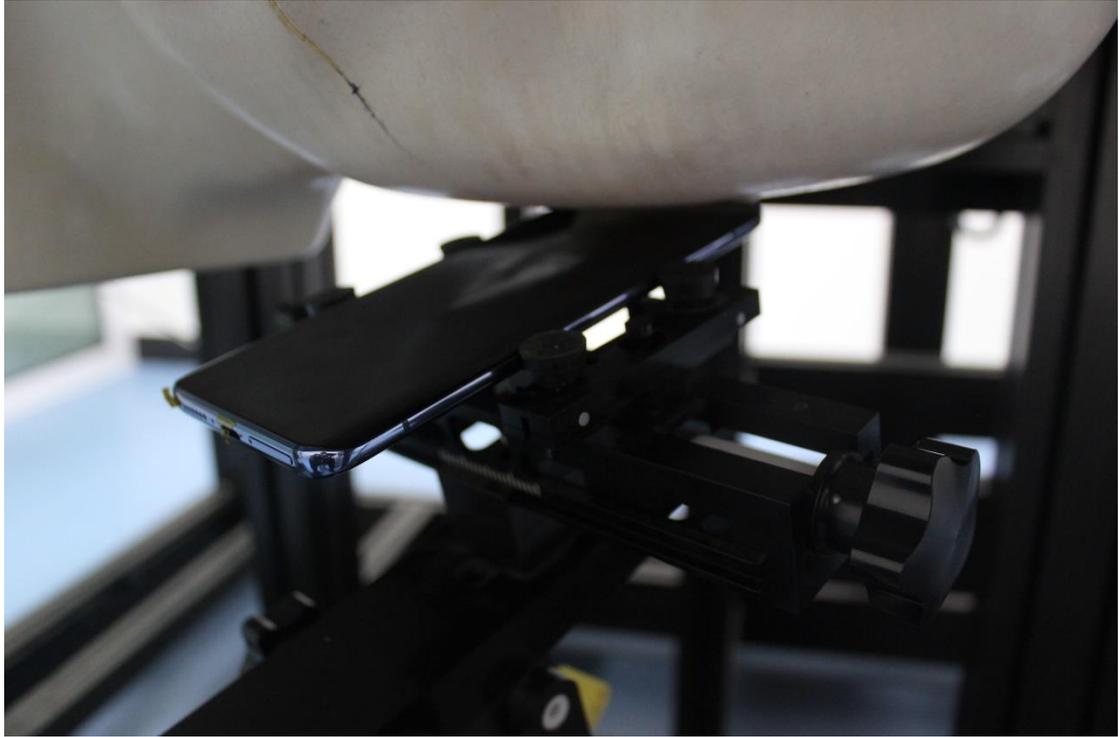

Picture 3: Left Hand Tilt 15° Position

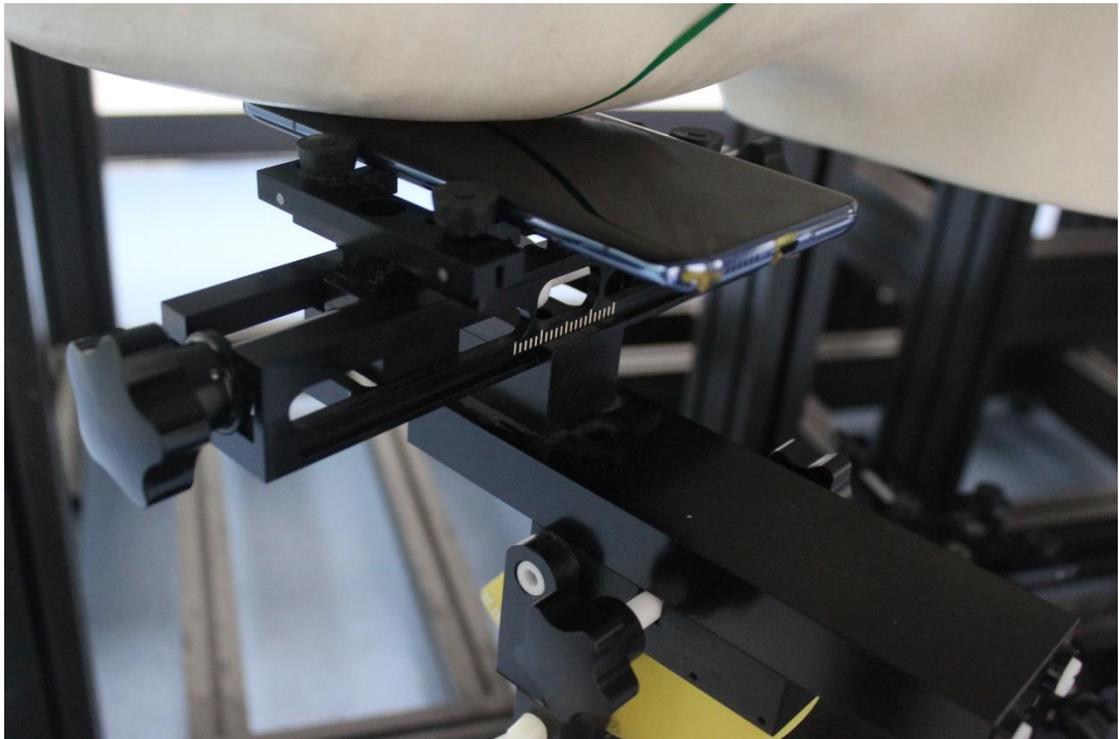


Picture 4: Right Hand Touch Cheek Position

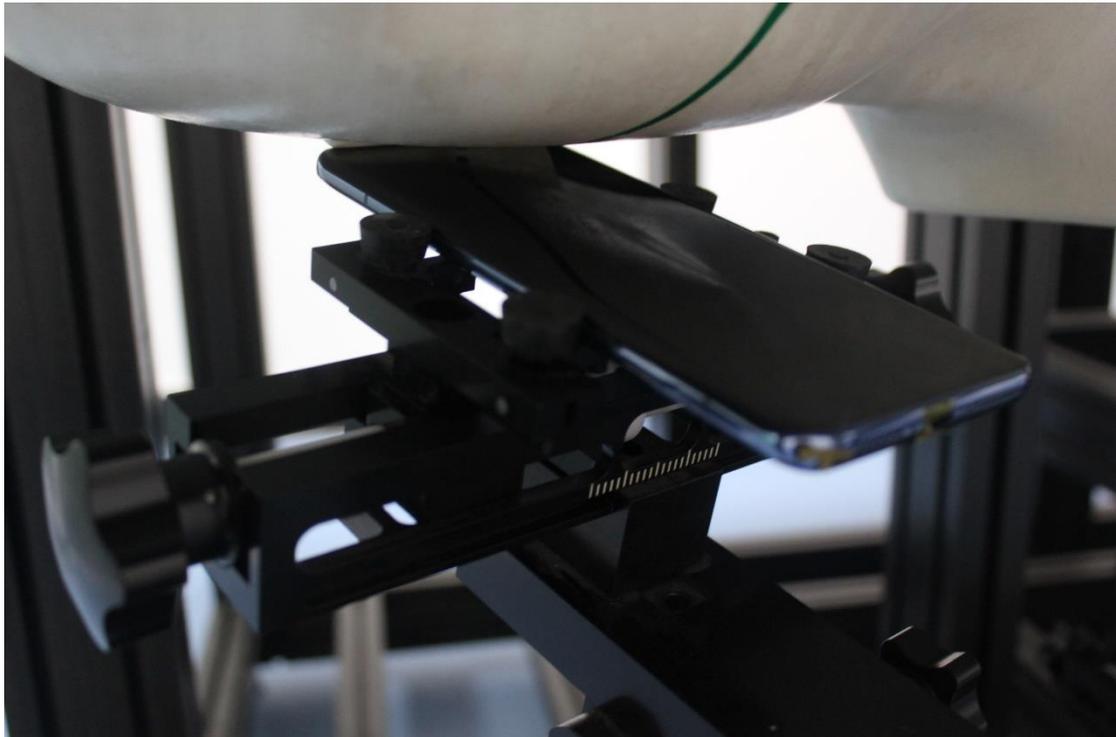


Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 12 test positions all with the distance =0/10/15mm between the EUT and the phantom bottom:

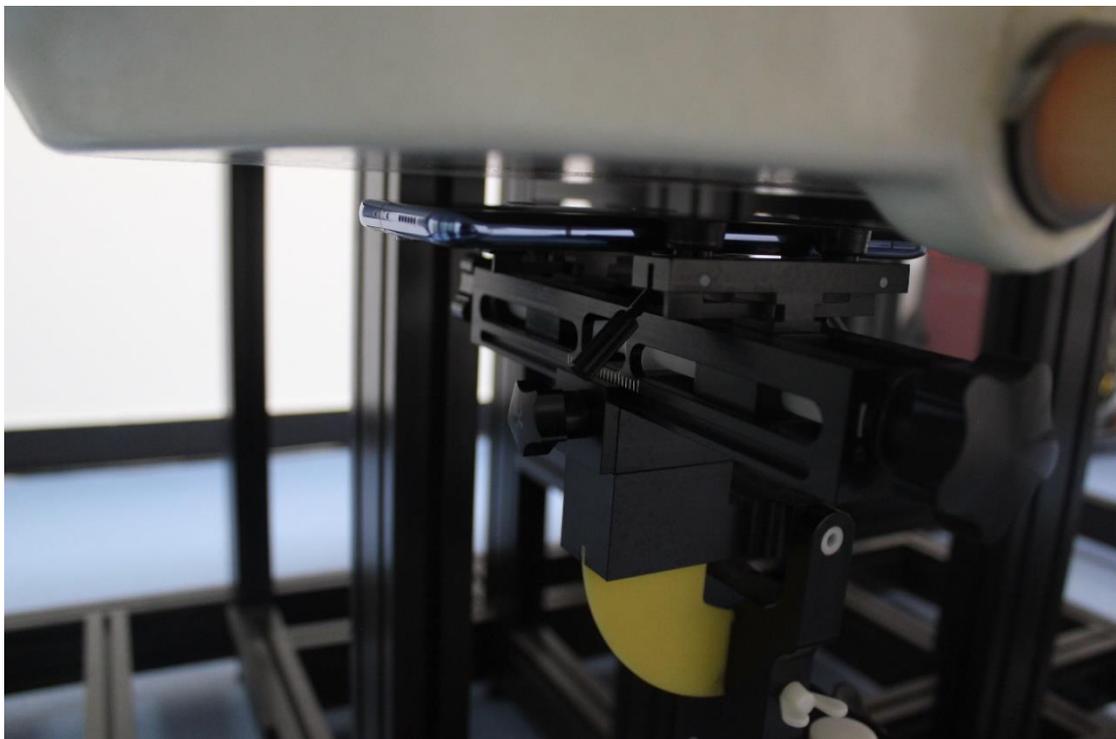


Picture 6: Front 10mm

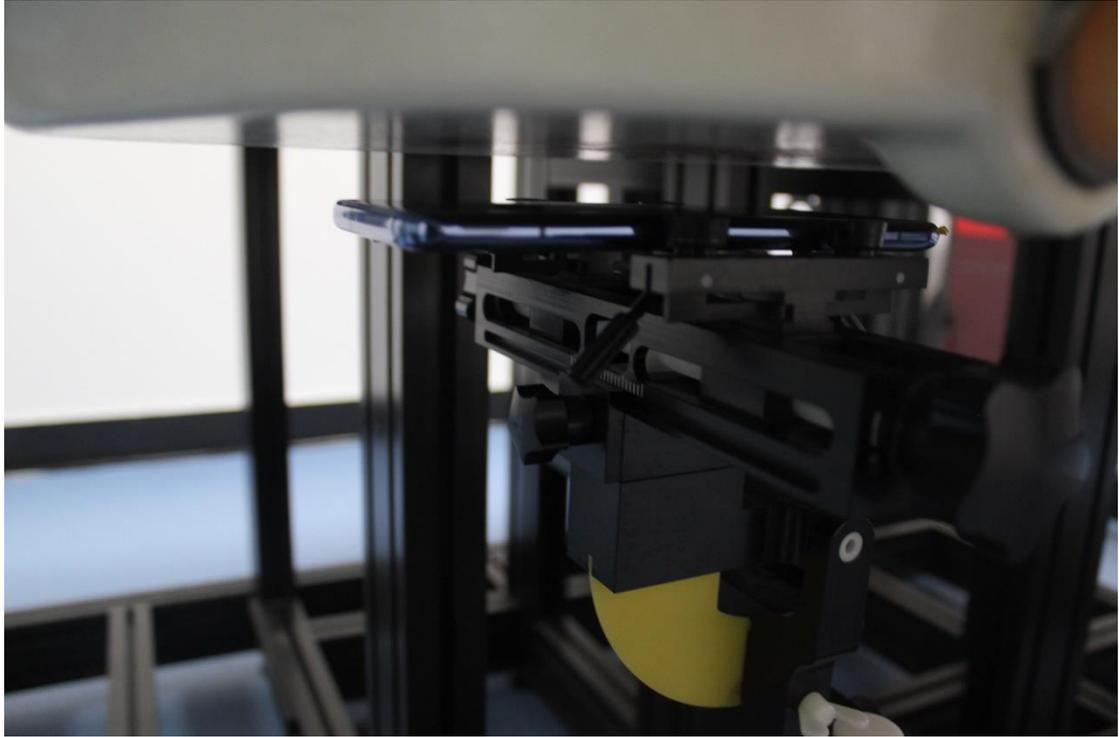


Picture 7: Front 15mm

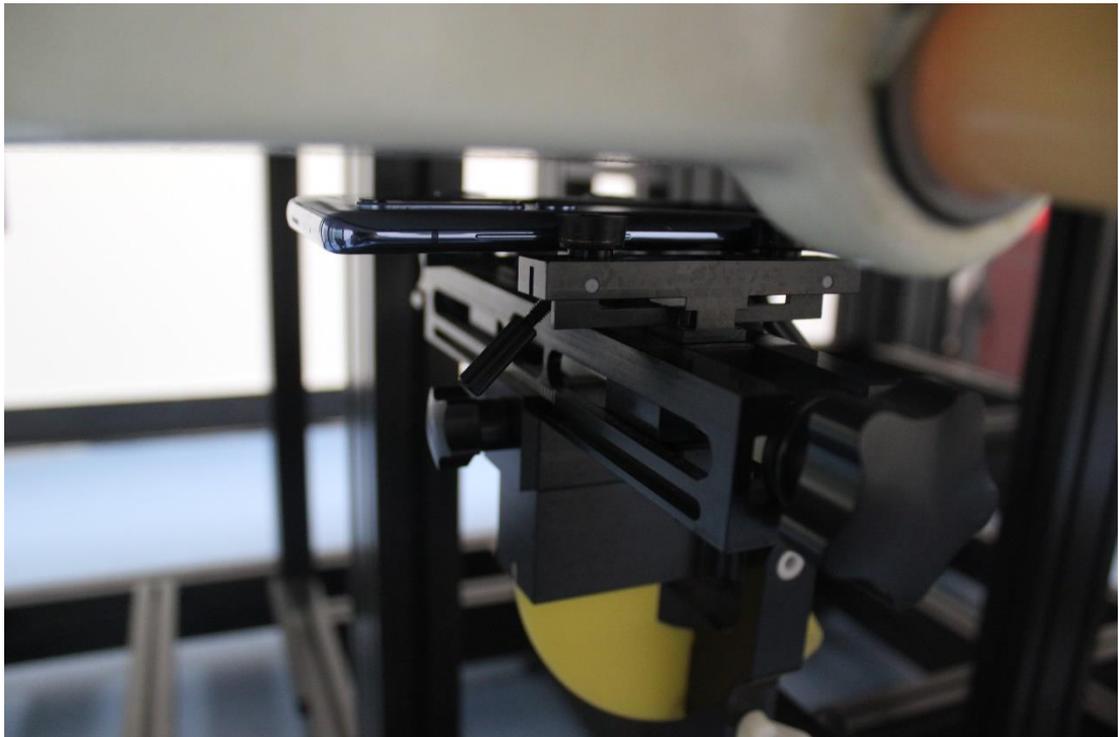


Picture 8: Rear 10mm

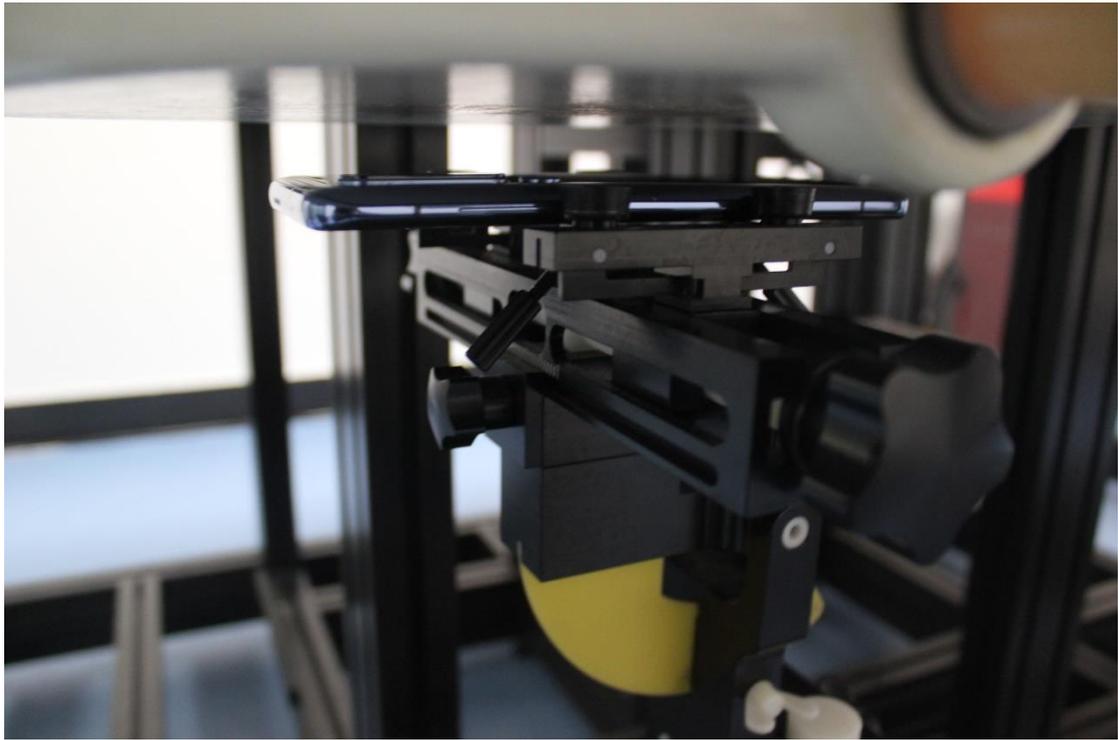


Picture 9: Rear 15mm

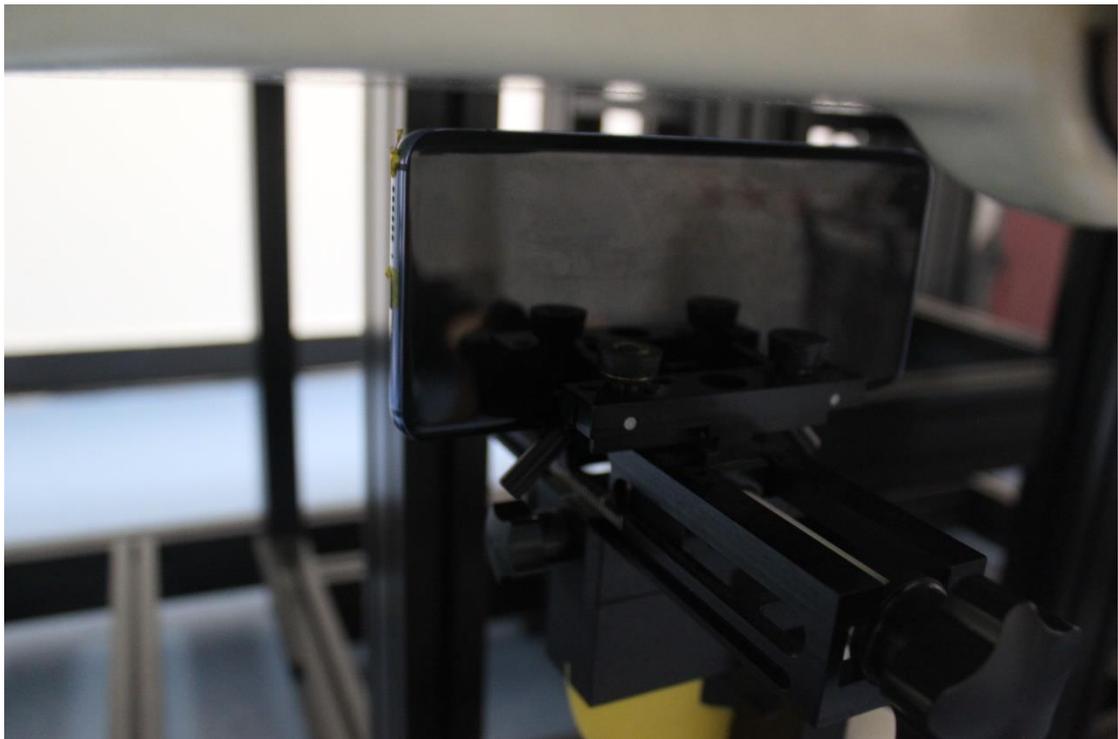


Picture 10: Left 10mm

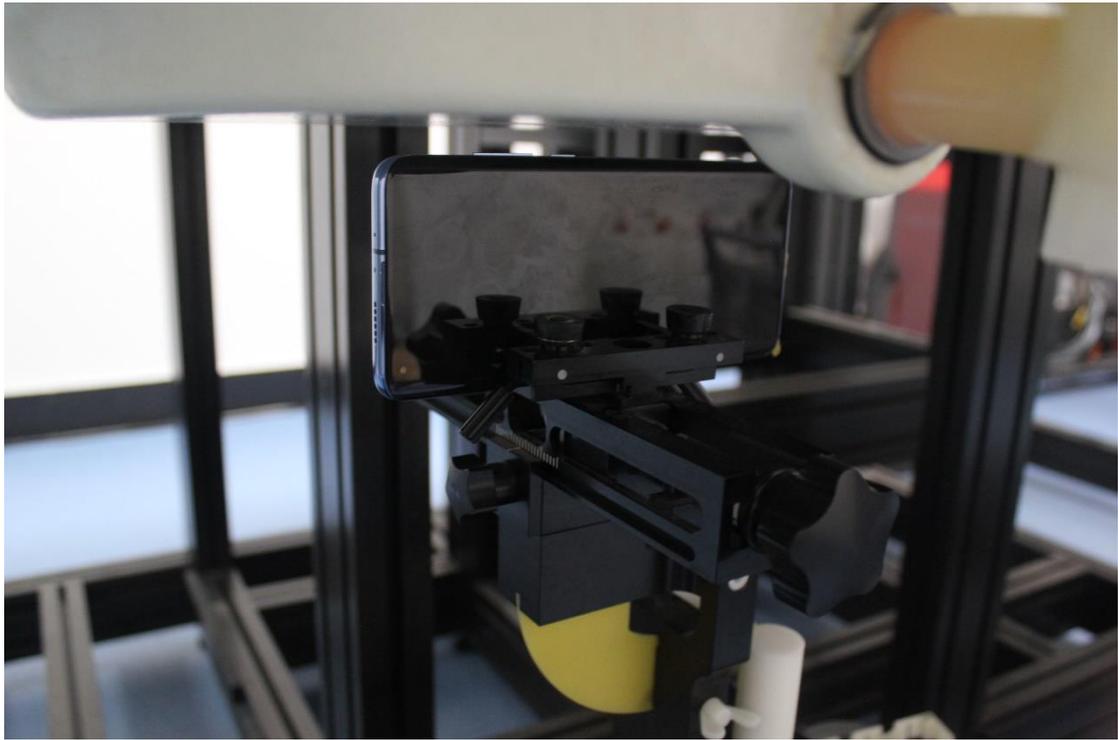


Picture 11: Right 10mm

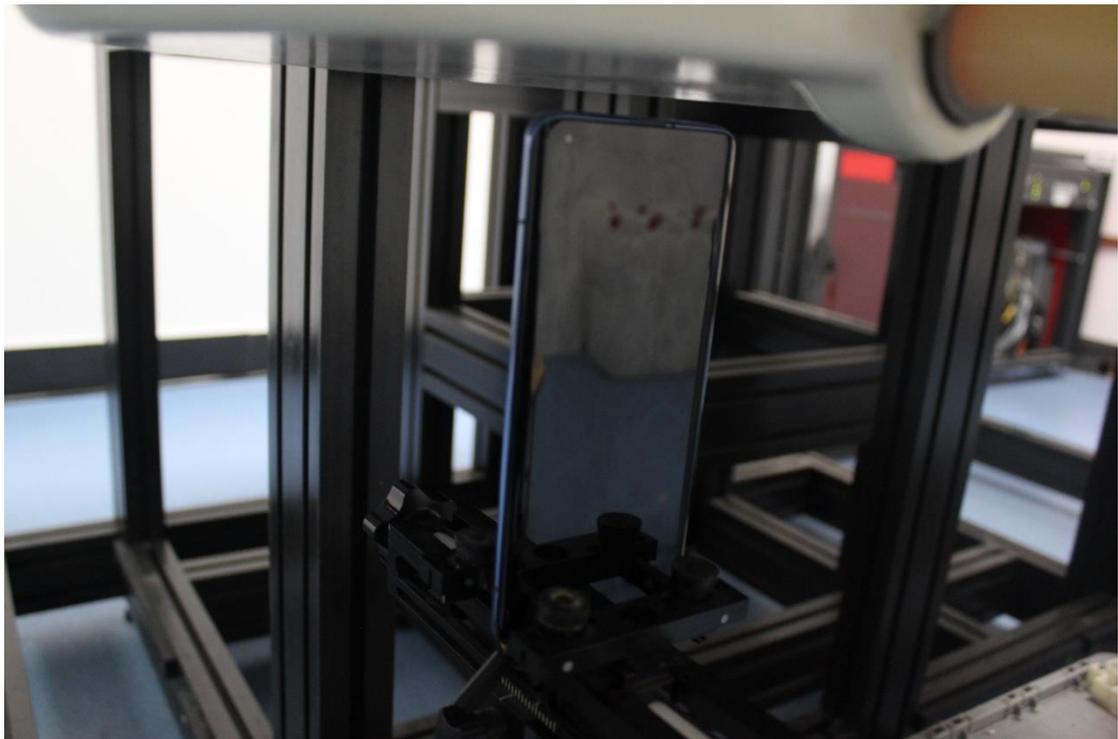


Picture 12: Top 10mm

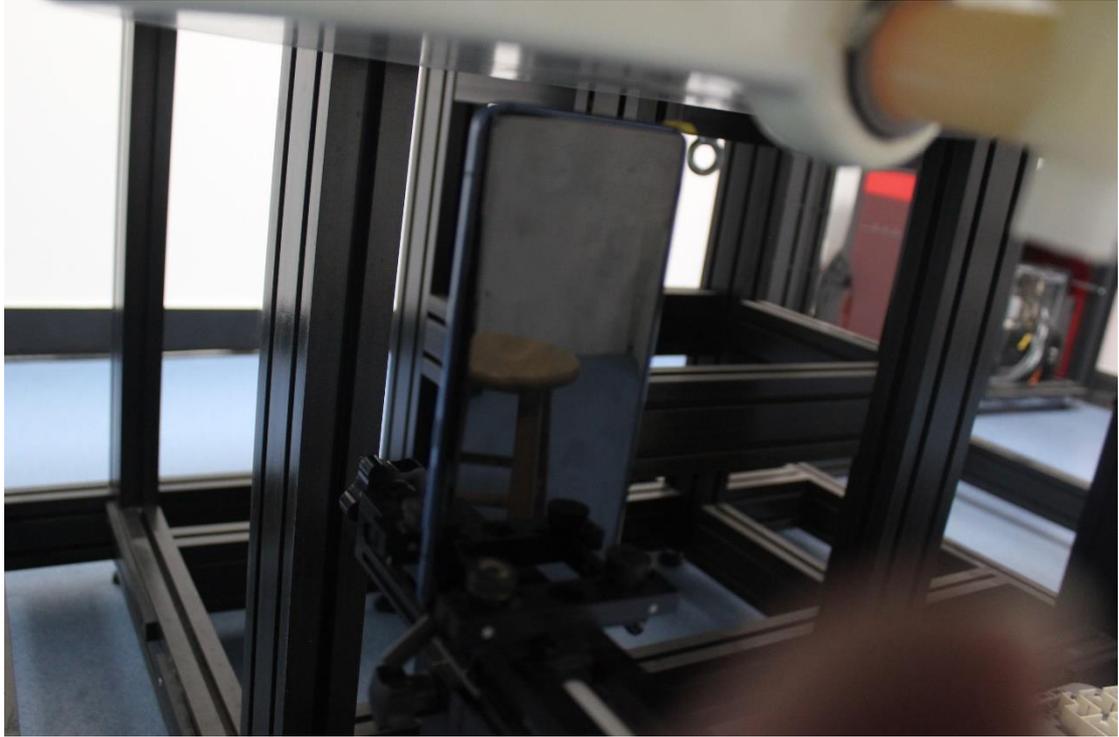


Picture 13: Bottom 10mm

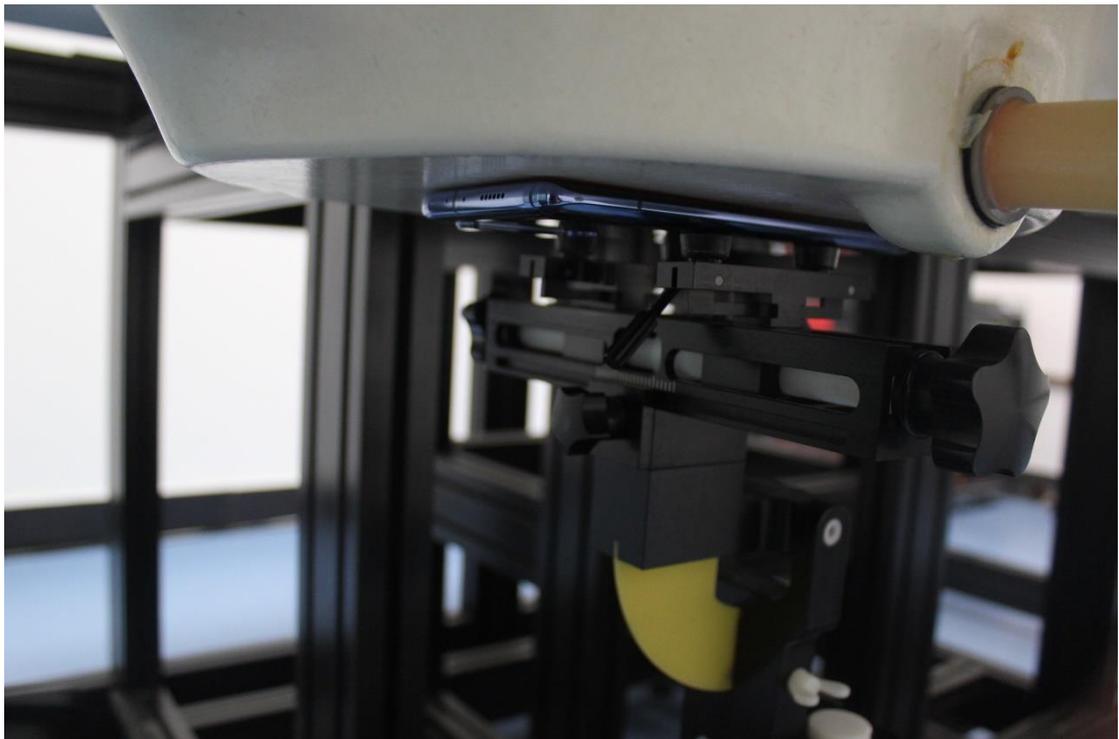


Picture 14: Front 0mm

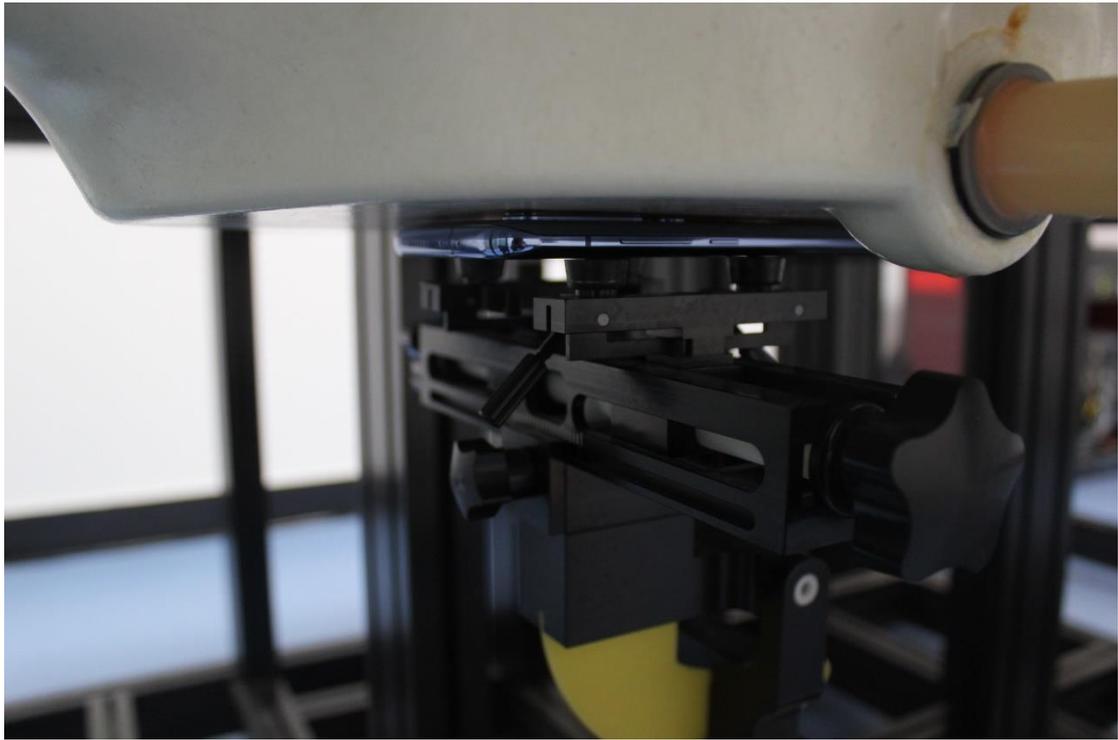

Picture 15: Rear 0mm

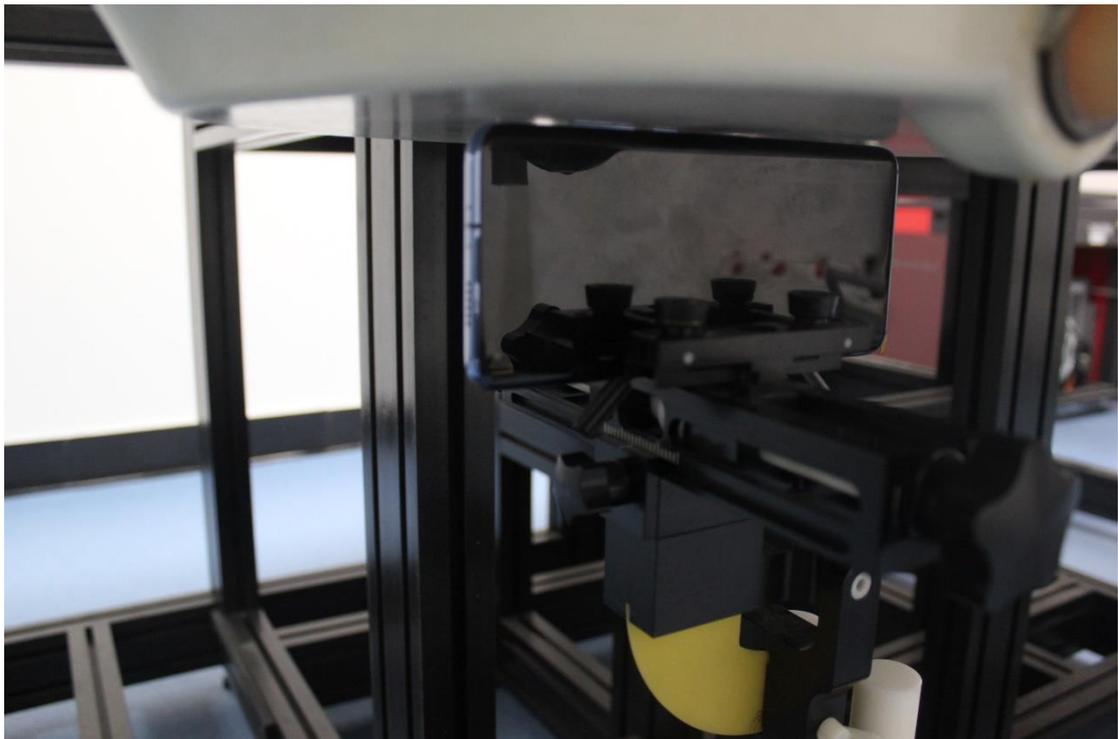

Picture 16: Right 0mm

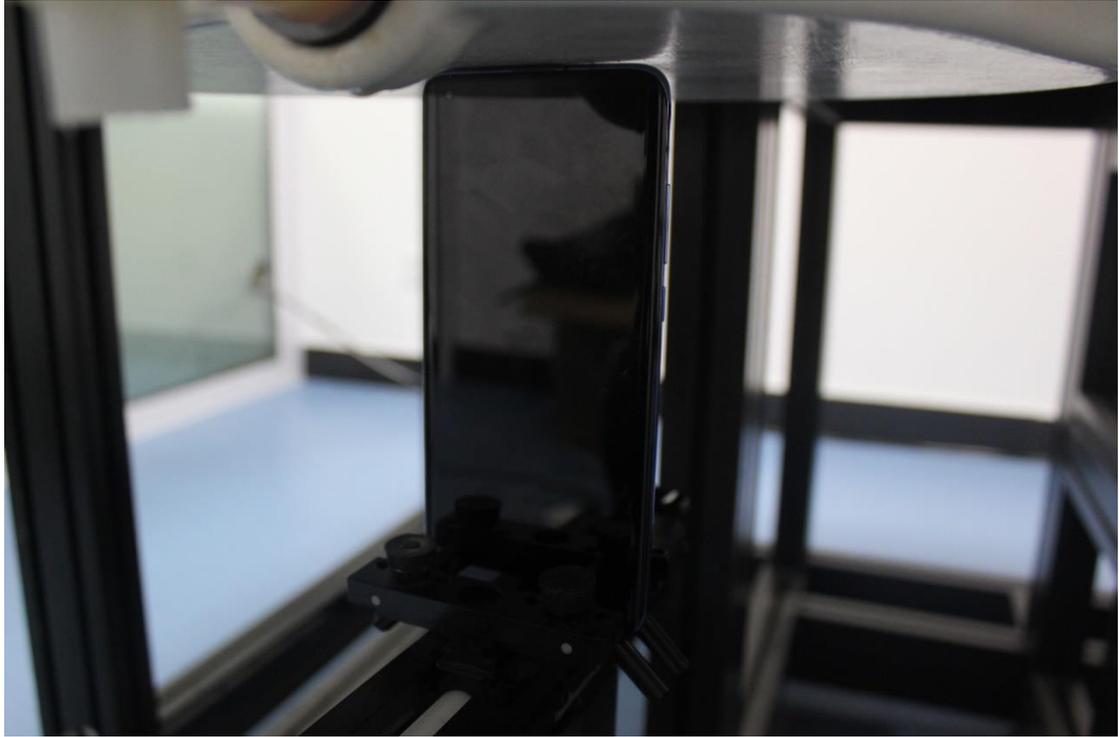

Picture 17: Top 0mm