

#01_WLAN6E_802.11ax-HE160 MCS0_Left Tilted_Ch175

Communication System: U-NII-7; Frequency: 6825.0

Medium: HSL. Medium parameters used: $f = 6825.0$ MHz; $\sigma = 6.39$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.85, 4.85, 4.85); Calibrated: 2020-02-04
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2020-11-23
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1801; Section: LeftHead
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10743-AAB
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.124 W/kg; SAR (10g) = 0.031 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -1.03 dB

SAR (1g) = 0.140 W/kg; SAR (10g) = 0.046 W/kg;

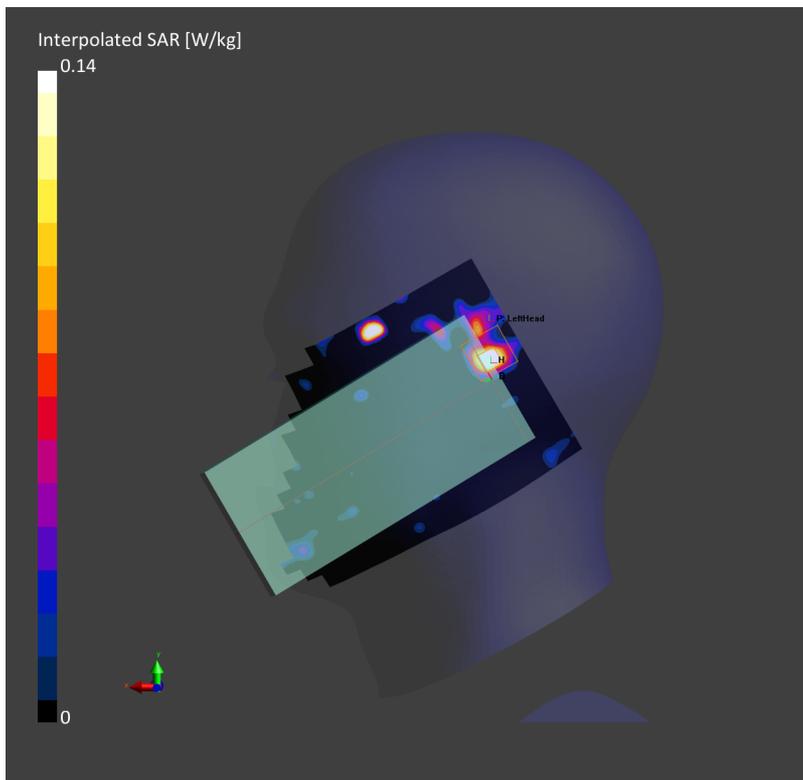

#2_WLAN6E_802.11ax-HE160 MCS0_Back_15mm_Ch175

Communication System: U-NII-7; Frequency: 6825.0

Medium: HSL. Medium parameters used: $f = 6825.0$ MHz; $\sigma = 6.39$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.85, 4.85, 4.85); Calibrated: 2020-02-04
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2020-11-23
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1801; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10743-AAB
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (102.0 mm x 102.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.040 W/kg; SAR (10g) = 0.013 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.07 dB

SAR (1g) = 0.040 W/kg; SAR (10g) = 0.012 W/kg;

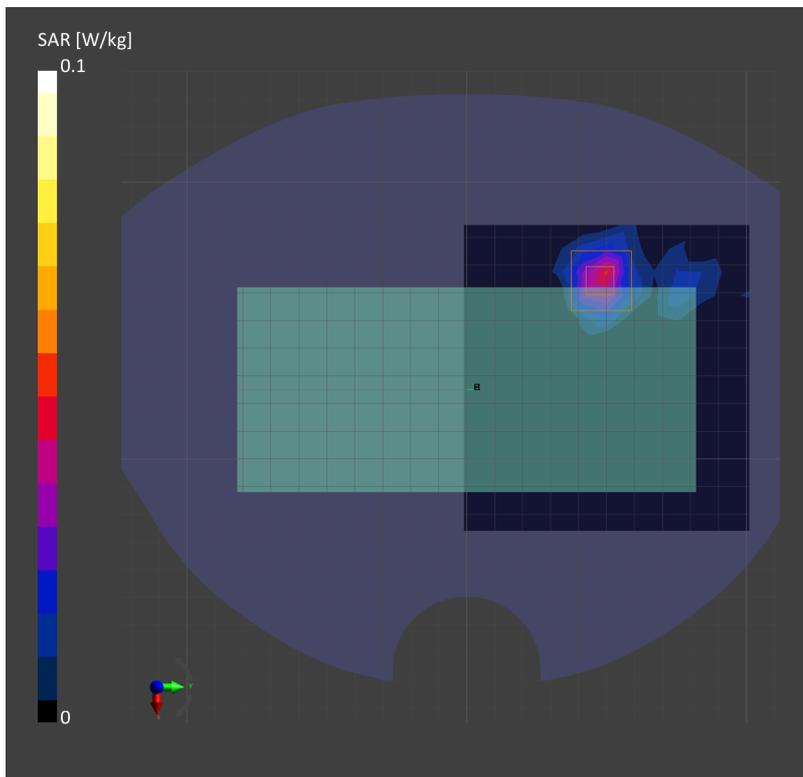

#3_WLAN6E_802.11ax-HE160 MCS0_Right Side_0mm_Ch175

Communication System: U-NII-7; Frequency: 6825.0

Medium: HSL. Medium parameters used: $f = 6825.0$ MHz; $\sigma = 6.39$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(4.85, 4.85, 4.85); Calibrated: 2020-02-04
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2020-11-23
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1801; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10743-AAB
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (51.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.681 W/kg; SAR (10g) = 0.147 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = 0.05 dB

SAR (1g) = 0.654 W/kg; SAR (10g) = 0.137 W/kg;

