



FCC RADIO TEST REPORT

FCC ID : 2AFZZK2G
Equipment : Mobile Phone
Brand Name : Xiaomi
Model Name : M2011K2G
Applicant : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road,
Haidian District, Beijing, China, 100085
Manufacturer : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road,
Haidian District, Beijing, China, 100085
Standard : FCC Part 15 Subpart E §15.407

The product was received on Nov. 10, 2020 and testing was started from Nov. 16, 2020 and completed on Dec. 10, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement.....	21
3.5 AC Conducted Emission Measurement.....	25
3.6 Automatically Discontinue Transmission	27
3.7 Antenna Requirements.....	28
4 List of Measuring Equipment.....	29
5 Uncertainty of Evaluation	31
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR0N0303G	01	Initial issue of report	Dec. 17, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	Under limit 8.95 dB at 36.790 MHz
3.5	15.207	AC Conducted Emission	Pass	Under limit 14.29 dB at 0.503 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Pass	-
3.7	15.203 15.407(a)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Lucy Wu

1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, WPC/WPT, and GNSS.

Product Specification subjective to this standard		
Sample 1	Memory (8+256GB)	
Sample 2	Memory (8+128GB)	
Antenna Type	WWAN: PIFA Antenna WLAN <2400 MHz ~ 2483.5 MHz> <Ant. 5>: PIFA Antenna <Ant. 7>: PIFA Antenna <5150 MHz ~ 5850 MHz> <Ant. 8>: PIFA Antenna <Ant. 10>: PIFA Antenna Bluetooth <Ant. 5>: PIFA Antenna <Ant. 7>: PIFA Antenna GPS / Glonass / Galileo / BDS: PIFA Antenna NFC: planar Antenna WPC/WPT: Coil antenna	
Antenna information		
5725 MHz ~ 5850 MHz	Peak Gain (dBi)	Ant. 8: -4.41 Ant. 10: -0.24

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY, CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH13-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels (X, Y, Z) and WPC Charging Mode. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80 and 802.11ax HE80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by HE20)	MCS0
802.11n HT40 (Covered by HE40)	MCS0
802.11ac VHT20 (Covered by HE20)	MCS0
802.11ac VHT40 (Covered by HE40)	MCS0
802.11ac VHT80 (Covered by HE80)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + MPEG4 + USB Cable (Charging from Adapter) for Sample 1
Remark: For Radiated Test Cases, the tests were performed with Sample 1.	

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11ax HE20	802.11ax HE40	802.11ax HE80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Mobile Phone	xlaomi	K2	M2011K2G	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup



3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth



Please refer to Appendix A.

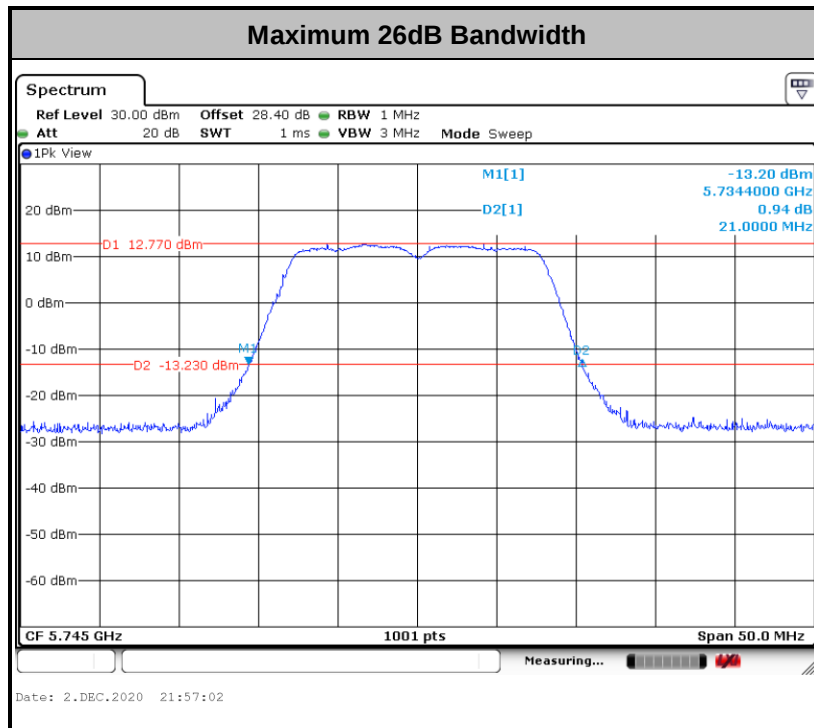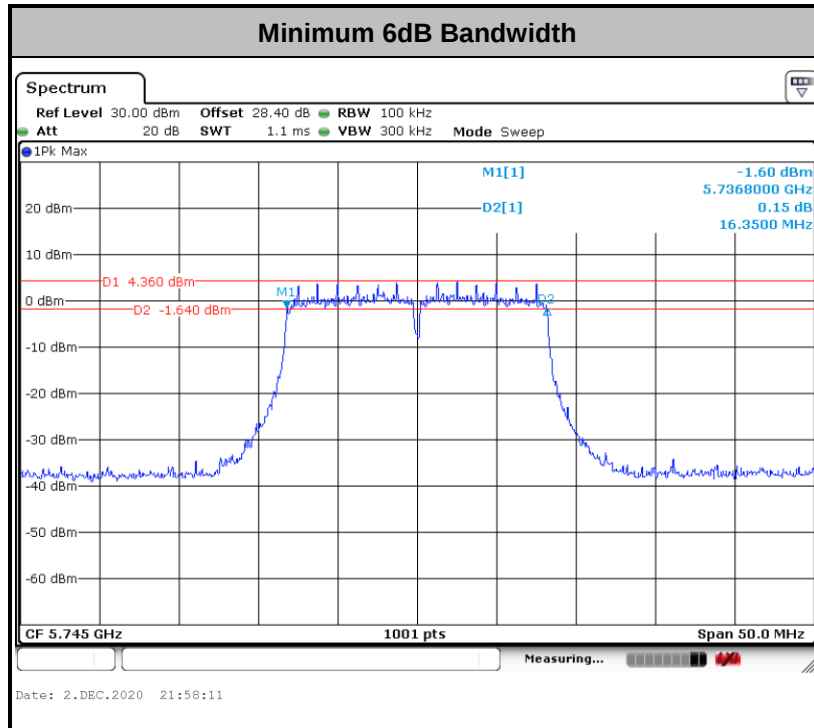


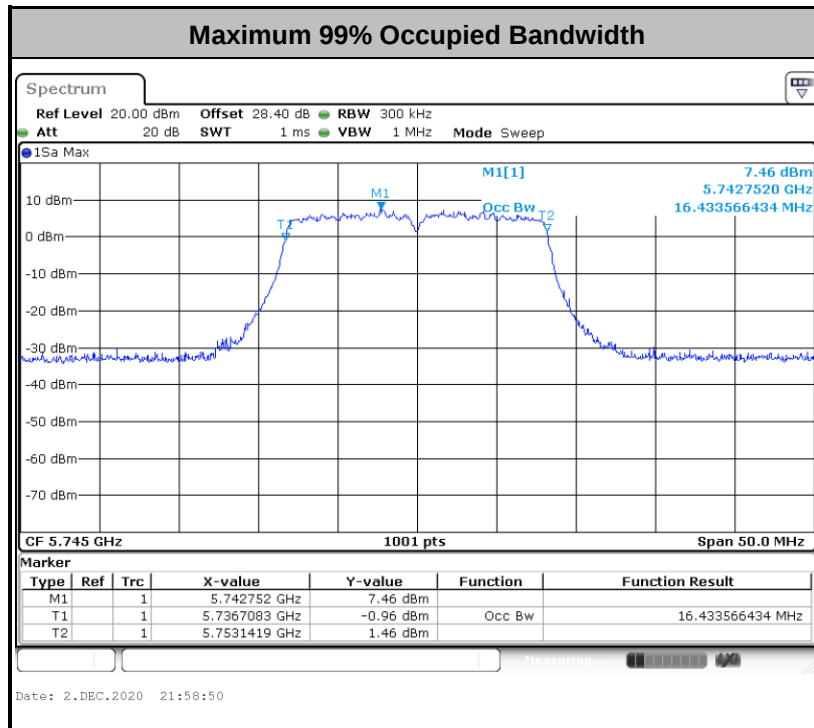

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<For 802.11ax Mode>

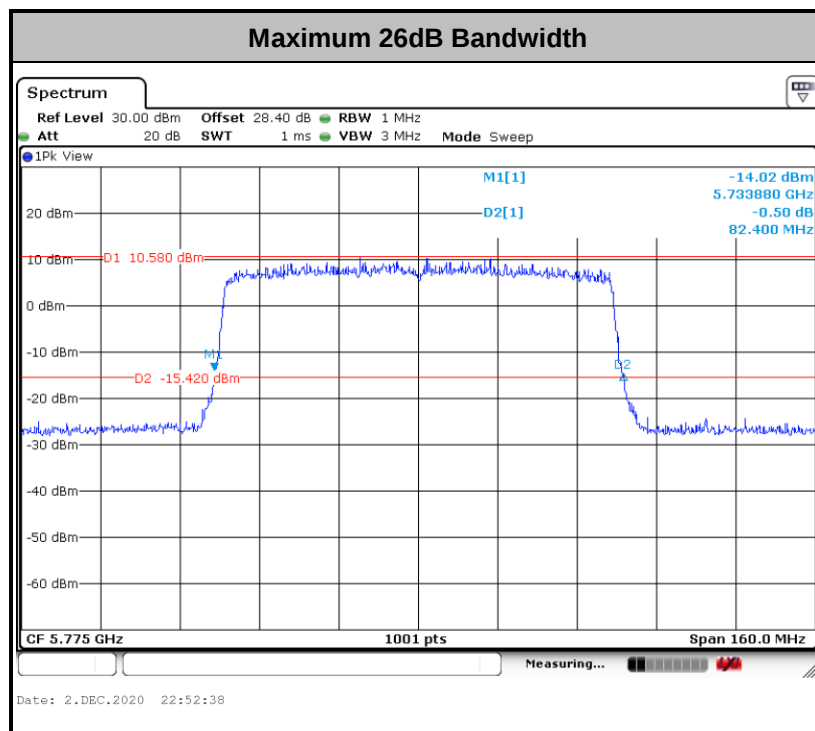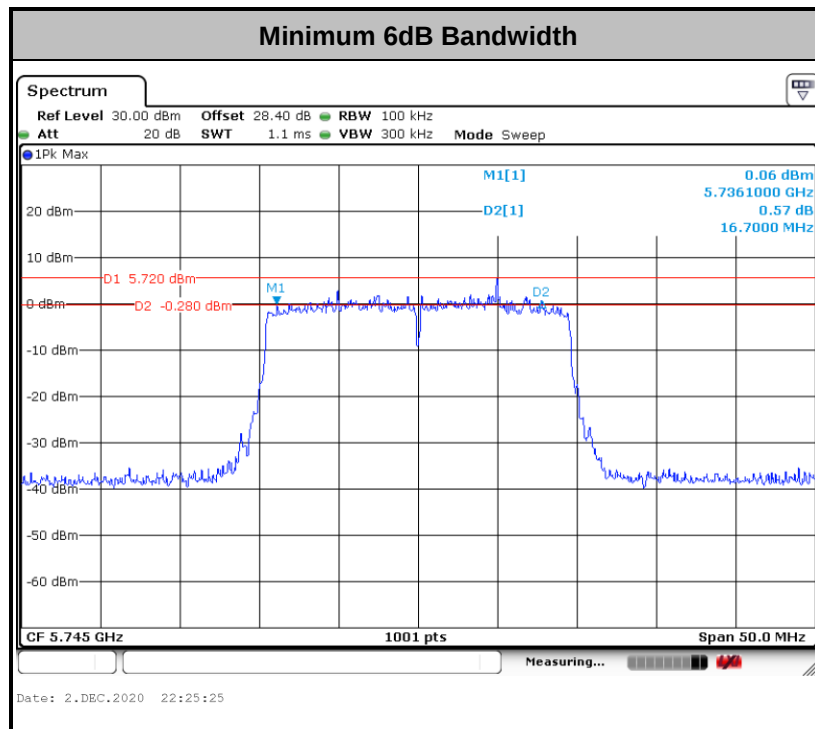

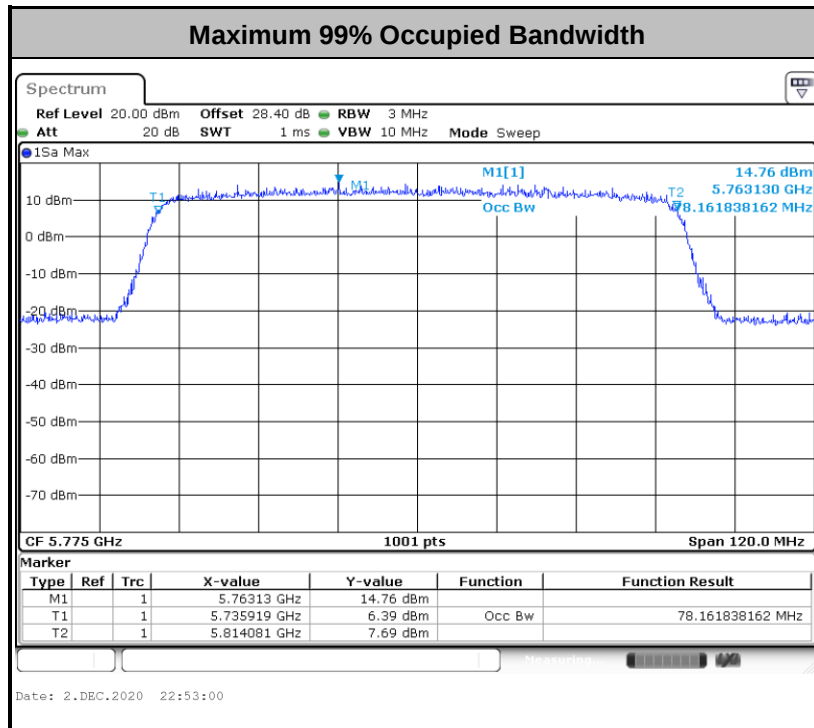

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

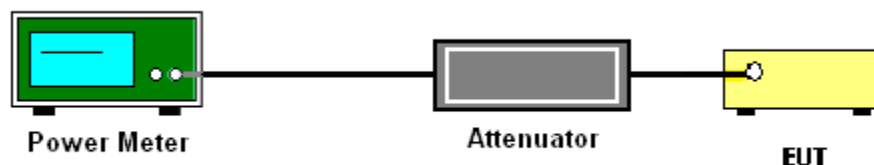

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-3

(power averaging (rms) detection with max hold):


- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time $\leq$ (number of points in sweep) $\times$ T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Detector = power averaging (rms).
- Trace mode = max hold.
- Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.


With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit.


3.3.4 Test Setup

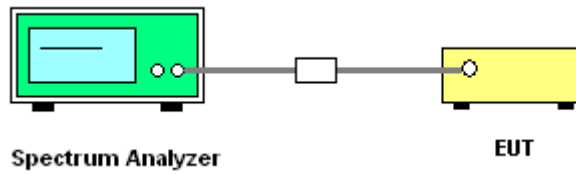

3.3.5 Test Result of Power Spectral Density



Please refer to Appendix A.

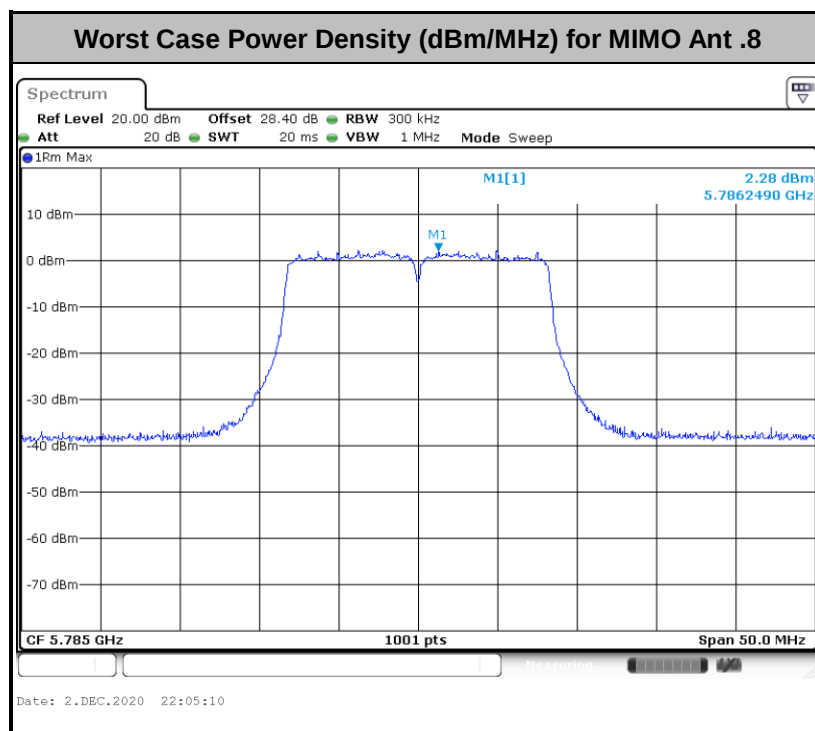

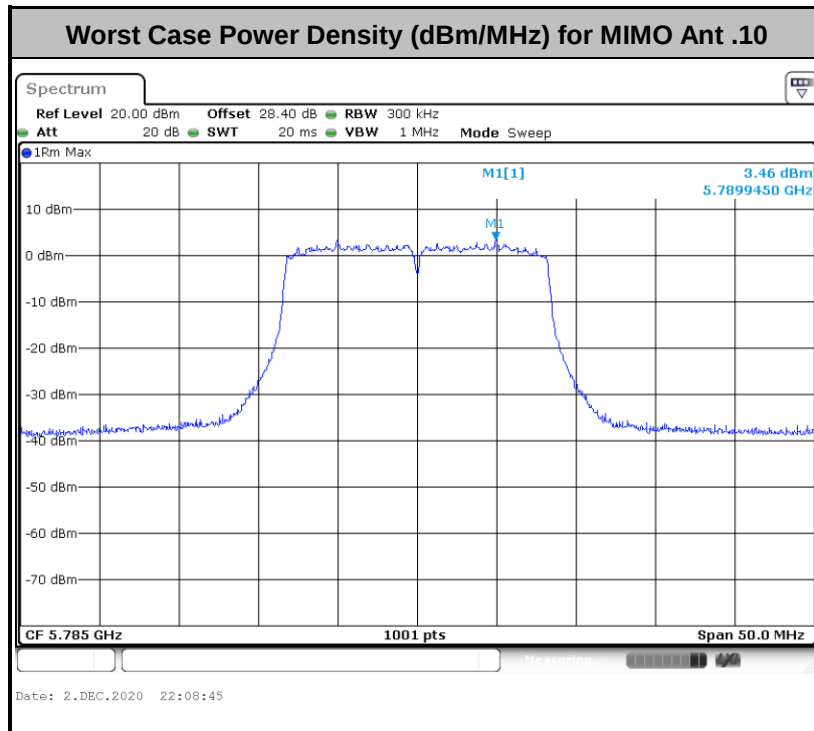



<For 802.11ax Modes>

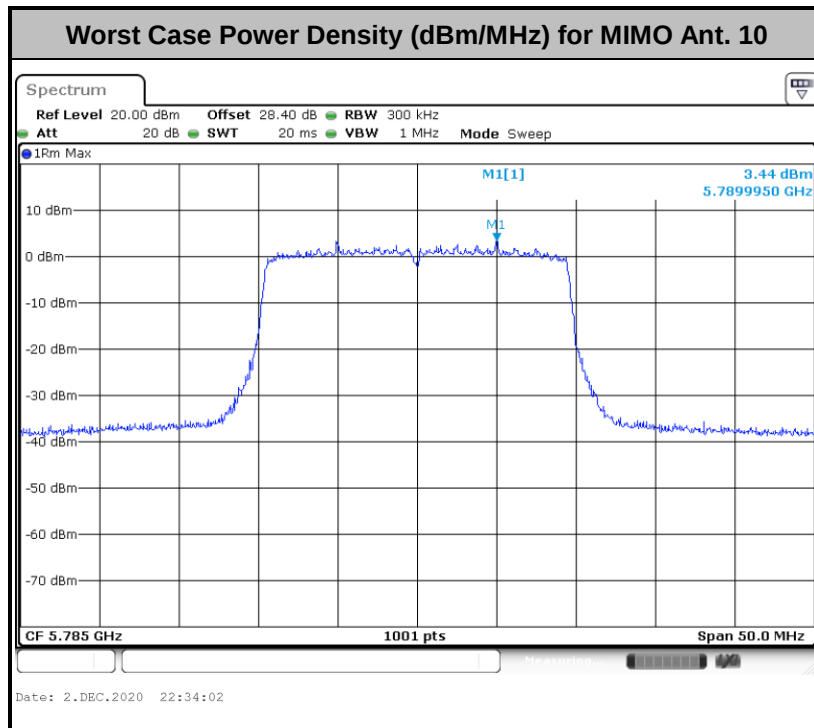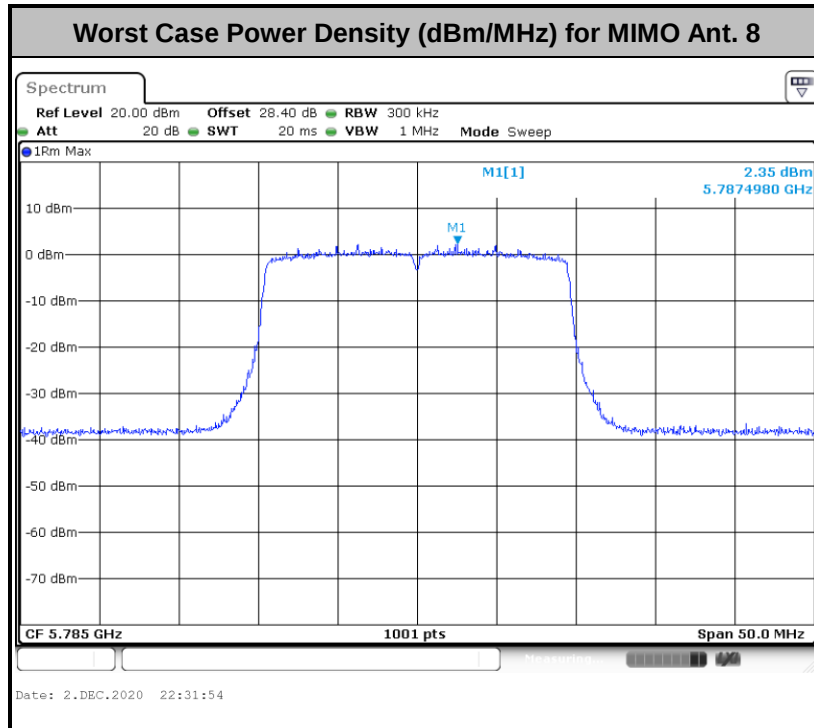

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

- (3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated test below 30MHz

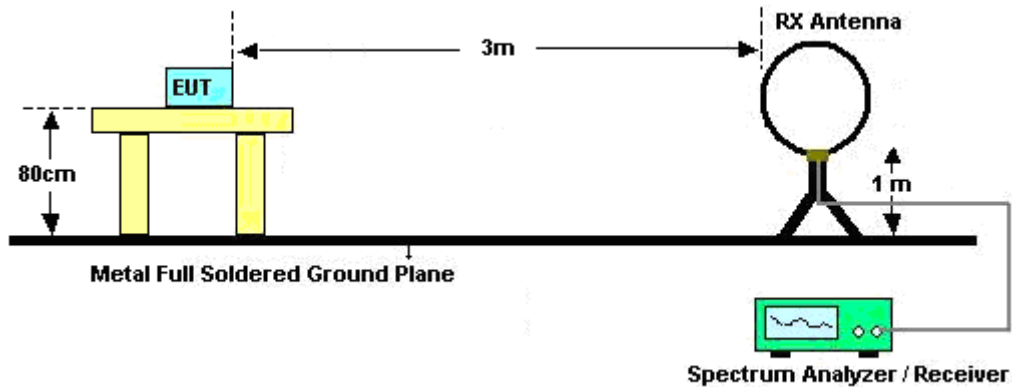

For radiated test from 30MHz to 1GHz

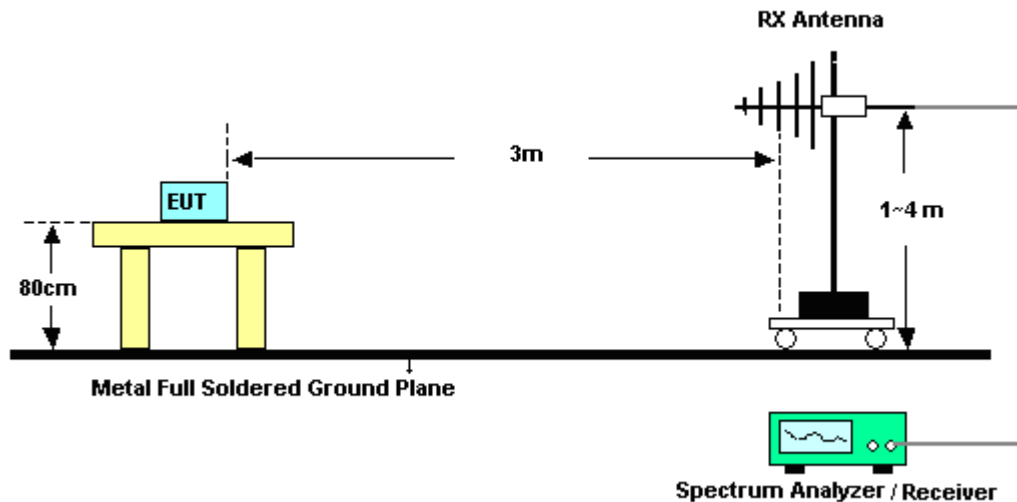

For radiated test above 1GHz

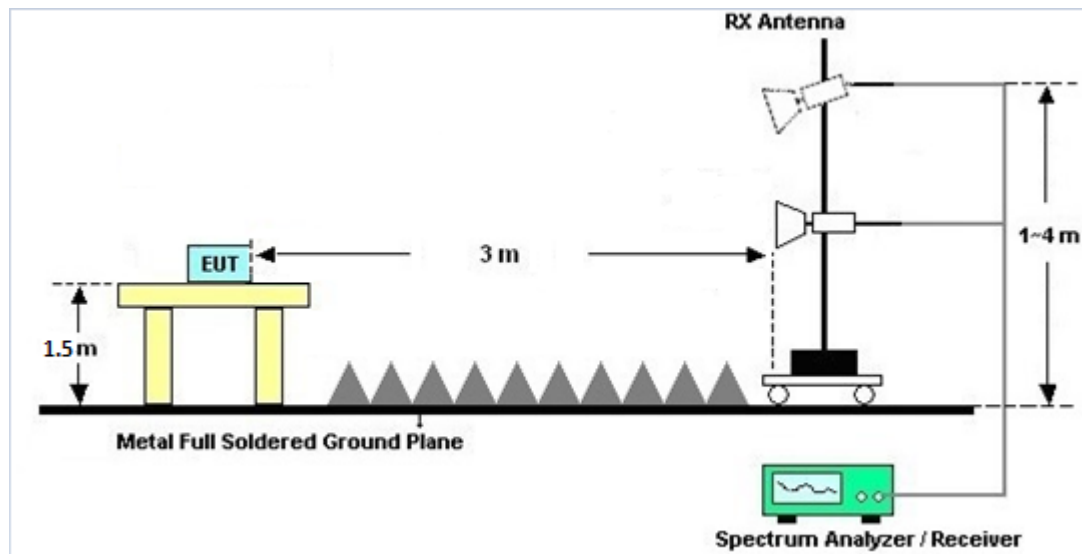

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

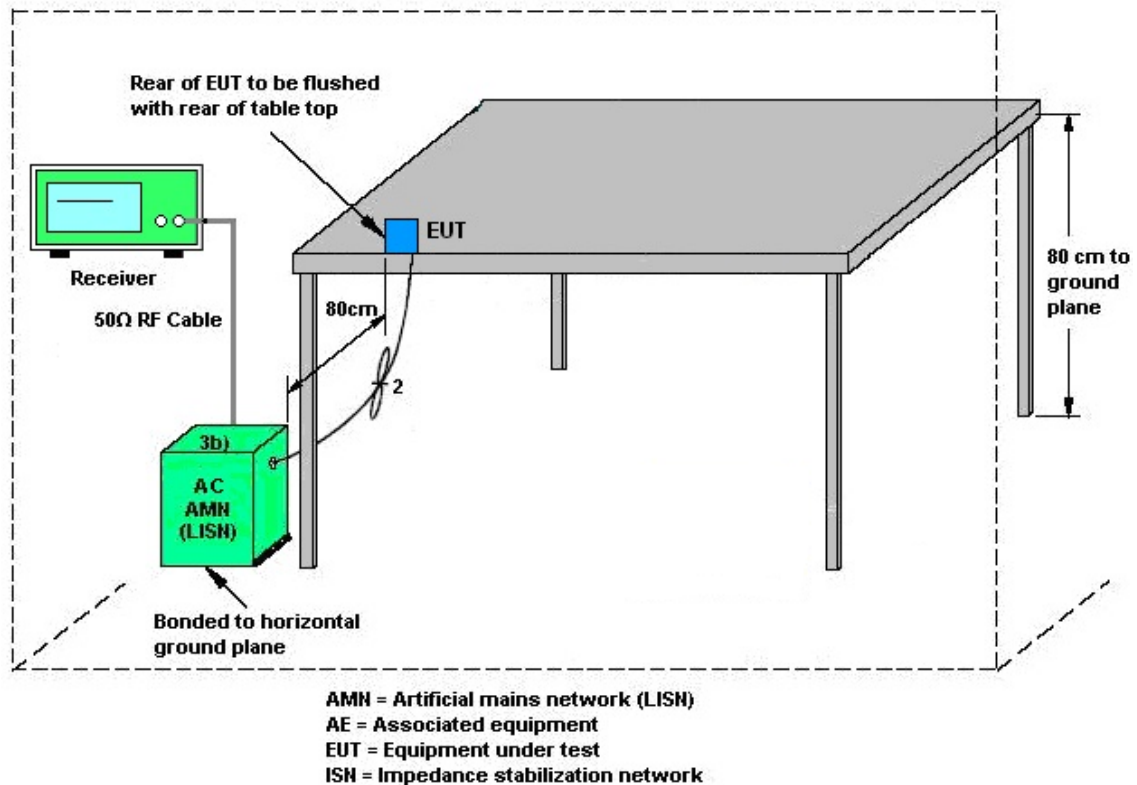

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant. 8	Ant. 10	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band IV	-4.41	-0.24	-0.24	0.93	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jul. 14, 2020	Nov. 16, 2020~ Dec. 10, 2020	Jul. 13, 2021	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-124 1	1GHz~18GHz	Jul. 15, 2020	Nov. 16, 2020~ Dec. 10, 2020	Jul. 14, 2021	Radiation (03CH13-HY)
Hygrometer	TECEP	DTM-303B	TP150115	N/A	N/A	Nov. 16, 2020~ Dec. 10, 2020	N/A	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 19, 2020	Nov. 16, 2020~ Dec. 10, 2020	May 18, 2021	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY532701 47	1GHz~26.5GHz	Oct. 28, 2020	Nov. 16, 2020~ Dec. 10, 2020	Oct. 27, 2021	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY553705 26	10Hz~44GHz	Mar. 20, 2020	Nov. 16, 2020~ Dec. 10, 2020	Mar. 19, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz~30MHz	Mar. 12, 2020	Nov. 16, 2020~ Dec. 10, 2020	Mar. 11, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 12, 2020	Nov. 16, 2020~ Dec. 10, 2020	Mar. 11, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz~40GHz	Mar. 12, 2020	Nov. 16, 2020~ Dec. 10, 2020	Mar. 11, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 12, 2020	Nov. 16, 2020~ Dec. 10, 2020	Feb. 11, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 12, 2020	Nov. 16, 2020~ Dec. 10, 2020	Feb. 11, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/ 4	30MHz~18GHz	Feb. 12, 2020	Nov. 16, 2020~ Dec. 10, 2020	Feb. 11, 2021	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 16, 2020~ Dec. 10, 2020	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Nov. 16, 2020~ Dec. 10, 2020	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Nov. 16, 2020~ Dec. 10, 2020	N/A	Radiation (03CH13-HY)
Software	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Nov. 16, 2020~ Dec. 10, 2020	N/A	Radiation (03CH13-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY532900 45	20MHz~8.4GHz	Jan. 18, 2020	Nov. 16, 2020~ Dec. 10, 2020	Jan. 17, 2021	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 576	18GHz~40GHz	May 22, 2020	Nov. 16, 2020~ Dec. 10, 2020	May 21, 2021	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	0600789	18GHz~40GHz	Jul. 31, 2020	Nov. 16, 2020~ Dec. 10, 2020	Jul. 30, 2021	Radiation (03CH13-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000 -40ST	SN5	6.75GHz High Pass Filter	Mar. 12, 2020	Nov. 16, 2020~ Dec. 10, 2020	Mar. 11, 2021	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN12	1.53GHz Low Pass Filter	Sep. 15, 2020	Nov. 16, 2020~ Dec. 10, 2020	Sep. 14, 2021	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN2	3GHz High Pass Filter	Jul. 13, 2020	Nov. 16, 2020~ Dec. 10, 2020	Jul. 12, 2021	Radiation (03CH13-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 18, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 11, 2020	Nov. 18, 2020	Sep. 10, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 20, 2019	Nov. 18, 2020	Nov. 19, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 18, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Nov. 18, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Nov. 18, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	Nov. 18, 2020	Nov. 17, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	Nov. 18, 2020~ Dec. 05, 2020	Mar. 01, 2021	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 23, 2019	Nov. 18, 2020~ Dec. 05, 2020	Dec. 22, 2020	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Nov. 18, 2020~ Dec. 05, 2020	Jul. 21, 2021	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Nov. 18, 2020~ Dec. 05, 2020	Mar. 16, 2021	Conducted (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2020/11/18~2020/12/05	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10		
11a	6Mbps	2	149	5745	16.43	16.33	21.00	20.40	16.35	16.35	0.5	Pass
11a	6Mbps	2	157	5785	16.43	16.33	20.85	20.40	16.35	16.35	0.5	Pass
11a	6Mbps	2	161	5805	16.43	16.38	21.00	20.55	16.35	16.35	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	149	5745	16.80	17.10	19.96	30.00		-0.24		Pass
11a	6Mbps	2	157	5785	16.70	17.30	20.02	30.00		-0.24		Pass
11a	6Mbps	2	161	5805	16.70	17.40	20.07	30.00		-0.24		Pass
HT20	MCS0	2	149	5745	16.80	17.10	19.96	30.00		-0.24		Pass
HT20	MCS0	2	157	5785	16.60	17.10	19.87	30.00		-0.24		Pass
HT20	MCS0	2	161	5805	16.40	17.20	19.83	30.00		-0.24		Pass
HT40	MCS0	2	151	5755	16.30	16.70	19.51	30.00		-0.24		Pass
HT40	MCS0	2	159	5795	16.00	16.60	19.32	30.00		-0.24		Pass
VHT20	MCS0	2	149	5745	16.80	17.10	19.96	30.00		-0.24		Pass
VHT20	MCS0	2	157	5785	16.60	17.10	19.87	30.00		-0.24		Pass
VHT20	MCS0	2	161	5805	16.40	17.20	19.83	30.00		-0.24		Pass
VHT40	MCS0	2	151	5755	16.30	16.70	19.51	30.00		-0.24		Pass
VHT40	MCS0	2	159	5795	16.00	16.60	19.32	30.00		-0.24		Pass
VHT80	MCS0	2	155	5775	16.30	16.80	19.57	30.00		-0.24		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV MIMO														
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
11a	6Mbps	2	149	5745	2.22		3.99	5.40	8.41	30.00		0.93		Pass
11a	6Mbps	2	157	5785	2.22		4.50	5.68	8.69	30.00		0.93		Pass
11a	6Mbps	2	161	5805	2.22		4.28	5.41	8.42	30.00		0.93		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10		
HE20	MCS0	2	149	5745	Full	18.93	18.93	22.80	22.40	18.80	16.70	0.5	Pass
HE20	MCS0	2	157	5785	Full	18.98	18.93	22.75	22.40	18.60	18.90	0.5	Pass
HE20	MCS0	2	161	5805	Full	18.98	18.93	22.65	22.85	18.70	18.55	0.5	Pass
HE40	MCS0	2	151	5755	Full	37.96	37.96	41.49	41.67	37.89	36.18	0.5	Pass
HE40	MCS0	2	159	5795	Full	38.06	37.96	41.58	41.49	37.80	37.62	0.5	Pass
HE80	MCS0	2	155	5775	Full	78.04	78.16	82.24	82.40	76.80	77.60	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
HE20	MCS0	2	149	5745	Full	16.80	17.30	20.07	30.00		-0.24		Pass
HE20	MCS0	2	149	5745	26/0	7.90	8.70	11.33	30.00		-0.24		Pass
HE20	MCS0	2	149	5745	52/37	11.00	11.70	14.37	30.00		-0.24		Pass
HE20	MCS0	2	149	5745	106/53	13.70	14.60	17.18	30.00		-0.24		Pass
HE20	MCS0	2	157	5785	Full	16.70	17.20	19.97	30.00		-0.24		Pass
HE20	MCS0	2	161	5805	Full	16.50	17.30	19.93	30.00		-0.24		Pass
HE20	MCS0	2	161	5805	26/8	8.30	9.30	11.84	30.00		-0.24		Pass
HE20	MCS0	2	161	5805	52/40	11.00	11.40	14.21	30.00		-0.24		Pass
HE20	MCS0	2	161	5805	106/54	13.70	14.30	17.02	30.00		-0.24		Pass
HE40	MCS0	2	151	5755	Full	16.40	16.80	19.61	30.00		-0.24		Pass
HE40	MCS0	2	151	5755	242/61	14.70	15.40	18.07	30.00		-0.24		Pass
HE40	MCS0	2	159	5795	Full	16.10	16.70	19.42	30.00		-0.24		Pass
HE40	MCS0	2	159	5795	242/62	14.40	15.20	17.83	30.00		-0.24		Pass
HE80	MCS0	2	155	5775	Full	16.40	16.90	19.67	30.00		-0.24		Pass
HE80	MCS0	2	155	5775	484/65	12.00	12.60	15.32	30.00		-0.24		Pass
HE80	MCS0	2	155	5775	484/66	11.80	12.30	15.07	30.00		-0.24		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV MIMO															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	Ant 8	Ant 10	
HE20	MCS0	2	149	5745	Full	2.22		4.59	5.09	8.10	30.00		0.93		Pass
HE20	MCS0	2	149	5745	26/0	2.22		4.16	4.66	7.67	30.00		0.93		Pass
HE20	MCS0	2	149	5745	52/37	2.22		4.04	5.07	8.08	30.00		0.93		Pass
HE20	MCS0	2	149	5745	106/53	2.22		3.99	4.75	7.76	30.00		0.93		Pass
HE20	MCS0	2	157	5785	Full	2.22		4.57	5.66	8.67	30.00		0.93		Pass
HE20	MCS0	2	161	5805	Full	2.22		4.59	5.30	8.31	30.00		0.93		Pass
HE20	MCS0	2	161	5805	26/8	2.22		4.24	5.18	8.19	30.00		0.93		Pass
HE20	MCS0	2	161	5805	52/40	2.22		4.19	5.00	8.01	30.00		0.93		Pass
HE20	MCS0	2	161	5805	106/54	2.22		3.85	4.83	7.84	30.00		0.93		Pass
HE40	MCS0	2	151	5755	Full	2.22		1.37	1.75	4.76	30.00		0.93		Pass
HE40	MCS0	2	151	5755	242/61	2.22		1.13	1.68	4.69	30.00		0.93		Pass
HE40	MCS0	2	159	5795	Full	2.22		1.13	1.88	4.89	30.00		0.93		Pass
HE40	MCS0	2	159	5795	242/62	2.22		1.04	1.87	4.88	30.00		0.93		Pass
HE80	MCS0	2	155	5775	Full	2.22		-1.37	-0.34	2.67	30.00		0.93		Pass
HE80	MCS0	2	155	5775	484/65	2.22		-1.68	-0.47	2.54	30.00		0.93		Pass
HE80	MCS0	2	155	5775	484/66	2.22		-1.47	-0.59	2.42	30.00		0.93		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26℃
		Relative Humidity :	40~50%

EUT Information

Report NO : 0N0303
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

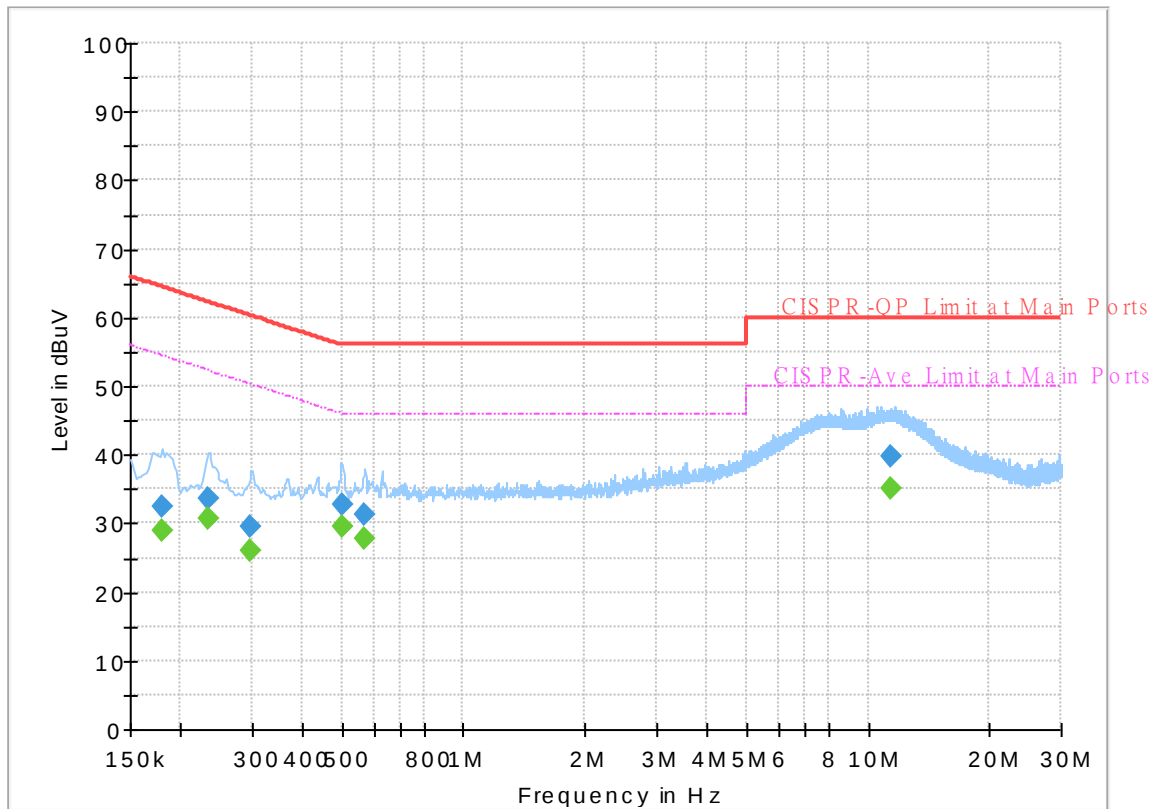


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.180510	---	28.96	54.46	25.50	L1	OFF	19.4
0.180510	32.41	---	64.46	32.05	L1	OFF	19.4
0.234690	---	30.70	52.28	21.58	L1	OFF	19.4
0.234690	33.71	---	62.28	28.57	L1	OFF	19.4
0.298500	---	26.10	50.28	24.18	L1	OFF	19.4
0.298500	29.47	---	60.28	30.81	L1	OFF	19.4
0.499920	---	29.60	46.00	16.40	L1	OFF	19.4
0.499920	32.65	---	56.00	23.35	L1	OFF	19.4
0.569490	---	27.89	46.00	18.11	L1	OFF	19.5
0.569490	31.20	---	56.00	24.80	L1	OFF	19.5
11.402250	---	35.10	50.00	14.90	L1	OFF	20.0
11.402250	39.70	---	60.00	20.30	L1	OFF	20.0

EUT Information

Report NO : 0N0303
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

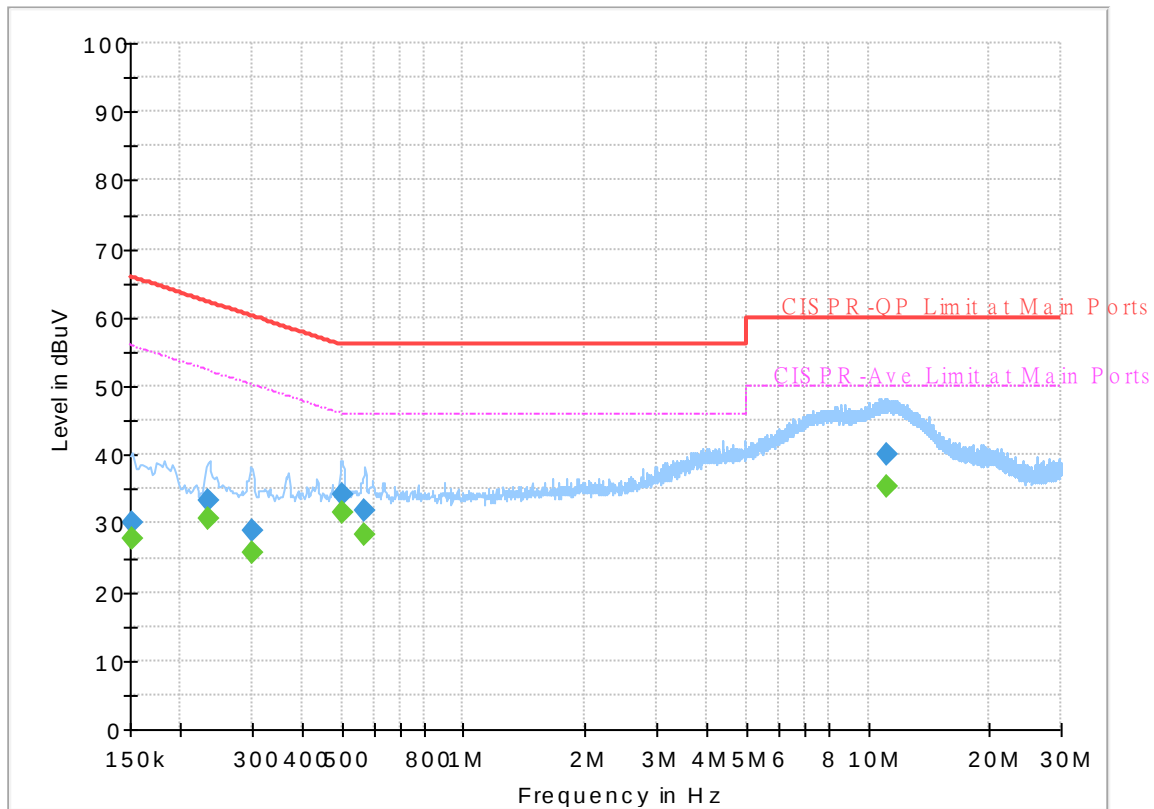

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.151485	---	27.88	55.92	28.04	N	OFF	19.5
0.151485	30.26	---	65.92	35.66	N	OFF	19.5
0.233430	---	30.76	52.33	21.57	N	OFF	19.5
0.233430	33.38	---	62.33	28.95	N	OFF	19.5
0.301110	---	25.74	50.21	24.47	N	OFF	19.5
0.301110	28.95	---	60.21	31.26	N	OFF	19.5
0.502620	---	31.71	46.00	14.29	N	OFF	19.5
0.502620	34.35	---	56.00	21.65	N	OFF	19.5
0.569130	---	28.23	46.00	17.77	N	OFF	19.5
0.569130	31.78	---	56.00	24.22	N	OFF	19.5
11.151690	---	35.32	50.00	14.68	N	OFF	20.1
11.151690	39.96	---	60.00	20.04	N	OFF	20.1



Appendix C. Radiated Spurious Emission

Test Engineer :	Daniel Lee, Jacky Hong and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~60%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
8+10		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5613.6	51.23	-16.97	68.2	40.44	31.87	6.32	27.4	247	333	P	H
		5670	51.05	-31.99	83.04	40.23	31.88	6.38	27.44	247	333	P	H
		5719.2	51.55	-59.03	110.58	40.55	32.04	6.44	27.48	247	333	P	H
		5721.4	50.43	-63.56	113.99	39.42	32.04	6.45	27.48	247	333	P	H
	*	5745	102.59	-	-	91.53	32.09	6.47	27.5	247	333	P	H
	*	5745	94.35	-	-	83.29	32.09	6.47	27.5	247	333	A	H
													H
													H
		5637.6	50.93	-17.27	68.2	40.18	31.82	6.35	27.42	242	13	P	V
		5683.8	51.04	-42.21	93.25	40.15	31.94	6.4	27.45	242	13	P	V
		5716.8	51.37	-58.54	109.91	40.38	32.03	6.44	27.48	242	13	P	V
		5722.4	52.83	-63.44	116.27	41.82	32.04	6.45	27.48	242	13	P	V
	*	5745	106.58	-	-	95.52	32.09	6.47	27.5	242	13	P	V
	*	5745	98.96	-	-	87.9	32.09	6.47	27.5	242	13	A	V
													V
													V



WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5609.4	51.31	-16.89	68.2	40.52	31.88	6.31	27.4	241	334	P	H
		5668	51.74	-29.82	81.56	40.93	31.87	6.38	27.44	241	334	P	H
		5708.6	50.78	-56.83	107.61	39.8	32.02	6.43	27.47	241	334	P	H
		5723.4	49.79	-68.76	118.55	38.77	32.05	6.45	27.48	241	334	P	H
	*	5785	102.21	-	-	91.12	32.1	6.52	27.53	241	334	P	H
	*	5785	94.43	-	-	83.34	32.1	6.52	27.53	241	334	A	H
		5839.6	50.96	-83.24	134.2	39.72	32.26	6.54	27.56	241	334	P	H
		5850.8	50.96	-69.42	120.38	39.69	32.3	6.54	27.57	241	334	P	H
		5891.2	51.64	-41.54	93.18	40.24	32.46	6.54	27.6	241	334	P	H
		5926.4	52.31	-15.89	68.2	40.79	32.61	6.54	27.63	241	334	P	H
													H
													H
		5616	52.67	-15.53	68.2	41.88	31.87	6.32	27.4	255	16	P	V
		5662.6	51.03	-26.52	77.55	40.24	31.85	6.38	27.44	255	16	P	V
		5716.8	51.69	-58.22	109.91	40.7	32.03	6.44	27.48	255	16	P	V
		5723.4	50.56	-67.99	118.55	39.54	32.05	6.45	27.48	255	16	P	V
	*	5785	107.36	-	-	96.27	32.1	6.52	27.53	255	16	P	V
	*	5785	99.59	-	-	88.5	32.1	6.52	27.53	255	16	A	V
		5850.2	50.73	-71.01	121.74	39.46	32.3	6.54	27.57	255	16	P	V
		5871.2	51.75	-54.51	106.26	40.42	32.38	6.54	27.59	255	16	P	V
		5878.2	51.37	-51.45	102.82	40.01	32.41	6.54	27.59	255	16	P	V
		5948.4	51.02	-17.18	68.2	39.43	32.69	6.54	27.64	255	16	P	V
													V
													V



WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 161 5805MHz	*	5805	102.44	-	-	91.32	32.12	6.54	27.54	233	301	P	H
	*	5805	94.16	-	-	83.04	32.12	6.54	27.54	233	301	A	H
		5850.6	50.28	-70.55	120.83	39.01	32.3	6.54	27.57	233	301	P	H
		5861	50.79	-58.33	109.12	39.49	32.34	6.54	27.58	233	301	P	H
		5919	52.06	-20.56	72.62	40.56	32.58	6.54	27.62	233	301	P	H
		5928.8	52.36	-15.84	68.2	40.83	32.62	6.54	27.63	233	301	P	H
													H
													H
	*	5805	107.24	-	-	96.12	32.12	6.54	27.54	244	355	P	V
	*	5805	99.61	-	-	88.49	32.12	6.54	27.54	244	355	A	V
		5850.4	49.85	-71.44	121.29	38.58	32.3	6.54	27.57	244	355	P	V
		5868.4	52.59	-54.46	107.05	41.27	32.37	6.54	27.59	244	355	P	V
		5907.4	51.2	-29.99	81.19	39.74	32.53	6.54	27.61	244	355	P	V
		5928.2	51	-17.2	68.2	39.48	32.61	6.54	27.63	244	355	P	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	46.83	-27.17	74	52.13	40.07	10.43	55.8	100	0	P	H
		17235	48.64	-19.56	68.2	51.85	40.01	13.09	56.31	100	0	P	H
													H
													H
		11490	47.68	-26.32	74	52.98	40.07	10.43	55.8	100	0	P	V
		17235	47.81	-20.39	68.2	51.02	40.01	13.09	56.31	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	47.69	-26.31	74	53.15	39.89	10.48	55.83	100	0	P	H
		17355	47.99	-20.21	68.2	50.9	40.48	13.16	56.55	100	0	P	H
													H
													H
		11570	47.13	-26.87	74	52.59	39.89	10.48	55.83	100	0	P	V
		17355	48.49	-19.71	68.2	51.4	40.48	13.16	56.55	100	0	P	V
													V
													V
802.11a CH 161 5805MHz		11610	47.06	-26.94	74	52.66	39.75	10	55.86	100	0	P	H
		17415	49.14	-19.06	68.2	51.88	40.74	12.57	56.68	100	0	P	H
													H
													H
		11610	48.3	-25.7	74	53.9	39.75	10	55.86	100	0	P	V
		17415	49.83	-18.37	68.2	52.57	40.74	12.57	56.68	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 - 5725~5850MHz

WIFI 802.11ax HE20_Full (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
8+10		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full CH 149 5745MHz		5624.2	51.42	-16.78	68.2	40.65	31.85	6.33	27.41	252	332	P	H
		5655.4	50.81	-21.4	72.21	40.05	31.82	6.37	27.43	252	332	P	H
		5716.2	51.54	-58.2	109.74	40.55	32.03	6.44	27.48	252	332	P	H
		5724.2	51.75	-68.63	120.38	40.73	32.05	6.45	27.48	252	332	P	H
	*	5745	101.28	-	-	90.22	32.09	6.47	27.5	252	332	P	H
	*	5745	92.2	-	-	81.14	32.09	6.47	27.5	252	332	A	H
													H
													H
		5623.2	51.69	-16.51	68.2	40.92	31.85	6.33	27.41	253	3	P	V
		5670	51.06	-31.98	83.04	40.24	31.88	6.38	27.44	253	3	P	V
		5716.8	51.04	-58.87	109.91	40.05	32.03	6.44	27.48	253	3	P	V
		5724.4	52.75	-68.08	120.83	41.73	32.05	6.45	27.48	253	3	P	V
	*	5745	105.31	-	-	94.25	32.09	6.47	27.5	253	3	P	V
	*	5745	96.97	-	-	85.91	32.09	6.47	27.5	253	3	A	V
													V
													V



WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 157 5785MHz		5609.4	51.5	-16.7	68.2	40.71	31.88	6.31	27.4	258	333	P	H
		5677.6	50.71	-37.95	88.66	39.86	31.91	6.39	27.45	258	333	P	H
		5717.2	50.8	-59.22	110.02	39.81	32.03	6.44	27.48	258	333	P	H
		5721.2	49.9	-63.64	113.54	38.89	32.04	6.45	27.48	258	333	P	H
	*	5785	100.76	-	-	89.67	32.1	6.52	27.53	258	333	P	H
	*	5785	91.81	-	-	80.72	32.1	6.52	27.53	258	333	A	H
		5851	50.62	-69.3	119.92	39.35	32.3	6.54	27.57	258	333	P	H
		5867.8	52.63	-54.58	107.21	41.3	32.37	6.54	27.58	258	333	P	H
		5885	51.11	-46.66	97.77	39.73	32.44	6.54	27.6	258	333	P	H
		5929.6	50.19	-18.01	68.2	38.66	32.62	6.54	27.63	258	333	P	H
													H
													H
		5622.6	50.92	-17.28	68.2	40.15	31.85	6.33	27.41	225	13	P	V
		5692.6	51.33	-48.41	99.74	40.41	31.97	6.41	27.46	225	13	P	V
		5717.2	51.36	-58.66	110.02	40.37	32.03	6.44	27.48	225	13	P	V
		5722	51.96	-63.4	115.36	40.95	32.04	6.45	27.48	225	13	P	V
	*	5785	106.33	-	-	95.24	32.1	6.52	27.53	225	13	P	V
	*	5785	96.27	-	-	85.18	32.1	6.52	27.53	225	13	A	V
		5832.2	51.9	-82.3	134.2	40.69	32.23	6.54	27.56	225	13	P	V
		5850.4	51.21	-70.08	121.29	39.94	32.3	6.54	27.57	225	13	P	V
		5870.2	51.93	-54.61	106.54	40.6	32.38	6.54	27.59	225	13	P	V
		5931.6	50.71	-17.49	68.2	39.17	32.63	6.54	27.63	225	13	P	V
													V
													V



WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 161 5805MHz	*	5805	102.65	-	-	91.53	32.12	6.54	27.54	251	304	P	H
	*	5805	92	-	-	80.88	32.12	6.54	27.54	251	304	A	H
		5853	52.24	-63.12	115.36	40.96	32.31	6.54	27.57	251	304	P	H
		5869.4	50.87	-55.9	106.77	39.54	32.38	6.54	27.59	251	304	P	H
		5897.4	50.96	-37.63	88.59	39.54	32.49	6.54	27.61	251	304	P	H
		5948.6	50.13	-18.07	68.2	38.54	32.69	6.54	27.64	251	304	P	H
													H
													H
	*	5805	107.5	-	-	96.38	32.12	6.54	27.54	251	347	P	V
	*	5805	97.09	-	-	85.97	32.12	6.54	27.54	251	347	A	V
		5854.8	51.81	-59.45	111.26	40.53	32.32	6.54	27.58	251	347	P	V
		5866.6	51.8	-55.75	107.55	40.47	32.37	6.54	27.58	251	347	P	V
		5901.4	51.21	-34.41	85.62	39.77	32.51	6.54	27.61	251	347	P	V
		5931.2	51.5	-16.7	68.2	39.97	32.62	6.54	27.63	251	347	P	V
													V
													V
													V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE20_Full (Harmonic @ 3m)

WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 149 5745MHz		11490	47.91	-26.09	74	53.21	40.07	9.92	55.8	100	0	P	H
		17235	48.19	-20.01	68.2	51.4	40.01	12.45	56.31	100	0	P	H
													H
													H
		11490	48.23	-25.77	74	53.53	40.07	9.92	55.8	100	0	P	V
		17235	48.35	-19.85	68.2	51.56	40.01	12.45	56.31	100	0	P	V
													V
													V
802.11ax HE20 Full CH 157 5785MHz		11570	47.9	-26.1	74	53.36	39.89	9.97	55.83	100	0	P	H
		17355	48.41	-19.79	68.2	51.32	40.48	12.53	56.55	100	0	P	H
													H
													H
		11570	48.75	-25.25	74	54.21	39.89	9.97	55.83	100	0	P	V
		17355	50.13	-18.07	68.2	53.04	40.48	12.53	56.55	100	0	P	V
													V
													V
802.11ax HE20 Full CH 161 5805MHz		11610	47.49	-26.51	74	53.09	39.75	10	55.86	100	0	P	H
		17415	49.01	-19.19	68.2	51.75	40.74	12.57	56.68	100	0	P	H
													H
													H
		11610	49.46	-24.54	74	55.06	39.75	10	55.86	100	0	P	V
		17415	49.43	-18.77	68.2	52.17	40.74	12.57	56.68	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE20_Partial 26 (Band Edge @ 3m)

WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 26/0 CH 149 5745MHz		5624.8	52.49	-15.71	68.2	41.72	31.85	6.33	27.41	249	332	P	H
		5687.4	51.91	-44	95.91	41.01	31.95	6.4	27.45	249	332	P	H
		5708.8	51.75	-55.92	107.67	40.77	32.02	6.43	27.47	249	332	P	H
		5723.8	51.06	-68.4	119.46	40.04	32.05	6.45	27.48	249	332	P	H
	*	5745	110.86	-	-	99.8	32.09	6.47	27.5	249	332	P	H
	*	5745	102.99	-	-	91.93	32.09	6.47	27.5	249	332	A	H
													H
													H
		5635.8	50.74	-17.46	68.2	39.99	31.83	6.34	27.42	249	355	P	V
		5688.8	50.82	-46.12	96.94	39.91	31.96	6.41	27.46	249	355	P	V
		5702	51.64	-54.12	105.76	40.69	32	6.42	27.47	249	355	P	V
		5722.2	51.64	-64.18	115.82	40.63	32.04	6.45	27.48	249	355	P	V
	*	5745	116.39	-	-	105.33	32.09	6.47	27.5	249	355	P	V
	*	5745	107.08	-	-	96.02	32.09	6.47	27.5	249	355	A	V
													V
													V



WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 26/8 CH 161 5805MHz	*	5805	111.14	-	-	100.02	32.12	6.54	27.54	258	296	P	H
	*	5805	102.56	-	-	91.44	32.12	6.54	27.54	258	296	A	H
		5853.4	52.74	-61.71	114.45	41.46	32.31	6.54	27.57	258	296	P	H
		5868.6	51.83	-55.16	106.99	40.51	32.37	6.54	27.59	258	296	P	H
		5908.2	52.16	-28.44	80.6	40.7	32.53	6.54	27.61	258	296	P	H
		5944.6	51.56	-16.64	68.2	39.98	32.68	6.54	27.64	258	296	P	H
													H
													H
	*	5805	116.89	-	-	105.77	32.12	6.54	27.54	253	24	P	V
	*	5805	108	-	-	96.88	32.12	6.54	27.54	253	24	A	V
		5852.4	51.19	-65.54	116.73	39.91	32.31	6.54	27.57	253	24	P	V
		5869	52.53	-54.35	106.88	41.2	32.38	6.54	27.59	253	24	P	V
		5892.2	52.5	-39.94	92.44	41.09	32.47	6.54	27.6	253	24	P	V
		5935.8	51.54	-16.66	68.2	39.99	32.64	6.54	27.63	253	24	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE40_Full (Band Edge @ 3m)

WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 151 5755MHz		5637.8	51.67	-16.53	68.2	40.92	31.82	6.35	27.42	226	332	P	H
		5696.8	51.07	-51.77	102.84	40.12	31.99	6.42	27.46	226	332	P	H
		5718.6	51.07	-59.34	110.41	40.07	32.04	6.44	27.48	226	332	P	H
		5722.4	51.61	-64.66	116.27	40.6	32.04	6.45	27.48	226	332	P	H
	*	5755	98.34	-	-	87.25	32.1	6.49	27.5	226	332	P	H
	*	5755	88.72	-	-	77.63	32.1	6.49	27.5	226	332	A	H
		5854.4	50.15	-62.02	112.17	38.87	32.32	6.54	27.58	226	332	P	H
		5864.4	50.6	-57.57	108.17	39.28	32.36	6.54	27.58	226	332	P	H
		5910.2	50.9	-28.22	79.12	39.44	32.54	6.54	27.62	226	332	P	H
		5945.6	51.01	-17.19	68.2	39.43	32.68	6.54	27.64	226	332	P	H
													H
													H
		5614.4	51.51	-16.69	68.2	40.72	31.87	6.32	27.4	200	0	P	V
		5667.2	51.83	-29.13	80.96	41.02	31.87	6.38	27.44	200	0	P	V
		5720	53.24	-57.56	110.8	42.24	32.04	6.44	27.48	200	0	P	V
		5720	53.24	-57.56	110.8	42.24	32.04	6.44	27.48	200	0	P	V
	*	5755	103.48	-	-	92.39	32.1	6.49	27.5	200	0	P	V
	*	5755	92.58	-	-	81.49	32.1	6.49	27.5	200	0	A	V
		5852.8	50.87	-64.95	115.82	39.59	32.31	6.54	27.57	200	0	P	V
		5867	50.98	-56.46	107.44	39.65	32.37	6.54	27.58	200	0	P	V
		5885.8	51.77	-45.41	97.18	40.39	32.44	6.54	27.6	200	0	P	V
		5947.6	52.22	-15.98	68.2	40.63	32.69	6.54	27.64	200	0	P	V
													V
													V



WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 159 5795MHz		5642	50.44	-17.76	68.2	39.69	31.82	6.35	27.42	264	305	P	H
		5684.6	50.56	-43.28	93.84	39.67	31.94	6.4	27.45	264	305	P	H
		5709.6	49.99	-57.9	107.89	39.01	32.02	6.43	27.47	264	305	P	H
		5722.2	49.05	-66.77	115.82	38.04	32.04	6.45	27.48	264	305	P	H
	*	5795	98.44	-	-	87.34	32.1	6.53	27.53	264	305	P	H
	*	5795	89.11	-	-	78.01	32.1	6.53	27.53	264	305	A	H
		5850.2	49.79	-71.95	121.74	38.52	32.3	6.54	27.57	264	305	P	H
		5867	50.99	-56.45	107.44	39.66	32.37	6.54	27.58	264	305	P	H
		5912.2	52.84	-24.8	77.64	41.37	32.55	6.54	27.62	264	305	P	H
		5934.4	50.51	-17.69	68.2	38.96	32.64	6.54	27.63	264	305	P	H
													H
													H
		5626.2	50.36	-17.84	68.2	39.59	31.85	6.33	27.41	247	355	P	V
		5660.2	50.42	-25.35	75.77	39.65	31.84	6.37	27.44	247	355	P	V
		5701.2	51.16	-54.38	105.54	40.2	32	6.42	27.46	247	355	P	V
		5724.8	49.09	-72.65	121.74	38.07	32.05	6.45	27.48	247	355	P	V
	*	5795	104.73	-	-	93.63	32.1	6.53	27.53	247	355	P	V
	*	5795	94.21	-	-	83.11	32.1	6.53	27.53	247	355	A	V
		5850	50.49	-71.71	122.2	39.22	32.3	6.54	27.57	247	355	P	V
		5867.2	51.24	-56.14	107.38	39.91	32.37	6.54	27.58	247	355	P	V
		5909.2	52.27	-27.59	79.86	40.8	32.54	6.54	27.61	247	355	P	V
		5938.8	51.28	-16.92	68.2	39.72	32.66	6.54	27.64	247	355	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE40_Full (Harmonic @ 3m)

WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 151 5755MHz		11510	47.41	-26.59	74	52.69	40.07	10.45	55.8	100	0	P	H
		17265	48.53	-19.67	68.2	51.69	40.1	13.11	56.37	100	0	P	H
													H
													H
		11510	48.79	-25.21	74	54.07	40.07	10.45	55.8	100	0	P	V
		17265	47.97	-20.23	68.2	51.13	40.1	13.11	56.37	100	0	P	V
													V
													V
802.11ax HE40 Full CH 159 5795MHz		11590	48.52	-25.48	74	54.05	39.83	10.49	55.85	100	0	P	H
		17385	49.85	-18.35	68.2	52.67	40.62	13.18	56.62	100	0	P	H
													H
													H
		11590	48.09	-25.91	74	53.62	39.83	10.49	55.85	100	0	P	V
		17385	49.86	-18.34	68.2	52.68	40.62	13.18	56.62	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Full (Band Edge @ 3m)

WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 155 5775MHz		5624.2	50.33	-17.87	68.2	39.56	31.85	6.33	27.41	258	303	P	H
		5676.2	51.1	-36.53	87.63	40.26	31.9	6.39	27.45	258	303	P	H
		5705.4	51.66	-55.05	106.71	40.69	32.01	6.43	27.47	258	303	P	H
		5721.6	52.12	-62.33	114.45	41.11	32.04	6.45	27.48	258	303	P	H
	*	5775	96	-	-	84.91	32.1	6.51	27.52	258	303	P	H
	*	5775	85.84	-	-	74.75	32.1	6.51	27.52	258	303	A	H
		5852.4	50.57	-66.16	116.73	39.29	32.31	6.54	27.57	258	303	P	H
		5861.4	51.13	-57.88	109.01	39.82	32.35	6.54	27.58	258	303	P	H
		5893	51.98	-39.86	91.84	40.57	32.47	6.54	27.6	258	303	P	H
		5948	51.36	-16.84	68.2	39.77	32.69	6.54	27.64	258	303	P	H
													H
													H
		5625.6	52.27	-15.93	68.2	41.5	31.85	6.33	27.41	247	355	P	V
		5695.8	52.89	-49.21	102.1	41.96	31.98	6.41	27.46	247	355	P	V
		5707.6	54.44	-52.89	107.33	43.46	32.02	6.43	27.47	247	355	P	V
		5721	54.42	-58.66	113.08	43.41	32.04	6.45	27.48	247	355	P	V
	*	5775	100.75	-	-	89.66	32.1	6.51	27.52	247	355	P	V
	*	5775	91.26	-	-	80.17	32.1	6.51	27.52	247	355	A	V
		5853.6	51.64	-62.35	113.99	40.36	32.31	6.54	27.57	247	355	P	V
		5873.2	54.06	-51.64	105.7	42.72	32.39	6.54	27.59	247	355	P	V
		5900.8	53.47	-32.6	86.07	42.04	32.5	6.54	27.61	247	355	P	V
		5947	51.95	-16.25	68.2	40.36	32.69	6.54	27.64	247	355	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Full (Harmonic @ 3m)

WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 155 5775MHz		11550	47.31	-26.69	74	52.71	39.95	10.47	55.82	100	0	P	H
		17325	48.7	-19.5	68.2	51.72	40.33	13.14	56.49	100	0	P	H
													H
													H
		11550	47.18	-26.82	74	52.58	39.95	10.47	55.82	100	0	P	V
		17325	48.58	-19.62	68.2	51.6	40.33	13.14	56.49	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
8+10		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a LF		31.94	21.68	-18.32	40	29.8	23.62	0.49	32.23	-	-	P	H
		157.07	29.79	-13.71	43.5	44.06	16.84	1.11	32.22	-	-	P	H
		265.71	28.9	-17.1	46	39.91	19.68	1.41	32.1	-	-	P	H
		642.07	28.31	-17.69	46	31.85	26.34	2.13	32.01	-	-	P	H
		772.05	32.93	-13.07	46	34.34	28.06	2.39	31.86	100	0	P	H
		950.53	32.42	-13.58	46	30.18	30.54	2.69	30.99	-	-	P	H
													H
													H
													H
													H
													H
													H
		36.79	31.05	-8.95	40	41.65	21.13	0.53	32.26	100	0	P	V
		118.27	24.86	-18.64	43.5	38.58	17.47	0.96	32.15	-	-	P	V
		430.61	26.59	-19.41	46	33.78	22.94	1.78	31.91	-	-	P	V
		536.34	28.85	-17.15	46	35.16	24.15	1.98	32.44	-	-	P	V
		754.59	32.84	-13.16	46	34.23	28.05	2.36	31.8	-	-	P	V
		953.44	32.88	-13.12	46	30.5	30.64	2.7	30.96	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



<WPC Charging Mode>

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
8+10		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 157 5785MHz		5613.6	50.81	-17.39	68.2	40.02	31.87	6.32	27.4	104	231	P	H
		5654.6	50.95	-20.67	71.62	40.19	31.82	6.37	27.43	104	231	P	H
		5717	49.61	-60.35	109.96	38.62	32.03	6.44	27.48	104	231	P	H
		5723.2	49.05	-69.05	118.1	38.03	32.05	6.45	27.48	104	231	P	H
	*	5785	99.8	-	-	88.71	32.1	6.52	27.53	104	231	P	H
	*	5785	92.19	-	-	81.1	32.1	6.52	27.53	104	231	A	H
		5854.2	51.05	-61.57	112.62	39.77	32.32	6.54	27.58	104	231	P	H
		5866.6	51	-56.55	107.55	39.67	32.37	6.54	27.58	104	231	P	H
		5917	50.97	-23.13	74.1	39.48	32.57	6.54	27.62	104	231	P	H
		5941.4	50.58	-17.62	68.2	39.01	32.67	6.54	27.64	104	231	P	H
													H
													H
		5648.8	50.69	-17.51	68.2	39.96	31.8	6.36	27.43	105	188	P	V
		5673.8	50.84	-35.01	85.85	40	31.9	6.39	27.45	105	188	P	V
		5703.4	49.93	-56.22	106.15	38.97	32.01	6.42	27.47	105	188	P	V
		5725	49.29	-72.91	122.2	38.27	32.05	6.45	27.48	105	188	P	V
	*	5785	101.92	-	-	90.83	32.1	6.52	27.53	105	188	P	V
	*	5785	93.54	-	-	82.45	32.1	6.52	27.53	105	188	A	V
		5851	50.31	-69.61	119.92	39.04	32.3	6.54	27.57	105	188	P	V
		5859.2	50.57	-59.05	109.62	39.27	32.34	6.54	27.58	105	188	P	V
		5886.4	51.53	-45.21	96.74	40.14	32.45	6.54	27.6	105	188	P	V
		5948	51.07	-17.13	68.2	39.48	32.69	6.54	27.64	105	188	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 8+10	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		11570	47.6	-26.4	74	53.06	39.89	10.48	55.83	100	0	P	H
		17355	47.77	-20.43	68.2	50.68	40.48	13.16	56.55	100	0	P	H
													H
													H
		11570	48.37	-25.63	74	53.83	39.89	10.48	55.83	100	0	P	V
		17355	47.99	-20.21	68.2	50.9	40.48	13.16	56.55	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
8+10		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a LF		63.95	24.2	-15.8	40	43.78	11.99	0.69	32.26	-	-	P	H
		133.79	24.68	-18.82	43.5	38.2	17.65	1.01	32.18	-	-	P	H
		249.22	26.51	-19.49	46	39.05	18.24	1.37	32.15	-	-	P	H
		457.77	28.06	-17.94	46	35.09	23.29	1.83	32.15	-	-	P	H
		850.62	30.28	-15.72	46	30.66	28.93	2.48	31.79	-	-	P	H
		955.38	33.15	-12.85	46	30.69	30.69	2.7	30.93	100	0	P	H
													H
													H
													H
													H
													H
													H
													H
		37.76	26.62	-13.38	40	37.63	20.72	0.53	32.26	100	0	P	V
		120.21	20.37	-23.13	43.5	33.99	17.56	0.97	32.15	-	-	P	V
		434.49	26.25	-19.75	46	33.45	22.95	1.79	31.94	-	-	P	V
		555.74	29.74	-16.26	46	34.24	25.89	2	32.39	-	-	P	V
		769.14	30.72	-15.28	46	32.16	28.03	2.38	31.85	-	-	P	V
		952.47	31.8	-14.2	46	29.46	30.61	2.7	30.97	-	-	P	V
													V
												V	
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
8+10		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots



Test Engineer :	Daniel Lee, Jacky Hong and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~60%

Note symbol



-L	Low channel location
-R	High channel location






Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

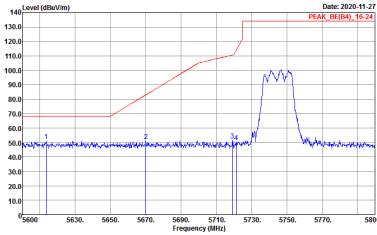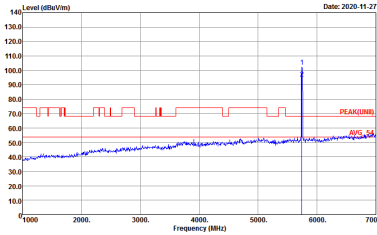WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK(FUND) 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto


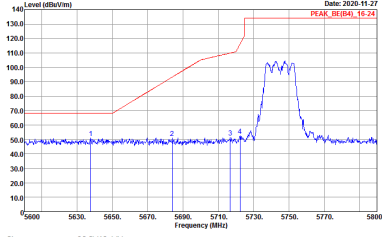
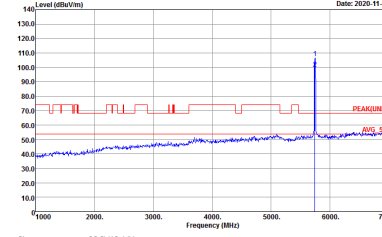


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_8E(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK(LINE) 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

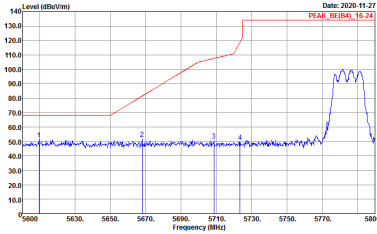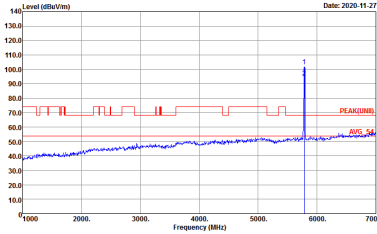
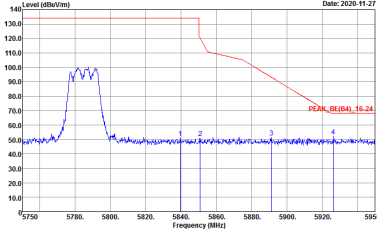


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

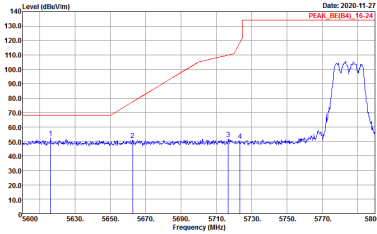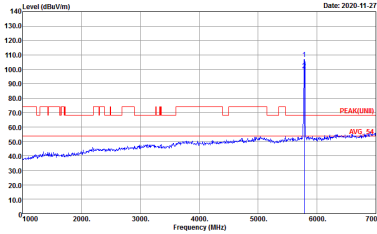
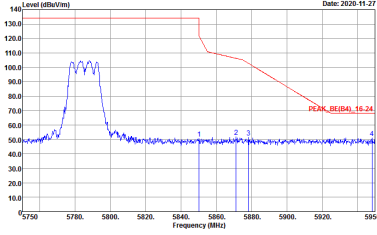


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

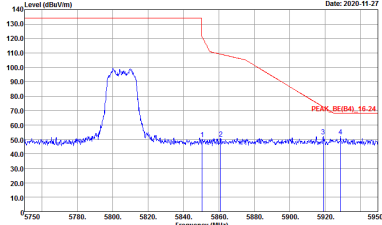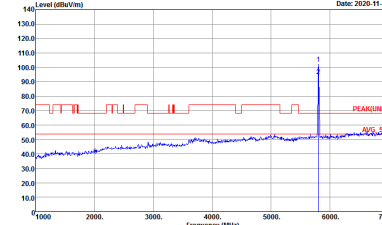



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH161 5805MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_85(BA)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_85(BA)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

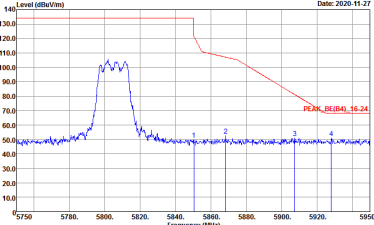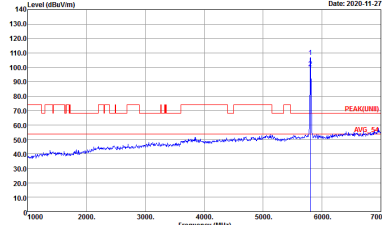



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH161 5805MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_85(BA)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_85(BA)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto






Band 4 5725~5850MHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

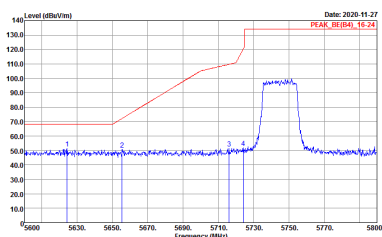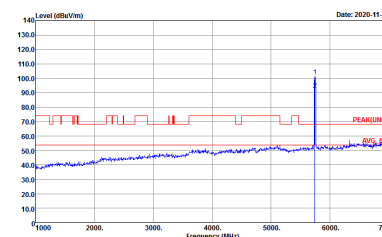WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_16(16)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_16(16)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto


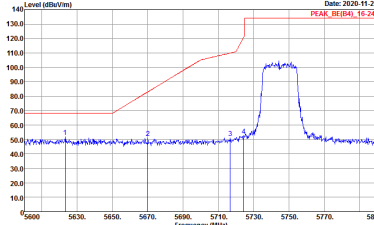
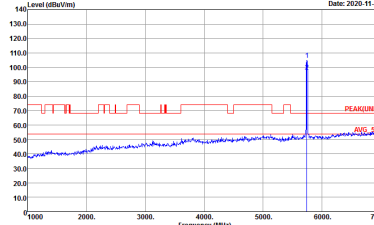


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_85[84]_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK[UNIT] 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

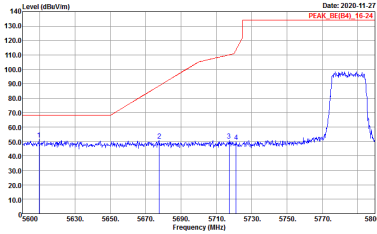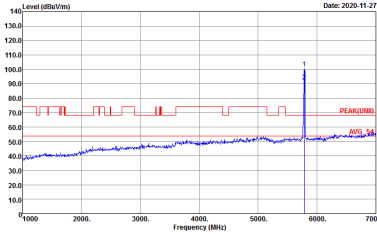
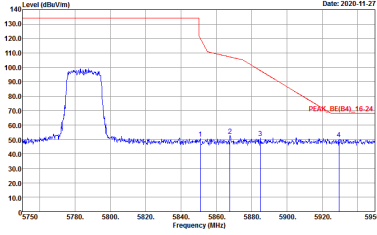


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto
	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank

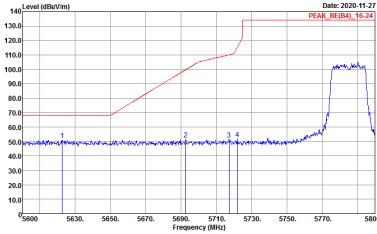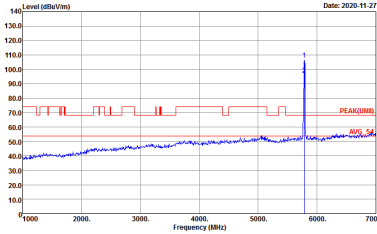
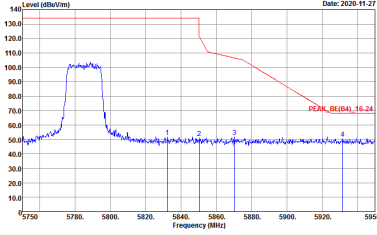


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

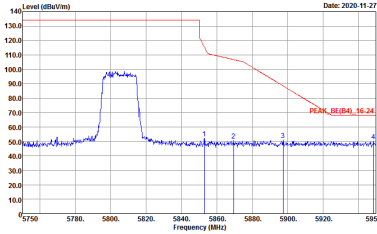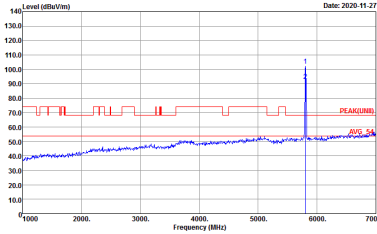

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH161 5805MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_86(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_86(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

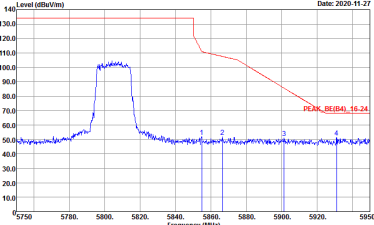
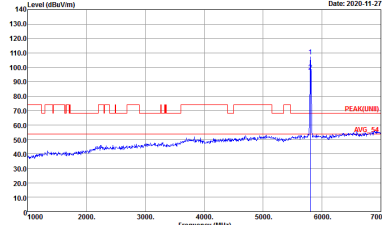


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH161 5805MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_86(BA)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_86(BA)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto





Band 4 5725~5850MHz



WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

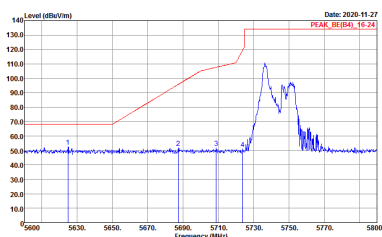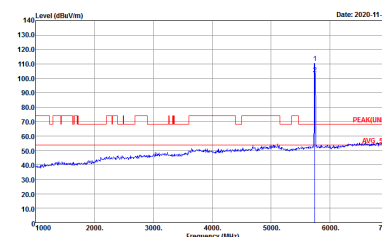WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 26/0 CH149 5745MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_06(B4)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_06(B4)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

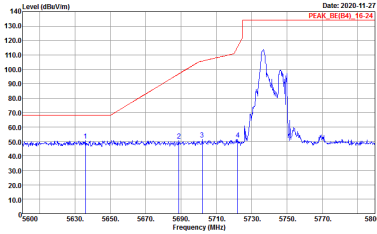
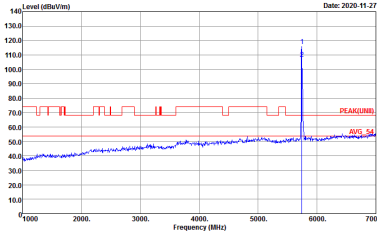


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 26/0 CH149 5745MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_85[84]_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_85[84]_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

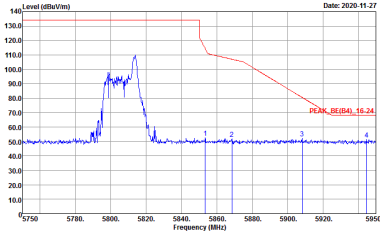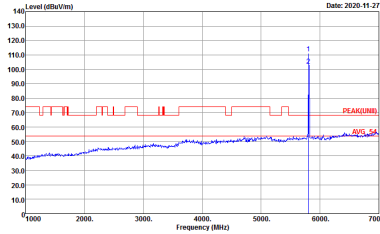




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 26/8 CH161 5805MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_85(BA)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_85(BA)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto


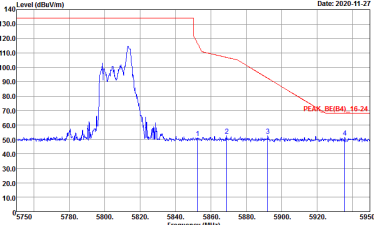
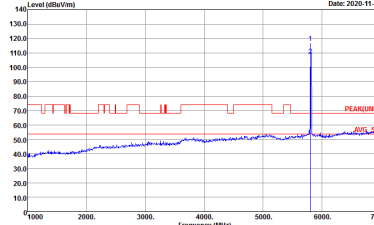


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 26/8 CH161 5805MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_85(BA)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_85(BA)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto






Band 4 5725~5850MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

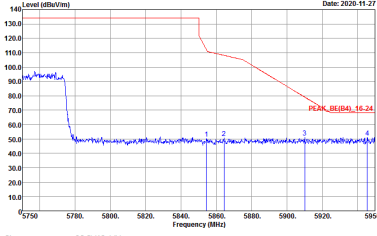WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH151 5755MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_LNB 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank

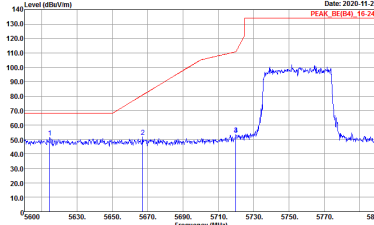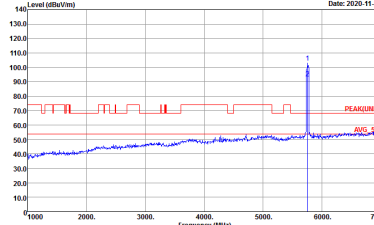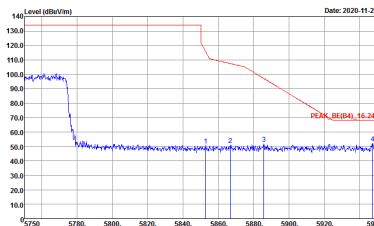WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH151 5755MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK(BE) 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto
	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank

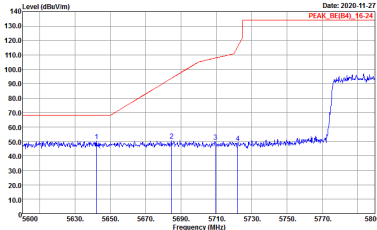
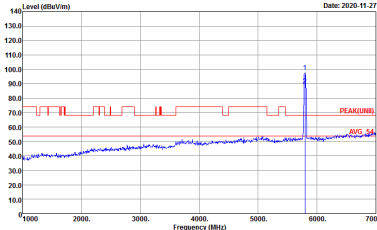
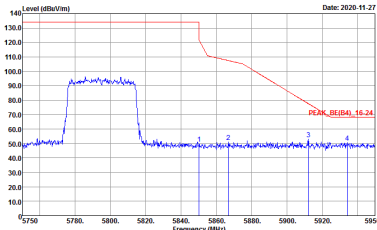





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full HT40 CH159 5795MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH159 5795MHz	
8+10	Vertical	Fundamental
Peak	Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Site : 03CH13-HY Condition : PEAK(FUND)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto
	Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank



Band 4 5725~5850MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

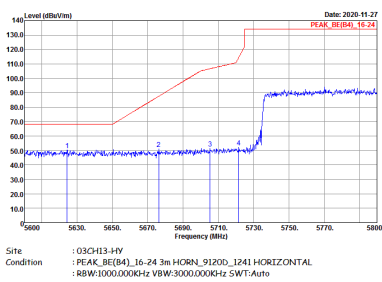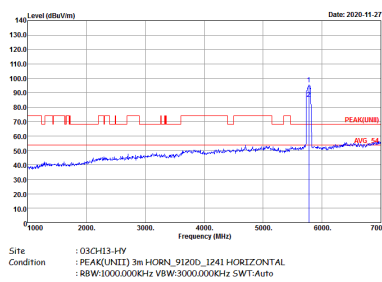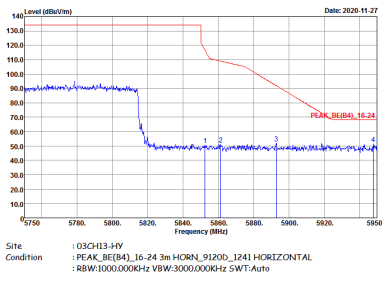WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
8+10	Horizontal	Fundamental
Peak		
Peak		Left blank

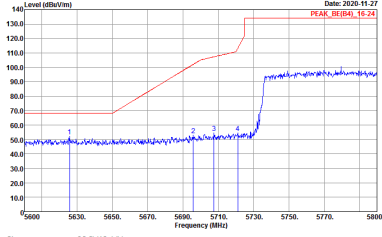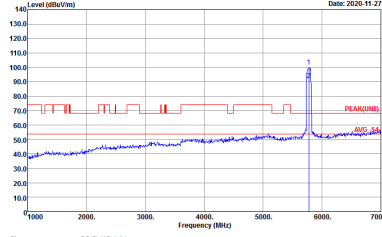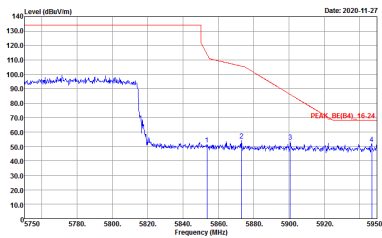WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto
	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank



Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
8+10	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL	 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
8+10	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2020-11-28 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL	Level (dBuV/m) Date: 2020-11-28 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH161 5805MHz	
8+10	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2020-11-28 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_9120D_1241 HORIZONTAL	Level (dBuV/m) Date: 2020-11-28 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_9120D_1241 VERTICAL



Band 4 5725~5850MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH149 5745MHz	
8+10	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL	 Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH157 5785MHz	
8+10	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2020-11-28 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL	Level (dBuV/m) Date: 2020-11-28 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH161 5805MHz	
8+10	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2020-11-28 Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_9120D_1241 HORIZONTAL	Level (dBuV/m) Date: 2020-11-28 Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_9120D_1241 VERTICAL



Band 4 5725~5850MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH151 5755MHz	
8+10	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL	 Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH159 5795MHz	
8+10	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2020-11-28 Frequency (MHz) Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL	Level (dBuV/m) Date: 2020-11-28 Frequency (MHz) Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL





Band 4 5725~5850MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

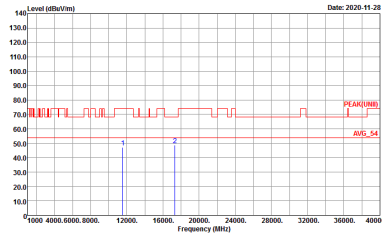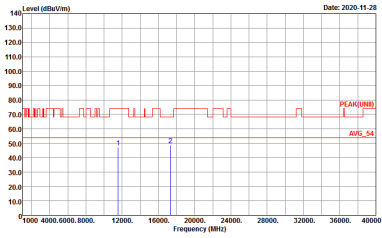WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ax HE80 Full CH155 5775MHz	
8+10	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL	 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL






Emission below 1GHz
5GHz WIFI 802.11a (LF)


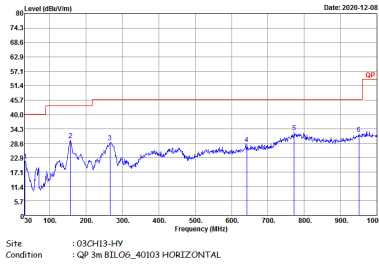
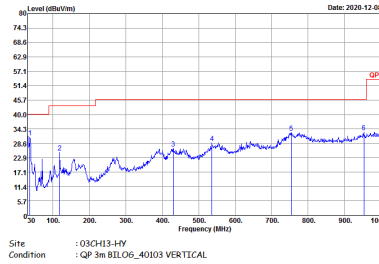
WIFI	5GHz WIFI	
ANT	802.11a LF	
8+10	Horizontal	Vertical
QP / Peak	 Site : 03CH13-HY Condition : QP 3m BIL06_40103 HORIZONTAL	 Site : 03CH13-HY Condition : QP 3m BIL06_40103 VERTICAL





<-WPC Charging Mode>

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

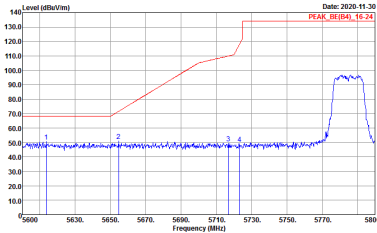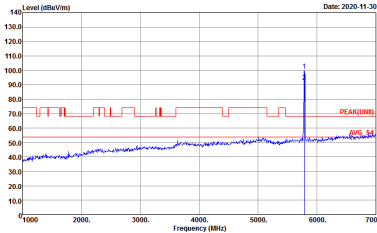
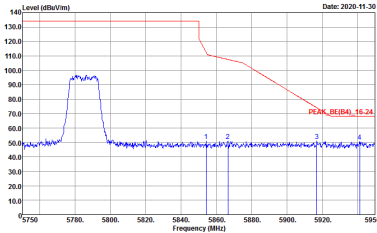
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
8+10	Horizontal	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

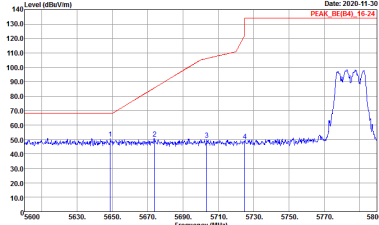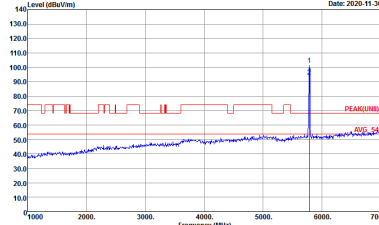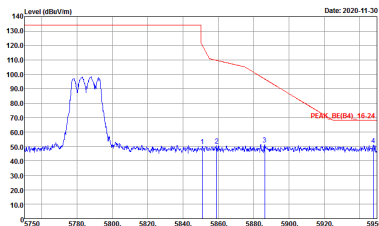WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
8+10	Vertical	Fundamental
Peak	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	 Site : 03CH13-HY Condition : PEAK(FUNDI) 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto
	 Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank

Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

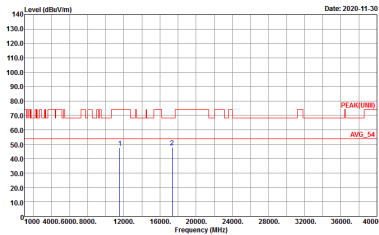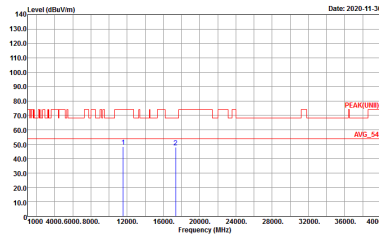WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
8+10	Horizontal	Vertical
Peak Avg.	 Site : 03CH13-4Y Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL	 Site : 03CH13-4Y Condition : PEAK(UNIT) 3m HORN_91200_1241 VERTICAL

**Emission below 1GHz
5GHz WIFI 802.11a (LF)**



WIFI	5GHz WIFI	
ANT	802.11a LF	
8+10	Horizontal	Vertical
QP / Peak	 Site : 03CH13-HY Condition : QP 3m BIL06_40103 HORIZONTAL	 Site : 03CH13-HY Condition : QP 3m BIL06_40103 VERTICAL


Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
8+10	802.11a for Ant 8	99.29	-	-	10Hz	0.03
8+10	802.11a for Ant 10	99.05	-	-	10Hz	0.04
8+10	5GHz 802.11ax HE20 Full RU for Ant 8	100.00	-	-	10Hz	0.00
8+10	5GHz 802.11ax HE20 Full RU for Ant 10	100.00	-	-	10Hz	0.00
8+10	5GHz 802.11ax HE20 26 RU for Ant 8	100.00	-	-	10Hz	0.00
8+10	5GHz 802.11ax HE20 26 RU for Ant 10	100.00	-	-	10Hz	0.00
8+10	5GHz 802.11ax HE40 Full RU for Ant 8	100.00	-	-	10Hz	0.00
8+10	5GHz 802.11ax HE40 Full RU for Ant 10	100.00	-	-	10Hz	0.00
8+10	5GHz 802.11ax HE80 Full RU for Ant 8	100.00	-	-	10Hz	0.00
8+10	5GHz 802.11ax HE80 Full RU for Ant 10	100.00	-	-	10Hz	0.00



MIMO <Ant. 8>

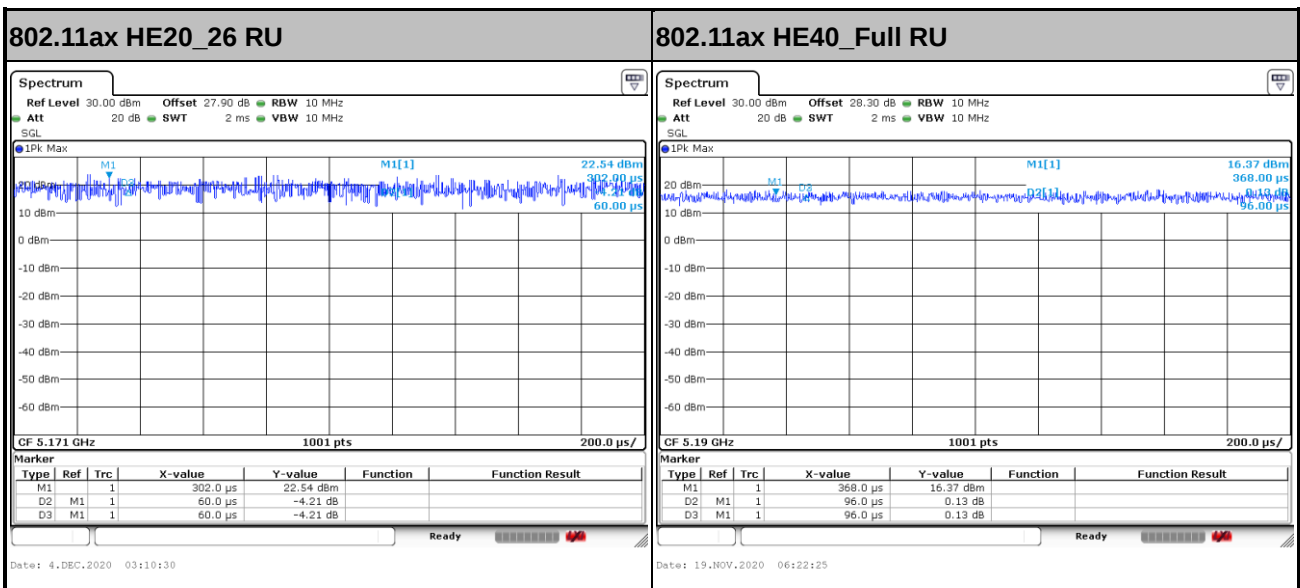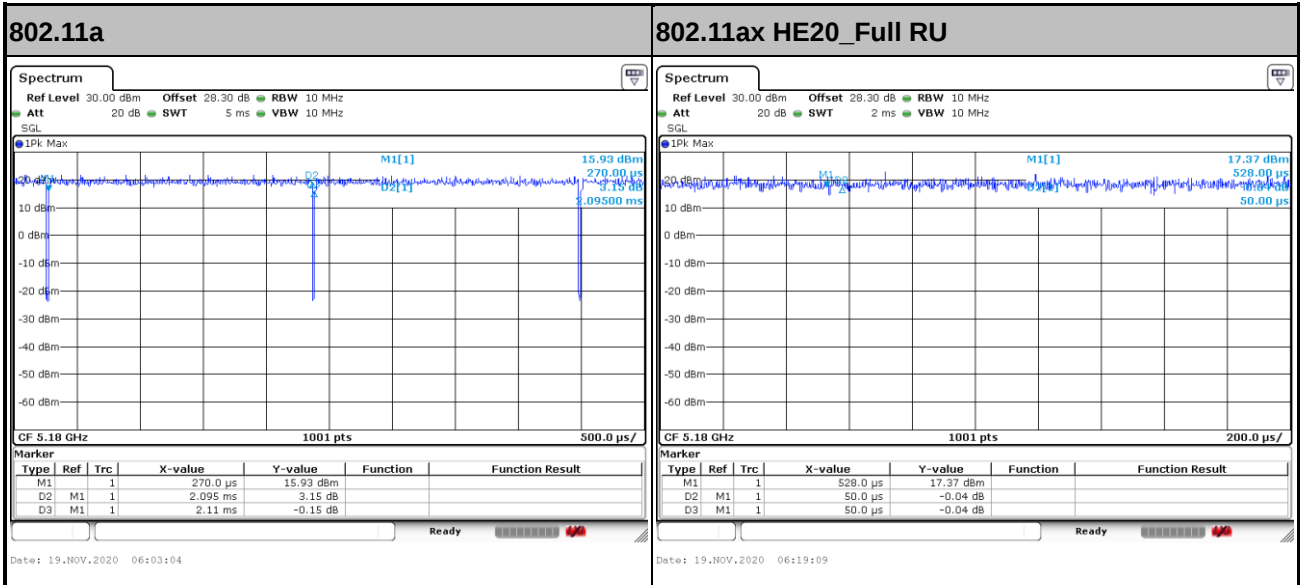

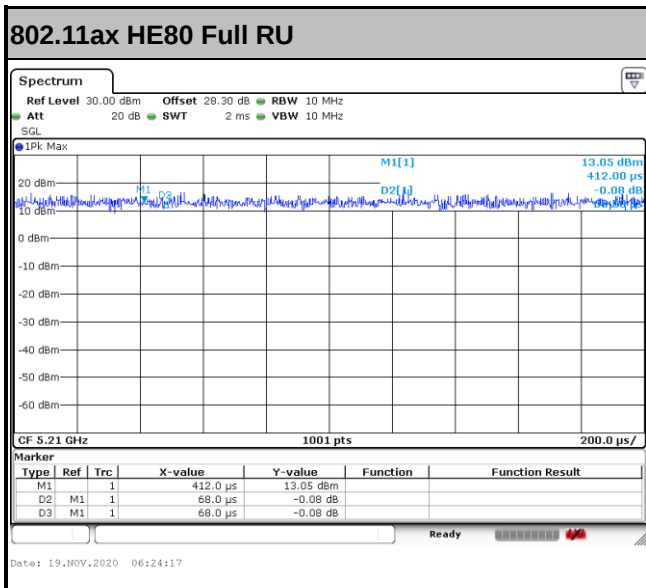



MIMO <Ant. 10>

