


FCC SAR Test Report


APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : M2101K7BG
FCC ID : 2AFZZK7BG
STANDARD : FCC 47 CFR Part 2 (2.1093)

The product was received on Jan. 30, 2021 and testing was started from Feb. 09, 2021 and completed on Mar. 09, 2021. We, Sporton International (Kunshan) Inc, would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	7
5. Proximity Sensor Triggering Test	9
5.1 Proximity sensor triggering distances(Per KDB616217§6.2)	9
6. RF Exposure Limits	11
6.1 Uncontrolled Environment	11
6.2 Controlled Environment	11
7. Specific Absorption Rate (SAR)	12
7.1 Introduction	12
7.2 SAR Definition	12
8. System Description and Setup	13
8.1 E-Field Probe	14
8.2 Data Acquisition Electronics (DAE)	14
8.3 Phantom	15
8.4 Device Holder	16
9. Measurement Procedures	17
9.1 Spatial Peak SAR Evaluation	17
9.2 Power Reference Measurement	18
9.3 Area Scan	18
9.4 Zoom Scan	19
9.5 Volume Scan Procedures	19
9.6 Power Drift Monitoring	19
10. Test Equipment List	20
11. System Verification	21
11.1 Tissue Simulating Liquids	21
11.2 Tissue Verification	22
11.3 System Performance Check Results	23
12. RF Exposure Positions	24
12.1 Ear and handset reference point	24
12.2 Definition of the cheek position	25
12.3 Definition of the tilt position	26
12.4 Body Worn Accessory	27
12.5 Product Specific 10g SAR Exposure	28
12.6 Wireless Router	28
13. Conducted RF Output Power (Unit: dBm)	29
14. Antenna Location	43
15. SAR Test Results	44
15.1 Head SAR	47
15.2 Hotspot SAR	52
15.3 Body Worn Accessory SAR	58
15.4 Product specific 10g SAR	61
15.5 Repeated SAR Measurement	61
16. Simultaneous Transmission Analysis	62
16.1 Head Exposure Conditions	63
16.2 Hotspot Exposure Conditions	65
16.3 Body-Worn Accessory Exposure Conditions	69
17. Uncertainty Assessment	73
18. References	74
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. Conducted RF Output Power Table	



Sporton International (Kunshan) Inc.

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, M2101K7BG**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 10mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			1g SAR (W/kg)
Licensed	GSM	GSM850	0.53	0.32	0.32	1.58
		GSM1900	0.76	0.81	0.81	
	WCDMA	Band V	0.55	0.22	0.22	
		Band IV	0.59	0.43	0.29	
		Band II	1.03	0.66	0.55	
	LTE	Band 5	0.57	0.23	0.22	
		Band 4	0.60	0.34	0.34	
		Band 2	0.95	1.00	0.75	
		Band 7	0.85	0.69	0.41	
		Band 41/ Band 38	1.07	0.59	0.30	
DTS	WLAN	2.4GHz WLAN	0.98	0.19	0.19	1.54
NII		5GHz WLAN	0.62	0.75	0.69	1.58
DSS	Bluetooth	2.4GHz Bluetooth	<0.10	<0.10	<0.10	1.58
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			Highest Simultaneous Transmission 10g SAR (W/kg)
NII	WLAN	5GHz WLAN	2.17			-
Date of Testing:			2021/2/9 ~ 2021/3/9			
Remark: This device supports LTE B38 and B41. Since the supported frequency span for LTE B38 falls completely within the supports frequency span for LTE B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B41.						

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Manufacturer	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	Redmi
Model Name	M2101K7BG
FCC ID	2AFZZK7BG
IMEI Code	SIM1: 860364050038263 SIM2: 860364050038271
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2535 MHz ~ 2655 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.5GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ LTE: QPSK, 16QAM, 64QAM, 256QAM(Downlink only) WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	P2
SW Version	MIUI 12
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: - This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. - This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. - This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). - This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12. - There are four types of EUT, the differences are memory capacity and battery. According to the difference, we only choose sample 1 to perform full SAR testing. The device has three batteries with the same battery capacity, only Manufacturer is different. We only chose battery 1 to perform full SAR testing. - For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests. - The device implements Proximity sensors/receiver detect mechanism trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device	

will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. Power table. The DSI described as following table.

Bottom Antenna			Top Antenna		
Head	Body-Worn/Hotspot(Receiver off)		Head	Body-Worn/Hotspot(Receiver off)	
Receiver on	Sensor off	Sensor On	Receiver on	Sensor off	Sensor On
DSI1	DSI2	DSI3	DSI1	DSI2	DSI4

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05								
FCC ID	2AFZZK7BG							
Equipment Name	Mobile Phone							
Operating Frequency Range of each LTE transmission band	LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2535 MHz ~ 2655 MHz							
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used	QPSK / 16QAM / 64QAM /256QAM(Downlink only)							
LTE Voice / Data requirements	Voice and Data							
LTE Release Version	R12, Cat10							
CA Support	Supported, Uplink and Downlink							
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
	256 QAM	≥ 1						≤ 5
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance	Yes, head/body-worn/ hotspot/extremity will trigger reduced power for some LTE bands, the detail please referred to section 13.							
LTE Carrier Aggregation Combinations	Intra-Band possible combinations and the detail power verification please referred to section 13.							
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for 7C/38C with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink.							

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37850	2580	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38150	2610	38150	2610
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	40065	2537.5	40090	2540	40115	2542.5	40140	2545	40140	2545	40140	2545
LM	40353	2566.3	40365	2567.5	40378	2568.8	40390	2570	40390	2570	40390	2570
HM	40928	2623.8	40915	2622.5	40903	2621.3	40890	2620	40890	2620	40890	2620
H	41215	2652.5	41190	2650	41165	2647.5	41140	2645	41140	2645	41140	2645

5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.
2. In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.
3. Capacitive proximity sensor placed coincident with antenna elements at the top/bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back or top or bottom side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
4. When the proximity sensor is active, GSM1900, WCDMA band II/IV, LTE band 2/4/5/7/38/41 reduced power will be active for front/ back/bottom/top side body worn SAR.
5. The proximity sensors used to detect the proximity of the user's body at the front or back or bottom side or top side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).
6. The detailed proximity sensor trigger diagram plot can refer to proximity sensor operation description.
7. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for body worn:

ANT1:

Front: [15 mm](#)

Back: [19 mm](#)


Bottom side: [19 mm](#)

ANT2:

Front: [15 mm](#)

Back: [19 mm](#)

Top side: [19 mm](#)

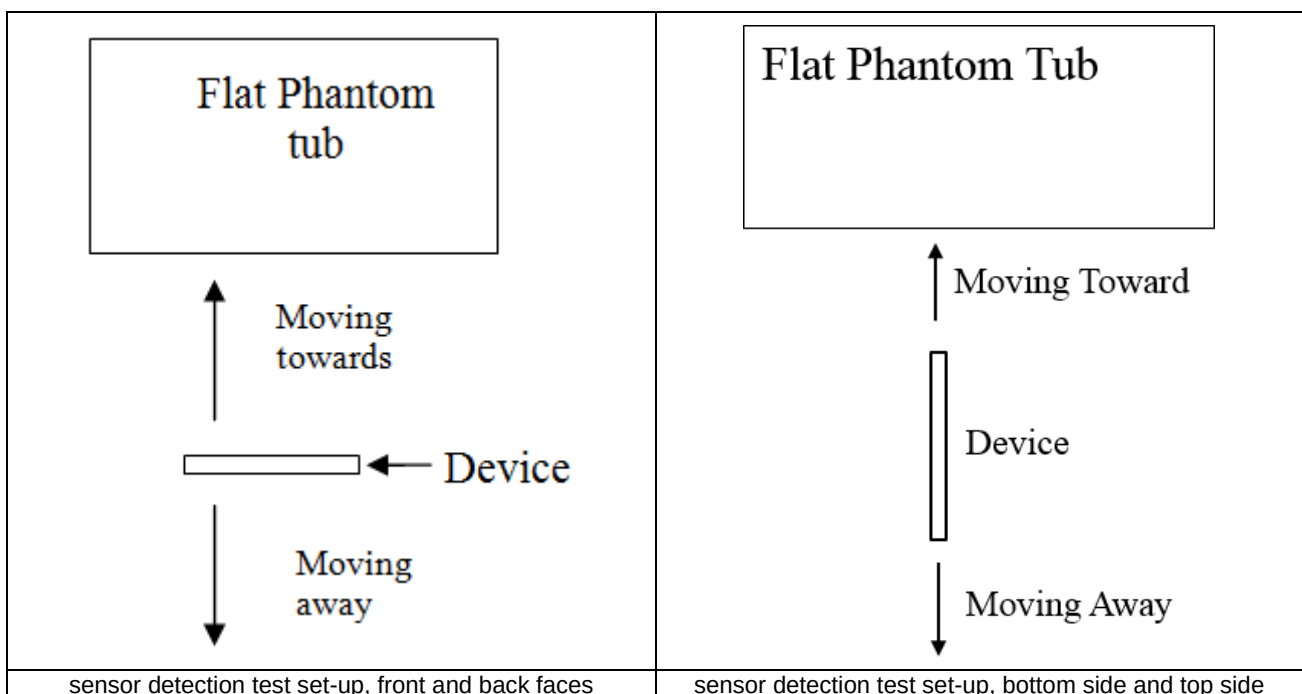

<P-Sensor>
Antenna 1:

Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving towards	Moving towards	Moving away
Minimum	16	16	20	20	20	20

Antenna 2:

Position	Front		Back		Top Side	
	Moving towards	Moving away	Moving towards	Moving towards	Moving towards	Moving away
Minimum	16	16	20	20	20	20

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

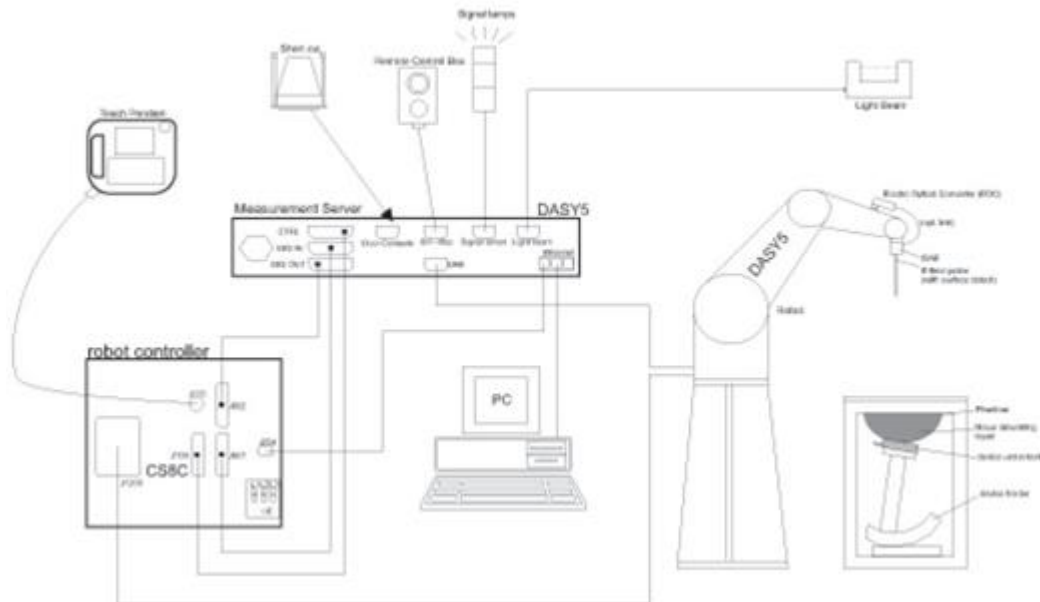

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 *Spatial Peak SAR Evaluation*

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2022/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2022/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2022/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2022/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1070	2018/12/7	2021/11/24
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2019/9/24	2022/9/23
SPEAG	Data Acquisition Electronics	DAE4	690	2020/3/26	2021/3/25
SPEAG	Dosimetric E-Field Probe	EX3DV4	7592	2020/5/22	2021/5/21
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1697	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2020/4/14	2021/4/13
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2020/5/19	2021/5/18
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2020/4/16	2021/4/15
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	2020/10/27	2021/10/26
Anritsu	Vector Signal Generator	MG3710A	6201682672	2021/1/7	2022/1/6
Rohde & Schwarz	Power Meter	NRVD	102081	2020/8/13	2021/8/12
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2020/8/13	2021/8/12
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2020/8/13	2021/8/12
R&S	CBT BLUETOOTH TESTER	CBT	101641	2021/1/7	2022/1/6
EXA	Spectrum Analyzer	FSV7	101632	2021/1/7	2022/1/6
Testo	Hygrometer	608-H1	1241332088	2021/1/7	2022/1/6
FLUKE	DIGITAC THERMOMETER	51II	97240029	2020/8/14	2021/8/13
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

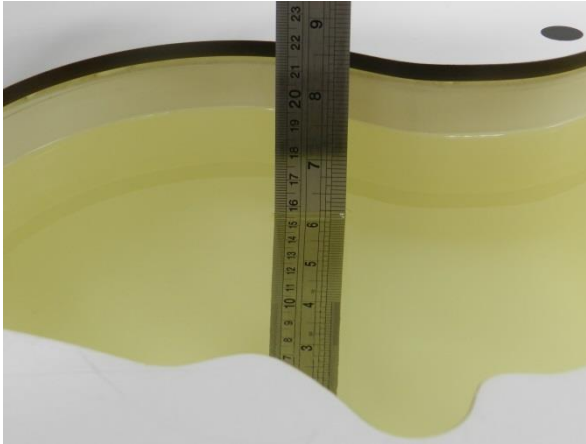


Fig 11.1 Photo of Liquid Height for Head SAR

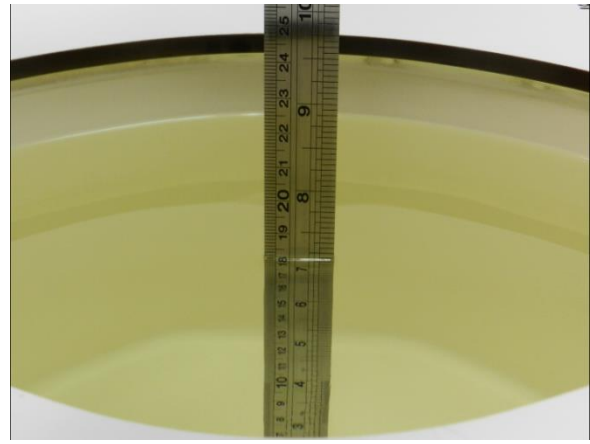


Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.6	0.901	41.233	0.90	41.50	0.11	-0.64	±5	2021/2/9
1750	Head	22.7	1.357	39.061	1.37	40.10	-0.95	-2.59	±5	2021/2/11
1900	Head	22.9	1.397	39.034	1.40	40.00	-0.21	-2.42	±5	2021/2/13
2450	Head	22.8	1.860	38.536	1.80	39.20	3.33	-1.69	±5	2021/2/15
2600	Head	22.7	2.025	37.829	1.96	39.00	3.32	-3.00	±5	2021/2/17
5250	Head	22.9	4.595	36.400	4.71	35.90	-2.44	1.39	±5	2021/2/19
5600	Head	22.6	4.984	35.824	5.07	35.50	-1.70	0.91	±5	2021/2/22
5750	Head	22.8	5.160	35.569	5.22	35.40	-1.15	0.48	±5	2021/2/22
835	Head	22.9	0.913	40.844	0.90	41.50	1.44	-1.58	±5	2021/2/25
1750	Head	22.6	1.351	40.380	1.37	40.10	-1.39	0.70	±5	2021/2/28
1900	Head	22.8	1.452	39.634	1.40	40.00	3.71	-0.91	±5	2021/3/2
2450	Head	22.9	1.810	38.628	1.80	39.20	0.56	-1.46	±5	2021/3/4
2600	Head	22.7	1.927	38.332	1.96	39.00	-1.68	-1.71	±5	2021/3/6
5250	Head	22.9	4.566	35.456	4.71	35.90	-3.06	-1.24	±5	2021/3/8
5600	Head	22.6	4.950	34.842	5.07	35.50	-2.37	-1.85	±5	2021/3/9
5750	Head	22.8	5.131	34.570	5.22	35.40	-1.70	-2.34	±5	2021/3/9

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2021/2/9	835	Head	250	4d151	7592	690	2.28	9.30	9.12	-1.94
2021/2/11	1750	Head	250	1090	7592	690	8.90	36.40	35.6	-2.20
2021/2/13	1900	Head	250	5d170	7592	690	9.81	39.00	39.24	0.62
2021/2/15	2450	Head	250	908	7592	690	13.30	52.80	53.2	0.76
2021/2/17	2600	Head	250	1070	7592	690	14.10	58.10	56.4	-2.93
2021/2/19	5250	Head	100	1113	7592	690	8.00	80.50	80	-0.62
2021/2/22	5600	Head	100	1113	7592	690	7.85	83.40	78.5	-5.88
2021/2/22	5750	Head	100	1113	7592	690	7.91	80.00	79.1	-1.13
2021/2/25	835	Head	250	4d151	7592	690	2.49	9.30	9.96	7.10
2021/2/28	1750	Head	250	1090	7592	690	9.53	36.40	38.12	4.73
2021/3/2	1900	Head	250	5d170	7592	690	9.74	39.00	38.96	-0.10
2021/3/4	2450	Head	250	908	7592	690	12.90	52.80	51.6	-2.27
2021/3/6	2600	Head	250	1070	7592	690	13.40	58.10	53.6	-7.75
2021/3/8	5250	Head	100	1113	7592	690	7.95	80.50	79.5	-1.24
2021/3/9	5600	Head	100	1113	7592	690	7.80	83.40	78	-6.47
2021/3/9	5750	Head	100	1113	7592	690	7.87	80.00	78.7	-1.63

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2021/3/8	5250	Head	100	1113	7592	690	2.26	23.10	22.6	-2.16
2021/3/9	5600	Head	100	1113	7592	690	2.23	23.80	22.3	-6.30

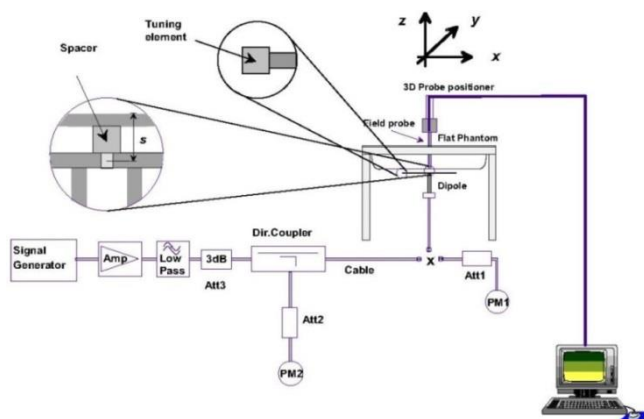


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2. The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

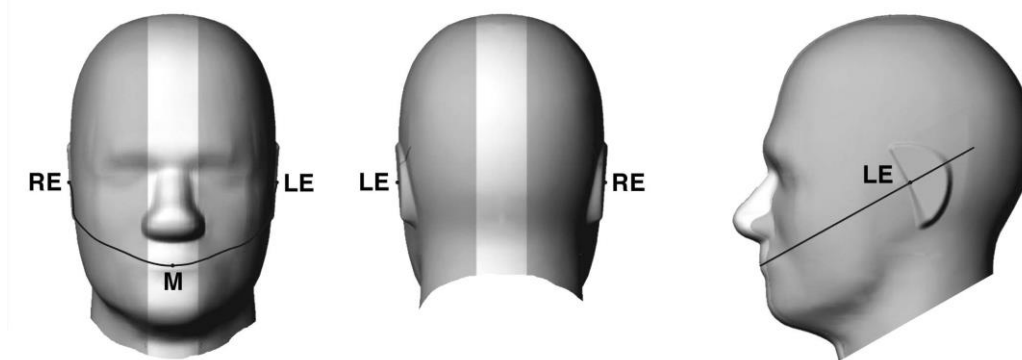


Fig 12.1.1 Front, back, and side views of SAM twin phantom

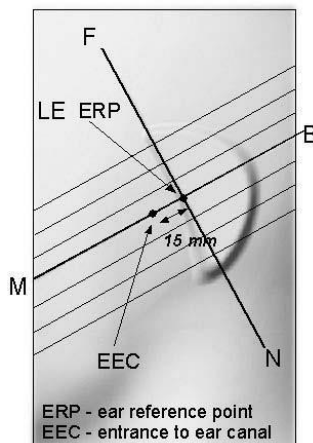


Fig 12.1.2 Close-up side view of phantom showing the ear region.

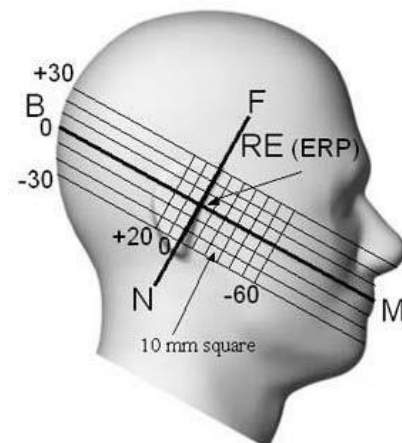


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the handset. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

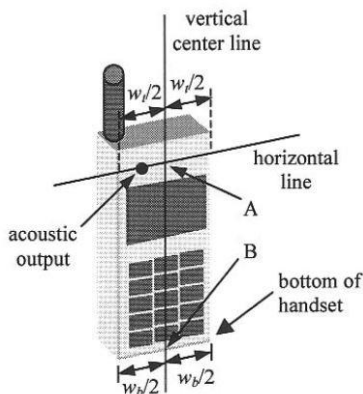


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

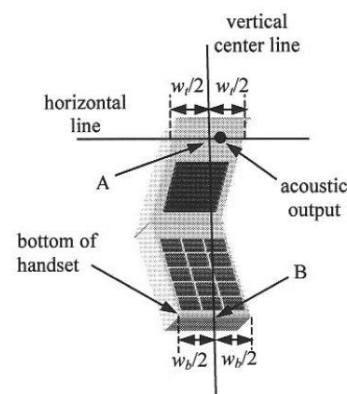


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

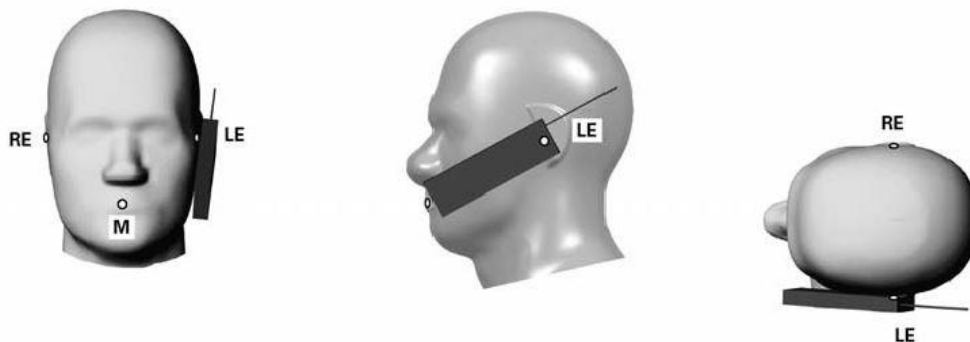


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

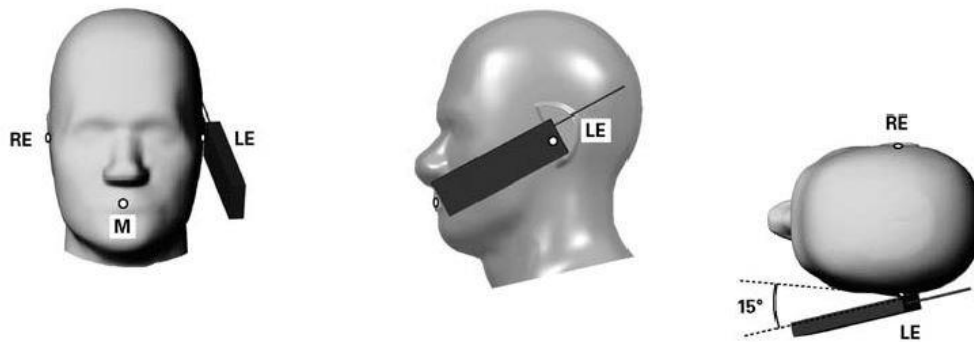


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

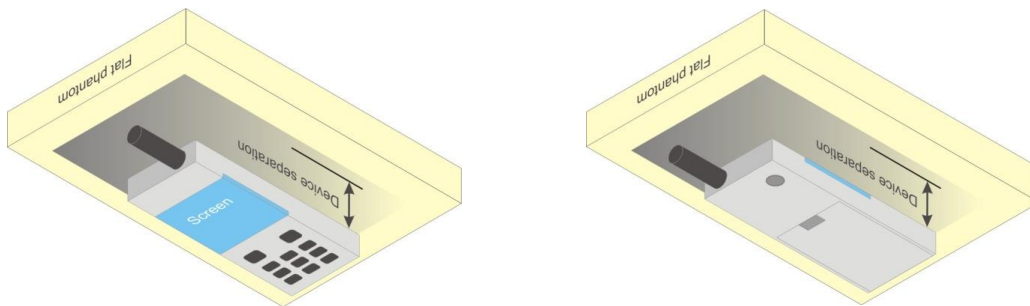


Fig 12.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

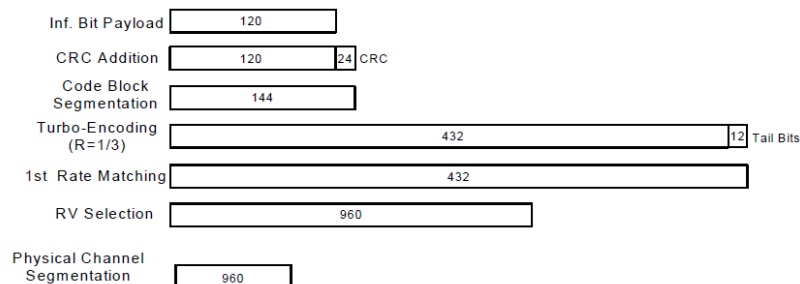


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Params
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power = 21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration


<WCDMA Conducted Power>**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B38 SAR test was covered by B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

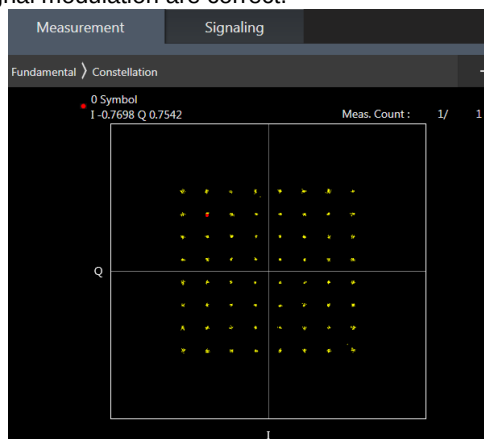

64QAM

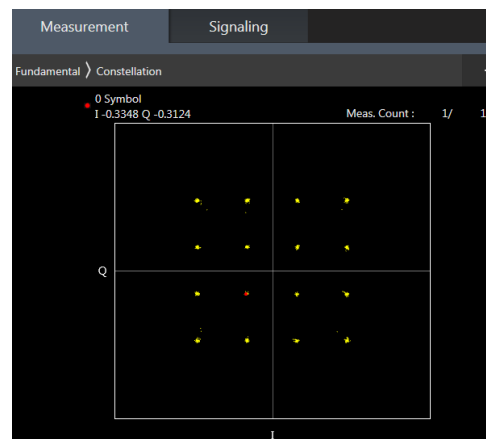

16QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

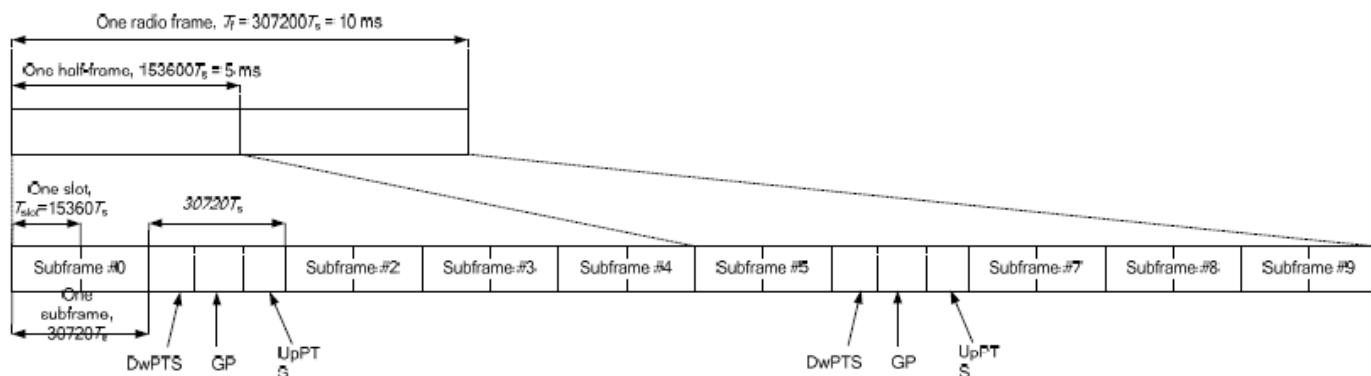


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE Band 41 Power class 3

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. The gray color table is covered by other combinations and no need to verify power.

2CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset
2CC #1	CA_7C	
2CC #2	CA_38C	


LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE Carrier Aggregation Conducted Power (Uplink)

1. This device supports uplink carrier aggregation for LTE CA_7C, LTE CA_38C with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. For the non-contiguously allocated resource blocks which the MPR level is determined by various RB separation and RB sizes requirement, and the allowed MPR levels, settings and the conducted powers are permanently implemented in this device per the 3GPP 36.36.101 section 6.2.3A.1.3 requirements.
2. According to FCC guidance, the output power with uplink CA active was measured for the high / middle / low channel configuration with the highest reported SAR for each exposure condition, the power was measured with wideband signal integration over both component carriers.
3. In applying the power measurement procedures of KDB 941225 D05A for DL CA to qualify for UL SAR test exclusion, power measurement is required only for the subset in each row with the largest combination of frequency bands and CCs
4. Maximum output power measurement is required for each UL CA configuration for the required test channels described in KDB 941225 D05. The required test channel should be associated with the UL PCC. For channels at the ends of a frequency band, the SCC and subsequent CCs are added to the side within the transmission band. Otherwise, the CCs should be added alternatively to either side of the PCC.

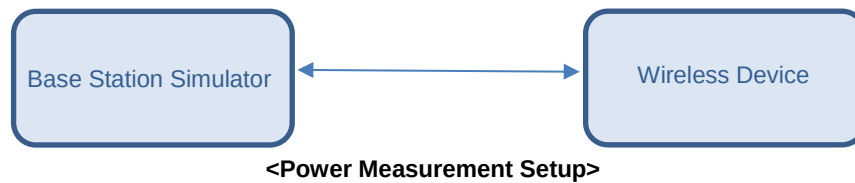


<WLAN Conducted Power>**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.91 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation

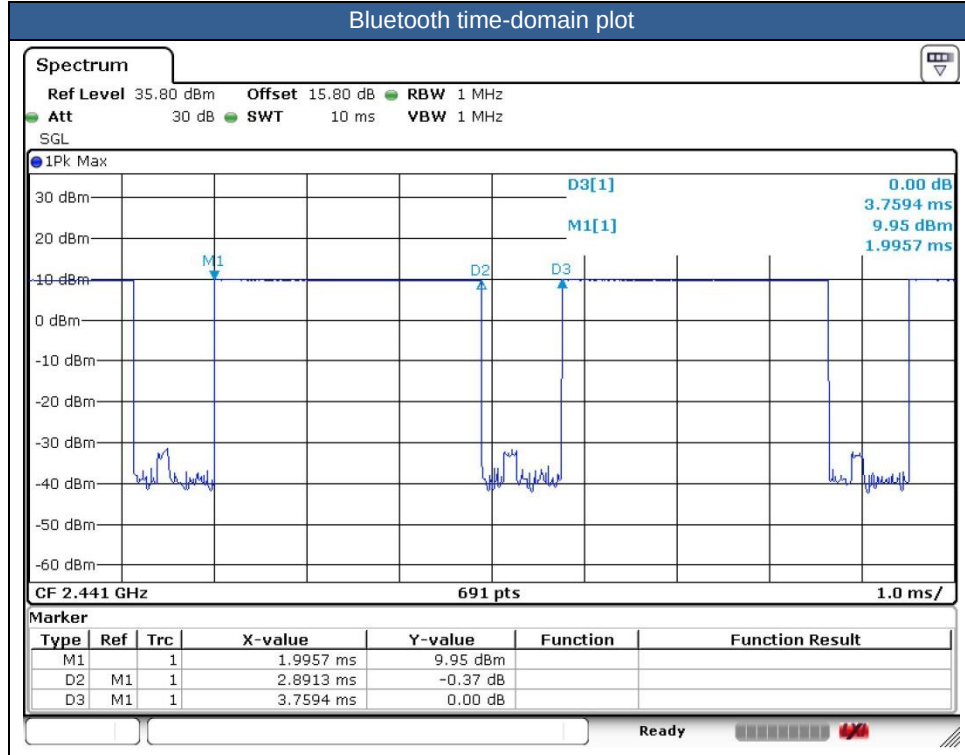



14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

15. SAR Test Results

General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- There are four types of EUT, the differences are memory capacity and battery. According to the difference, we only choose sample 1 to perform full SAR testing. The device has three batteries with the same battery capacity, only Manufacturer is different. We only chose battery 1 to perform full SAR testing.
- For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
- The device implements Proximity sensors/receiver detect mechanism trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. Power table. The DSI described as following table.

Bottom Antenna			Top Antenna		
Head	Body-Worn/Hotspot(Receiver off)		Head	Body-Worn/Hotspot(Receiver off)	
Receiver on	Sensor off	Sensor On	Receiver on	Sensor off	Sensor On
DSI1	DSI2	DSI3	DSI1	DSI2	DSI4

- Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15cm or an overall diagonal dimension > 16cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, in this report all the hotspot mode results are < 1.2W/kg.
- For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16cm.
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed for body worn:

ANT1:
 Front: [15 mm](#)
 Back: [19 mm](#)
 Bottom side: [19 mm](#)

ANT2:
 Front: [15 mm](#)
 Back: [19 mm](#)
 Top side: [19 mm](#)
- The following table "n/a" means the measured SAR is too small to find the 1g cube SAR.
- For WLAN5.8GHz at Top Side SAR with 19mm is to do co-located with WWAN/BT analysis.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B38 SAR test was covered by LTE B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM 850-Ant 1	GPRS 3 Tx slots	Right Cheek	DSI-1	189	836.4	28.33	29.50	1.309	-0.07	0.171	0.224
	GSM 850-Ant 1	GPRS 3 Tx slots	Right Tilted	DSI-1	189	836.4	28.33	29.50	1.309	0.09	0.110	0.144
	GSM 850-Ant 1	GPRS 3 Tx slots	Left Cheek	DSI-1	189	836.4	28.33	29.50	1.309	-0.01	0.143	0.187
	GSM 850-Ant 1	GPRS 3 Tx slots	Left Tilted	DSI-1	189	836.4	28.33	29.50	1.309	-0.02	0.086	0.113
01	GSM 850-Ant 2	GPRS 1 Tx slots	Right Cheek	DSI-1	189	836.4	30.94	31.00	1.014	0.04	0.518	0.525
	GSM 850-Ant 2	GPRS 1 Tx slots	Right Tilted	DSI-1	189	836.4	30.94	31.00	1.014	0.02	0.442	0.448
	GSM 850-Ant 2	GPRS 1 Tx slots	Left Cheek	DSI-1	189	836.4	30.94	31.00	1.014	0.09	0.425	0.431
	GSM 850-Ant 2	GPRS 1 Tx slots	Left Tilted	DSI-1	189	836.4	30.94	31.00	1.014	0.1	0.382	0.387
	GSM1900-Ant 1	GPRS 3 Tx slots	Right Cheek	DSI-1	661	1880	25.41	26.50	1.285	-0.19	0.096	0.123
	GSM1900-Ant 1	GPRS 3 Tx slots	Right Tilted	DSI-1	661	1880	25.41	26.50	1.285	0.04	0.063	0.081
	GSM1900-Ant 1	GPRS 3 Tx slots	Left Cheek	DSI-1	661	1880	25.41	26.50	1.285	-0.01	0.073	0.094
	GSM1900-Ant 1	GPRS 3 Tx slots	Left Tilted	DSI-1	661	1880	25.41	26.50	1.285	-0.07	0.070	0.090
	GSM1900-Ant 2	GPRS 3 Tx slots	Right Cheek	DSI-1	661	1880	18.63	19.50	1.222	0.04	0.451	0.551
02	GSM1900-Ant 2	GPRS 3 Tx slots	Right Tilted	DSI-1	661	1880	18.63	19.50	1.222	0.07	0.622	0.760
	GSM1900-Ant 2	GPRS 3 Tx slots	Left Cheek	DSI-1	661	1880	18.63	19.50	1.222	0.08	0.361	0.441
	GSM1900-Ant 2	GPRS 3 Tx slots	Left Tilted	DSI-1	661	1880	18.63	19.50	1.222	0.01	0.454	0.555

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V-Ant 1	RMC 12.2Kbps	Right Cheek	DSI-1	4182	836.4	23.08	24.00	1.236	-0.08	0.153	0.189
	WCDMA V-Ant 1	RMC 12.2Kbps	Right Tilted	DSI-1	4182	836.4	23.08	24.00	1.236	0.03	0.083	0.103
	WCDMA V-Ant 1	RMC 12.2Kbps	Left Cheek	DSI-1	4182	836.4	23.08	24.00	1.236	0.01	0.126	0.156
	WCDMA V-Ant 1	RMC 12.2Kbps	Left Tilted	DSI-1	4182	836.4	23.08	24.00	1.236	0.08	0.072	0.089
03	WCDMA V-Ant 2	RMC 12.2Kbps	Right Cheek	DSI-1	4182	836.4	21.90	22.50	1.148	-0.08	0.479	0.550
	WCDMA V-Ant 2	RMC 12.2Kbps	Right Tilted	DSI-1	4182	836.4	21.90	22.50	1.148	0.03	0.445	0.511
	WCDMA V-Ant 2	RMC 12.2Kbps	Left Cheek	DSI-1	4182	836.4	21.90	22.50	1.148	0.01	0.373	0.428
	WCDMA V-Ant 2	RMC 12.2Kbps	Left Tilted	DSI-1	4182	836.4	21.90	22.50	1.148	-0.02	0.286	0.328
	WCDMA IV-Ant 1	RMC 12.2Kbps	Right Cheek	DSI-1	1413	1732.6	22.97	24.00	1.268	0.02	0.064	0.081
	WCDMA IV-Ant 1	RMC 12.2Kbps	Right Tilted	DSI-1	1413	1732.6	22.97	24.00	1.268	0.03	0.047	0.060
	WCDMA IV-Ant 1	RMC 12.2Kbps	Left Cheek	DSI-1	1413	1732.6	22.97	24.00	1.268	0.04	0.038	0.048
	WCDMA IV-Ant 1	RMC 12.2Kbps	Left Tilted	DSI-1	1413	1732.6	22.97	24.00	1.268	0.01	0.032	0.041
	WCDMA IV-Ant 2	RMC 12.2Kbps	Right Cheek	DSI-1	1413	1732.6	14.40	16.00	1.445	0.03	0.327	0.473
04	WCDMA IV-Ant 2	RMC 12.2Kbps	Right Tilted	DSI-1	1413	1732.6	14.40	16.00	1.445	-0.07	0.407	0.588
	WCDMA IV-Ant 2	RMC 12.2Kbps	Left Cheek	DSI-1	1413	1732.6	14.40	16.00	1.445	0.01	0.179	0.259
	WCDMA IV-Ant 2	RMC 12.2Kbps	Left Tilted	DSI-1	1413	1732.6	14.40	16.00	1.445	-0.02	0.238	0.344
	WCDMA II-Ant 1	RMC 12.2Kbps	Right Cheek	DSI-1	9400	1880	23.07	24.00	1.239	0.08	0.139	0.172
	WCDMA II-Ant 1	RMC 12.2Kbps	Right Tilted	DSI-1	9400	1880	23.07	24.00	1.239	0.03	0.075	0.093
	WCDMA II-Ant 1	RMC 12.2Kbps	Left Cheek	DSI-1	9400	1880	23.07	24.00	1.239	0.01	0.085	0.105
	WCDMA II-Ant 1	RMC 12.2Kbps	Left Tilted	DSI-1	9400	1880	23.07	24.00	1.239	0.05	0.089	0.110
	WCDMA II-Ant 2	RMC 12.2Kbps	Right Cheek	DSI-1	9400	1880	13.59	15.00	1.384	0.01	0.520	0.719
	WCDMA II-Ant 2	RMC 12.2Kbps	Right Tilted	DSI-1	9400	1880	13.59	15.00	1.384	-0.02	0.709	0.981
	WCDMA II-Ant 2	RMC 12.2Kbps	Right Tilted	DSI-1	9262	1852.4	13.45	15.00	1.429	-0.05	0.649	0.927
05	WCDMA II-Ant 2	RMC 12.2Kbps	Right Tilted	DSI-1	9538	1907.6	13.52	15.00	1.406	-0.08	0.730	1.026
	WCDMA II-Ant 2	RMC 12.2Kbps	Left Cheek	DSI-1	9400	1880	13.59	15.00	1.384	-0.05	0.318	0.440
	WCDMA II-Ant 2	RMC 12.2Kbps	Left Tilted	DSI-1	9400	1880	13.59	15.00	1.384	0.03	0.408	0.564



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5-Ant 1	10M	QPSK	1	0	Right Cheek	DSI-1	20525	836.5	24.03	25.50	1.403	0.09	0.192	0.269
	LTE Band 5-Ant 1	10M	QPSK	25	0	Right Cheek	DSI-1	20525	836.5	23.05	24.50	1.396	0.03	0.156	0.218
	LTE Band 5-Ant 1	10M	QPSK	1	0	Right Tilted	DSI-1	20525	836.5	24.03	25.50	1.403	0.02	0.098	0.137
	LTE Band 5-Ant 1	10M	QPSK	25	0	Right Tilted	DSI-1	20525	836.5	23.05	24.50	1.396	0.01	0.080	0.112
	LTE Band 5-Ant 1	10M	QPSK	1	0	Left Cheek	DSI-1	20525	836.5	24.03	25.50	1.403	0.06	0.159	0.223
	LTE Band 5-Ant 1	10M	QPSK	25	0	Left Cheek	DSI-1	20525	836.5	23.05	24.50	1.396	-0.05	0.129	0.180
	LTE Band 5-Ant 1	10M	QPSK	1	0	Left Tilted	DSI-1	20525	836.5	24.03	25.50	1.403	0.07	0.092	0.129
	LTE Band 5-Ant 1	10M	QPSK	25	0	Left Tilted	DSI-1	20525	836.5	23.05	24.50	1.396	0.06	0.075	0.105
06	LTE Band 5-Ant 2	10M	QPSK	1	0	Right Cheek	DSI-1	20525	836.5	22.26	23.00	1.186	0.08	0.482	0.572
	LTE Band 5-Ant 2	10M	QPSK	25	0	Right Cheek	DSI-1	20525	836.5	21.94	23.00	1.276	0.03	0.447	0.571
	LTE Band 5-Ant 2	10M	QPSK	1	0	Right Tilted	DSI-1	20525	836.5	22.26	23.00	1.186	0.05	0.385	0.457
	LTE Band 5-Ant 2	10M	QPSK	25	0	Right Tilted	DSI-1	20525	836.5	21.94	23.00	1.276	-0.01	0.391	0.499
	LTE Band 5-Ant 2	10M	QPSK	1	0	Left Cheek	DSI-1	20525	836.5	22.26	23.00	1.186	0.08	0.372	0.441
	LTE Band 5-Ant 2	10M	QPSK	25	0	Left Cheek	DSI-1	20525	836.5	21.94	23.00	1.276	0.09	0.373	0.476
	LTE Band 5-Ant 2	10M	QPSK	1	0	Left Tilted	DSI-1	20525	836.5	22.26	23.00	1.186	0.04	0.288	0.342
	LTE Band 5-Ant 2	10M	QPSK	25	0	Left Tilted	DSI-1	20525	836.5	21.94	23.00	1.276	-0.05	0.291	0.371
	LTE Band 4-Ant 1	20M	QPSK	1	0	Right Cheek	DSI-1	20175	1732.5	24.19	25.50	1.352	0.02	0.079	0.107
	LTE Band 4-Ant 1	20M	QPSK	50	0	Right Cheek	DSI-1	20175	1732.5	23.28	24.50	1.324	0.03	0.065	0.086
	LTE Band 4-Ant 1	20M	QPSK	1	0	Right Tilted	DSI-1	20175	1732.5	24.19	25.50	1.352	0.05	0.053	0.072
	LTE Band 4-Ant 1	20M	QPSK	50	0	Right Tilted	DSI-1	20175	1732.5	23.28	24.50	1.324	-0.02	0.042	0.056
	LTE Band 4-Ant 1	20M	QPSK	1	0	Left Cheek	DSI-1	20175	1732.5	24.19	25.50	1.352	0.04	0.047	0.064
	LTE Band 4-Ant 1	20M	QPSK	50	0	Left Cheek	DSI-1	20175	1732.5	23.28	24.50	1.324	0.03	0.040	0.053
	LTE Band 4-Ant 1	20M	QPSK	1	0	Left Tilted	DSI-1	20175	1732.5	24.19	25.50	1.352	-0.01	0.035	0.047
	LTE Band 4-Ant 1	20M	QPSK	50	0	Left Tilted	DSI-1	20175	1732.5	23.28	24.50	1.324	0.09	0.032	0.042
	LTE Band 4-Ant 2	20M	QPSK	1	0	Right Cheek	DSI-1	20175	1732.5	15.75	17.00	1.334	0.03	0.360	0.480
	LTE Band 4-Ant 2	20M	QPSK	50	0	Right Cheek	DSI-1	20175	1732.5	15.50	17.00	1.413	0.01	0.386	0.545
07	LTE Band 4-Ant 2	20M	QPSK	1	0	Right Tilted	DSI-1	20175	1732.5	15.75	17.00	1.334	0.1	0.446	0.595
	LTE Band 4-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	20175	1732.5	15.50	17.00	1.413	-0.05	0.420	0.593
	LTE Band 4-Ant 2	20M	QPSK	1	0	Left Cheek	DSI-1	20175	1732.5	15.75	17.00	1.334	0.01	0.189	0.252
	LTE Band 4-Ant 2	20M	QPSK	50	0	Left Cheek	DSI-1	20175	1732.5	15.50	17.00	1.413	0.06	0.184	0.260
	LTE Band 4-Ant 2	20M	QPSK	1	0	Left Tilted	DSI-1	20175	1732.5	15.75	17.00	1.334	-0.04	0.255	0.340
	LTE Band 4-Ant 2	20M	QPSK	50	0	Left Tilted	DSI-1	20175	1732.5	15.50	17.00	1.413	0.07	0.274	0.387
	LTE Band 2-Ant 1	20M	QPSK	1	0	Right Cheek	DSI-1	18900	1880	24.00	25.50	1.413	0.05	0.198	0.280
	LTE Band 2-Ant 1	20M	QPSK	50	0	Right Cheek	DSI-1	18900	1880	23.10	24.50	1.380	0.03	0.149	0.206
	LTE Band 2-Ant 1	20M	QPSK	1	0	Right Tilted	DSI-1	18900	1880	24.00	25.50	1.413	0.05	0.105	0.148
	LTE Band 2-Ant 1	20M	QPSK	50	0	Right Tilted	DSI-1	18900	1880	23.10	24.50	1.380	0.01	0.082	0.113
	LTE Band 2-Ant 1	20M	QPSK	1	0	Left Cheek	DSI-1	18900	1880	24.00	25.50	1.413	-0.05	0.106	0.150
	LTE Band 2-Ant 1	20M	QPSK	50	0	Left Cheek	DSI-1	18900	1880	23.10	24.50	1.380	0.03	0.087	0.120
	LTE Band 2-Ant 1	20M	QPSK	1	0	Left Tilted	DSI-1	18900	1880	24.00	25.50	1.413	0.09	0.115	0.162
	LTE Band 2-Ant 1	20M	QPSK	50	0	Left Tilted	DSI-1	18900	1880	23.10	24.50	1.380	0.04	0.094	0.130
	LTE Band 2-Ant 2	20M	QPSK	1	0	Right Cheek	DSI-1	18900	1880	14.98	15.00	1.005	0.03	0.744	0.747
	LTE Band 2-Ant 2	20M	QPSK	50	0	Right Cheek	DSI-1	18900	1880	14.69	15.00	1.074	0.01	0.689	0.740
	LTE Band 2-Ant 2	20M	QPSK	1	0	Right Tilted	DSI-1	18900	1880	14.98	15.00	1.005	-0.03	0.782	0.786
	LTE Band 2-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	18900	1880	14.69	15.00	1.074	-0.06	0.816	0.876
	LTE Band 2-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	18700	1860	14.47	15.00	1.130	-0.02	0.788	0.890
08	LTE Band 2-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	19100	1900	14.67	15.00	1.079	-0.05	0.881	0.951
	LTE Band 2-Ant 2	20M	QPSK	100	0	Right Tilted	DSI-1	18900	1880	14.61	15.00	1.094	0.08	0.803	0.878
	LTE Band 2-Ant 2	20M	QPSK	1	0	Left Cheek	DSI-1	18900	1880	14.98	15.00	1.005	0.05	0.380	0.382
	LTE Band 2-Ant 2	20M	QPSK	50	0	Left Cheek	DSI-1	18900	1880	14.69	15.00	1.074	-0.07	0.365	0.392
	LTE Band 2-Ant 2	20M	QPSK	1	0	Left Tilted	DSI-1	18900	1880	14.98	15.00	1.005	0.02	0.479	0.481
	LTE Band 2-Ant 2	20M	QPSK	50	0	Left Tilted	DSI-1	18900	1880	14.69	15.00	1.074	0.05	0.454	0.488
	LTE Band 7-Ant 1	20M	QPSK	1	0	Right Cheek	DSI-1	21100	2535	24.21	25.50	1.346	0.05	0.161	0.217
	LTE Band 7-Ant 1	20M	QPSK	50	0	Right Cheek	DSI-1	21100	2535	23.25	24.50	1.334	-0.09	0.130	0.173



FCC SAR Test Report

Report No. : FA113013

	LTE Band 7-Ant 1	20M	QPSK	1	0	Right Tilted	DSI-1	21100	2535	24.21	25.50	1.346	0.11	0.133	0.179
	LTE Band 7-Ant 1	20M	QPSK	50	0	Right Tilted	DSI-1	21100	2535	23.25	24.50	1.334	0.01	0.101	0.135
	LTE Band 7-Ant 1	20M	QPSK	1	0	Left Cheek	DSI-1	21100	2535	24.21	25.50	1.346	0.06	0.242	0.326
	LTE Band 7-Ant 1	20M	QPSK	50	0	Left Cheek	DSI-1	21100	2535	23.25	24.50	1.334	0.05	0.202	0.269
	LTE Band 7-Ant 1	20M	QPSK	1	0	Left Tilted	DSI-1	21100	2535	24.21	25.50	1.346	0.08	0.191	0.257
	LTE Band 7-Ant 1	20M	QPSK	50	0	Left Tilted	DSI-1	21100	2535	23.25	24.50	1.334	0.01	0.161	0.215
	LTE Band 7-Ant 1 UL CA	20M	QPSK	1	0	Left Cheek	DSI-1	21100+20902	2535+2515.2	24.05	25.50	1.396	0.04	0.221	0.309
	LTE Band 7-Ant 2	20M	QPSK	1	0	Right Cheek	DSI-1	21100	2535	18.99	19.00	1.002	0.01	0.676	0.678
	LTE Band 7-Ant 2	20M	QPSK	50	0	Right Cheek	DSI-1	21100	2535	18.95	19.00	1.012	0.01	0.669	0.677
	LTE Band 7-Ant 2	20M	QPSK	1	0	Right Tilted	DSI-1	21100	2535	18.99	19.00	1.002	0.01	0.773	0.775
	LTE Band 7-Ant 2	20M	QPSK	1	0	Right Tilted	DSI-1	20850	2510	18.60	19.00	1.096	0.08	0.708	0.776
	LTE Band 7-Ant 2	20M	QPSK	1	0	Right Tilted	DSI-1	21350	2560	18.66	19.00	1.081	0.01	0.788	0.852
	LTE Band 7-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	21100	2535	18.95	19.00	1.012	0.01	0.757	0.766
	LTE Band 7-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	20850	2510	18.72	19.00	1.067	0.09	0.763	0.814
09	LTE Band 7-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	21350	2560	18.85	19.00	1.035	-0.08	0.824	0.853
	LTE Band 7-Ant 2	20M	QPSK	100	0	Right Tilted	DSI-1	21100	2535	18.86	19.00	1.033	0.07	0.810	0.837
	LTE Band 7-Ant 2	20M	QPSK	1	0	Left Cheek	DSI-1	21100	2535	18.99	19.00	1.002	-0.03	0.449	0.450
	LTE Band 7-Ant 2	20M	QPSK	50	0	Left Cheek	DSI-1	21100	2535	18.95	19.00	1.012	0.01	0.469	0.474
	LTE Band 7-Ant 2	20M	QPSK	1	0	Left Tilted	DSI-1	21100	2535	18.99	19.00	1.002	0.09	0.559	0.560
	LTE Band 7-Ant 2	20M	QPSK	50	0	Left Tilted	DSI-1	21100	2535	18.95	19.00	1.012	0.06	0.559	0.565
	LTE Band 7-Ant 2 UL CA	20M	QPSK	50	0	Right Tilted	DSI-1	21350+21152	2560+2540.2	18.82	19.00	1.042	-0.09	0.753	0.785



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41-Ant 1	20M	QPSK	1	0	Right Cheek	DSI-1	40670	2598	24.20	25.50	1.349	62.9	1.006	0.07	0.150	0.204
	LTE Band 41-Ant 1	20M	QPSK	50	0	Right Cheek	DSI-1	40670	2598	23.19	24.50	1.352	62.9	1.006	-0.01	0.124	0.169
	LTE Band 41-Ant 1	20M	QPSK	1	0	Right Tilted	DSI-1	40670	2598	24.20	25.50	1.349	62.9	1.006	0.11	0.120	0.163
	LTE Band 41-Ant 1	20M	QPSK	50	0	Right Tilted	DSI-1	40670	2598	23.19	24.50	1.352	62.9	1.006	0.09	0.101	0.137
	LTE Band 41-Ant 1	20M	QPSK	1	0	Left Cheek	DSI-1	40670	2598	24.20	25.50	1.349	62.9	1.006	0.06	0.242	0.328
	LTE Band 38-Ant 1 UL CA	20M	QPSK	1	0	Left Cheek	DSI-1	37901+38099	2585.1+2604.9	23.71	25.50	1.510	62.9	1.006	-0.05	0.184	0.280
	LTE Band 41-Ant 1	20M	QPSK	50	0	Left Cheek	DSI-1	40670	2598	23.19	24.50	1.352	62.9	1.006	0.05	0.200	0.272
	LTE Band 41-Ant 1	20M	QPSK	1	0	Left Tilted	DSI-1	40670	2598	24.20	25.50	1.349	62.9	1.006	0.08	0.180	0.244
	LTE Band 41-Ant 1	20M	QPSK	50	0	Left Tilted	DSI-1	40670	2598	23.19	24.50	1.352	62.9	1.006	0.09	0.150	0.204
	LTE Band 41-Ant 2	20M	QPSK	1	0	Right Cheek	DSI-1	40670	2598	19.85	21.00	1.303	62.9	1.006	0.03	0.623	0.817
	LTE Band 41-Ant 2	20M	QPSK	1	0	Right Cheek	DSI-1	40140	2545	19.53	21.00	1.403	62.9	1.006	-0.01	0.613	0.865
	LTE Band 41-Ant 2	20M	QPSK	1	0	Right Cheek	DSI-1	40400	2571	19.62	21.00	1.374	62.9	1.006	0.05	0.634	0.876
	LTE Band 41-Ant 2	20M	QPSK	1	0	Right Cheek	DSI-1	41140	2645	19.61	21.00	1.377	62.9	1.006	0.01	0.499	0.691
	LTE Band 41-Ant 2	20M	QPSK	50	0	Right Cheek	DSI-1	40670	2598	19.84	21.00	1.306	62.9	1.006	0.01	0.643	0.845
	LTE Band 41-Ant 2	20M	QPSK	50	0	Right Cheek	DSI-1	40140	2545	19.78	21.00	1.324	62.9	1.006	0.11	0.640	0.853
	LTE Band 41-Ant 2	20M	QPSK	50	0	Right Cheek	DSI-1	40400	2571	19.76	21.00	1.330	62.9	1.006	0.09	0.624	0.835
	LTE Band 41-Ant 2	20M	QPSK	50	0	Right Cheek	DSI-1	41140	2645	19.67	21.00	1.358	62.9	1.006	0.08	0.510	0.697
	LTE Band 41-Ant 2	20M	QPSK	100	0	Right Cheek	DSI-1	40670	2598	19.63	21.00	1.371	62.9	1.006	0.01	0.625	0.862
	LTE Band 41-Ant 2	20M	QPSK	1	0	Right Tilted	DSI-1	40670	2598	19.85	21.00	1.303	62.9	1.006	0.07	0.740	0.970
	LTE Band 41-Ant 2	20M	QPSK	1	0	Right Tilted	DSI-1	40140	2545	19.53	21.00	1.403	62.9	1.006	-0.02	0.752	1.061
	LTE Band 41-Ant 2	20M	QPSK	1	0	Right Tilted	DSI-1	40400	2571	19.62	21.00	1.374	62.9	1.006	-0.1	0.770	1.064
	LTE Band 41-Ant 2	20M	QPSK	1	0	Right Tilted	DSI-1	41140	2645	19.61	21.00	1.377	62.9	1.006	-0.05	0.639	0.885
	LTE Band 41-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	40670	2598	19.84	21.00	1.306	62.9	1.006	0.06	0.782	1.028
10	LTE Band 41-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	40140	2545	19.78	21.00	1.324	62.9	1.006	-0.02	0.804	1.071
	LTE Band 38-Ant 2 UL CA	20M	QPSK	50	0	Right Tilted	DSI-1	37901+38099	2585.1+2604.9	19.67	21.00	1.358	62.9	1.006	-0.06	0.692	0.946
	LTE Band 41-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	40400	2571	19.76	21.00	1.330	62.9	1.006	0.04	0.774	1.036
	LTE Band 41-Ant 2	20M	QPSK	50	0	Right Tilted	DSI-1	41140	2645	19.67	21.00	1.358	62.9	1.006	0.08	0.625	0.854
	LTE Band 41-Ant 2	20M	QPSK	100	0	Right Tilted	DSI-1	40670	2598	19.63	21.00	1.371	62.9	1.006	0.01	0.771	1.063
	LTE Band 41-Ant 2	20M	QPSK	1	0	Left Cheek	DSI-1	40670	2598	19.85	21.00	1.303	62.9	1.006	-0.08	0.421	0.552
	LTE Band 41-Ant 2	20M	QPSK	50	0	Left Cheek	DSI-1	40670	2598	19.84	21.00	1.306	62.9	1.006	0.05	0.416	0.547
	LTE Band 41-Ant 2	20M	QPSK	1	0	Left Tilted	DSI-1	40670	2598	19.85	21.00	1.303	62.9	1.006	-0.02	0.572	0.750
	LTE Band 41-Ant 2	20M	QPSK	50	0	Left Tilted	DSI-1	40670	2598	19.84	21.00	1.306	62.9	1.006	0.15	0.583	0.766



<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Receiver On	11	2462	15.79	16.50	1.178	100	1.000	0.02	0.333	0.392
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Receiver On	11	2462	15.79	16.50	1.178	100	1.000	0.05	0.327	0.385
11	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Receiver On	11	2462	15.79	16.50	1.178	100	1.000	0.02	0.836	0.984
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Receiver On	1	2412	15.32	16.50	1.312	100	1.000	0.08	0.573	0.752
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Receiver On	11	2462	15.79	16.50	1.178	100	1.000	-0.01	0.617	0.727

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Cheek	Receiver On	54	5270	8.56	10.00	1.393	92.7	1.079	0.03	0.195	0.293
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	Receiver On	54	5270	8.56	10.00	1.393	92.7	1.079	0.07	0.234	0.352
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	Receiver On	54	5270	8.56	10.00	1.393	92.7	1.079	0.05	0.234	0.352
12	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	Receiver On	54	5270	8.56	10.00	1.393	92.7	1.079	-0.04	0.296	0.445
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Cheek	Receiver On	122	5610	8.96	10.00	1.271	88.19	1.134	0.06	0.252	0.363
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	Receiver On	122	5610	8.96	10.00	1.271	88.19	1.134	-0.01	0.258	0.372
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	Receiver On	122	5610	8.96	10.00	1.271	88.19	1.134	-0.04	0.317	0.457
13	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	Receiver On	122	5610	8.96	10.00	1.271	88.19	1.134	-0.01	0.429	0.618
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	Receiver On	155	5775	8.71	10.00	1.346	88.19	1.134	-0.05	0.271	0.414
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	Receiver On	155	5775	8.71	10.00	1.346	88.19	1.134	-0.1	0.301	0.459
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	Receiver On	155	5775	8.71	10.00	1.346	88.19	1.134	0.02	0.280	0.427
14	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	Receiver On	155	5775	8.71	10.00	1.346	88.19	1.134	-0.06	0.387	0.591

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	Receiver On	0	2402	9.23	10.00	1.194	76.91	1.300	0.05	0.022	0.034
	Bluetooth	1Mbps	Right Tilted	Receiver On	0	2402	9.23	10.00	1.194	76.91	1.300	0.09	0.024	0.037
15	Bluetooth	1Mbps	Left Cheek	Receiver On	0	2402	9.23	10.00	1.194	76.91	1.300	0.03	0.053	0.082
	Bluetooth	1Mbps	Left Tilted	Receiver On	0	2402	9.23	10.00	1.194	76.91	1.300	0.07	0.051	0.079



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
16	GSM 850-Ant 1	GPRS 3 Tx slots	Front	10mm	DSI-3	189	836.4	28.33	29.50	1.309	0.03	0.165	0.216
	GSM 850-Ant 1	GPRS 3 Tx slots	Back	10mm	DSI-3	189	836.4	28.33	29.50	1.309	0.1	0.242	0.317
	GSM 850-Ant 1	GPRS 3 Tx slots	Left Side	10mm	DSI-2	189	836.4	28.33	29.50	1.309	0.07	0.118	0.154
	GSM 850-Ant 1	GPRS 3 Tx slots	Right Side	10mm	DSI-2	189	836.4	28.33	29.50	1.309	0.02	0.160	0.209
	GSM 850-Ant 1	GPRS 3 Tx slots	Bottom Side	10mm	DSI-3	189	836.4	28.33	29.50	1.309	0.09	0.186	0.244
	GSM 850-Ant 2	GPRS 3 Tx slots	Front	10mm	DSI-4	189	836.4	28.33	29.50	1.309	0.03	0.192	0.251
	GSM 850-Ant 2	GPRS 3 Tx slots	Back	10mm	DSI-4	189	836.4	28.33	29.50	1.309	-0.04	0.199	0.261
	GSM 850-Ant 2	GPRS 3 Tx slots	Right Side	10mm	DSI-2	189	836.4	28.33	29.50	1.309	0.06	0.091	0.119
	GSM 850-Ant 2	GPRS 3 Tx slots	Top Side	10mm	DSI-4	189	836.4	28.33	29.50	1.309	0.02	0.154	0.202
	GSM1900-Ant 1	GPRS 1 Tx slots	Front	10mm	DSI-3	661	1880	28.32	29.00	1.169	0.01	0.166	0.194
	GSM1900-Ant 1	GPRS 1 Tx slots	Back	10mm	DSI-3	661	1880	28.32	29.00	1.169	0.1	0.279	0.326
	GSM1900-Ant 1	GPRS 3 Tx slots	Left Side	10mm	DSI-2	661	1880	25.71	26.50	1.199	-0.03	0.116	0.139
	GSM1900-Ant 1	GPRS 3 Tx slots	Right Side	10mm	DSI-2	661	1880	25.71	26.50	1.199	0.02	0.086	0.103
	GSM1900-Ant 1	GPRS 1 Tx slots	Bottom Side	10mm	DSI-3	661	1880	28.32	29.00	1.169	0.03	0.403	0.471
	GSM1900-Ant 1	GPRS 3 Tx slots	Front	15mm	DSI-2	661	1880	25.71	26.50	1.199	-0.11	0.161	0.193
	GSM1900-Ant 1	GPRS 3 Tx slots	Back	19mm	DSI-2	661	1880	25.71	26.50	1.199	-0.07	0.165	0.198
	GSM1900-Ant 1	GPRS 3 Tx slots	Bottom Side	19mm	DSI-2	661	1880	25.71	26.50	1.199	-0.05	0.250	0.300
17	GSM1900-Ant 2	GPRS 4 Tx slots	Front	10mm	DSI-4	661	1880	21.23	22.00	1.194	0.05	0.553	0.660
	GSM1900-Ant 2	GPRS 4 Tx slots	Back	10mm	DSI-4	661	1880	21.23	22.00	1.194	0.01	0.675	0.806
	GSM1900-Ant 2	GPRS 4 Tx slots	Back	10mm	DSI-4	512	1850.2	21.03	22.00	1.250	0.03	0.608	0.760
	GSM1900-Ant 2	GPRS 4 Tx slots	Back	10mm	DSI-4	810	1909.8	21.05	22.00	1.245	0.01	0.629	0.783
	GSM1900-Ant 2	GPRS 3 Tx slots	Right Side	10mm	DSI-2	661	1880	25.71	26.50	1.199	0.07	0.092	0.110
	GSM1900-Ant 2	GPRS 4 Tx slots	Top Side	10mm	DSI-4	661	1880	21.23	22.00	1.194	-0.03	0.681	0.813
	GSM1900-Ant 2	GPRS 4 Tx slots	Top Side	10mm	DSI-4	512	1850.2	21.03	22.00	1.250	-0.02	0.648	0.810
	GSM1900-Ant 2	GPRS 4 Tx slots	Top Side	10mm	DSI-4	810	1909.8	21.05	22.00	1.245	0.05	0.621	0.773
	GSM1900-Ant 2	GPRS 3 Tx slots	Front	15mm	DSI-2	661	1880	25.71	26.50	1.199	0.05	0.385	0.462
	GSM1900-Ant 2	GPRS 3 Tx slots	Back	19mm	DSI-2	661	1880	25.71	26.50	1.199	-0.04	0.263	0.315
	GSM1900-Ant 2	GPRS 3 Tx slots	Top Side	19mm	DSI-2	661	1880	25.71	26.50	1.199	-0.06	0.421	0.505

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
18	WCDMA V-Ant 1	RMC 12.2Kbps	Front	10mm	DSI-3	4182	836.4	23.08	24.00	1.236	0.04	0.112	0.138
	WCDMA V-Ant 1	RMC 12.2Kbps	Back	10mm	DSI-3	4182	836.4	23.08	24.00	1.236	0.02	0.176	0.218
	WCDMA V-Ant 1	RMC 12.2Kbps	Left Side	10mm	DSI-2	4182	836.4	23.08	24.00	1.236	0.08	0.083	0.103
	WCDMA V-Ant 1	RMC 12.2Kbps	Right Side	10mm	DSI-2	4182	836.4	23.08	24.00	1.236	0.03	0.120	0.148
	WCDMA V-Ant 1	RMC 12.2Kbps	Bottom Side	10mm	DSI-3	4182	836.4	23.08	24.00	1.236	0.01	0.136	0.168
	WCDMA V-Ant 2	RMC 12.2Kbps	Front	10mm	DSI-4	4182	836.4	23.08	24.00	1.236	0.07	0.133	0.164
	WCDMA V-Ant 2	RMC 12.2Kbps	Back	10mm	DSI-4	4182	836.4	23.08	24.00	1.236	0.05	0.156	0.193
	WCDMA V-Ant 2	RMC 12.2Kbps	Right Side	10mm	DSI-2	4182	836.4	23.08	24.00	1.236	-0.05	0.092	0.114
	WCDMA V-Ant 2	RMC 12.2Kbps	Top Side	10mm	DSI-4	4182	836.4	23.08	24.00	1.236	-0.01	0.138	0.171
	WCDMA IV-Ant 1	RMC 12.2Kbps	Front	10mm	DSI-3	1413	1732.6	17.48	19.00	1.419	0.07	0.113	0.160
	WCDMA IV-Ant 1	RMC 12.2Kbps	Back	10mm	DSI-3	1413	1732.6	17.48	19.00	1.419	-0.05	0.207	0.294
	WCDMA IV-Ant 1	RMC 12.2Kbps	Left Side	10mm	DSI-2	1413	1732.6	22.97	24.00	1.268	0.03	0.045	0.057
	WCDMA IV-Ant 1	RMC 12.2Kbps	Right Side	10mm	DSI-2	1413	1732.6	22.97	24.00	1.268	0.07	0.047	0.060
	WCDMA IV-Ant 1	RMC 12.2Kbps	Bottom Side	10mm	DSI-3	1413	1732.6	17.48	19.00	1.419	0.09	0.303	0.430
	WCDMA IV-Ant 1	RMC 12.2Kbps	Front	15mm	DSI-2	1413	1732.6	22.97	24.00	1.268	0.02	0.174	0.221
	WCDMA IV-Ant 1	RMC 12.2Kbps	Back	19mm	DSI-2	1413	1732.6	22.97	24.00	1.268	-0.02	0.180	0.228
	WCDMA IV-Ant 1	RMC 12.2Kbps	Bottom Side	19mm	DSI-2	1413	1732.6	22.97	24.00	1.268	0.06	0.288	0.365
	WCDMA IV-Ant 2	RMC 12.2Kbps	Front	10mm	DSI-4	1413	1732.6	14.40	16.00	1.445	0.03	0.065	0.094
	WCDMA IV-Ant 2	RMC 12.2Kbps	Back	10mm	DSI-4	1413	1732.6	14.40	16.00	1.445	0.01	0.061	0.088
	WCDMA IV-Ant 2	RMC 12.2Kbps	Right Side	10mm	DSI-2	1413	1732.6	22.97	24.00	1.268	-	n/a	n/a
	WCDMA IV-Ant 2	RMC 12.2Kbps	Top Side	10mm	DSI-4	1413	1732.6	14.40	16.00	1.445	-0.01	0.120	0.173
	WCDMA IV-Ant 2	RMC 12.2Kbps	Front	15mm	DSI-2	1413	1732.6	22.97	24.00	1.268	0.01	0.192	0.243
	WCDMA IV-Ant 2	RMC 12.2Kbps	Back	19mm	DSI-2	1413	1732.6	22.97	24.00	1.268	-0.03	0.126	0.160
	WCDMA IV-Ant 2	RMC 12.2Kbps	Top Side	19mm	DSI-2	1413	1732.6	22.97	24.00	1.268	0.02	0.217	0.275
	WCDMA II-Ant 1	RMC 12.2Kbps	Front	10mm	DSI-3	9400	1880	18.67	20.00	1.358	0.06	0.193	0.262
	WCDMA II-Ant 1	RMC 12.2Kbps	Back	10mm	DSI-3	9400	1880	18.67	20.00	1.358	-0.09	0.335	0.455
	WCDMA II-Ant 1	RMC 12.2Kbps	Left Side	10mm	DSI-2	9400	1880	23.07	24.00	1.239	0.08	0.183	0.227
	WCDMA II-Ant 1	RMC 12.2Kbps	Right Side	10mm	DSI-2	9400	1880	23.07	24.00	1.239	-0.08	0.124	0.154
	WCDMA II-Ant 1	RMC 12.2Kbps	Bottom Side	10mm	DSI-3	9400	1880	18.67	20.00	1.358	0.09	0.485	0.659
	WCDMA II-Ant 1	RMC 12.2Kbps	Front	15mm	DSI-2	9400	1880	23.07	24.00	1.239	0.01	0.250	0.310
	WCDMA II-Ant 1	RMC 12.2Kbps	Back	19mm	DSI-2	9400	1880	23.07	24.00	1.239	0.09	0.238	0.295
	WCDMA II-Ant 1	RMC 12.2Kbps	Bottom Side	19mm	DSI-2	9400	1880	23.07	24.00	1.239	0.06	0.384	0.476
	WCDMA II-Ant 2	RMC 12.2Kbps	Front	10mm	DSI-4	9400	1880	13.59	15.00	1.384	0.01	0.118	0.163
	WCDMA II-Ant 2	RMC 12.2Kbps	Back	10mm	DSI-4	9400	1880	13.59	15.00	1.384	-0.04	0.130	0.180
	WCDMA II-Ant 2	RMC 12.2Kbps	Right Side	10mm	DSI-2	9400	1880	23.07	24.00	1.239	-0.01	0.077	0.095
	WCDMA II-Ant 2	RMC 12.2Kbps	Top Side	10mm	DSI-4	9400	1880	13.59	15.00	1.384	-0.16	0.260	0.360
	WCDMA II-Ant 2	RMC 12.2Kbps	Front	15mm	DSI-2	9400	1880	23.07	24.00	1.239	0.03	0.440	0.545
	WCDMA II-Ant 2	RMC 12.2Kbps	Back	19mm	DSI-2	9400	1880	23.07	24.00	1.239	0.05	0.328	0.406
	WCDMA II-Ant 2	RMC 12.2Kbps	Top Side	19mm	DSI-2	9400	1880	23.07	24.00	1.239	0.01	0.252	0.312



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5-Ant 1	10M	QPSK	1	0	Front	10mm	DSI-3	20525	836.5	23.59	24.50	1.233	0.03	0.100	0.123
	LTE Band 5-Ant 1	10M	QPSK	25	0	Front	10mm	DSI-3	20525	836.5	23.38	24.50	1.294	0.05	0.099	0.128
	LTE Band 5-Ant 1	10M	QPSK	1	0	Back	10mm	DSI-3	20525	836.5	23.59	24.50	1.233	-0.01	0.151	0.186
	LTE Band 5-Ant 1	10M	QPSK	25	0	Back	10mm	DSI-3	20525	836.5	23.38	24.50	1.294	0.02	0.153	0.198
	LTE Band 5-Ant 1	10M	QPSK	1	0	Left Side	10mm	DSI-2	20525	836.5	24.03	25.50	1.403	0.04	0.088	0.123
	LTE Band 5-Ant 1	10M	QPSK	25	0	Left Side	10mm	DSI-2	20525	836.5	23.05	24.50	1.396	0.09	0.071	0.099
	LTE Band 5-Ant 1	10M	QPSK	1	0	Right Side	10mm	DSI-2	20525	836.5	24.03	25.50	1.403	-0.07	0.134	0.188
	LTE Band 5-Ant 1	10M	QPSK	25	0	Right Side	10mm	DSI-2	20525	836.5	23.05	24.50	1.396	0.05	0.108	0.151
	LTE Band 5-Ant 1	10M	QPSK	1	0	Bottom Side	10mm	DSI-3	20525	836.5	23.59	24.50	1.233	0.01	0.176	0.217
21	LTE Band 5-Ant 1	10M	QPSK	25	0	Bottom Side	10mm	DSI-3	20525	836.5	23.38	24.50	1.294	0.04	0.179	0.232
	LTE Band 5-Ant 1	10M	QPSK	1	0	Front	15mm	DSI-2	20525	836.5	24.03	25.50	1.403	-0.01	0.086	0.121
	LTE Band 5-Ant 1	10M	QPSK	1	0	Back	19mm	DSI-2	20525	836.5	24.03	25.50	1.403	0.02	0.130	0.182
	LTE Band 5-Ant 1	10M	QPSK	1	0	Bottom Side	19mm	DSI-2	20525	836.5	24.03	25.50	1.403	0.01	0.055	0.077
	LTE Band 5-Ant 2	10M	QPSK	1	0	Front	10mm	DSI-4	20525	836.5	23.51	24.50	1.256	0.02	0.139	0.175
	LTE Band 5-Ant 2	10M	QPSK	25	0	Front	10mm	DSI-4	20525	836.5	23.24	24.50	1.337	0.08	0.142	0.190
	LTE Band 5-Ant 2	10M	QPSK	1	0	Back	10mm	DSI-4	20525	836.5	23.51	24.50	1.256	-0.01	0.161	0.202
	LTE Band 5-Ant 2	10M	QPSK	25	0	Back	10mm	DSI-4	20525	836.5	23.24	24.50	1.337	-0.17	0.164	0.219
	LTE Band 5-Ant 2	10M	QPSK	1	0	Right Side	10mm	DSI-2	20525	836.5	24.03	25.50	1.403	0.03	0.113	0.159
	LTE Band 5-Ant 2	10M	QPSK	25	0	Right Side	10mm	DSI-2	20525	836.5	23.05	24.50	1.396	0.08	0.091	0.127
	LTE Band 5-Ant 2	10M	QPSK	1	0	Top Side	10mm	DSI-4	20525	836.5	23.51	24.50	1.256	0.07	0.122	0.153
	LTE Band 5-Ant 2	10M	QPSK	25	0	Top Side	10mm	DSI-4	20525	836.5	23.24	24.50	1.337	0.09	0.121	0.162
	LTE Band 5-Ant 2	10M	QPSK	1	0	Front	15mm	DSI-2	20525	836.5	24.03	25.50	1.403	0.09	0.126	0.177
	LTE Band 5-Ant 2	10M	QPSK	1	0	Back	19mm	DSI-2	20525	836.5	24.03	25.50	1.403	0.02	0.123	0.173
	LTE Band 5-Ant 2	10M	QPSK	1	0	Top Side	19mm	DSI-2	20525	836.5	24.03	25.50	1.403	0.06	0.034	0.048
	LTE Band 4-Ant 1	20M	QPSK	1	0	Front	10mm	DSI-3	20175	1732.5	18.20	19.00	1.202	0.03	0.094	0.113
	LTE Band 4-Ant 1	20M	QPSK	50	0	Front	10mm	DSI-3	20175	1732.5	18.02	19.00	1.253	0.01	0.093	0.117
	LTE Band 4-Ant 1	20M	QPSK	1	0	Back	10mm	DSI-3	20175	1732.5	18.20	19.00	1.202	0.05	0.176	0.212
	LTE Band 4-Ant 1	20M	QPSK	50	0	Back	10mm	DSI-3	20175	1732.5	18.02	19.00	1.253	0.15	0.179	0.224
	LTE Band 4-Ant 1	20M	QPSK	1	0	Left Side	10mm	DSI-2	20175	1732.5	24.19	25.50	1.352	-0.02	0.051	0.069
	LTE Band 4-Ant 1	20M	QPSK	50	0	Left Side	10mm	DSI-2	20175	1732.5	23.28	24.50	1.324	0.01	0.043	0.057
	LTE Band 4-Ant 1	20M	QPSK	1	0	Right Side	10mm	DSI-2	20175	1732.5	24.19	25.50	1.352	0.06	0.057	0.077
	LTE Band 4-Ant 1	20M	QPSK	50	0	Right Side	10mm	DSI-2	20175	1732.5	23.28	24.50	1.324	0.03	0.051	0.068
22	LTE Band 4-Ant 1	20M	QPSK	1	0	Bottom Side	10mm	DSI-3	20175	1732.5	18.20	19.00	1.202	0.02	0.284	0.341
	LTE Band 4-Ant 1	20M	QPSK	50	0	Bottom Side	10mm	DSI-3	20175	1732.5	18.02	19.00	1.253	0.04	0.271	0.340
	LTE Band 4-Ant 1	20M	QPSK	1	0	Front	15mm	DSI-2	20175	1732.5	24.19	25.50	1.352	-0.09	0.083	0.112
	LTE Band 4-Ant 1	20M	QPSK	1	0	Back	19mm	DSI-2	20175	1732.5	24.19	25.50	1.352	0.01	0.155	0.210
	LTE Band 4-Ant 1	20M	QPSK	1	0	Bottom Side	19mm	DSI-2	20175	1732.5	24.19	25.50	1.352	0.07	0.246	0.333
	LTE Band 4-Ant 2	20M	QPSK	1	0	Front	10mm	DSI-4	20175	1732.5	15.75	17.00	1.334	0.03	0.077	0.103
	LTE Band 4-Ant 2	20M	QPSK	50	0	Front	10mm	DSI-4	20175	1732.5	15.50	17.00	1.413	0.04	0.077	0.109
	LTE Band 4-Ant 2	20M	QPSK	1	0	Back	10mm	DSI-4	20175	1732.5	15.75	17.00	1.334	0.05	0.072	0.096
	LTE Band 4-Ant 2	20M	QPSK	50	0	Back	10mm	DSI-4	20175	1732.5	15.50	17.00	1.413	-0.03	0.071	0.100
	LTE Band 4-Ant 2	20M	QPSK	1	0	Right Side	10mm	DSI-2	20175	1732.5	24.19	25.50	1.352	-0.04	0.042	0.057
	LTE Band 4-Ant 2	20M	QPSK	50	0	Right Side	10mm	DSI-2	20175	1732.5	23.28	24.50	1.324	-	n/a	n/a
	LTE Band 4-Ant 2	20M	QPSK	1	0	Top Side	10mm	DSI-4	20175	1732.5	15.75	17.00	1.334	-0.03	0.138	0.184
	LTE Band 4-Ant 2	20M	QPSK	50	0	Top Side	10mm	DSI-4	20175	1732.5	15.50	17.00	1.413	0.01	0.136	0.192
	LTE Band 4-Ant 2	20M	QPSK	1	0	Front	15mm	DSI-2	20175	1732.5	24.19	25.50	1.352	0.05	0.249	0.337
	LTE Band 4-Ant 2	20M	QPSK	50	0	Front	15mm	DSI-2	20175	1732.5	23.28	24.50	1.324	0.01	0.188	0.249
	LTE Band 4-Ant 2	20M	QPSK	1	0	Back	19mm	DSI-2	20175	1732.5	24.19	25.50	1.352	0.02	0.165	0.223
	LTE Band 4-Ant 2	20M	QPSK	50	0	Back	19mm	DSI-2	20175	1732.5	23.28	24.50	1.324	0.09	0.133	0.176
	LTE Band 4-Ant 2	20M	QPSK	1	0	Top Side	19mm	DSI-2	20175	1732.5	24.19	25.50	1.352	-0.03	0.251	0.339
	LTE Band 4-Ant 2	20M	QPSK	50	0	Top Side	19mm	DSI-2	20175	1732.5	23.28	24.50	1.324	0.05	0.201	0.266
	LTE Band 2-Ant 1	20M	QPSK	1	0	Front	10mm	DSI-3	18900	1880	19.09	20.00	1.233	0.03	0.165	0.203
	LTE Band 2-Ant 1	20M	QPSK	50	0	Front	10mm	DSI-3	18900	1880	19.08	20.00	1.236	0.01	0.160	0.198
	LTE Band 2-Ant 1	20M	QPSK	1	0	Back	10mm	DSI-3	18900	1880	19.09	20.00	1.233	-0.02	0.277	0.342
	LTE Band 2-Ant 1	20M	QPSK	50	0	Back	10mm	DSI-3	18900	1880	19.08	20.00	1.236	0.05	0.276	0.341



FCC SAR Test Report

Report No. : FA113013

	LTE Band 2-Ant 1	20M	QPSK	1	0	Left Side	10mm	DSI-2	18900	1880	24.00	25.50	1.413	0.07	0.201	0.284
	LTE Band 2-Ant 1	20M	QPSK	50	0	Left Side	10mm	DSI-2	18900	1880	23.10	24.50	1.380	-0.06	0.163	0.225
	LTE Band 2-Ant 1	20M	QPSK	1	0	Right Side	10mm	DSI-2	18900	1880	24.00	25.50	1.413	0.02	0.148	0.209
	LTE Band 2-Ant 1	20M	QPSK	50	0	Right Side	10mm	DSI-2	18900	1880	23.10	24.50	1.380	0.01	0.119	0.164
	LTE Band 2-Ant 1	20M	QPSK	1	0	Bottom Side	10mm	DSI-3	18900	1880	19.09	20.00	1.233	-0.03	0.439	0.541
	LTE Band 2-Ant 1	20M	QPSK	50	0	Bottom Side	10mm	DSI-3	18900	1880	19.08	20.00	1.236	0.07	0.443	0.548
	LTE Band 2-Ant 1	20M	QPSK	1	0	Front	15mm	DSI-2	18900	1880	24.00	25.50	1.413	-0.04	0.338	0.477
	LTE Band 2-Ant 1	20M	QPSK	50	0	Front	15mm	DSI-2	18900	1880	23.10	24.50	1.380	0.09	0.271	0.374
	LTE Band 2-Ant 1	20M	QPSK	1	0	Back	19mm	DSI-2	18900	1880	24.00	25.50	1.413	0.01	0.305	0.431
	LTE Band 2-Ant 1	20M	QPSK	50	0	Back	19mm	DSI-2	18900	1880	23.10	24.50	1.380	-0.01	0.238	0.329
	LTE Band 2-Ant 1	20M	QPSK	1	0	Bottom Side	19mm	DSI-2	18900	1880	24.00	25.50	1.413	0.01	0.482	0.681
	LTE Band 2-Ant 1	20M	QPSK	50	0	Bottom Side	19mm	DSI-2	18900	1880	23.10	24.50	1.380	0.06	0.378	0.522
	LTE Band 2-Ant 2	20M	QPSK	1	0	Front	10mm	DSI-4	18900	1880	14.98	16.00	1.265	0.03	0.161	0.204
	LTE Band 2-Ant 2	20M	QPSK	50	0	Front	10mm	DSI-4	18900	1880	14.69	16.00	1.352	0.05	0.162	0.219
	LTE Band 2-Ant 2	20M	QPSK	1	0	Back	10mm	DSI-4	18900	1880	14.98	16.00	1.265	-0.01	0.177	0.224
	LTE Band 2-Ant 2	20M	QPSK	50	0	Back	10mm	DSI-4	18900	1880	14.69	16.00	1.352	0.08	0.175	0.237
	LTE Band 2-Ant 2	20M	QPSK	1	0	Right Side	10mm	DSI-2	18900	1880	24.00	25.50	1.413	0.03	0.101	0.143
	LTE Band 2-Ant 2	20M	QPSK	50	0	Right Side	10mm	DSI-2	18900	1880	23.10	24.50	1.380	0.04	0.084	0.116
	LTE Band 2-Ant 2	20M	QPSK	1	0	Top Side	10mm	DSI-4	18900	1880	14.98	16.00	1.265	-0.02	0.336	0.425
	LTE Band 2-Ant 2	20M	QPSK	50	0	Top Side	10mm	DSI-4	18900	1880	14.69	16.00	1.352	-0.03	0.337	0.456
	LTE Band 2-Ant 2	20M	QPSK	1	0	Front	15mm	DSI-2	18900	1880	24.00	25.50	1.413	0.03	0.531	0.750
	LTE Band 2-Ant 2	20M	QPSK	50	0	Front	15mm	DSI-2	18900	1880	23.10	24.50	1.380	0.02	0.300	0.414
	LTE Band 2-Ant 2	20M	QPSK	1	0	Back	19mm	DSI-2	18900	1880	24.00	25.50	1.413	0.01	0.368	0.520
	LTE Band 2-Ant 2	20M	QPSK	50	0	Back	19mm	DSI-2	18900	1880	23.10	24.50	1.380	0.09	0.302	0.417
23	LTE Band 2-Ant 2	20M	QPSK	1	0	Top Side	19mm	DSI-2	18900	1880	24.00	25.50	1.413	0.03	0.708	1.000
	LTE Band 2-Ant 2	20M	QPSK	1	0	Top Side	19mm	DSI-2	18700	1860	23.84	25.50	1.466	-0.01	0.656	0.961
	LTE Band 2-Ant 2	20M	QPSK	1	0	Top Side	19mm	DSI-2	19100	1900	23.72	25.50	1.507	0.03	0.611	0.921
	LTE Band 2-Ant 2	20M	QPSK	50	0	Top Side	19mm	DSI-2	18900	1880	23.10	24.50	1.380	-0.02	0.566	0.781
	LTE Band 2-Ant 2	20M	QPSK	100	0	Top Side	19mm	DSI-2	18900	1880	23.00	24.50	1.413	0.09	0.613	0.866
	LTE Band 7-Ant 1	20M	QPSK	1	0	Front	10mm	DSI-3	21100	2535	20.15	21.00	1.216	0.03	0.223	0.271
	LTE Band 7-Ant 1	20M	QPSK	50	0	Front	10mm	DSI-3	21100	2535	19.80	21.00	1.318	0.01	0.220	0.290
	LTE Band 7-Ant 1	20M	QPSK	1	0	Back	10mm	DSI-3	21100	2535	20.15	21.00	1.216	-0.05	0.194	0.236
	LTE Band 7-Ant 1	20M	QPSK	50	0	Back	10mm	DSI-3	21100	2535	19.80	21.00	1.318	0.07	0.189	0.249
	LTE Band 7-Ant 1	20M	QPSK	1	0	Left Side	10mm	DSI-2	21100	2535	24.21	25.50	1.346	0.03	0.234	0.315
	LTE Band 7-Ant 1	20M	QPSK	50	0	Left Side	10mm	DSI-2	21100	2535	23.25	24.50	1.334	0.04	0.193	0.257
	LTE Band 7-Ant 1	20M	QPSK	1	0	Right Side	10mm	DSI-2	21100	2535	24.21	25.50	1.346	-0.09	0.099	0.133
	LTE Band 7-Ant 1	20M	QPSK	50	0	Right Side	10mm	DSI-2	21100	2535	23.25	24.50	1.334	0.08	0.079	0.105
	LTE Band 7-Ant 1	20M	QPSK	1	0	Bottom Side	10mm	DSI-3	21100	2535	20.15	21.00	1.216	0.05	0.307	0.373
	LTE Band 7-Ant 1	20M	QPSK	50	0	Bottom Side	10mm	DSI-3	21100	2535	19.80	21.00	1.318	-0.04	0.310	0.409
	LTE Band 7-Ant 1 UL CA	20M	QPSK	50	0	Bottom Side	10mm	DSI-3	21100+20902	2535+2515.2	19.58	21.00	1.387	0.05	0.289	0.401
	LTE Band 7-Ant 1	20M	QPSK	1	0	Front	15mm	DSI-2	21100	2535	24.21	25.50	1.346	0.08	0.306	0.412
	LTE Band 7-Ant 1	20M	QPSK	50	0	Front	15mm	DSI-2	21100	2535	23.25	24.50	1.334	0.03	0.238	0.317
	LTE Band 7-Ant 1	20M	QPSK	1	0	Back	19mm	DSI-2	21100	2535	24.21	25.50	1.346	0.01	0.179	0.241
	LTE Band 7-Ant 1	20M	QPSK	1	0	Bottom Side	19mm	DSI-2	21100	2535	24.21	25.50	1.346	0.05	0.295	0.397
	LTE Band 7-Ant 2	20M	QPSK	1	0	Front	10mm	DSI-4	21100	2535	19.89	20.50	1.151	0.03	0.254	0.292
	LTE Band 7-Ant 2	20M	QPSK	50	0	Front	10mm	DSI-4	21100	2535	19.83	20.50	1.167	0.02	0.251	0.293
	LTE Band 7-Ant 2	20M	QPSK	1	0	Back	10mm	DSI-4	21100	2535	19.89	20.50	1.151	-0.13	0.285	0.328
	LTE Band 7-Ant 2	20M	QPSK	50	0	Back	10mm	DSI-4	21100	2535	19.83	20.50	1.167	0.04	0.279	0.326
	LTE Band 7-Ant 2	20M	QPSK	1	0	Right Side	10mm	DSI-2	21100	2535	24.21	25.50	1.346	0.03	0.046	0.062
	LTE Band 7-Ant 2	20M	QPSK	50	0	Right Side	10mm	DSI-2	21100	2535	23.25	24.50	1.334	-	n/a	n/a
24	LTE Band 7-Ant 2	20M	QPSK	1	0	Top Side	10mm	DSI-4	21100	2535	19.89	20.50	1.151	0.01	0.600	0.690
	LTE Band 7-Ant 2	20M	QPSK	50	0	Top Side	10mm	DSI-4	21100	2535	19.83	20.50	1.167	-0.03	0.576	0.672
	LTE Band 7-Ant 2 UL CA	20M	QPSK	1	0	Top Side	10mm	DSI-4	21100+20902	2535+2515.2	19.58	20.50	1.236	0.07	0.535	0.661
	LTE Band 7-Ant 2	20M	QPSK	1	0	Front	15mm	DSI-2	21100	2535	24.21	25.50	1.346	0.02	0.301	0.405
	LTE Band 7-Ant 2	20M	QPSK	50	0	Front	15mm	DSI-2	21100	2535	23.25	24.50	1.334	0.09	0.248	0.331
	LTE Band 7-Ant 2	20M	QPSK	1	0	Back	19mm	DSI-2	21100	2535	24.21	25.50	1.346	0.03	0.170	0.229
	LTE Band 7-Ant 2	20M	QPSK	1	0	Top Side	19mm	DSI-2	21100	2535	24.21	25.50	1.346	0.08	0.380	0.511

Sporton International (Kunshan) Inc.

TEL : +86-512-57900158 / FAX : +86-512-57900958

FCC ID : 2AFZZK7BG

Issued Date : Mar. 17, 2021

Form version. : 200414



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Front	10mm	DSI-3	40670	2598	21.70	23.00	1.349	62.9	1.006	0.01	0.210	0.285
	LTE Band 41-Ant 1	20M	QPSK	50	0	-	Front	10mm	DSI-3	40670	2598	21.61	23.00	1.377	62.9	1.006	-0.07	0.213	0.295
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Back	10mm	DSI-3	40670	2598	21.70	23.00	1.349	62.9	1.006	0.03	0.180	0.244
	LTE Band 41-Ant 1	20M	QPSK	50	0	-	Back	10mm	DSI-3	40670	2598	21.61	23.00	1.377	62.9	1.006	0.04	0.180	0.249
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Left Side	10mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	-0.02	0.155	0.210
	LTE Band 41-Ant 1	20M	QPSK	50	0	-	Left Side	10mm	DSI-2	40670	2598	23.19	24.50	1.352	62.9	1.006	0.03	0.130	0.177
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Right Side	10mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.04	0.067	0.091
	LTE Band 41-Ant 1	20M	QPSK	50	0	-	Right Side	10mm	DSI-2	40670	2598	23.19	24.50	1.352	62.9	1.006	-0.05	0.054	0.073
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Bottom Side	10mm	DSI-3	40670	2598	21.70	23.00	1.349	62.9	1.006	0.09	0.294	0.399
	LTE Band 41-Ant 1	20M	QPSK	50	0	-	Bottom Side	10mm	DSI-3	40670	2598	21.61	23.00	1.377	62.9	1.006	-0.05	0.300	0.416
	LTE Band 38-Ant 1 UL CA	20M	QPSK	50	0	-	Bottom Side	10mm	DSI-3	37901+38099	2585.1+2604.9	21.48	23.00	1.419	62.9	1.006	0.06	0.276	0.394
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Front	15mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.02	0.213	0.289
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Back	19mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.02	0.119	0.161
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Bottom Side	19mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.06	0.208	0.282
	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Front	10mm	DSI-4	40670	2598	21.03	22.00	1.250	62.9	1.006	0.03	0.204	0.257
	LTE Band 41-Ant 2	20M	QPSK	50	0	-	Front	10mm	DSI-4	40670	2598	20.91	22.00	1.285	62.9	1.006	0.01	0.206	0.266
	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Back	10mm	DSI-4	40670	2598	21.03	22.00	1.250	62.9	1.006	0.05	0.226	0.284
	LTE Band 41-Ant 2	20M	QPSK	50	0	-	Back	10mm	DSI-4	40670	2598	20.91	22.00	1.285	62.9	1.006	-0.03	0.228	0.295
	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Right Side	10mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.04	0.028	0.038
	LTE Band 41-Ant 2	20M	QPSK	50	0	-	Right Side	10mm	DSI-2	40670	2598	23.19	24.50	1.352	62.9	1.006	0.08	0.001	0.001
25	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Top Side	10mm	DSI-4	40670	2598	21.03	22.00	1.250	62.9	1.006	0.11	0.467	0.587
	LTE Band 38-Ant 2 UL CA	20M	QPSK	1	0	-	Top Side	10mm	DSI-4	37901+38099	2585.1+2604.9	20.86	22.00	1.300	62.9	1.006	0.05	0.420	0.549
	LTE Band 41-Ant 2	20M	QPSK	50	0	-	Top Side	10mm	DSI-4	40670	2598	20.91	22.00	1.285	62.9	1.006	0.01	0.452	0.584
	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Front	15mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.02	0.166	0.225
	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Back	19mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.01	0.095	0.129
	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Top Side	19mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.05	0.231	0.313



<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Receiver Off	11	2462	17.42	18.50	1.282	100	1.000	0.03	0.119	0.153
26	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Receiver Off	11	2462	17.42	18.50	1.282	100	1.000	-0.05	0.148	0.190
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Receiver Off	11	2462	17.42	18.50	1.282	100	1.000	0.04	0.019	0.024
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Receiver Off	11	2462	17.42	18.50	1.282	100	1.000	0.09	0.070	0.090
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Receiver Off	11	2462	17.42	18.50	1.282	100	1.000	-0.1	0.111	0.142

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11n-HT40 MCS0	Front	10mm	Receiver Off	46	5230	16.08	16.50	1.102	92.7	1.079	0.07	0.168	0.200
	WLAN5.2GHz	802.11n-HT40 MCS0	Back	10mm	Receiver Off	46	5230	16.08	16.50	1.102	92.7	1.079	0.02	0.392	0.466
	WLAN5.2GHz	802.11n-HT40 MCS0	Right Side	10mm	Receiver Off	46	5230	16.08	16.50	1.102	92.7	1.079	0.1	0.149	0.177
27	WLAN5.2GHz	802.11n-HT40 MCS0	Top Side	10mm	Receiver Off	46	5230	16.08	16.50	1.102	92.7	1.079	0.07	0.614	0.730
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	10mm	Receiver Off	155	5775	14.11	14.50	1.095	88.19	1.134	-0.05	0.207	0.257
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	10mm	Receiver Off	155	5775	14.11	14.50	1.095	88.19	1.134	0.09	0.359	0.446
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Receiver Off	155	5775	14.11	14.50	1.095	88.19	1.134	0.07	0.124	0.154
28	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Receiver Off	155	5775	14.11	14.50	1.095	88.19	1.134	0.03	0.607	0.754
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	19mm	Receiver Off	155	5775	14.11	14.50	1.095	88.19	1.134	0.01	0.216	0.268

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Receiver Off	0	2402	9.23	10.00	1.194	76.91	1.300	0.05	0.008	0.013
29	Bluetooth	1Mbps	Back	10mm	Receiver Off	0	2402	9.23	10.00	1.194	76.91	1.300	0.11	0.010	0.015
	Bluetooth	1Mbps	Right Side	10mm	Receiver Off	0	2402	9.23	10.00	1.194	76.91	1.300	-0.06	0.006	0.009
	Bluetooth	1Mbps	Top Side	10mm	Receiver Off	0	2402	9.23	10.00	1.194	76.91	1.300	0.05	0.009	0.014

15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM 850-Ant 1	GPRS 3 Tx slots	Front	10mm	DSI-3	189	836.4	28.33	29.50	1.309	0.03	0.165	0.216
30	GSM 850-Ant 1	GPRS 3 Tx slots	Back	10mm	DSI-3	189	836.4	28.33	29.50	1.309	0.1	0.242	0.317
	GSM 850-Ant 2	GPRS 3 Tx slots	Front	10mm	DSI-4	189	836.4	28.33	29.50	1.309	0.03	0.192	0.251
	GSM 850-Ant 2	GPRS 3 Tx slots	Back	10mm	DSI-4	189	836.4	28.33	29.50	1.309	-0.04	0.199	0.261
	GSM1900-Ant 1	GPRS 1 Tx slots	Front	10mm	DSI-3	661	1880	28.32	29.00	1.169	0.01	0.166	0.194
	GSM1900-Ant 1	GPRS 1 Tx slots	Back	10mm	DSI-3	661	1880	28.32	29.00	1.169	0.1	0.279	0.326
	GSM1900-Ant 1	GPRS 3 Tx slots	Front	15mm	DSI-2	661	1880	25.71	26.50	1.199	-0.11	0.161	0.193
	GSM1900-Ant 1	GPRS 3 Tx slots	Back	19mm	DSI-2	661	1880	25.71	26.50	1.199	-0.07	0.165	0.198
	GSM1900-Ant 2	GPRS 4 Tx slots	Front	10mm	DSI-4	661	1880	21.23	22.00	1.194	0.05	0.553	0.660
31	GSM1900-Ant 2	GPRS 4 Tx slots	Back	10mm	DSI-4	661	1880	21.23	22.00	1.194	0.03	0.675	0.806
	GSM1900-Ant 2	GPRS 4 Tx slots	Back	10mm	DSI-4	512	1850.2	21.03	22.00	1.250	0.03	0.608	0.760
	GSM1900-Ant 2	GPRS 4 Tx slots	Back	10mm	DSI-4	810	1909.8	21.05	22.00	1.245	0.01	0.629	0.783
	GSM1900-Ant 2	GPRS 3 Tx slots	Front	15mm	DSI-2	661	1880	25.71	26.50	1.199	0.05	0.385	0.462
	GSM1900-Ant 2	GPRS 3 Tx slots	Back	19mm	DSI-2	661	1880	25.71	26.50	1.199	-0.04	0.263	0.315

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V-Ant 1	RMC 12.2Kbps	Front	10mm	DSI-3	4182	836.4	23.08	24.00	1.236	0.04	0.112	0.138
32	WCDMA V-Ant 1	RMC 12.2Kbps	Back	10mm	DSI-3	4182	836.4	23.08	24.00	1.236	0.02	0.176	0.218
	WCDMA V-Ant 2	RMC 12.2Kbps	Front	10mm	DSI-4	4182	836.4	23.08	24.00	1.236	0.07	0.133	0.164
	WCDMA V-Ant 2	RMC 12.2Kbps	Back	10mm	DSI-4	4182	836.4	23.08	24.00	1.236	0.05	0.156	0.193
	WCDMA IV-Ant 1	RMC 12.2Kbps	Front	10mm	DSI-3	1413	1732.6	17.48	19.00	1.419	0.07	0.113	0.160
33	WCDMA IV-Ant 1	RMC 12.2Kbps	Back	10mm	DSI-3	1413	1732.6	17.48	19.00	1.419	-0.02	0.207	0.294
	WCDMA IV-Ant 1	RMC 12.2Kbps	Front	15mm	DSI-2	1413	1732.6	22.97	24.00	1.268	0.02	0.174	0.221
	WCDMA IV-Ant 1	RMC 12.2Kbps	Back	19mm	DSI-2	1413	1732.6	22.97	24.00	1.268	-0.02	0.180	0.228
	WCDMA IV-Ant 2	RMC 12.2Kbps	Front	10mm	DSI-4	1413	1732.6	14.40	16.00	1.445	0.03	0.065	0.094
	WCDMA IV-Ant 2	RMC 12.2Kbps	Back	10mm	DSI-4	1413	1732.6	14.40	16.00	1.445	0.01	0.061	0.088
	WCDMA IV-Ant 2	RMC 12.2Kbps	Front	15mm	DSI-2	1413	1732.6	22.97	24.00	1.268	0.01	0.192	0.243
	WCDMA IV-Ant 2	RMC 12.2Kbps	Back	19mm	DSI-2	1413	1732.6	22.97	24.00	1.268	-0.03	0.126	0.160
	WCDMA II-Ant 1	RMC 12.2Kbps	Front	10mm	DSI-3	9400	1880	18.67	20.00	1.358	0.06	0.193	0.262
	WCDMA II-Ant 1	RMC 12.2Kbps	Back	10mm	DSI-3	9400	1880	18.67	20.00	1.358	-0.09	0.335	0.455
	WCDMA II-Ant 1	RMC 12.2Kbps	Front	15mm	DSI-2	9400	1880	23.07	24.00	1.239	0.01	0.250	0.310
	WCDMA II-Ant 1	RMC 12.2Kbps	Back	19mm	DSI-2	9400	1880	23.07	24.00	1.239	0.09	0.238	0.295
	WCDMA II-Ant 2	RMC 12.2Kbps	Front	10mm	DSI-4	9400	1880	13.59	15.00	1.384	0.01	0.118	0.163
	WCDMA II-Ant 2	RMC 12.2Kbps	Back	10mm	DSI-4	9400	1880	13.59	15.00	1.384	-0.04	0.130	0.180
34	WCDMA II-Ant 2	RMC 12.2Kbps	Front	15mm	DSI-2	9400	1880	23.07	24.00	1.239	0.03	0.440	0.545
	WCDMA II-Ant 2	RMC 12.2Kbps	Back	19mm	DSI-2	9400	1880	23.07	24.00	1.239	0.05	0.328	0.406



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5-Ant 1	10M	QPSK	1	0	Front	10mm	DSI-3	20525	836.5	23.59	24.50	1.233	0.03	0.100	0.123
	LTE Band 5-Ant 1	10M	QPSK	25	0	Front	10mm	DSI-3	20525	836.5	23.38	24.50	1.294	0.05	0.099	0.128
	LTE Band 5-Ant 1	10M	QPSK	1	0	Back	10mm	DSI-3	20525	836.5	23.59	24.50	1.233	-0.01	0.151	0.186
	LTE Band 5-Ant 1	10M	QPSK	25	0	Back	10mm	DSI-3	20525	836.5	23.38	24.50	1.294	0.02	0.153	0.198
	LTE Band 5-Ant 1	10M	QPSK	1	0	Front	15mm	DSI-2	20525	836.5	24.03	25.50	1.403	-0.01	0.086	0.121
	LTE Band 5-Ant 1	10M	QPSK	1	0	Back	19mm	DSI-2	20525	836.5	24.03	25.50	1.403	0.02	0.130	0.182
	LTE Band 5-Ant 2	10M	QPSK	1	0	Front	10mm	DSI-4	20525	836.5	23.51	24.50	1.256	0.02	0.139	0.175
	LTE Band 5-Ant 2	10M	QPSK	25	0	Front	10mm	DSI-4	20525	836.5	23.24	24.50	1.337	0.08	0.142	0.190
	LTE Band 5-Ant 2	10M	QPSK	1	0	Back	10mm	DSI-4	20525	836.5	23.51	24.50	1.256	-0.01	0.161	0.202
35	LTE Band 5-Ant 2	10M	QPSK	25	0	Back	10mm	DSI-4	20525	836.5	23.24	24.50	1.337	-0.17	0.164	0.219
	LTE Band 5-Ant 2	10M	QPSK	1	0	Front	15mm	DSI-2	20525	836.5	24.03	25.50	1.403	0.09	0.126	0.177
	LTE Band 5-Ant 2	10M	QPSK	1	0	Back	19mm	DSI-2	20525	836.5	24.03	25.50	1.403	0.02	0.123	0.173
	LTE Band 4-Ant 1	20M	QPSK	1	0	Front	10mm	DSI-3	20175	1732.5	18.20	19.00	1.202	0.03	0.094	0.113
	LTE Band 4-Ant 1	20M	QPSK	50	0	Front	10mm	DSI-3	20175	1732.5	18.02	19.00	1.253	0.01	0.093	0.117
	LTE Band 4-Ant 1	20M	QPSK	1	0	Back	10mm	DSI-3	20175	1732.5	18.20	19.00	1.202	0.05	0.176	0.212
	LTE Band 4-Ant 1	20M	QPSK	50	0	Back	10mm	DSI-3	20175	1732.5	18.02	19.00	1.253	0.15	0.179	0.224
	LTE Band 4-Ant 1	20M	QPSK	1	0	Front	15mm	DSI-2	20175	1732.5	24.19	25.50	1.352	-0.09	0.083	0.112
	LTE Band 4-Ant 1	20M	QPSK	1	0	Back	19mm	DSI-2	20175	1732.5	24.19	25.50	1.352	0.01	0.155	0.210
	LTE Band 4-Ant 2	20M	QPSK	1	0	Front	10mm	DSI-4	20175	1732.5	15.75	17.00	1.334	0.03	0.077	0.103
	LTE Band 4-Ant 2	20M	QPSK	50	0	Front	10mm	DSI-4	20175	1732.5	15.50	17.00	1.413	0.04	0.077	0.109
	LTE Band 4-Ant 2	20M	QPSK	1	0	Back	10mm	DSI-4	20175	1732.5	15.75	17.00	1.334	0.05	0.072	0.096
	LTE Band 4-Ant 2	20M	QPSK	50	0	Back	10mm	DSI-4	20175	1732.5	15.50	17.00	1.413	-0.03	0.071	0.100
36	LTE Band 4-Ant 2	20M	QPSK	1	0	Front	15mm	DSI-2	20175	1732.5	24.19	25.50	1.352	0.05	0.249	0.337
	LTE Band 4-Ant 2	20M	QPSK	50	0	Front	15mm	DSI-2	20175	1732.5	23.28	24.50	1.324	0.01	0.188	0.249
	LTE Band 4-Ant 2	20M	QPSK	1	0	Back	19mm	DSI-2	20175	1732.5	24.19	25.50	1.352	0.02	0.165	0.223
	LTE Band 4-Ant 2	20M	QPSK	50	0	Back	19mm	DSI-2	20175	1732.5	23.28	24.50	1.324	0.09	0.133	0.176
	LTE Band 2-Ant 1	20M	QPSK	1	0	Front	10mm	DSI-3	18900	1880	19.09	20.00	1.233	0.03	0.165	0.203
	LTE Band 2-Ant 1	20M	QPSK	50	0	Front	10mm	DSI-3	18900	1880	19.08	20.00	1.236	0.01	0.160	0.198
	LTE Band 2-Ant 1	20M	QPSK	1	0	Back	10mm	DSI-3	18900	1880	19.09	20.00	1.233	-0.02	0.277	0.342
	LTE Band 2-Ant 1	20M	QPSK	50	0	Back	10mm	DSI-3	18900	1880	19.08	20.00	1.236	0.05	0.276	0.341
	LTE Band 2-Ant 1	20M	QPSK	1	0	Front	15mm	DSI-2	18900	1880	24.00	25.50	1.413	-0.04	0.338	0.477
	LTE Band 2-Ant 1	20M	QPSK	50	0	Front	15mm	DSI-2	18900	1880	23.10	24.50	1.380	0.09	0.271	0.374
	LTE Band 2-Ant 1	20M	QPSK	1	0	Back	19mm	DSI-2	18900	1880	24.00	25.50	1.413	0.01	0.305	0.431
	LTE Band 2-Ant 1	20M	QPSK	50	0	Back	19mm	DSI-2	18900	1880	23.10	24.50	1.380	-0.01	0.238	0.329
	LTE Band 2-Ant 2	20M	QPSK	1	0	Front	10mm	DSI-4	18900	1880	14.98	16.00	1.265	0.03	0.161	0.204
	LTE Band 2-Ant 2	20M	QPSK	50	0	Front	10mm	DSI-4	18900	1880	14.69	16.00	1.352	0.05	0.162	0.219
	LTE Band 2-Ant 2	20M	QPSK	1	0	Back	10mm	DSI-4	18900	1880	14.98	16.00	1.265	-0.01	0.177	0.224
	LTE Band 2-Ant 2	20M	QPSK	50	0	Back	10mm	DSI-4	18900	1880	14.69	16.00	1.352	0.08	0.175	0.237
37	LTE Band 2-Ant 2	20M	QPSK	1	0	Front	15mm	DSI-2	18900	1880	24.00	25.50	1.413	0.03	0.531	0.750
	LTE Band 2-Ant 2	20M	QPSK	50	0	Front	15mm	DSI-2	18900	1880	23.10	24.50	1.380	0.02	0.300	0.414
	LTE Band 2-Ant 2	20M	QPSK	1	0	Back	19mm	DSI-2	18900	1880	24.00	25.50	1.413	0.01	0.368	0.520
	LTE Band 2-Ant 2	20M	QPSK	50	0	Back	19mm	DSI-2	18900	1880	23.10	24.50	1.380	0.09	0.302	0.417
	LTE Band 7-Ant 1	20M	QPSK	1	0	Front	10mm	DSI-3	21100	2535	20.15	21.00	1.216	0.03	0.223	0.271
	LTE Band 7-Ant 1	20M	QPSK	50	0	Front	10mm	DSI-3	21100	2535	19.80	21.00	1.318	0.01	0.220	0.290
	LTE Band 7-Ant 1	20M	QPSK	1	0	Back	10mm	DSI-3	21100	2535	20.15	21.00	1.216	-0.05	0.194	0.236
	LTE Band 7-Ant 1	20M	QPSK	50	0	Back	10mm	DSI-3	21100	2535	19.80	21.00	1.318	0.07	0.189	0.249
	LTE Band 7-Ant 1 UL CA	20M	QPSK	50	0	Front	10mm	DSI-3	21100+20902	2535+2515.2	19.58	21.00	1.387	0.03	0.170	0.236
38	LTE Band 7-Ant 1	20M	QPSK	1	0	Front	15mm	DSI-2	21100	2535	24.21	25.50	1.346	0.08	0.306	0.412
	LTE Band 7-Ant 1	20M	QPSK	50	0	Front	15mm	DSI-2	21100	2535	23.25	24.50	1.334	0.03	0.238	0.317
	LTE Band 7-Ant 1	20M	QPSK	1	0	Back	19mm	DSI-2	21100	2535	24.21	25.50	1.346	0.01	0.179	0.241
	LTE Band 7-Ant 2	20M	QPSK	1	0	Front	10mm	DSI-4	21100	2535	19.89	20.50	1.151	0.03	0.254	0.292
	LTE Band 7-Ant 2	20M	QPSK	50	0	Front	10mm	DSI-4	21100	2535	19.83	20.50	1.167	0.02	0.251	0.293
	LTE Band 7-Ant 2	20M	QPSK	1	0	Back	10mm	DSI-4	21100	2535	19.89	20.50	1.151	-0.13	0.285	0.328
	LTE Band 7-Ant 2	20M	QPSK	50	0	Back	10mm	DSI-4	21100	2535	19.83	20.50	1.167	0.04	0.279	0.326
	LTE Band 7-Ant 2 UL CA	20M	QPSK	1	0	Back	10mm	DSI-4	21100+20902	2535+2515.2	19.58	20.50	1.236	0.09	0.238	0.294
	LTE Band 7-Ant 2	20M	QPSK	1	0	Front	15mm	DSI-2	21100	2535	24.21	25.50	1.346	0.02	0.301	0.405
	LTE Band 7-Ant 2	20M	QPSK	50	0	Front	15mm	DSI-2	21100	2535	23.25	24.50	1.334	0.09	0.248	0.331
	LTE Band 7-Ant 2	20M	QPSK	1	0	Back	19mm	DSI-2	21100	2535	24.21	25.50	1.346	0.03	0.170	0.229



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Front	10mm	DSI-3	40670	2598	21.70	23.00	1.349	62.9	1.006	0.01	0.210	0.285
39	LTE Band 41-Ant 1	20M	QPSK	50	0	-	Front	10mm	DSI-3	40670	2598	21.61	23.00	1.377	62.9	1.006	0.03	0.213	0.295
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Back	10mm	DSI-3	40670	2598	21.70	23.00	1.349	62.9	1.006	0.03	0.180	0.244
	LTE Band 41-Ant 1	20M	QPSK	50	0	-	Back	10mm	DSI-3	40670	2598	21.61	23.00	1.377	62.9	1.006	0.04	0.180	0.249
	LTE Band 38-Ant 1 UL CA	20M	QPSK	50	0	-	Front	10mm	DSI-3	37901+38099	2585.1+2604.9	21.48	23.00	1.419	62.9	1.006	-0.02	0.178	0.254
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Front	15mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.02	0.213	0.289
	LTE Band 41-Ant 1	20M	QPSK	1	0	-	Back	19mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.02	0.119	0.161
	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Front	10mm	DSI-4	40670	2598	21.03	22.00	1.250	62.9	1.006	0.03	0.204	0.257
	LTE Band 41-Ant 2	20M	QPSK	50	0	-	Front	10mm	DSI-4	40670	2598	20.91	22.00	1.285	62.9	1.006	0.01	0.206	0.266
	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Back	10mm	DSI-4	40670	2598	21.03	22.00	1.250	62.9	1.006	0.05	0.226	0.284
	LTE Band 41-Ant 2	20M	QPSK	50	0	-	Back	10mm	DSI-4	40670	2598	20.91	22.00	1.285	62.9	1.006	-0.03	0.228	0.295
	LTE Band 38-Ant 2 UL CA	20M	QPSK	50	0	-	Back	10mm	DSI-4	37901+38099	2585.1+2604.9	20.71	22.00	1.346	62.9	1.006	0.03	0.189	0.256
	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Front	15mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.02	0.166	0.225
	LTE Band 41-Ant 2	20M	QPSK	1	0	-	Back	19mm	DSI-2	40670	2598	24.20	25.50	1.349	62.9	1.006	0.01	0.095	0.129

<WLAN2.4G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Receiver Off	11	2462	17.42	18.50	1.282	100	1.000	0.03	0.119	0.153
40	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Receiver Off	11	2462	17.42	18.50	1.282	100	1.000	-0.05	0.148	0.190

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	10mm	Receiver Off	54	5270	15.77	17.50	1.490	92.7	1.079	0.03	0.177	0.284
41	WLAN5.3GHz	802.11n-HT40 MCS0	Back	10mm	Receiver Off	54	5270	15.77	17.50	1.490	92.7	1.079	-0.05	0.426	0.685
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	10mm	Receiver Off	122	5610	15.09	16.50	1.385	88.19	1.134	0.01	0.189	0.297
42	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	10mm	Receiver Off	122	5610	15.09	16.50	1.385	88.19	1.134	-0.08	0.405	0.636
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	10mm	Receiver Off	155	5775	14.11	14.50	1.095	88.19	1.134	-0.05	0.207	0.257
43	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	10mm	Receiver Off	155	5775	14.11	14.50	1.095	88.19	1.134	0.09	0.359	0.446

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Receiver Off	0	2402	9.23	10.00	1.194	76.91	1.300	0.05	0.008	0.013
44	Bluetooth	1Mbps	Back	10mm	Receiver Off	0	2402	9.23	10.00	1.194	76.91	1.300	0.11	0.010	0.015

15.4 Product specific 10g SAR

<WLAN5G SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	0mm	Receiver Off	54	5270	15.77	17.50	1.490	92.7	1.079	0.05	0.424	0.682
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Receiver Off	54	5270	15.77	17.50	1.490	92.7	1.079	-0.03	0.474	0.762
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Side	0mm	Receiver Off	54	5270	15.77	17.50	1.490	92.7	1.079	0.01	0.165	0.265
45	WLAN5.3GHz	802.11n-HT40 MCS0	Top Side	0mm	Receiver Off	54	5270	15.77	17.50	1.490	92.7	1.079	-0.08	0.948	1.524
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	0mm	Receiver Off	122	5610	15.09	16.50	1.385	88.19	1.134	0.09	0.440	0.691
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Receiver Off	122	5610	15.09	16.50	1.385	88.19	1.134	0.01	0.569	0.894
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Receiver Off	122	5610	15.09	16.50	1.385	88.19	1.134	-0.05	0.155	0.243
46	WLAN5.5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Receiver Off	122	5610	15.09	16.50	1.385	88.19	1.134	-0.02	1.380	2.167
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Receiver Off	106	5530	11.71	13.50	1.512	88.19	1.134	0.03	0.611	1.047

15.5 Repeated SAR Measurement

<1g>

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 2-Ant 2	20M	QPSK	50	0	-	Right Tilted	0mm	DSI-1	19100	1900	14.67	15.00	1.079		1.000	-0.05	0.881	1	0.951
2nd	LTE Band 2-Ant 2	20M	QPSK	50	0	-	Right Tilted	0mm	DSI-1	19100	1900	14.67	15.00	1.079		1.000	0.09	0.878	1.003	0.947
1st	LTE Band 7-Ant 2	20M	QPSK	50	0	-	Right Tilted	0mm	DSI-1	21350	2560	18.85	19.00	1.035		1.000	-0.08	0.824	1	0.853
2nd	LTE Band 7-Ant 2	20M	QPSK	50	0	-	Right Tilted	0mm	DSI-1	21350	2560	18.85	19.00	1.035		1.000	0.02	0.815	1.011	0.844
1st	WLAN2.4GHz					802.11b 1Mbps	Left Cheek	0mm	Receiver On	11	2462	15.79	16.50	1.178	100	1.000	0.02	0.836	1	0.984
2nd	WLAN2.4GHz					802.11b 1Mbps	Left Cheek	0mm	Receiver On	11	2462	15.79	16.50	1.178	100	1.000	-0.03	0.811	1.031	0.955

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		Yes
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes
5.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes		Yes
6.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		Yes
7.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		Yes
8.	LTE + WLAN5.3/5.5GHz	Yes	Yes		Yes
9.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes		Yes
10.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
11.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
12.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
13.	GSM Voice + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
14.	GPRS/EDGE + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
15.	WCDMA + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
16.	LTE + WLAN5.3/5.5GHz+Bluetooth	Yes	Yes		Yes
17.	GSM Voice + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes		Yes
18.	GPRS/EDGE + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes	Yes	Yes
19.	WCDMA + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes	Yes	Yes
20.	LTE + WLAN5.2/5.8GHz+Bluetooth	Yes	Yes	Yes	Yes
21.	WLAN5.2/5.8GHz+ Bluetooth	Yes	Yes	Yes	Yes
22.	WLAN5.3/5.5GHz + Bluetooth	Yes	Yes	Yes	Yes
23.	GSM Voice + Bluetooth	Yes	Yes		Yes
24.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes	Yes
25.	WCDMA + Bluetooth	Yes	Yes	Yes	Yes
26.	LTE + Bluetooth	Yes	Yes	Yes	Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), and LTE supports VoLTE function.
- EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications.
- This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- According to the EUT character, WLAN 5GHz and Bluetooth can transmit simultaneously.
WWAN+WLAN5GHz+Bluetooth can represent WWAN+WLAN5GHz or WWAN+ Bluetooth, So no need to do co-located analysis separately.
- Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
- The reported SAR summation is calculated based on the same configuration and test position
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.

16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM 850-Ant 1	Right Cheek	0.224	0.392	0.414	0.034	0.62	0.67
		Right Tilted	0.144	0.385	0.459	0.037	0.53	0.64
		Left Cheek	0.187	0.984	0.457	0.082	1.17	0.73
		Left Tilted	0.113	0.727	0.618	0.079	0.84	0.81
	GSM1900-Ant 1	Right Cheek	0.123	0.392	0.414	0.034	0.52	0.57
		Right Tilted	0.081	0.385	0.459	0.037	0.47	0.58
		Left Cheek	0.094	0.984	0.457	0.082	1.08	0.63
		Left Tilted	0.090	0.727	0.618	0.079	0.82	0.79
WCDMA	WCDMA II-Ant 1	Right Cheek	0.172	0.392	0.414	0.034	0.56	0.62
		Right Tilted	0.093	0.385	0.459	0.037	0.48	0.59
		Left Cheek	0.105	0.984	0.457	0.082	1.09	0.64
		Left Tilted	0.110	0.727	0.618	0.079	0.84	0.81
	WCDMA IV-Ant 1	Right Cheek	0.081	0.392	0.414	0.034	0.47	0.53
		Right Tilted	0.060	0.385	0.459	0.037	0.45	0.56
		Left Cheek	0.048	0.984	0.457	0.082	1.03	0.59
		Left Tilted	0.041	0.727	0.618	0.079	0.77	0.74
	WCDMA V-Ant 1	Right Cheek	0.189	0.392	0.414	0.034	0.58	0.64
		Right Tilted	0.103	0.385	0.459	0.037	0.49	0.60
		Left Cheek	0.156	0.984	0.457	0.082	1.14	0.70
		Left Tilted	0.089	0.727	0.618	0.079	0.82	0.79
LTE	LTE Band 2-Ant 1	Right Cheek	0.280	0.392	0.414	0.034	0.67	0.73
		Right Tilted	0.148	0.385	0.459	0.037	0.53	0.64
		Left Cheek	0.150	0.984	0.457	0.082	1.13	0.69
		Left Tilted	0.162	0.727	0.618	0.079	0.89	0.86
	LTE Band 4-Ant 1	Right Cheek	0.107	0.392	0.414	0.034	0.50	0.56
		Right Tilted	0.072	0.385	0.459	0.037	0.46	0.57
		Left Cheek	0.064	0.984	0.457	0.082	1.05	0.60
		Left Tilted	0.047	0.727	0.618	0.079	0.77	0.74
	LTE Band 5-Ant 1	Right Cheek	0.269	0.392	0.414	0.034	0.66	0.72
		Right Tilted	0.137	0.385	0.459	0.037	0.52	0.63
		Left Cheek	0.223	0.984	0.457	0.082	1.21	0.76
		Left Tilted	0.129	0.727	0.618	0.079	0.86	0.83
	LTE Band 7-Ant 1	Right Cheek	0.217	0.392	0.414	0.034	0.61	0.67
		Right Tilted	0.179	0.385	0.459	0.037	0.56	0.68
		Left Cheek	0.326	0.984	0.457	0.082	1.31	0.87
		Left Tilted	0.257	0.727	0.618	0.079	0.98	0.95
	LTE Band 41-Ant 1	Right Cheek	0.204	0.392	0.414	0.034	0.60	0.65
		Right Tilted	0.163	0.385	0.459	0.037	0.55	0.66
		Left Cheek	0.328	0.984	0.457	0.082	1.31	0.87
		Left Tilted	0.244	0.727	0.618	0.079	0.97	0.94

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM 850-Ant 2	Right Cheek	0.525	0.392	0.414	0.034	0.92	0.97
		Right Tilted	0.448	0.385	0.459	0.037	0.83	0.94
		Left Cheek	0.431	0.984	0.457	0.082	1.42	0.97
		Left Tilted	0.387	0.727	0.618	0.079	1.11	1.08
	GSM1900-Ant 2	Right Cheek	0.551	0.392	0.414	0.034	0.94	1.00
		Right Tilted	0.760	0.385	0.459	0.037	1.15	1.26
		Left Cheek	0.441	0.984	0.457	0.082	1.43	0.98
		Left Tilted	0.555	0.727	0.618	0.079	1.28	1.25
WCDMA	WCDMA II-Ant 2	Right Cheek	0.719	0.392	0.414	0.034	1.11	1.17
		Right Tilted	1.026	0.385	0.459	0.037	1.41	1.52
		Left Cheek	0.440	0.984	0.457	0.082	1.42	0.98
		Left Tilted	0.564	0.727	0.618	0.079	1.29	1.26
	WCDMA IV-Ant 2	Right Cheek	0.473	0.392	0.414	0.034	0.87	0.92
		Right Tilted	0.588	0.385	0.459	0.037	0.97	1.08
		Left Cheek	0.259	0.984	0.457	0.082	1.24	0.80
		Left Tilted	0.344	0.727	0.618	0.079	1.07	1.04
	WCDMA V-Ant 2	Right Cheek	0.550	0.392	0.414	0.034	0.94	1.00
		Right Tilted	0.511	0.385	0.459	0.037	0.90	1.01
		Left Cheek	0.428	0.984	0.457	0.082	1.41	0.97
		Left Tilted	0.328	0.727	0.618	0.079	1.06	1.03
LTE	LTE Band 2-Ant 2	Right Cheek	0.747	0.392	0.414	0.034	1.14	1.20
		Right Tilted	0.951	0.385	0.459	0.037	1.34	1.45
		Left Cheek	0.392	0.984	0.457	0.082	1.38	0.93
		Left Tilted	0.488	0.727	0.618	0.079	1.22	1.19
	LTE Band 4-Ant 2	Right Cheek	0.545	0.392	0.414	0.034	0.94	0.99
		Right Tilted	0.595	0.385	0.459	0.037	0.98	1.09
		Left Cheek	0.260	0.984	0.457	0.082	1.24	0.80
		Left Tilted	0.387	0.727	0.618	0.079	1.11	1.08
	LTE Band 5-Ant 2	Right Cheek	0.572	0.392	0.414	0.034	0.96	1.02
		Right Tilted	0.499	0.385	0.459	0.037	0.88	1.00
		Left Cheek	0.476	0.984	0.457	0.082	1.46	1.02
		Left Tilted	0.371	0.727	0.618	0.079	1.10	1.07
	LTE Band 7-Ant 2	Right Cheek	0.678	0.392	0.414	0.034	1.07	1.13
		Right Tilted	0.853	0.385	0.459	0.037	1.24	1.35
		Left Cheek	0.474	0.984	0.457	0.082	1.46	1.01
		Left Tilted	0.565	0.727	0.618	0.079	1.29	1.26
	LTE Band 41-Ant 2	Right Cheek	0.876	0.392	0.414	0.034	1.27	1.32
		Right Tilted	1.071	0.385	0.459	0.037	1.46	1.57
		Left Cheek	0.552	0.984	0.457	0.082	1.54	1.09
		Left Tilted	0.766	0.727	0.618	0.079	1.49	1.46

16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM 850-Ant 1	Front	0.216	0.153	0.257	0.013	0.37	0.49
		Back	0.317	0.190	0.466	0.015	0.51	0.80
		Left side	0.154	0.024			0.18	0.15
		Right side	0.209	0.090	0.177	0.009	0.30	0.40
		Top side		0.142	0.754	0.014	0.14	0.77
		Bottom side	0.244				0.24	0.24
	GSM1900-Ant 1	Front	0.194	0.153	0.257	0.013	0.35	0.46
		Back	0.326	0.190	0.466	0.015	0.52	0.81
		Left side	0.139	0.024			0.16	0.14
		Right side	0.103	0.090	0.177	0.009	0.19	0.29
		Top side		0.142	0.754	0.014	0.14	0.77
		Bottom side	0.471				0.47	0.47
WCDMA	WCDMA II-Ant 1	Front	0.262	0.153	0.257	0.013	0.42	0.53
		Back	0.455	0.190	0.466	0.015	0.65	0.94
		Left side	0.227	0.024			0.25	0.23
		Right side	0.154	0.090	0.177	0.009	0.24	0.34
		Top side		0.142	0.754	0.014	0.14	0.77
		Bottom side	0.659				0.66	0.66
	WCDMA IV-Ant 1	Front	0.160	0.153	0.257	0.013	0.31	0.43
		Back	0.294	0.190	0.466	0.015	0.48	0.78
		Left side	0.057	0.024			0.08	0.06
		Right side	0.060	0.090	0.177	0.009	0.15	0.25
		Top side		0.142	0.754	0.014	0.14	0.77
		Bottom side	0.430				0.43	0.43
	WCDMA V-Ant 1	Front	0.138	0.153	0.257	0.013	0.29	0.41
		Back	0.218	0.190	0.466	0.015	0.41	0.70
		Left side	0.103	0.024			0.13	0.10
		Right side	0.148	0.090	0.177	0.009	0.24	0.33
		Top side		0.142	0.754	0.014	0.14	0.77
		Bottom side	0.168				0.17	0.17
LTE	LTE Band 2-Ant 1	Front	0.203	0.153	0.257	0.013	0.36	0.47
		Back	0.342	0.190	0.466	0.015	0.53	0.82
		Left side	0.284	0.024			0.31	0.28
		Right side	0.209	0.090	0.177	0.009	0.30	0.40
		Top side		0.142	0.754	0.014	0.14	0.77
		Bottom side	0.548				0.55	0.55
	LTE Band 4-Ant 1	Front	0.117	0.153	0.257	0.013	0.27	0.39
		Back	0.224	0.190	0.466	0.015	0.41	0.71
		Left side	0.069	0.024			0.09	0.07
		Right side	0.077	0.090	0.177	0.009	0.17	0.26
		Top side		0.142	0.754	0.014	0.14	0.77
		Bottom side	0.341				0.34	0.34
	LTE Band 5-Ant 1	Front	0.128	0.153	0.257	0.013	0.28	0.40
		Back	0.198	0.190	0.466	0.015	0.39	0.68



		Left side	0.123	0.024			0.15	0.12
		Right side	0.188	0.090	0.177	0.009	0.28	0.37
		Top side		0.142	0.754	0.014	0.14	0.77
		Bottom side	0.232				0.23	0.23
	LTE Band 7-Ant 1	Front	0.290	0.153	0.257	0.013	0.44	0.56
		Back	0.249	0.190	0.466	0.015	0.44	0.73
		Left side	0.315	0.024			0.34	0.32
		Right side	0.133	0.090	0.177	0.009	0.22	0.32
		Top side		0.142	0.754	0.014	0.14	0.77
		Bottom side	0.409				0.41	0.41
	LTE Band 41-Ant 1	Front	0.295	0.153	0.257	0.013	0.45	0.57
		Back	0.249	0.190	0.466	0.015	0.44	0.73
		Left side	0.210	0.024			0.23	0.21
		Right side	0.091	0.090	0.177	0.009	0.18	0.28
		Top side		0.142	0.754	0.014	0.14	0.77
		Bottom side	0.416				0.42	0.42



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM 850-Ant 2	Front	0.251	0.153	0.257	0.013	0.40	0.52
		Back	0.261	0.190	0.466	0.015	0.45	0.74
		Left side		0.024			0.02	0.00
		Right side	0.119	0.090	0.177	0.009	0.21	0.31
		Top side	0.202	0.142	0.754	0.014	0.34	0.97
		Bottom side					0.00	0.00
	GSM1900-Ant 2	Front	0.660	0.153	0.257	0.013	0.81	0.93
		Back	0.806	0.190	0.466	0.015	1.00	1.29
		Left side		0.024			0.02	0.00
		Right side	0.110	0.090	0.177	0.009	0.20	0.30
		Top side	0.813	0.142	0.754	0.014	0.96	1.58
		Bottom side					0.00	0.00
WCDMA	WCDMA II-Ant 2	Front	0.163	0.153	0.257	0.013	0.32	0.43
		Back	0.180	0.190	0.466	0.015	0.37	0.66
		Left side		0.024			0.02	0.00
		Right side	0.095	0.090	0.177	0.009	0.19	0.28
		Top side	0.360	0.142	0.754	0.014	0.50	1.13
		Bottom side					0.00	0.00
	WCDMA IV-Ant 2	Front	0.094	0.153	0.257	0.013	0.25	0.36
		Back	0.088	0.190	0.466	0.015	0.28	0.57
		Left side		0.024			0.02	0.00
		Right side		0.090	0.177	0.009	0.09	0.19
		Top side	0.173	0.142	0.754	0.014	0.32	0.94
		Bottom side					0.00	0.00
	WCDMA V-Ant 2	Front	0.164	0.153	0.257	0.013	0.32	0.43
		Back	0.193	0.190	0.466	0.015	0.38	0.67
		Left side		0.024			0.02	0.00
		Right side	0.114	0.090	0.177	0.009	0.20	0.30
		Top side	0.171	0.142	0.754	0.014	0.31	0.94
		Bottom side					0.00	0.00
LTE	LTE Band 2-Ant 2	Front	0.219	0.153	0.257	0.013	0.37	0.49
		Back	0.237	0.190	0.466	0.015	0.43	0.72
		Left side		0.024			0.02	0.00
		Right side	0.143	0.090	0.177	0.009	0.23	0.33
		Top side	0.456	0.142	0.754	0.014	0.60	1.22
		Bottom side					0.00	0.00
	LTE Band 4-Ant 2	Front	0.109	0.153	0.257	0.013	0.26	0.38
		Back	0.100	0.190	0.466	0.015	0.29	0.58
		Left side		0.024			0.02	0.00
		Right side	0.057	0.090	0.177	0.009	0.15	0.24
		Top side	0.192	0.142	0.754	0.014	0.33	0.96
		Bottom side					0.00	0.00
	LTE Band 5-Ant 2	Front	0.190	0.153	0.257	0.013	0.34	0.46
		Back	0.219	0.190	0.466	0.015	0.41	0.70
		Left side		0.024			0.02	0.00



FCC SAR Test Report

Report No. : FA113013

		Right side	0.159	0.090	0.177	0.009	0.25	0.35
		Top side	0.162	0.142	0.754	0.014	0.30	0.93
		Bottom side					0.00	0.00
	LTE Band 7-Ant 2	Front	0.293	0.153	0.257	0.013	0.45	0.56
		Back	0.328	0.190	0.466	0.015	0.52	0.81
		Left side		0.024			0.02	0.00
		Right side	0.062	0.090	0.177	0.009	0.15	0.25
		Top side	0.690	0.142	0.754	0.014	0.83	1.46
		Bottom side					0.00	0.00
	LTE Band 41-Ant 2	Front	0.266	0.153	0.257	0.013	0.42	0.54
		Back	0.295	0.190	0.466	0.015	0.49	0.78
		Left side		0.024			0.02	0.00
		Right side	0.038	0.090	0.177	0.009	0.13	0.22
		Top side	0.587	0.142	0.754	0.014	0.73	1.36
		Bottom side					0.00	0.00

16.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM 850-Ant 1	Front	0.216	0.153	0.297	0.013	0.37	0.53
		Back	0.317	0.190	0.685	0.015	0.51	1.02
	GSM1900-Ant 1	Front	0.194	0.153	0.297	0.013	0.35	0.50
		Back	0.326	0.190	0.685	0.015	0.52	1.03
WCDMA	WCDMA II-Ant 1	Front	0.262	0.153	0.297	0.013	0.42	0.57
		Back	0.455	0.190	0.685	0.015	0.65	1.16
	WCDMA IV-Ant 1	Front	0.160	0.153	0.297	0.013	0.31	0.47
		Back	0.294	0.190	0.685	0.015	0.48	0.99
	WCDMA V-Ant 1	Front	0.138	0.153	0.297	0.013	0.29	0.45
		Back	0.218	0.190	0.685	0.015	0.41	0.92
LTE	LTE Band 2-Ant 1	Front	0.203	0.153	0.297	0.013	0.36	0.51
		Back	0.342	0.190	0.685	0.015	0.53	1.04
	LTE Band 4-Ant 1	Front	0.117	0.153	0.297	0.013	0.27	0.43
		Back	0.224	0.190	0.685	0.015	0.41	0.92
	LTE Band 5-Ant 1	Front	0.128	0.153	0.297	0.013	0.28	0.44
		Back	0.198	0.190	0.685	0.015	0.39	0.90
	LTE Band 7-Ant 1	Front	0.290	0.153	0.297	0.013	0.44	0.60
		Back	0.249	0.190	0.685	0.015	0.44	0.95
	LTE Band 41-Ant 1	Front	0.295	0.153	0.297	0.013	0.45	0.61
		Back	0.249	0.190	0.685	0.015	0.44	0.95

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM 850-Ant 2	Front	0.251	0.153	0.297	0.013	0.40	0.56
		Back	0.261	0.190	0.685	0.015	0.45	0.96
	GSM1900-Ant 2	Front	0.660	0.153	0.297	0.013	0.81	0.97
		Back	0.806	0.190	0.685	0.015	1.00	1.51
WCDMA	WCDMA II-Ant 2	Front	0.163	0.153	0.297	0.013	0.32	0.47
		Back	0.180	0.190	0.685	0.015	0.37	0.88
	WCDMA IV-Ant 2	Front	0.094	0.153	0.297	0.013	0.25	0.40
		Back	0.088	0.190	0.685	0.015	0.28	0.79
	WCDMA V-Ant 2	Front	0.164	0.153	0.297	0.013	0.32	0.47
		Back	0.193	0.190	0.685	0.015	0.38	0.89
LTE	LTE Band 2-Ant 2	Front	0.219	0.153	0.297	0.013	0.37	0.53
		Back	0.237	0.190	0.685	0.015	0.43	0.94
	LTE Band 4-Ant 2	Front	0.109	0.153	0.297	0.013	0.26	0.42
		Back	0.100	0.190	0.685	0.015	0.29	0.80
	LTE Band 5-Ant 2	Front	0.190	0.153	0.297	0.013	0.34	0.50
		Back	0.219	0.190	0.685	0.015	0.41	0.92
	LTE Band 7-Ant 2	Front	0.293	0.153	0.297	0.013	0.45	0.60
		Back	0.328	0.190	0.685	0.015	0.52	1.03
	LTE Band 41-Ant 2	Front	0.266	0.153	0.297	0.013	0.42	0.58
		Back	0.295	0.190	0.685	0.015	0.49	1.00



For sensor off

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM1900-Ant 1	Front at 15mm	0.193	0.153	0.297	0.013	0.35	0.50
		Back at 19mm	0.198	0.190	0.685	0.015	0.39	0.90
		Bottom Side at 19mm	0.300				0.30	0.30
WCDMA	WCDMA II-Ant 1	Front at 15mm	0.310	0.153	0.297	0.013	0.46	0.62
		Back at 19mm	0.295	0.190	0.685	0.015	0.49	1.00
		Bottom Side at 19mm	0.476				0.48	0.48
	WCDMA IV-Ant 1	Front at 15mm	0.221	0.153	0.297	0.013	0.37	0.53
		Back at 19mm	0.228	0.190	0.685	0.015	0.42	0.93
		Bottom Side at 19mm	0.365				0.37	0.37
LTE	LTE Band 2-Ant 1	Front at 15mm	0.477	0.153	0.297	0.013	0.63	0.79
		Back at 19mm	0.431	0.190	0.685	0.015	0.62	1.13
		Bottom Side at 19mm	0.681				0.68	0.68
	LTE Band 4-Ant 1	Front at 15mm	0.112	0.153	0.297	0.013	0.27	0.42
		Back at 19mm	0.210	0.190	0.685	0.015	0.40	0.91
		Bottom Side at 19mm	0.333				0.33	0.33
	LTE Band 5-Ant 1	Front at 15mm	0.121	0.153	0.297	0.013	0.27	0.43
		Back at 19mm	0.182	0.190	0.685	0.015	0.37	0.88
		Bottom Side at 19mm	0.077				0.08	0.08
	LTE Band 7-Ant 1	Front at 15mm	0.412	0.153	0.297	0.013	0.57	0.72
		Back at 19mm	0.241	0.190	0.685	0.015	0.43	0.94
		Bottom Side at 19mm	0.397				0.40	0.40
	LTE Band 41-Ant 1	Front at 15mm	0.289	0.153	0.297	0.013	0.44	0.60
		Back at 19mm	0.161	0.190	0.685	0.015	0.35	0.86
		Bottom Side at 19mm	0.282				0.28	0.28

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 3	5GHz WLAN Ant 3	Bluetooth Ant 3		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM1900-Ant 2	Front at 15mm	0.462	0.153	0.297	0.013	0.62	0.77
		Back at 19mm	0.315	0.190	0.685	0.015	0.51	1.02
		Top Side at 19mm	0.505	0.142	0.268	0.014	0.65	0.79
WCDMA	WCDMA II-Ant 2	Front at 15mm	0.545	0.153	0.297	0.013	0.70	0.86
		Back at 19mm	0.406	0.190	0.685	0.015	0.60	1.11
		Top Side at 19mm	0.312	0.142	0.268	0.014	0.45	0.59
	WCDMA IV-Ant 2	Front at 15mm	0.243	0.153	0.297	0.013	0.40	0.55
		Back at 19mm	0.160	0.190	0.685	0.015	0.35	0.86
		Top Side at 19mm	0.275	0.142	0.268	0.014	0.42	0.56
LTE	LTE Band 2-Ant 2	Front at 15mm	0.750	0.153	0.297	0.013	0.90	1.06
		Back at 19mm	0.520	0.190	0.685	0.015	0.71	1.22
		Top Side at 19mm	1.000	0.142	0.268	0.014	1.14	1.28
	LTE Band 4-Ant 2	Front at 15mm	0.337	0.153	0.297	0.013	0.49	0.65
		Back at 19mm	0.223	0.190	0.685	0.015	0.41	0.92
		Top Side at 19mm	0.339	0.142	0.268	0.014	0.48	0.62
	LTE Band 5-Ant 2	Front at 15mm	0.177	0.153	0.297	0.013	0.33	0.49
		Back at 19mm	0.173	0.190	0.685	0.015	0.36	0.87
		Top Side at 19mm	0.048	0.142	0.268	0.014	0.19	0.33
	LTE Band 7-Ant 2	Front at 15mm	0.405	0.153	0.297	0.013	0.56	0.72
		Back at 19mm	0.229	0.190	0.685	0.015	0.42	0.93
		Top Side at 19mm	0.511	0.142	0.268	0.014	0.65	0.79
	LTE Band 41-Ant 2	Front at 15mm	0.225	0.153	0.297	0.013	0.38	0.54
		Back at 19mm	0.129	0.190	0.685	0.015	0.32	0.83
		Top Side at 19mm	0.313	0.142	0.268	0.014	0.46	0.60

Note:

1. Chose Bluetooth/WLAN Front / Back at 10mm as Front at 15 mm, Back at 19 mm SAR to do co-located.
2. Chose Bluetooth/WLAN 2.4GHz Top Side at 10mm as Top Side at 19 mm SAR to do co-located.

Test Engineer : Nick Hu, Hank Chang, Yuankai Kong

17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [12] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [13] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [14] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_835MHz**DUT: D835V2 - SN:4d151**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 41.233$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(10.05, 10.05, 10.05); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.06 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.38 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 2.28 W/kg ; SAR(10 g) = 1.49 W/kg

Maximum value of SAR (measured) = 3.04 W/kg

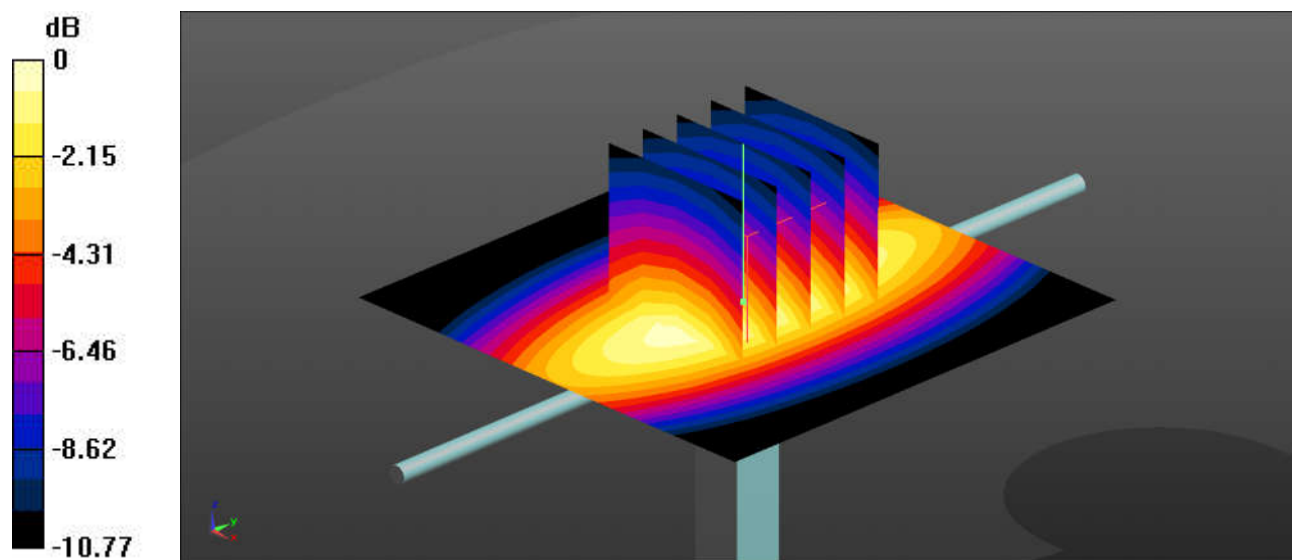

0 dB = $3.04 \text{ W/kg} = 4.83 \text{ dBW/kg}$

System Check_Head_1750MHz**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.061$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.41, 8.41, 8.41); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.9 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 103.3 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 8.9 W/kg; SAR(10 g) = 4.74 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

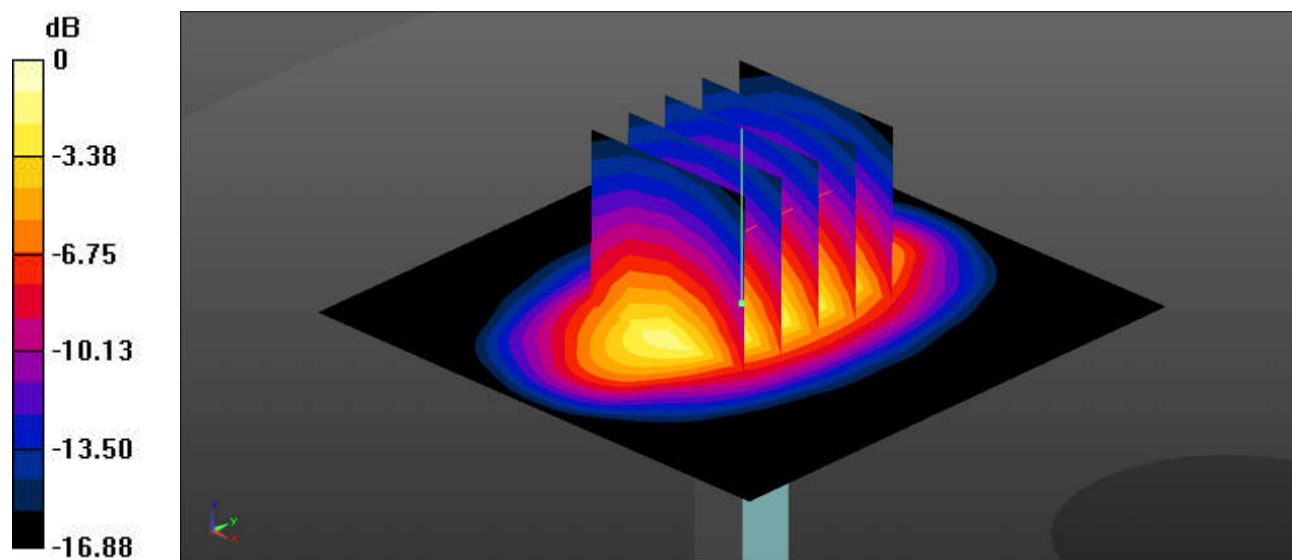

0 dB = 13.9 W/kg = 11.43 dBW/kg

System Check_Head_1900MHz**DUT: D1900V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.034$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.22, 8.22, 8.22); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.4 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 90.74 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 9.81 W/kg; SAR(10 g) = 5.2 W/kg

Maximum value of SAR (measured) = 12.2 W/kg

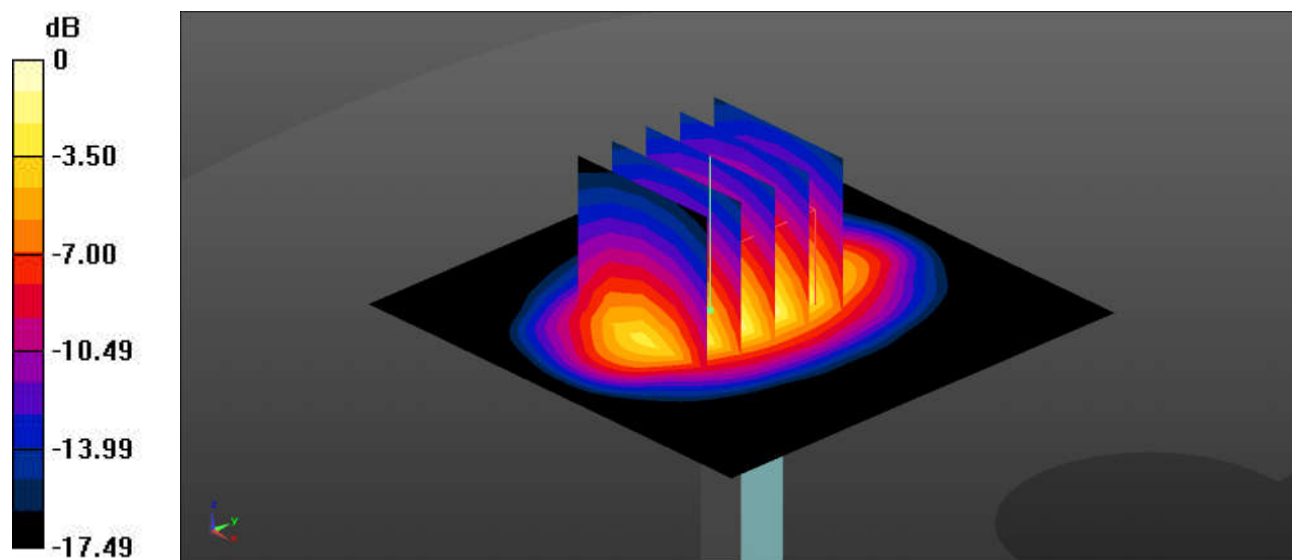

0 dB = 12.2 W/kg = 10.86 dBW/kg

System Check_Head_2450MHz**DUT: D2450V2 - SN:908**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.536$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.57, 7.57, 7.57); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 21.3 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.10 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.17 W/kg

Maximum value of SAR (measured) = 20.3 W/kg

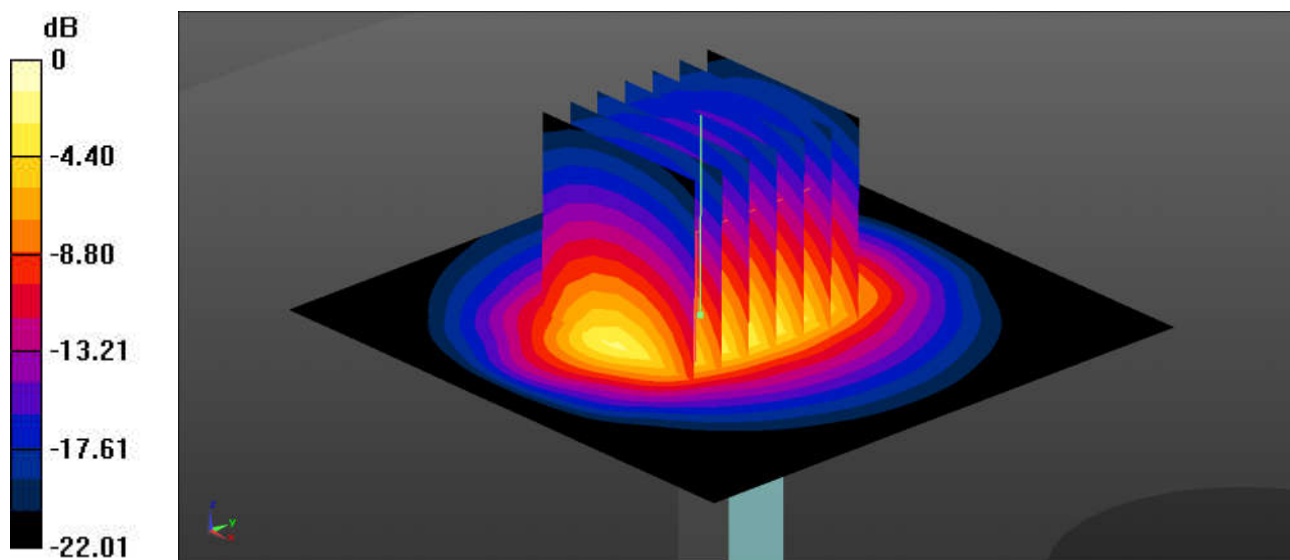

0 dB = 20.3 W/kg = 13.07 dBW/kg

System Check_Head_2600MHz**DUT: D2600V2 - SN:1070**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.025$ S/m; $\epsilon_r = 37.829$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.31, 7.31, 7.31); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 22.6 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.82 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.35 W/kg

Maximum value of SAR (measured) = 22.0 W/kg

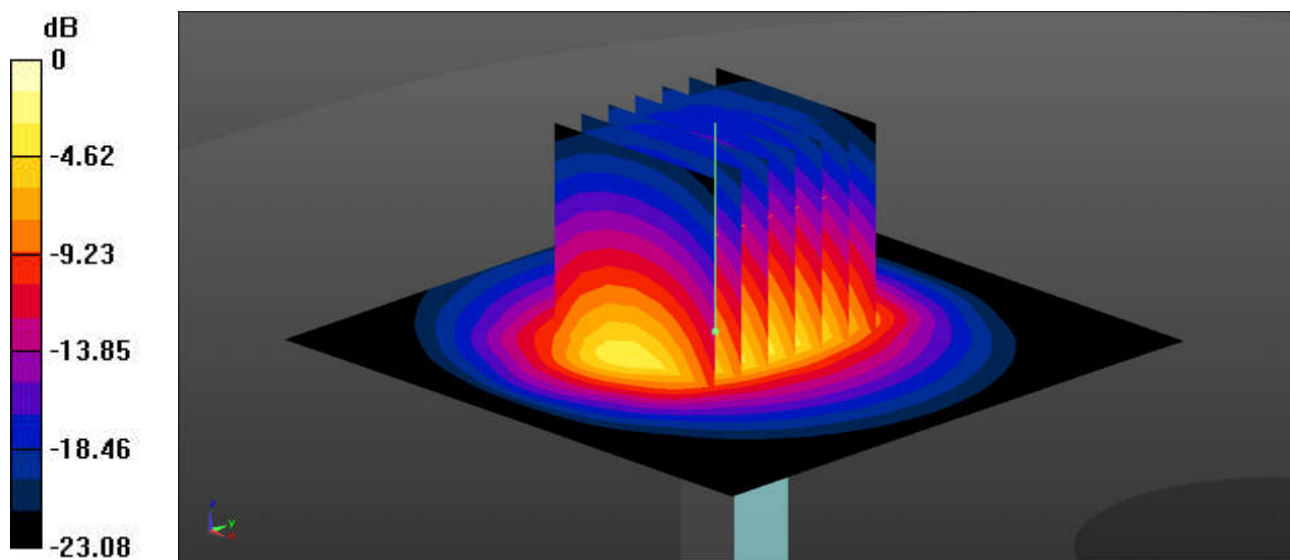

0 dB = 22.0 W/kg = 13.42 dBW/kg

System Check_Head_5250MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.595$ S/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(5.24, 5.24, 5.24); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.2 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.83 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 32.1 W/kg

SAR(1 g) = 8 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

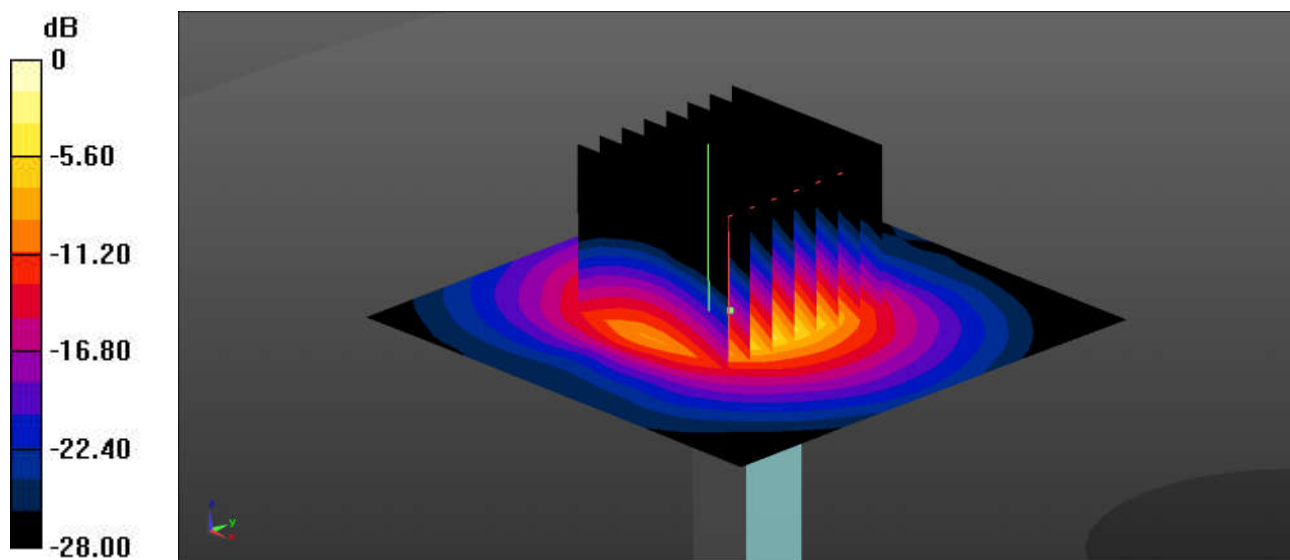

0 dB = 18.8 W/kg = 12.74 dBW/kg

System Check_Head_5600MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.984$ S/m; $\epsilon_r = 35.824$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.65, 4.65, 4.65); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.3 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 41.03 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.25 W/kg

Maximum value of SAR (measured) = 18.3 W/kg

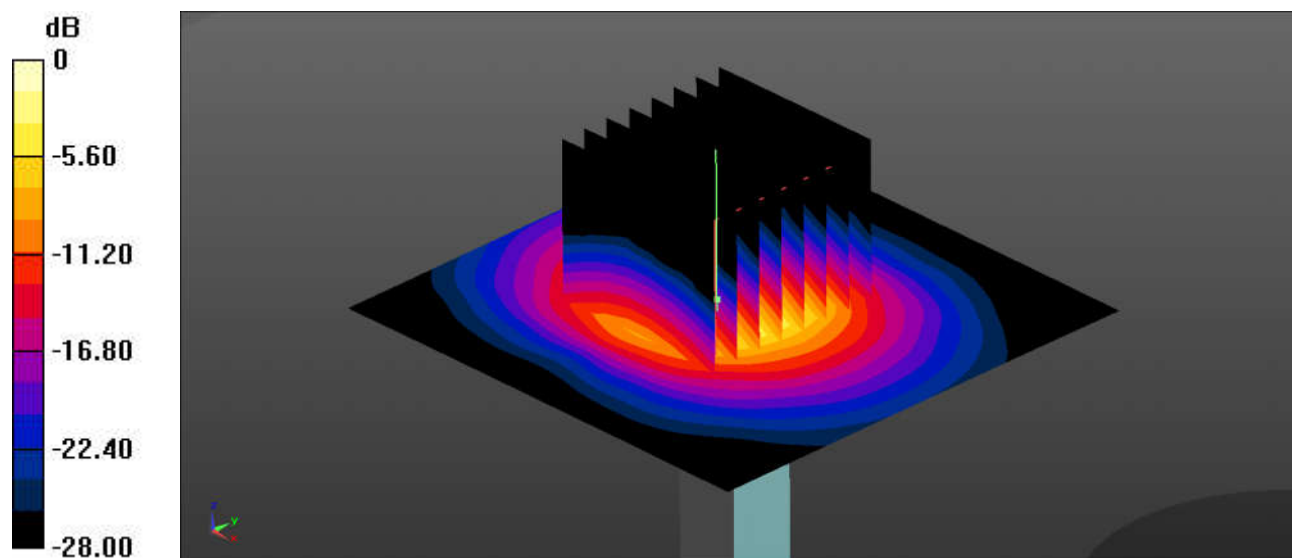

0 dB = 18.3 W/kg = 12.62 dBW/kg

System Check_Head_5750MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 35.569$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.69, 4.69, 4.69); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.2 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 39.38 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.3 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

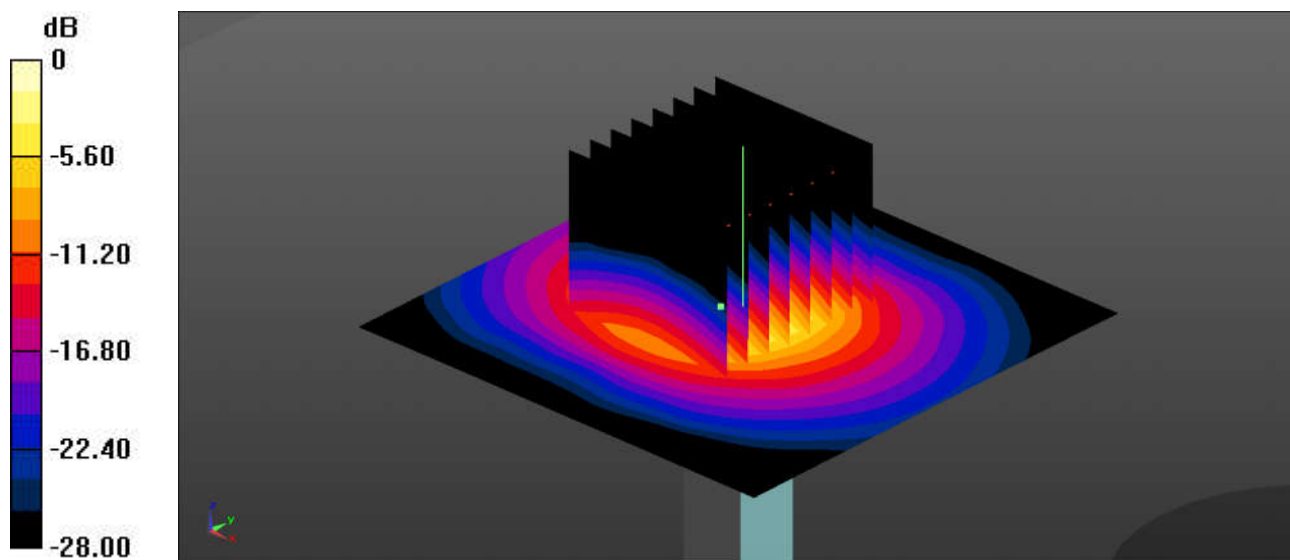

0 dB = 18.2 W/kg = 12.60 dBW/kg

System Check_Head_835MHz**DUT: D835V2 - SN:4d151**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_850 Medium parameters used: $f = 835$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 40.844$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(10.05, 10.05, 10.05); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.30 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.37 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.81 W/kg

SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.64 W/kg

Maximum value of SAR (measured) = 3.36 W/kg

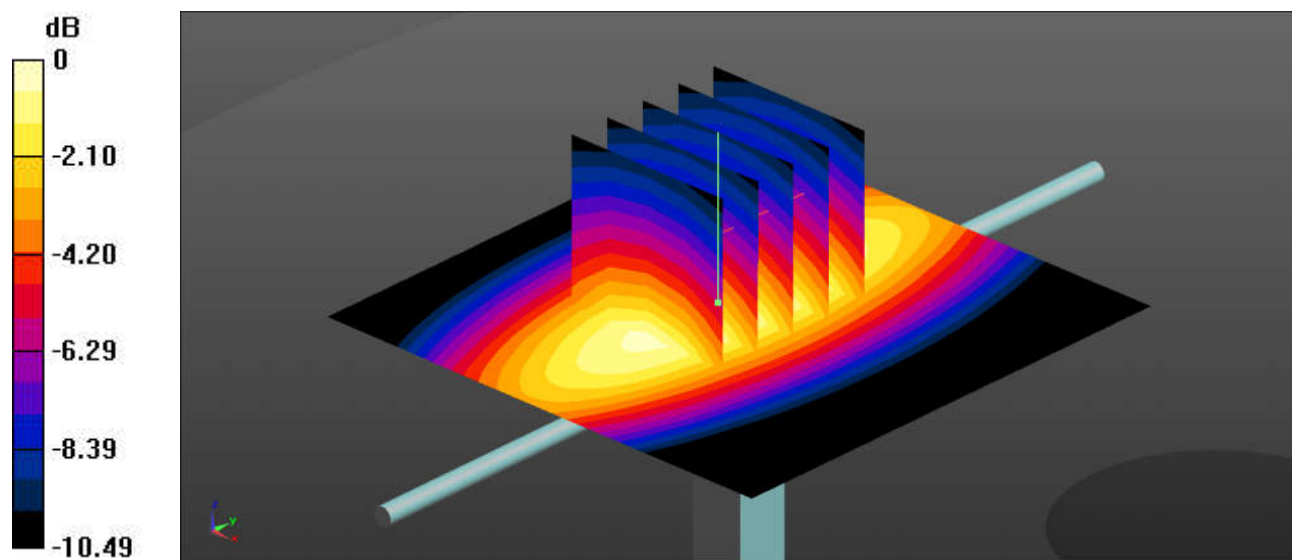

0 dB = 3.36 W/kg = 5.26 dBW/kg

System Check_Head_1750MHz**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.38$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.41, 8.41, 8.41); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 13.3 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 86.85 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.53 W/kg; SAR(10 g) = 5.21 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

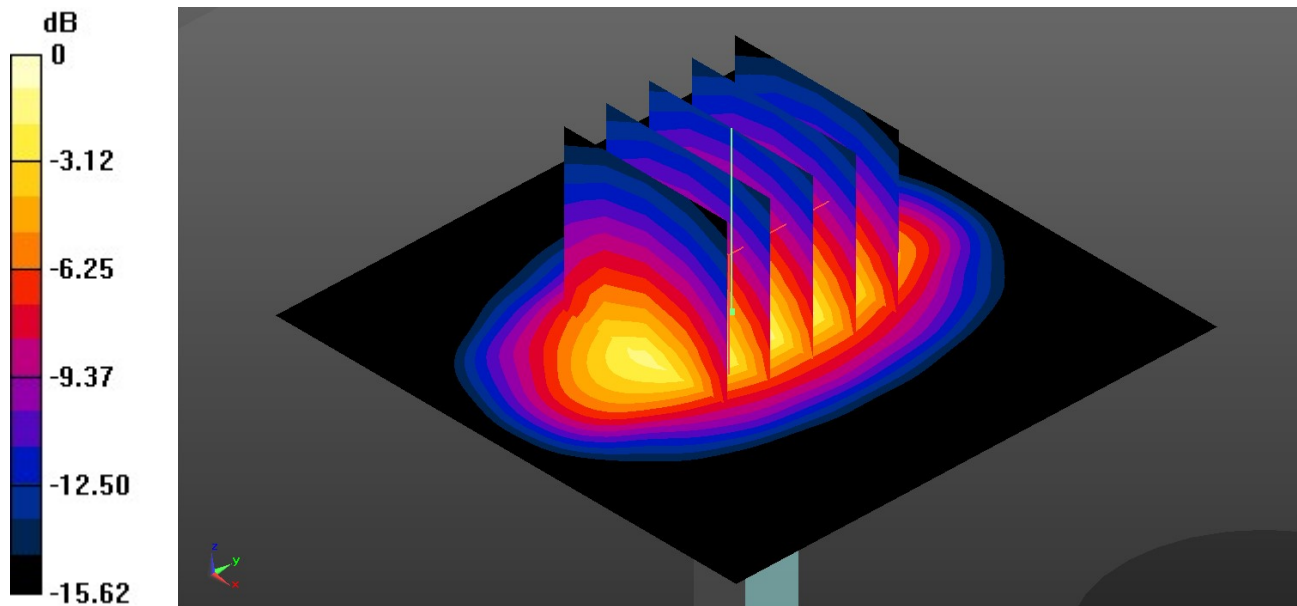

0 dB = 13.4 W/kg = 11.27 dBW/kg

System Check_Head_1900MHz**DUT: D1900V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.634$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.22, 8.22, 8.22); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 14.7 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 86.19 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 9.74 W/kg; SAR(10 g) = 5.04 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

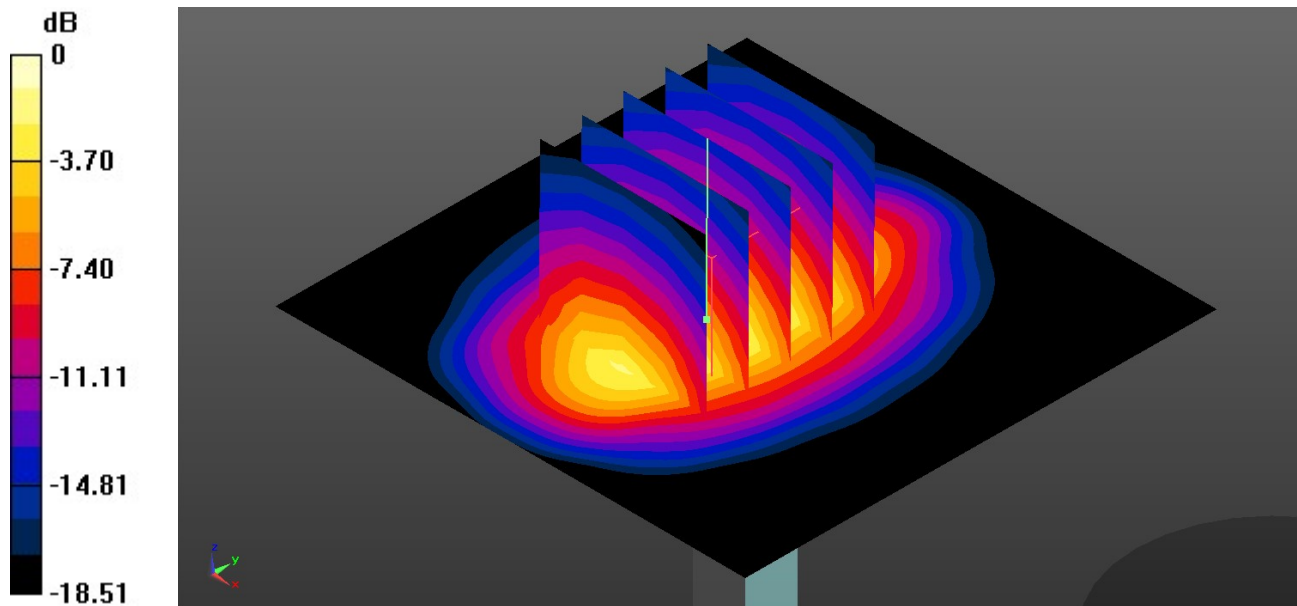

0 dB = 14.0 W/kg = 11.46 dBW/kg

System Check_Head_2450MHz**DUT: D2450V2 - SN:908**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.628$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.57, 7.57, 7.57); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.7 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.10 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 26.5 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.01 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

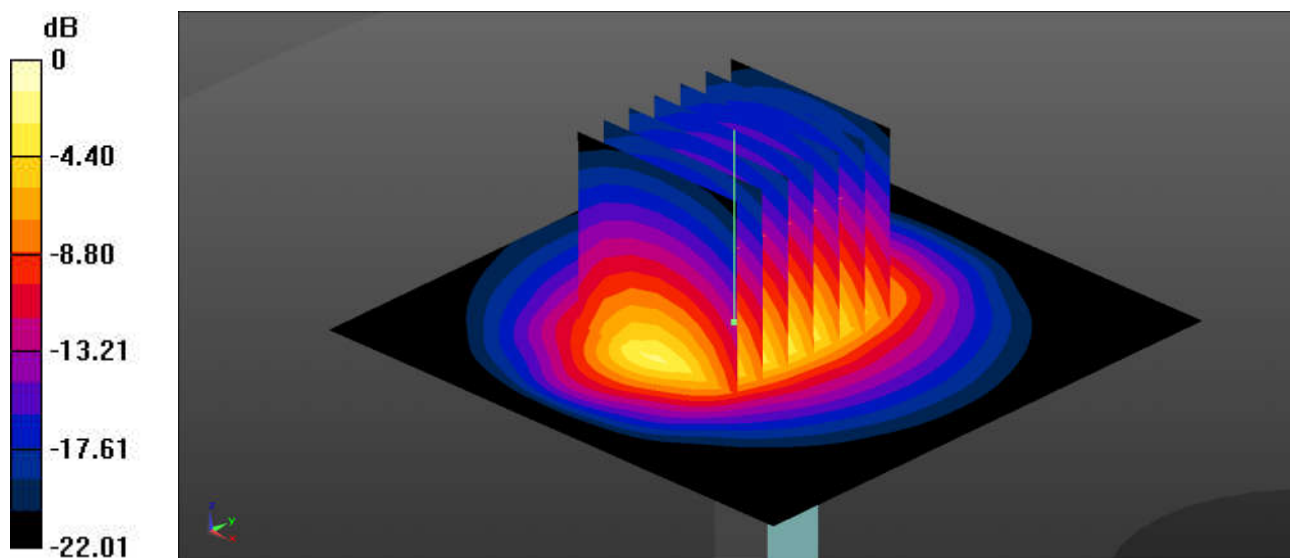

0 dB = 19.8 W/kg = 12.97 dBW/kg

System Check_Head_2600MHz**DUT: D2600V2 - SN:1070**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 38.332$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.31, 7.31, 7.31); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 21.5 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.82 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.04 W/kg

Maximum value of SAR (measured) = 21.0 W/kg

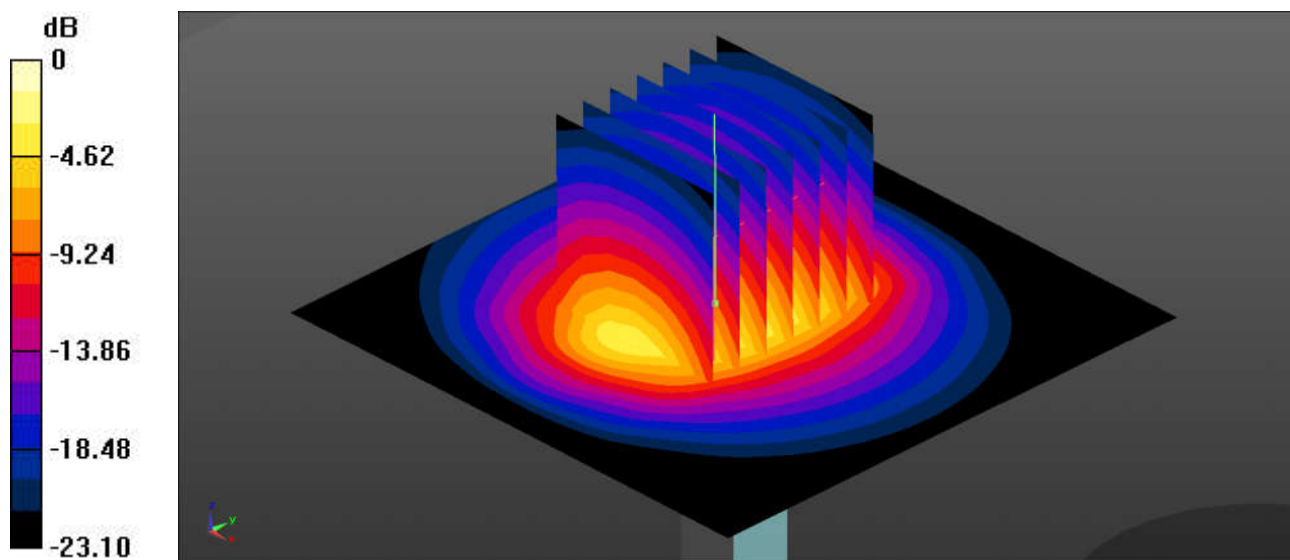

0 dB = 21.0 W/kg = 13.22 dBW/kg

System Check_Head_5250MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.566$ S/m; $\epsilon_r = 35.456$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(5.24, 5.24, 5.24); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.1 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.83 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 31.9 W/kg

SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

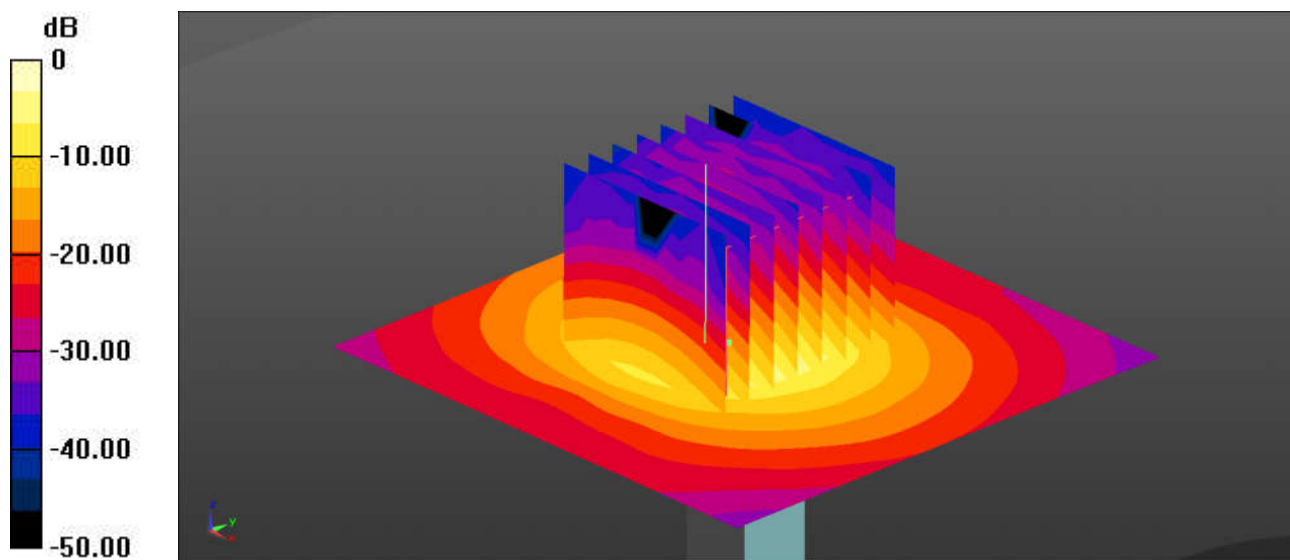

0 dB = 18.7 W/kg = 12.72 dBW/kg

System Check_Head_5600MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.95$ S/m; $\epsilon_r = 34.842$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.65, 4.65, 4.65); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.2 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 41.03 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 31.8 W/kg

SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

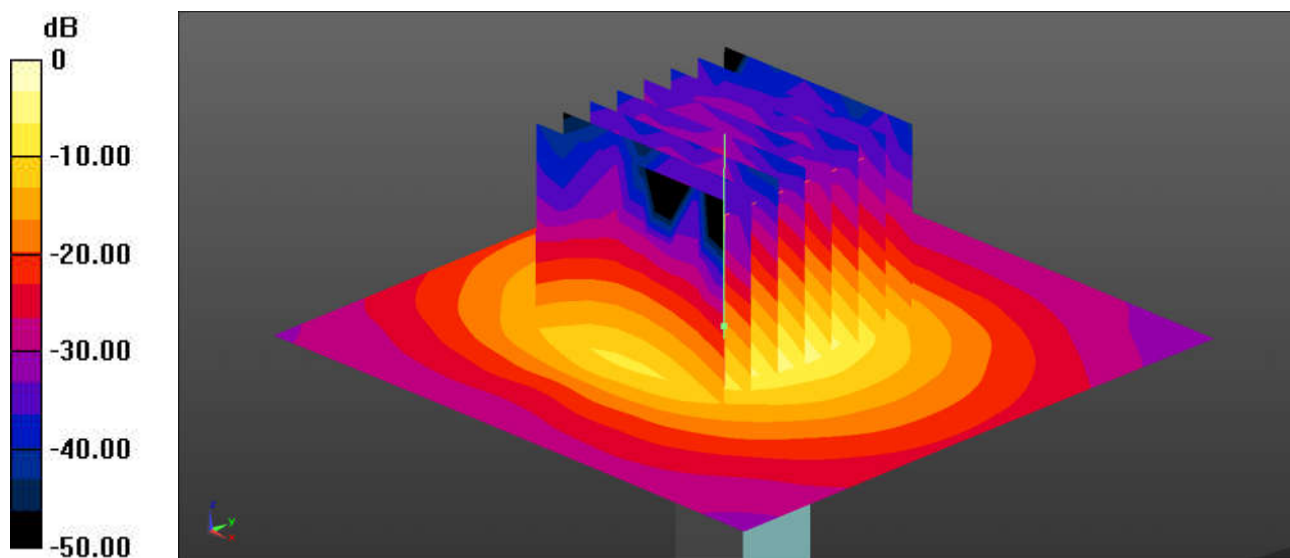

0 dB = 18.2 W/kg = 12.60 dBW/kg

System Check_Head_5750MHz**DUT: D5GHzV2 - SN:1113**

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5000 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.131$ S/m; $\epsilon_r = 34.57$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(4.69, 4.69, 4.69); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.1 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 39.38 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 31.3 W/kg

SAR(1 g) = 7.87 W/kg; SAR(10 g) = 2.29 W/kg

Maximum value of SAR (measured) = 18.1 W/kg

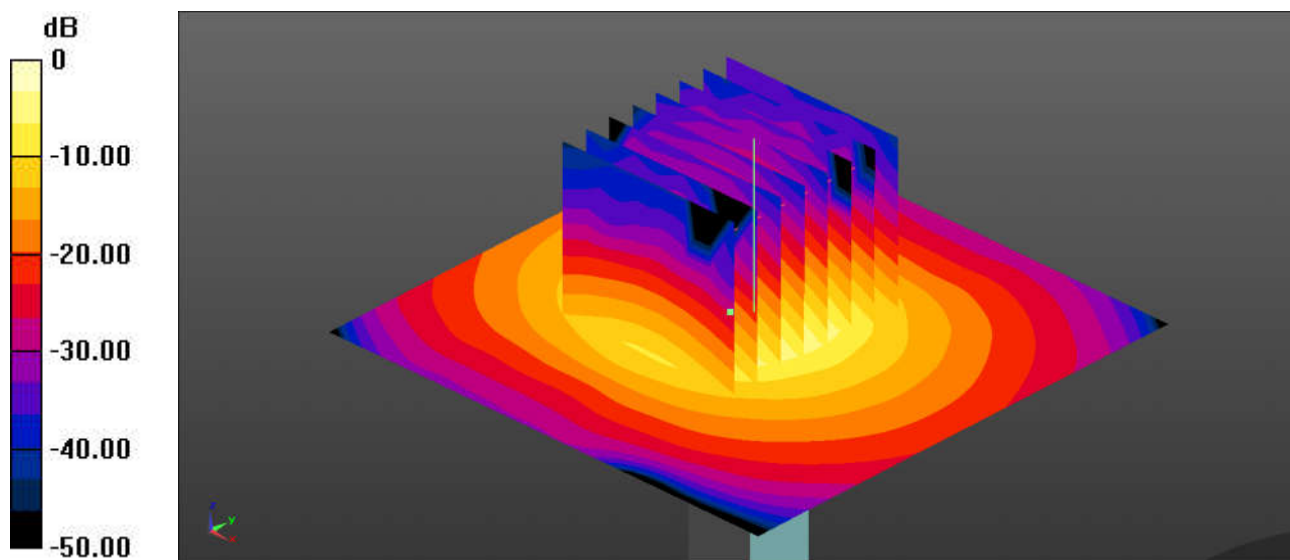

0 dB = 18.1 W/kg = 12.58 dBW/kg



Appendix B. Plots of High SAR Measurement

The plots are shown as follows.

01_GSM 850_GPRS 1 Tx slots_Right Cheek_0mm_Ant 2_Ch189

Communication System: UID 0, GSM850 (0); Frequency: 836.4 MHz; Duty Cycle: 1:8.30
Medium: HSL_835 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 41.222$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(10.05, 10.05, 10.05); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.62 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.849 W/kg

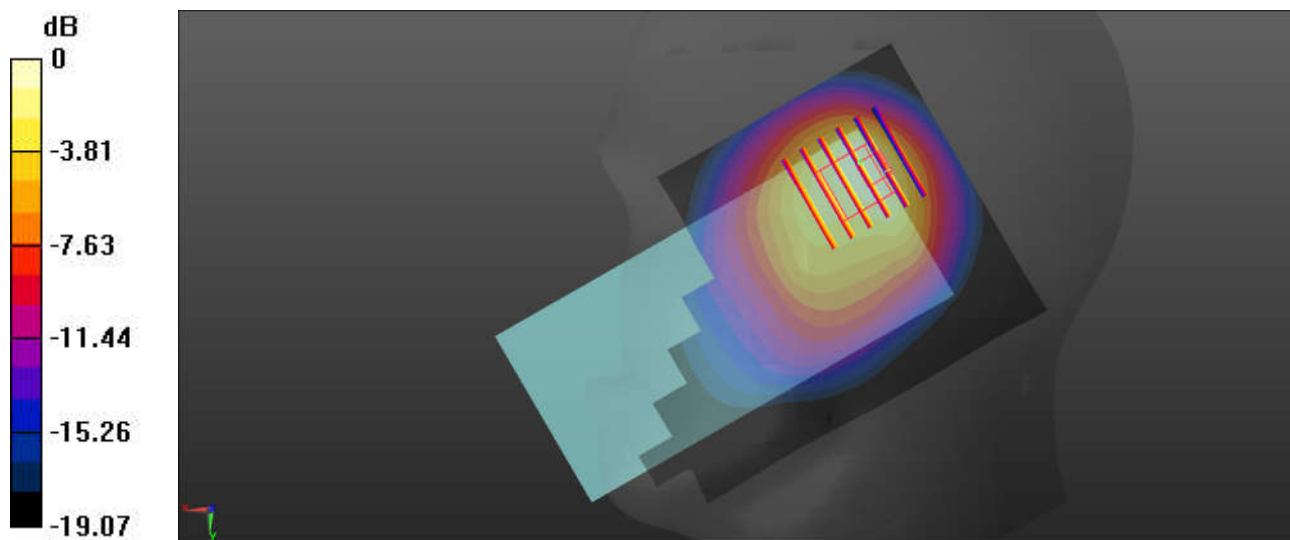

0 dB = 0.849 W/kg = -0.71 dBW/kg

02_GSM 1900_GPRS 3 Tx slots_Right Tilted_0mm_Ant 2_Ch661

Communication System: UID 0, PCS (0); Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 39.136$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.22, 8.22, 8.22); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.899 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.666 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

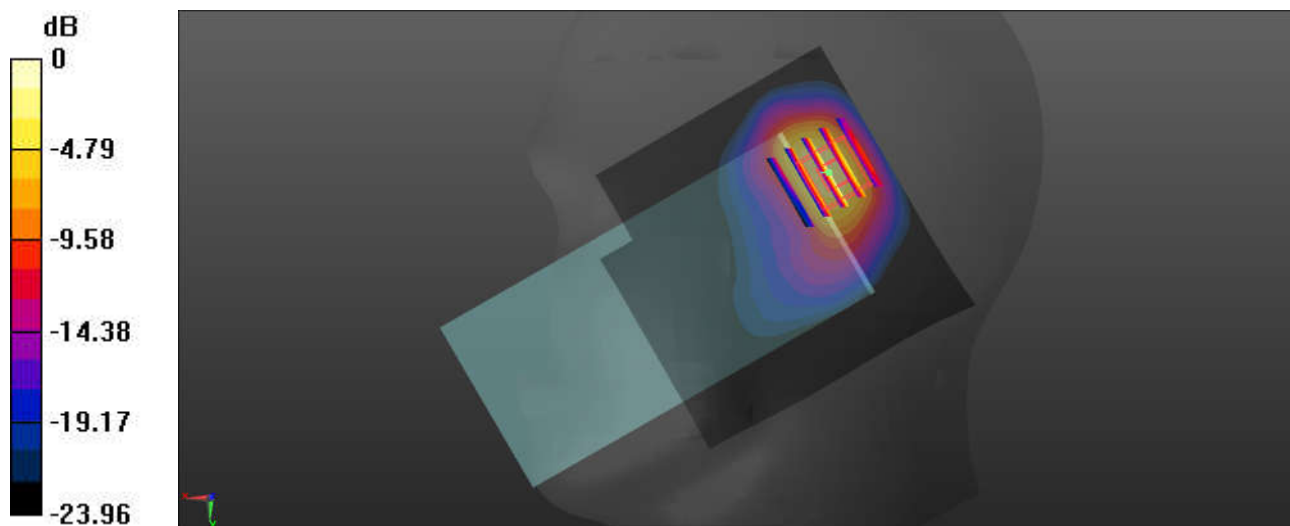

0 dB = 1.11 W/kg = 0.45 dBW/kg

03_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ant 2_Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_850 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 41.222$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(10.05, 10.05, 10.05); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.833 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.18 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.796 W/kg

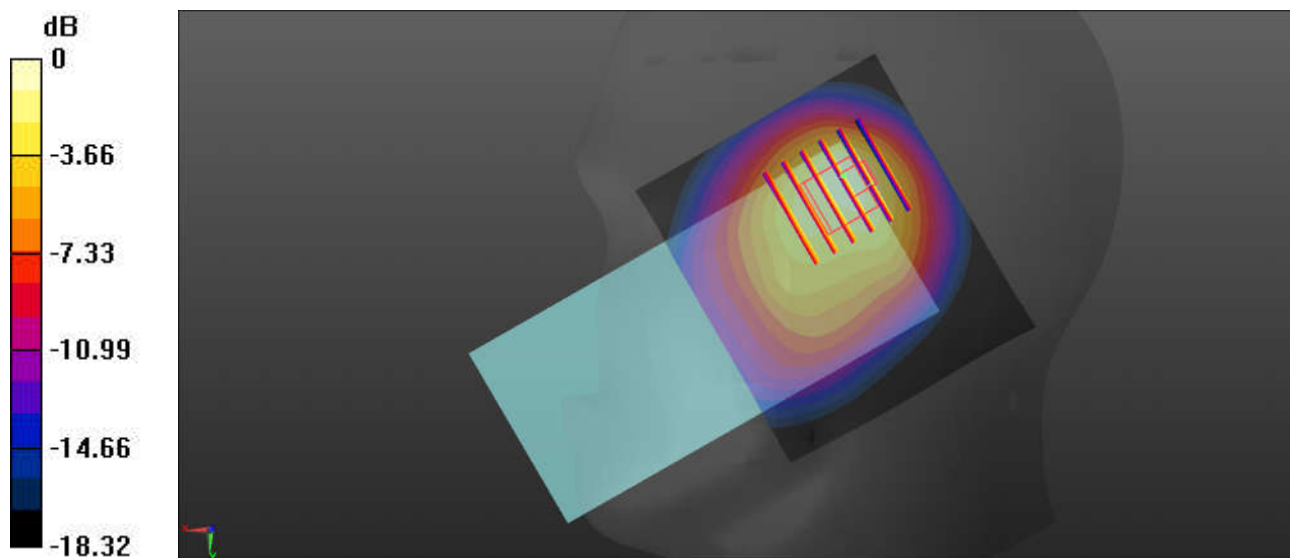

0 dB = 0.796 W/kg = -0.99 dBW/kg

04_WCDMA IV_RMC 12.2Kbps_Right Tilted_0mm_Ant 2_Ch1413

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: HSL_1750 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.338$ S/m; $\epsilon_r = 39.14$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.41, 8.41, 8.41); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.452 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.91 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.917 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.658 W/kg

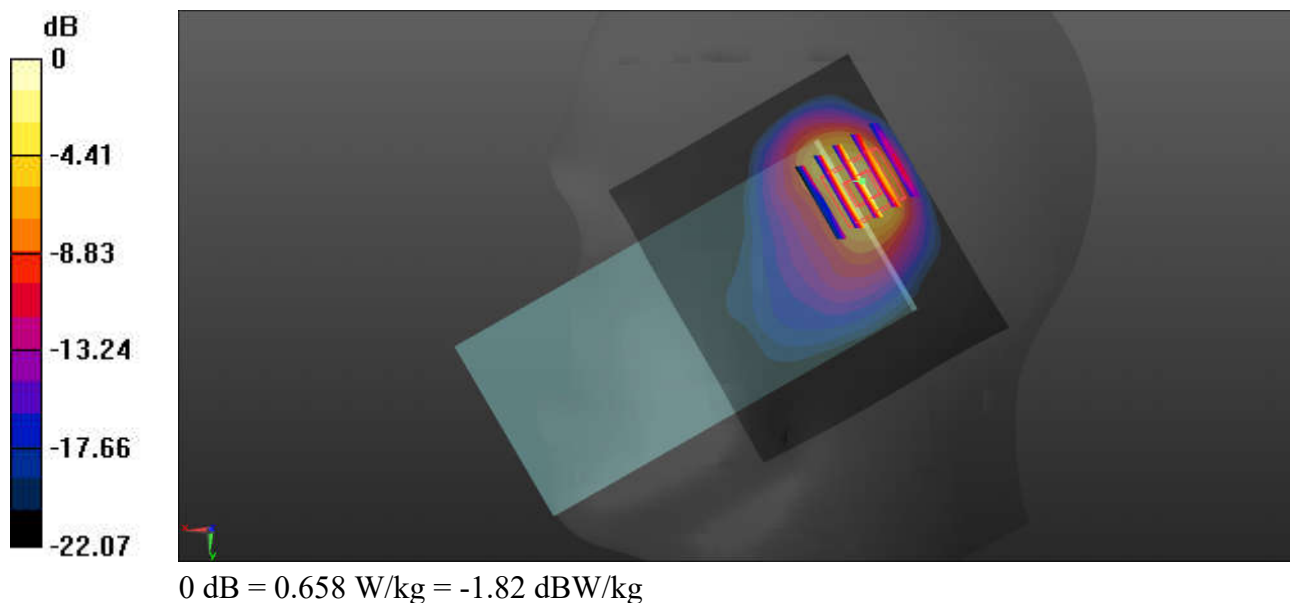

05_WCDMA II_RMC 12.2Kbps_Right Tilted_0mm_Ant 2_Ch9538

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 39.001$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.22, 8.22, 8.22); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.855 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.03 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

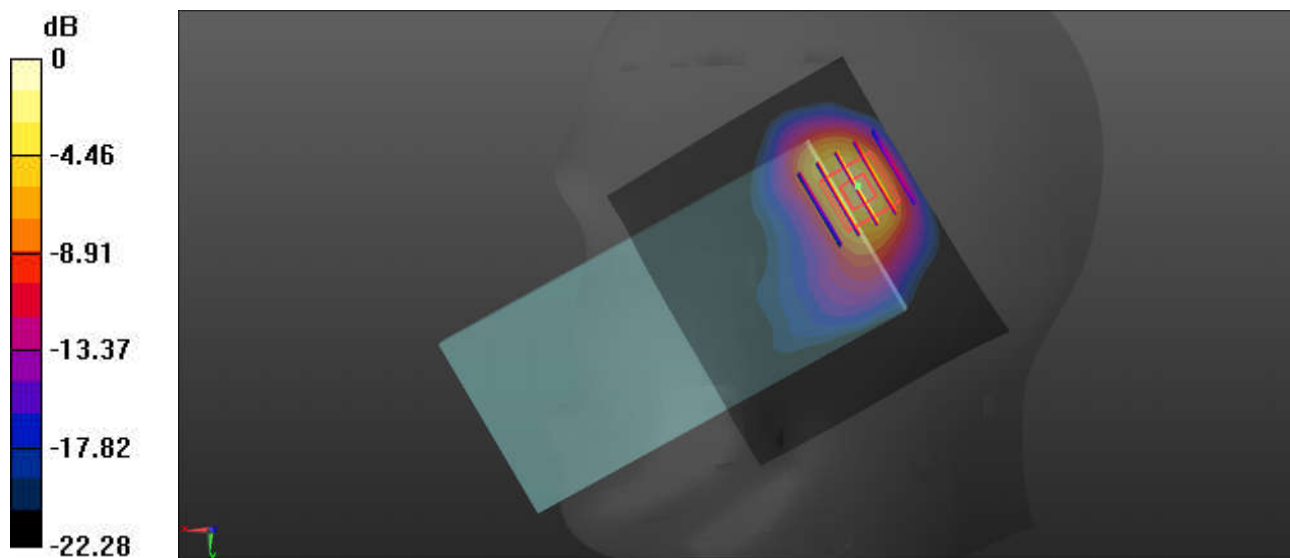

0 dB = 1.17 W/kg = 0.68 dBW/kg

06_LTE Band 5_10M_QPSK_1RB_0Offset_Right Cheek_0mm_Ant 2_Ch20525

Communication System: UID 0, LTE-FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_850 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 41.22$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(10.05, 10.05, 10.05); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.813 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.17 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.799 W/kg

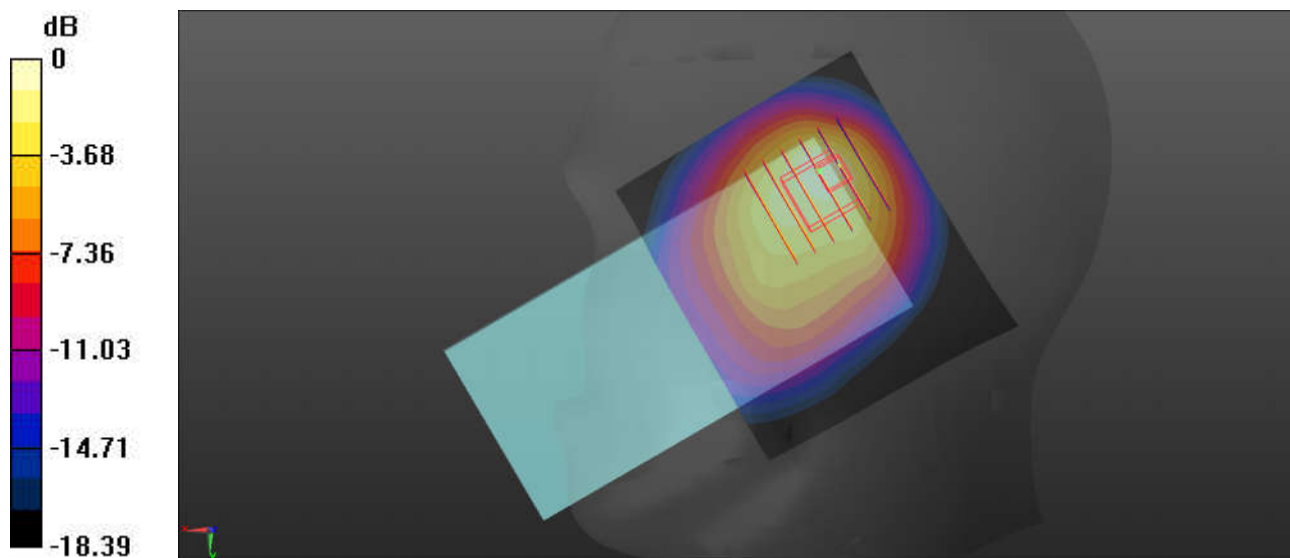

0 dB = 0.799 W/kg = -0.97 dBW/kg

07_LTE Band 4_20M_QPSK_1RB_0Offset_Right Tilted_0mm_Ant 2_Ch20175

Communication System: UID 0, LTE-FDD (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: HSL_1750 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.338$ S/m; $\epsilon_r = 39.14$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.41, 8.41, 8.41); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.496 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.762 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.690 W/kg

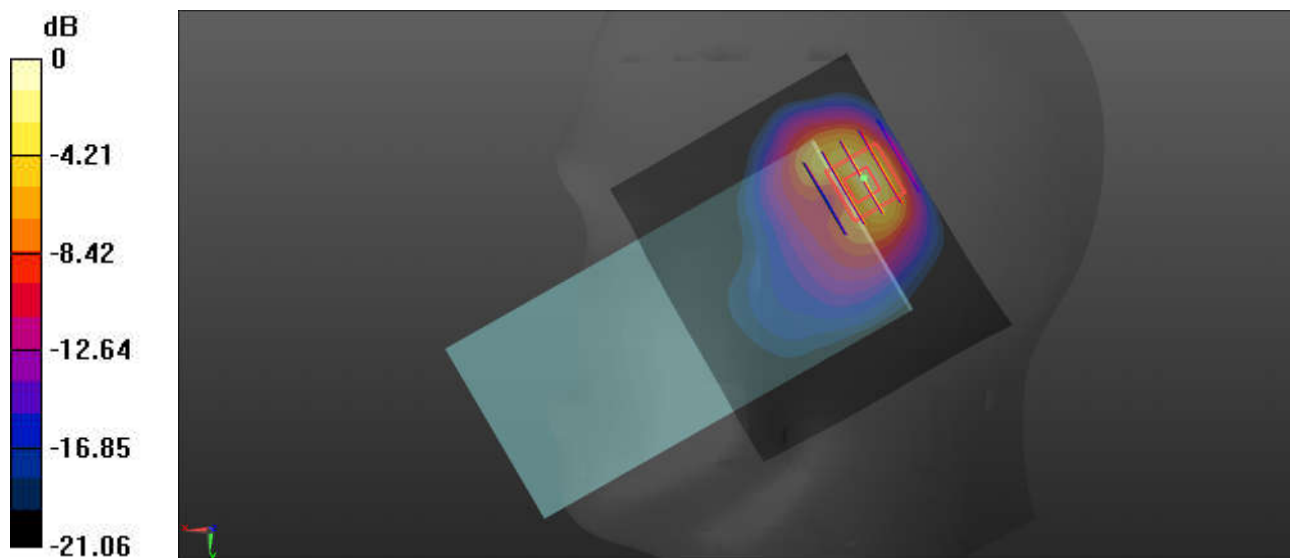

0 dB = 0.690 W/kg = -1.61 dBW/kg

08_LTE Band 2_20M_QPSK_50RB_0Offset_Right Tilted_0mm_Ant 2_Ch19100

Communication System: UID 0, LTE-FDD (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.034$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(8.22, 8.22, 8.22); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.02 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.35 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.881 W/kg; SAR(10 g) = 0.372 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

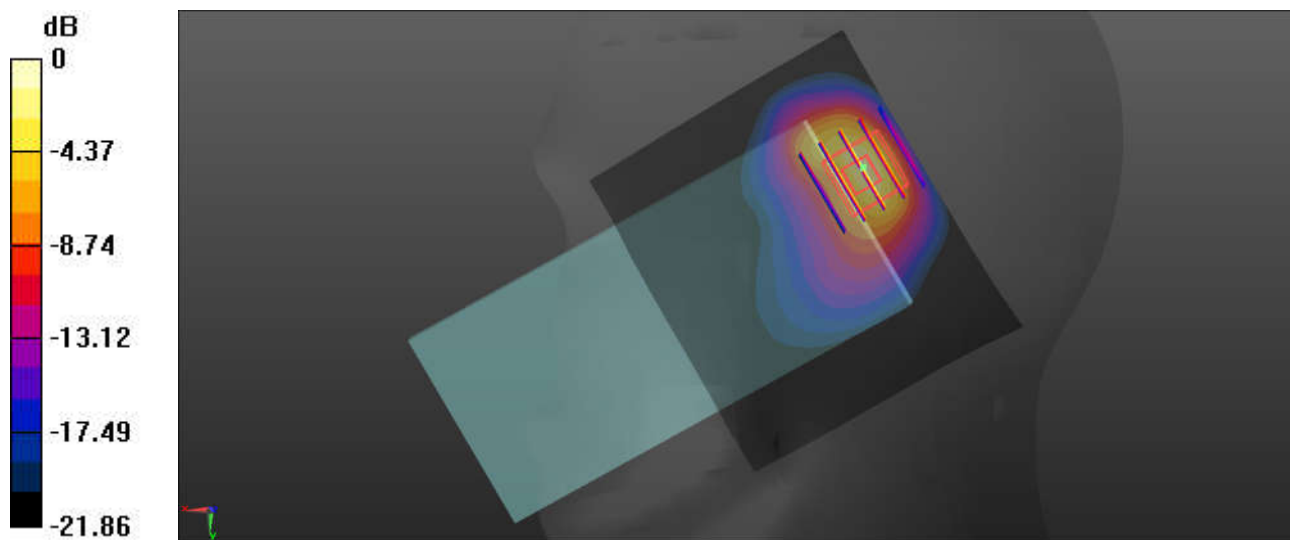

0 dB = 1.35 W/kg = 1.30 dBW/kg

09_LTE Band 7_20M_QPSK_50RB_0Offset_Right Tilted_0mm_Ant 2_Ch21350

Communication System: UID 0, LTE-FDD (0); Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: HSL_2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 37.986$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.31, 7.31, 7.31); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.11 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.329 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

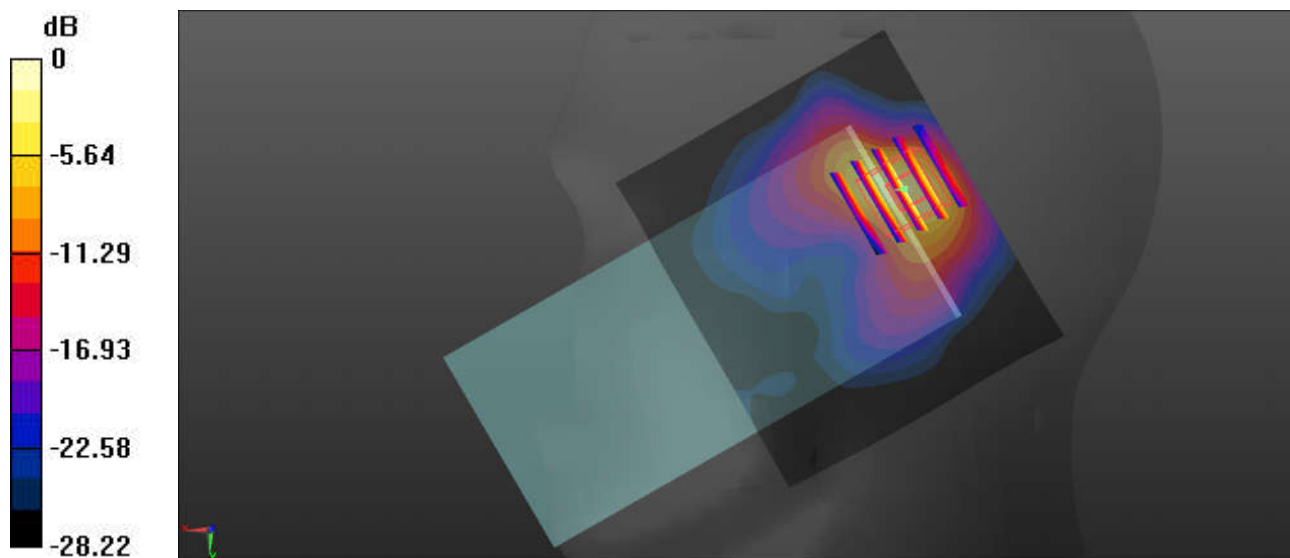

0 dB = 1.61 W/kg = 2.06 dBW/kg

10_LTE Band 41_20M_QPSK_50RB_0Offset_Right Tilted_0mm_Ant2_Ch40140

Communication System: UID 0, LTE-TDD (0); Frequency: 2545 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600 Medium parameters used: $f = 2545$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 38.036$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.31, 7.31, 7.31); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.11 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.657 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.314 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

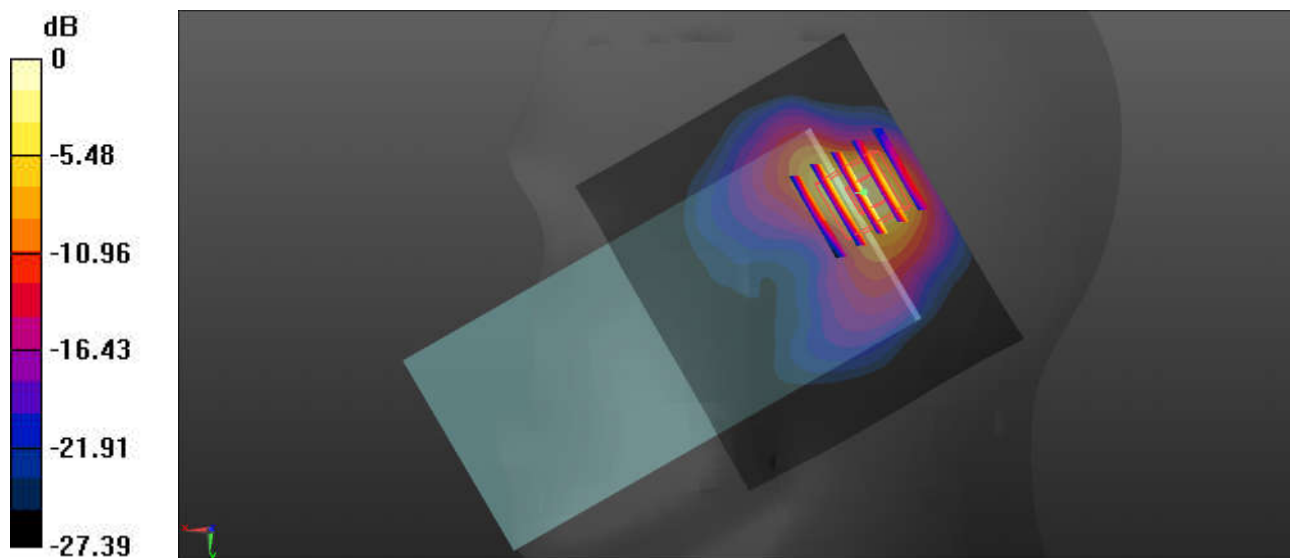

0 dB = 1.60 W/kg = 2.04 dBW/kg

11_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ant 3_Ch11

Communication System: UID 0, 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL_2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 38.506$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7592; ConvF(7.57, 7.57, 7.57); Calibrated: 2020.5.22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn690; Calibrated: 2020.3.26
- Phantom: SAM1; Type: SAM; Serial: TP-1697
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.86 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.836 W/kg; SAR(10 g) = 0.420 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

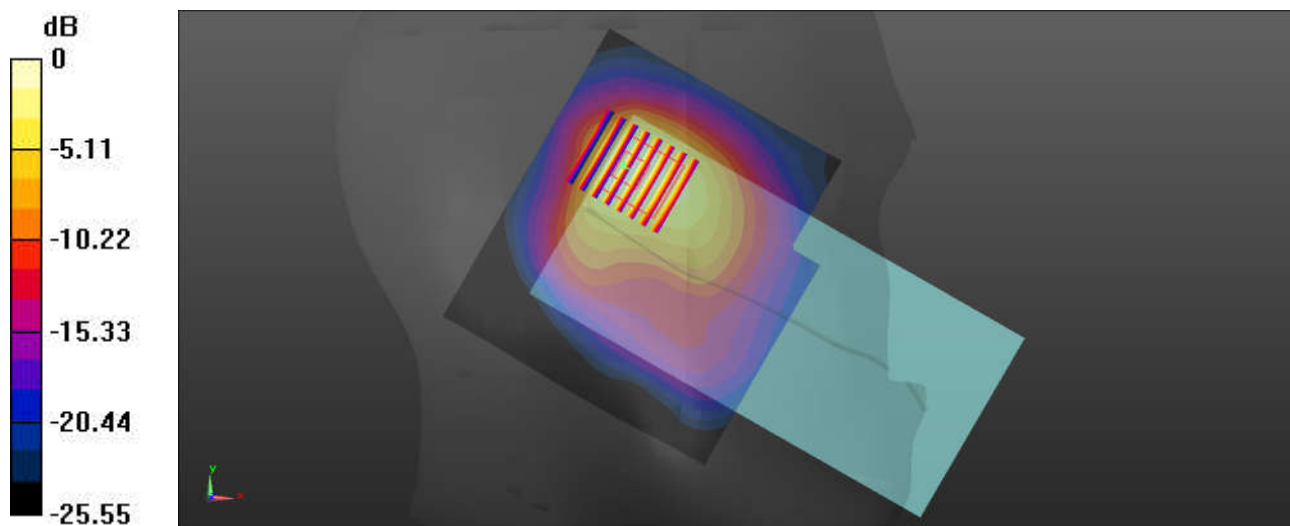

0 dB = 1.37 W/kg = 1.37 dBW/kg