

FCC TEST REPORT

(Part 15, Subpart C)



Applicant:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Manufacturer or Supplier:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Product:	Wireless Earphones
Brand Name:	Xiaomi
Model Name:	M2438E1
FCC ID:	2AFZZM2438E1
Date of tests:	Nov. 12, 2024 ~ Jan. 03, 2025

The tests have been carried out according to the requirements of the following standard:

- ☒ **FCC Part 15, Subpart C, Section 15.247**
- ☒ **ANSI C63.10-2020**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Jan. 03, 2025	 Date: Jan. 03, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	7
1 SUMMARY OF TEST RESULTS.....	8
1.1 MEASUREMENT UNCERTAINTY	9
2 GENERAL INFORMATION	10
2.1 GENERAL DESCRIPTION OF EUT.....	10
2.2 DESCRIPTION OF TEST MODES.....	12
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	13
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	13
2.3 DUTY CYCLE OF TEST SIGNAL	17
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	18
2.5 DESCRIPTION OF SUPPORT UNITS.....	18
3 TEST TYPES AND RESULTS.....	19
3.1 CONDUCTED EMISSION MEASUREMENT	19
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	19
3.1.2 TEST INSTRUMENTS.....	19
3.1.3 TEST PROCEDURES	20
3.1.4 DEVIATION FROM TEST STANDARD	20
3.1.5 TEST SETUP	21
3.1.6 EUT OPERATING CONDITIONS	21
3.1.7 TEST RESULTS	22
3.2 RADIATED EMISSION MEASUREMENT	24
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	24
3.2.2 TEST INSTRUMENTS.....	25
3.2.3 TEST PROCEDURES	26
3.2.4 DEVIATION FROM TEST STANDARD	26
3.2.5 TEST SETUP	27
3.2.6 EUT OPERATING CONDITIONS	28
3.2.7 TEST RESULTS	29
3.3 6 DB BANDWIDTH MEASUREMENT.....	79
3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	79
3.3.2 TEST INSTRUMENTS.....	79
3.3.3 TEST PROCEDURE.....	79
3.3.4 DEVIATION FROM TEST STANDARD	80
3.3.5 TEST SETUP	80



3.3.6	EUT OPERATING CONDITIONS	80
3.3.7	TEST RESULTS	81
3.4	CONDUCTED OUTPUT POWER	82
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	82
3.4.2	TEST SETUP	82
3.4.3	TEST INSTRUMENTS	82
3.4.4	TEST PROCEDURES	82
3.4.5	DEVIATION FROM TEST STANDARD	82
3.4.6	EUT OPERATING CONDITIONS	82
3.4.7	TEST RESULTS	83
3.4.7.1	MAXIMUM PEAK OUTPUT POWER	83
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	84
3.5	POWER SPECTRAL DENSITY MEASUREMENT	85
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	85
3.5.2	TEST SETUP	85
3.5.3	TEST INSTRUMENTS	85
3.5.4	TEST PROCEDURE	85
3.5.5	DEVIATION FROM TEST STANDARD	85
3.5.6	EUT OPERATING CONDITION	85
3.5.7	TEST RESULTS	86
3.6	OUT OF BAND EMISSION MEASUREMENT	87
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	87
3.6.2	TEST SETUP	87
3.6.3	TEST INSTRUMENTS	87
3.6.4	TEST PROCEDURE	87
3.6.5	DEVIATION FROM TEST STANDARD	88
3.6.6	EUT OPERATING CONDITION	88
3.6.7	TEST RESULTS	88
3.7	ANTENNA REQUIREMENTS	89
3.7.1	STANDARD APPLICABLE	89
3.7.2	ANTENNA CONNECTED CONSTRUCTION	89
3.7.3	ANTENNA GAIN	89
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	90
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	91
6	APPENDIX 1:2.4G WIFI	92
	RIGHT	92



DTS BANDWIDTH	92
TEST RESULT	92
TEST GRAPHS	93
OCCUPIED CHANNEL BANDWIDTH	98
TEST RESULT	98
TEST GRAPHS	99
MAXIMUM CONDUCTED OUTPUT POWER	104
TEST RESULT	104
MAXIMUM POWER SPECTRAL DENSITY	105
TEST RESULT	105
TEST GRAPHS	106
BAND EDGE MEASUREMENTS	111
TEST RESULT	111
TEST GRAPHS	112
CONDUCTED SPURIOUS EMISSION	115
TEST RESULT	115
TEST GRAPHS	116
DUTY CYCLE	130
TEST RESULT	130
TEST GRAPHS	131
LEFT 136	
DTS BANDWIDTH	136
TEST RESULT	136
TEST GRAPHS	137
OCCUPIED CHANNEL BANDWIDTH	142
TEST RESULT	142
TEST GRAPHS	143
MAXIMUM CONDUCTED OUTPUT POWER	148
TEST RESULT	148
MAXIMUM POWER SPECTRAL DENSITY	149
TEST RESULT	149
TEST GRAPHS	150
APPENDIX F: BAND EDGE MEASUREMENTS	155
TEST RESULT	155
TEST GRAPHS	156
APPENDIX G: CONDUCTED SPURIOUS EMISSION	159



TEST RESULT	159
TEST GRAPHS.....	160
DUTY CYCLE	174
TEST RESULT	174
TEST GRAPHS.....	175
7 APPENDIX 2 BLE	180
RIGHT	180
DTS BANDWIDTH	180
TEST RESULT	180
TEST GRAPHS.....	181
OCCUPIED CHANNEL BANDWIDTH.....	184
TEST RESULT	184
TEST GRAPHS.....	185
MAXIMUM CONDUCTED OUTPUT POWER.....	188
TEST RESULT	188
MAXIMUM POWER SPECTRAL DENSITY	189
TEST RESULT	189
TEST GRAPHS.....	190
BAND EDGE MEASUREMENTS	194
TEST RESULT	194
TEST GRAPHS.....	195
CONDUCTED SPURIOUS EMISSION	197
TEST RESULT	197
TEST GRAPHS.....	198
DUTY CYCLE	207
TEST RESULT	207
TEST GRAPHS.....	208
LEFT 211	
DTS BANDWIDTH	211
TEST RESULT	211
TEST GRAPHS.....	212
OCCUPIED CHANNEL BANDWIDTH.....	215
TEST RESULT	215
TEST GRAPHS.....	216
MAXIMUM CONDUCTED OUTPUT POWER.....	219
TEST RESULT	219



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

MAXIMUM POWER SPECTRAL DENSITY	220
TEST RESULT	220
TEST GRAPHS	221
BAND EDGE MEASUREMENTS	224
TEST RESULT	224
TEST GRAPHS	225
CONDUCTED SPURIOUS EMISSION	227
TEST RESULT	227
TEST GRAPHS	228
DUTY CYCLE	237
TEST RESULT	237
TEST GRAPHS	238



Test Report No.: W7L-241112W001RF02

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-241112W001RF02	Original release	Jan. 03, 2025



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
15.207	AC Power Conducted Emission	Compliance
15.205 15.209	Radiated Emissions	Compliance
15.247(d)	Out of band Emission Measurement	Compliance
15.247(a)(2)	6dB bandwidth	Compliance
15.247(b)	Conducted Output power	Compliance
15.247(e)	Power Spectral Density	Compliance
15.203	Antenna Requirement	Compliance

Note : 1.Except RSE, other data please refer to Appendix 1 (for WIFI-2.4G) and Appendix 2 (for BLE).



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Earphones	
BRAND NAME	Xiaomi	
MODEL NAME	M2438E1	
NOMINAL VOLTAGE	3.87Vdc(Li-ion, battery) for Charging case 3.88Vdc(Li-ion, battery) for Earphone	
MODULATION	2.4G WIFI:DSSS, OFDM	
	BLE: GFSK	
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n(HT20): up to 144.4 Mbps BT_LE: 1 Mbps/2 Mbps	
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2402-2480MHz for BT-LE(GFSK)	
MAX. OUTPUT POWER	WLAN: 23.50mW (Maximum) BT-LE: 17.58mW (Maximum)	
ANTENNA GAIN	BLE	left:-7.06dBi right:-7dBi
	WIFI2.4G	left:-7.06dBi right:-7dBi
ANTENNA TYPE	BLE	PIFA Antenna
	WIFI2.4G	PIFA Antenna
HW VERSION	V3	
SW VERSION	0.0.6.7 for Charging case O71_W_2.0.4.8_241211 for Earphone	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	USB cable1: non-shielded cable, with w/o ferrite core, 0.21 meter USB cable2: non-shielded cable, with w/o ferrite core, 0.21 meter	

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.



Test Report No.: W7L-241112W001RF02

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n(HT20)	1TX /1RX
BT_LE(1MHz)	1TX /1RX
BT_LE(2MHz)	1TX /1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
- Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

**2.2 DESCRIPTION OF TEST MODES**

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 4 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11n20	1 to 11	11	OFDM	MCS0
BT-LE	0 to 39	39	GFSK	1



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

POWER LINE CONDUCTED EMISSION TEST

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

**BANDEDGE MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0



ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 3.88V By Battery	Jace Hu
RE≥1G	23deg. C, 70%RH	DC 3.88V By Battery	Jace Hu
PLC	25deg. C, 52%RH	DC 3.88V By Battery	Carl Xie
APCM	25deg. C, 60%RH	DC 3.7V By Battery	James Fu



Test Report No.: W7L-241112W001RF02

2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix1/2 Of this test report.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2020

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1.The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 13,24	Feb. 12,25
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 02,24	Mar. 01,25

NOTE:

1. The test was performed in CE shielded room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

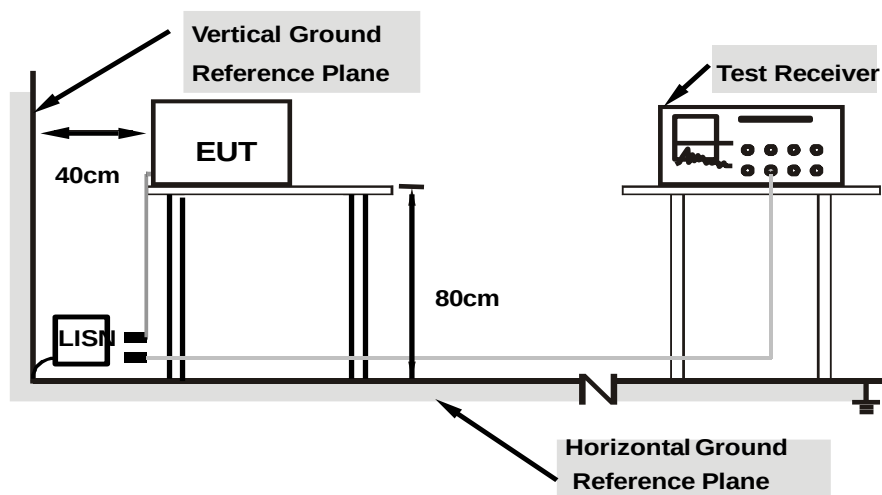

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



BUREAU VERITAS Test Report No.: W7L-241112W001RF02

3.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA:


Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.175000	---	4.88	54.72	49.84	L1	ON	9.8
0.175000	16.30	---	64.72	48.42	L1	ON	9.8
0.371000	---	4.90	48.48	43.58	L1	ON	9.8
0.371000	14.60	---	58.48	43.88	L1	ON	9.8
0.439000	---	5.35	47.08	41.73	L1	ON	9.8
0.439000	15.65	---	57.08	41.43	L1	ON	9.8
0.799000	---	4.48	46.00	41.52	L1	ON	9.8
0.799000	13.28	---	56.00	42.72	L1	ON	9.8
1.431000	---	4.21	46.00	41.79	L1	ON	9.8
1.431000	11.63	---	56.00	44.37	L1	ON	9.8
4.623000	---	6.04	46.00	39.96	L1	ON	9.7
4.623000	13.44	---	56.00	42.56	L1	ON	9.7

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Limit value - Emission level
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

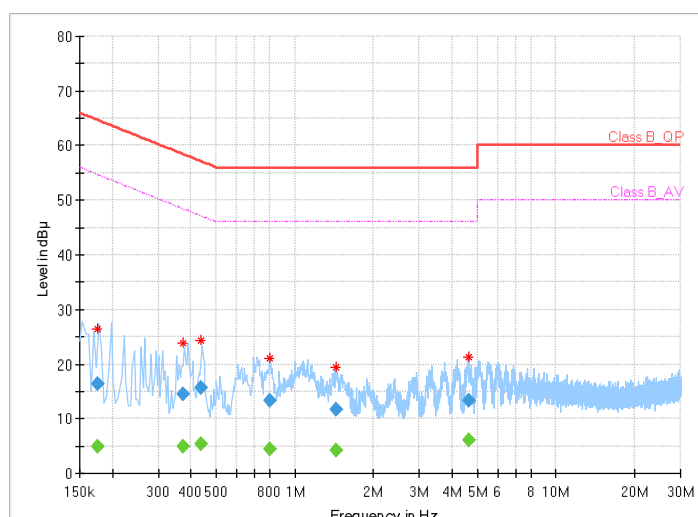



**BUREAU
VERITAS**


Test Report No.: W7L-241112W001RF02

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154000	---	6.23	55.78	49.55	N	ON	9.7
0.154000	17.74	---	65.78	48.04	N	ON	9.7
0.306000	---	3.26	50.08	46.82	N	ON	9.6
0.306000	8.90	---	60.08	51.18	N	ON	9.6
0.518000	---	2.98	46.00	43.02	N	ON	9.7
0.518000	7.98	---	56.00	48.02	N	ON	9.7
3.302000	---	5.15	46.00	40.85	N	ON	9.8
3.302000	11.79	---	56.00	44.21	N	ON	9.8
3.750000	---	5.53	46.00	40.47	N	ON	9.7
3.750000	12.44	---	56.00	43.56	N	ON	9.7
7.250000	---	6.39	50.00	43.61	N	ON	10.1
7.250000	12.70	---	60.00	47.30	N	ON	10.1

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value -Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

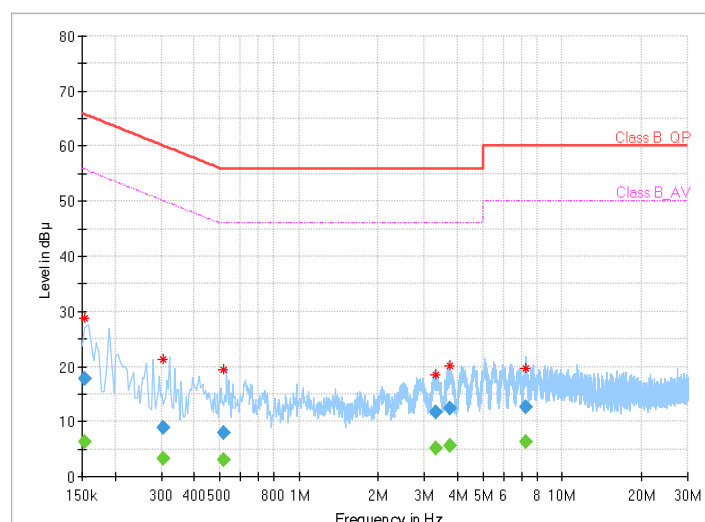



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



BUREAU VERITAS Test Report No.: W7L-241112W001RF02

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 18,23	May. 17,26
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 04,24	Mar. 03,25
Horn Antenna	ETS-LINDGREN	3117	00168692	Mar. 04,24	Mar. 03,25
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 24	Aug. 24, 25
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120-3	3.2.06	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	May. 31,24	May. 30,25
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 19,24	Feb. 18,25
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May.10,24	May.09,25
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,24	May.09,25
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 19,24	Feb.18,25
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 22,24	Aug. 21,25
Power Meter	Anritsu	ML2495A	1506002	Feb. 20,24	Feb. 19,25
Power Sensor	Anritsu	MA2411B	1339352	May. 12,24	May. 11,25
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep. 02,24	Sep. 01,25

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD


No deviation




BUREAU VERITAS Test Report No.: W7L-241112W001RF02

3.2.5 TEST SETUP

<Frequency Range 9KHz~30MHz >

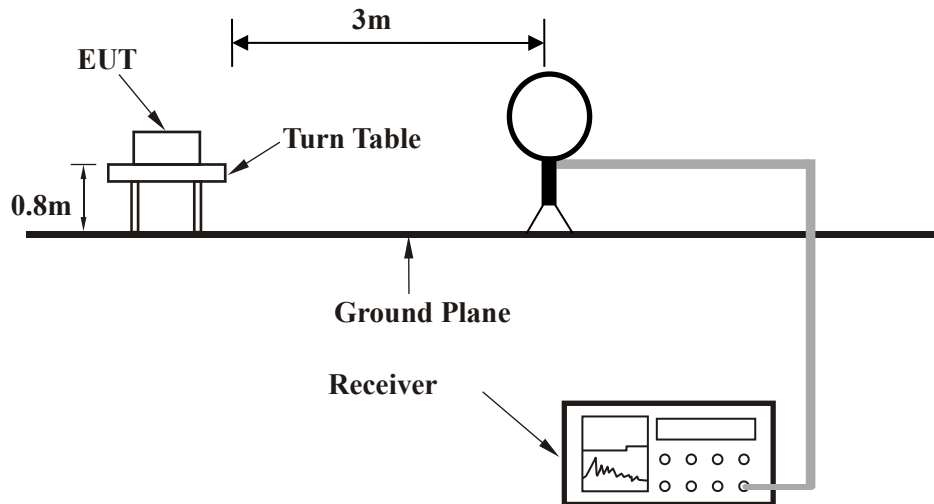

< Frequency Range 30MHz~1GHz >

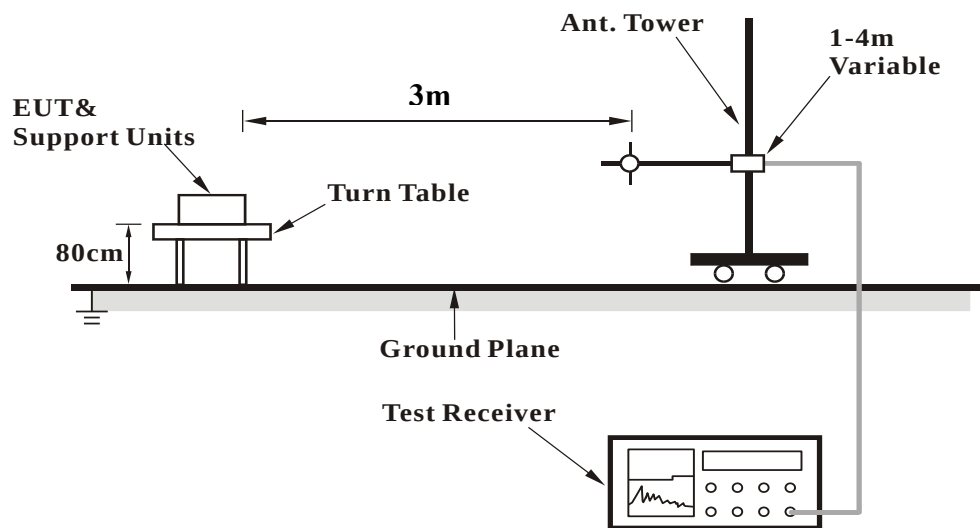




BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02

<Frequency Range above 1GHz>

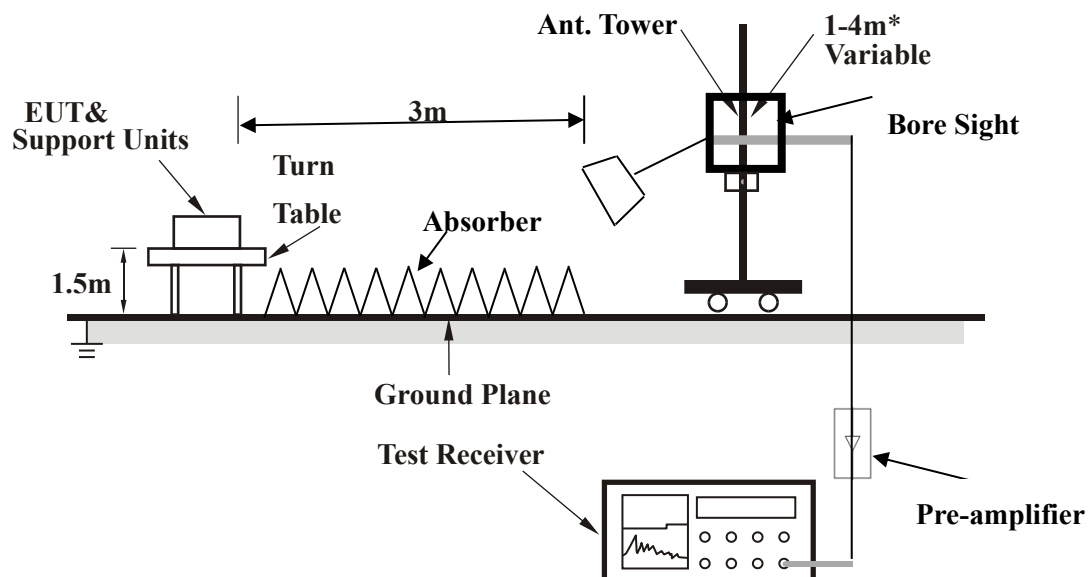

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



BUREAU VERITAS Test Report No.: W7L-241112W001RF02

3.2.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

RIGHT

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

802.11N (20MHz):


CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	30.000	21.19	33.50	40.00	-18.81	-12.31	Peak	Horizontal
2 PP	68.800	21.96	45.60	40.00	-18.04	-23.64	Peak	Horizontal
3	108.570	13.06	34.06	43.50	-30.44	-21.00	Peak	Horizontal
4	159.010	15.06	34.08	43.50	-28.44	-19.02	Peak	Horizontal
5	261.830	17.89	33.94	46.00	-28.11	-16.05	Peak	Horizontal
6	413.150	23.10	34.55	46.00	-22.90	-11.45	Peak	Horizontal

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

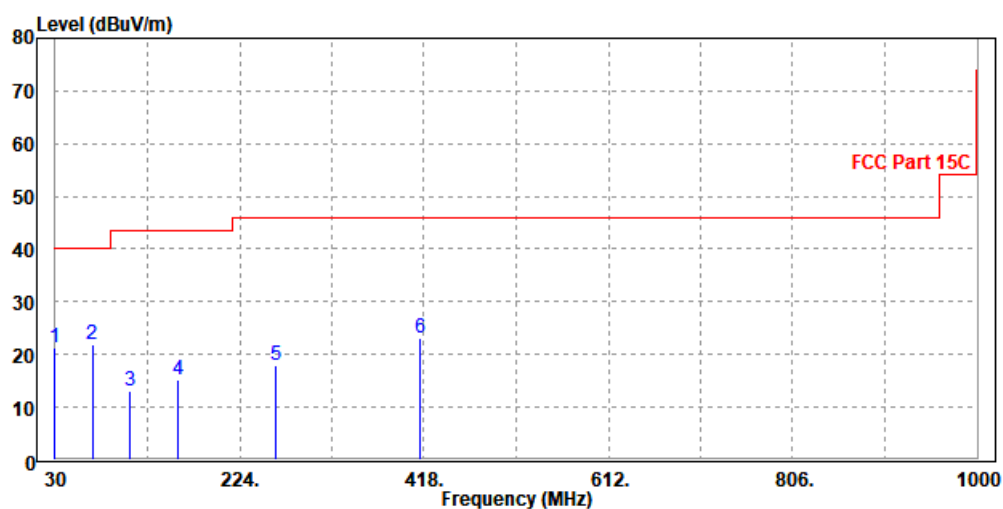



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02


CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	PP	30.970	21.19	33.87	40.00	-18.81	-12.68	Peak	Vertical
2		69.770	21.11	44.75	40.00	-18.89	-23.64	Peak	Vertical
3		124.090	14.80	37.86	43.50	-28.70	-23.06	Peak	Vertical
4		258.920	20.17	36.38	46.00	-25.83	-16.21	Peak	Vertical
5		361.740	22.78	36.12	46.00	-23.22	-13.34	Peak	Vertical
6		486.870	24.28	35.38	46.00	-21.72	-11.10	Peak	Vertical

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

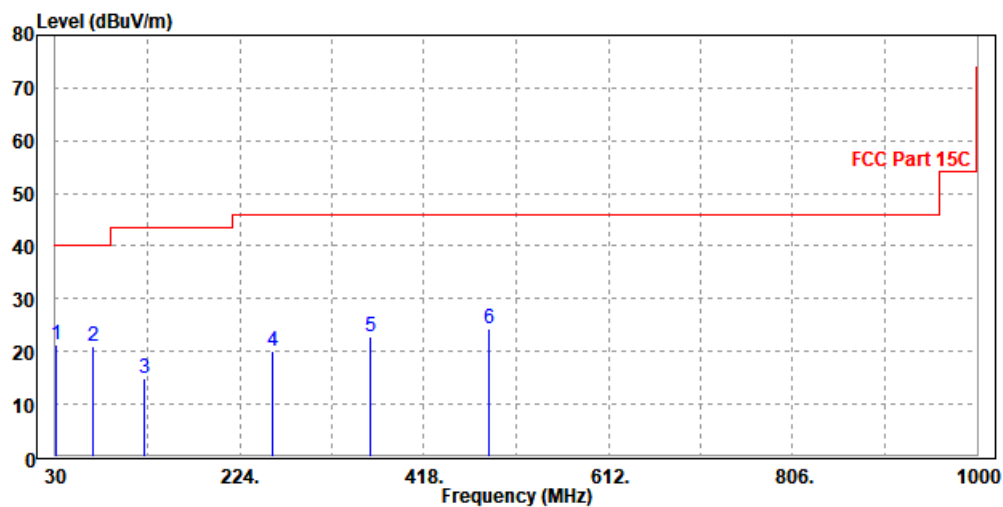



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

ABOVE 1GHz WORST-CASE DATA:

Note: 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

802.11b:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.57	56.14	74.00	-25.43	-7.57	Peak	Horizontal
2	2390.000	41.59	49.16	54.00	-12.41	-7.57	Average	Horizontal
3 PK	2412.000	87.21	94.17	74.00	13.21	-6.96	Peak	Horizontal
4 PP	2412.000	86.09	93.05	54.00	32.09	-6.96	Average	Horizontal
5	2483.500	50.37	56.11	74.00	-23.63	-5.74	Peak	Horizontal
6	2483.500	42.96	48.70	54.00	-11.04	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.18	56.19	74.00	-23.82	-6.01	Peak	Vertical
2	2390.000	43.96	49.97	54.00	-10.04	-6.01	Average	Vertical
3 PK	2412.000	86.28	92.71	74.00	12.28	-6.43	Peak	Vertical
4 PP	2412.000	84.78	91.21	54.00	30.78	-6.43	Average	Vertical
5	2483.500	49.78	56.66	74.00	-24.22	-6.88	Peak	Vertical
6	2483.500	42.00	48.88	54.00	-12.00	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.38	56.95	74.00	-24.62	-7.57	Peak	Horizontal
2	2390.000	42.28	49.85	54.00	-11.72	-7.57	Average	Horizontal
3 PK	2437.000	89.31	95.42	74.00	15.31	-6.11	Peak	Horizontal
4 PP	2437.000	88.04	94.15	54.00	34.04	-6.11	Average	Horizontal
5	2483.500	50.62	56.36	74.00	-23.38	-5.74	Peak	Horizontal
6	2483.500	42.92	48.66	54.00	-11.08	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.28	57.29	74.00	-22.72	-6.01	Peak	Vertical
2	2390.000	42.81	48.82	54.00	-11.19	-6.01	Average	Vertical
3 PK	2437.000	86.48	93.46	74.00	12.48	-6.98	Peak	Vertical
4 PP	2437.000	85.19	92.17	54.00	31.19	-6.98	Average	Vertical
5	2483.500	49.62	56.50	74.00	-24.38	-6.88	Peak	Vertical
6	2483.500	42.60	49.48	54.00	-11.40	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.18	56.75	74.00	-24.82	-7.57	Peak	Horizontal
2	2390.000	41.81	49.38	54.00	-12.19	-7.57	Average	Horizontal
3 PK	2462.000	89.20	94.91	74.00	15.20	-5.71	Peak	Horizontal
4 PP	2462.000	87.16	92.87	54.00	33.16	-5.71	Average	Horizontal
5	2483.500	51.09	56.83	74.00	-22.91	-5.74	Peak	Horizontal
6	2483.500	42.99	48.73	54.00	-11.01	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.84	55.85	74.00	-24.16	-6.01	Peak	Vertical
2	2390.000	42.87	48.88	54.00	-11.13	-6.01	Average	Vertical
3 PK	2462.000	85.90	93.04	74.00	11.90	-7.14	Peak	Vertical
4 PP	2462.000	84.32	91.46	54.00	30.32	-7.14	Average	Vertical
5	2483.500	49.70	56.58	74.00	-24.30	-6.88	Peak	Vertical
6	2483.500	42.11	48.99	54.00	-11.89	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.12	57.69	74.00	-23.88	-7.57	Peak	Horizontal
2	2390.000	42.54	50.11	54.00	-11.46	-7.57	Average	Horizontal
3 PK	2412.000	92.98	99.94	74.00	18.98	-6.96	Peak	Horizontal
4 PP	2412.000	84.83	91.79	54.00	30.83	-6.96	Average	Horizontal
5	2483.500	50.75	56.49	74.00	-23.25	-5.74	Peak	Horizontal
6	2483.500	43.34	49.08	54.00	-10.66	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.30	57.31	74.00	-22.70	-6.01	Peak	Vertical
2	2390.000	43.40	49.41	54.00	-10.60	-6.01	Average	Vertical
3 PK	2412.000	89.62	96.05	74.00	15.62	-6.43	Peak	Vertical
4 PP	2412.000	81.05	87.48	54.00	27.05	-6.43	Average	Vertical
5	2483.500	49.24	56.12	74.00	-24.76	-6.88	Peak	Vertical
6	2483.500	41.93	48.81	54.00	-12.07	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.53	56.10	74.00	-25.47	-7.57	Peak	Horizontal
2	2390.000	41.32	48.89	54.00	-12.68	-7.57	Average	Horizontal
3 PK	2437.000	94.28	100.39	74.00	20.28	-6.11	Peak	Horizontal
4 PP	2437.000	86.16	92.27	54.00	32.16	-6.11	Average	Horizontal
5	2483.500	50.39	56.13	74.00	-23.61	-5.74	Peak	Horizontal
6	2483.500	42.96	48.70	54.00	-11.04	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.29	57.30	74.00	-22.71	-6.01	Peak	Vertical
2	2390.000	43.31	49.32	54.00	-10.69	-6.01	Average	Vertical
3 PK	2437.000	92.07	99.05	74.00	18.07	-6.98	Peak	Vertical
4 PP	2437.000	84.12	91.10	54.00	30.12	-6.98	Average	Vertical
5	2483.500	51.01	57.89	74.00	-22.99	-6.88	Peak	Vertical
6	2483.500	41.98	48.86	54.00	-12.02	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.71	56.28	74.00	-25.29	-7.57	Peak	Horizontal
2	2390.000	41.51	49.08	54.00	-12.49	-7.57	Average	Horizontal
3 PK	2462.000	94.88	100.59	74.00	20.88	-5.71	Peak	Horizontal
4 PP	2462.000	87.23	92.94	54.00	33.23	-5.71	Average	Horizontal
5	2483.500	60.44	66.18	74.00	-13.56	-5.74	Peak	Horizontal
6	2483.500	49.52	55.26	54.00	-4.48	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.15	57.16	74.00	-22.85	-6.01	Peak	Vertical
2	2390.000	43.16	49.17	54.00	-10.84	-6.01	Average	Vertical
3 PK	2462.000	92.62	99.76	74.00	18.62	-7.14	Peak	Vertical
4 PP	2462.000	85.09	92.23	54.00	31.09	-7.14	Average	Vertical
5	2483.500	60.06	66.94	74.00	-13.94	-6.88	Peak	Vertical
6	2483.500	49.87	56.75	54.00	-4.13	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



BUREAU VERITAS Test Report No.: W7L-241112W001RF02

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.37	56.94	74.00	-24.63	-7.57	Peak	Horizontal
2	2390.000	42.78	50.35	54.00	-11.22	-7.57	Average	Horizontal
3 PK	2412.000	88.59	95.55	74.00	14.59	-6.96	Peak	Horizontal
4 PP	2412.000	79.59	86.55	54.00	25.59	-6.96	Average	Horizontal
5	2483.500	51.42	57.16	74.00	-22.58	-5.74	Peak	Horizontal
6	2483.500	43.49	49.23	54.00	-10.51	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.32	56.33	74.00	-23.68	-6.01	Peak	Vertical
2	2390.000	43.58	49.59	54.00	-10.42	-6.01	Average	Vertical
3 PK	2412.000	91.64	98.07	74.00	17.64	-6.43	Peak	Vertical
4 PP	2412.000	82.69	89.12	54.00	28.69	-6.43	Average	Vertical
5	2483.500	49.91	56.79	74.00	-24.09	-6.88	Peak	Vertical
6	2483.500	42.25	49.13	54.00	-11.75	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.00	56.57	74.00	-25.00	-7.57	Peak	Horizontal
2	2390.000	41.57	49.14	54.00	-12.43	-7.57	Average	Horizontal
3 PK	2437.000	93.60	99.71	74.00	19.60	-6.11	Peak	Horizontal
4 PP	2437.000	84.94	91.05	54.00	30.94	-6.11	Average	Horizontal
5	2483.500	51.40	57.14	74.00	-22.60	-5.74	Peak	Horizontal
6	2483.500	42.92	48.66	54.00	-11.08	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.42	57.43	74.00	-22.58	-6.01	Peak	Vertical
2	2390.000	43.23	49.24	54.00	-10.77	-6.01	Average	Vertical
3 PK	2437.000	90.48	97.46	74.00	16.48	-6.98	Peak	Vertical
4 PP	2437.000	81.69	88.67	54.00	27.69	-6.98	Average	Vertical
5	2483.500	48.94	55.82	74.00	-25.06	-6.88	Peak	Vertical
6	2483.500	42.73	49.61	54.00	-11.27	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.24	56.81	74.00	-24.76	-7.57	Peak	Horizontal
2	2390.000	42.09	49.66	54.00	-11.91	-7.57	Average	Horizontal
3 PK	2462.000	96.01	101.72	74.00	22.01	-5.71	Peak	Horizontal
4 PP	2462.000	87.00	92.71	54.00	33.00	-5.71	Average	Horizontal
5	2483.500	60.64	66.38	74.00	-13.36	-5.74	Peak	Horizontal
6	2483.500	50.91	56.65	54.00	-3.09	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.36	56.37	74.00	-23.64	-6.01	Peak	Vertical
2	2390.000	42.68	48.69	54.00	-11.32	-6.01	Average	Vertical
3 PK	2462.000	90.81	97.95	74.00	16.81	-7.14	Peak	Vertical
4 PP	2462.000	82.59	89.73	54.00	28.59	-7.14	Average	Vertical
5	2483.500	61.51	68.39	74.00	-12.49	-6.88	Peak	Vertical
6	2483.500	49.67	56.55	54.00	-4.33	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



Test Report No.: W7L-241112W001RF02


Worst case harmonic:

802.11n (20MHz)

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	PP	4924.000	47.87	49.69	74.00	-26.13	-1.82	Peak	Horizontal
2		7392.000	45.68	43.36	74.00	-28.32	2.32	Peak	Horizontal

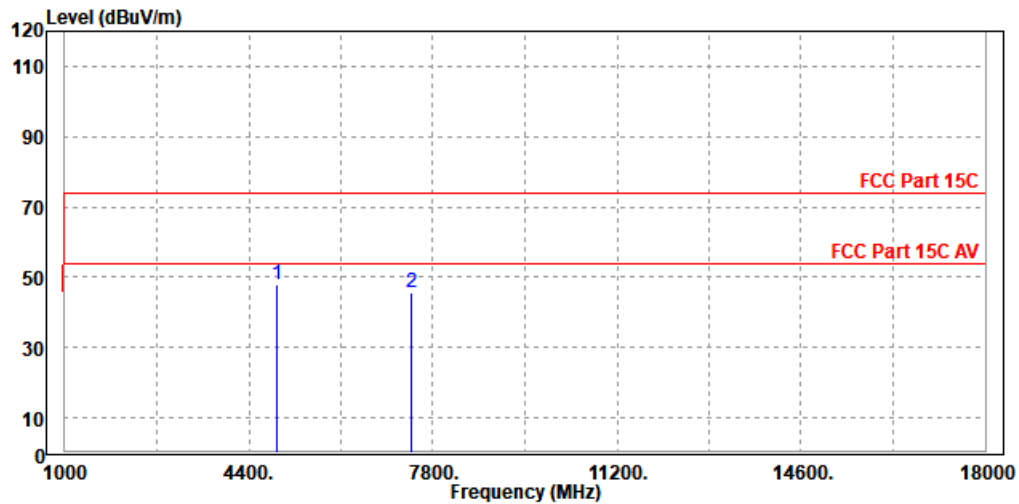



BUREAU
VERITAS


Test Report No.: W7L-241112W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	PP	4927.000	47.68	49.55	74.00	-26.32	-1.87	Peak	Vertical
2		7386.000	46.60	44.06	74.00	-27.40	2.54	Peak	Vertical

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2422MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

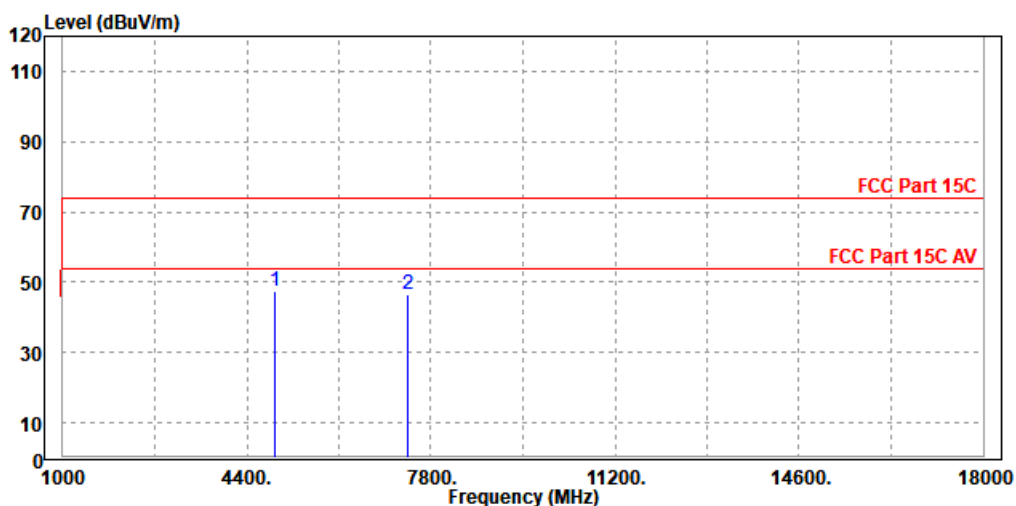



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

LEFT

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

802.11N (20MHz) :


CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1 PP	30.970	21.15	33.83	40.00	-18.85	-12.68	Peak	Horizontal
2	53.280	16.26	40.16	40.00	-23.74	-23.90	Peak	Horizontal
3	69.770	19.58	43.22	40.00	-20.42	-23.64	Peak	Horizontal
4	200.720	15.14	34.37	43.50	-28.36	-19.23	Peak	Horizontal
5	307.420	19.01	35.22	46.00	-26.99	-16.21	Peak	Horizontal
6	410.240	22.77	34.28	46.00	-23.23	-11.51	Peak	Horizontal

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

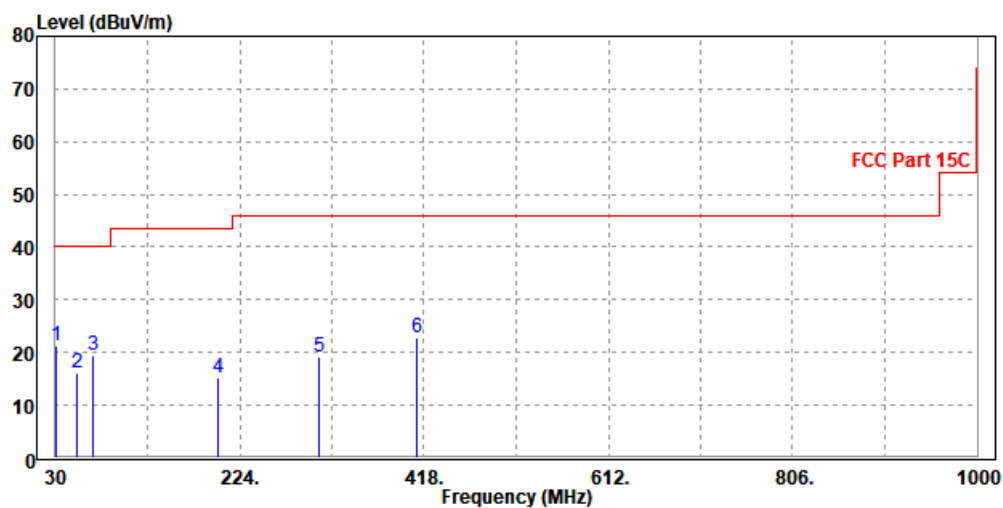



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02


CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	70.740	20.07	43.77	40.00	-19.93	-23.70	Peak	Vertical
2	158.040	15.38	34.29	43.50	-28.12	-18.91	Peak	Vertical
3	258.920	18.07	34.28	46.00	-27.93	-16.21	Peak	Vertical
4	361.740	21.57	34.91	46.00	-24.43	-13.34	Peak	Vertical
5	519.850	24.51	33.77	46.00	-21.49	-9.26	Peak	Vertical
6 PP	717.730	30.05	36.15	46.00	-15.95	-6.10	Peak	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

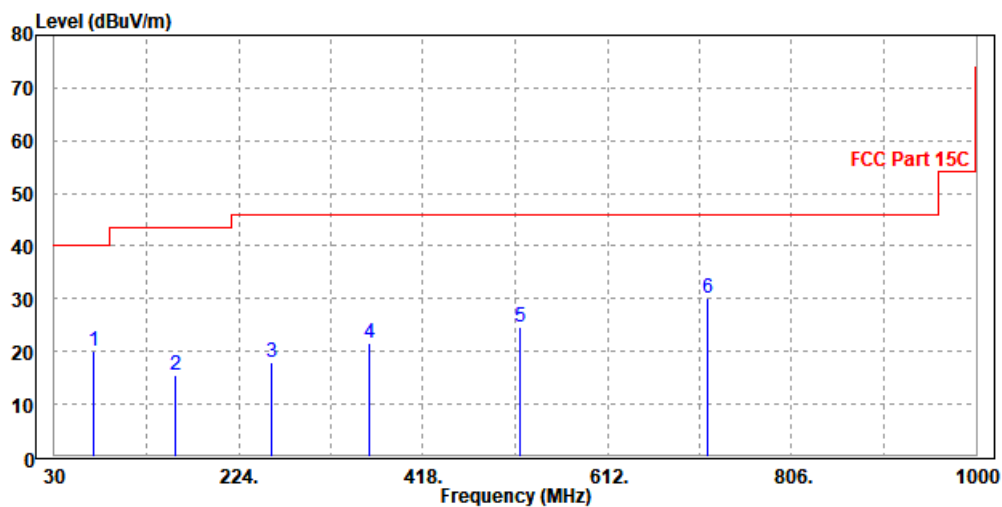



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

ABOVE 1GHz WORST-CASE DATA:

Note: 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

802.11b:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.37	58.94	74.00	-22.63	-7.57	Peak	Horizontal
2	2390.000	41.74	49.31	54.00	-12.26	-7.57	Average	Horizontal
3 PK	2412.000	82.44	89.40	74.00	8.44	-6.96	Peak	Horizontal
4 PP	2412.000	81.14	88.10	54.00	27.14	-6.96	Average	Horizontal
5	2483.500	50.61	56.35	74.00	-23.39	-5.74	Peak	Horizontal
6	2483.500	43.50	49.24	54.00	-10.50	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.99	57.00	74.00	-23.01	-6.01	Peak	Vertical
2	2390.000	43.25	49.26	54.00	-10.75	-6.01	Average	Vertical
3 PK	2412.000	83.64	90.07	74.00	9.64	-6.43	Peak	Vertical
4 PP	2412.000	82.15	88.58	54.00	28.15	-6.43	Average	Vertical
5	2483.500	49.02	55.90	74.00	-24.98	-6.88	Peak	Vertical
6	2483.500	42.47	49.35	54.00	-11.53	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.75	56.32	74.00	-25.25	-7.57	Peak	Horizontal
2	2390.000	41.56	49.13	54.00	-12.44	-7.57	Average	Horizontal
3 PK	2437.000	89.19	95.30	74.00	15.19	-6.11	Peak	Horizontal
4 PP	2437.000	88.01	94.12	54.00	34.01	-6.11	Average	Horizontal
5	2483.500	50.75	56.49	74.00	-23.25	-5.74	Peak	Horizontal
6	2483.500	43.29	49.03	54.00	-10.71	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.17	56.18	74.00	-23.83	-6.01	Peak	Vertical
2	2390.000	43.03	49.04	54.00	-10.97	-6.01	Average	Vertical
3 PK	2437.000	86.25	93.23	74.00	12.25	-6.98	Peak	Vertical
4 PP	2437.000	84.95	91.93	54.00	30.95	-6.98	Average	Vertical
5	2483.500	50.00	56.88	74.00	-24.00	-6.88	Peak	Vertical
6	2483.500	42.11	48.99	54.00	-11.89	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.20	56.77	74.00	-24.80	-7.57	Peak	Horizontal
2	2390.000	41.21	48.78	54.00	-12.79	-7.57	Average	Horizontal
3 PK	2462.000	89.10	94.81	74.00	15.10	-5.71	Peak	Horizontal
4 PP	2462.000	88.03	93.74	54.00	34.03	-5.71	Average	Horizontal
5	2483.500	51.49	57.23	74.00	-22.51	-5.74	Peak	Horizontal
6	2483.500	43.17	48.91	54.00	-10.83	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.95	56.96	74.00	-23.05	-6.01	Peak	Vertical
2	2390.000	43.14	49.15	54.00	-10.86	-6.01	Average	Vertical
3 PK	2462.000	85.88	93.02	74.00	11.88	-7.14	Peak	Vertical
4 PP	2462.000	84.90	92.04	54.00	30.90	-7.14	Average	Vertical
5	2483.500	50.32	57.20	74.00	-23.68	-6.88	Peak	Vertical
6	2483.500	42.11	48.99	54.00	-11.89	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.65	56.22	74.00	-25.35	-7.57	Peak	Horizontal
2	2390.000	42.14	49.71	54.00	-11.86	-7.57	Average	Horizontal
3	PK 2412.000	88.66	95.62	74.00	14.66	-6.96	Peak	Horizontal
4	PP 2412.000	80.96	87.92	54.00	26.96	-6.96	Average	Horizontal
5	2483.500	50.96	56.70	74.00	-23.04	-5.74	Peak	Horizontal
6	2483.500	43.41	49.15	54.00	-10.59	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.10	57.11	74.00	-22.90	-6.01	Peak	Vertical
2	2390.000	43.79	49.80	54.00	-10.21	-6.01	Average	Vertical
3	PK 2412.000	89.70	96.13	74.00	15.70	-6.43	Peak	Vertical
4	PP 2412.000	82.09	88.52	54.00	28.09	-6.43	Average	Vertical
5	2483.500	49.23	56.11	74.00	-24.77	-6.88	Peak	Vertical
6	2483.500	41.72	48.60	54.00	-12.28	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.14	56.71	74.00	-24.86	-7.57	Peak	Horizontal
2	2390.000	41.22	48.79	54.00	-12.78	-7.57	Average	Horizontal
3 PK	2437.000	91.96	98.07	74.00	17.96	-6.11	Peak	Horizontal
4 PP	2437.000	84.48	90.59	54.00	30.48	-6.11	Average	Horizontal
5	2483.500	50.10	55.84	74.00	-23.90	-5.74	Peak	Horizontal
6	2483.500	43.26	49.00	54.00	-10.74	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.87	55.88	74.00	-24.13	-6.01	Peak	Vertical
2	2390.000	43.37	49.38	54.00	-10.63	-6.01	Average	Vertical
3 PK	2437.000	90.83	97.81	74.00	16.83	-6.98	Peak	Vertical
4 PP	2437.000	83.46	90.44	54.00	29.46	-6.98	Average	Vertical
5	2483.500	50.28	57.16	74.00	-23.72	-6.88	Peak	Vertical
6	2483.500	41.62	48.50	54.00	-12.38	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.80	56.37	74.00	-25.20	-7.57	Peak	Horizontal
2	2390.000	41.45	49.02	54.00	-12.55	-7.57	Average	Horizontal
3	PK 2462.000	93.40	99.11	74.00	19.40	-5.71	Peak	Horizontal
4	PP 2462.000	85.97	91.68	54.00	31.97	-5.71	Average	Horizontal
5	2483.500	55.29	61.03	74.00	-18.71	-5.74	Peak	Horizontal
6	2483.500	46.43	52.17	54.00	-7.57	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.53	57.54	74.00	-22.47	-6.01	Peak	Vertical
2	2390.000	43.56	49.57	54.00	-10.44	-6.01	Average	Vertical
3	PK 2462.000	90.60	97.74	74.00	16.60	-7.14	Peak	Vertical
4	PP 2462.000	82.94	90.08	54.00	28.94	-7.14	Average	Vertical
5	2483.500	53.27	60.15	74.00	-20.73	-6.88	Peak	Vertical
6	2483.500	44.82	51.70	54.00	-9.18	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.70	58.27	74.00	-23.30	-7.57	Peak	Horizontal
2	2390.000	42.20	49.77	54.00	-11.80	-7.57	Average	Horizontal
3 PK	2412.000	88.74	95.70	74.00	14.74	-6.96	Peak	Horizontal
4 PP	2412.000	82.45	89.41	54.00	28.45	-6.96	Average	Horizontal
5	2483.500	51.03	56.77	74.00	-22.97	-5.74	Peak	Horizontal
6	2483.500	43.05	48.79	54.00	-10.95	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.46	57.47	74.00	-22.54	-6.01	Peak	Vertical
2	2390.000	43.60	49.61	54.00	-10.40	-6.01	Average	Vertical
3 PK	2412.000	86.91	93.34	74.00	12.91	-6.43	Peak	Vertical
4 PP	2412.000	78.36	84.79	54.00	24.36	-6.43	Average	Vertical
5	2483.500	49.73	56.61	74.00	-24.27	-6.88	Peak	Vertical
6	2483.500	42.15	49.03	54.00	-11.85	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.15	55.72	74.00	-25.85	-7.57	Peak	Horizontal
2	2390.000	41.43	49.00	54.00	-12.57	-7.57	Average	Horizontal
3 PK	2437.000	95.26	101.37	74.00	21.26	-6.11	Peak	Horizontal
4 PP	2437.000	86.50	92.61	54.00	32.50	-6.11	Average	Horizontal
5	2483.500	51.38	57.12	74.00	-22.62	-5.74	Peak	Horizontal
6	2483.500	43.12	48.86	54.00	-10.88	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.56	56.57	74.00	-23.44	-6.01	Peak	Vertical
2	2390.000	43.24	49.25	54.00	-10.76	-6.01	Average	Vertical
3 PK	2437.000	90.50	97.48	74.00	16.50	-6.98	Peak	Vertical
4 PP	2437.000	81.81	88.79	54.00	27.81	-6.98	Average	Vertical
5	2483.500	50.60	57.48	74.00	-23.40	-6.88	Peak	Vertical
6	2483.500	41.73	48.61	54.00	-12.27	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.24	56.81	74.00	-24.76	-7.57	Peak	Horizontal
2	2390.000	41.86	49.43	54.00	-12.14	-7.57	Average	Horizontal
3	PK 2462.000	94.98	100.69	74.00	20.98	-5.71	Peak	Horizontal
4	PP 2462.000	86.36	92.07	54.00	32.36	-5.71	Average	Horizontal
5	2483.500	57.36	63.10	74.00	-16.64	-5.74	Peak	Horizontal
6	2483.500	48.36	54.10	54.00	-5.64	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.86	55.87	74.00	-24.14	-6.01	Peak	Vertical
2	2390.000	42.76	48.77	54.00	-11.24	-6.01	Average	Vertical
3	PK 2462.000	91.22	98.36	74.00	17.22	-7.14	Peak	Vertical
4	PP 2462.000	82.49	89.63	54.00	28.49	-7.14	Average	Vertical
5	2483.500	55.88	62.76	74.00	-18.12	-6.88	Peak	Vertical
6	2483.500	45.64	52.52	54.00	-8.36	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02


Worst case harmonic:

802.11n (20MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4927.000	44.96	46.77	74.00	-29.04	-1.81	Peak	Horizontal
2 PP	7386.000	46.35	44.04	74.00	-27.65	2.31	Peak	Horizontal

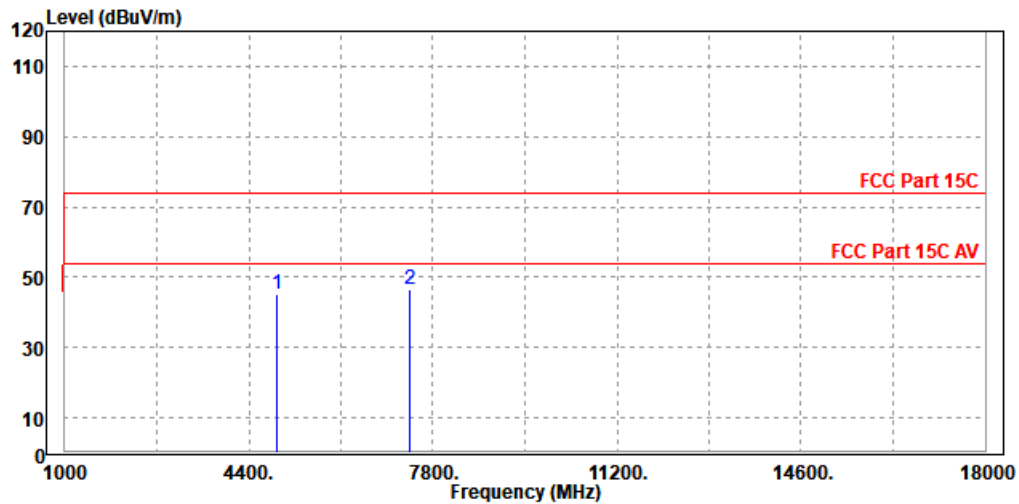



**BUREAU
VERITAS**


Test Report No.: W7L-241112W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4924.000	44.59	46.46	74.00	-29.41	-1.87	Peak	Vertical
2 PP	7392.000	45.64	43.10	74.00	-28.36	2.54	Peak	Vertical

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2422MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

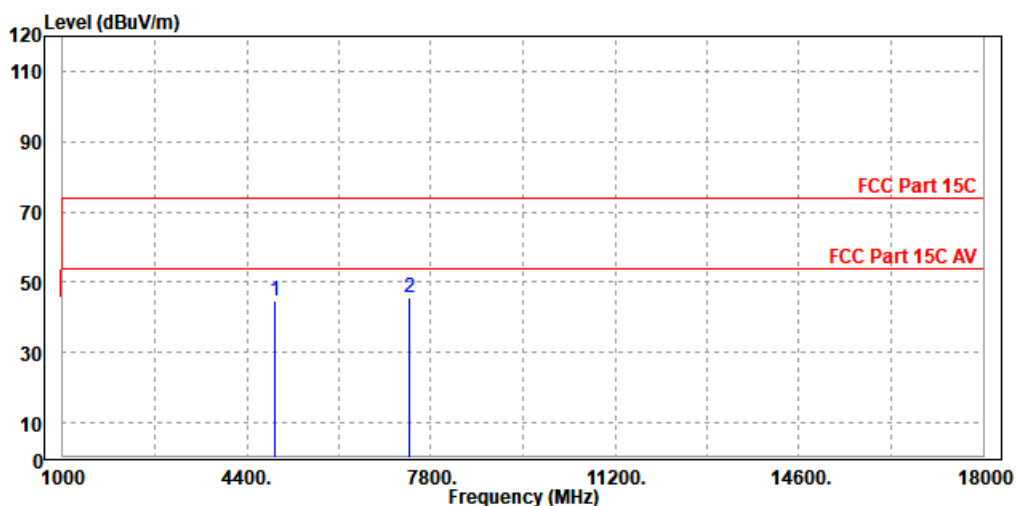



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

RIGHT

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

BT-LE _1M


CHANNEL	TX Channel 39	ODETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	51.340	18.34	41.55	40.00	-21.66	-23.21	Peak	Horizontal
2	189.080	20.14	40.12	43.50	-23.36	-19.98	Peak	Horizontal
3 PP	349.130	31.78	45.92	46.00	-14.22	-14.14	Peak	Horizontal
4	389.870	30.47	42.69	46.00	-15.53	-12.22	Peak	Horizontal
5	542.160	26.98	34.98	46.00	-19.02	-8.00	Peak	Horizontal
6	690.570	29.75	35.60	46.00	-16.25	-5.85	Peak	Horizontal

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

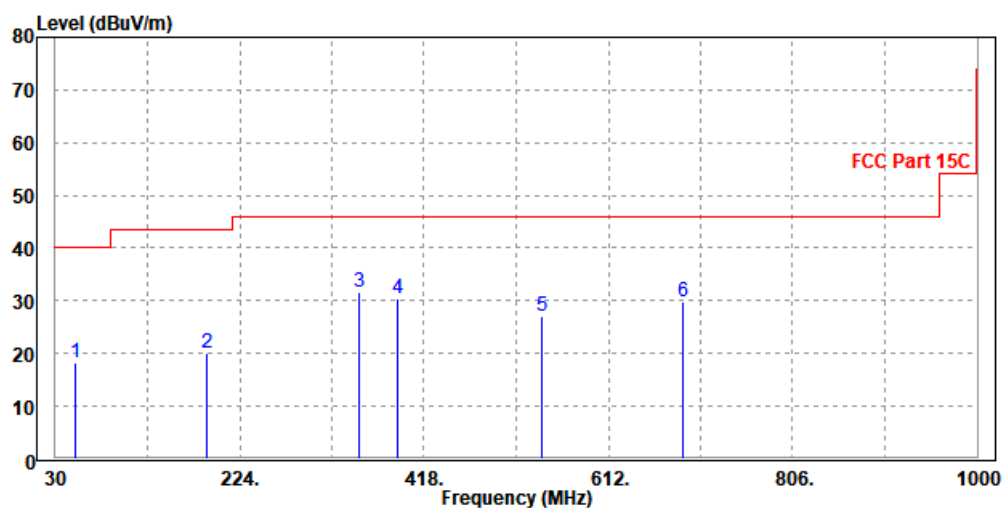



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02


CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	30.000	21.78	34.09	40.00	-18.22	-12.31	Peak	Vertical
2	70.740	17.81	41.51	40.00	-22.19	-23.70	Peak	Vertical
3	156.100	17.99	36.90	43.50	-25.51	-18.91	Peak	Vertical
4 PP	366.590	34.95	48.24	46.00	-11.05	-13.29	Peak	Vertical
5	402.480	34.93	46.68	46.00	-11.07	-11.75	Peak	Vertical
6	692.510	29.63	35.40	46.00	-16.37	-5.77	Peak	Vertical

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

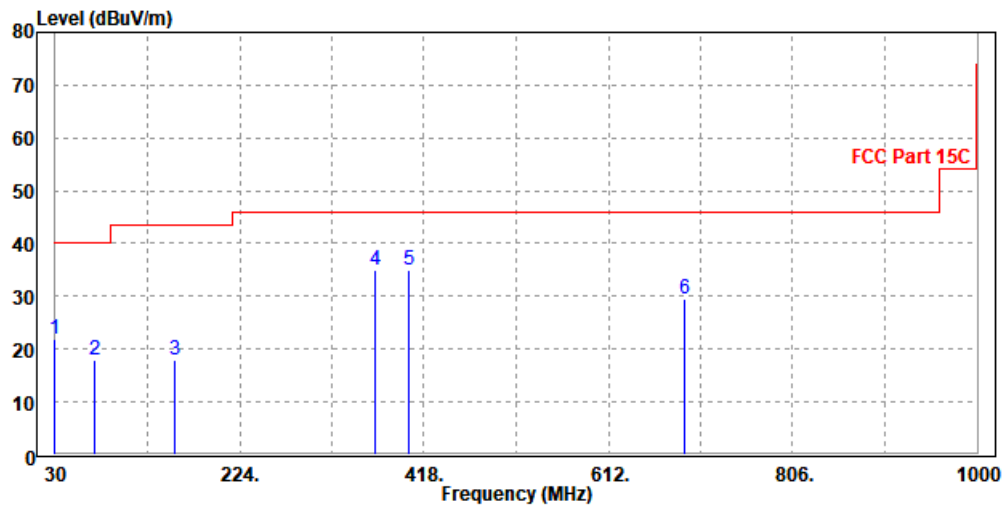

**BUREAU VERITAS Test Report No.: W7L-241112W001RF02****ABOVE 1GHz TEST DATA**

Note: 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

BT-LE _1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	55.45	63.02	74.00	-18.55	-7.57	Peak	Horizontal
2	2390.000	43.47	51.04	54.00	-10.53	-7.57	Average	Horizontal
3 PK	2402.000	98.99	106.29	74.00	24.99	-7.30	Peak	Horizontal
4 PP	2402.000	98.72	106.02	54.00	44.72	-7.30	Average	Horizontal
5	2483.500	52.22	57.96	74.00	-21.78	-5.74	Peak	Horizontal
6	2483.500	43.50	49.24	54.00	-10.50	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	55.99	62.00	74.00	-18.01	-6.01	Peak	Vertical
2	2390.000	43.82	49.83	54.00	-10.18	-6.01	Average	Vertical
3 PK	2402.000	100.22	106.43	74.00	26.22	-6.21	Peak	Vertical
4 PP	2402.000	99.88	106.09	54.00	45.88	-6.21	Average	Vertical
5	2483.500	50.27	57.15	74.00	-23.73	-6.88	Peak	Vertical
6	2483.500	42.53	49.41	54.00	-11.47	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.62	56.19	74.00	-25.38	-7.57	Peak	Horizontal
2	2390.000	41.86	49.43	54.00	-12.14	-7.57	Average	Horizontal
3 PK	2440.000	99.06	105.07	74.00	25.06	-6.01	Peak	Horizontal
4 PP	2440.000	99.00	105.01	54.00	45.00	-6.01	Average	Horizontal
5	2483.500	50.77	56.51	74.00	-23.23	-5.74	Peak	Horizontal
6	2483.500	43.06	48.80	54.00	-10.94	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.47	57.48	74.00	-22.53	-6.01	Peak	Vertical
2	2390.000	43.28	49.29	54.00	-10.72	-6.01	Average	Vertical
3 PK	2440.000	98.68	105.73	74.00	24.68	-7.05	Peak	Vertical
4 PP	2440.000	98.61	105.66	54.00	44.61	-7.05	Average	Vertical
5	2483.500	49.36	56.24	74.00	-24.64	-6.88	Peak	Vertical
6	2483.500	42.89	49.77	54.00	-11.11	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.60	57.17	74.00	-24.40	-7.57	Peak	Horizontal
2	2390.000	41.78	49.35	54.00	-12.22	-7.57	Average	Horizontal
3 PK	2480.000	99.86	105.60	74.00	25.86	-5.74	Peak	Horizontal
4 PP	2480.000	99.52	105.26	54.00	45.52	-5.74	Average	Horizontal
5	2483.500	70.90	76.64	74.00	-3.10	-5.74	Peak	Horizontal
6	2483.500	49.67	55.41	54.00	-4.33	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.35	56.36	74.00	-23.65	-6.01	Peak	Vertical
2	2390.000	43.73	49.74	54.00	-10.27	-6.01	Average	Vertical
3 PK	2480.000	97.87	104.79	74.00	23.87	-6.92	Peak	Vertical
4 PP	2480.000	97.82	104.74	54.00	43.82	-6.92	Average	Vertical
5	2483.500	70.14	77.02	74.00	-3.86	-6.88	Peak	Vertical
6	2483.500	49.52	56.40	54.00	-4.48	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: W7L-241112W001RF02

Worst case harmonic:

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4960.000	44.08	45.81	74.00	-29.92	-1.73	Peak	Horizontal
2 PP	7443.000	46.78	44.35	74.00	-27.22	2.43	Peak	Horizontal

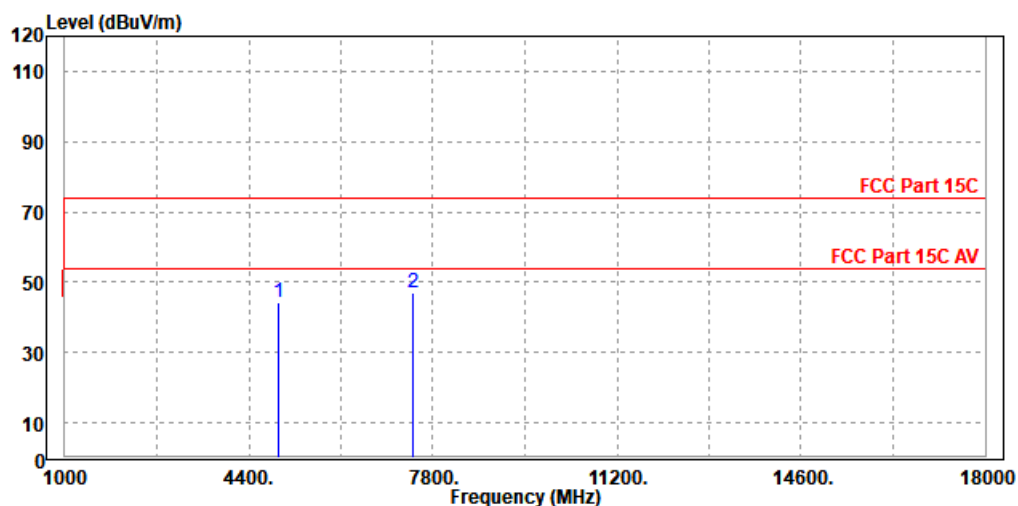




BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	44.96	46.93	74.00	-29.04	-1.97	Peak	Vertical
2 PP	7440.000	46.14	43.76	74.00	-27.86	2.38	Peak	Vertical

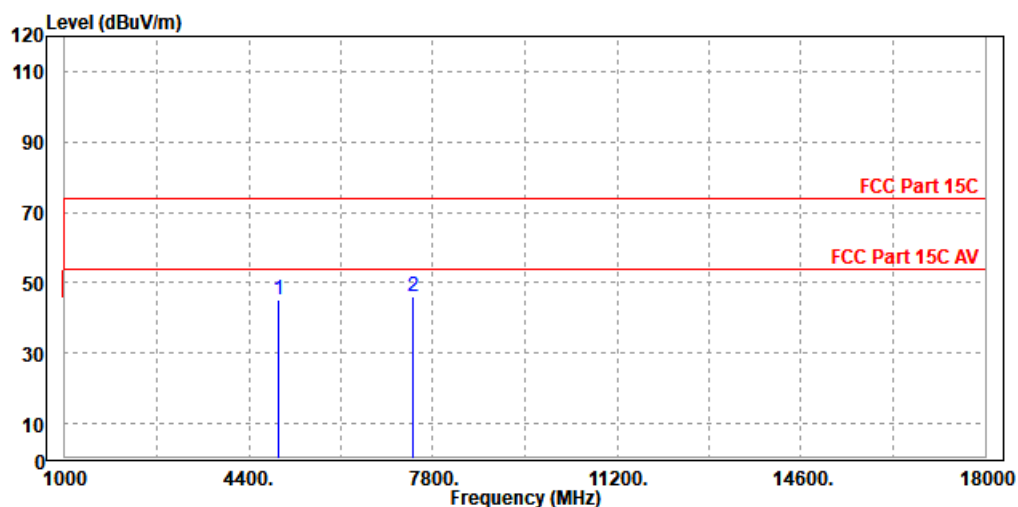

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



BUREAU VERITAS Test Report No.: W7L-241112W001RF02

BT-LE_2M

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	54.96	62.53	74.00	-19.04	-7.57	Peak	Horizontal
2	2390.000	42.36	49.93	54.00	-11.64	-7.57	Average	Horizontal
3 PK	2404.000	99.46	106.68	74.00	25.46	-7.22	Peak	Horizontal
4 PP	2404.000	98.96	106.18	54.00	44.96	-7.22	Average	Horizontal
5	2483.500	51.88	57.62	74.00	-22.12	-5.74	Peak	Horizontal
6	2483.500	43.88	49.62	54.00	-10.12	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	57.21	63.22	74.00	-16.79	-6.01	Peak	Vertical
2	2390.000	43.92	49.93	54.00	-10.08	-6.01	Average	Vertical
3 PK	2404.000	100.89	107.14	74.00	26.89	-6.25	Peak	Vertical
4 PP	2404.000	100.83	107.08	54.00	46.83	-6.25	Average	Vertical
5	2483.500	50.15	57.03	74.00	-23.85	-6.88	Peak	Vertical
6	2483.500	42.23	49.11	54.00	-11.77	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2404MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.54	57.11	74.00	-24.46	-7.57	Peak	Horizontal
2	2390.000	41.73	49.30	54.00	-12.27	-7.57	Average	Horizontal
3 PK	2440.000	101.78	107.79	74.00	27.78	-6.01	Peak	Horizontal
4 PP	2440.000	101.64	107.65	54.00	47.64	-6.01	Average	Horizontal
5	2483.500	50.94	56.68	74.00	-23.06	-5.74	Peak	Horizontal
6	2483.500	43.50	49.24	54.00	-10.50	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.74	56.75	74.00	-23.26	-6.01	Peak	Vertical
2	2390.000	43.12	49.13	54.00	-10.88	-6.01	Average	Vertical
3 PK	2440.000	98.57	105.62	74.00	24.57	-7.05	Peak	Vertical
4 PP	2440.000	98.52	105.57	54.00	44.52	-7.05	Average	Vertical
5	2483.500	49.34	56.22	74.00	-24.66	-6.88	Peak	Vertical
6	2483.500	42.28	49.16	54.00	-11.72	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.24	55.81	74.00	-25.76	-7.57	Peak	Horizontal
2	2390.000	41.88	49.45	54.00	-12.12	-7.57	Average	Horizontal
3 PK	2478.000	100.14	105.87	74.00	26.14	-5.73	Peak	Horizontal
4 PP	2478.000	100.05	105.78	54.00	46.05	-5.73	Average	Horizontal
5	2483.500	67.14	72.88	74.00	-6.86	-5.74	Peak	Horizontal
6	2483.500	47.78	53.52	54.00	-6.22	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	51.22	57.23	74.00	-22.78	-6.01	Peak	Vertical
2	2390.000	43.34	49.35	54.00	-10.66	-6.01	Average	Vertical
3 PK	2478.000	97.71	104.65	74.00	23.71	-6.94	Peak	Vertical
4 PP	2478.000	97.66	104.60	54.00	43.66	-6.94	Average	Vertical
5	2483.500	65.49	72.37	74.00	-8.51	-6.88	Peak	Vertical
6	2483.500	46.66	53.54	54.00	-7.34	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2478MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: W7L-241112W001RF02

Worst case harmonic:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	45.23	46.96	74.00	-28.77	-1.73	Peak	Horizontal
2 PP	7434.000	45.96	43.55	74.00	-28.04	2.41	Peak	Horizontal

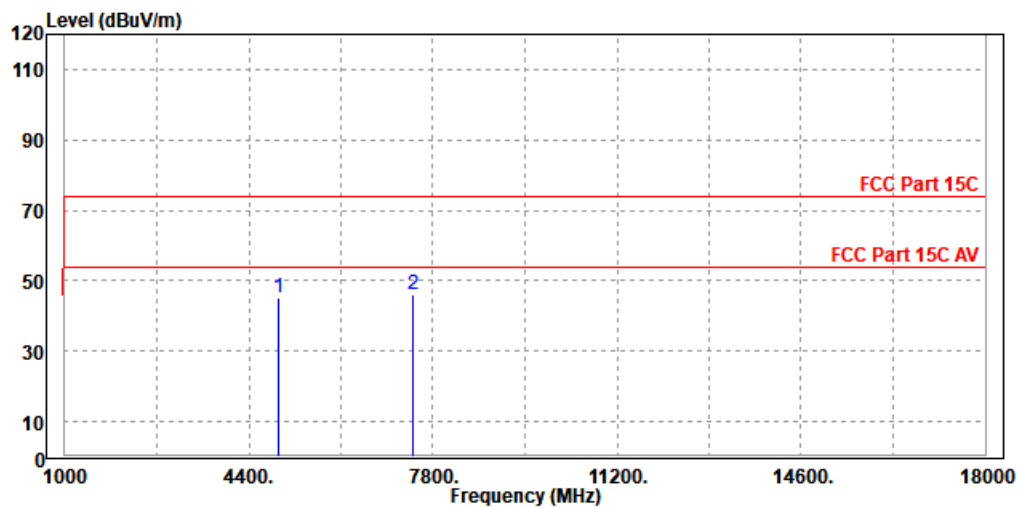




**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4956.000	44.36	46.32	74.00	-29.64	-1.96	Peak	Vertical
2 PP	7426.000	46.09	43.66	74.00	-27.91	2.43	Peak	Vertical

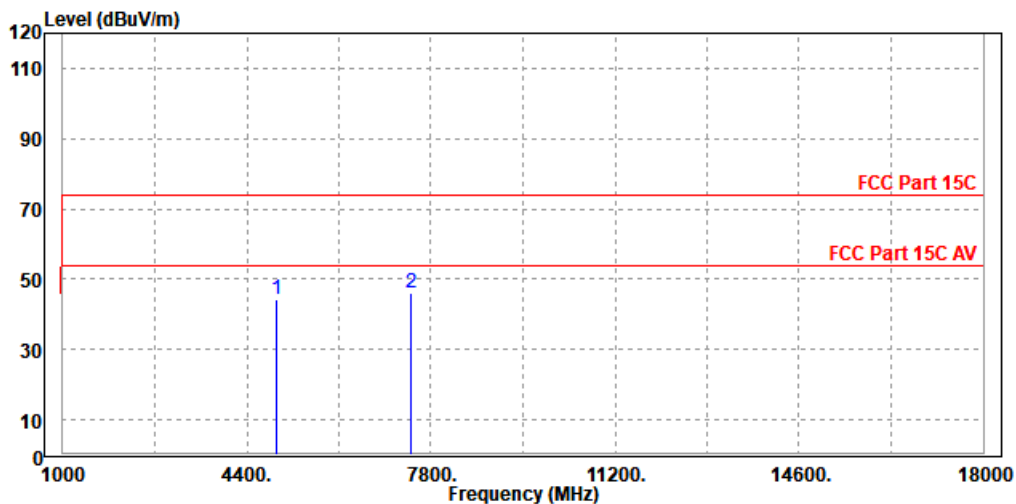

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2404MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

LEFT

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

BT-LE _S8


CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1 PP	30.000	20.71	33.02	40.00	-19.29	-12.31	Peak	Horizontal
2	57.160	18.98	41.24	40.00	-21.02	-22.26	Peak	Horizontal
3	69.770	20.23	43.87	40.00	-19.77	-23.64	Peak	Horizontal
4	158.040	14.69	33.60	43.50	-28.81	-18.91	Peak	Horizontal
5	264.740	18.13	34.13	46.00	-27.87	-16.00	Peak	Horizontal
6	417.030	23.49	35.02	46.00	-22.51	-11.53	Peak	Horizontal

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

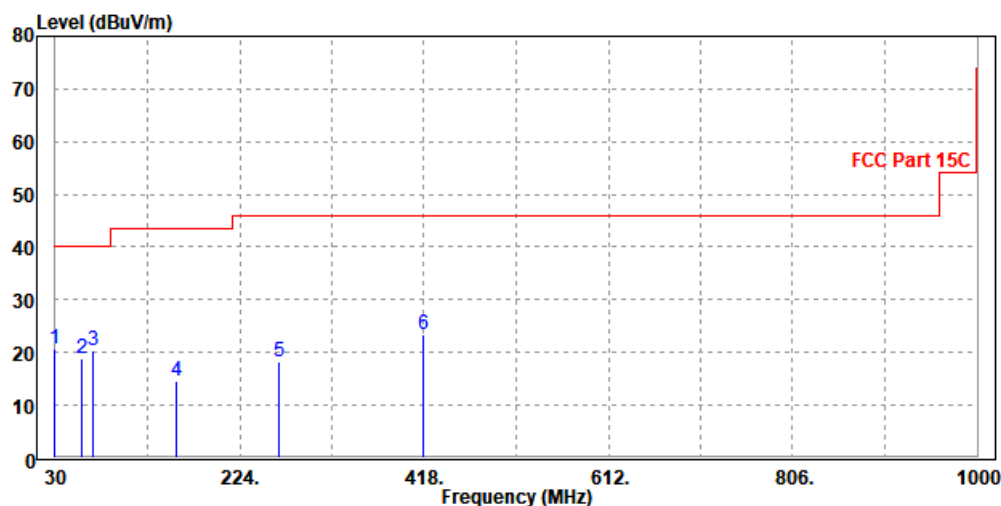



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02


CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	30.000	21.70	34.01	40.00	-18.30	-12.31	Peak	Vertical
2	40.670	21.81	39.60	40.00	-18.19	-17.79	Peak	Vertical
3 PP	69.770	22.76	46.40	40.00	-17.24	-23.64	Peak	Vertical
4	258.920	21.02	37.23	46.00	-24.98	-16.21	Peak	Vertical
5	361.740	24.14	37.48	46.00	-21.86	-13.34	Peak	Vertical
6	540.220	27.89	35.97	46.00	-18.11	-8.08	Peak	Vertical

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

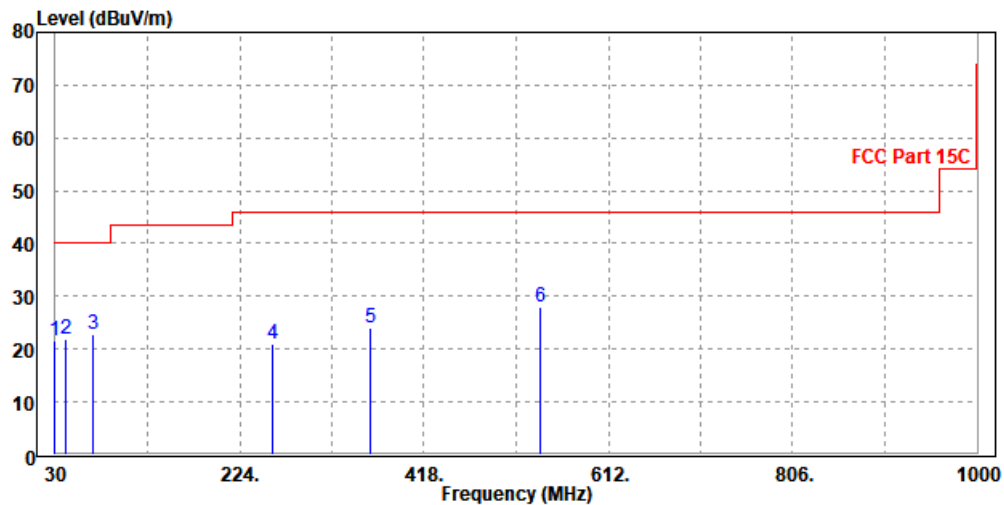

**BUREAU VERITAS Test Report No.: W7L-241112W001RF02****ABOVE 1GHz TEST DATA**

Note: 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

BT-LE _1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	56.98	64.55	74.00	-17.02	-7.57	Peak	Horizontal
2	2390.000	42.76	50.33	54.00	-11.24	-7.57	Average	Horizontal
3 PK	2402.000	98.62	105.92	74.00	24.62	-7.30	Peak	Horizontal
4 PP	2402.000	98.58	105.88	54.00	44.58	-7.30	Average	Horizontal
5	2483.500	50.50	56.24	74.00	-23.50	-5.74	Peak	Horizontal
6	2483.500	43.65	49.39	54.00	-10.35	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	58.75	64.76	74.00	-15.25	-6.01	Peak	Vertical
2	2390.000	44.55	50.56	54.00	-9.45	-6.01	Average	Vertical
3 PK	2402.000	99.11	105.32	74.00	25.11	-6.21	Peak	Vertical
4 PP	2402.000	99.09	105.30	54.00	45.09	-6.21	Average	Vertical
5	2483.500	49.31	56.19	74.00	-24.69	-6.88	Peak	Vertical
6	2483.500	42.82	49.70	54.00	-11.18	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.66	57.23	74.00	-24.34	-7.57	Peak	Horizontal
2	2390.000	41.31	48.88	54.00	-12.69	-7.57	Average	Horizontal
3 PK	2440.000	100.61	106.62	74.00	26.61	-6.01	Peak	Horizontal
4 PP	2440.000	100.48	106.49	54.00	46.48	-6.01	Average	Horizontal
5	2483.500	51.16	56.90	74.00	-22.84	-5.74	Peak	Horizontal
6	2483.500	43.01	48.75	54.00	-10.99	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.87	56.88	74.00	-23.13	-6.01	Peak	Vertical
2	2390.000	43.49	49.50	54.00	-10.51	-6.01	Average	Vertical
3 PK	2440.000	98.36	105.41	74.00	24.36	-7.05	Peak	Vertical
4 PP	2440.000	98.24	105.29	54.00	44.24	-7.05	Average	Vertical
5	2483.500	51.17	58.05	74.00	-22.83	-6.88	Peak	Vertical
6	2483.500	42.90	49.78	54.00	-11.10	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.03	56.60	74.00	-24.97	-7.57	Peak	Horizontal
2	2390.000	41.56	49.13	54.00	-12.44	-7.57	Average	Horizontal
3 PK	2480.000	101.09	106.83	74.00	27.09	-5.74	Peak	Horizontal
4 PP	2480.000	101.04	106.78	54.00	47.04	-5.74	Average	Horizontal
5	2483.500	70.52	76.26	74.00	-3.48	-5.74	Peak	Horizontal
6	2483.500	50.74	56.48	54.00	-3.26	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.83	56.84	74.00	-23.17	-6.01	Peak	Vertical
2	2390.000	42.84	48.85	54.00	-11.16	-6.01	Average	Vertical
3 PK	2480.000	97.83	104.75	74.00	23.83	-6.92	Peak	Vertical
4 PP	2480.000	97.65	104.57	54.00	43.65	-6.92	Average	Vertical
5	2483.500	69.03	75.91	74.00	-4.97	-6.88	Peak	Vertical
6	2483.500	48.09	54.97	54.00	-5.91	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: W7L-241112W001RF02

Worst case harmonic:

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4960.000	45.01	46.74	74.00	-28.99	-1.73	Peak	Horizontal
2 PP	7443.000	47.35	44.92	74.00	-26.65	2.43	Peak	Horizontal

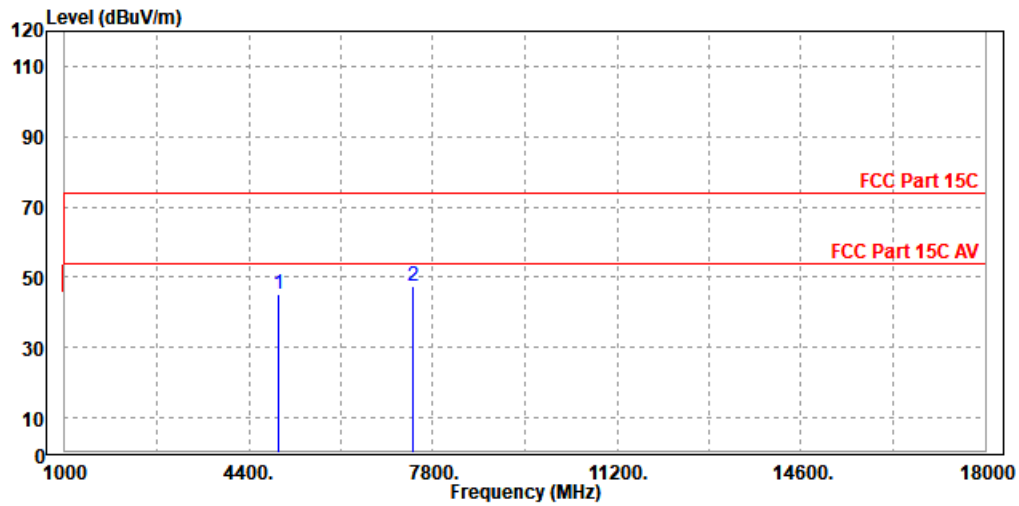




BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	44.16	46.13	74.00	-29.84	-1.97	Peak	Vertical
2 PP	7440.000	45.68	43.30	74.00	-28.32	2.38	Peak	Vertical

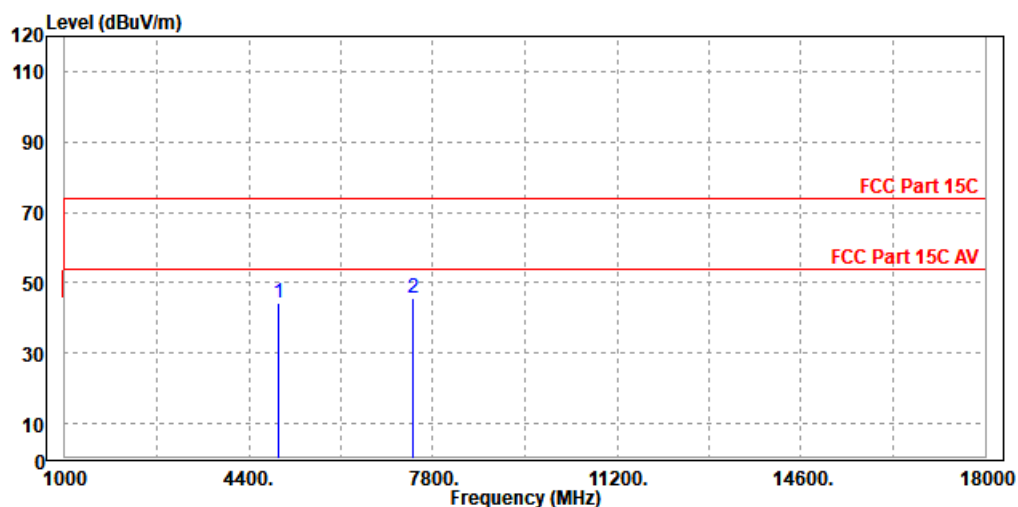

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

BT-LE_2M

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	57.19	64.76	74.00	-16.81	-7.57	Peak	Horizontal
2	2390.000	42.07	49.64	54.00	-11.93	-7.57	Average	Horizontal
3 PK	2404.000	99.66	106.88	74.00	25.66	-7.22	Peak	Horizontal
4 PP	2404.000	99.60	106.82	54.00	45.60	-7.22	Average	Horizontal
5	2483.500	50.65	56.39	74.00	-23.35	-5.74	Peak	Horizontal
6	2483.500	43.63	49.37	54.00	-10.37	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	56.23	62.24	74.00	-17.77	-6.01	Peak	Vertical
2	2390.000	44.12	50.13	54.00	-9.88	-6.01	Average	Vertical
3 PK	2404.000	98.65	104.90	74.00	24.65	-6.25	Peak	Vertical
4 PP	2404.000	98.63	104.88	54.00	44.63	-6.25	Average	Vertical
5	2483.500	48.83	55.71	74.00	-25.17	-6.88	Peak	Vertical
6	2483.500	41.69	48.57	54.00	-12.31	-6.88	Average	Vertical

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2404MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.68	56.25	74.00	-25.32	-7.57	Peak	Horizontal
2	2390.000	41.70	49.27	54.00	-12.30	-7.57	Average	Horizontal
3 PK	2440.000	103.61	109.62	74.00	29.61	-6.01	Peak	Horizontal
4 PP	2440.000	103.53	109.54	54.00	49.53	-6.01	Average	Horizontal
5	2483.500	50.96	56.70	74.00	-23.04	-5.74	Peak	Horizontal
6	2483.500	43.88	49.62	54.00	-10.12	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	50.70	56.71	74.00	-23.30	-6.01	Peak	Vertical
2	2390.000	42.72	48.73	54.00	-11.28	-6.01	Average	Vertical
3 PK	2440.000	98.57	105.62	74.00	24.57	-7.05	Peak	Vertical
4 PP	2440.000	98.53	105.58	54.00	44.53	-7.05	Average	Vertical
5	2483.500	50.70	57.58	74.00	-23.30	-6.88	Peak	Vertical
6	2483.500	41.57	48.45	54.00	-12.43	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	48.59	56.16	74.00	-25.41	-7.57	Peak	Horizontal
2	2390.000	41.59	49.16	54.00	-12.41	-7.57	Average	Horizontal
3 PK	2478.000	101.56	107.29	74.00	27.56	-5.73	Peak	Horizontal
4 PP	2478.000	101.42	107.15	54.00	47.42	-5.73	Average	Horizontal
5	2483.500	68.51	74.25	74.00	-5.49	-5.74	Peak	Horizontal
6	2483.500	48.40	54.14	54.00	-5.60	-5.74	Average	Horizontal

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	2390.000	49.83	55.84	74.00	-24.17	-6.01	Peak	Vertical
2	2390.000	42.67	48.68	54.00	-11.33	-6.01	Average	Vertical
3 PK	2478.000	97.62	104.56	74.00	23.62	-6.94	Peak	Vertical
4 PP	2478.000	97.60	104.54	54.00	43.60	-6.94	Average	Vertical
5	2483.500	63.09	69.97	74.00	-10.91	-6.88	Peak	Vertical
6	2483.500	45.45	52.33	54.00	-8.55	-6.88	Average	Vertical

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2478MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: W7L-241112W001RF02

Worst case harmonic:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4956.000	44.09	45.83	74.00	-29.91	-1.74	Peak	Horizontal
2 PP	7426.000	46.37	43.98	74.00	-27.63	2.39	Peak	Horizontal

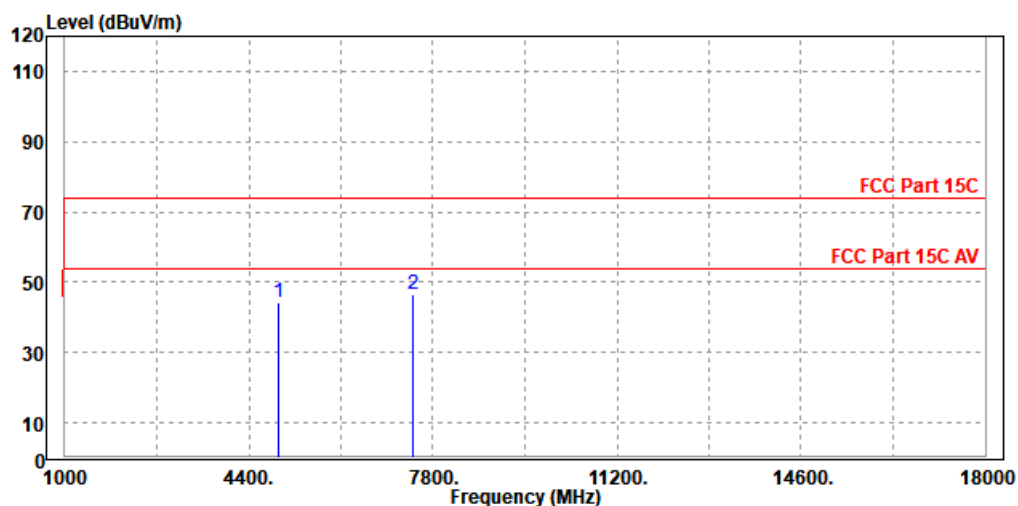




**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	44.35	46.32	74.00	-29.65	-1.97	Peak	Vertical
2 PP	7434.000	45.82	43.41	74.00	-28.18	2.41	Peak	Vertical

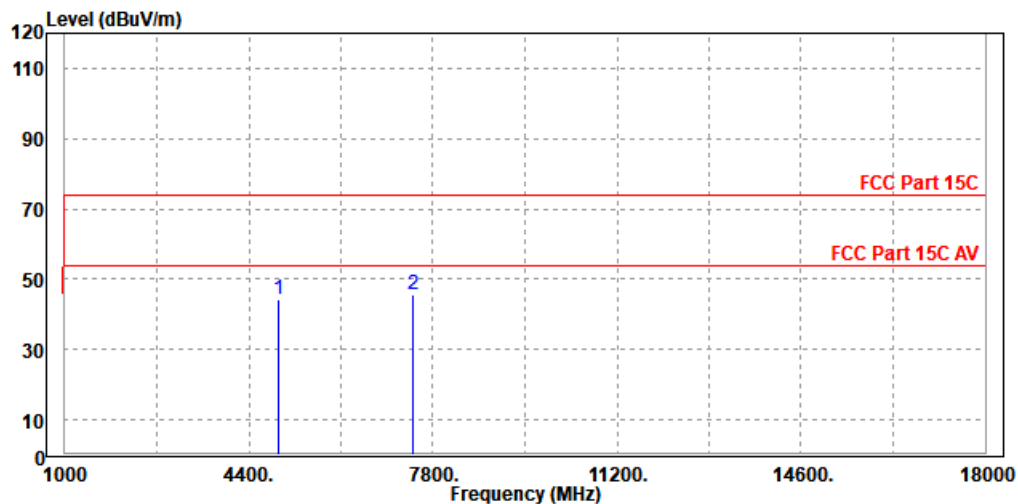

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2404MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 20,24	Feb. 19,25
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 16,24	Feb. 15,25
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.13,24	May.12,25
Power Sensor	ANRITSU	MA2411B	1339352	May. 04,24	May. 03,25

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.3 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




Test Report No.: W7L-241112W001RF02

3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

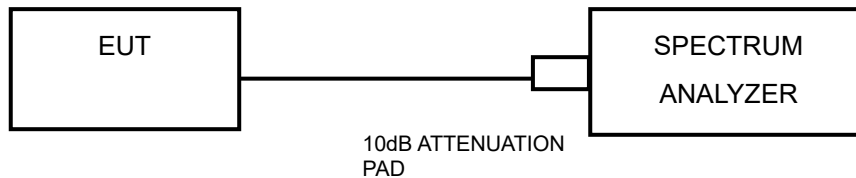

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-241112W001RF02

3.3.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

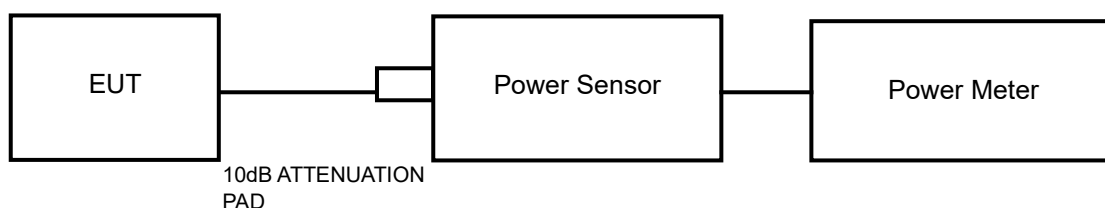

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU VERITAS Test Report No.: W7L-241112W001RF02

3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix1/2 Of this test report.



Test Report No.: W7L-241112W001RF02

3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix1/2 Of this test report.



**BUREAU
VERITAS**


Test Report No.: W7L-241112W001RF02

3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: W7L-241112W001RF02

3.5.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.



**BUREAU
VERITAS**


Test Report No.: W7L-241112W001RF02

3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

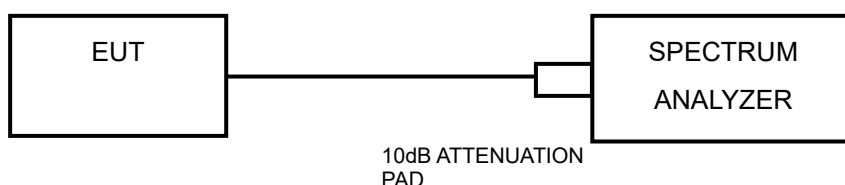

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix1/2 Of this test report.



**BUREAU
VERITAS**

Test Report No.: W7L-241112W001RF02

3.7 ANTENNA REQUIREMENTS

3.7.1 STANDARD APPLICABLE

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.7.3 ANTENNA GAIN

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit and PSD limit.



Test Report No.: W7L-241112W001RF02

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-241112W001RF02

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



BUREAU VERITAS Test Report No.: W7L-241112W001RF02

6 APPENDIX 1:2.4G WIFI RIGHT

DTS BANDWIDTH

TEST RESULT

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.560	2407.960	2416.520	0.5	PASS
		2437	9.040	2432.480	2441.520	0.5	PASS
		2462	9.040	2457.480	2466.520	0.5	PASS
11G	Ant1	2412	14.000	2405.760	2419.760	0.5	PASS
		2437	15.680	2429.560	2445.240	0.5	PASS
		2462	15.680	2454.560	2470.240	0.5	PASS
11N20SISO	Ant1	2412	15.880	2404.520	2420.400	0.5	PASS
		2437	14.200	2430.800	2445.000	0.5	PASS
		2462	14.920	2455.240	2470.160	0.5	PASS



BUREAU VERITAS Test Report No.: W7L-241112W001RF02
TEST GRAPHS

11B_Ant1_2412



11B_Ant1_2437



11B_Ant1_2462



BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02



11G_Ant1_2412



11G_Ant1_2437



Test Report No.: W7L-241112W001RF02



11G_Ant1_2462




11N20SISO_Ant1_2412



BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02

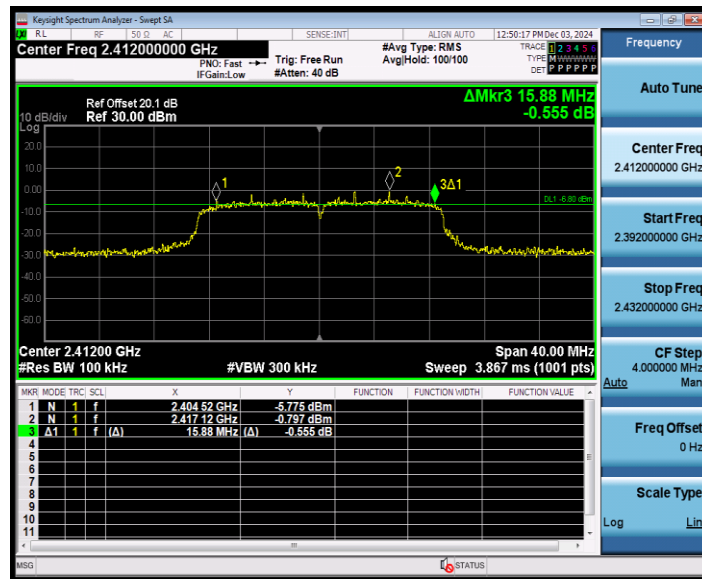

11N20SISO_Ant1_2437




11N20SISO_Ant1_2462



BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02

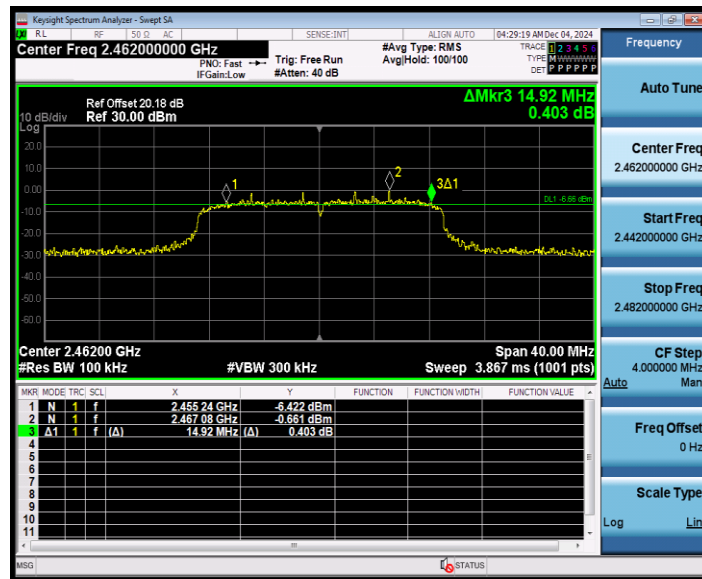



Test Report No.: W7L-241112W001RF02

OCCUPIED CHANNEL BANDWIDTH


TEST RESULT

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	11.799	2406.1326	2417.9316	---	---
		2437	11.756	2431.1611	2442.9171	---	---
		2462	11.686	2456.2710	2467.9570	---	---
11G	Ant1	2412	18.303	2403.0327	2421.3357	---	---
		2437	18.069	2428.1845	2446.2535	---	---
		2462	17.970	2453.1960	2471.1660	---	---
11N20SISO	Ant1	2412	18.541	2402.8974	2421.4384	---	---
		2437	18.514	2427.9864	2446.5004	---	---
		2462	18.560	2452.8953	2471.4553	---	---




BUREAU VERITAS Test Report No.: W7L-241112W001RF02
TEST GRAPHS

11B_Ant1_2412

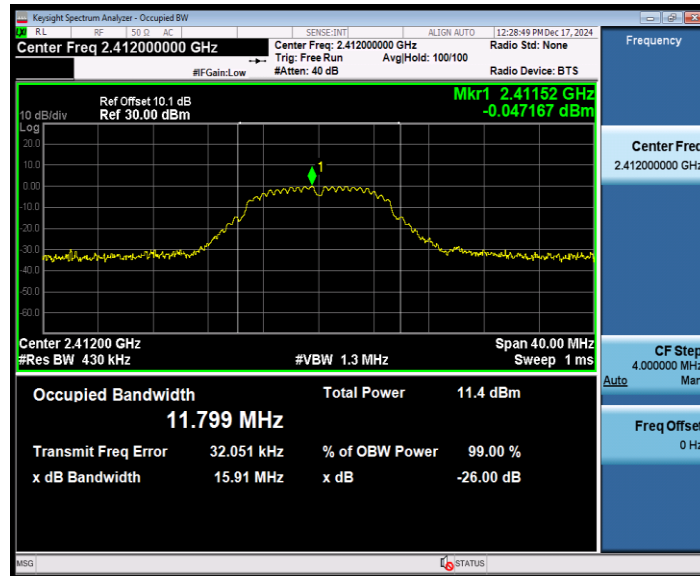

11B_Ant1_2437

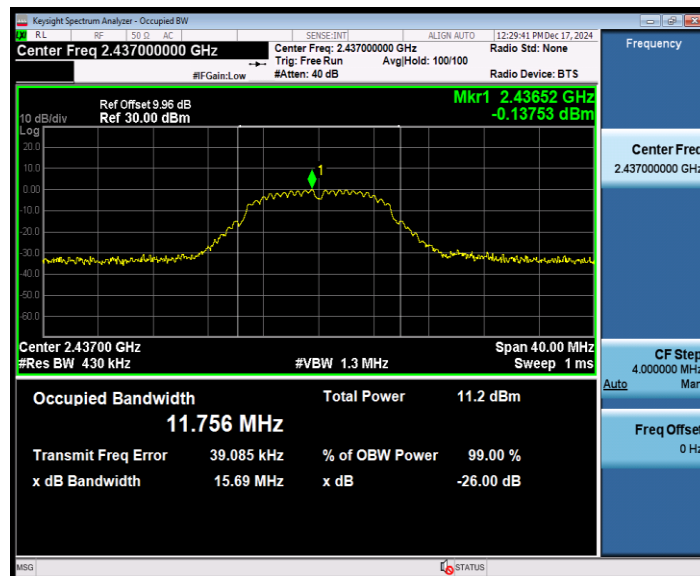

11B_Ant1_2462




BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02



11G_Ant1_2412

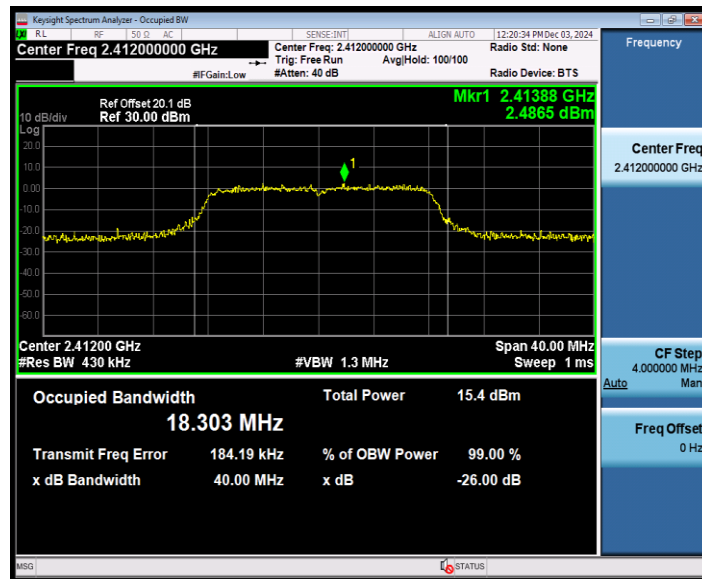


11G_Ant1_2437



BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02

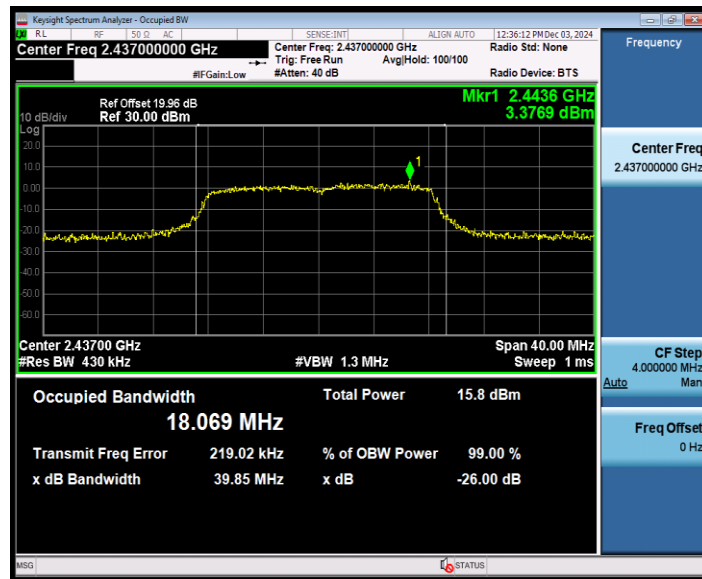

11G_Ant1_2462



11N20SISO_Ant1_2412



BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02



11N20SISO_Ant1_2437



11N20SISO_Ant1_2462





Test Report No.: W7L-241112W001RF02

MAXIMUM CONDUCTED OUTPUT POWER

TEST RESULT

Test Mode	TX Mod.	Freq. [MHz]	Ant.	Average power [dBm]	Peak power [dBm]	Peak power [mw]	Conducted Power Limit [dBm]	EIRP power [dBm]	EIRP power [mw]	EIRP Limit [dBm]	Verdict	Power Setting
11B	SISO	2412	ANT1	8.23	12.56	18.03	≤30.00	5.56	3.60	≤36.00	PASS	default
		2437	ANT1	8.22	12.50	17.78	≤30.00	5.50	3.55	≤36.00	PASS	default
		2462	ANT1	8.14	12.44	17.54	≤30.00	5.44	3.50	≤36.00	PASS	default
11G	SISO	2412	ANT1	8.40	13.05	20.18	≤30.00	6.05	4.03	≤36.00	PASS	default
		2437	ANT1	8.99	13.60	22.91	≤30.00	6.60	4.57	≤36.00	PASS	default
		2462	ANT1	8.94	13.64	23.12	≤30.00	6.64	4.61	≤36.00	PASS	default
11N20	SISO	2412	ANT1	8.18	13.14	20.61	≤30.00	6.14	4.11	≤36.00	PASS	default
		2437	ANT1	8.90	13.71	23.50	≤30.00	6.71	4.69	≤36.00	PASS	default
		2462	ANT1	8.87	13.65	23.17	≤30.00	6.65	4.62	≤36.00	PASS	default

Note: The Average power with duty cycle factor.



Test Report No.: W7L-241112W001RF02

MAXIMUM POWER SPECTRAL DENSITY

TEST RESULT

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-12.49	≤ 8.00	PASS
		2437	-13.63	≤ 8.00	PASS
		2462	-14.11	≤ 8.00	PASS
11G	Ant1	2412	-15.18	≤ 8.00	PASS
		2437	-13.67	≤ 8.00	PASS
		2462	-12.76	≤ 8.00	PASS
11N20SISO	Ant1	2412	-14.82	≤ 8.00	PASS
		2437	-15.49	≤ 8.00	PASS
		2462	-14.55	≤ 8.00	PASS



BUREAU VERITAS Test Report No.: W7L-241112W001RF02
TEST GRAPHS

11B_Ant1_2412



11B_Ant1_2437




11B_Ant1_2462



Test Report No.: W7L-241112W001RF02



11G_Ant1_2412

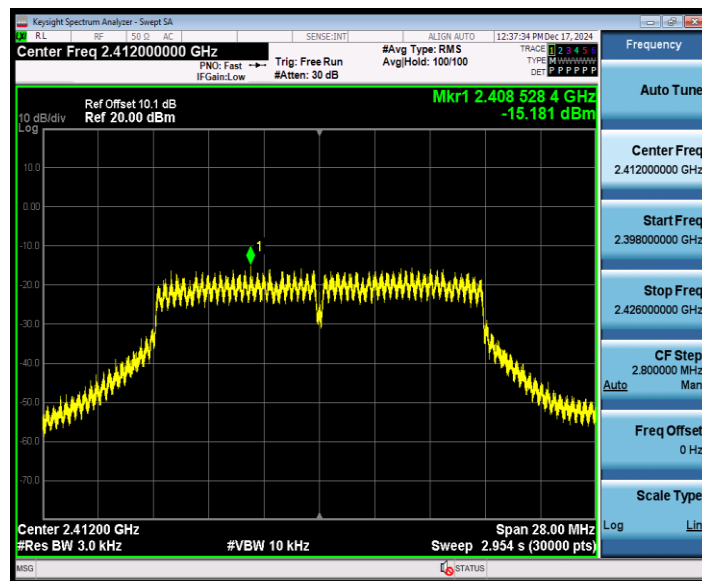


11G_Ant1_2437




BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02

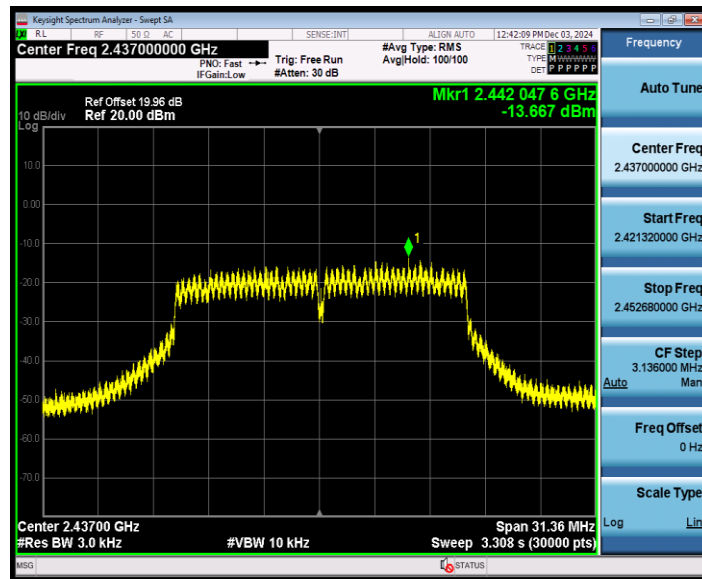

11G_Ant1_2462

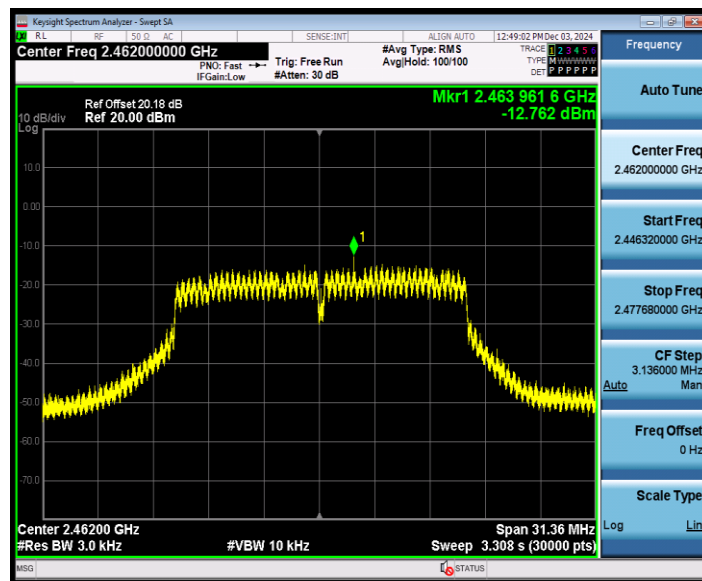


11N20SISO_Ant1_2412




BUREAU
VERITAS


Test Report No.: W7L-241112W001RF02

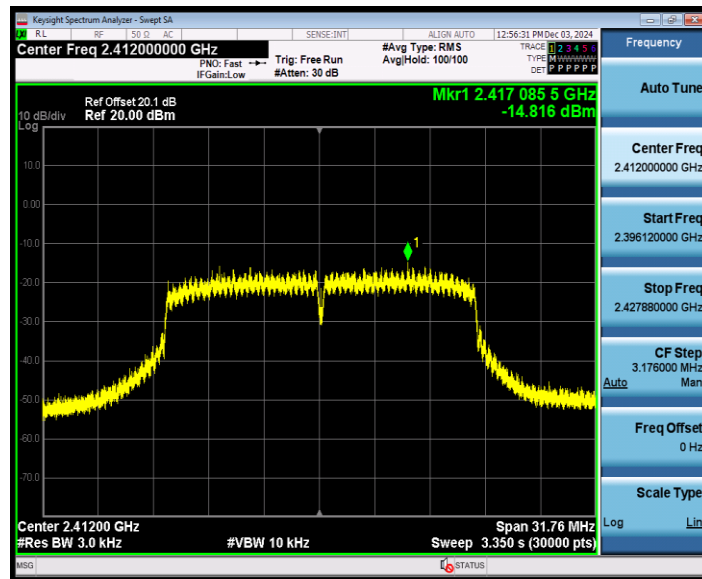

11N20SISO_Ant1_2437

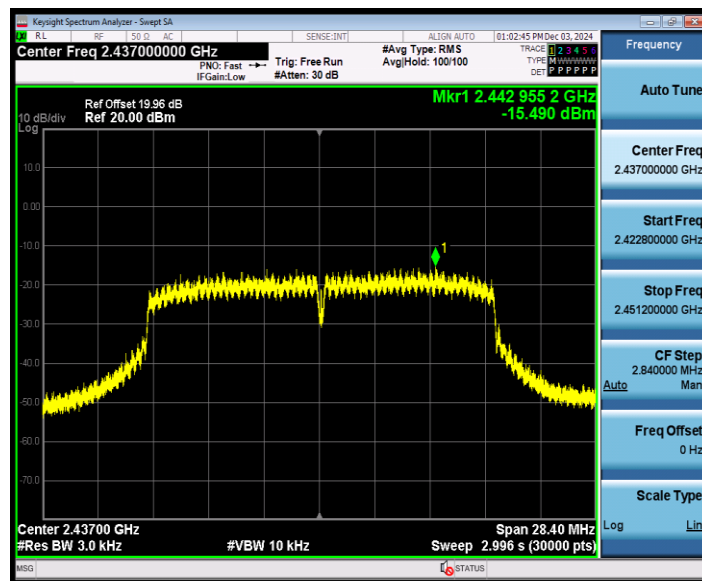

11N20SISO_Ant1_2462

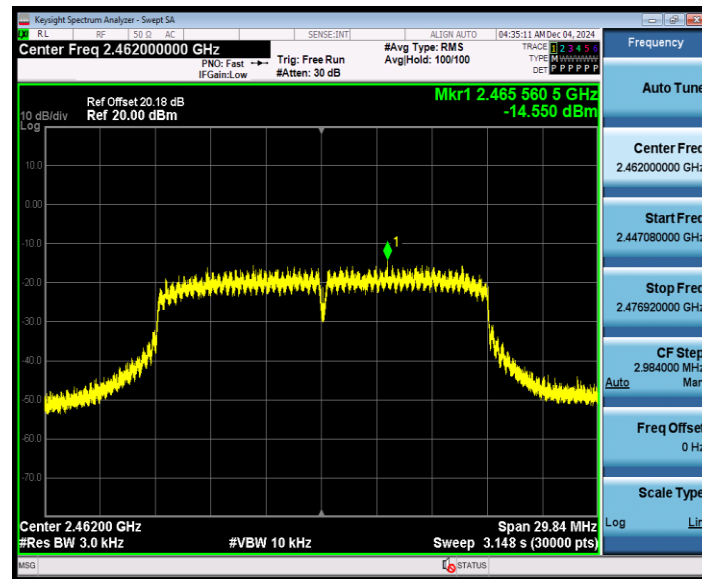



Test Report No.: W7L-241112W001RF02

BAND EDGE MEASUREMENTS


TEST RESULT

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	-1.12	-36.09	≤ -21.12	PASS
		High	2462	-1.46	-35.93	≤ -21.46	PASS
11G	Ant1	Low	2412	-1.68	-31.59	≤ -21.68	PASS
		High	2462	-0.41	-35.18	≤ -20.41	PASS
11N20SISO	Ant1	Low	2412	-1.85	-30.67	≤ -21.85	PASS
		High	2462	-1.75	-34.84	≤ -21.75	PASS




BUREAU VERITAS Test Report No.: W7L-241112W001RF02
TEST GRAPHS

11B_Ant1_Low_2412

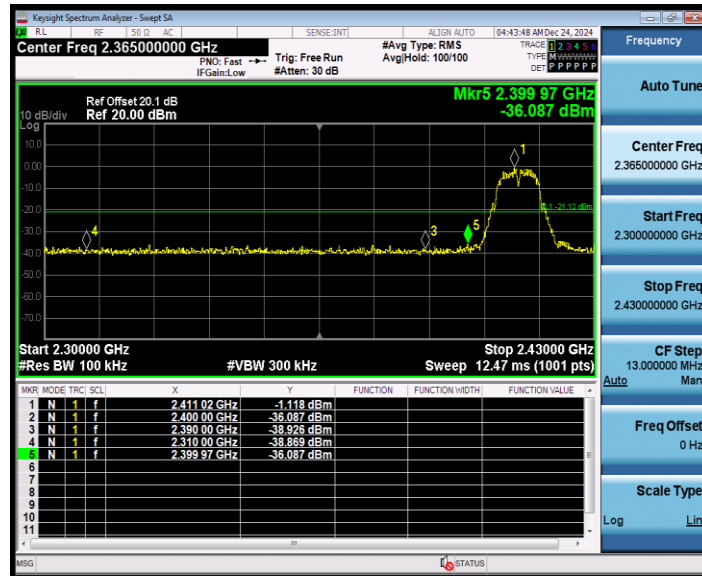

11B_Ant1_High_2462

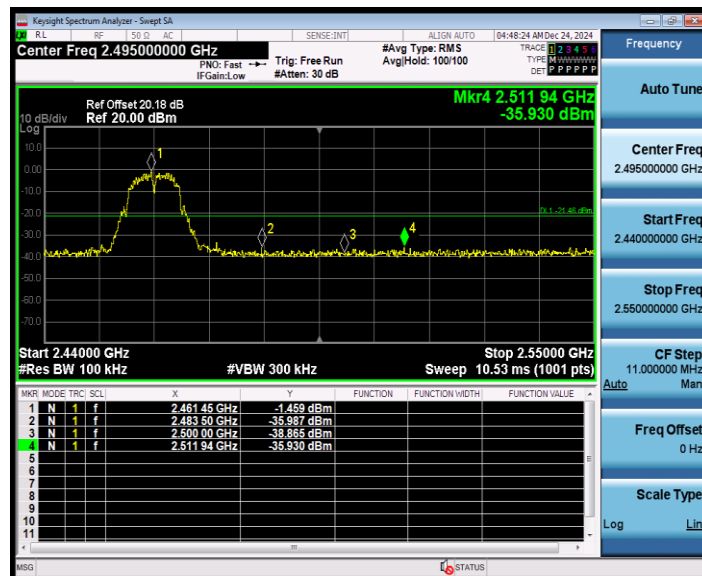

11G_Ant1_Low_2412



BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02



11G_Ant1_High_2462



11N20SISO_Ant1_Low_2412



BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02



11N20SISO_Ant1_High_2462



BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com

**CONDUCTED SPURIOUS EMISSION****TEST RESULT**

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	-0.70	-0.70	---	PASS
			30~1000	-0.70	-55.08	≤ -20.7	PASS
			1000~26500	-0.70	-36.15	≤ -20.7	PASS
		2437	Reference	-1.72	-1.72	---	PASS
			30~1000	-1.72	-38.81	≤ -21.72	PASS
			1000~26500	-1.72	-35.32	≤ -21.72	PASS
		2462	Reference	-3.29	-3.29	---	PASS
			30~1000	-3.29	-54.34	≤ -23.29	PASS
			1000~26500	-3.29	-36.07	≤ -23.29	PASS
11G	Ant1	2412	Reference	-4.85	-4.85	---	PASS
			30~1000	-4.85	-54.75	≤ -24.85	PASS
			1000~26500	-4.85	-35.47	≤ -24.85	PASS
		2437	Reference	-1.28	-1.28	---	PASS
			30~1000	-1.28	-55.33	≤ -21.28	PASS
			1000~26500	-1.28	-36.52	≤ -21.28	PASS
		2462	Reference	-1.37	-1.37	---	PASS
			30~1000	-1.37	-54.31	≤ -21.37	PASS
			1000~26500	-1.37	-35.75	≤ -21.37	PASS
11N20SISO	Ant1	2412	Reference	-0.79	-0.79	---	PASS
			30~1000	-0.79	-55.09	≤ -20.79	PASS
			1000~26500	-0.79	-35.67	≤ -20.79	PASS
		2437	Reference	-2.70	-2.70	---	PASS
			30~1000	-2.70	-55.01	≤ -22.7	PASS
			1000~26500	-2.70	-35.92	≤ -22.7	PASS
		2462	Reference	-3.94	-3.94	---	PASS
			30~1000	-3.94	-46.22	≤ -23.94	PASS
			1000~26500	-3.94	-35.44	≤ -23.94	PASS




BUREAU VERITAS Test Report No.: W7L-241112W001RF02
TEST GRAPHS

11B_Ant1_2412_0~Reference



11B_Ant1_2412_30~1000

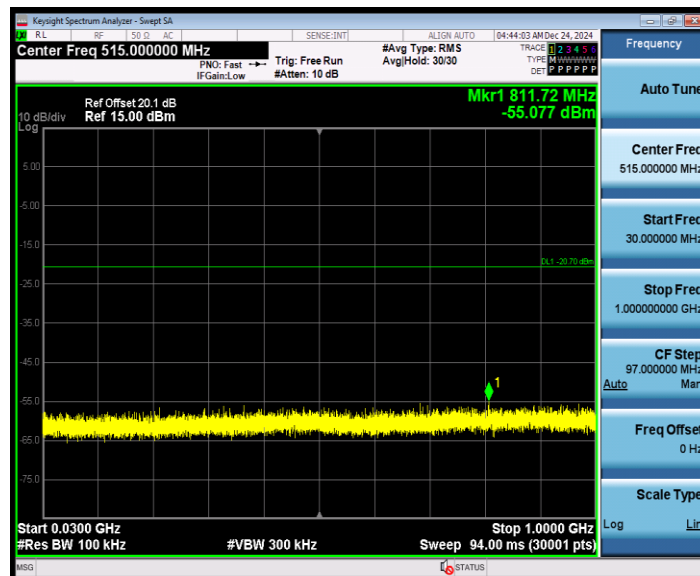


11B_Ant1_2412_1000~26500






BUREAU
VERITAS

Test Report No.: W7L-241112W001RF02

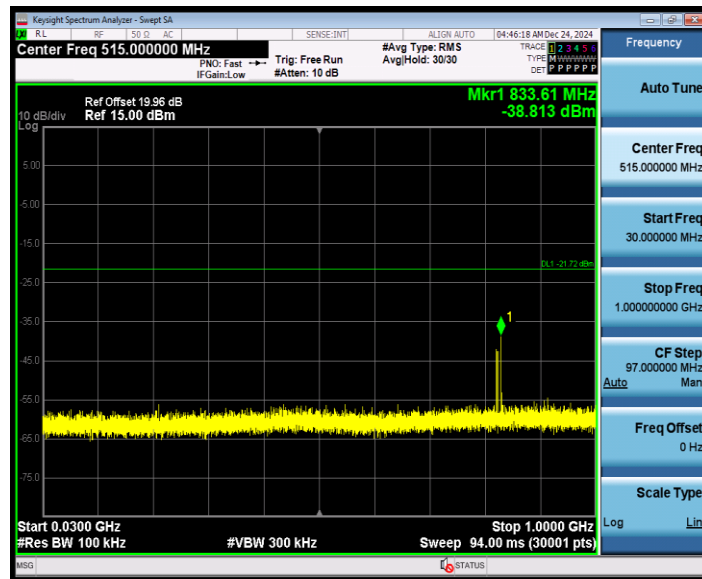

11B_Ant1_2437_1000~26500

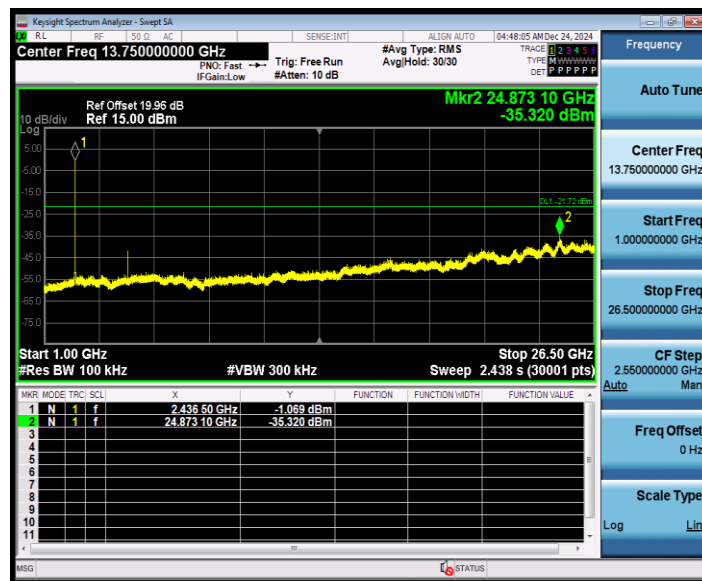

11B_Ant1_2462_0~Reference