




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	96.85			7.23	V	71.2	1.00
6	2,483.500	46.28	74.00	27.72	7.18	V	260.1	2.00
6	2,486.800	46.35	74.00	27.65	7.13	V	226.7	1.00



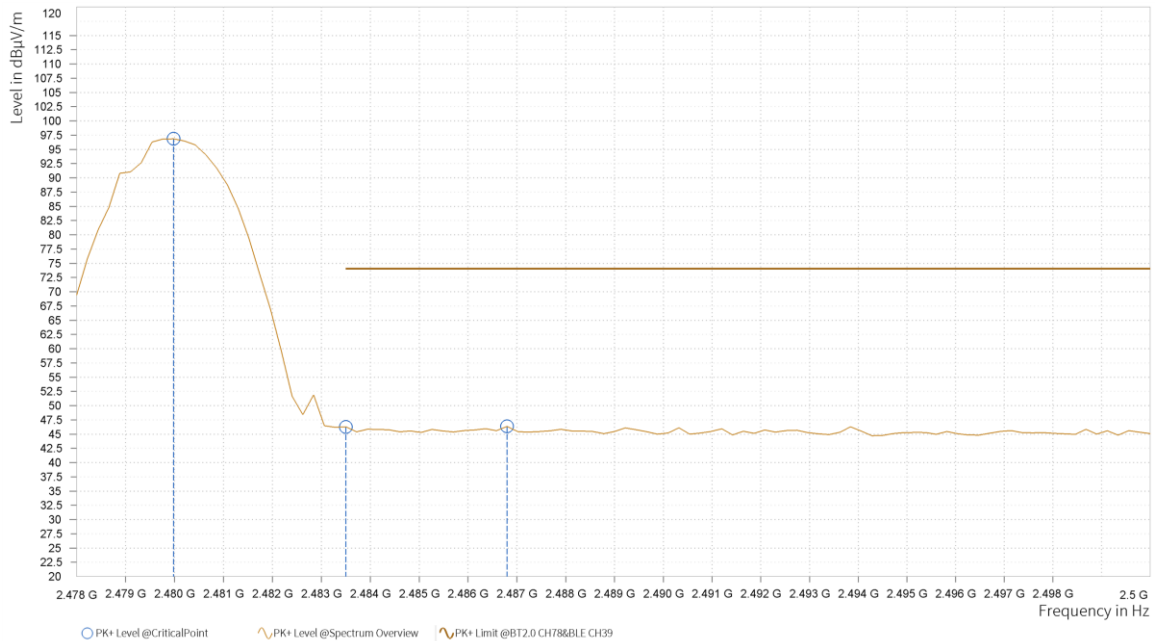

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	81.14			7.23	V	299.6	1.00
6	2,483.500	31.47	54.00	22.53	7.18	V	261.4	2.00
6	2,484.820	31.98	54.00	22.02	7.16	V	261.4	2.00

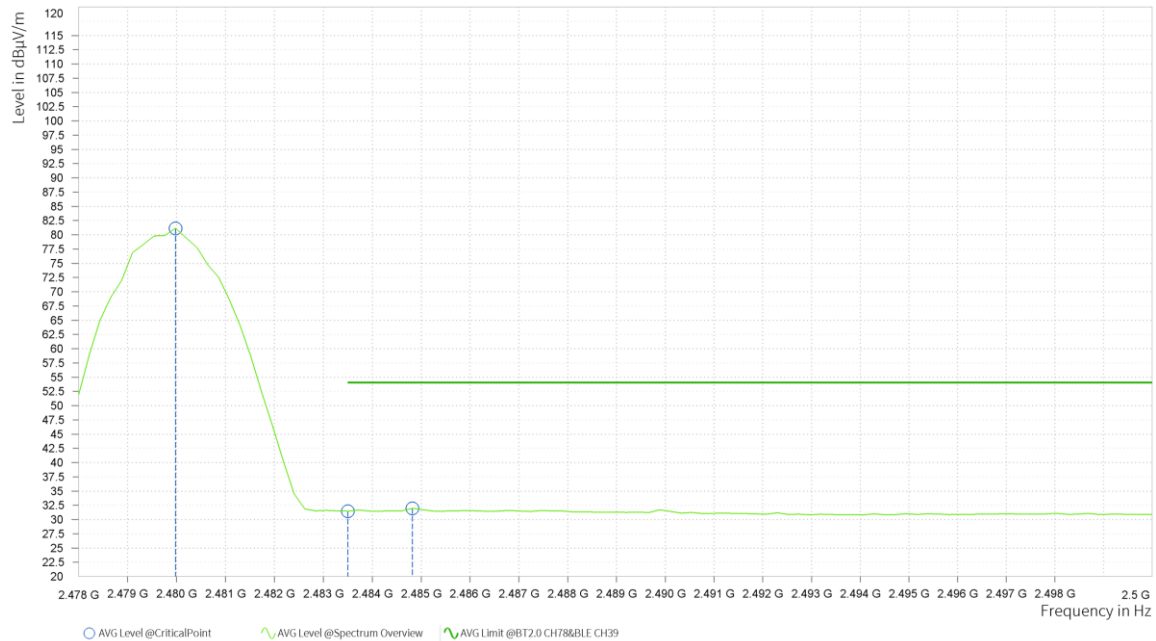

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value – Emission level.
3. 2402MHz: Fundamental frequency.




3.3 NUMBER OF HOPPING FREQUENCY USED

3.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

3.3.2 TEST SETUP





3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	R&S	ESW 44	101973	Feb.24,24	Feb.23,26
Open Switch and Control Unit	R&S	OSP-B157W8	100836	N/A	N/A
Vector Signal Generator	R&S	SMBV100B	102176	Feb.15,24	Feb.14,26
Signal Generator	R&S	SMB100A03	182185	Feb.15,24	Feb.14,26
Wideband Radio Communication	R&S	CMW500	169399	Jun.25,24	Jun.24,26
Hygrothermograph	DELI	20210528	SZ015	Sep.05,24	Sep.04,26
PC	LENOVO	E14	HRSW0024	N/A	N/A
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.27,24	Apr.26,25
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.27,24	Apr.26,25
Test Software	EMC32	EMC32	N/A	N/A	N/A
Temperature Chamber	votsch	VT4002	58566078100050	May.30,24	May.29,26
Power Meter	R&S	NRX	102380	Feb.14,24	Feb.13,26
Power Meter probe	R&S	NRP6A	102942	Feb.14,24	Feb.13,26

NOTE:

1. The calibration interval of the above test instruments is 12 /24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



3.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.


Please Refer to Appendix of this test report.

3.4 DWELL TIME ON EACH CHANNEL

3.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



BUREAU VERITAS Test Report No.: PSZ-QBJ2501200112RF09

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 TEST RESULTS


Please Refer to Appendix of this test report

3.5 CHANNEL BANDWIDTH

3.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.



3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.5.7 TEST RESULTS


Please Refer to Appendix of this test report.

3.6 HOPPING CHANNEL SEPARATION

3.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

3.6.2 TEST SETUP



3.6.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.6.4 TEST PROCEDURES

- 1 Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2 Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- 3 By using the MaxHold function record the separation of two adjacent channels.
- 4 Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- 5 Repeat above procedures until all frequencies measured were complete.

3.6.1 DEVIATION FROM TEST STANDARD

No deviation.

3.6.2 TEST RESULTS

Please Refer to Appendix of this test report.




3.7 MAXIMUM OUTPUT POWER

3.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

3.7.2 TEST SETUP

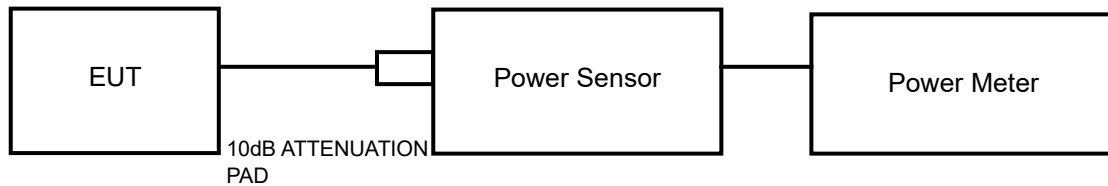

3.7.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.



3.7.5 DEVIATION FROM TEST STANDARD

No deviation.

3.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.7.7 TEST RESULTS

3.7.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix of this test report.

3.7.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix of this test report.



3.8 OUT OF BAND MEASUREMENT

3.8.1 LIMITS OF OUT OF BAND MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

3.8.2 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

3.8.4 DEVIATION FROM TEST STANDARD

No deviation.

3.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.8.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix of this test report.



4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: PSZ-QBJ2501200112RF09

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



6 Appendix

20DB EMISSION BANDWIDTH

ANT0 TEST RESULT

TestMode	Antenna	Channel	20db EBW _[MHz]	FL _[MHz]	FH _[MHz]	Limit _[MHz]	Verdict
DH5	ANT0	2402	0.967	2401.526	2402.494	---	PASS
		2441	0.967	2440.526	2441.494	---	PASS
		2480	0.962	2479.526	2480.489	---	PASS
2DH5	ANT0	2402	1.328	2401.341	2402.669	---	PASS
		2441	1.323	2440.341	2441.664	---	PASS
		2480	1.323	2479.341	2480.664	---	PASS
3DH5	ANT0	2402	1.348	2401.326	2402.674	---	PASS
		2441	1.328	2440.346	2441.674	---	PASS
		2480	1.328	2479.346	2480.674	---	PASS

ANT1 TEST RESULT


TestMode	Antenna	Channel	20db EBW _[MHz]	FL _[MHz]	FH _[MHz]	Limit _[MHz]	Verdict
DH5	ANT1	2402	0.952	2401.526	2402.479	---	PASS
		2441	0.952	2440.526	2441.479	---	PASS
		2480	0.967	2479.526	2480.494	---	PASS
2DH5	ANT1	2402	1.323	2401.341	2402.664	---	PASS
		2441	1.328	2440.336	2441.664	---	PASS
		2480	1.338	2479.331	2480.669	---	PASS
3DH5	ANT1	2402	1.328	2401.346	2402.674	---	PASS
		2441	1.338	2440.336	2441.674	---	PASS
		2480	1.328	2479.346	2480.674	---	PASS




Test Report No.: PSZ-QBJ2501200112RF09



ANT0 TEST GRAPHS

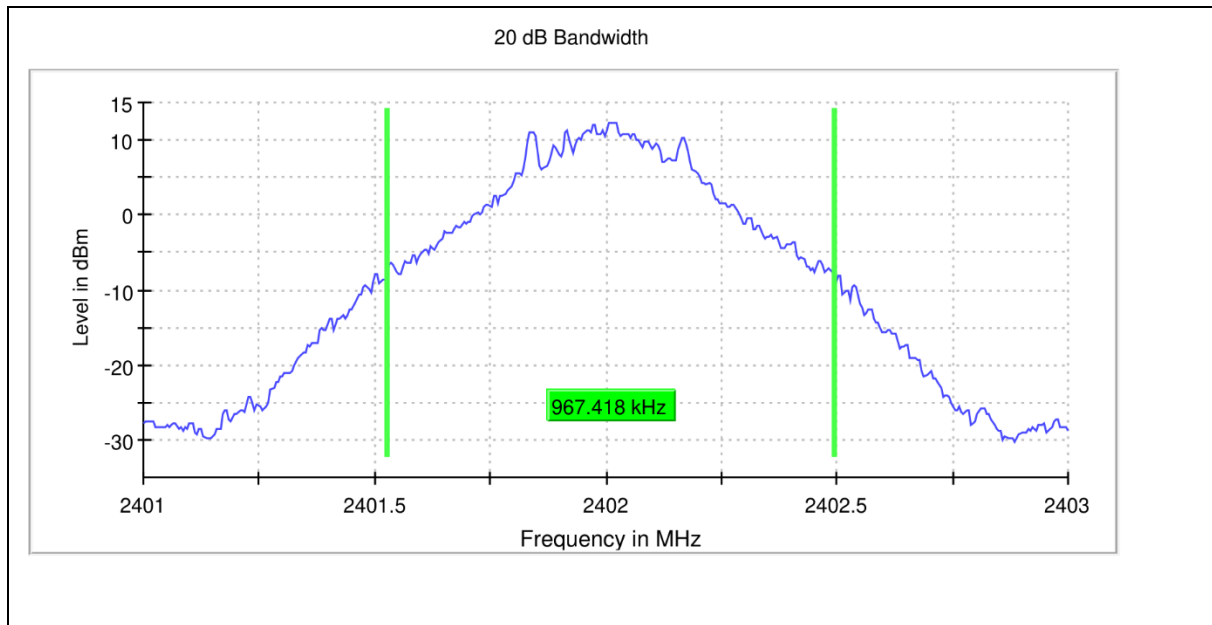


DH5_ANT0_2402

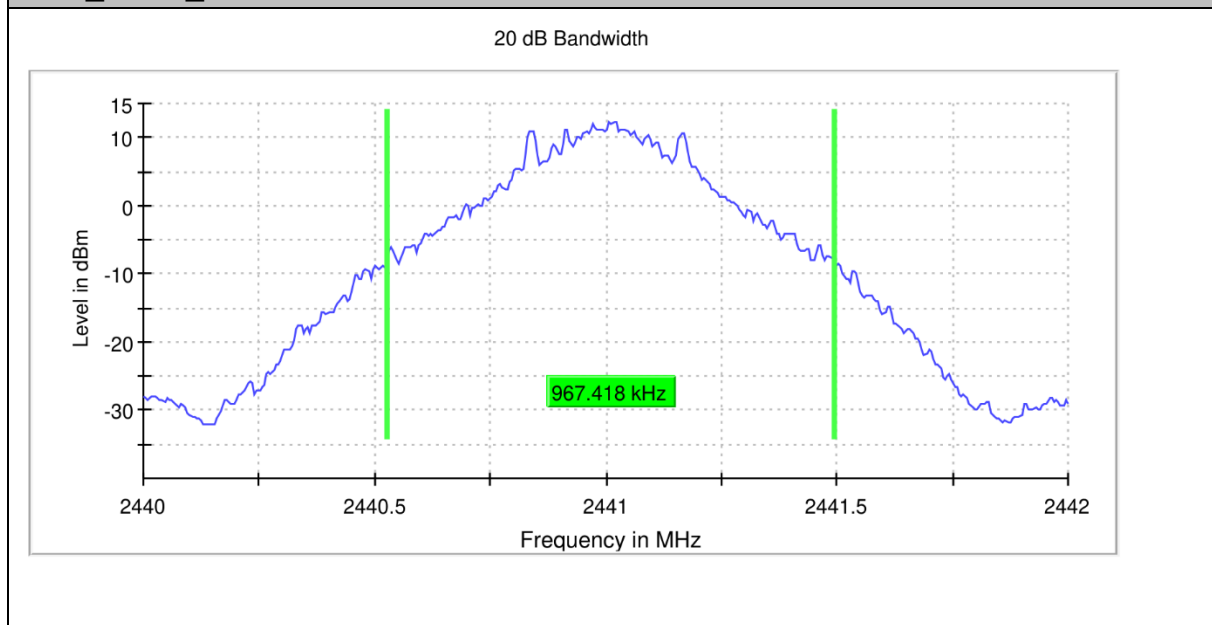

DH5_ANT0_2441




20 dB Bandwidth

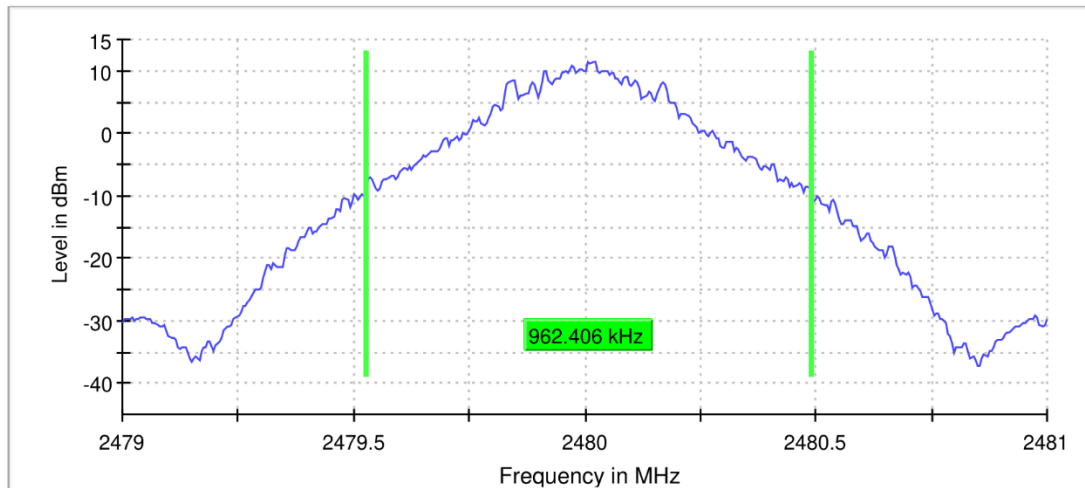

DH5_ANT0_2480


20 dB Bandwidth

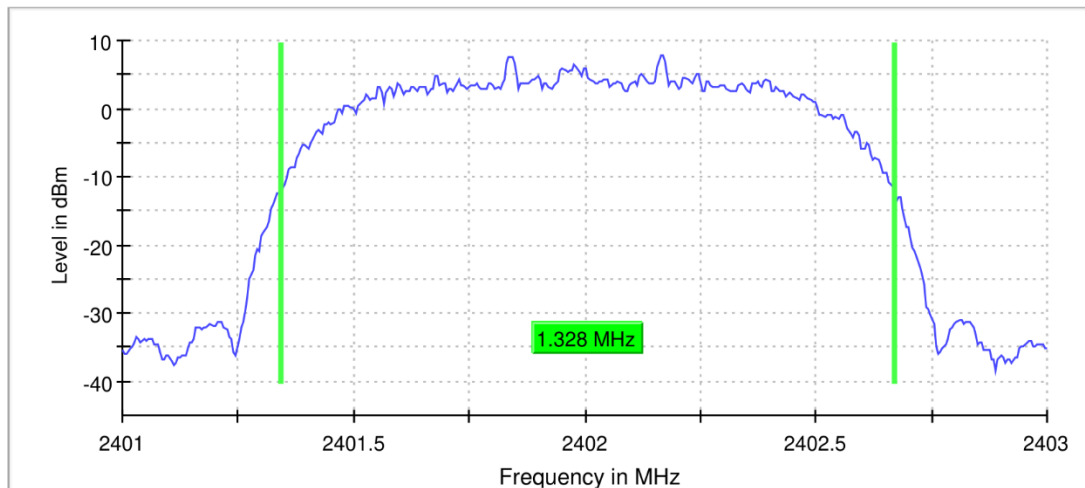

2DH5_ANT0_2402




20 dB Bandwidth

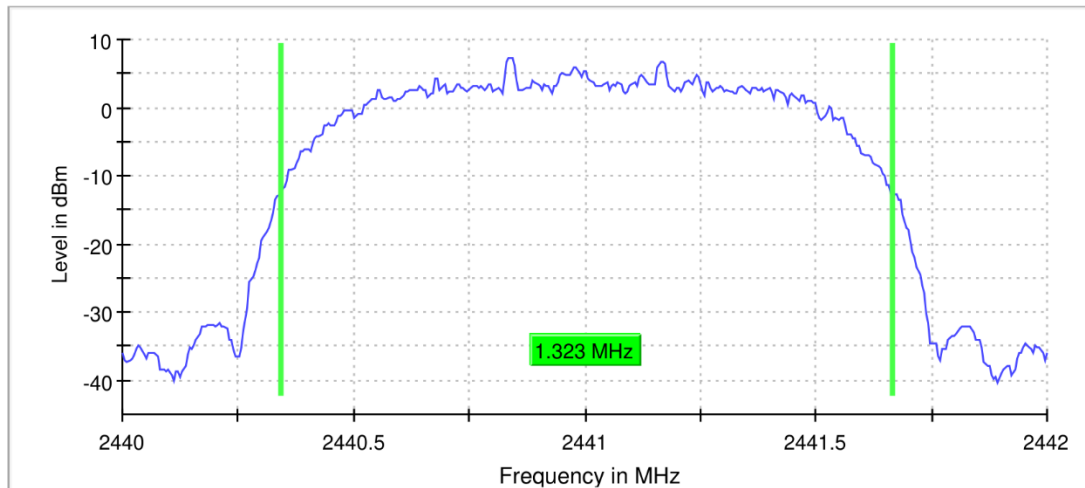

2DH5_ANT0_2441


20 dB Bandwidth

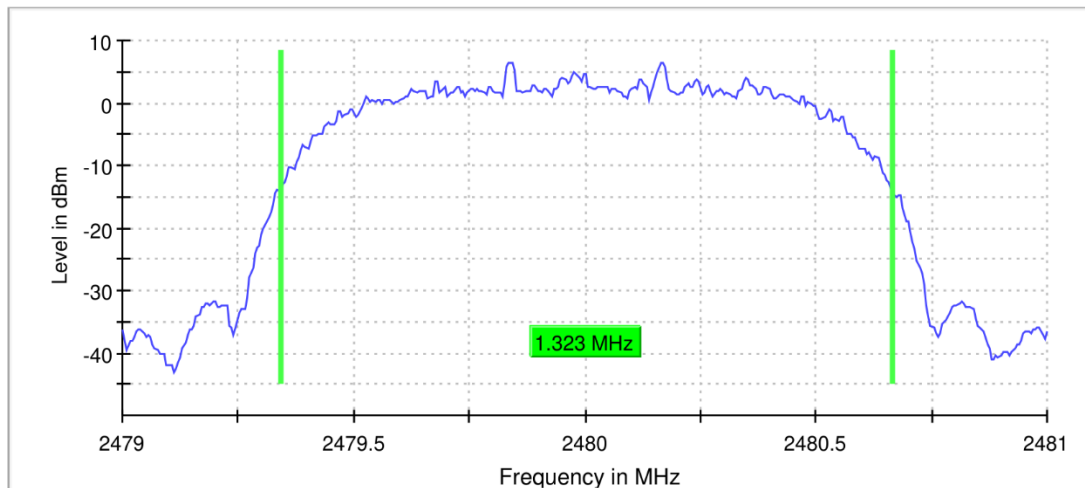

2DH5_ANT0_2480




20 dB Bandwidth

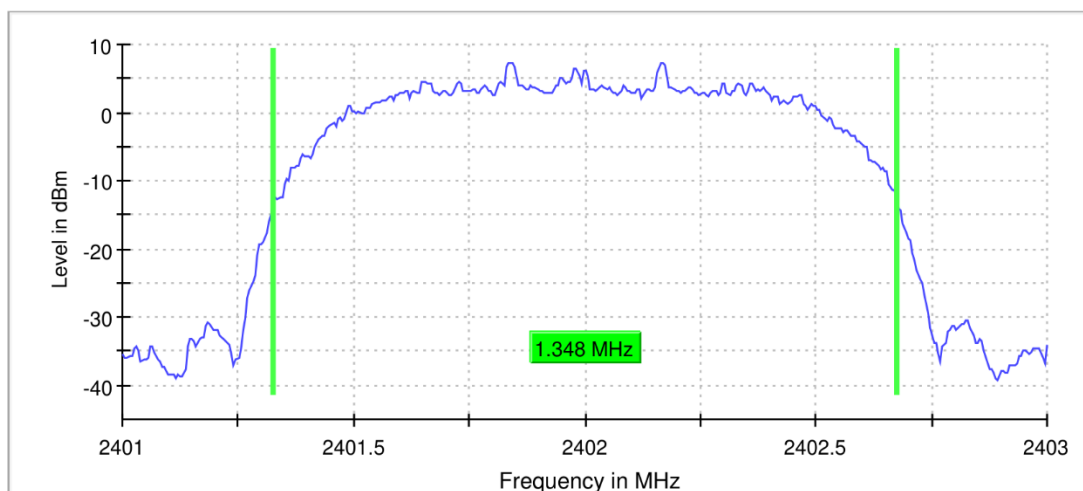


3DH5_ANT0_2402

20 dB Bandwidth

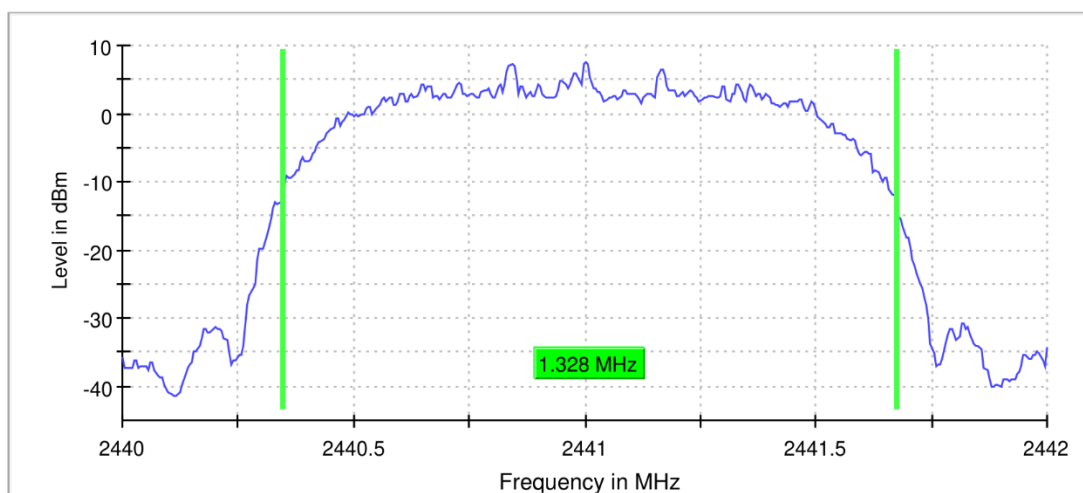

3DH5_ANT0_2441

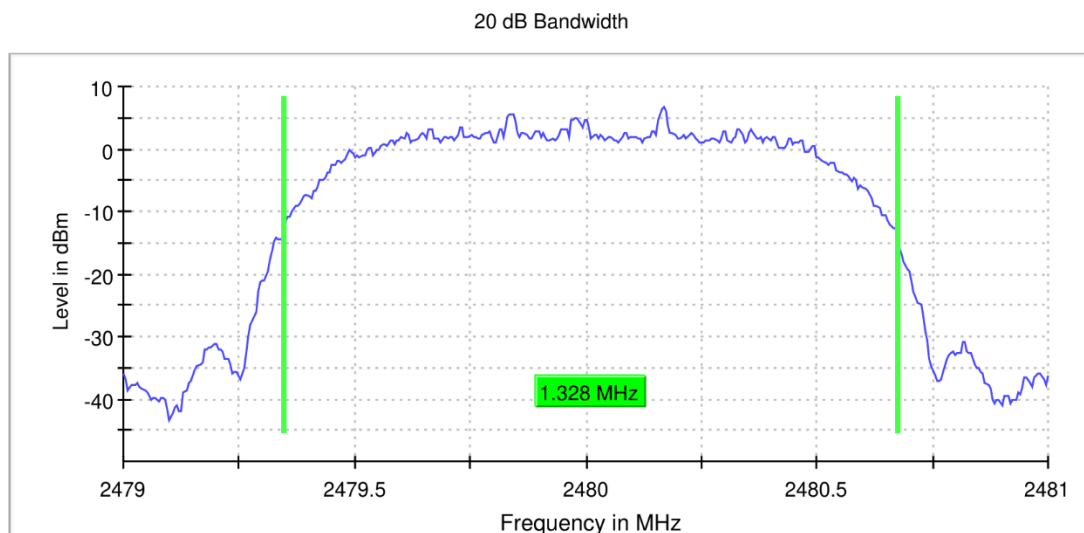


3DH5_ANT0_2480

RBW 30.000 kHz

VBW 100.000 kHz


ANT1 TEST GRAPHS

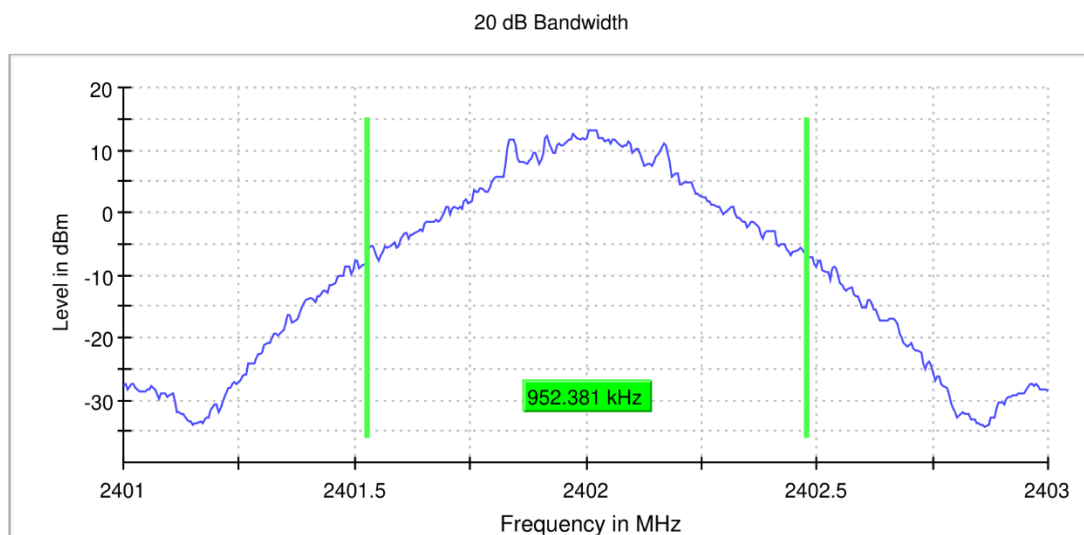

DH5_ANT1_2402




20 dB Bandwidth

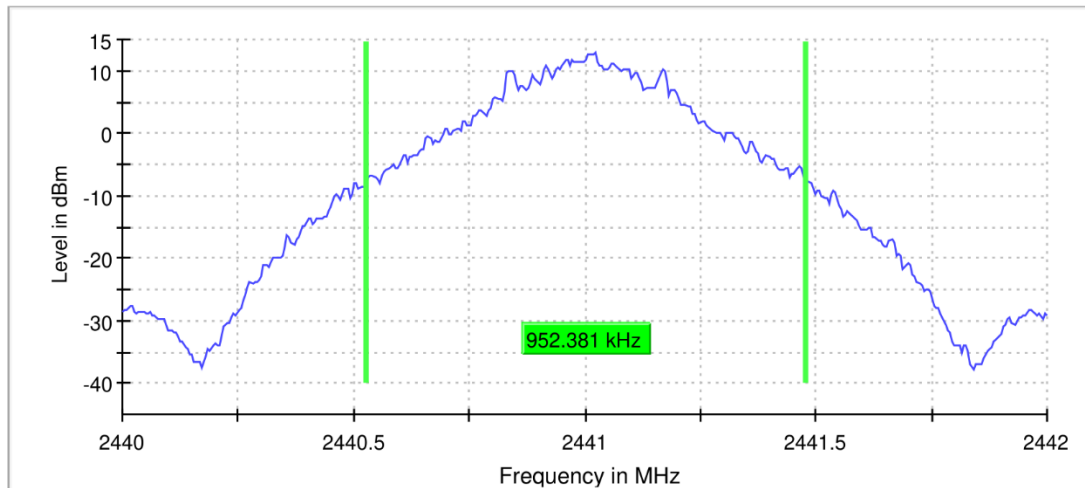

DH5_ANT1_2441


20 dB Bandwidth

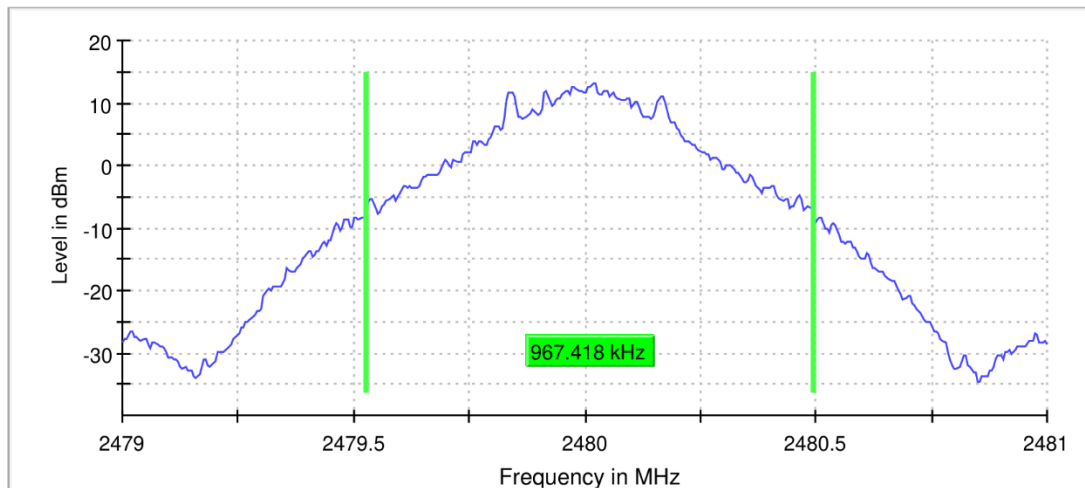

DH5_ANT1_2480




20 dB Bandwidth

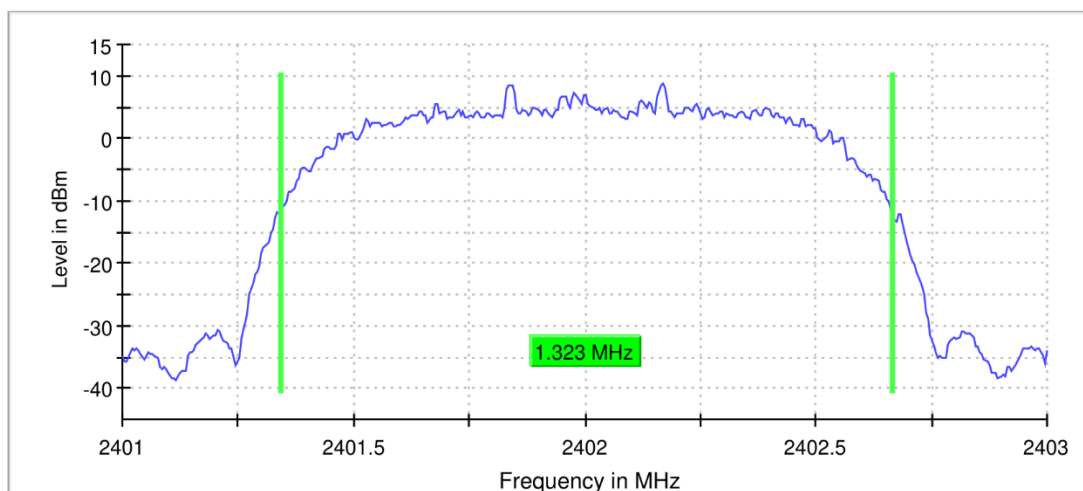

2DH5_ANT1_2402


20 dB Bandwidth

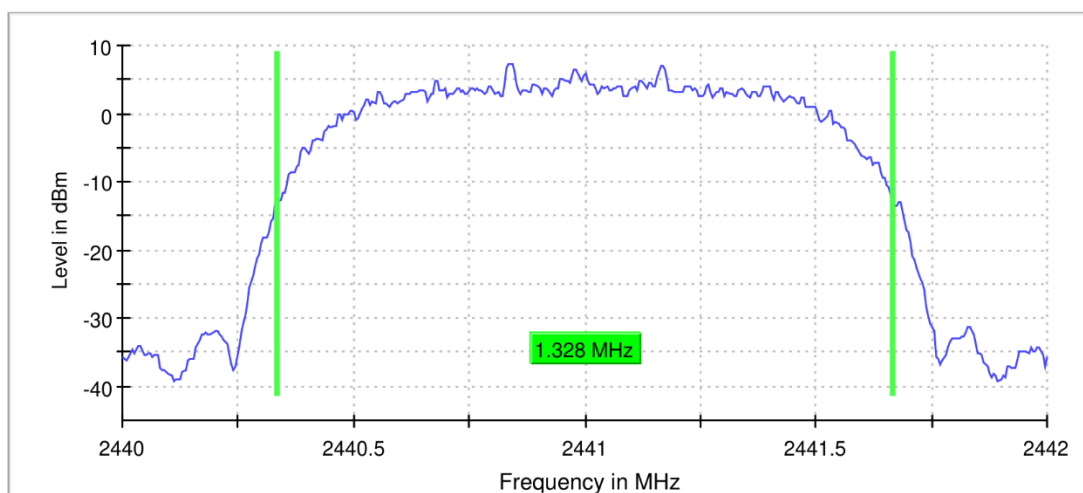

2DH5_ANT1_2441




20 dB Bandwidth

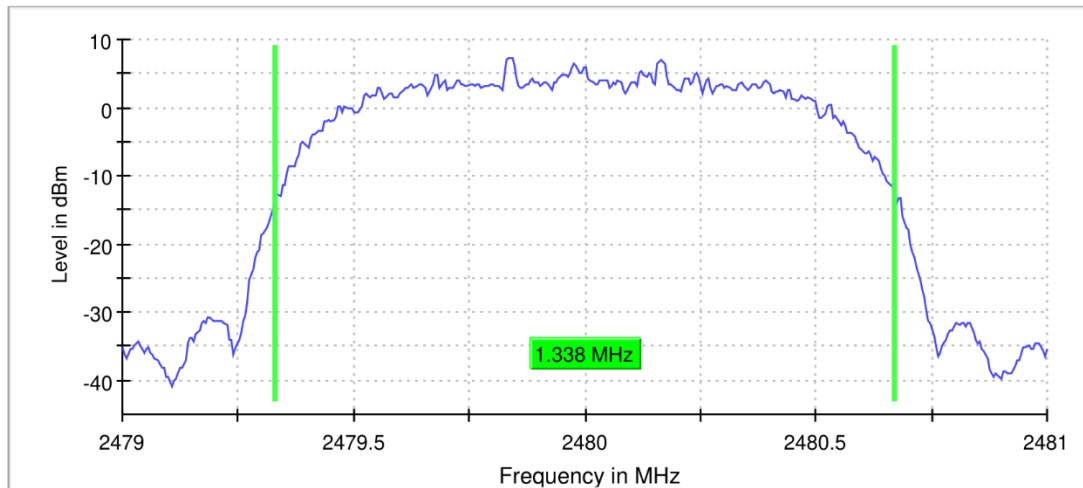

2DH5_ANT1_2480


20 dB Bandwidth

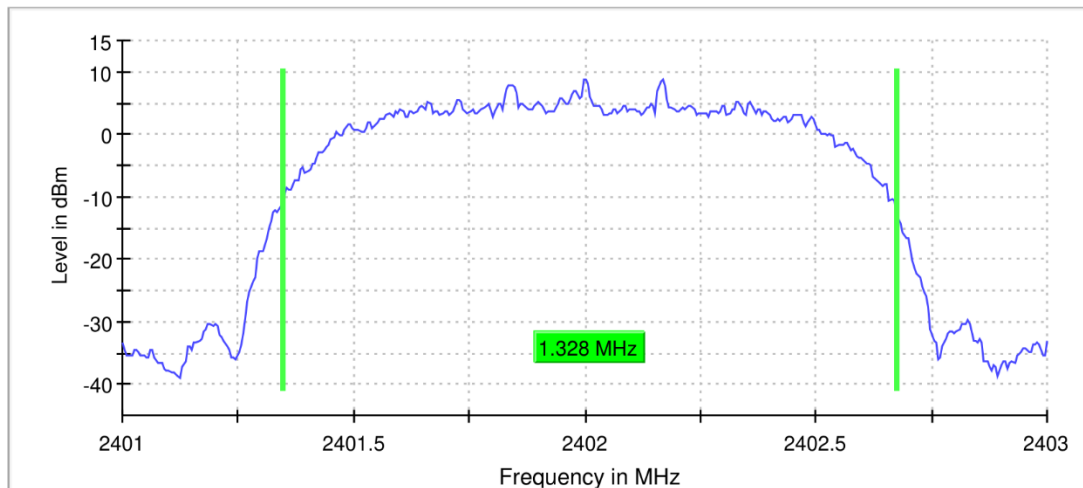

3DH5_ANT1_2402




20 dB Bandwidth

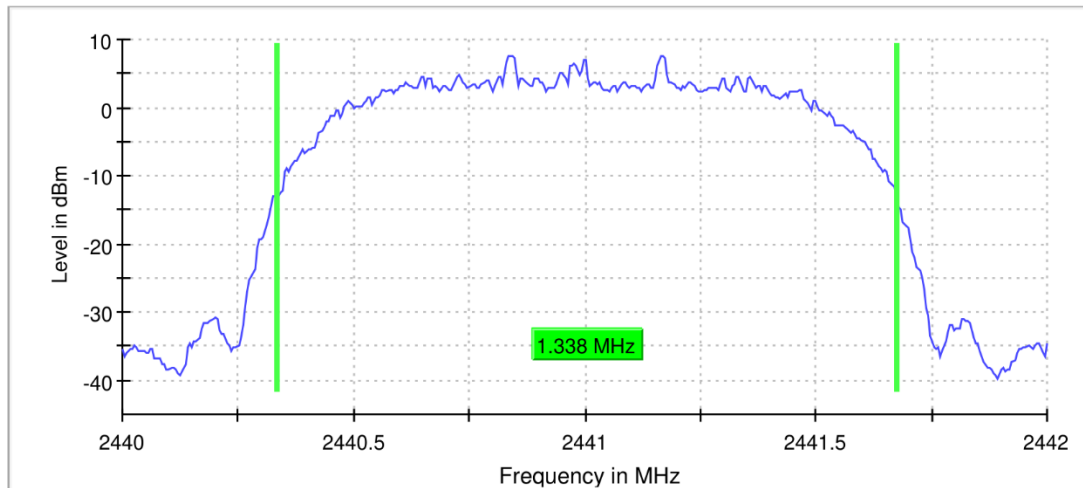

3DH5_ANT1_2441

20 dB Bandwidth

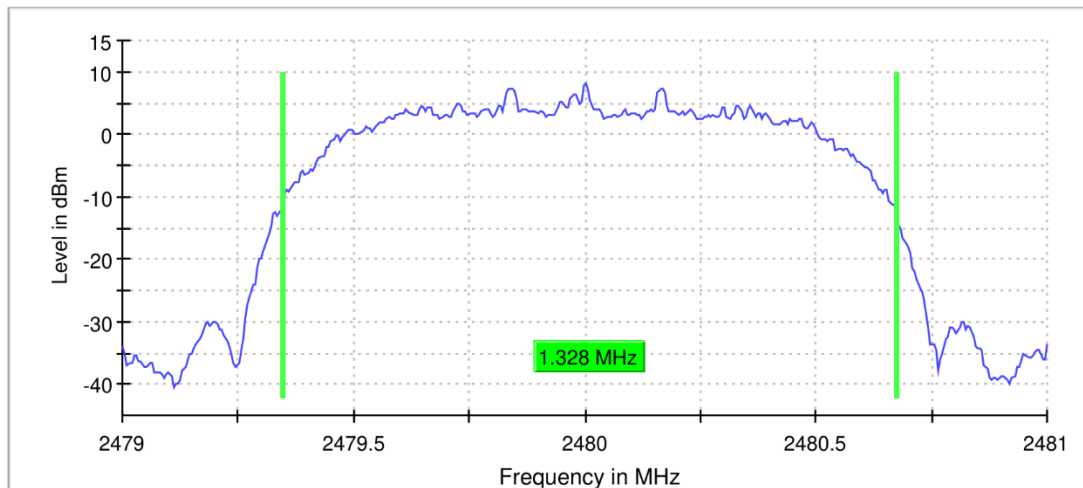

3DH5_ANT1_2480

RBW 30.000 kHz


VBW 100.000 kHz

**OCCUPIED CHANNEL BANDWIDTH****TEST RESULT**


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	ANT0	2402	0.877	2401.561	2402.439	---	PASS
		2441	0.872	2440.566	2441.439	---	PASS
		2480	0.867	2479.571	2480.439	---	PASS
2DH5	ANT0	2402	1.193	2401.406	2402.599	---	PASS
		2441	1.193	2440.406	2441.599	---	PASS
		2480	1.193	2479.406	2480.599	---	PASS
3DH5	ANT0	2402	1.203	2401.406	2402.609	---	PASS
		2441	1.198	2440.406	2441.604	---	PASS
		2480	1.198	2479.406	2480.604	---	PASS



TEST GRAPHS

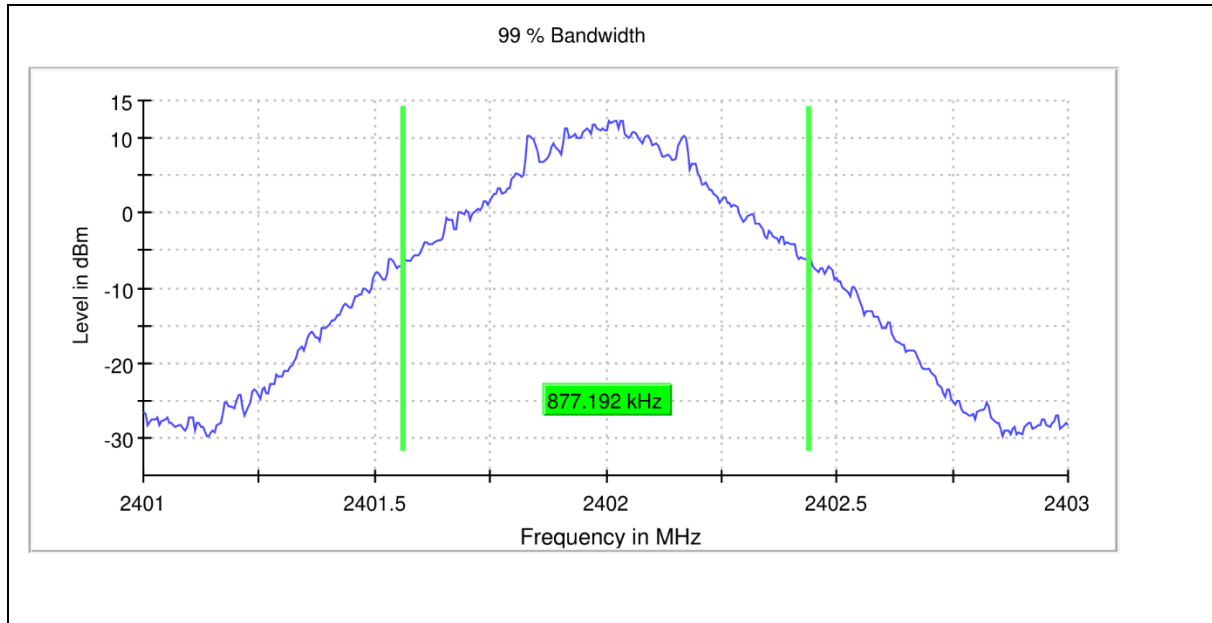


DH5_ANT0_2402

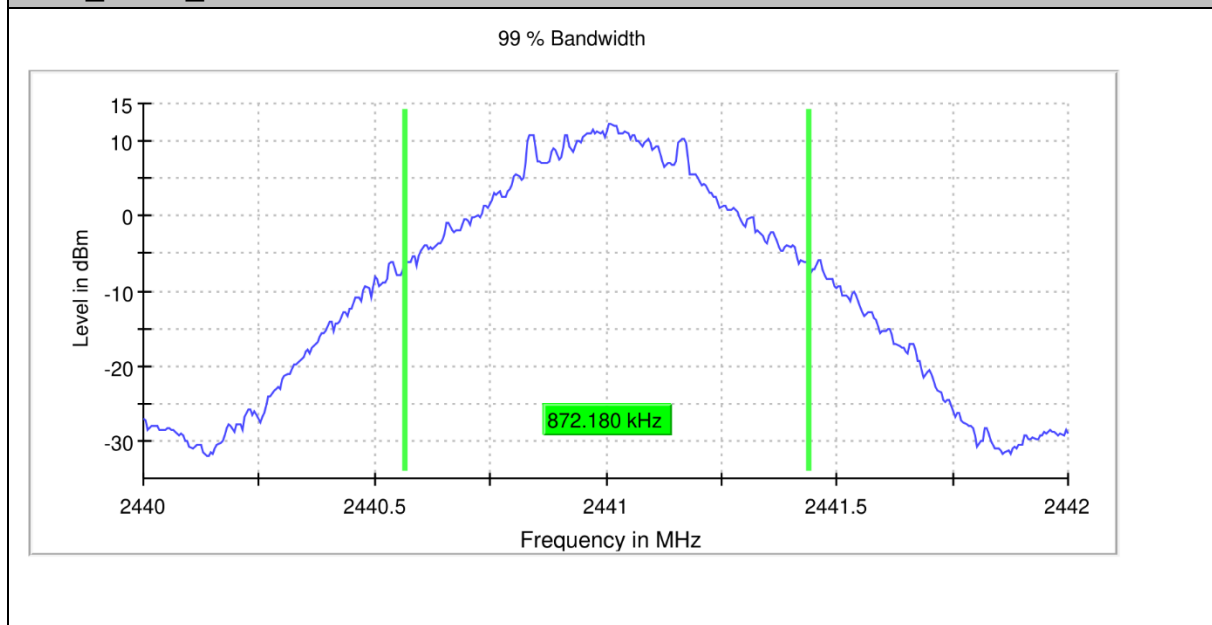

DH5_ANT0_2441




99 % Bandwidth

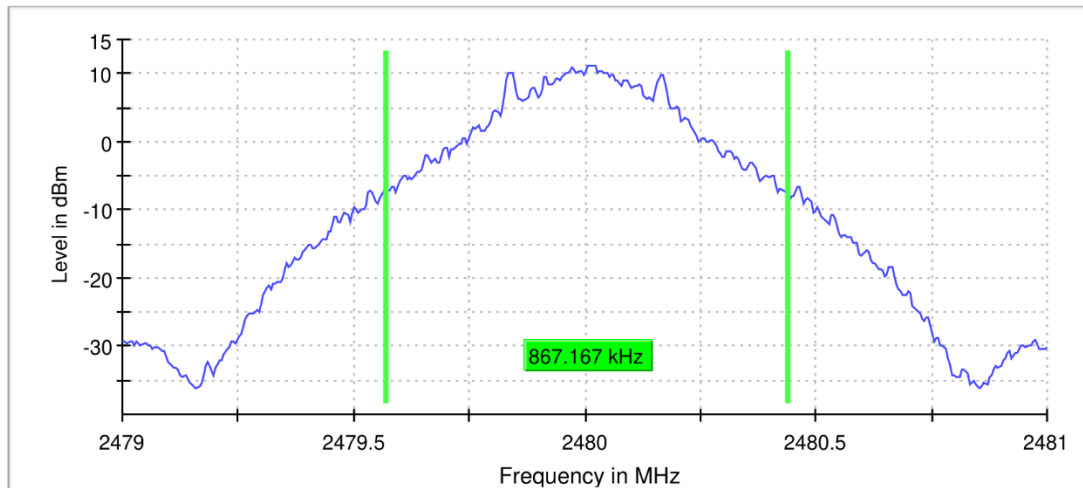

DH5_ANT0_2480


99 % Bandwidth

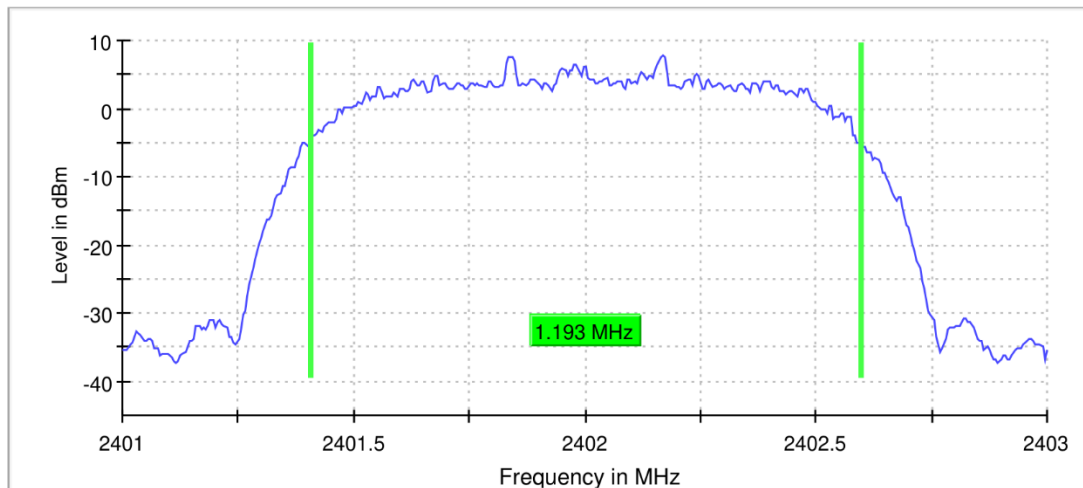

2DH5_ANT0_2402




99 % Bandwidth

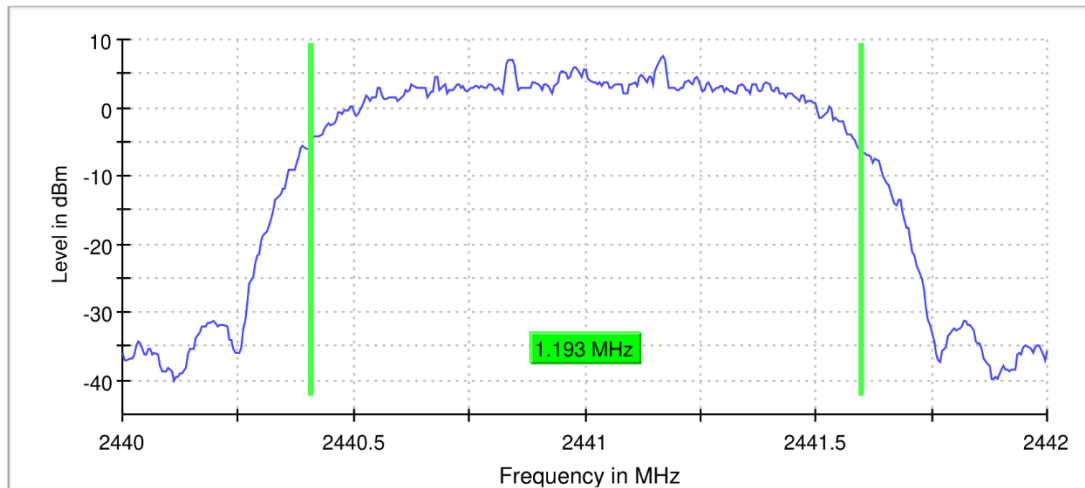

2DH5_ANT0_2441


99 % Bandwidth

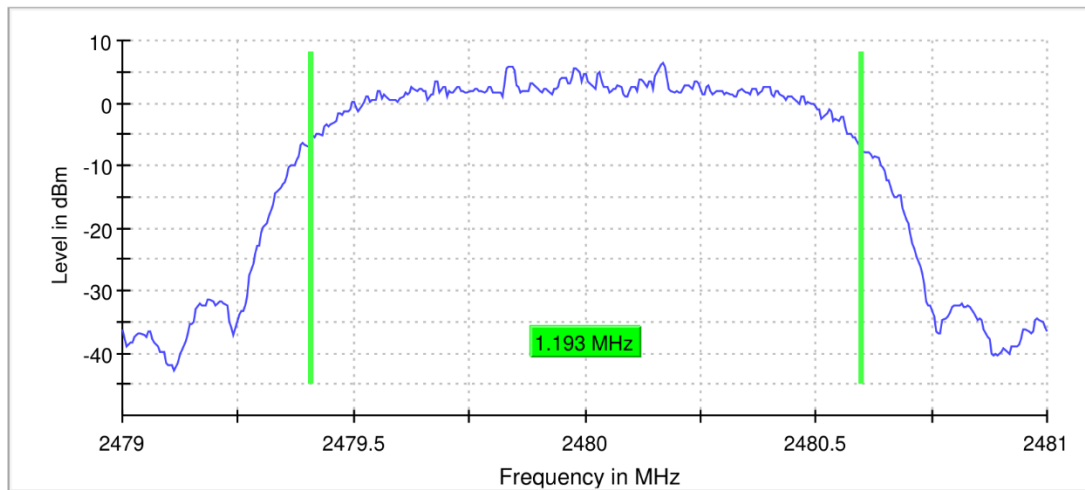

2DH5_ANT0_2480




99 % Bandwidth

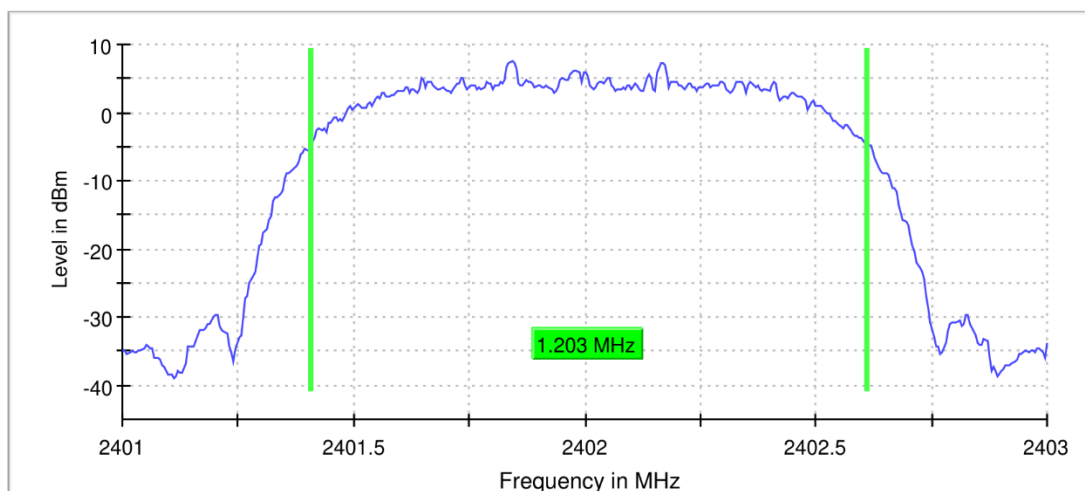


3DH5_ANT0_2402

99 % Bandwidth

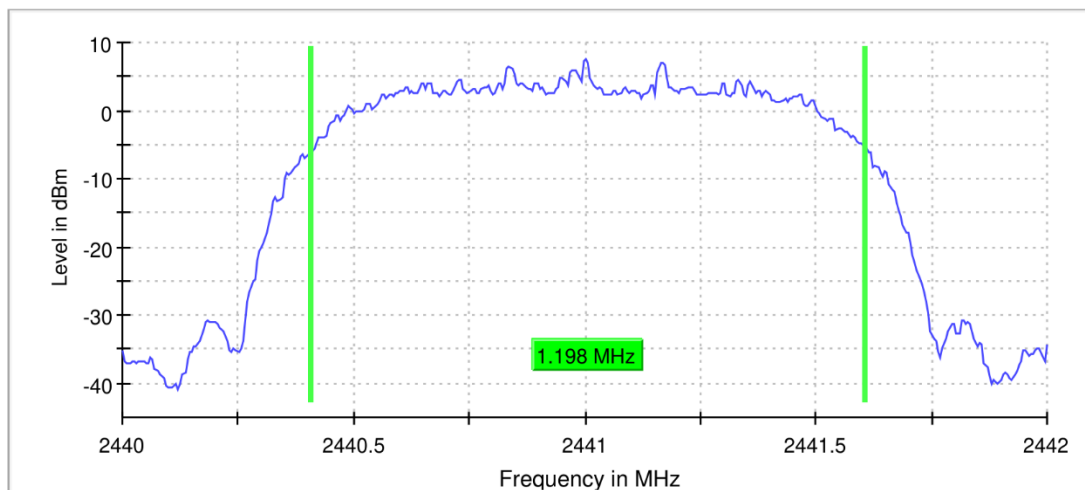

3DH5_ANT0_2441

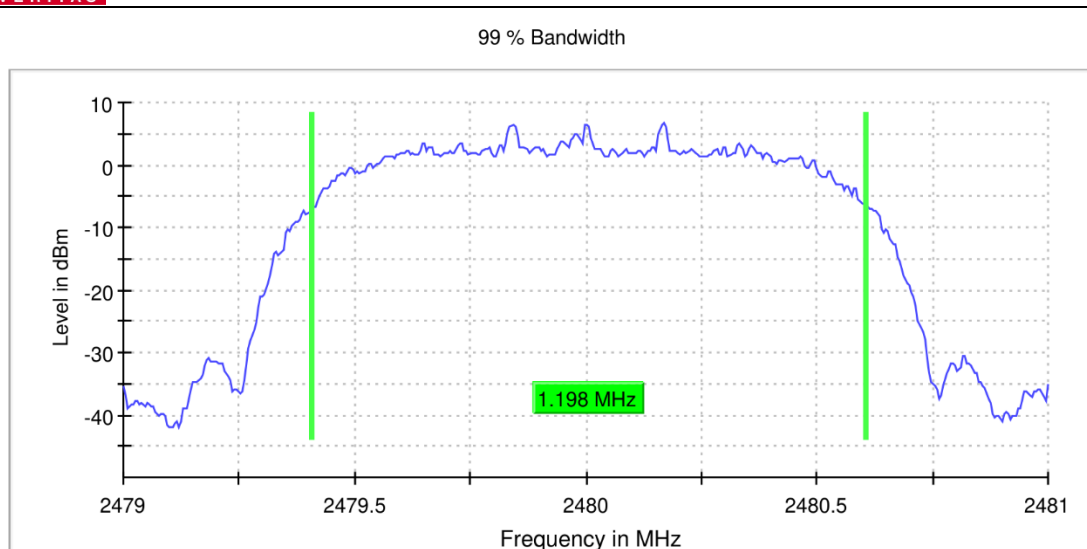

3DH5_ANT0_2480

RBW 30.000 kHz

VBW 100.000 kHz

**MAXIMUM CONDUCTED OUTPUT POWER****TEST RESULT**

TestMode	Frequency [MHz]	Average power [dBm]		Peak Power [dBm]		Total Power [dBm]			Conducted Limit [dBm]	Verdict	Power Setting
		ANT0	ANT1	ANT0	ANT1	Average power [dBm]	Peak Power [dBm]	Peak power [mw]			
DH5	2402	16.78	16.76	16.93	17.03	19.78	19.99	99.77	≤30.00	PASS	Default
	2441	16.40	16.26	17.01	16.87	19.34	19.95	98.86	≤30.00	PASS	Default
	2480	15.33	16.00	16.09	16.98	18.69	19.57	90.57	≤30.00	PASS	Default
2DH5	2402	13.86	14.18	16.63	16.94	17.03	19.80	95.50	≤30.00	PASS	Default
	2441	13.18	13.58	16.23	16.45	16.39	19.35	86.10	≤30.00	PASS	Default
	2480	11.99	12.79	15.25	16.36	15.42	18.85	76.74	≤30.00	PASS	Default
3DH5	2402	13.75	14.16	16.87	16.93	16.97	19.91	97.95	≤30.00	PASS	Default
	2441	12.97	13.57	16.42	16.58	16.29	19.51	89.33	≤30.00	PASS	Default
	2480	11.99	13.12	15.59	16.62	15.60	19.15	82.22	≤30.00	PASS	Default

TestMode	Antenna	Frequency [MHz]	Total Power [dBm]			Conducted Limit [dBm]	Verdict
			Average power [dBm]	Peak Power [dBm]	Peak power [mw]		
DH5	Ant1	2402	18.97	19.31	85.35	≤30.00	PASS
		2441	19.03	19.71	93.45	≤30.00	PASS
		2480	18.06	18.70	74.05	≤30.00	PASS
2DH5	Ant1	2402	16.08	18.94	78.31	≤30.00	PASS
		2441	16.21	19.25	84.06	≤30.00	PASS
		2480	15.21	18.22	66.34	≤30.00	PASS
3DH5	Ant1	2402	16.07	19.37	86.46	≤30.00	PASS
		2441	16.08	19.68	92.98	≤30.00	PASS
		2480	15.18	18.70	74.05	≤30.00	PASS

**CARRIER FREQUENCY SEPARATION****ANT0 TEST RESULT**


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	ANT0	Hop	1.020	≥ 0.6447	PASS
2DH5	ANT0	Hop	1.020	≥ 0.8853	PASS
3DH5	ANT0	Hop	1.020	≥ 0.8987	PASS

ANT1 TEST RESULT


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	ANT1	Hop	1.020	≥ 0.6447	PASS
2DH5	ANT1	Hop	1.020	≥ 0.8920	PASS
3DH5	ANT1	Hop	1.020	≥ 0.8920	PASS




ANT0 TEST GRAPHS

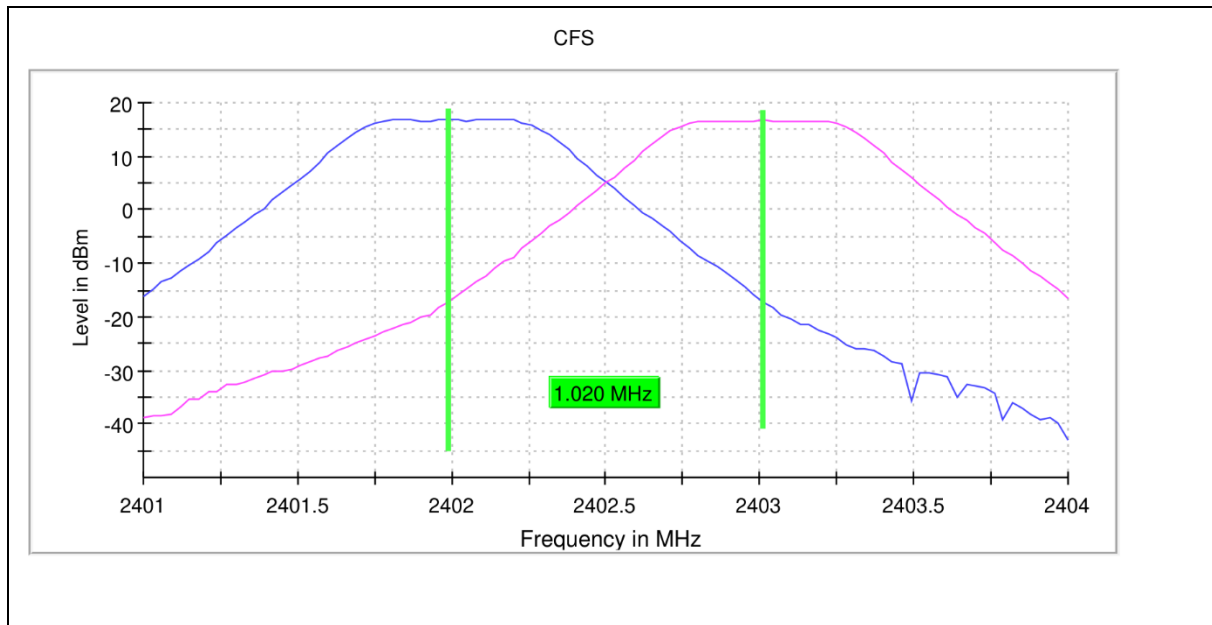

DH5_ANT0_Hop

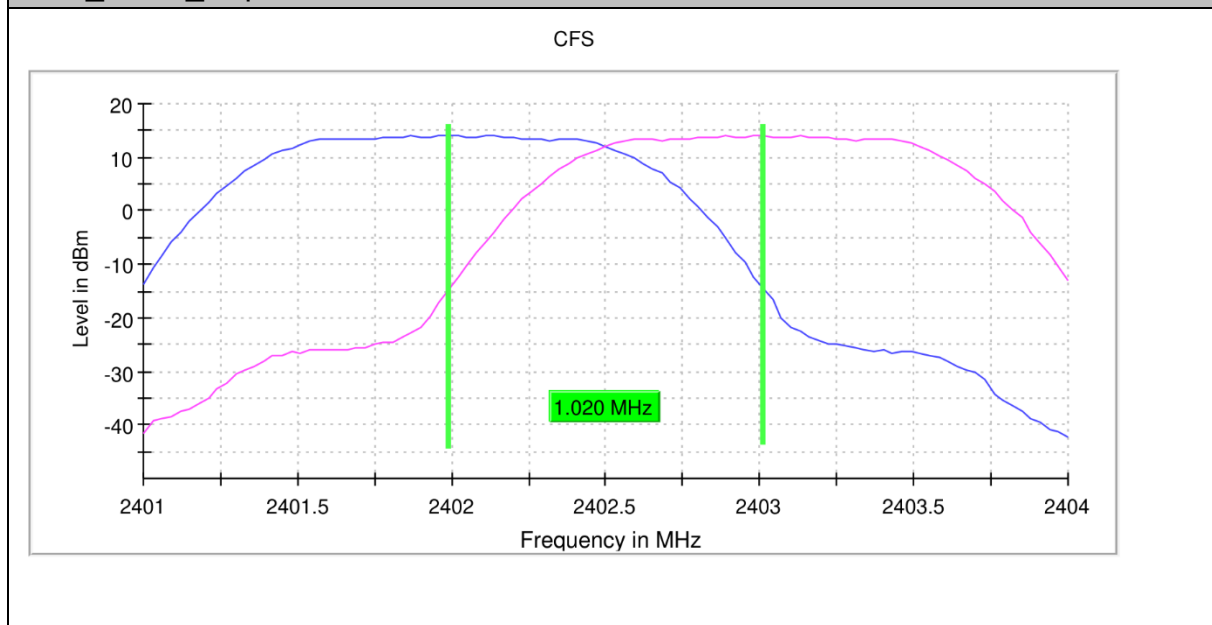

2DH5_ANT0_Hop

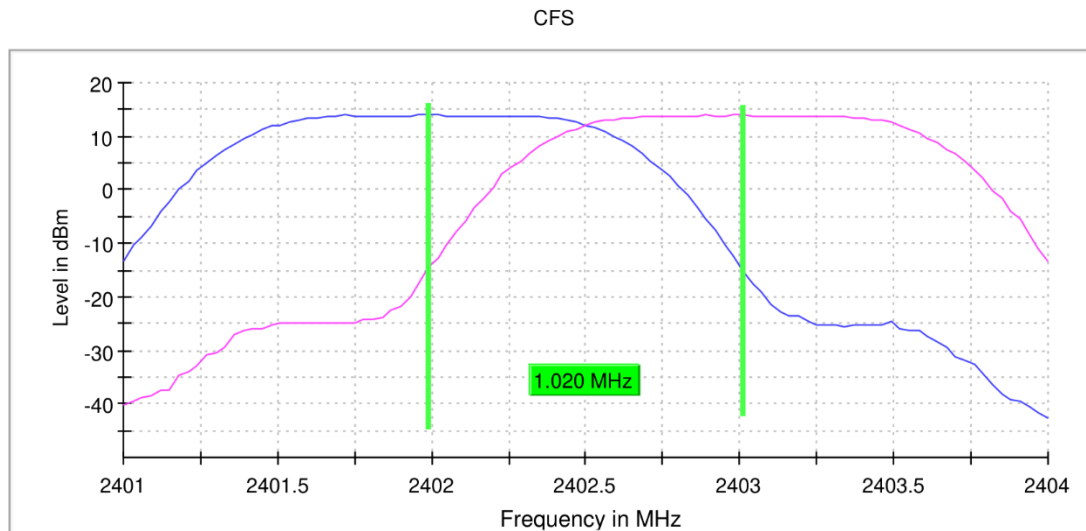


3DH5_ANT0_Hop

RBW 300.000 kHz

VBW 300.000 kHz


ANT1 TEST GRAPHS

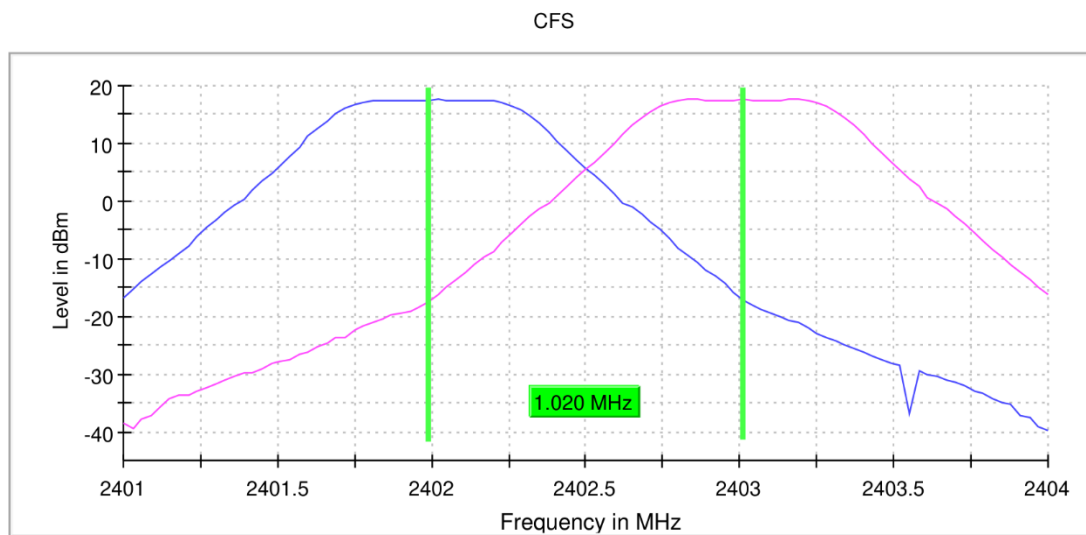

DH5_ANT1_Hop




CFS

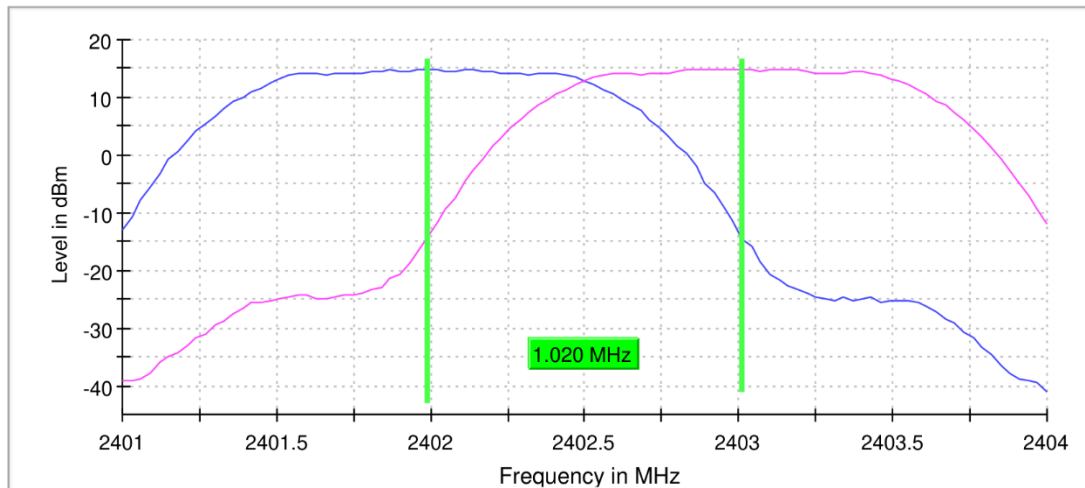

2DH5_ANT1_Hop

CFS

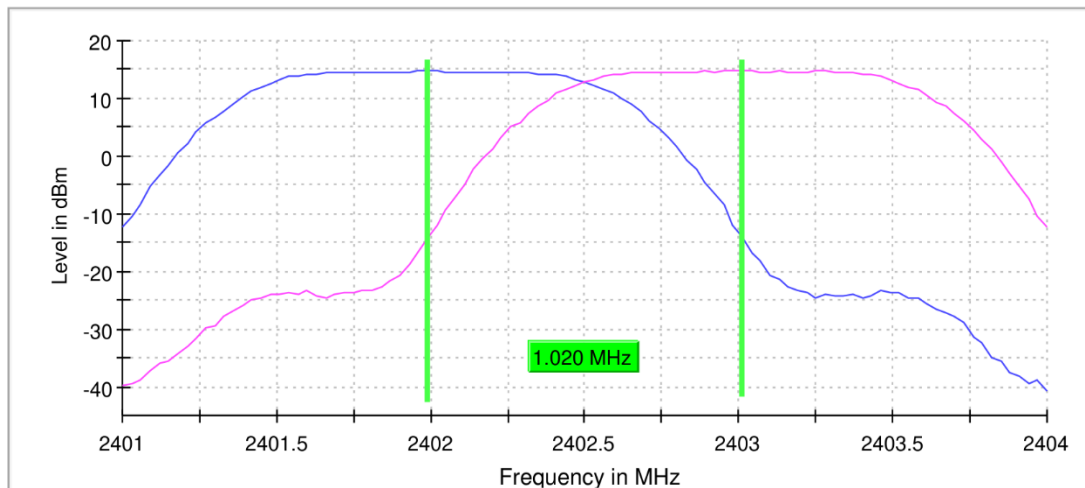

3DH5_ANT1_Hop

RBW 300.000 kHz

VBW 300.000 kHz

TIME OF OCCUPANCY

ANT0 TEST RESULT


TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	ANT0	Hop	0.384	325	0.125	≤0.4	PASS
DH3	ANT0	Hop	1.640	100	0.164	≤0.4	PASS
DH5	ANT0	Hop	2.888	65	0.188	≤0.4	PASS
2DH1	ANT0	Hop	0.384	330	0.127	≤0.4	PASS
2DH3	ANT0	Hop	1.640	112	0.184	≤0.4	PASS
2DH5	ANT0	Hop	2.888	77	0.222	≤0.4	PASS
3DH1	ANT0	Hop	0.384	308	0.118	≤0.4	PASS
3DH3	ANT0	Hop	1.640	106	0.174	≤0.4	PASS
3DH5	ANT0	Hop	2.888	62	0.179	≤0.4	PASS

ANT1 TEST RESULT


TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	ANT1	Hop	0.384	316	0.121	≤0.4	PASS
DH3	ANT1	Hop	1.640	115	0.189	≤0.4	PASS
DH5	ANT1	Hop	2.888	76	0.219	≤0.4	PASS
2DH1	ANT1	Hop	0.384	322	0.124	≤0.4	PASS
2DH3	ANT1	Hop	1.640	114	0.187	≤0.4	PASS
2DH5	ANT1	Hop	2.888	78	0.225	≤0.4	PASS
3DH1	ANT1	Hop	0.384	306	0.118	≤0.4	PASS
3DH3	ANT1	Hop	1.640	101	0.166	≤0.4	PASS
3DH5	ANT1	Hop	2.888	58	0.168	≤0.4	PASS




BUREAU VERITAS Test Report No.: PSZ-QBJ2501200112RF09
ANT0 TEST GRAPHS

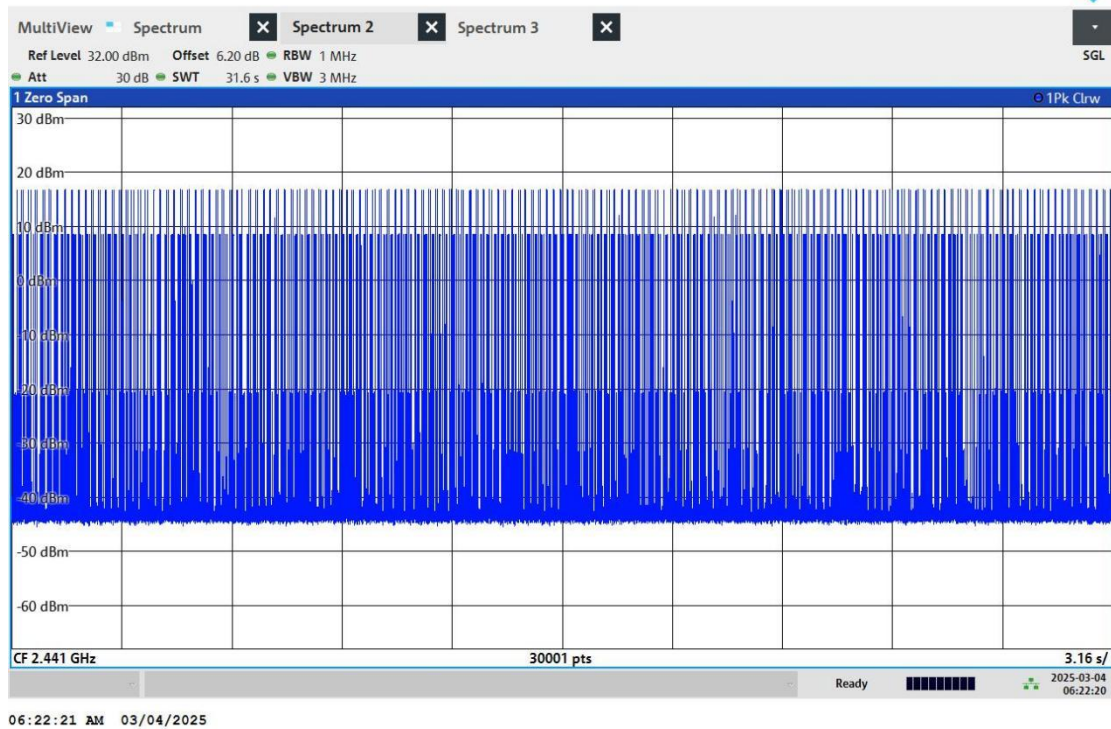

DH1_ANT0_Hop

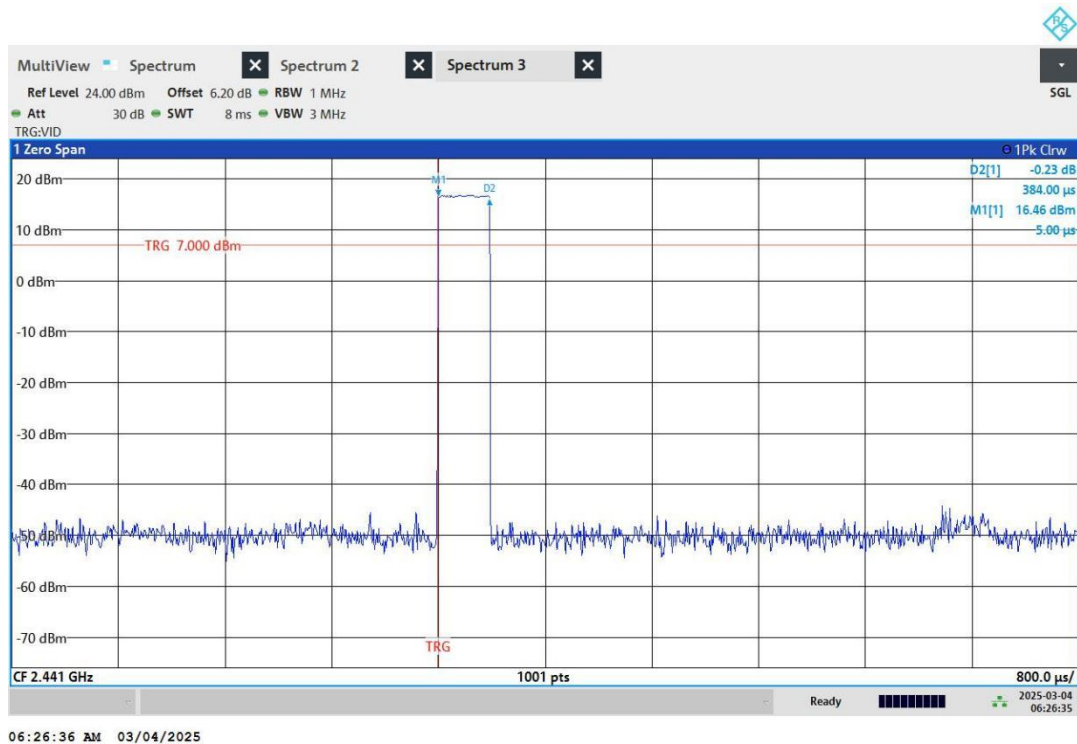


DH1_ANT0_Hop

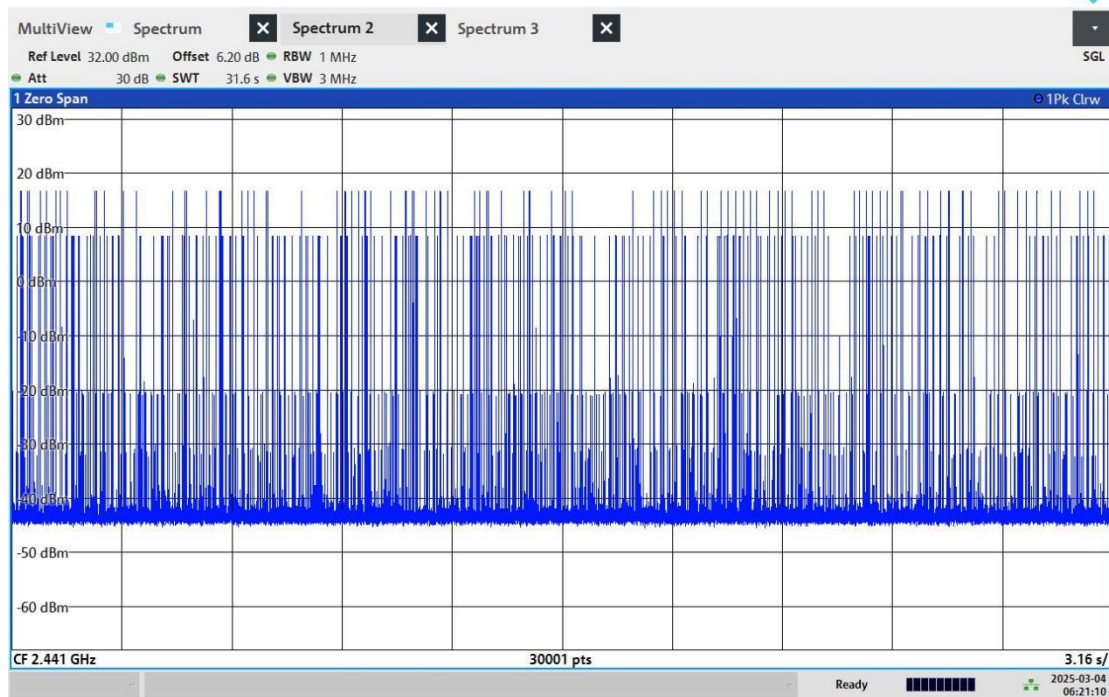


06:21:11 AM 03/04/2025

DH3_ANT0_Hop

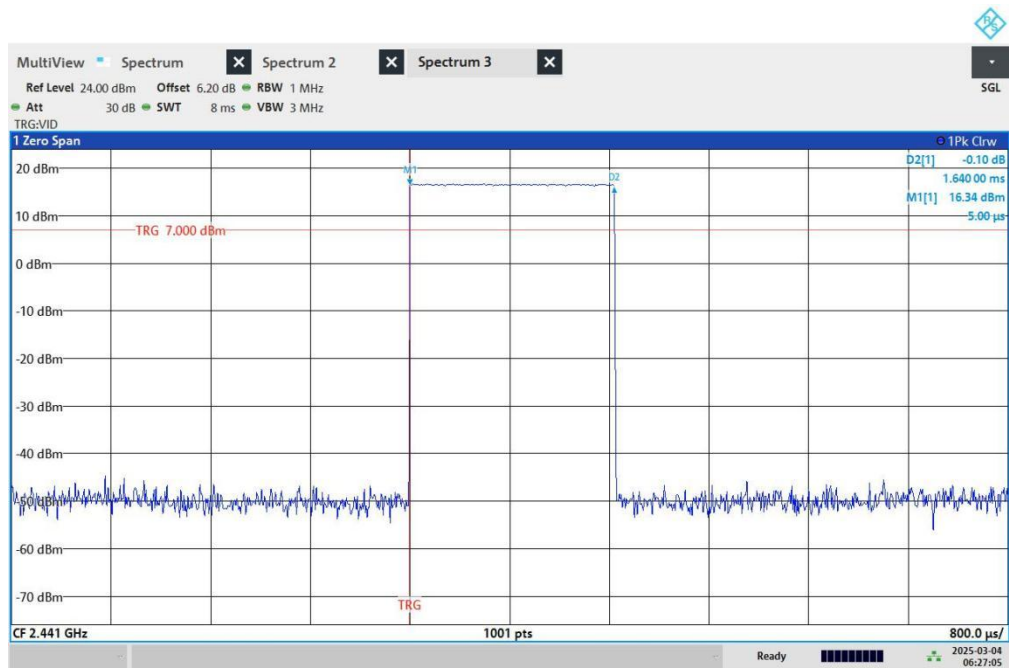


06:27:05 AM 03/04/2025

DH3_ANT0_Hop

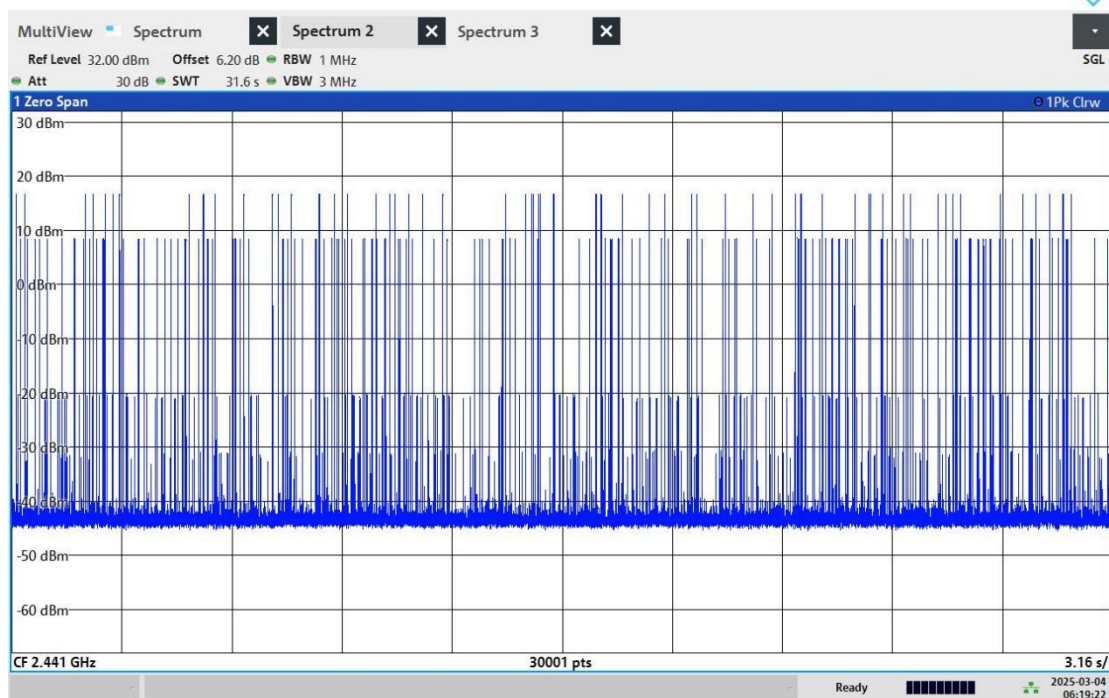


06:19:22 AM 03/04/2025

DH5_ANT0_Hop

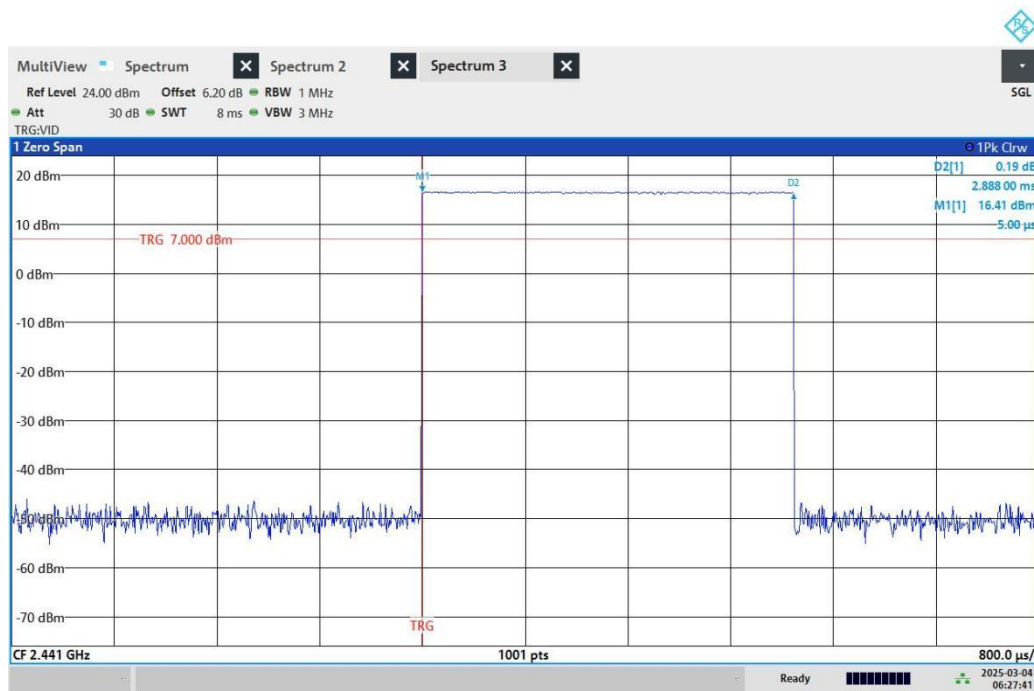


06:27:41 AM 03/04/2025

DH5_ANT0_Hop

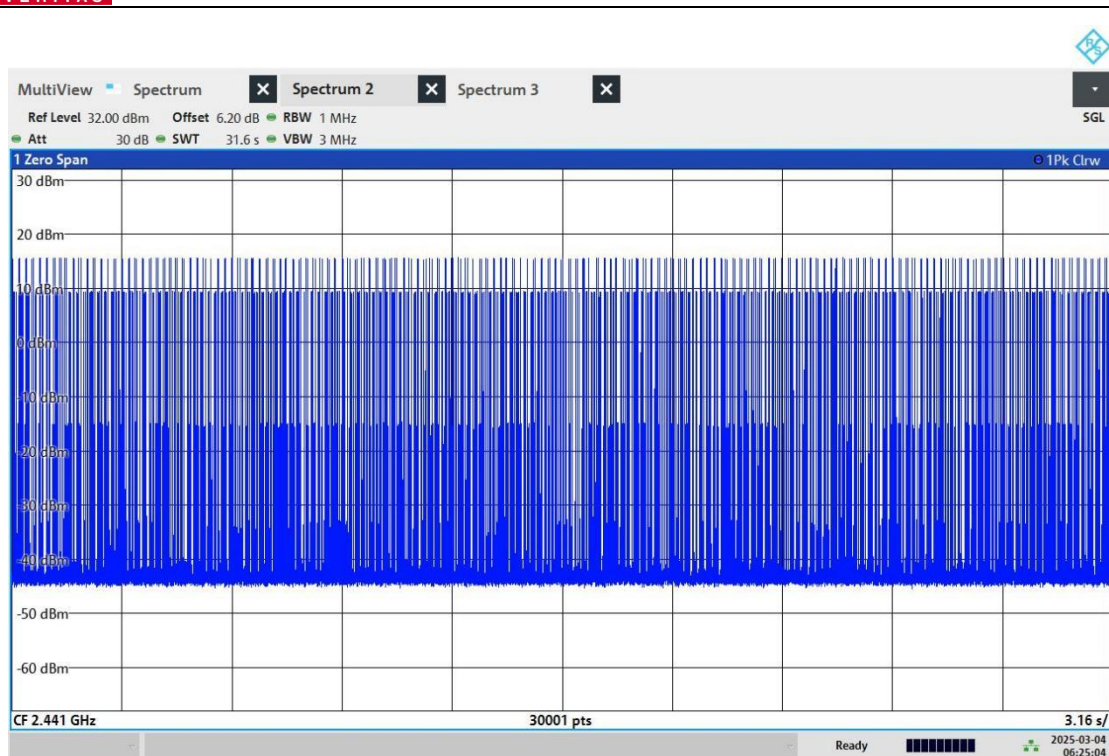


06:25:05 AM 03/04/2025

2DH1_ANT0_Hop

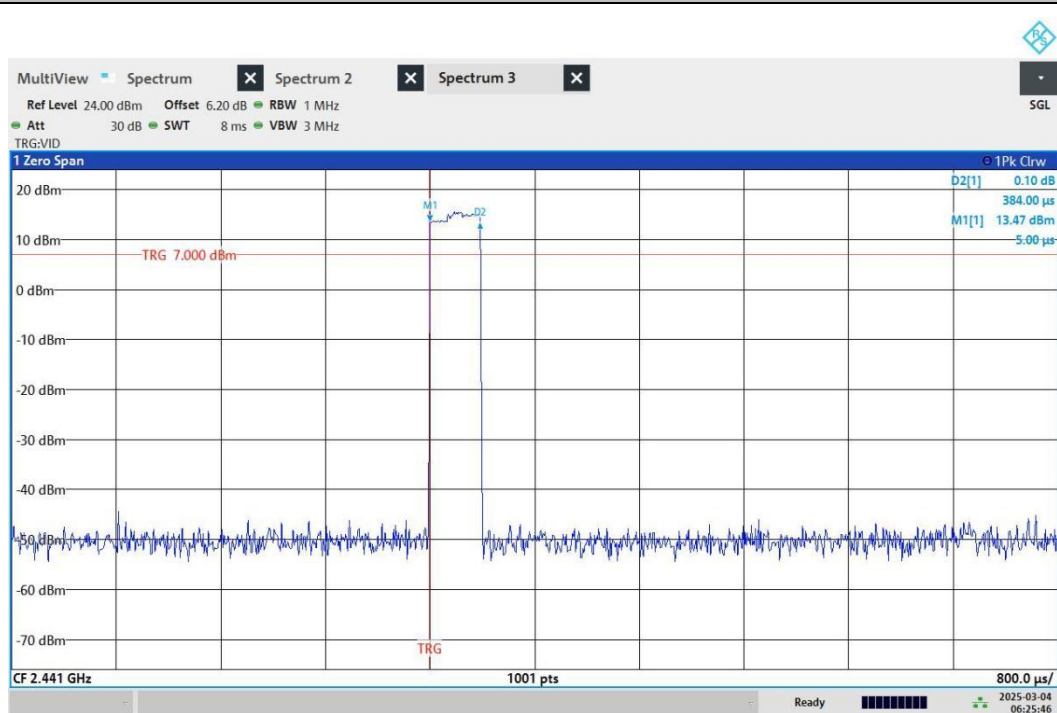


06:25:47 AM 03/04/2025

2DH1_ANT0_Hop

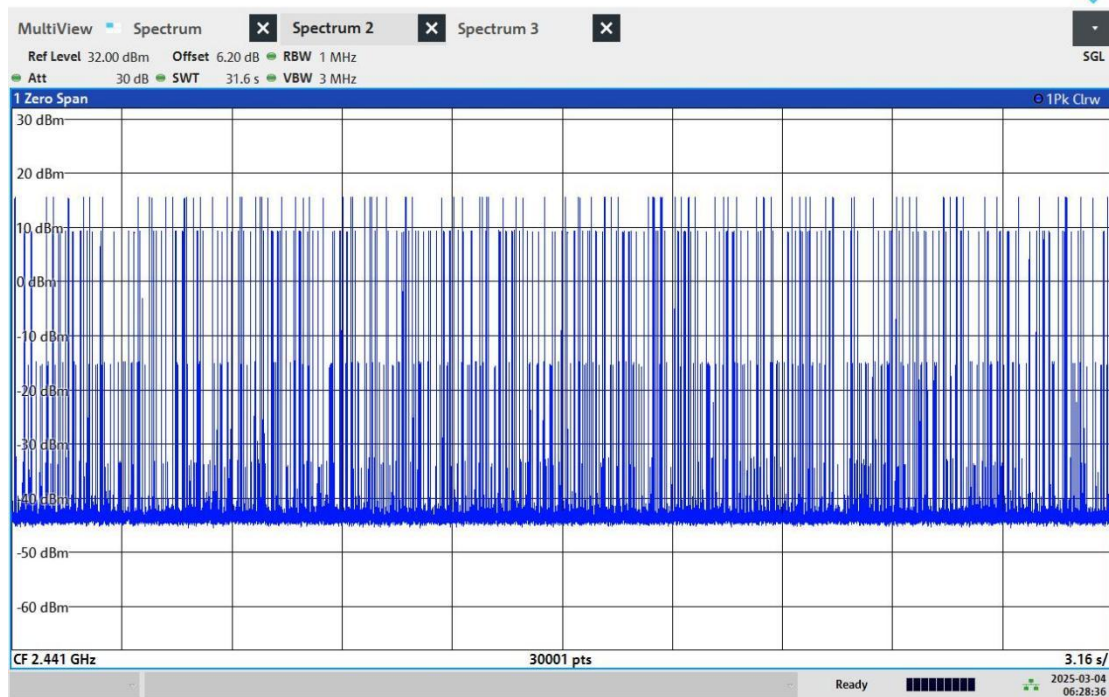


06:28:36 AM 03/04/2025

2DH3_ANT0_Hop

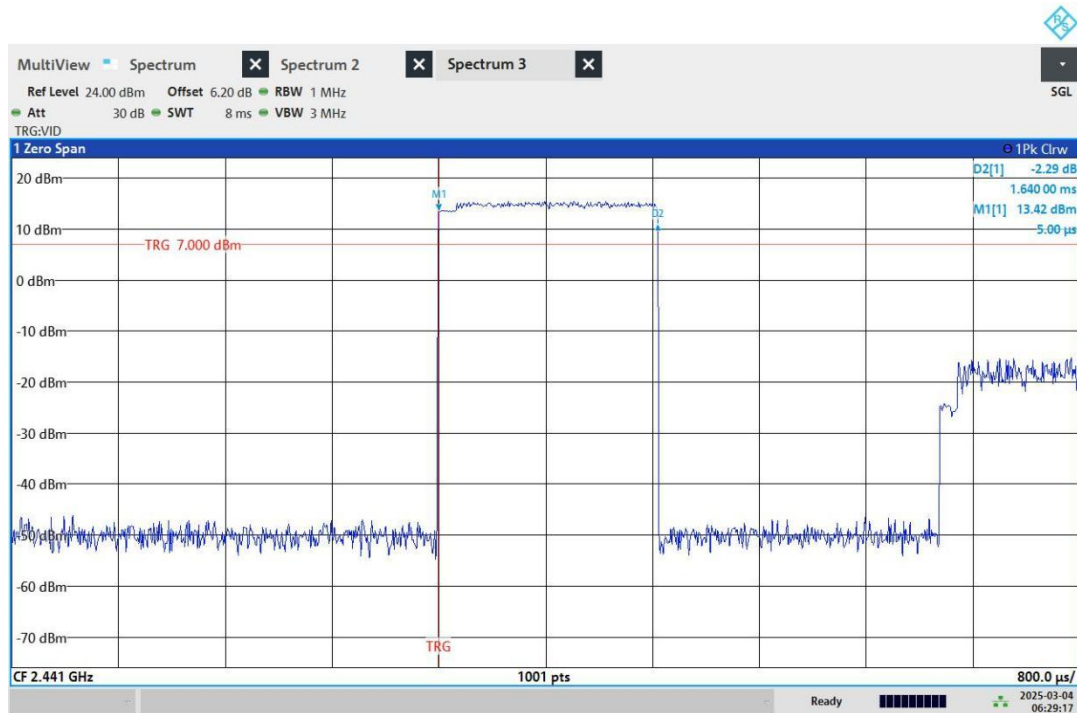


06:29:18 AM 03/04/2025

2DH3_ANT0_Hop

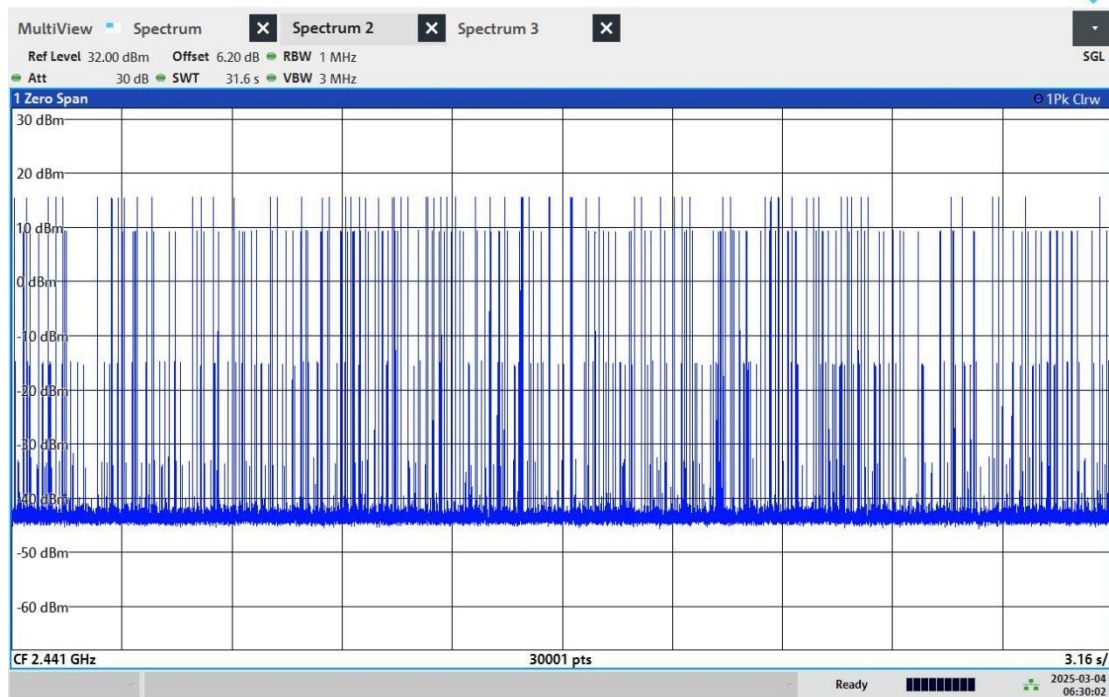


06:30:02 AM 03/04/2025

2DH5_ANT0_Hop

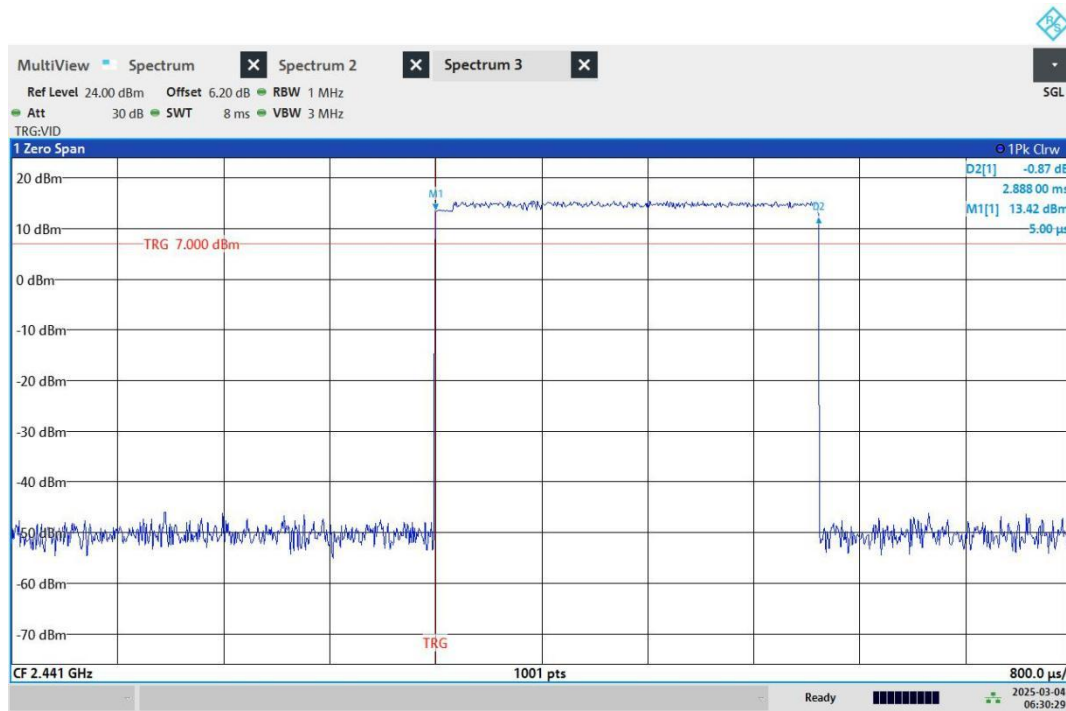


06:30:29 AM 03/04/2025

2DH5_ANT0_Hop

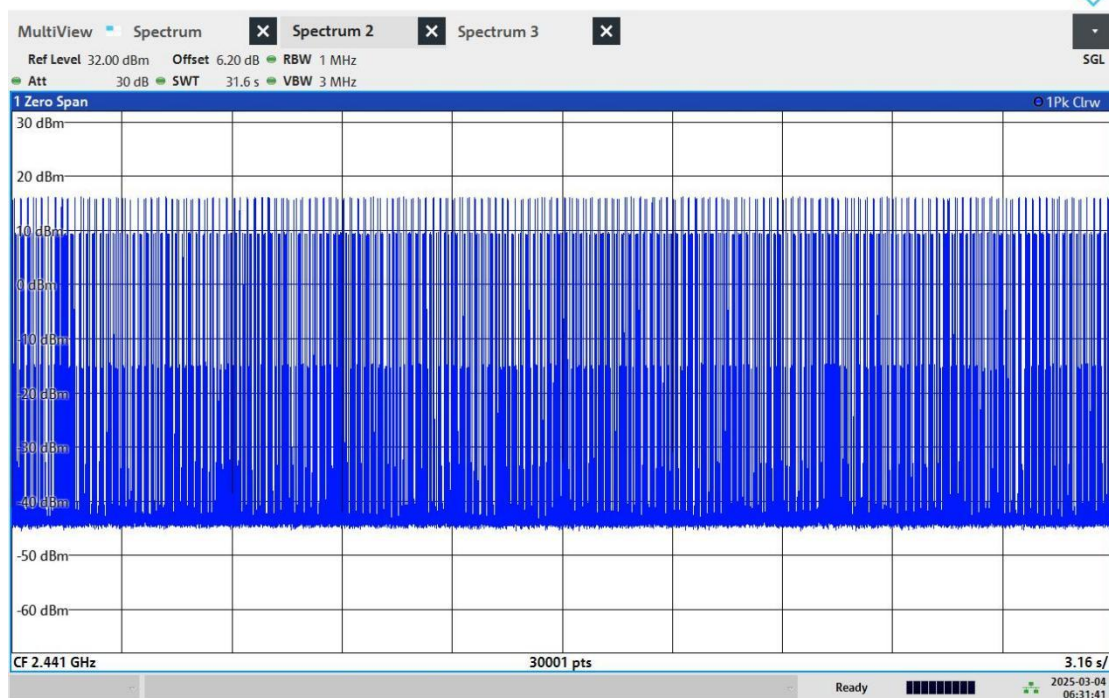

06:31:42 AM 03/04/2025

3DH1_ANT0_Hop

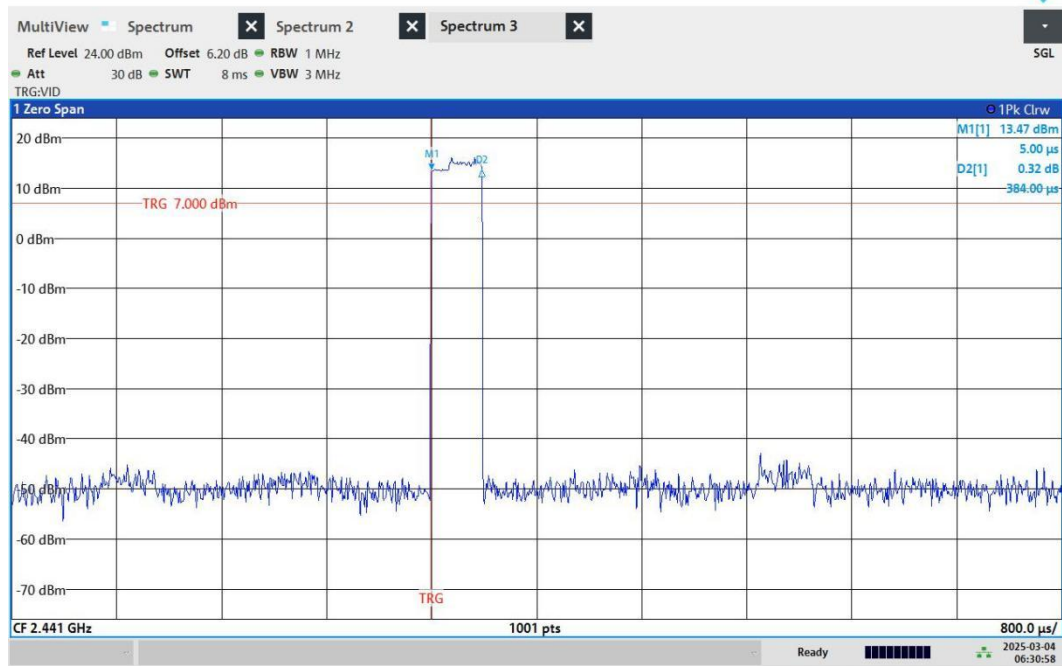


06:30:59 AM 03/04/2025

3DH1_ANT0_Hop




Test Report No.: PSZ-QBJ2501200112RF09

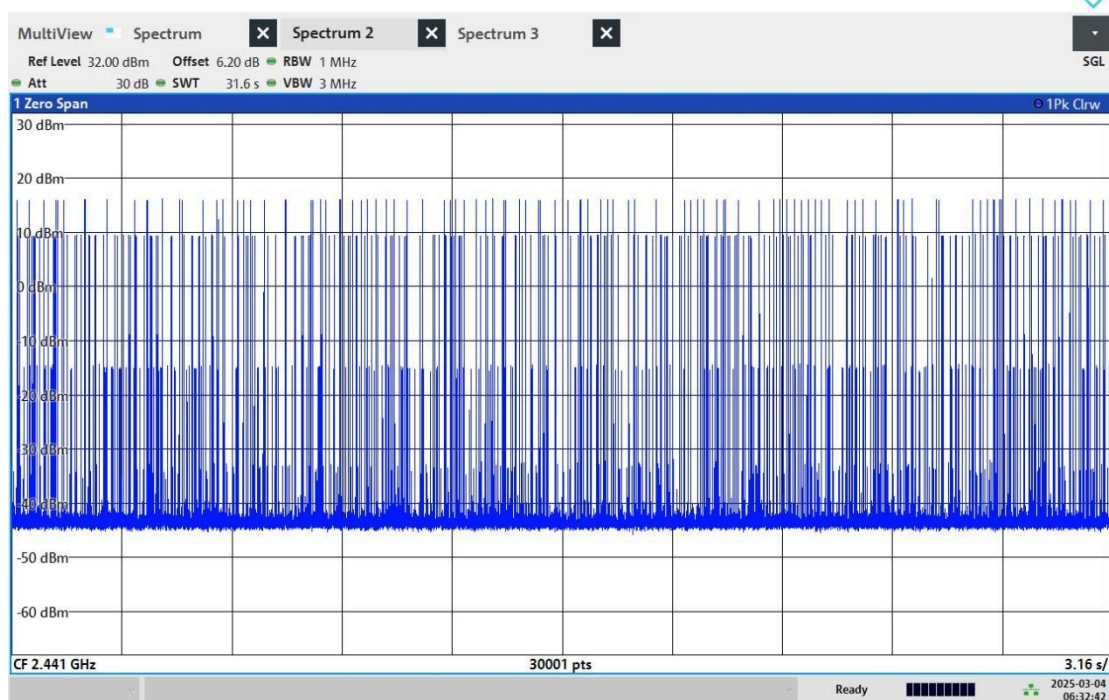

06:32:42 AM 03/04/2025

3DH3_ANT0_Hop

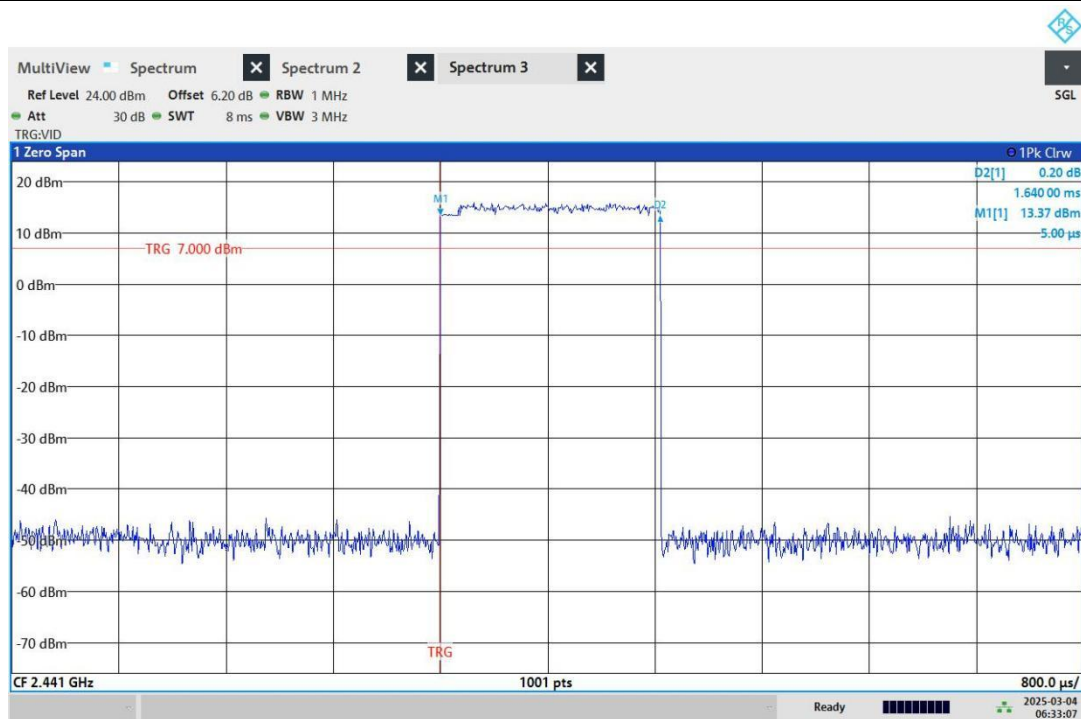

06:33:08 AM 03/04/2025

3DH3_ANT0_Hop