



BUREAU
VERITAS

TEST REPORT

Applicant: Xiaomi Communications Co., Ltd.
EUT Description: Mobile Phone
Model: 25053PC47G
Brand: POCO
FCC ID: 2AFZZPC47G
Standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 96.47
Date of Receipt: 2025/03/13
Date of Test: 2025/03/13 to 2025/03/18
Date of Issue: 2025/03/18

BV7L. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

the results documented in this report apply only the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of BV7L, the test report shall not be reproduced except in full.

Approved By: Simon Wang

Reviewed By: Luke Lu

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Description</u>	<u>Revised by</u>
01	2025/03/18	Original	

Summary of Test Results

FCC Part	Test Item	Verdict
§96.47	End user device additional requirements	Pass

Contents

1	General Description	5
1.1	Lab Information	5
1.1.1	Testing Location	5
1.1.2	Test Facility / Accreditations	5
1.2	Client Information	5
1.2.1	Applicant.....	5
1.2.2	Manufacturer	5
1.3	Product Information	6
2	Test Configuration	7
2.1	Description of test setup	7
2.2	Test Environment	7
2.3	Test RF Cable	7
2.4	Modifications	7
3	Equipment and Measurement Uncertainty	8
3.1	Test Equipment List	8
3.2	Measurement Uncertainty	8
4	Test Results	9
4.1	End user Device Additional Requirements.	9
5	Test Setup Photos	10
	Appendix	11

1 General Description

1.1 Lab Information

1.1.1 Testing Location

These measurements tests were conducted at the BV 7Layers Communications Technology (Shenzhen) Co., Ltd facility located at Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014

Tel.: +86 755 8869 6566

Contact Email: customerservice.sw@bureauveritas.com

1.1.2 Test Facility / Accreditations

A2LA (Certificate Number: 3939.01)

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

FCC Designation No.: CN1171

BV 7Layers Communications Technology (Shenzhen) Co., Ltd has been recognized as an accredited testing laboratory.

Designation Number: CN1171.

ISED CAB identifier: CN0007

BV 7Layers Communications Technology (Shenzhen) Co., Ltd has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0007

Company Number: 21771

1.2 Client Information

1.2.1 Applicant

Applicant:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2.2 Manufacturer

Manufacturer:	Xiaomi Communications Co., Ltd.
Address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Information

EUT Description:	Mobile Phone		
Model:	25053PC47G		
Brand:	POCO		
Hardware Version:	13510010U		
Software Version:	Xiaomi HyperOS 2.0		
Technical specification:			
Operation Frequency Range:	Band	All Frequency	CBSD Work Frequency
	LTE Band 48	3550 to 3700 MHz	3550 to 3700 MHz
	NR Band n48	3550 to 3700 MHz	3550 to 3700 MHz
	NR Band n77	3450 to 3980 MHz	3550 to 3700 MHz
	NR Band n78	3450 to 3800 MHz	3550 to 3700 MHz
Antenna Type:	PIFA Antenna		
Antenna Gain:	Band	Ant (dBi)	
	LTE Band 48 NR Band n48	ANT1: -1.48dBi	
		ANT2:-1.72dBi	
		ANT3: 0.98dBi	
		ANT7: -1.4dBi	
	NR Band n77	ANT1: -0.73dBi	
		ANT2:-1.2dBi	
		ANT3: 0.98dBi	
		ANT7: -0.8dBi	
	NR Band n78	ANT1: -0.73dBi	
		ANT2:-1.2dBi	
		ANT3: 0.98dBi	
ANT7: -1.4dBi			
Remark: The above EUT's information was declared by applicant, please refer to the specifications or user manual for more detailed description.			

2 Test Configuration

2.1 Description of test setup

Description	Manufacturer	Model	ID
Base Station	Baicells	BSC7048A243	
Base Station	Baicells	mBS31001	
Router	TP Link	TL-WDR6300	/
Laptop	DELL	Latitude 3510	/

2.2 Test Environment

Temperature:	24°C ~ 26°C
Relative Humidity	45-56 % RH Ambient
Voltage:	Nominal: 3.93Vdc

2.3 Test RF Cable

For all conducted test items: The offset level is set spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

2.4 Modifications

No modifications were made during testing.

3 Equipment and Measurement Uncertainty

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, whichever is less, and where applicable is traceable recognized national standards.

3.1 Test Equipment List

Radiated Emission					
Description	Manufacturer	Model	SN	Last Due	Cal Due
Signal Analyzer	Keysight	N9020A			
Power Divider	Qotana	DBPD0200001800C			

3.2 Measurement Uncertainty

Parameter	U_{lab}
Frequency error	

Uncertainty figures are valid to a confidence level of 95%

4 Test Results

4.1 End user Device Additional Requirements.

Limits


End User Devices will operate only after it receives authorization from an associated CBSD, including the frequencies and power limits for their operation.

End User Devices discontinues operation, changes Frequency, and changes its operational power level within 10 s of receiving instructions from its associated CBSD.

Test Procedure

KDB 940660 D01 Part 96 CBRS Eqpt v02, WINNF-TS-0122 V1.0.2

Test Setup

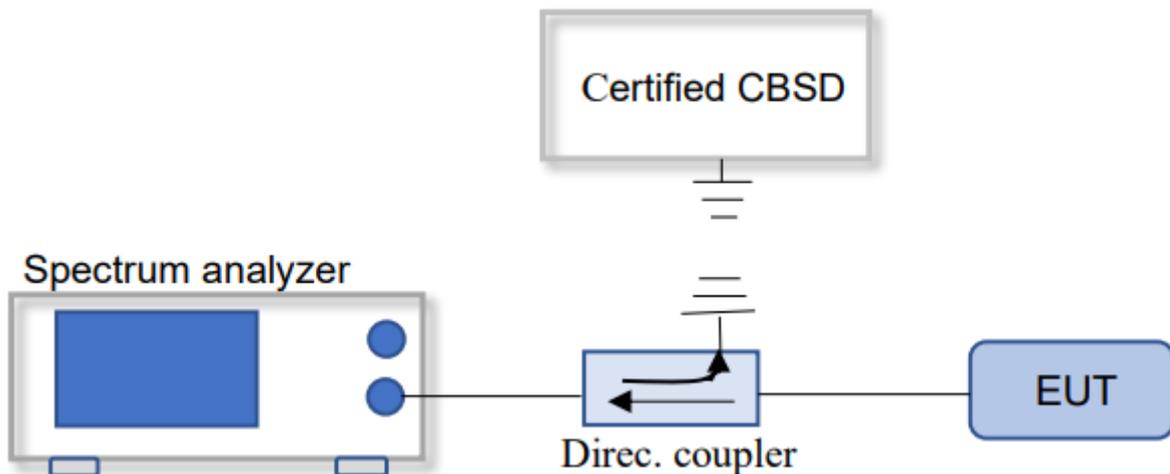

Test Settings

Based on the End user device additional requirements. During the test, use a certified Ruckus CBSD device (LTE Base Station FCC ID:XXXXXXXXXXXXXX, NR Base Station FCC ID: XXXXXXXXXXXXXXXXX) as a companion device.

1. Configure CBSD to operate at 3600MHz~3625MHz, Power level 10dBm/MHz.
2. Enable AP service from Ruckus Cloud management
3. Check End User Devices Frequency and Power
4. Disable AP service from Ruckus Cloud management, check whether the EUT stops transmitting within 10s
5. Repeat step 2 to step 4 with the CBSD operating at 3670MHz~3690MHz, Power level 20dBm/MHz.

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.


Test Result

The detailed test data see: **Appendix**.

5 Test Setup Photos

The detailed test data see: **Test Setup Photos**

Bandwidth: 20MHz Setup with frequency 3690MHz and power level 20dBm/MHz

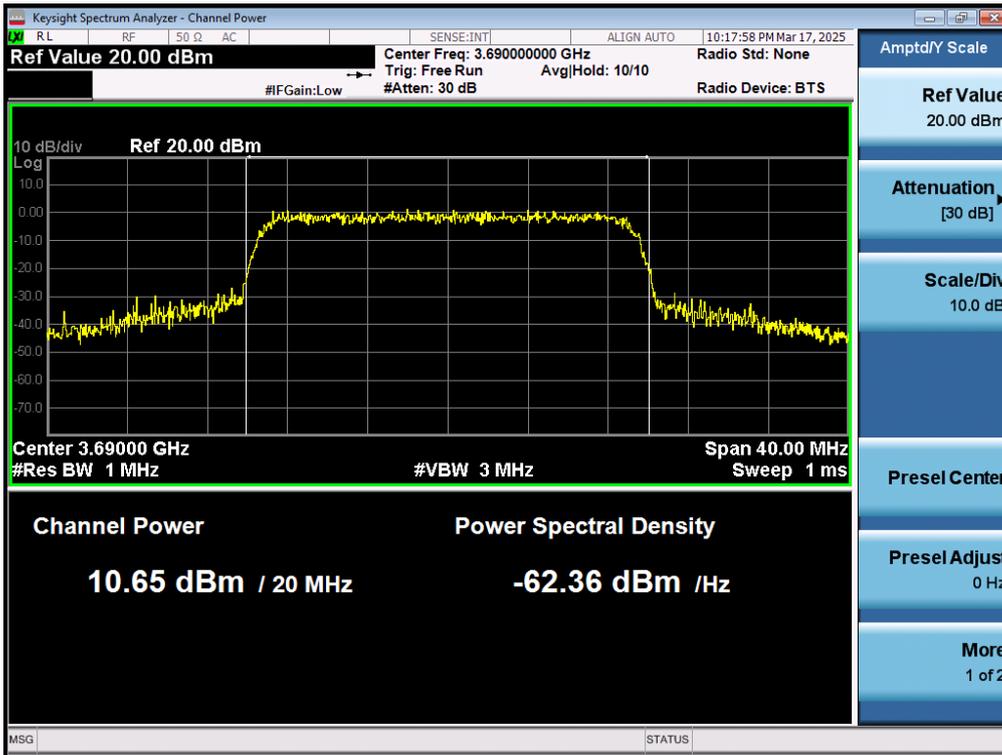


EUT stops transmission within 10 seconds of receiving instructions from its associated CBSD.




NR


Bandwidth: 20MHz Setup with frequency 3625MHz and power level 10dBm/MHz

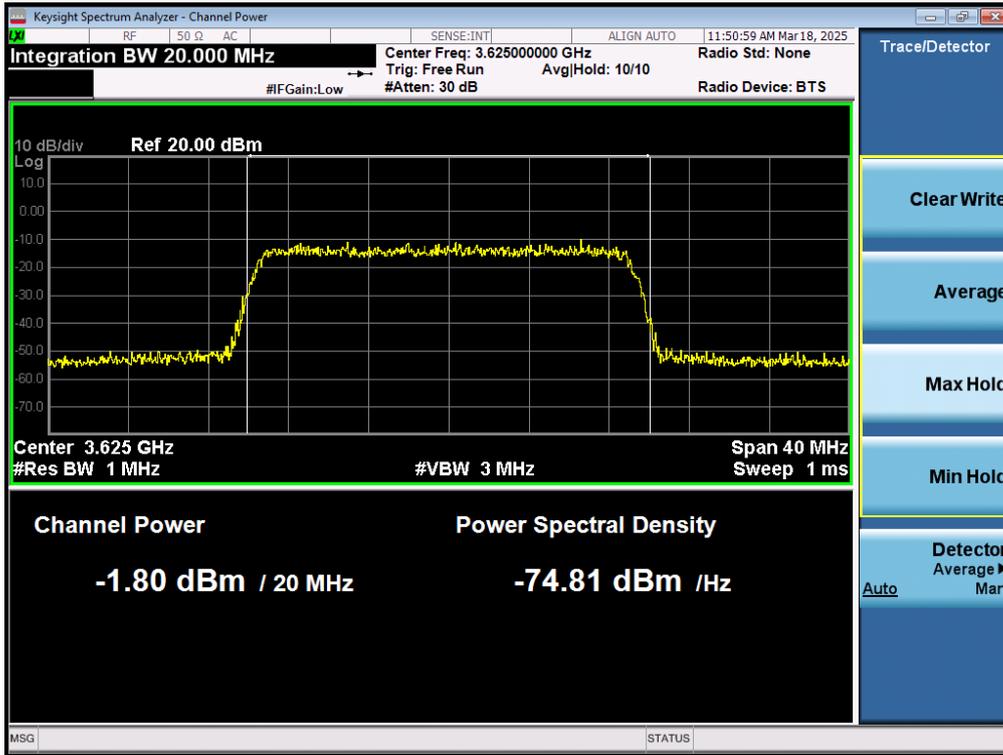


EUT stops transmission within 10 seconds of receiving instructions from its associated CBSD.

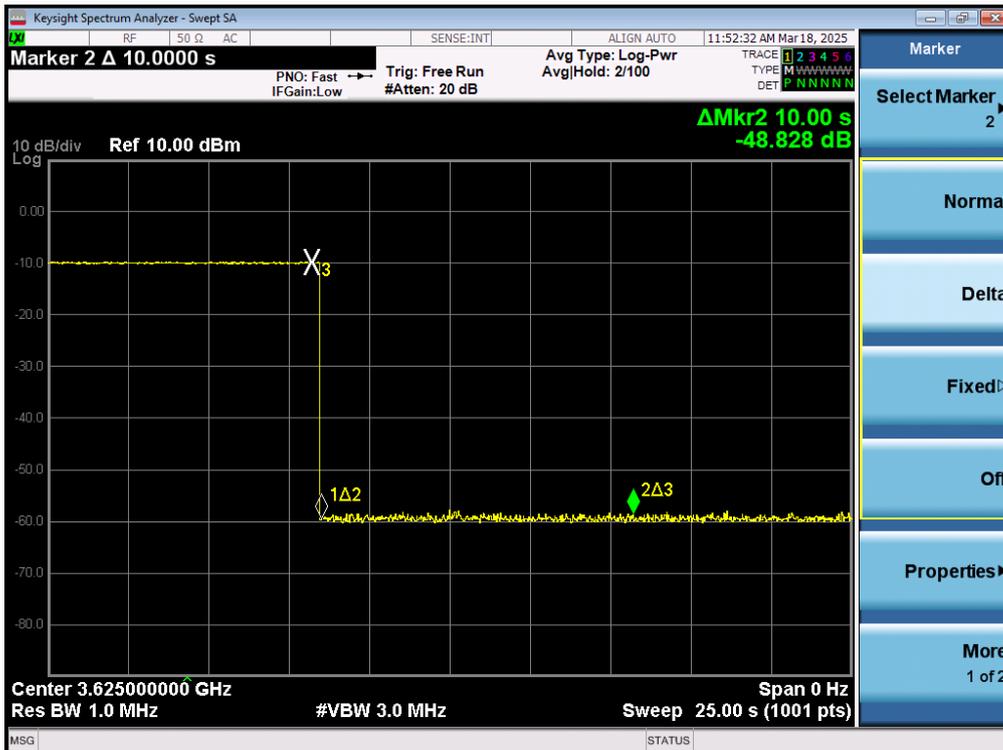

Bandwidth: 40MHz Setup with frequency 3680MHz and power level 20dBm/MHz

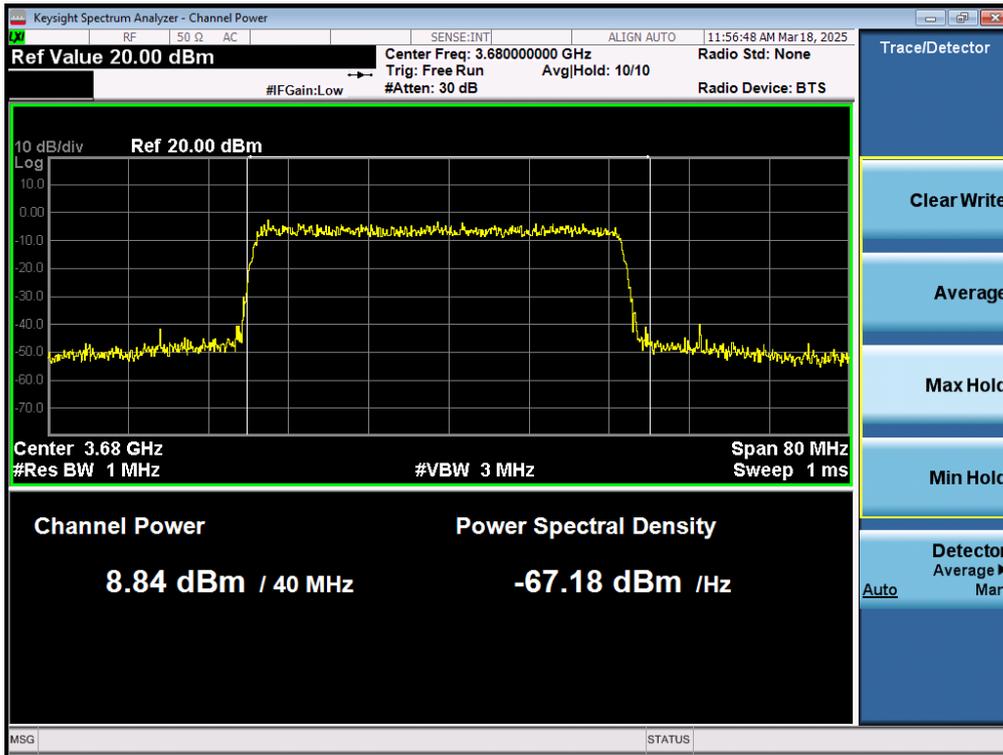

EUT stops transmission within 10 seconds of receiving instructions from its associated CBSD.

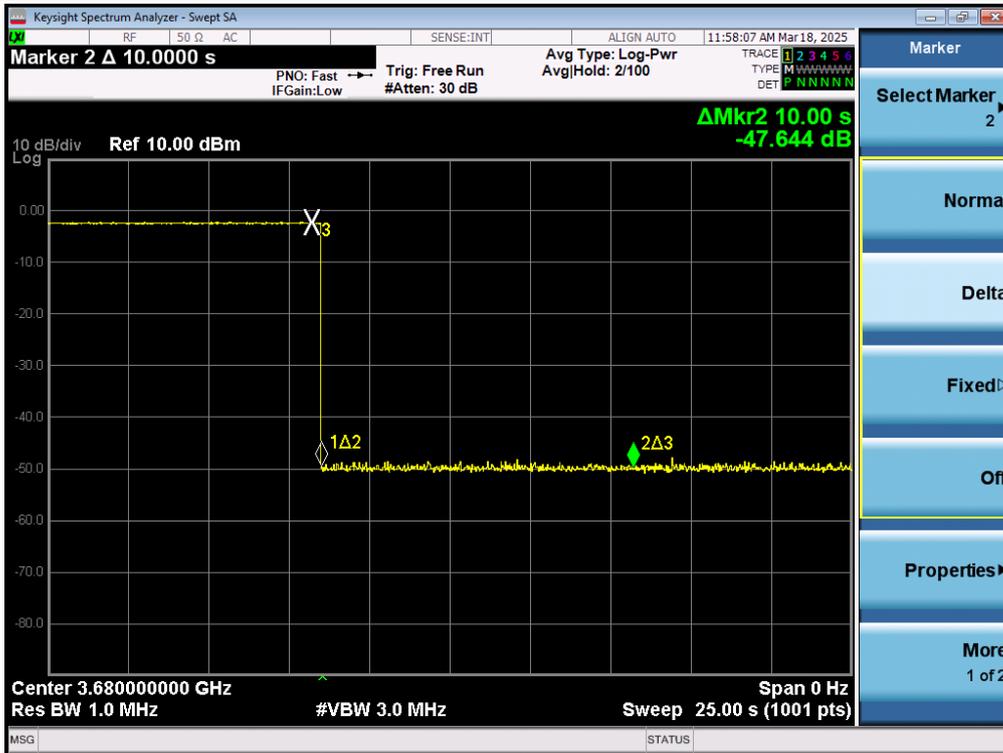

~The End~