

Date: 2024-11-20

**01\_WLAN6GHz\_802.11ax-HE160 MCS0\_Left Cheek\_0mm\_Ch111**


Communication System: IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle)  
Frequency: 6505.000MHz; Duty Cycle: 1:1  
Medium: HSL Medium parameters used:  $f= 6505.000$  MHz;  $\sigma= 6.17$  S/m;  $\epsilon_r = 34.5$   
Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7706; ConvF(5.27, 6.32, 5.24); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

**Area Scan (119.0 mm x 204.0 mm):** Measurement Grid: 8.5 mm x 8.5 mm  
SAR (1g) = 0.851 W/kg; SAR (10g) = 0.279 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm  
Power Drift = -0.06 dB  
SAR (1g) = 0.841 W/kg; SAR (10g) = 0.261 W/kg  
Smallest distance from peaks to all points 3 dB below = 7.5 mm  
Ratio of SAR at M2 to SAR at M1 = 57.3 %  
psAPD (4.0cm<sup>2</sup>, sq) = 5.94 [W/m<sup>2</sup>]

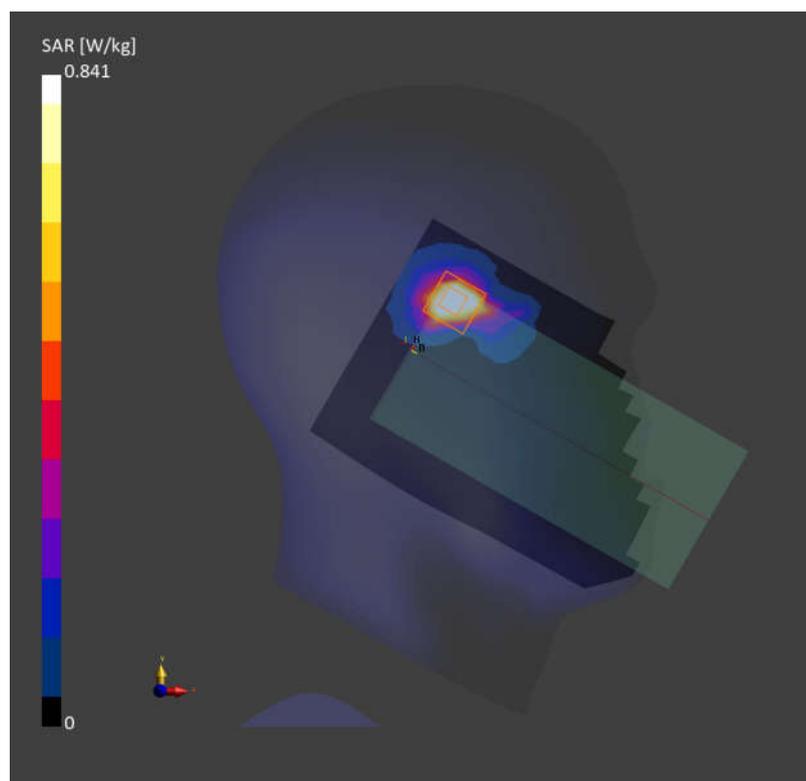

Date: 2024-11-20

**02\_WLAN6GHz\_802.11ax-HE160 MCS0\_Back\_15mm\_Ch111**


Communication System: IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle)  
Frequency: 6505.000MHz; Duty Cycle: 1:1  
Medium: HSL Medium parameters used:  $f= 6505.000$  MHz;  $\sigma= 6.17$  S/m;  $\epsilon_r = 34.5$   
Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7706; ConvF(5.27, 6.32, 5.24); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

**Area Scan (119.0 mm x 204.0 mm):** Measurement Grid: 8.5 mm x 8.5 mm  
SAR (1g) = 0.118 W/kg; SAR (10g) = 0.041 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm  
Power Drift = -0.06 dB  
SAR (1g) = 0.120 W/kg; SAR (10g) = 0.042 W/kg  
Smallest distance from peaks to all points 3 dB below = 8.9 mm  
Ratio of SAR at M2 to SAR at M1 = 60.5 %  
psAPD (4.0cm<sup>2</sup>, sq) = 0.953 [W/m<sup>2</sup>]

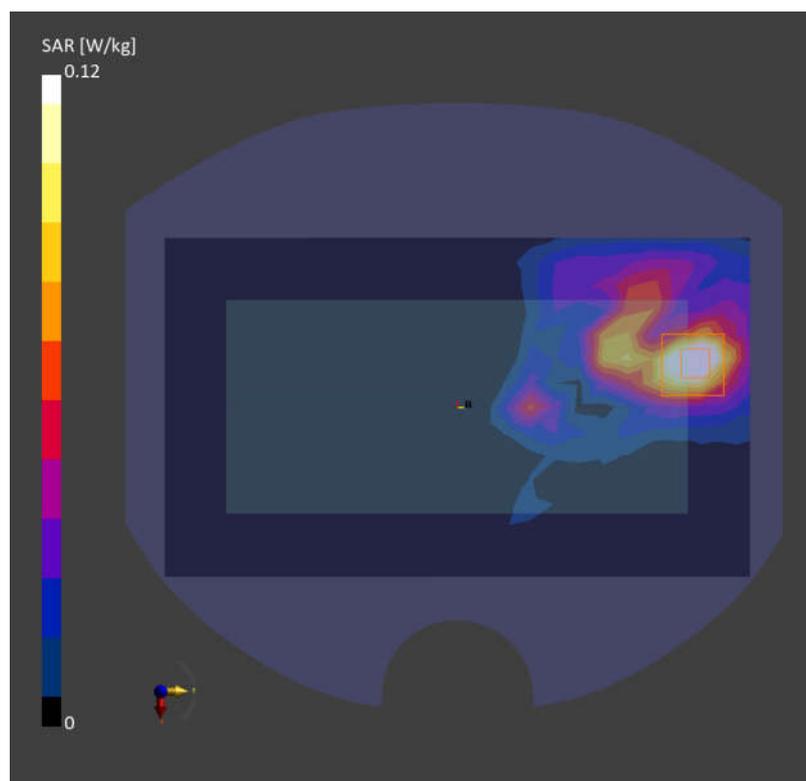

Date: 2024-11-20

**03\_WLAN6GHz\_802.11ax-HE160 MCS0\_Right Side\_0mm\_Ch111**


Communication System: IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle)  
Frequency: 6505.000MHz; Duty Cycle: 1:1  
Medium: HSL Medium parameters used:  $f= 6505.000$  MHz;  $\sigma= 6.17$  S/m;  $\epsilon_r = 34.5$   
Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7706; ConvF(5.27, 6.32, 5.24); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10743-AAC

**Area Scan (48.0 mm x 204.0 mm):** Measurement Grid: 8.5 mm x 8.5 mm  
SAR (1g) = 0.915 W/kg; SAR (10g) = 0.271 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm  
Power Drift = 0.09 dB  
SAR (1g) = 1.08 W/kg; SAR (10g) = 0.289 W/kg  
Smallest distance from peaks to all points 3 dB below = 4.4 mm  
Ratio of SAR at M2 to SAR at M1 = 54.2 %  
psAPD (4.0cm<sup>2</sup>, sq) = 6.53 [W/m<sup>2</sup>]

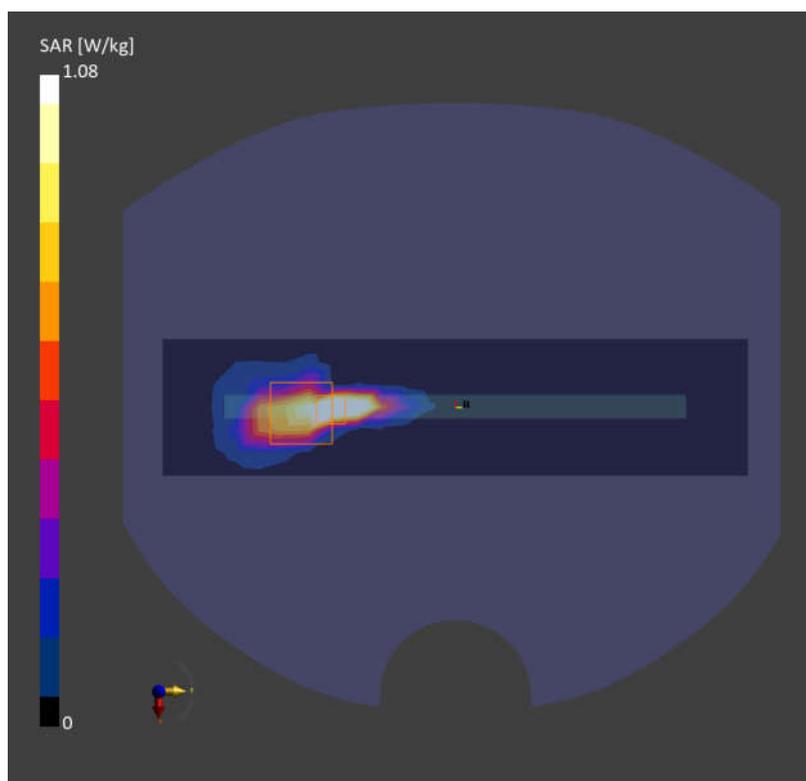

04\_WLAN6GHz\_802.11ax-HE160 MCS0\_Right Side\_2mm\_Ch15

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]
Device,	161.19 x 75.24 x 9.53

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE RIGHT, 2.00	U-NII-5	WLAN, 10755-AAC	6025.0, 15	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1065	Air -	EUmmWV4 - SN9432_F1-55GHz, 2023-12-13	DAE4 Sn1358, 2024-05-23

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2024-11-28
Avg. Area [cm <sup>2</sup> ]	4.00
psPDn+ [W/m <sup>2</sup> ]	3.10
psPDtot+ [W/m <sup>2</sup> ]	4.09
psPDmod+ [W/m <sup>2</sup> ]	5.68
E <sub>max</sub> [V/m]	62.7
Power Drift [dB]	-0.05

