



# FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.  
EQUIPMENT : Mobile Phone  
BRAND NAME : Xiaomi  
MODEL NAME : 2506BPN68G  
FCC ID : 2AFZZPN68G  
STANDARD : 47 CFR Part 96  
CLASSIFICATION : Citizens Band End User Devices (CBE)  
EQUIPMENT TYPE : End User Equipment  
TEST DATE(S) : May 07, 2025 ~ May 13, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.



Approved by: Fly Liang

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

**1 General Description ..... 5**

    1.1 Applicant..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test..... 5

    1.4 Maximum EIRP Power and Emission Designator ..... 6

    1.5 Testing Site..... 6

    1.6 Test Software ..... 6

    1.7 Applied Standards ..... 7

**2 Test Configuration of Equipment Under Test ..... 8**

    2.1 Test Mode..... 8

    2.2 Connection Diagram of Test System ..... 9

    2.3 Support Unit used in test configuration ..... 9

    2.4 Measurement Results Explanation Example ..... 9

    2.5 Frequency List of Low/Middle/High Channels..... 10

**3 Conducted Test Items..... 11**

    3.1 Measuring Instruments..... 11

    3.2 Conducted Output Power ..... 12

    3.3 EIRP ..... 13

    3.4 Occupied Bandwidth ..... 14

    3.5 Conducted Band Edge ..... 15

    3.6 Conducted Spurious Emission ..... 16

    3.7 Frequency Stability..... 17

**4 Radiated Test Items ..... 18**

    4.1 Measuring Instruments..... 18

    4.2 Test Setup ..... 18

    4.3 Test Result of Radiated Test..... 19

    4.4 Radiated Spurious Emission ..... 20

**5 List of Measuring Equipment..... 21**

**6 Measurement Uncertainty ..... 22**

**Appendix A. Test Results of Conducted Test**

**Appendix B. Test Results of Radiated Test**

**Appendix C. Test Setup Photographs**





### Summary of Test Result

| Report Clause | Ref Std. Clause   | Test Items  | Result (PASS/FAIL) | Remark                                    |
|---------------|-------------------|---|--------------------|---|
| 3.2           | §2.1046           | Conducted Output Power  | Reporting only     | -   |
| -             | §96.41            | Peak-to-Average Ratio   | Not Applicable     | Not applicable for End User Devices       |
| 3.3           | §96.41            | Maximum E.I.R.P   | Pass               | -   |
|               |                   | Maximum Power Spectral Density                                    | Not Applicable     | Not applicable for End User Devices       |
| 3.4           | §2.1049<br>§96.41 | Occupied Bandwidth  | Reporting only     | -   |
| 3.5           | §2.1051<br>§96.41 | Conducted Band Edge Measurement<br>Adjacent Channel Leakage Ratio | Pass               | -   |
| 3.6           | §2.1051<br>§96.41 | Conducted Spurious Emission                                       | Pass               |   |
| 3.7           | §2.1055           | Frequency Stability for<br>Temperature & Voltage                  | Pass               | -   |
| 4.4           | §2.1051<br>§96.41 | Radiated Spurious Emission  | Pass               | Under limit<br>9.90 dB at<br>14424.00 MHz |

| Conformity Assessment Condition:  |
|---|
| 1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. |
| 2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"  |
| Disclaimer:   |
| The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.   |

# 1 General Description

## 1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

## 1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

## 1.3 Feature of Equipment Under Test

| Product Feature    |  |
|--------------------|--|
| Equipment          | Mobile Phone   |
| Brand Name         | Xiaomi   |
| Model Name         | 2506BPN68G   |
| FCC ID             | 2AFZZPN68G   |
| Tx Frequency       | 5G NR n48: 3550 MHz ~ 3700 MHz   |
| Rx Frequency       | 5G NR n48: 3550 MHz ~ 3700 MHz   |
| SCS                | 30kHz  |
| Bandwidth          | 10MHz / 15MHz / 20MHz / 40MHz  |
| Antenna Gain       | <Ant. 6><br>5G NR n48: -1.9 dBi<br><Ant. 7><br>5G NR n48: -2.6 dBi<br><Ant. 8><br>5G NR n48: -2.8 dBi<br><Ant. 9><br>5G NR n48: -2.0 dBi |
| Type of Modulation | DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM)<br>CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)  |
| IMEI Code          | Conducted : 864724070062526/864724070062534<br>Radiation : 864724070060165/864724070060173   |
| HW Version         | 1351P2404  |
| SW Version         | Xiaomi HyperOS 2.0   |
| EUT Stage          | Identical Prototype  |

### Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The maximum EIRP is calculated from max output power and antenna gain, only the maximum EIRP of Ant. 6 is shown in the report.
3. 5G NR n48 supports SA mode only.



### 1.4 Maximum EIRP Power and Emission Designator

| 5G NR n48 |                       | PI/2 BPSK / QPSK |                              | 16QAM/64QAM/256QAM |                              |
|-----------|-----------------------|------------------|------------------------------|--------------------|------------------------------|
| BW (MHz)  | Frequency Range (MHz) | Maximum EIRP(W)  | Emission Designator (99%OBW) | Maximum EIRP(W)    | Emission Designator (99%OBW) |
| 10        | 3555.00~3694.98       | 0.1432           | 8M57G7D                      | 0.1125             | 8M57W7D                      |
| 15        | 3557.52~3692.49       | 0.1462           | 13M5G7D                      | 0.1143             | 13M6W7D                      |
| 20        | 3560.01~3690.00       | 0.1432           | 18M2G7D                      | 0.1161             | 18M2W7D                      |
| 40        | 3570.00~3679.98       | 0.1514           | 37M8G7D                      | 0.1199             | 37M9W7D                      |

**Note:** All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

### 1.5 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

|                           |   |                            |                                       |
|---------------------------|---|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International Inc. (ShenZhen)   |                            |                                       |
| <b>Test Site Location</b> | 101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China<br>TEL: +86-755-86066985 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>   | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | TH01-SZ<br>03CH02-SZ  | CN1256                     | 421272                                |

### 1.6 Test Software

| Item | Site      | Manufacture | Name | Version      |
|------|-----------|-------------|------|--------------|
| 1.   | 03CH02-SZ | AUDIX       | E3   | 6.2009-8-24a |



## **1.7 Applied Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

| Test Items                     | Band  | Bandwidth (MHz) |    |    |    |    |    | Modulation |      |       |       |         | RB # |      | Test Channel |   |   |   |
|--------------------------------|---|-----------------|----|----|----|----|----|------------|------|-------|-------|---------|------|------|--------------|---|---|---|
|                                |   | 5               | 10 | 15 | 20 | 30 | 40 | PI/2 BPSK  | QPSK | 16QAM | 64QAM | 256 QAM | 1    | Full | L            | M | H |   |
| Max. Output Power              | n48   | -               | v  | v  | v  | -  | v  | v          | v    | v     | v     | v       | v    | v    | v            | v | v | v |
| 26dB and 99% Bandwidth         | n48   | -               | v  | v  | v  | -  | v  |            | v    | v     | v     | v       |      | v    |              |   | v |   |
| Adjacent Channel Leakage Ratio | n48   | -               | v  |    | v  | -  | v  | v          | v    |       |       |         | v    | v    | v            | v | v |   |
| Conducted Band Edge            | n48   | -               | v  |    | v  | -  | v  | v          | v    |       |       |         | v    | v    | v            | v | v |   |
| Conducted Spurious Emission    | n48   | -               | v  |    | v  | -  | v  | v          | v    |       |       |         | v    |      |              | v | v | v |
| E.R.P / E.I.R.P                | n48   | -               | v  | v  | v  | -  | v  | v          | v    | v     | v     | v       | v    | v    | v            | v | v | v |
| Frequency Stability            | n48   | -               |    |    | v  | -  |    |            | v    |       |       |         |      | v    |              |   | v |   |
| Radiated Spurious Emission     | n48   | Worst Case      |    |    |    |    |    |            |      |       |       |         |      |      |              |   | v |   |
| Remark                         | <ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>All test items are based on engineering evaluation.</li> <li>Frequency Stability: Normal Voltage = 3.93V ; Low Voltage =3.70V; High Voltage =4.30V</li> </ol> |                 |    |    |    |    |    |            |      |       |       |         |      |      |              |   |   |   |

## 2.2 Connection Diagram of Test System

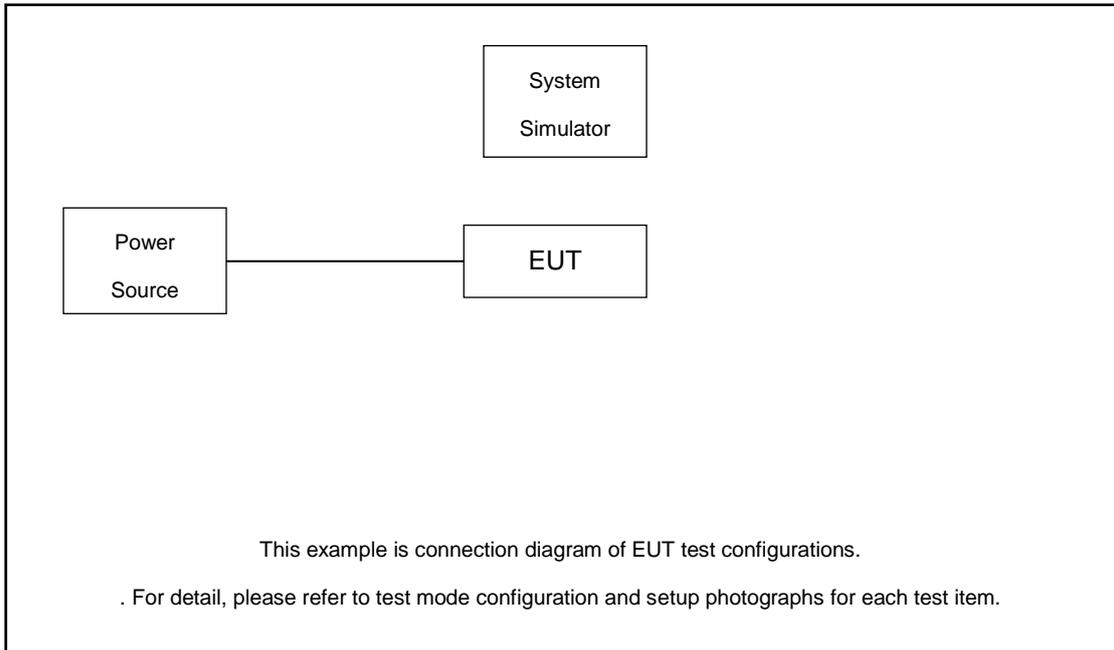

## 2.3 Support Unit used in test configuration

| Item | Equipment        | Trade Name | Model No. | FCC ID | Data Cable | Power Cord        |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1.   | Power Supply     | GWINSTEK   | PSS-2002  | N/A    | N/A        | Unshielded, 1.8 m |
| 2.   | LTE Base Station | Anritsu    | MT8821C   | N/A    | N/A        | Unshielded, 1.8 m |

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

$Offset = RF\ cable\ loss.$

Following shows an offset computation example with cable loss 8.9 dB.

Example :

$Offset(dB) = RF\ cable\ loss(dB).$   
 $= 8.9\ (dB)$



## 2.5 Frequency List of Low/Middle/High Channels

| 5G NR n48 Channel and Frequency List |                        |         |         |         |
|--------------------------------------|------------------------|---------|---------|---------|
| BW [MHz]                             | Channel/Frequency(MHz) | Lowest  | Middle  | Highest |
| 40                                   | Channel                | 638000  | 641666  | 645332  |
|                                      | Frequency              | 3570    | 3624.99 | 3679.98 |
| 20                                   | Channel                | 637334  | 641666  | 646000  |
|                                      | Frequency              | 3560.01 | 3624.99 | 3690    |
| 15                                   | Channel                | 637168  | 641666  | 646166  |
|                                      | Frequency              | 3557.52 | 3624.99 | 3692.49 |
| 10                                   | Channel                | 637000  | 641666  | 646332  |
|                                      | Frequency              | 3555    | 3624.99 | 3694.98 |


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


##### 3.1.2 Conducted Output Power / ACLR

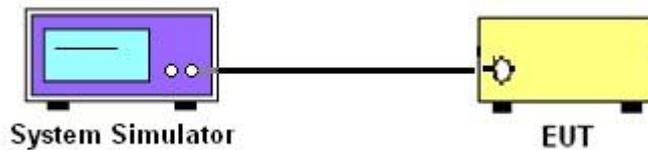

##### 3.1.3 Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

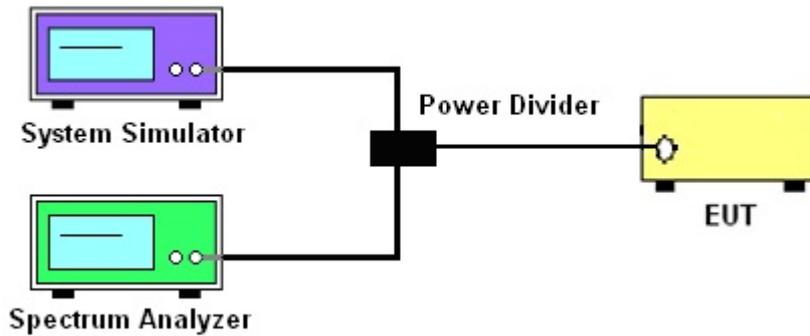

##### 3.1.4 Frequency Stability

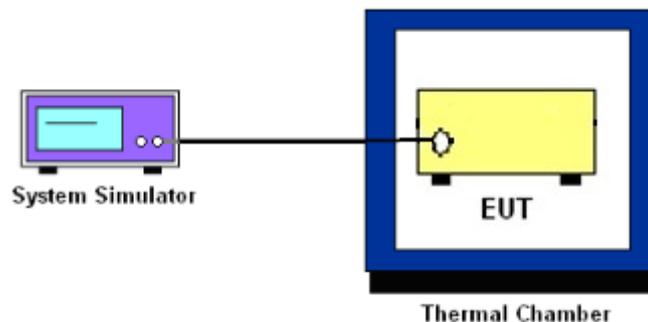

##### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



## **3.2 Conducted Output Power**

### **3.2.1 Description of the Conducted Output Power Measurement**

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.2.2 Test Procedures**

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

### 3.3 EIRP

#### 3.3.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

| Device                   |                 | Maximum EIRP<br>(dBm/10 MHz) | Maximum PSD<br>(dBm/MHz) |
|--------------------------|-----------------|------------------------------|--------------------------|
| Applied                  | End User Device | 23                           | n/a                      |
| <input type="checkbox"/> | Category A CBSD | 30                           | 20                       |
| <input type="checkbox"/> | Category B CBSD | 47                           | 37                       |

**Remark:**

1. The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

#### 3.3.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)
  - EIRP =  $P_T + G_T - L_C$ , ERP = EIRP -2.15, where
  - $P_T$  = transmitter output power in dBm
  - $G_T$  = gain of the transmitting antenna in dBi
  - $L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB



### 3.4 Occupied Bandwidth

#### 3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

## 3.5 Conducted Band Edge

### 3.5.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel  $\leq -13$  dBm/MHz

Greater than B MHz above and below the assigned channel  $\leq -25$  dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed  $-25$  dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed  $-40$ dBm/MHz

### 3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW  $\geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for LTE Band 48. Duty factor  $=10 \log (1/x)$ , where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



## 3.6 Conducted Spurious Emission

### 3.6.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

### 3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.



## 3.7 Frequency Stability

### 3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### 3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

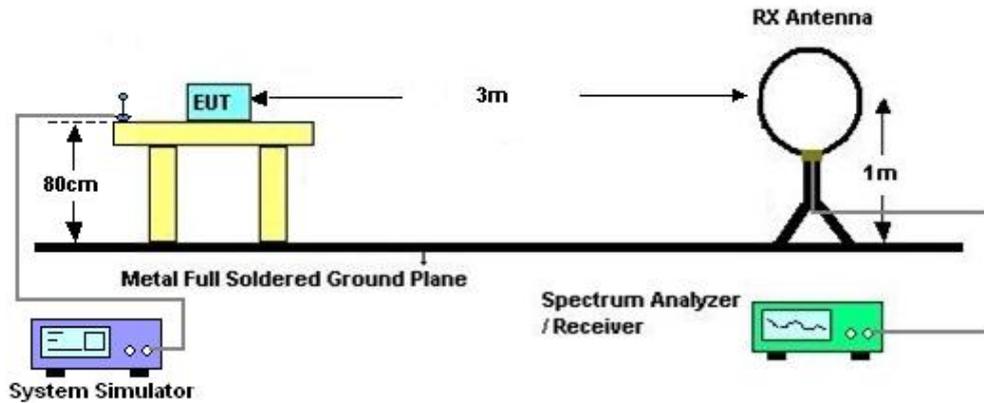

#### 4.2.2 For radiated test from 30MHz to 1GHz

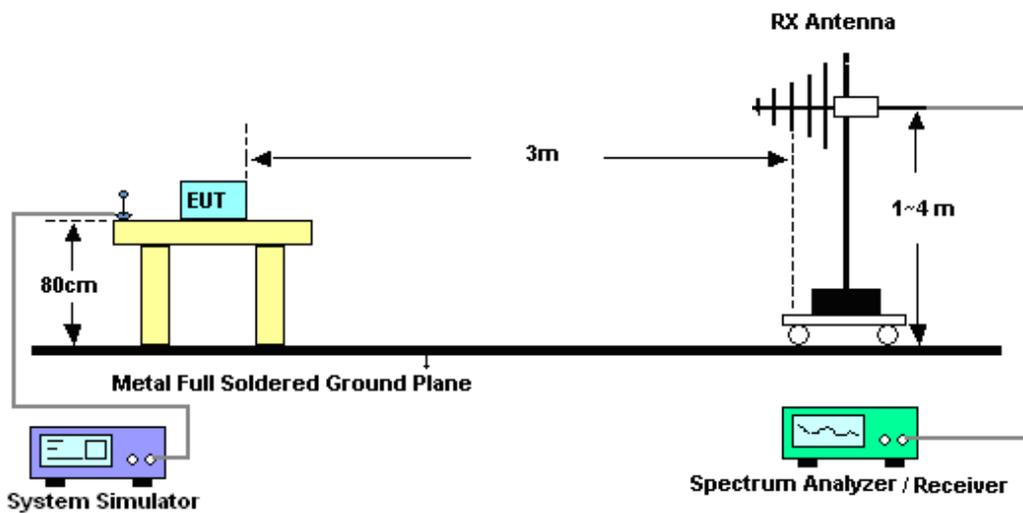

### 4.2.3 For radiated test above 1GHz

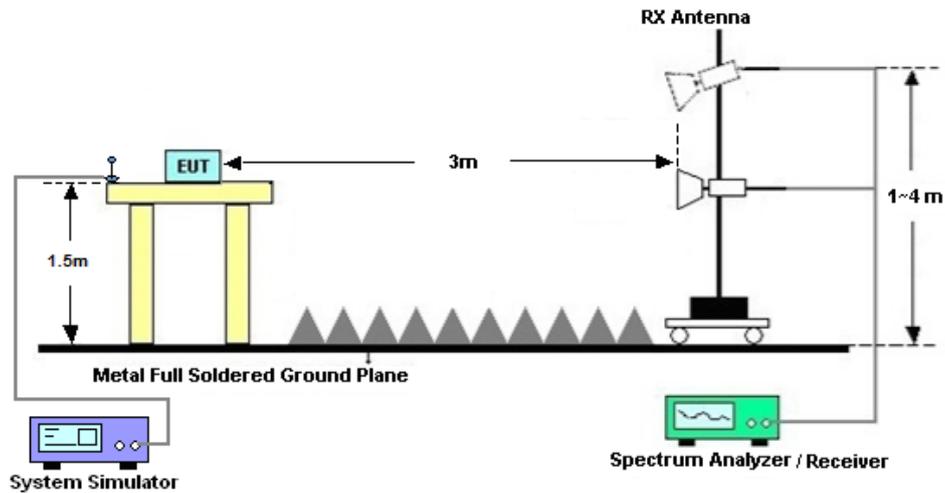

### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.  
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.  
The limit line is -40dBm/MHz



## 5 List of Measuring Equipment

| Instrument                | Manufacturer              | Model No.     | Serial No.     | Characteristics | Calibration Date | Test Date                     | Due Date      | Remark                |
|---------------------------|---------------------------|---------------|----------------|-----------------|------------------|-------------------------------|---------------|-----------------------|
| Spectrum Analyzer         | R&S                       | FSV40         | 101078         | 10Hz~40GHz      | Apr. 02, 2025    | May 07, 2025~<br>May 09, 2025 | Apr. 01, 2026 | Conducted (TH01-SZ)   |
| DC Power Supply           | TTI                       | PL330P        | 290070         | Max 32V, 3A     | Oct. 14, 2024    | May 07, 2025~<br>May 09, 2025 | Oct. 13, 2025 | Conducted (TH01-SZ)   |
| Power Divider             | TOJOIN                    | PS-2SM-04265  | 60.06.020.0077 | 0.4GHz~26.5GHz  | Dec. 24, 2024    | May 07, 2025~<br>May 09, 2025 | Dec. 23, 2025 | Conducted (TH01-SZ)   |
| Thermal Chamber           | Ten Billion Hongzhangroup | LP-150U       | H2014081803    | -40~+150°C      | Jul. 03, 2024    | May 07, 2025~<br>May 09, 2025 | Jul. 02, 2025 | Conducted (TH01-SZ)   |
| EXA Spectrum Analyzer     | KEYSIGHT                  | N9010A        | MY55150213     | 10Hz~44GHz      | Jul. 03, 2024    | May 13, 2025                  | Jul. 02, 2025 | Radiation (03CH02-SZ) |
| Loop Antenna              | R&S                       | HFH2-Z2E      | 101141         | 9kHz~30MHz      | Dec. 28, 2024    | May 13, 2025                  | Dec. 27, 2025 | Radiation (03CH02-SZ) |
| Bilog Antenna             | TeseQ                     | CBL6112D      | 35407          | 30MHz-2GHz      | Oct. 24, 2023    | May 13, 2025                  | Oct. 23, 2025 | Radiation (03CH02-SZ) |
| Double Ridge Horn Antenna | ETS-Lindgren              | 3117          | 00119436       | 1GHz~18GHz      | Jul. 04, 2024    | May 13, 2025                  | Jul. 04, 2025 | Radiation (03CH02-SZ) |
| HF Amplifier              | MITEQ                     | TTA1840-35-HG | 1871923        | 18GHz~40GHz     | Jul. 03, 2024    | May 13, 2025                  | Jul. 03, 2025 | Radiation (03CH02-SZ) |
| SHF-EHF Horn              | com-power                 | AH-840        | 101071         | 18GHz-40GHz     | Apr. 03, 2025    | May 13, 2025                  | Apr. 02, 2027 | Radiation (03CH02-SZ) |
| LF Amplifier              | EM Electronics            | EM330         | 060788         | 20MHz-3GHz      | Dec. 25, 2024    | May 13, 2025                  | Dec. 24, 2025 | Radiation (03CH02-SZ) |
| HF Amplifier              | KEYSIGHT                  | 83017A        | MY53270105     | 0.5GHz~26.5GHz  | Oct. 14, 2024    | May 13, 2025                  | Oct. 13, 2025 | Radiation (03CH02-SZ) |
| AC Power Source           | Chroma                    | 61601         | 616010003043   | N/A             | Oct. 18, 2024    | May 13, 2025                  | Oct. 17, 2025 | Radiation (03CH02-SZ) |
| Turn Table                | Chaintek                  | T-200         | N/A            | 0~360 degree    | NCR              | May 13, 2025                  | NCR           | Radiation (03CH02-SZ) |
| Antenna Mast              | Chaintek                  | MBS-400       | N/A            | 1 m~4 m         | NCR              | May 13, 2025                  | NCR           | Radiation (03CH02-SZ) |

NCR: No Calibration Required



## 6 Measurement Uncertainty

### Uncertainty of Conducted Measurement

| Test Item                              | Uncertainty |
|--|-------------|
| Conducted Spurious Emission & Bandedge | ±1.34 dB    |
| Occupied Channel Bandwidth             | ±0.012 MHz  |
| Conducted Power                        | ±1.34 dB    |
| Peak to Average Ratio                  | ±1.34 dB    |
| Frequency Stability                    | ±1.3 Hz     |

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|   |         |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.47 dB |
|---|---------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

|   |         |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.31 dB |
|---|---------|

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

|   |         |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.72 dB |
|---|---------|

----- THE END -----



## Appendix A. Test Results of Conducted Test

|                 |           |                     |         |
|-----------------|-----------|---------------------|---------|
| Test Engineer : | Khan Zhen | Temperature :       | 22~23°C |
|                 |           | Relative Humidity : | 40~42%  |



Software Version: 23.06.1602

# FR1 N48 ANT6

## Transmitter Conducted Output Power And EIRP, (G<sub>T</sub> - L<sub>C</sub>)=-1.9dB<sub>i</sub>

| NR Band | SCS | Band Width | Arfcn  | Freq (MHz) | Modulation        | RB   | Conducted Power(dBm) | EIRP(dBm) | EIRP(W) |
|---------|-----|------------|--------|------------|-------------------|------|----------------------|-----------|---------|
| 48      | 30  | 10         | 637000 | 3555       | DFT-s-OFDM QPSK   | 12@6 | 23.46                | 21.56     | 0.1432  |
| 48      | 30  | 10         | 637000 | 3555       | DFT-s-OFDM QPSK   | 1@1  | 23.26                | 21.36     | 0.1368  |
| 48      | 30  | 10         | 637000 | 3555       | DFT-s-OFDM QPSK   | 1@22 | 23.17                | 21.27     | 0.1340  |
| 48      | 30  | 10         | 637000 | 3555       | DFT-s-OFDM 16 QAM | 12@6 | 22.32                | 20.42     | 0.1102  |
| 48      | 30  | 10         | 637000 | 3555       | DFT-s-OFDM 16 QAM | 1@1  | 22.33                | 20.43     | 0.1104  |
| 48      | 30  | 10         | 637000 | 3555       | DFT-s-OFDM 16 QAM | 1@22 | 22.19                | 20.29     | 0.1069  |
| 48      | 30  | 10         | 641666 | 3624.99    | DFT-s-OFDM QPSK   | 12@6 | 23.31                | 21.41     | 0.1384  |
| 48      | 30  | 10         | 641666 | 3624.99    | DFT-s-OFDM QPSK   | 1@1  | 23.3                 | 21.4      | 0.1380  |
| 48      | 30  | 10         | 641666 | 3624.99    | DFT-s-OFDM QPSK   | 1@22 | 23.2                 | 21.3      | 0.1349  |
| 48      | 30  | 10         | 641666 | 3624.99    | DFT-s-OFDM 16 QAM | 12@6 | 22.3                 | 20.4      | 0.1096  |
| 48      | 30  | 10         | 641666 | 3624.99    | DFT-s-OFDM 16 QAM | 1@1  | 22.37                | 20.47     | 0.1114  |
| 48      | 30  | 10         | 641666 | 3624.99    | DFT-s-OFDM 16 QAM | 1@22 | 22.25                | 20.35     | 0.1084  |
| 48      | 30  | 10         | 646332 | 3694.98    | DFT-s-OFDM QPSK   | 12@6 | 23.41                | 21.51     | 0.1416  |
| 48      | 30  | 10         | 646332 | 3694.98    | DFT-s-OFDM QPSK   | 1@1  | 23.3                 | 21.4      | 0.1380  |
| 48      | 30  | 10         | 646332 | 3694.98    | DFT-s-OFDM QPSK   | 1@22 | 23.42                | 21.52     | 0.1419  |
| 48      | 30  | 10         | 646332 | 3694.98    | DFT-s-OFDM 16 QAM | 12@6 | 22.41                | 20.51     | 0.1125  |
| 48      | 30  | 10         | 646332 | 3694.98    | DFT-s-OFDM 16 QAM | 1@1  | 22.27                | 20.37     | 0.1089  |
| 48      | 30  | 10         | 646332 | 3694.98    | DFT-s-OFDM 16 QAM | 1@22 | 22.4                 | 20.5      | 0.1122  |
| 48      | 30  | 15         | 637168 | 3557.52    | DFT-s-OFDM QPSK   | 18@9 | 23.3                 | 21.4      | 0.1380  |
| 48      | 30  | 15         | 637168 | 3557.52    | DFT-s-OFDM QPSK   | 1@1  | 23.2                 | 21.3      | 0.1349  |
| 48      | 30  | 15         | 637168 | 3557.52    | DFT-s-OFDM QPSK   | 1@36 | 23.09                | 21.19     | 0.1315  |
| 48      | 30  | 15         | 637168 | 3557.52    | DFT-s-OFDM 16 QAM | 18@9 | 22.36                | 20.46     | 0.1112  |
| 48      | 30  | 15         | 637168 | 3557.52    | DFT-s-OFDM 16 QAM | 1@1  | 22.3                 | 20.4      | 0.1096  |
| 48      | 30  | 15         | 637168 | 3557.52    | DFT-s-OFDM 16 QAM | 1@36 | 22.17                | 20.27     | 0.1064  |
| 48      | 30  | 15         | 641666 | 3624.99    | DFT-s-OFDM QPSK   | 18@9 | 23.31                | 21.41     | 0.1384  |



|    |    |    |        |         |                      |       |       |       |        |
|----|----|----|--------|---------|----------------------|-------|-------|-------|--------|
| 48 | 30 | 15 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 1@1   | 23.47 | 21.57 | 0.1435 |
| 48 | 30 | 15 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 1@36  | 23.29 | 21.39 | 0.1377 |
| 48 | 30 | 15 | 641666 | 3624.99 | DFT-s-OFDM 16 QAM    | 18@9  | 22.43 | 20.53 | 0.1130 |
| 48 | 30 | 15 | 641666 | 3624.99 | DFT-s-OFDM 16 QAM    | 1@1   | 22.42 | 20.52 | 0.1127 |
| 48 | 30 | 15 | 641666 | 3624.99 | DFT-s-OFDM 16 QAM    | 1@36  | 22.24 | 20.34 | 0.1081 |
| 48 | 30 | 15 | 646166 | 3692.49 | DFT-s-OFDM QPSK      | 18@9  | 23.44 | 21.54 | 0.1426 |
| 48 | 30 | 15 | 646166 | 3692.49 | DFT-s-OFDM QPSK      | 1@1   | 23.18 | 21.28 | 0.1343 |
| 48 | 30 | 15 | 646166 | 3692.49 | DFT-s-OFDM QPSK      | 1@36  | 23.55 | 21.65 | 0.1462 |
| 48 | 30 | 15 | 646166 | 3692.49 | DFT-s-OFDM 16 QAM    | 18@9  | 22.48 | 20.58 | 0.1143 |
| 48 | 30 | 15 | 646166 | 3692.49 | DFT-s-OFDM 16 QAM    | 1@1   | 22.24 | 20.34 | 0.1081 |
| 48 | 30 | 15 | 646166 | 3692.49 | DFT-s-OFDM 16 QAM    | 1@36  | 22.45 | 20.55 | 0.1135 |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM QPSK      | 25@12 | 23.29 | 21.39 | 0.1377 |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM QPSK      | 1@1   | 23.24 | 21.34 | 0.1361 |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM QPSK      | 1@49  | 22.99 | 21.09 | 0.1285 |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM 16 QAM    | 25@12 | 22.35 | 20.45 | 0.1109 |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM 16 QAM    | 1@1   | 22.25 | 20.35 | 0.1084 |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM 16 QAM    | 1@49  | 22.06 | 20.16 | 0.1038 |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 25@12 | 23.42 | 21.52 | 0.1419 |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 1@1   | 23.35 | 21.45 | 0.1396 |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 1@49  | 23.18 | 21.28 | 0.1343 |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM 16 QAM    | 25@12 | 22.41 | 20.51 | 0.1125 |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM 16 QAM    | 1@1   | 22.41 | 20.51 | 0.1125 |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM 16 QAM    | 1@49  | 22.15 | 20.25 | 0.1059 |
| 48 | 30 | 20 | 646000 | 3690    | DFT-s-OFDM QPSK      | 25@12 | 23.46 | 21.56 | 0.1432 |
| 48 | 30 | 20 | 646000 | 3690    | DFT-s-OFDM QPSK      | 1@1   | 23.17 | 21.27 | 0.1340 |
| 48 | 30 | 20 | 646000 | 3690    | DFT-s-OFDM QPSK      | 1@49  | 23.4  | 21.5  | 0.1413 |
| 48 | 30 | 20 | 646000 | 3690    | DFT-s-OFDM 16 QAM    | 25@12 | 22.55 | 20.65 | 0.1161 |
| 48 | 30 | 20 | 646000 | 3690    | DFT-s-OFDM 16 QAM    | 1@1   | 22.17 | 20.27 | 0.1064 |
| 48 | 30 | 20 | 646000 | 3690    | DFT-s-OFDM 16 QAM    | 1@49  | 22.44 | 20.54 | 0.1132 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM PI/2 BPSK | 50@25 | 22.52 | 20.62 | 0.1153 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM PI/2 BPSK | 1@1   | 22.76 | 20.86 | 0.1219 |



|    |    |    |        |         |                      |       |       |       |        |
|----|----|----|--------|---------|----------------------|-------|-------|-------|--------|
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM PI/2 BPSK | 1@104 | 22.68 | 20.78 | 0.1197 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM QPSK      | 50@25 | 23.23 | 21.33 | 0.1358 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM QPSK      | 1@1   | 23.31 | 21.41 | 0.1384 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM QPSK      | 1@104 | 23.26 | 21.36 | 0.1368 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM 16 QAM    | 50@25 | 22.19 | 20.29 | 0.1069 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM 16 QAM    | 1@1   | 22.43 | 20.53 | 0.1130 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM 16 QAM    | 1@104 | 22.31 | 20.41 | 0.1099 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM 64 QAM    | 50@25 | 20.65 | 18.75 | 0.0750 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM 64 QAM    | 1@1   | 20.88 | 18.98 | 0.0791 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM 64 QAM    | 1@104 | 20.8  | 18.9  | 0.0776 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM 256 QAM   | 50@25 | 18.63 | 16.73 | 0.0471 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM 256 QAM   | 1@1   | 18.65 | 16.75 | 0.0473 |
| 48 | 30 | 40 | 638000 | 3570    | DFT-s-OFDM 256 QAM   | 1@104 | 18.6  | 16.7  | 0.0468 |
| 48 | 30 | 40 | 638000 | 3570    | CP-OFDM QPSK         | 53@26 | 21.62 | 19.72 | 0.0938 |
| 48 | 30 | 40 | 638000 | 3570    | CP-OFDM QPSK         | 1@1   | 21.86 | 19.96 | 0.0991 |
| 48 | 30 | 40 | 638000 | 3570    | CP-OFDM QPSK         | 1@104 | 21.83 | 19.93 | 0.0984 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM PI/2 BPSK | 50@25 | 22.82 | 20.92 | 0.1236 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM PI/2 BPSK | 1@1   | 23    | 21.1  | 0.1288 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM PI/2 BPSK | 1@104 | 22.77 | 20.87 | 0.1222 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 50@25 | 23.34 | 21.44 | 0.1393 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 1@1   | 23.59 | 21.69 | 0.1476 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 1@104 | 23.37 | 21.47 | 0.1403 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM 16 QAM    | 50@25 | 22.43 | 20.53 | 0.1130 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM 16 QAM    | 1@1   | 22.68 | 20.78 | 0.1197 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM 16 QAM    | 1@104 | 22.4  | 20.5  | 0.1122 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM 64 QAM    | 50@25 | 20.89 | 18.99 | 0.0793 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM 64 QAM    | 1@1   | 21.24 | 19.34 | 0.0859 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM 64 QAM    | 1@104 | 20.94 | 19.04 | 0.0802 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM 256 QAM   | 50@25 | 18.84 | 16.94 | 0.0494 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM 256 QAM   | 1@1   | 19.02 | 17.12 | 0.0515 |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM 256 QAM   | 1@104 | 18.77 | 16.87 | 0.0486 |
| 48 | 30 | 40 | 641666 | 3624.99 | CP-OFDM QPSK         | 53@26 | 21.84 | 19.94 | 0.0986 |



|    |    |    |        |         |                      |       |       |       |        |
|----|----|----|--------|---------|----------------------|-------|-------|-------|--------|
| 48 | 30 | 40 | 641666 | 3624.99 | CP-OFDM QPSK         | 1@1   | 22.01 | 20.11 | 0.1026 |
| 48 | 30 | 40 | 641666 | 3624.99 | CP-OFDM QPSK         | 1@104 | 21.89 | 19.99 | 0.0998 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM PI/2 BPSK | 50@25 | 22.76 | 20.86 | 0.1219 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM PI/2 BPSK | 1@1   | 23.11 | 21.21 | 0.1321 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM PI/2 BPSK | 1@104 | 22.84 | 20.94 | 0.1242 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM QPSK      | 50@25 | 23.32 | 21.42 | 0.1387 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM QPSK      | 1@1   | 23.7  | 21.8  | 0.1514 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM QPSK      | 1@104 | 23.41 | 21.51 | 0.1416 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM 16 QAM    | 50@25 | 22.36 | 20.46 | 0.1112 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM 16 QAM    | 1@1   | 22.69 | 20.79 | 0.1199 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM 16 QAM    | 1@104 | 22.43 | 20.53 | 0.1130 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM 64 QAM    | 50@25 | 20.8  | 18.9  | 0.0776 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM 64 QAM    | 1@1   | 21.26 | 19.36 | 0.0863 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM 64 QAM    | 1@104 | 20.89 | 18.99 | 0.0793 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM 256 QAM   | 50@25 | 18.75 | 16.85 | 0.0484 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM 256 QAM   | 1@1   | 18.96 | 17.06 | 0.0508 |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM 256 QAM   | 1@104 | 18.69 | 16.79 | 0.0478 |
| 48 | 30 | 40 | 645332 | 3679.98 | CP-OFDM QPSK         | 53@26 | 21.85 | 19.95 | 0.0989 |
| 48 | 30 | 40 | 645332 | 3679.98 | CP-OFDM QPSK         | 1@1   | 22.13 | 20.23 | 0.1054 |
| 48 | 30 | 40 | 645332 | 3679.98 | CP-OFDM QPSK         | 1@104 | 21.93 | 20.03 | 0.1007 |



### Frequency Stability

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation      | RB   | Deviation (Hz) | Verdict | Environment |
|---------|-----------|-----------------|--------|------------|-----------------|------|----------------|---------|-------------|
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 17.6           | PASS    | NV          |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 15.6           | PASS    | LV          |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 18.8           | PASS    | HV          |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 16.4           | PASS    | -30°C       |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 12.9           | PASS    | -20°C       |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 15.5           | PASS    | -10°C       |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 13.9           | PASS    | 0°C         |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 10.5           | PASS    | 10°C        |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 17.6           | PASS    | 20°C        |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 12             | PASS    | 30°C        |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 18.9           | PASS    | 40°C        |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 50@0 | 13.3           | PASS    | 50°C        |

|MAX(Δf)| = 18.9 Hz

| Frequency Stability     | Frequency (MHz) | Limit Line      | Result |
|-------------------------|-----------------|-----------------|--------|
| $f_L -  MAX(\Delta f) $ | 3550.777128     | $\geq 3550$ MHz | PASS   |
| $f_H +  MAX(\Delta f) $ | 3698.766227     | $\leq 3700$ MHz |        |



### Peak to Average Ratio

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation           | RB   | Result (dB) | Limit (dB) | Verdict |
|---------|-----------|-----------------|--------|------------|----------------------|------|-------------|------------|---------|
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM PI/2 BPSK | 50@0 | 3.97        | 13         | PASS    |
| 48      | 30        | 20              | 641666 | 3624.99    | DFT-s-OFDM QPSK      | 50@0 | 5.14        | 13         | PASS    |

N48(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH



N48(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH





### Occupied Bandwidth

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation      | RB    | OBW (MHz) | 26dB BW (MHz) |
|---------|-----------|-----------------|--------|------------|-----------------|-------|-----------|---------------|
| 48      | 30        | 10              | 641666 | 3624.99    | CP-OFDM QPSK    | 24@0  | 8.565     | 9.117         |
| 48      | 30        | 10              | 641666 | 3624.99    | CP-OFDM 16 QAM  | 24@0  | 8.5444    | 9.127         |
| 48      | 30        | 10              | 641666 | 3624.99    | CP-OFDM 64 QAM  | 24@0  | 8.5703    | 9.169         |
| 48      | 30        | 10              | 641666 | 3624.99    | CP-OFDM 256 QAM | 24@0  | 8.5633    | 9.204         |
| 48      | 30        | 15              | 641666 | 3624.99    | CP-OFDM QPSK    | 38@0  | 13.541    | 14.41         |
| 48      | 30        | 15              | 641666 | 3624.99    | CP-OFDM 16 QAM  | 38@0  | 13.579    | 14.31         |
| 48      | 30        | 15              | 641666 | 3624.99    | CP-OFDM 64 QAM  | 38@0  | 13.558    | 14.27         |
| 48      | 30        | 15              | 641666 | 3624.99    | CP-OFDM 256 QAM | 38@0  | 13.628    | 14.37         |
| 48      | 30        | 20              | 641666 | 3624.99    | CP-OFDM QPSK    | 51@0  | 18.23     | 19.12         |
| 48      | 30        | 20              | 641666 | 3624.99    | CP-OFDM 16 QAM  | 51@0  | 18.195    | 19.02         |
| 48      | 30        | 20              | 641666 | 3624.99    | CP-OFDM 64 QAM  | 51@0  | 18.236    | 19.07         |
| 48      | 30        | 20              | 641666 | 3624.99    | CP-OFDM 256 QAM | 51@0  | 18.14     | 18.93         |
| 48      | 30        | 40              | 641666 | 3624.99    | CP-OFDM QPSK    | 106@0 | 37.828    | 39.17         |
| 48      | 30        | 40              | 641666 | 3624.99    | CP-OFDM 16 QAM  | 106@0 | 37.852    | 39.14         |
| 48      | 30        | 40              | 641666 | 3624.99    | CP-OFDM 64 QAM  | 106@0 | 37.906    | 39.15         |
| 48      | 30        | 40              | 641666 | 3624.99    | CP-OFDM 256 QAM | 106@0 | 37.877    | 39.41         |



N48(10M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




N48(10M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH



N48(10M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH



N48(10M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

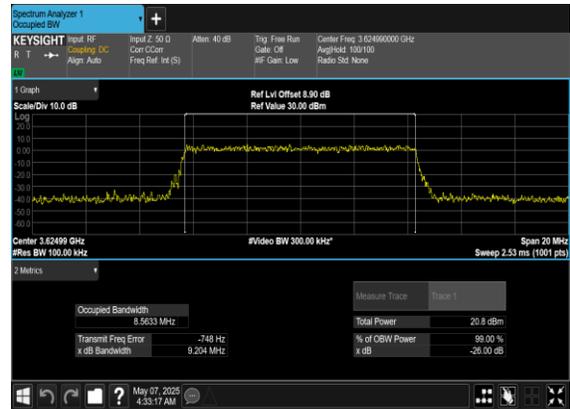





N48(15M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




N48(15M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

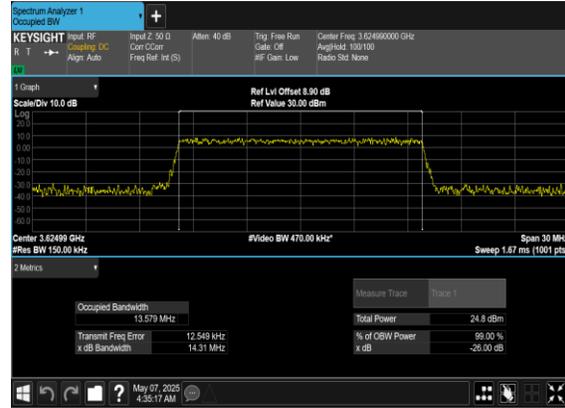

N48(15M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

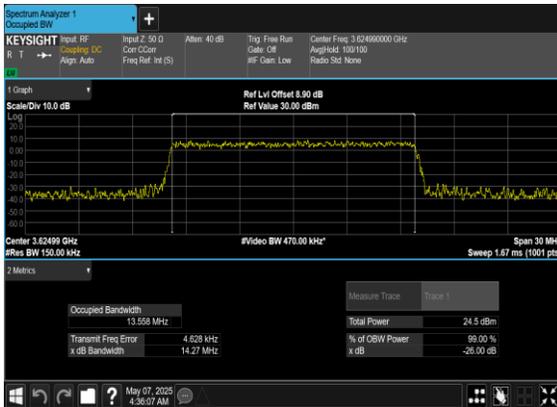


N48(15M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

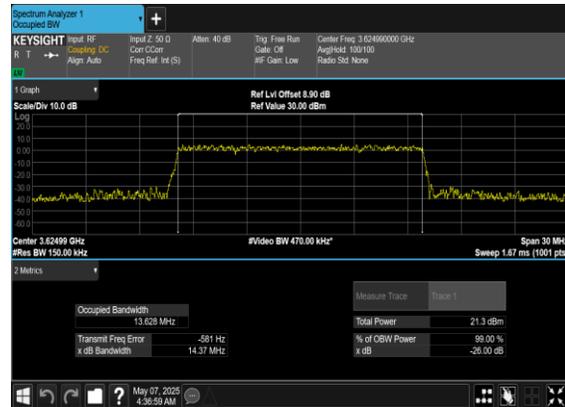




N48(20M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

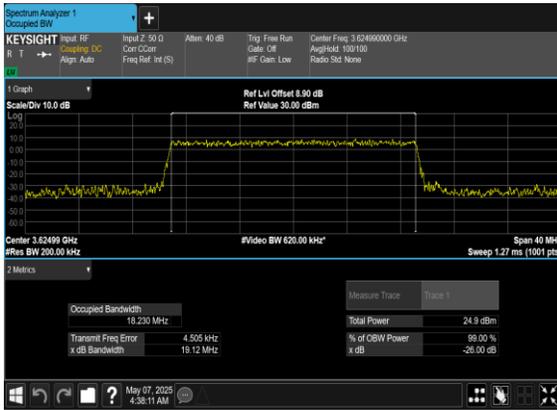


N48(20M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH



N48(20M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

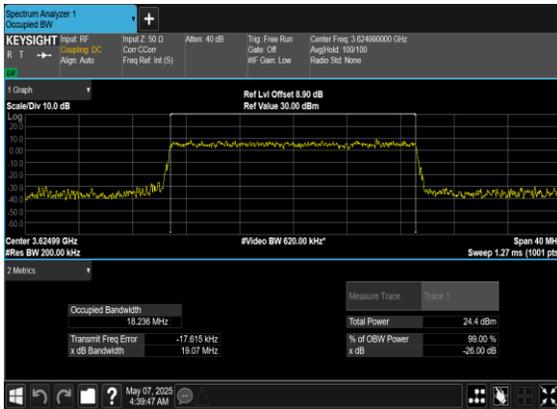


N48(20M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

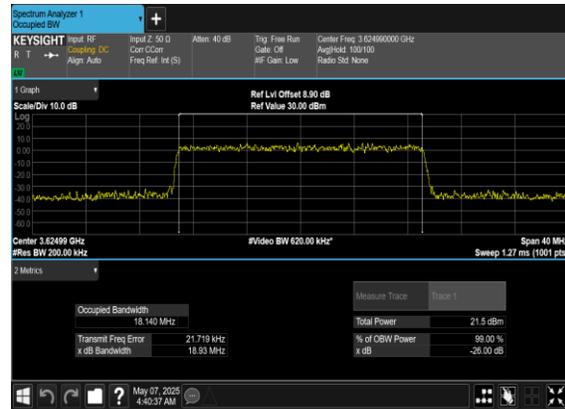





N48(40M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

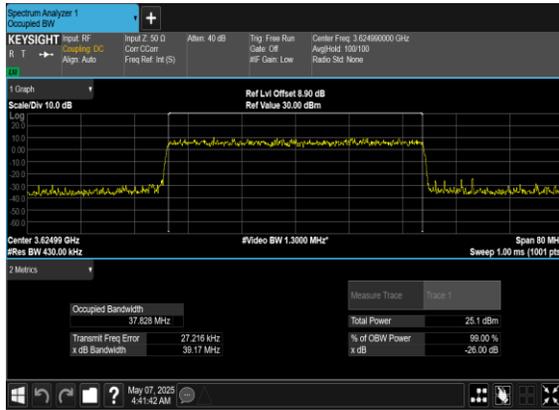


N48(40M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

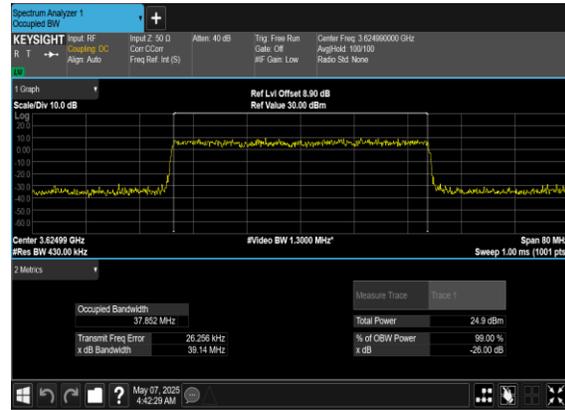

N48(40M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

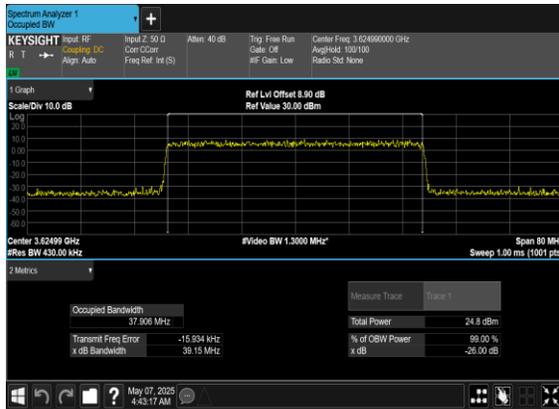

N48(40M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

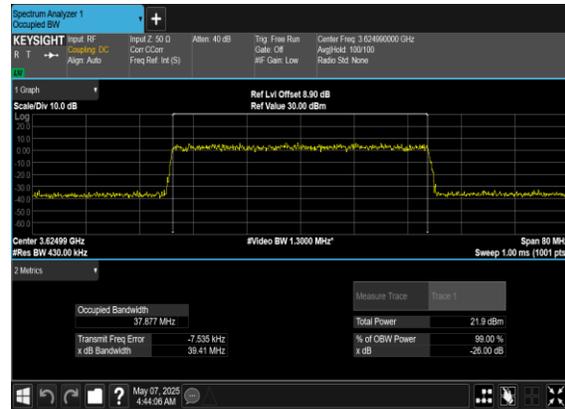



### Adjacent Channel Leakage Ratio

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation           | RB   | Lower Margin | Upper Margin | Result    | Verdict |
|---------|-----------|-----------------|--------|------------|----------------------|------|--------------|--------------|-----------|---------|
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM PI/2 BPSK | 24@0 | -16.92       | -17.4        | see graph | PASS    |
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM PI/2 BPSK | 1@0  | -19.56       | -24.16       | see graph | PASS    |
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM PI/2 BPSK | 1@23 | -24.06       | -20.55       | see graph | PASS    |
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM QPSK      | 24@0 | -17.54       | -16.77       | see graph | PASS    |
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM QPSK      | 1@0  | -19.28       | -23.99       | see graph | PASS    |
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM QPSK      | 1@23 | -24.21       | -20.85       | see graph | PASS    |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM PI/2 BPSK | 24@0 | -17.12       | -16.79       | see graph | PASS    |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM PI/2 BPSK | 1@0  | -20.33       | -23.62       | see graph | PASS    |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM PI/2 BPSK | 1@23 | -22.82       | -19.64       | see graph | PASS    |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM QPSK      | 24@0 | -17.97       | -17.14       | see graph | PASS    |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM QPSK      | 1@0  | -17.58       | -22.63       | see graph | PASS    |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM QPSK      | 1@23 | -22.77       | -19.41       | see graph | PASS    |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM PI/2 BPSK | 24@0 | -15.69       | -16.31       | see graph | PASS    |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM PI/2 BPSK | 1@0  | -19.08       | -22.15       | see graph | PASS    |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM PI/2 BPSK | 1@23 | -22.21       | -19.74       | see graph | PASS    |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM QPSK      | 24@0 | -17.4        | -16.86       | see graph | PASS    |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM QPSK      | 1@0  | -18.58       | -22.79       | see graph | PASS    |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM QPSK      | 1@23 | -23.03       | -20.32       | see graph | PASS    |
| 48      | 30        | 20              | 637334 | 3560.01    | DFT-s-OFDM PI/2 BPSK | 50@0 | -14.7        | -15.02       | see graph | PASS    |
| 48      | 30        | 20              | 637334 | 3560.01    | DFT-s-OFDM PI/2 BPSK | 1@0  | -20.23       | -21.84       | see graph | PASS    |




|    |    |    |        |         |                      |       |        |        |           |      |
|----|----|----|--------|---------|----------------------|-------|--------|--------|-----------|------|
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM PI/2 BPSK | 1@50  | -22.26 | -21.33 | see graph | PASS |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM QPSK      | 50@0  | -16.27 | -15.81 | see graph | PASS |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM QPSK      | 1@0   | -21.4  | -22.97 | see graph | PASS |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM QPSK      | 1@50  | -22.33 | -21.6  | see graph | PASS |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM PI/2 BPSK | 50@0  | -15.93 | -15.69 | see graph | PASS |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM PI/2 BPSK | 1@0   | -19.4  | -20.01 | see graph | PASS |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM PI/2 BPSK | 1@50  | -20.35 | -19.32 | see graph | PASS |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 50@0  | -16.29 | -15.68 | see graph | PASS |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 1@0   | -19.02 | -19.72 | see graph | PASS |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 1@50  | -20.77 | -19.48 | see graph | PASS |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM PI/2 BPSK | 50@0  | -13.35 | -13.16 | see graph | PASS |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM PI/2 BPSK | 1@0   | -18.17 | -18.89 | see graph | PASS |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM PI/2 BPSK | 1@50  | -19.59 | -18.73 | see graph | PASS |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM QPSK      | 50@0  | -15.5  | -15.19 | see graph | PASS |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM QPSK      | 1@0   | -19.29 | -20.3  | see graph | PASS |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM QPSK      | 1@50  | -20.62 | -19.61 | see graph | PASS |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM PI/2 BPSK | 100@0 | -16.06 | -15.31 | see graph | PASS |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM PI/2 BPSK | 1@0   | -15.43 | -17.3  | see graph | PASS |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM PI/2 BPSK | 1@105 | -18.21 | -15.96 | see graph | PASS |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM QPSK      | 100@0 | -16.02 | -15.05 | see graph | PASS |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM QPSK      | 1@0   | -15.31 | -17.77 | see graph | PASS |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM QPSK      | 1@105 | -18.72 | -16.84 | see graph | PASS |




|    |    |    |        |         |                      |       |        |        |           |      |
|----|----|----|--------|---------|----------------------|-------|--------|--------|-----------|------|
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM PI/2 BPSK | 100@0 | -14.13 | -14.13 | see graph | PASS |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM PI/2 BPSK | 1@0   | -14.08 | -16.15 | see graph | PASS |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM PI/2 BPSK | 1@105 | -15.9  | -14.2  | see graph | PASS |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 100@0 | -15.62 | -14.72 | see graph | PASS |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 1@0   | -15.63 | -17.01 | see graph | PASS |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM QPSK      | 1@105 | -17.52 | -15.06 | see graph | PASS |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM PI/2 BPSK | 100@0 | -14.65 | -15.43 | see graph | PASS |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM PI/2 BPSK | 1@0   | -15.87 | -17.28 | see graph | PASS |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM PI/2 BPSK | 1@105 | -17.98 | -15.83 | see graph | PASS |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM QPSK      | 100@0 | -15.92 | -15.0  | see graph | PASS |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM QPSK      | 1@0   | -16.26 | -17.92 | see graph | PASS |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM QPSK      | 1@105 | -18.4  | -15.95 | see graph | PASS |



N48(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Low\_CH

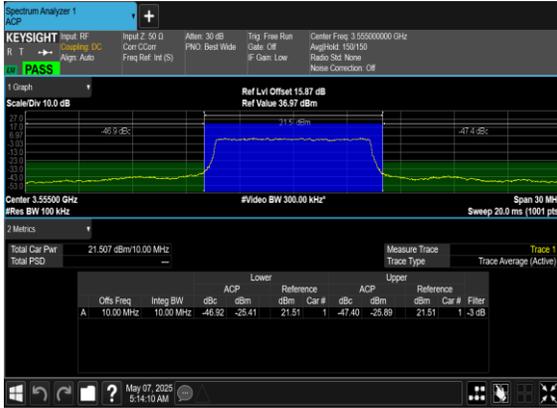

N48(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Low\_CH

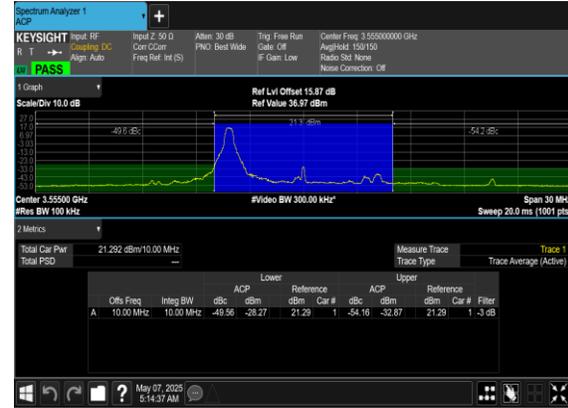

N48(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Right\_Low\_CH




N48(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH






N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

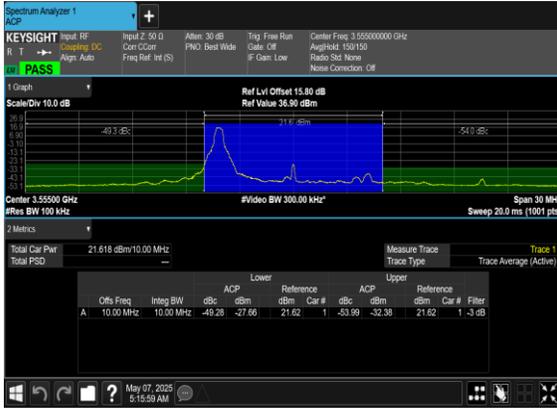


N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Low\_CH

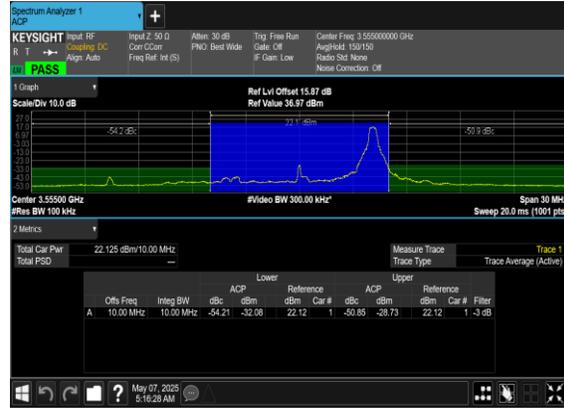

N48(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH




N48(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH

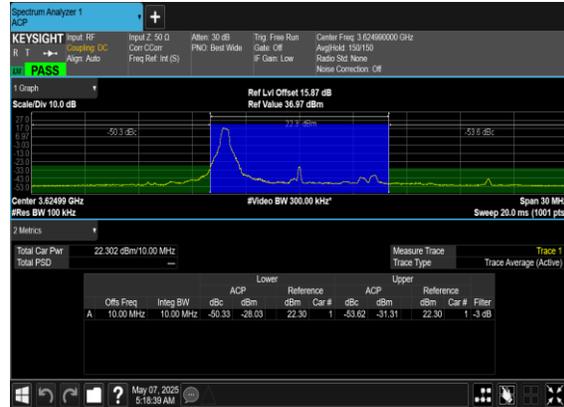





N48(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Right\_Mid\_CH

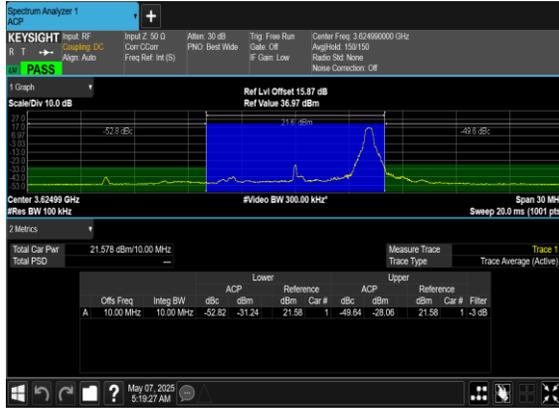


N48(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

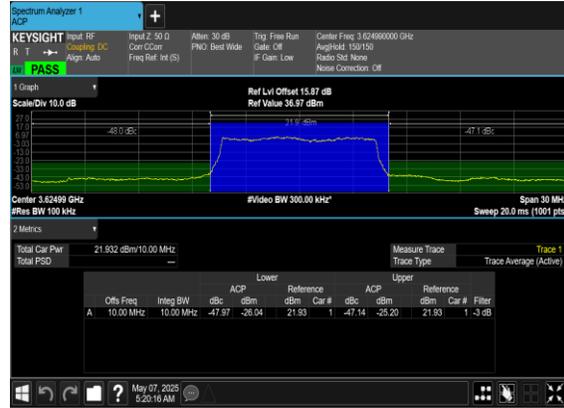

N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

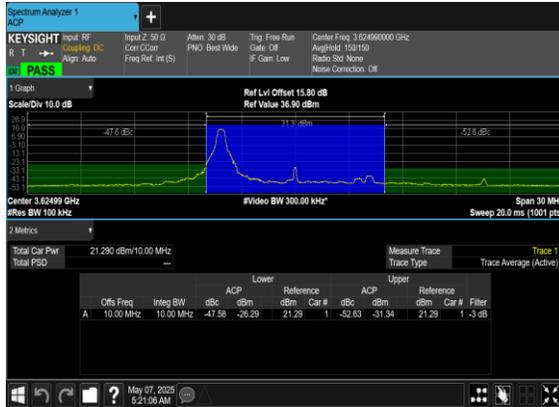


N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Mid\_CH

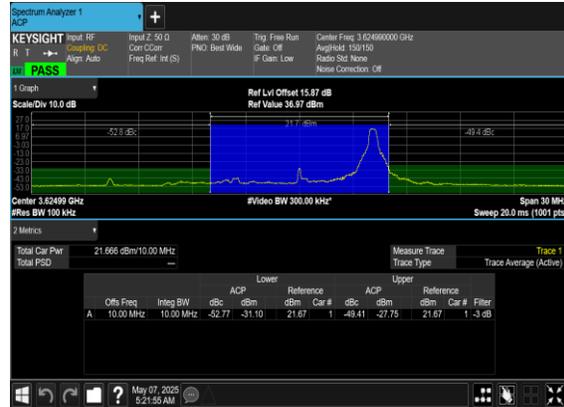





N48(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_High\_CH

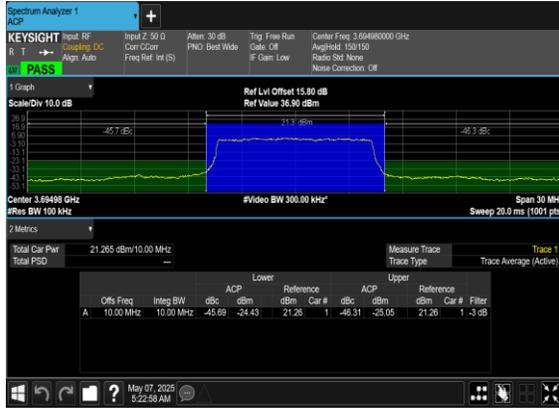


N48(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_High\_CH

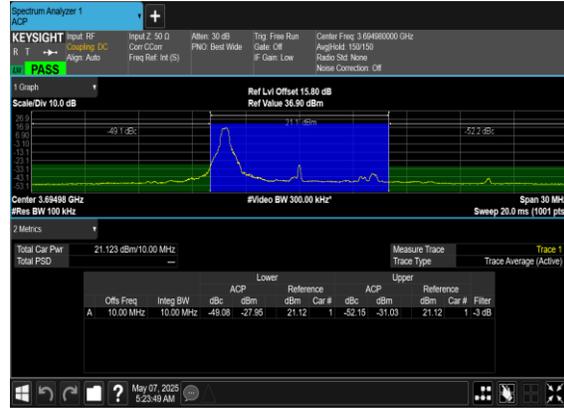

N48(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Right\_High\_CH

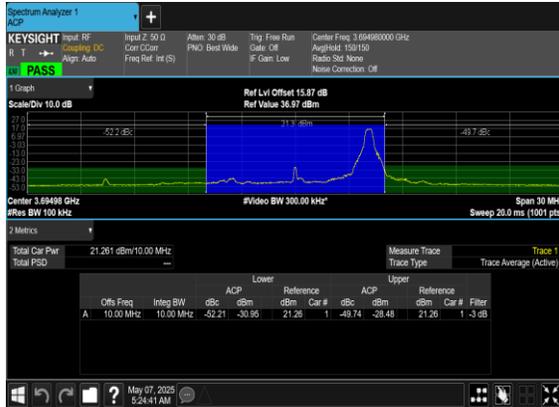

N48(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

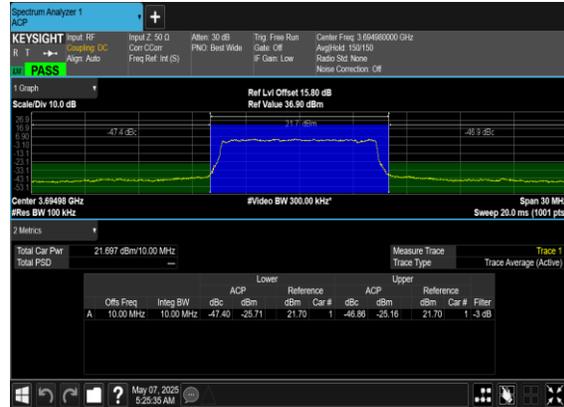





N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH




N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

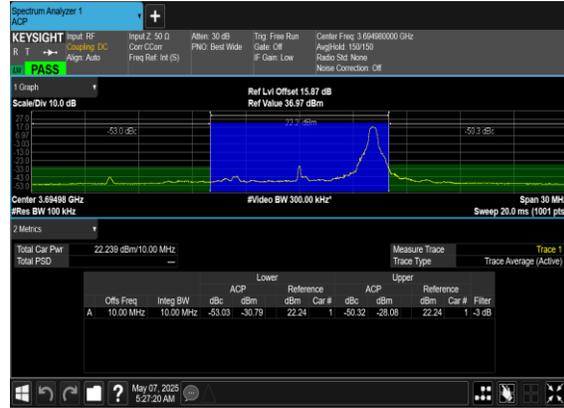

N48(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Low\_CH

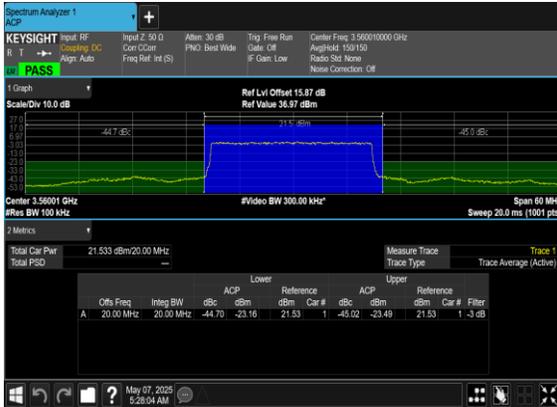


N48(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Low\_CH

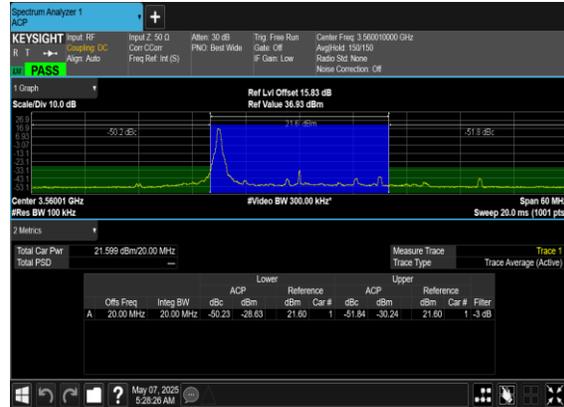





N48(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Right\_Low\_CH

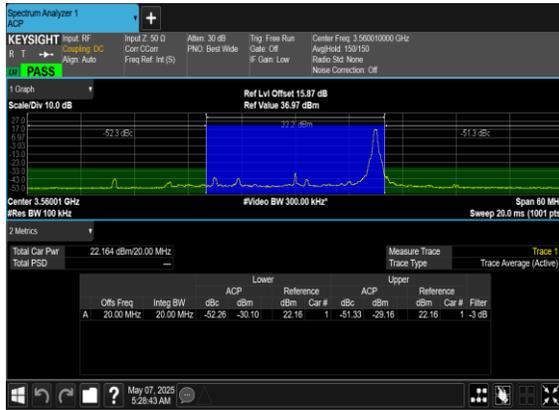

N48(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

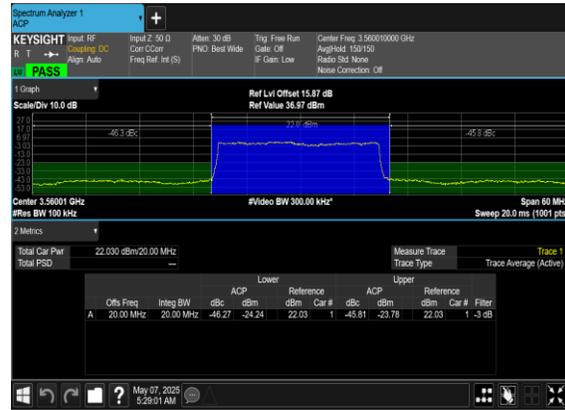

N48(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

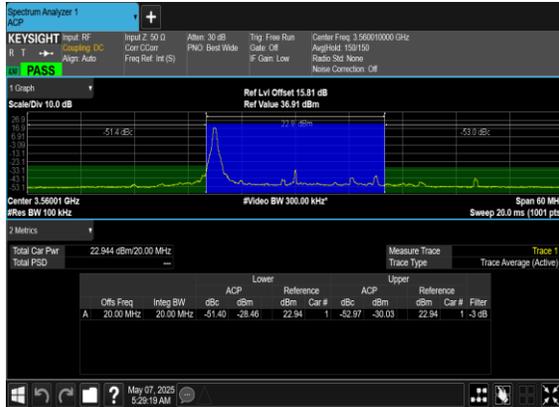


N48(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Low\_CH







N48(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

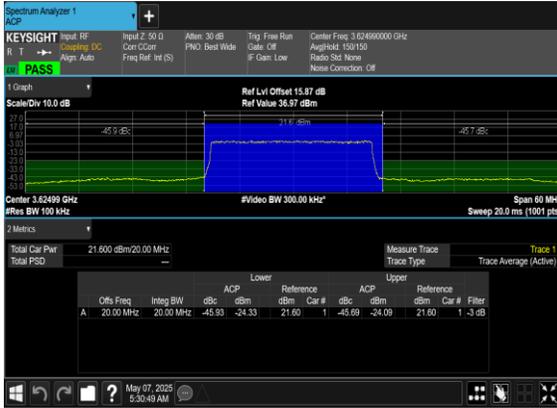


N48(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH

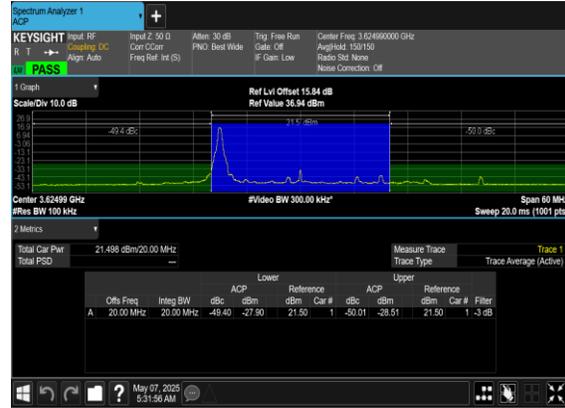

N48(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Right\_Mid\_CH

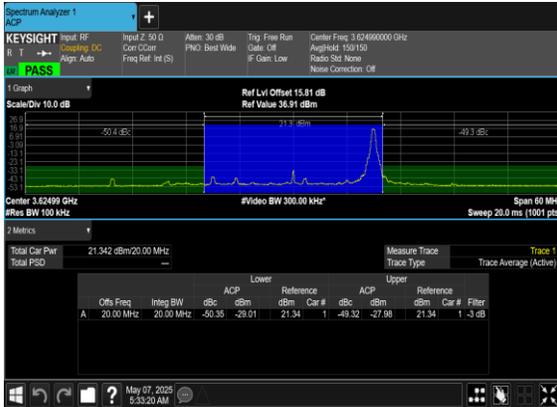


N48(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

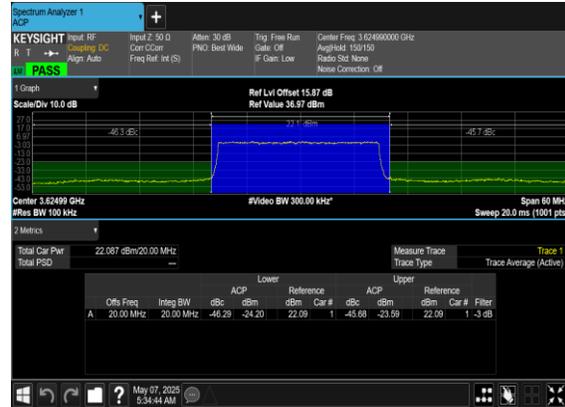



N48(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

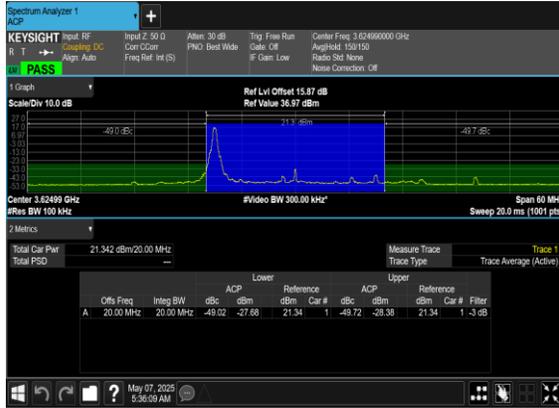


N48(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Mid\_CH



N48(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_High\_CH



N48(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_High\_CH

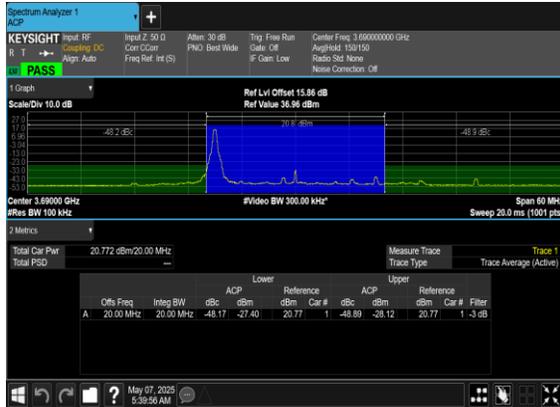





N48(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Right\_High\_CH




N48(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

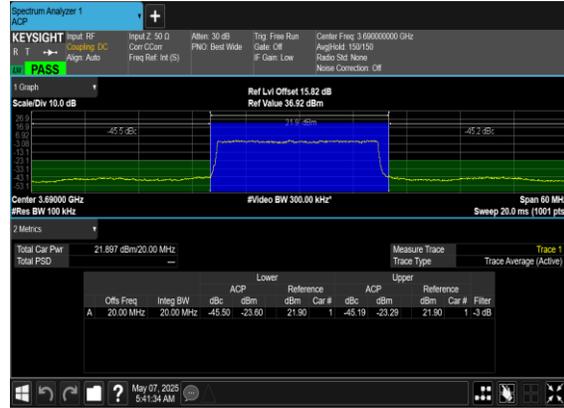

N48(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

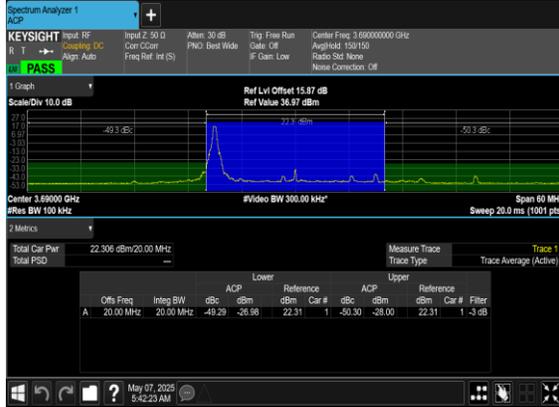


N48(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

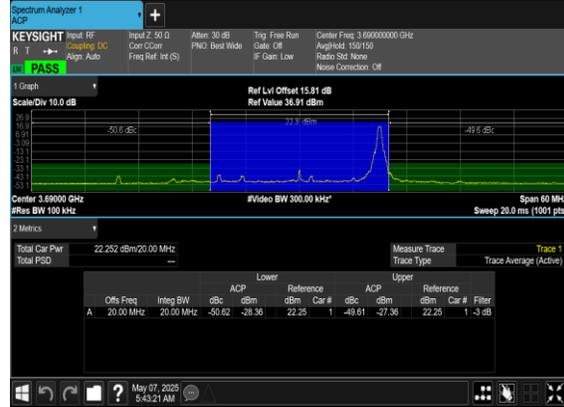



N48(40M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Low\_CH

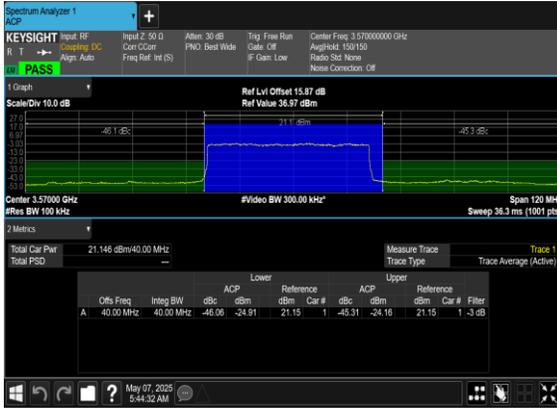


N48(40M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Low\_CH



N48(40M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Right\_Low\_CH




N48(40M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

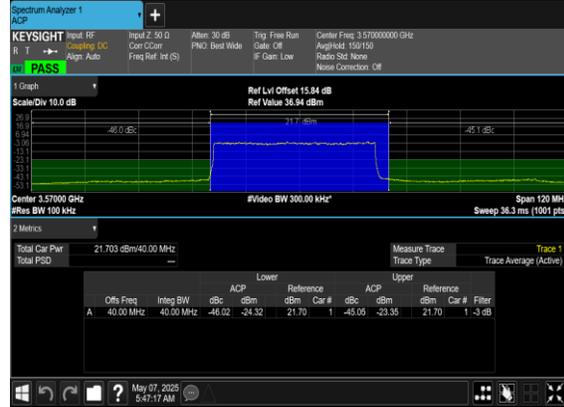



N48(40M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

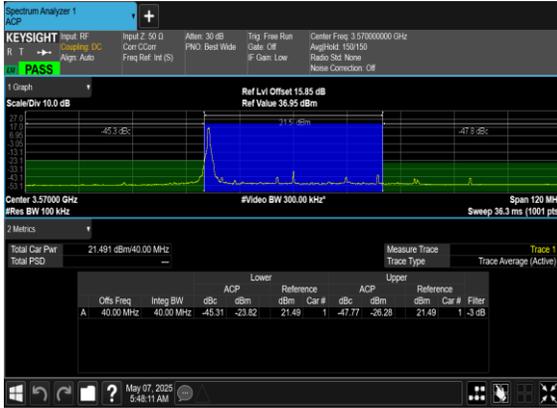


N48(40M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Low\_CH



N48(40M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH



N48(40M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH

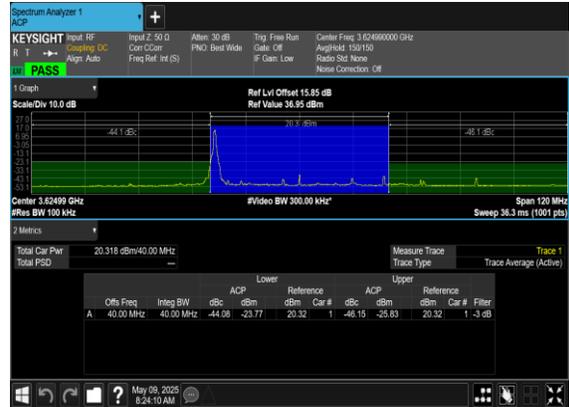




N48(40M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Right\_Mid\_CH



N48(40M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH



N48(40M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

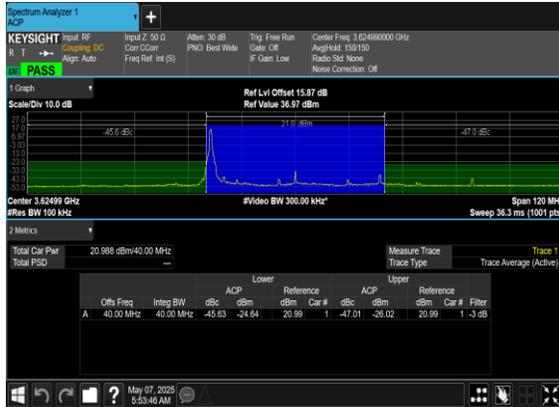


N48(40M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Mid\_CH







N48(40M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_High\_CH

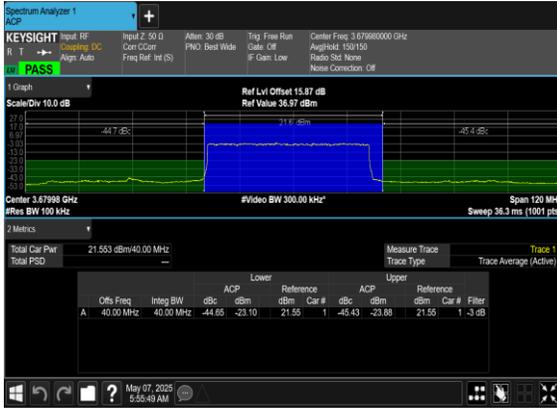


N48(40M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_High\_CH

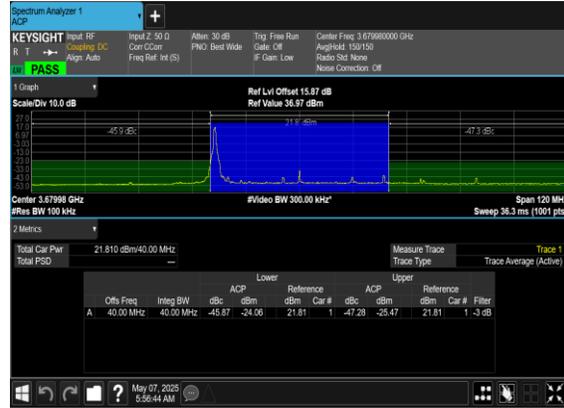

N48(40M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Right\_High\_CH

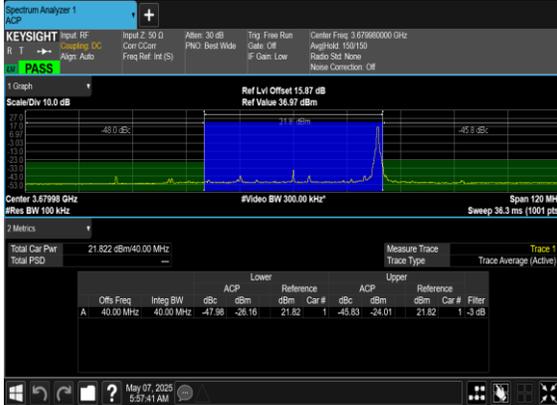


N48(40M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

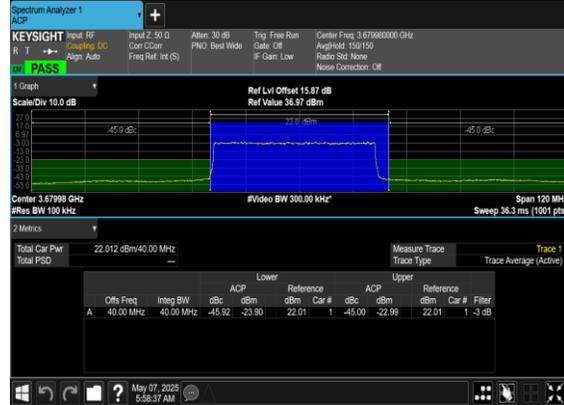



N48(40M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

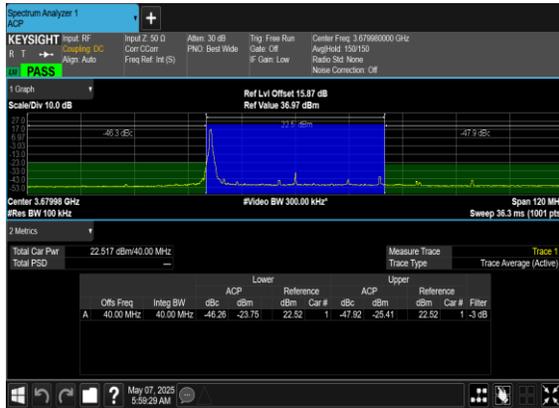

N48(40M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH





### Conducted Spurious Emissions

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation      | RB  | Result    | Verdict |
|---------|-----------|-----------------|--------|------------|-----------------|-----|-----------|---------|
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM BPSK | 1@0 | see graph | ---     |
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM BPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM BPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM QPSK | 1@0 | see graph | ---     |
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM QPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 637000 | 3555.0     | DFT-s-OFDM QPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM BPSK | 1@0 | see graph | ---     |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM BPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM BPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 1@0 | see graph | ---     |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 641666 | 3624.99    | DFT-s-OFDM QPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM BPSK | 1@0 | see graph | ---     |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM BPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM BPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM QPSK | 1@0 | see graph | ---     |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM QPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 10              | 646332 | 3694.98    | DFT-s-OFDM QPSK | 1@0 | see graph | PASS    |
| 48      | 30        | 20              | 637334 | 3560.01    | DFT-s-OFDM BPSK | 1@0 | see graph | ---     |
| 48      | 30        | 20              | 637334 | 3560.01    | DFT-s-OFDM BPSK | 1@0 | see graph | PASS    |



|    |    |    |        |         |                 |     |           |      |
|----|----|----|--------|---------|-----------------|-----|-----------|------|
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 48 | 30 | 20 | 637334 | 3560.01 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM BPSK | 1@0 | see graph | ---  |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 48 | 30 | 20 | 641666 | 3624.99 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM BPSK | 1@0 | see graph | ---  |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 48 | 30 | 20 | 646000 | 3690.0  | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM BPSK | 1@0 | see graph | ---  |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 638000 | 3570.0  | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |




|    |    |    |        |         |                 |     |           |      |
|----|----|----|--------|---------|-----------------|-----|-----------|------|
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM BPSK | 1@0 | see graph | ---  |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 641666 | 3624.99 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM BPSK | 1@0 | see graph | ---  |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 48 | 30 | 40 | 645332 | 3679.98 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |



N48(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH



N48(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

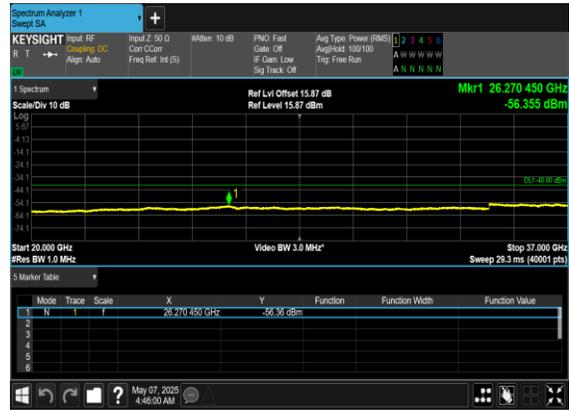

N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH



N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH





N48(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH



N48(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH



N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH



N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH






N48(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH



N48(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

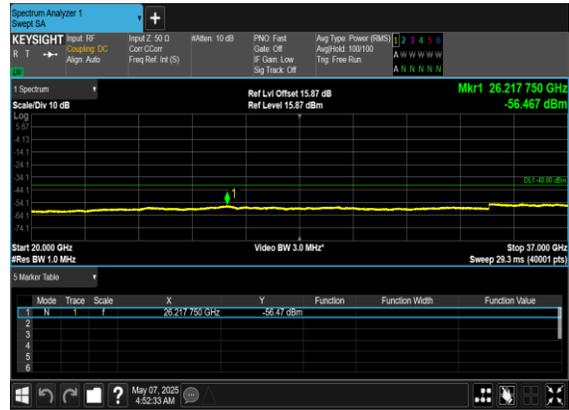

N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH



N48(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

