

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/7/23

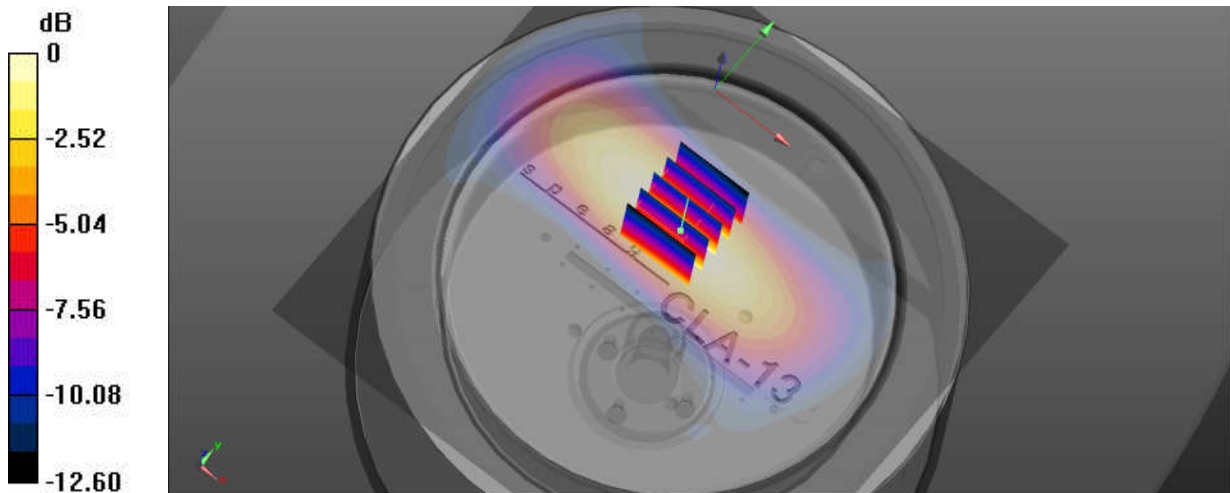
System Check_13MHz**DUT: CLA-13-SN:1023**

Communication System: UID 0, CW (0); Frequency: 13 MHz; Duty Cycle: 1:1

Medium: HSL_13 Medium parameters used: $f = 13 \text{ MHz}$; $\sigma = 0.755 \text{ S/m}$; $\epsilon_r = 54.215$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(17.87, 19.97, 18.31); Calibrated: 2024/6/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2024/3/14
- Phantom: ELI V5.0; Type: QD OVA 002 AA; Serial: TP:1233
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Pin=1000mW/Area Scan (141x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.858 W/kg **Pin=1000mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 21.64 V/m ; Power Drift = -0.12 dB Peak SAR (extrapolated) = 1.08 W/kg **SAR(1 g) = 0.591 W/kg ; SAR(10 g) = 0.358 W/kg** Smallest distance from peaks to all points 3 dB below = 14.4 mm Ratio of SAR at M2 to SAR at M1 = 53.9% Maximum value of SAR (measured) = 0.854 W/kg 0 dB = 0.854 W/kg = -0.69 dBW/kg