

Date: 2024-08-02

**System Check\_Head\_835MHz****DUT: D835V2 - SN4d091**


Communication System: CW; Frequency: 835.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 835.000$  MHz;  $\sigma = 0.911$  S/m;  $\epsilon_r = 42.7$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7706; ConvF(9.26, 10.67, 9.28); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 90.0 mm):** Measurement Grid: 10.0 mm x 15.0 mm  
SAR (1g) = 0.484 W/kg; SAR (10g) = 0.321 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 0.480 W/kg; SAR (10g) = 0.321 W/kg  
Smallest distance from peaks to all points 3 dB below = 17.2 mm  
Ratio of SAR at M2 to SAR at M1 = 88.6 %

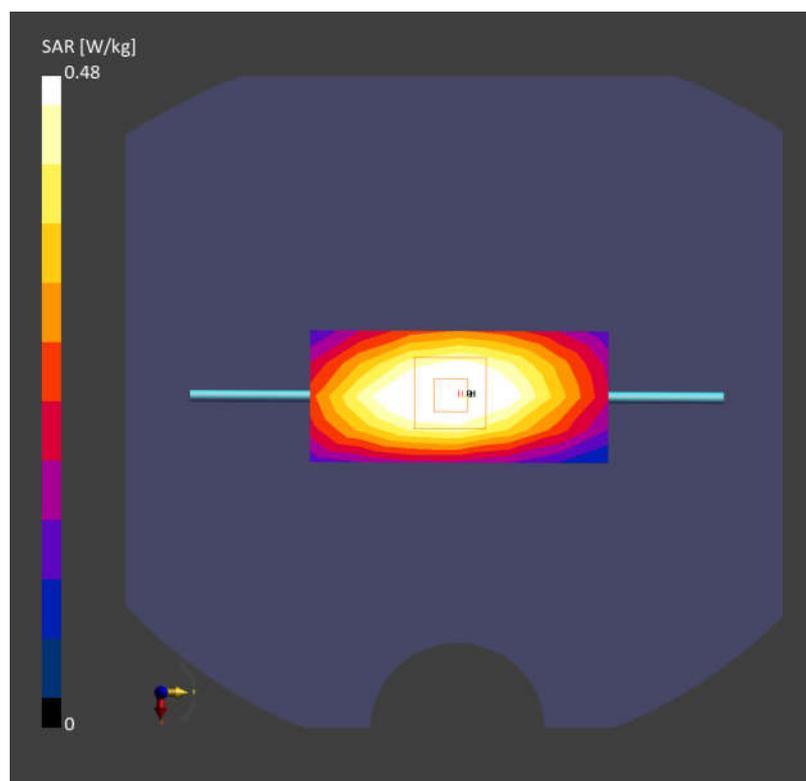

Date: 2024-08-03

**System Check\_Head\_1750MHz****DUT: D1750V2 - SN1090**


Communication System: CW; Frequency: 1750.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 1750.000$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 38.5$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7706; ConvF(7.87, 9.06, 8.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 90.0 mm):** Measurement Grid: 10.0 mm x 15.0 mm  
SAR (1g) = 1.86 W/kg; SAR (10g) = 1.01 W/kg;

**Zoom Scan (30.0 mm x 50.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = 0.02 dB  
SAR (1g) = 1.95 W/kg; SAR (10g) = 1.05 W/kg  
Smallest distance from peaks to all points 3 dB below = 10.8 mm  
Ratio of SAR at M2 to SAR at M1 = 84.6 %

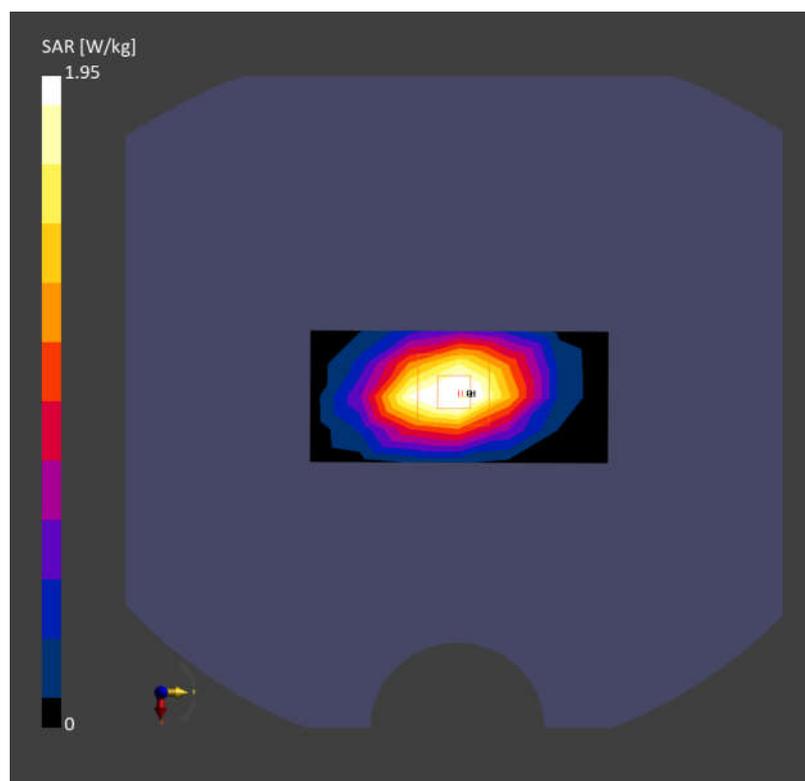

Date: 2024-08-04

**System Check\_Head\_1900MHz****DUT: D1900V2 - SN5d118**


Communication System: CW; Frequency: 1900.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 1900.000$  MHz;  $\sigma = 1.40$  S/m;  $\epsilon_r = 41.4$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

## DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.77, 8.97, 7.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 90.0 mm):** Measurement Grid: 10.0 mm x 15.0 mm  
SAR (1g) = 1.77 W/kg; SAR (10g) = 0.931 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 1.87 W/kg; SAR (10g) = 0.997 W/kg  
Smallest distance from peaks to all points 3 dB below = 9.6 mm  
Ratio of SAR at M2 to SAR at M1 = 85.7 %

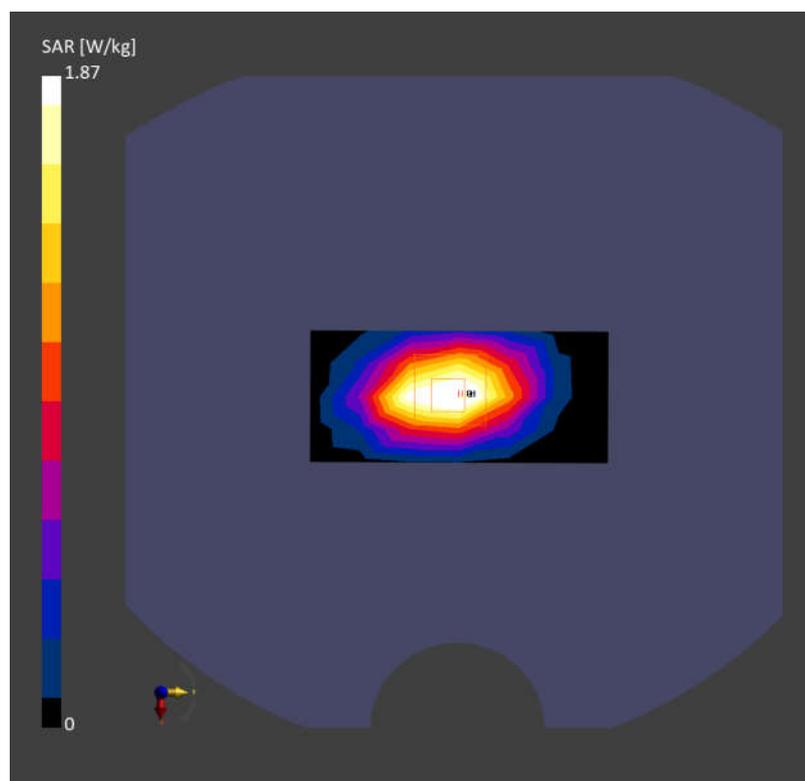

Date: 2024-08-05

**System Check\_Head\_2600MHz****DUT: D2600V2 - SN1112**


Communication System: CW; Frequency: 2600.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 2600.000$  MHz;  $\sigma = 1.93$  S/m;  $\epsilon_r = 38.3$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

## DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.3, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 2.42 W/kg; SAR (10g) = 1.15 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 2.71 W/kg; SAR (10g) = 1.25 W/kg  
Smallest distance from peaks to all points 3 dB below = 9.0 mm  
Ratio of SAR at M2 to SAR at M1 = 81.2 %

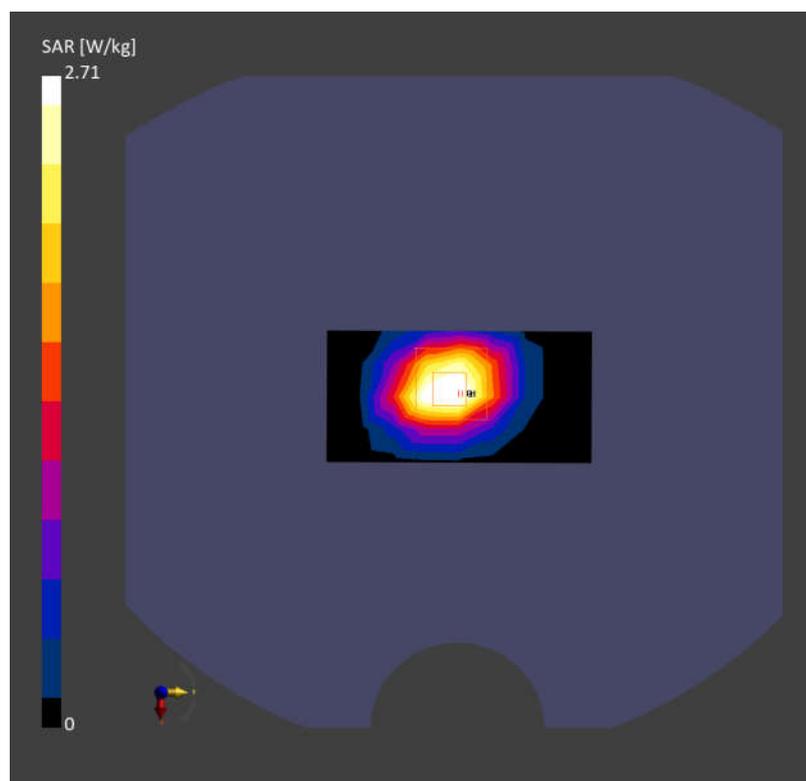

Date: 2024-08-06

**System Check\_Head\_3500MHz****DUT: D3500V2 - SN1037**


Communication System: CW; Frequency: 3500.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 3500.000$  MHz;  $\sigma = 2.85$  S/m;  $\epsilon_r = 38.6$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

## DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.99, 8.16, 7.09); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 2.91 W/kg; SAR (10g) = 1.15 W/kg;

**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.07 dB  
SAR (1g) = 3.24 W/kg; SAR (10g) = 1.27 W/kg  
Smallest distance from peaks to all points 3 dB below = 8.0 mm  
Ratio of SAR at M2 to SAR at M1 = 76.7 %

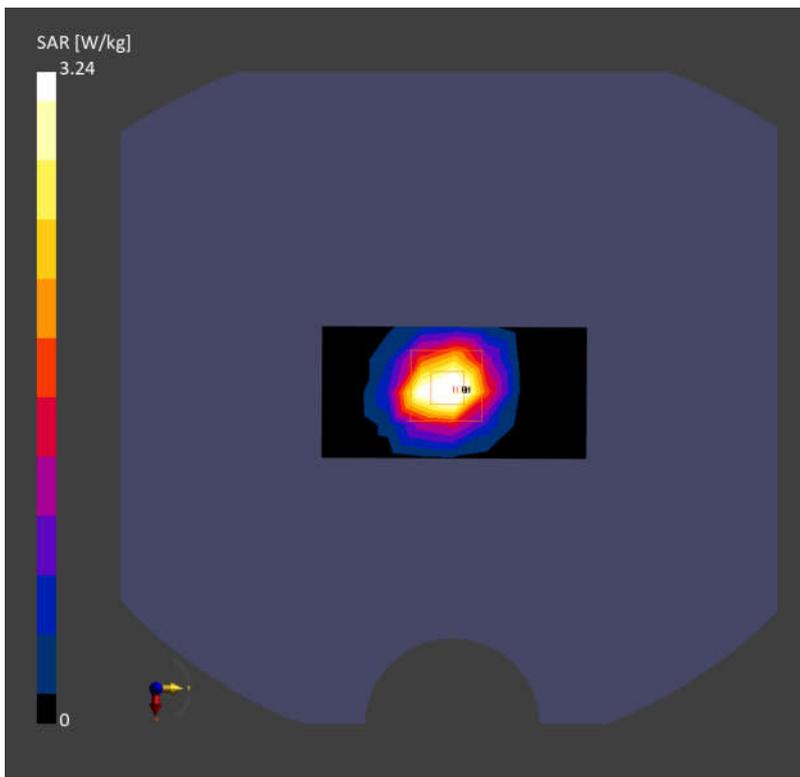

Date: 2024-08-07

**System Check\_Head\_3700MHz****DUT: D3700V2 - SN1008**


Communication System: CW; Frequency: 3700.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 3700.000$  MHz;  $\sigma = 3.08$  S/m;  $\epsilon_r = 38.0$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

## DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.89, 8.06, 7.01); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 2.79 W/kg; SAR (10g) = 1.11 W/kg;

**Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.02 dB  
SAR (1g) = 3.25 W/kg; SAR (10g) = 1.24 W/kg  
Smallest distance from peaks to all points 3 dB below = 8.3 mm  
Ratio of SAR at M2 to SAR at M1 = 75.4 %

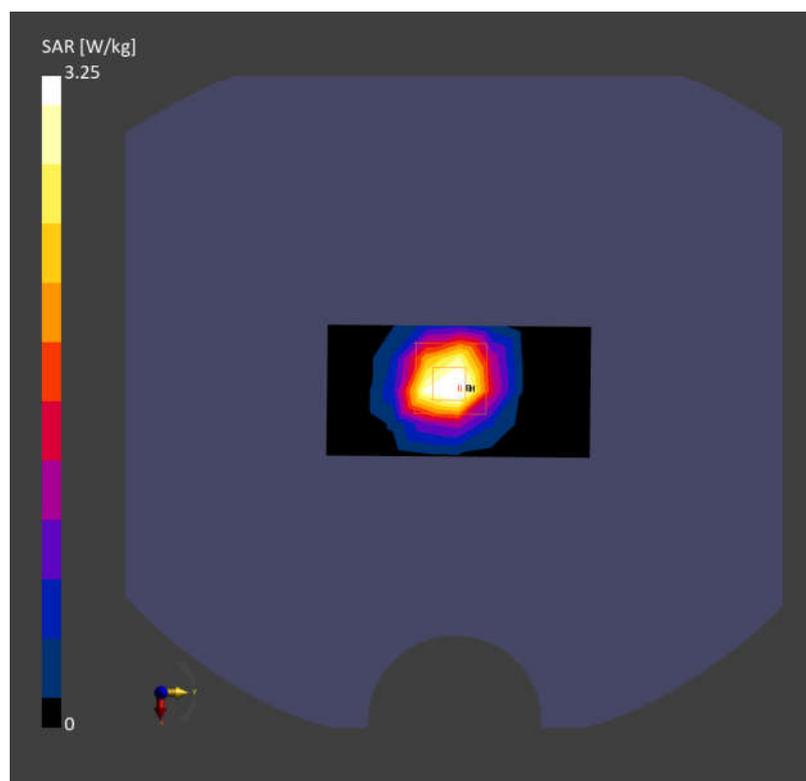

Date: 2024-08-08

**System Check\_Head\_3900MHz****DUT: D3900V2 - SN1048**


Communication System: CW; Frequency: 3900.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 3900.000$  MHz;  $\sigma = 3.28$  S/m;  $\epsilon_r = 37.6$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

## DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.83, 7.98, 6.94); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 3.25 W/kg; SAR (10g) = 1.16 W/kg;

**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.01 dB  
SAR (1g) = 3.36 W/kg; SAR (10g) = 1.22 W/kg  
Smallest distance from peaks to all points 3 dB below = 8.1 mm  
Ratio of SAR at M2 to SAR at M1 = 75.7 %

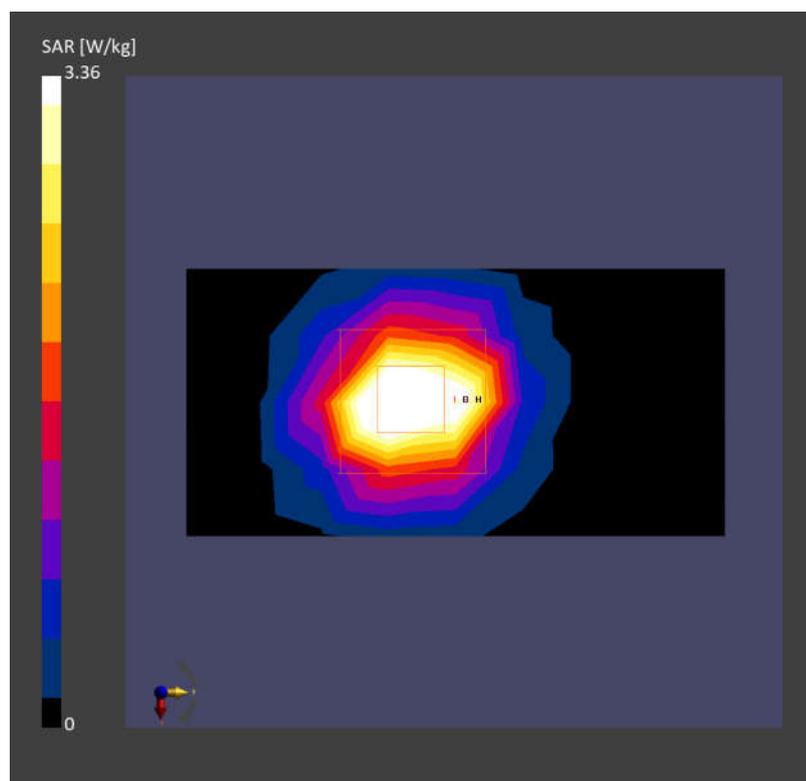

Date: 2024-08-09

**System Check\_Head\_2450MHz****DUT: D2450V2 - SN1095**


Communication System: CW; Frequency: 2450.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 2450.000$  MHz;  $\sigma = 1.83$  S/m;  $\epsilon_r = 37.5$   
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

## DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 2.57 W/kg; SAR (10g) = 1.22 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = -0.01 dB  
SAR (1g) = 2.72 W/kg; SAR (10g) = 1.30 W/kg  
Smallest distance from peaks to all points 3 dB below = 9.0 mm  
Ratio of SAR at M2 to SAR at M1 = 81.6 %

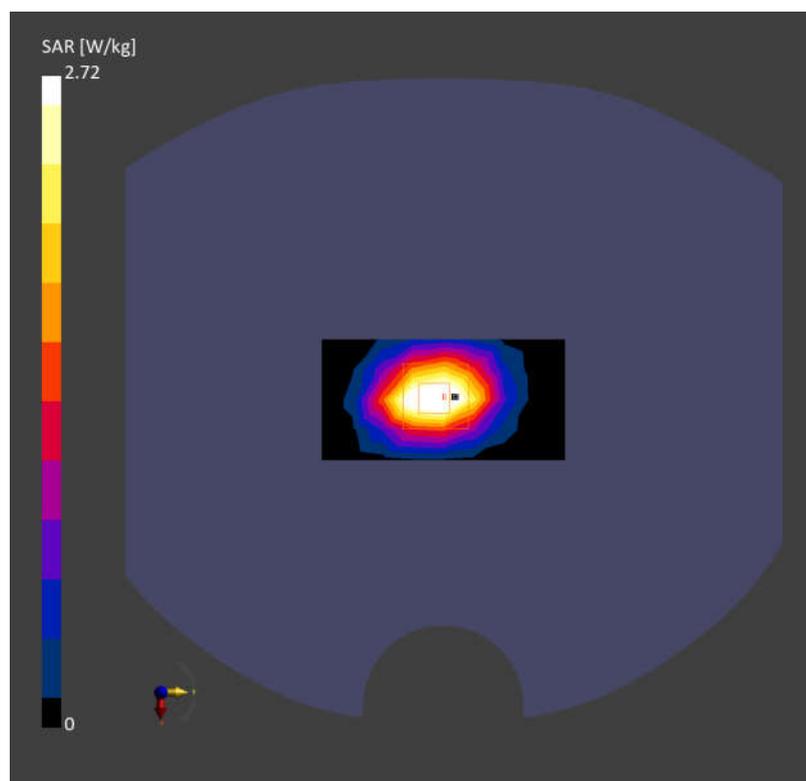

Date: 2024-08-10

**System Check\_Head\_5250MHz****DUT: D5GHzV2 - SN1113**


Communication System: CW; Frequency: 5250.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 5250.000$  MHz;  $\sigma = 4.58$  S/m;  $\epsilon_r = 35.7$   
Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

## DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 3.51 W/kg; SAR (10g) = 1.04 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.03 dB  
SAR (1g) = 3.90 W/kg; SAR (10g) = 1.11 W/kg  
Smallest distance from peaks to all points 3 dB below = 7.4 mm  
Ratio of SAR at M2 to SAR at M1 = 63.3 %

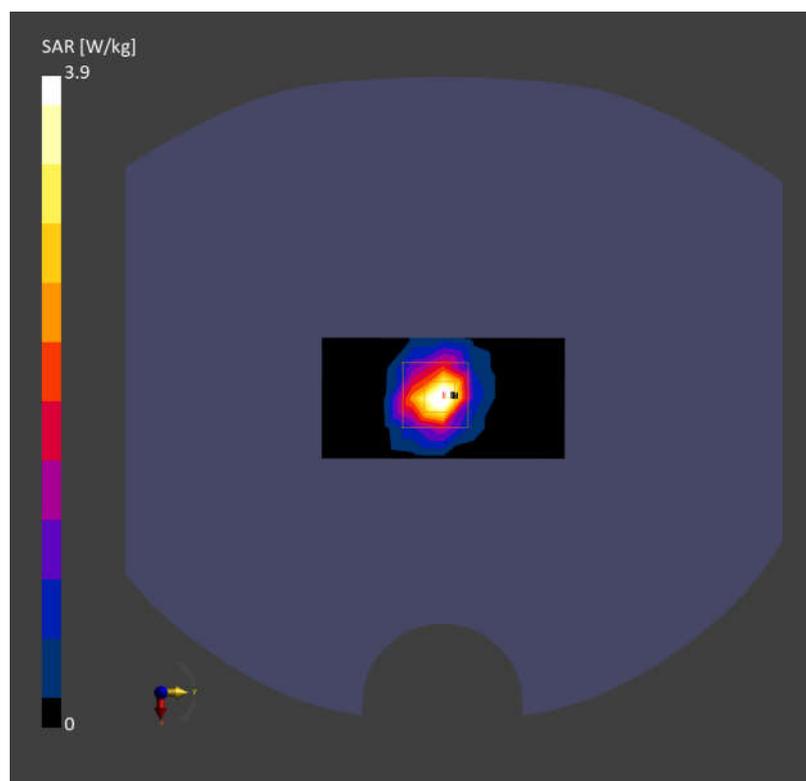

Date: 2024-08-11

**System Check\_Head\_5600MHz****DUT: D5GHzV2 - SN1113**


Communication System: CW; Frequency: 5600.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 5600.000$  MHz;  $\sigma = 4.95$  S/m;  $\epsilon_r = 35.1$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

## DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(4.83, 5.71, 4.90); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 3.84 W/kg; SAR (10g) = 1.08 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.02 dB  
SAR (1g) = 4.10 W/kg; SAR (10g) = 1.14 W/kg  
Smallest distance from peaks to all points 3 dB below = 7.2 mm  
Ratio of SAR at M2 to SAR at M1 = 60.6 %

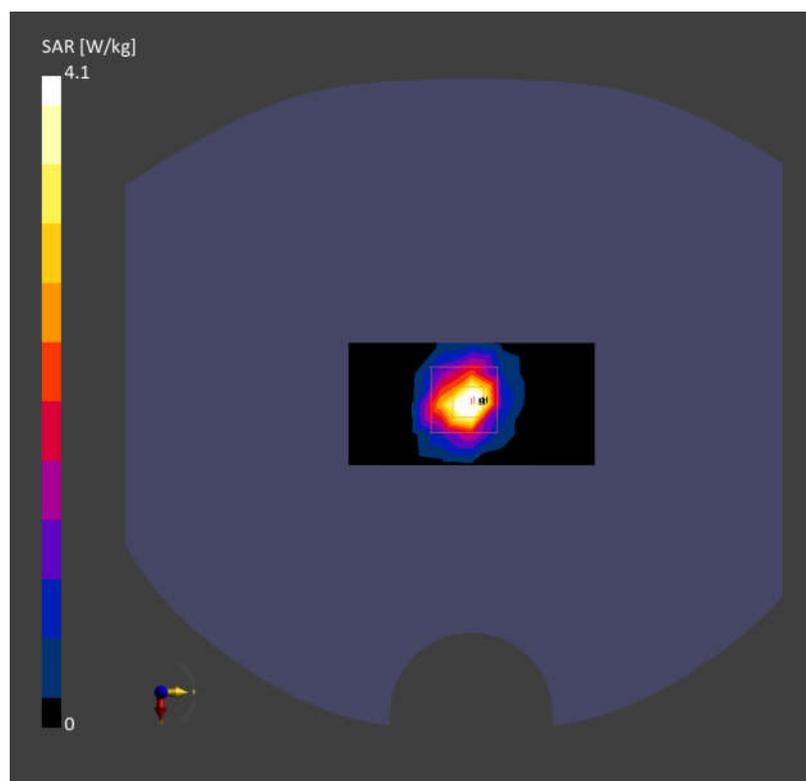

Date: 2024-08-12

**System Check\_Head\_5750MHz****DUT: D5GHzV2 - SN1113**


Communication System: CW; Frequency: 5750.000 MHz; Duty Cycle: 1:1  
Medium: HSL. Medium parameters used:  $f = 5750.000$  MHz;  $\sigma = 5.11$  S/m;  $\epsilon_r = 34.9$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

## DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 3.45 W/kg; SAR (10g) = 1.06 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.03 dB  
SAR (1g) = 3.85 W/kg; SAR (10g) = 1.10 W/kg  
Smallest distance from peaks to all points 3 dB below = 7.4 mm  
Ratio of SAR at M2 to SAR at M1 = 58.9 %

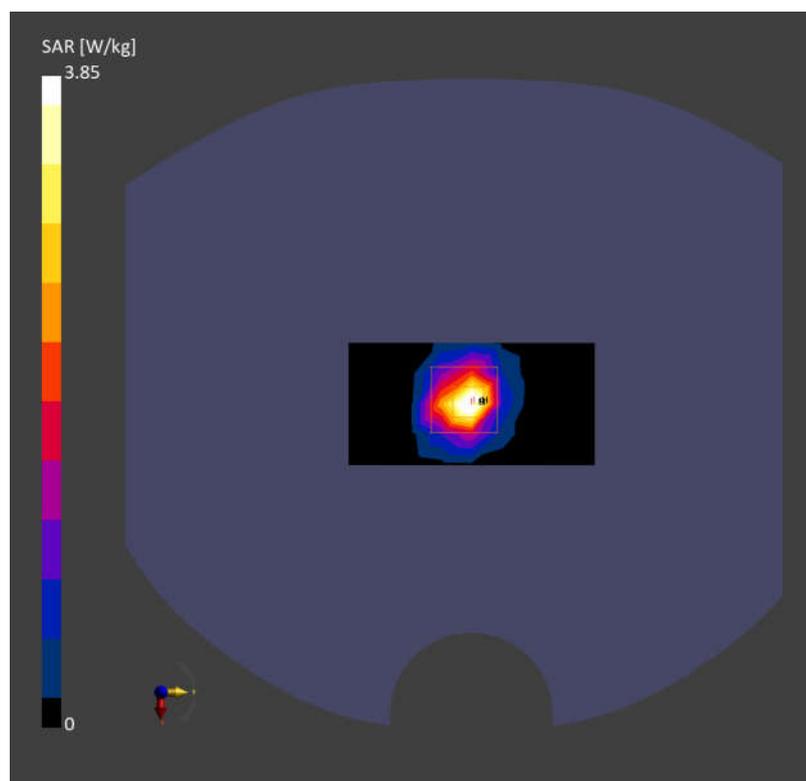

Date: 2024-08-16

**System Check\_Head\_13MHz****DUT: CLA13 - SN:1023**

Communication System: ; Frequency: 13.000

Medium: HSL. Medium parameters used:  $f= 13.000$  MHz;  $\sigma= 0.757$  S/m;  $\epsilon_r=53.7$ 

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(16.1, 16.1, 16.1); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2135
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 90.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.130 W/kg; SAR (10g) = 0.089 W/kg;

**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm;


Graded Ratio:1.4

Power Drift = 0.05 dB

SAR (1g) = 0.143 W/kg; SAR (10g) = 0.090 W/kg;

Smallest distance from peaks to all points 3dB below is 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 73.9 %

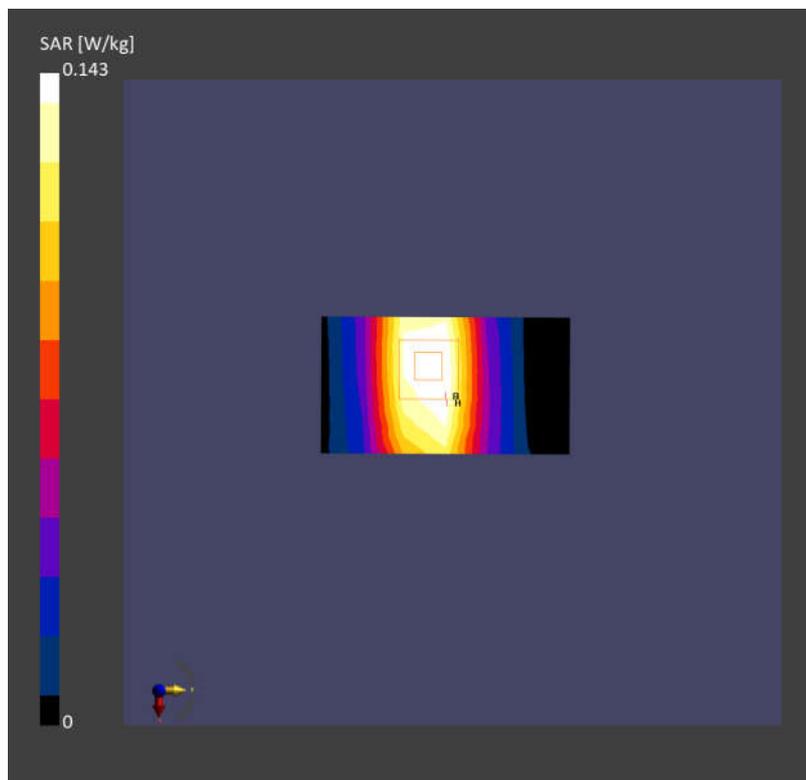

## System Check\_Head\_2600MHz

### DUT: D2600V2 - SN1112

Communication System: CW; Frequency: 2600.000 MHz; Duty Cycle: 1:1  
Medium: HSL Medium parameters used:  $f=2600.000$  MHz;  $\sigma=1.96$  S/m;  $\epsilon_r=40.4$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.30, 8.44, 7.37); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005

**Area Scan (40.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 2.88 W/kg; SAR (10g) = 1.31 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.5 mm  
Power Drift = -0.03 dB  
SAR (1g) = 2.82 W/kg; SAR (10g) = 1.29 W/kg  
Smallest distance from peaks to all points 3 dB below = 8.0 mm  
Ratio of SAR at M2 to SAR at M1 = 80.9 %

