




3DH1_Ant6_2402_0~Reference



Date: 19 JUL 2024 02:26:44


3DH1_Ant6_2402_30~1000

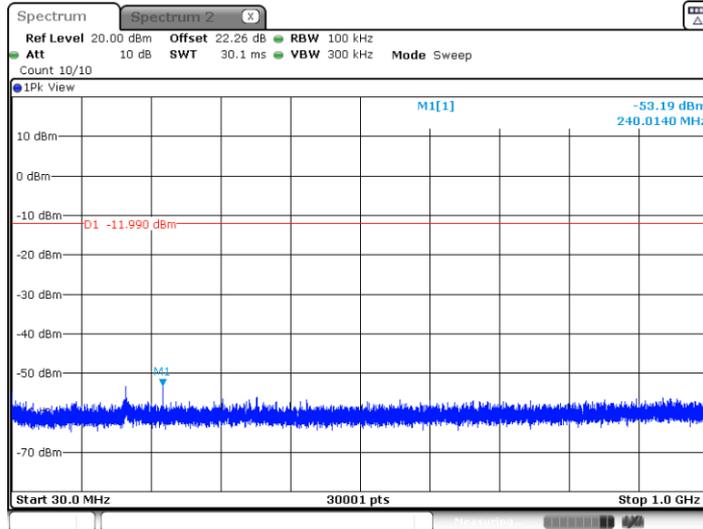

Date: 19 JUL 2024 02:26:49




3DH1_Ant6_2402_1000~26500

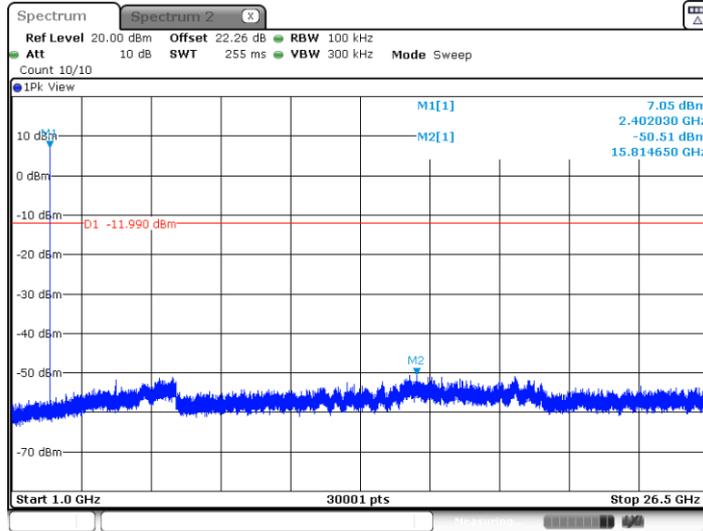

Date: 19 JUL 2024 02:27:05


3DH1_Ant6_2441_0~Reference

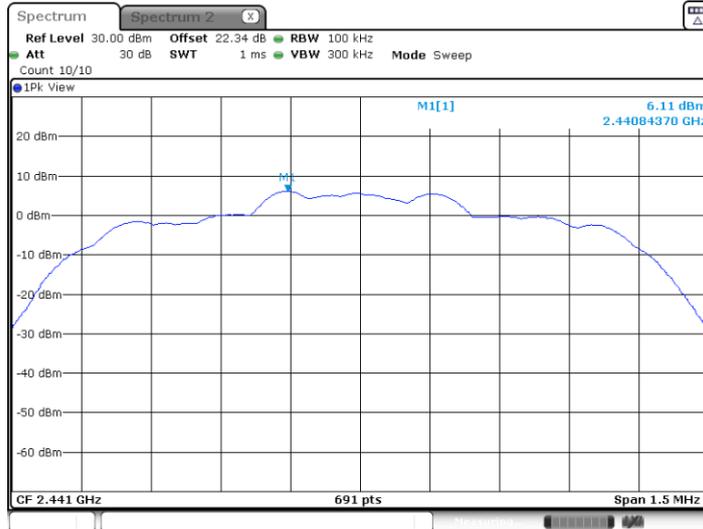

Date: 19 JUL 2024 02:27:36




3DH1_Ant6_2441_30~1000


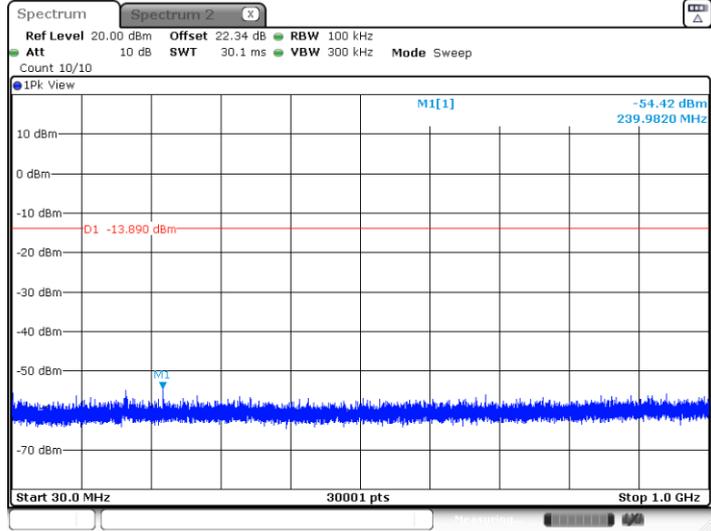



Date: 19 JUL 2024 02:27:42

3DH1_Ant6_2441_1000~26500

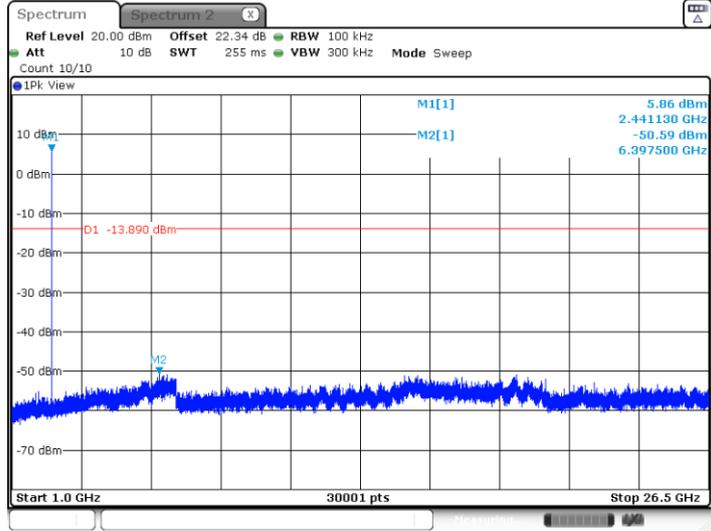

Date: 19 JUL 2024 02:27:57

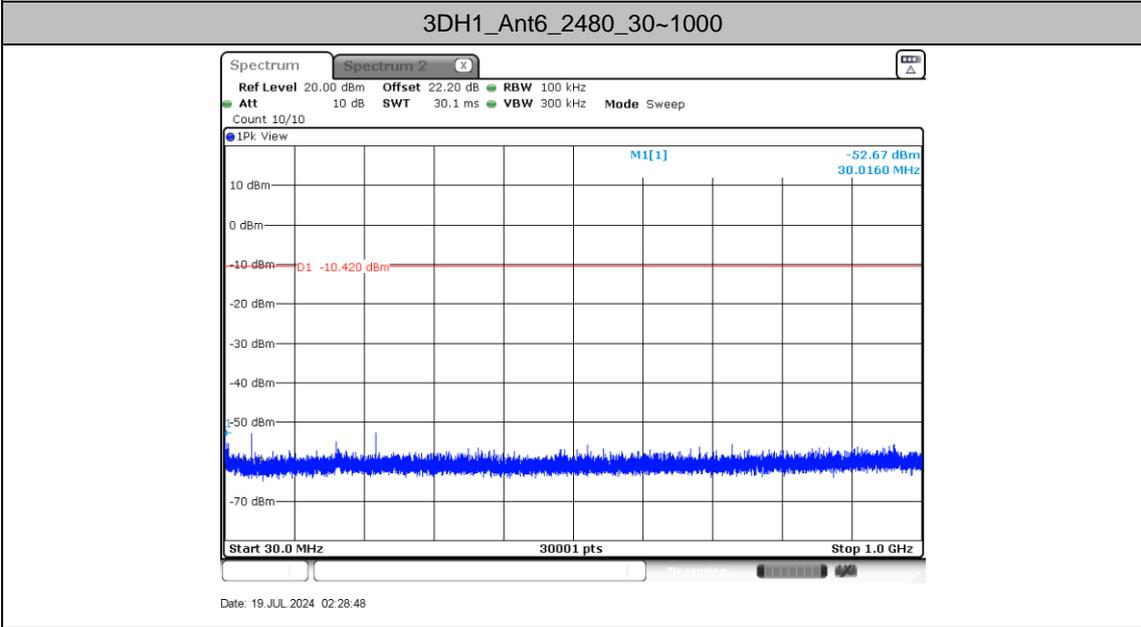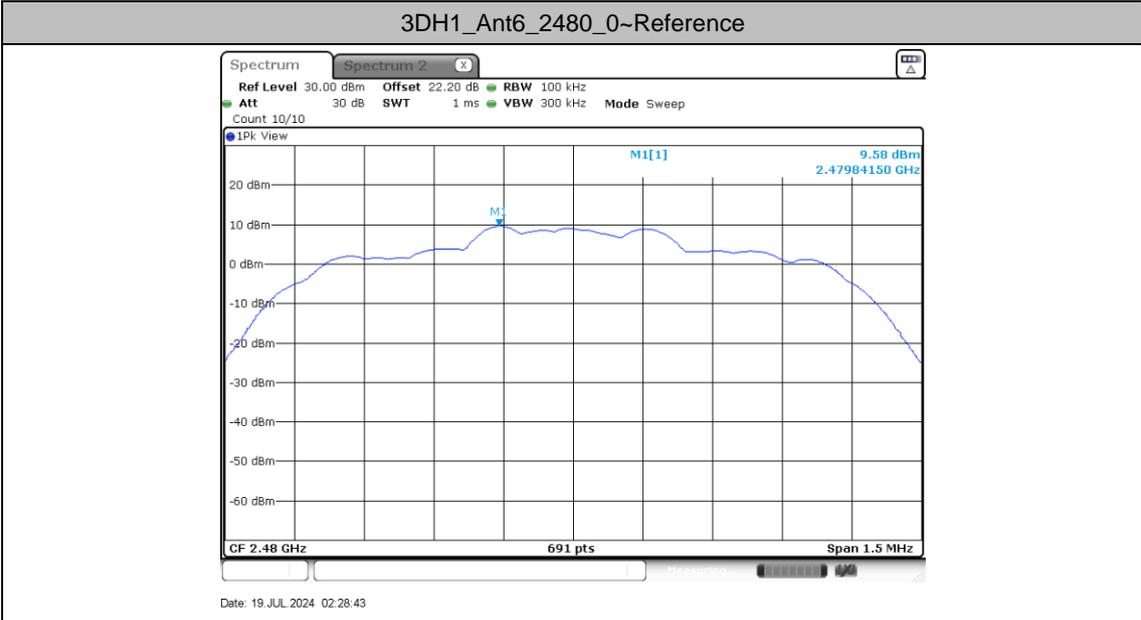


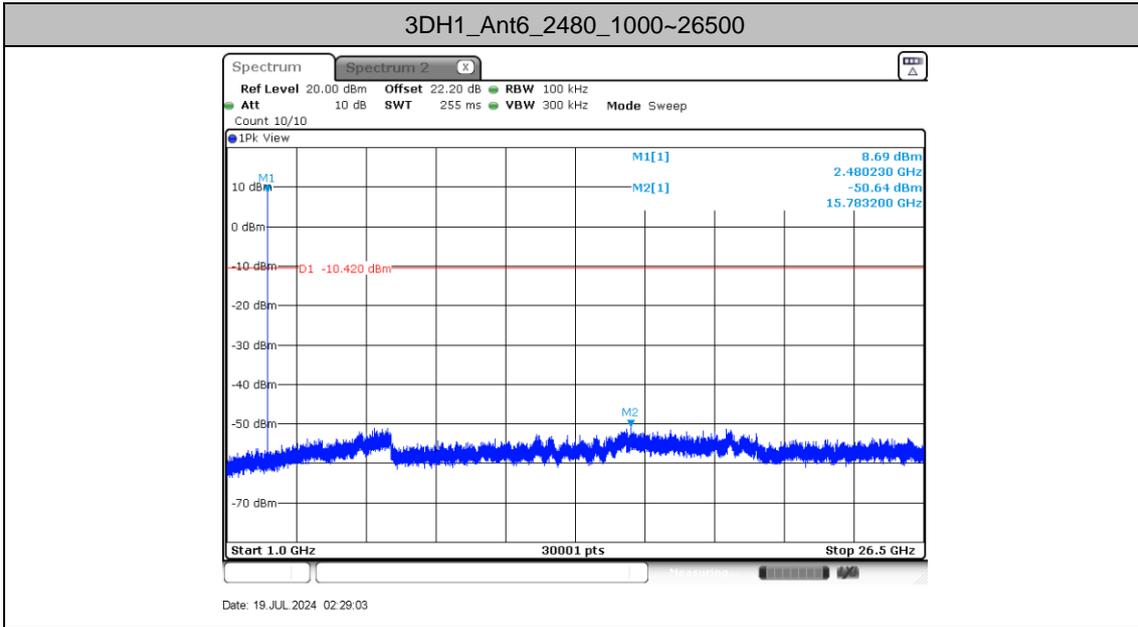



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

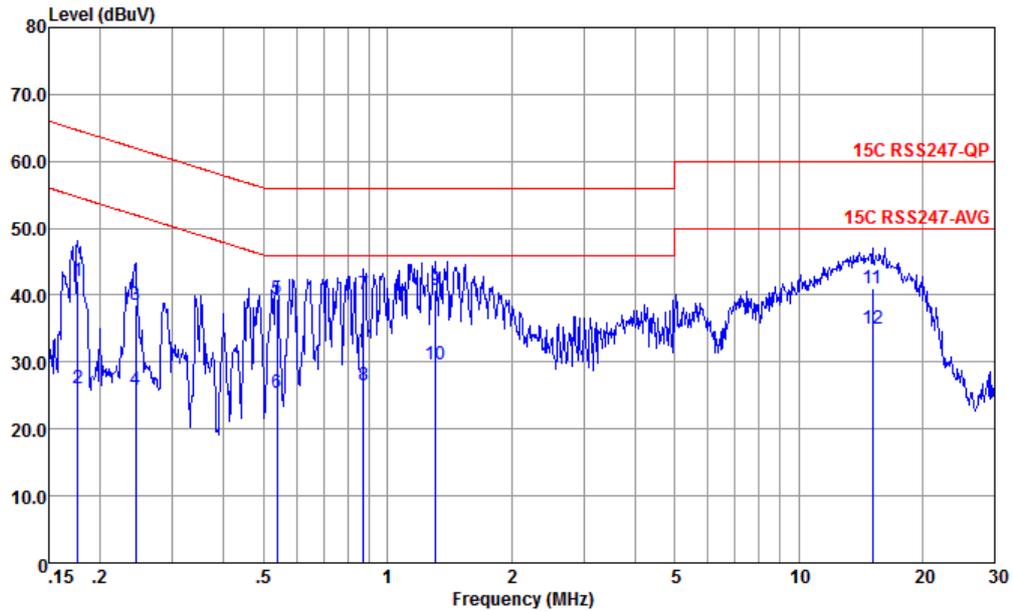


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.177	42.01	-22.63	64.64	31.50	0.10	10.41	QP
2	0.177	26.01	-28.63	54.64	15.50	0.10	10.41	Average
3	0.244	38.66	-23.29	61.95	28.20	0.09	10.37	QP
4	0.244	25.76	-26.19	51.95	15.30	0.09	10.37	Average
5	0.538	39.38	-16.62	56.00	29.30	-0.12	10.20	QP
6	0.538	25.38	-20.62	46.00	15.30	-0.12	10.20	Average
7	0.876	40.03	-15.97	56.00	30.10	-0.17	10.10	QP
8	0.876	26.43	-19.57	46.00	16.50	-0.17	10.10	Average
9	1.310	40.69	-15.31	56.00	30.81	-0.20	10.08	QP
10	1.310	29.69	-16.31	46.00	19.81	-0.20	10.08	Average
11	15.146	40.93	-19.07	60.00	29.91	-0.19	11.21	QP
12 *	15.146	34.93	-15.07	50.00	23.91	-0.19	11.21	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

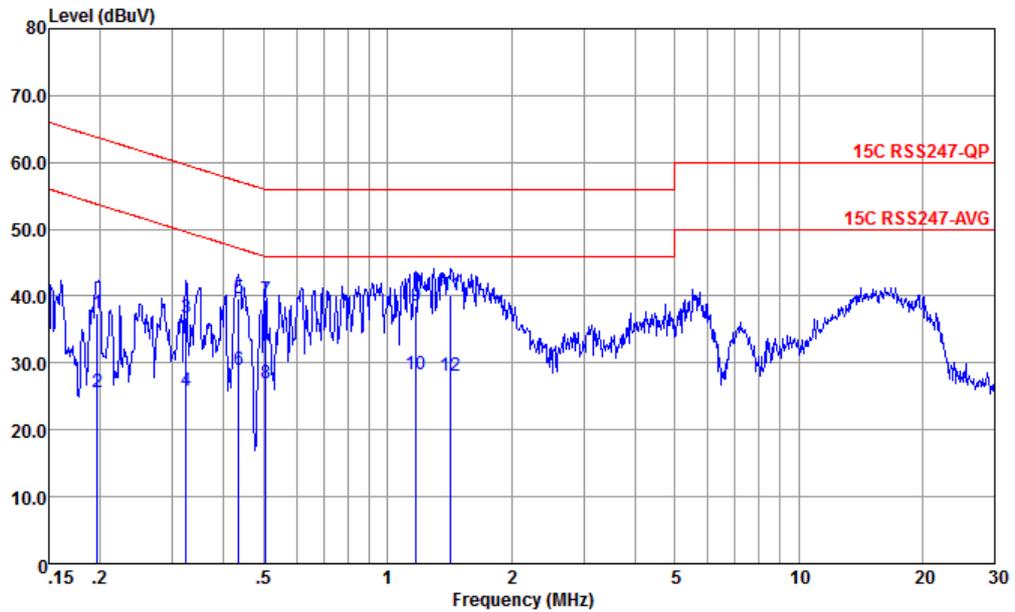

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.197	37.34	-26.42	63.76	26.80	0.13	10.41	QP
2	0.197	25.64	-28.12	53.76	15.10	0.13	10.41	Average
3	0.323	36.79	-22.83	59.62	26.59	-0.12	10.32	QP
4	0.323	25.79	-23.83	49.62	15.59	-0.12	10.32	Average
5	0.435	39.72	-17.43	57.15	29.60	-0.14	10.26	QP
6	0.435	29.02	-18.13	47.15	18.90	-0.14	10.26	Average
7	0.505	39.47	-16.53	56.00	29.40	-0.15	10.22	QP
8	0.505	26.87	-19.13	46.00	16.80	-0.15	10.22	Average
9	1.172	38.60	-17.40	56.00	28.69	-0.18	10.09	QP
10	1.172	28.20	-17.80	46.00	18.29	-0.18	10.09	Average
11 *	1.426	40.10	-15.90	56.00	30.21	-0.19	10.08	QP
12	1.426	28.10	-17.90	46.00	18.21	-0.19	10.08	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jake zhou	Relative Humidity :	52~56%
		Temperature :	22~25°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	6	Bluetooth BR_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	6	Bluetooth BR_GFSK	39	2441	1Mbps	-	-
Mode 3	2400-2483.5	6	Bluetooth BR_GFSK	78	2480	1Mbps	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2351.60	49.23	74.00	-24.77	H	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	00	4804.00	50.01	74.00	-23.99	H	PEAK	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
2	Bluetooth BR_GFSK	39	4882.00	49.73	74.00	-24.27	H	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2489.26	51.51	74.00	-22.49	V	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	4960.00	50.23	74.00	-23.77	H	PEAK	Pass	Harmonic



Mode	1																																																																																																												
	Band Edge																																																																																																												
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																												
ANT	6																																																																																																												
Pol.	Horizontal	Fundamental																																																																																																											
Peak																																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2351.60</td> <td>49.23</td> <td>74.00</td> <td>-24.77</td> <td>41.44</td> <td>31.56</td> <td>7.10</td> <td>36.87</td> <td>6.00</td> <td>304</td> <td>298 PEAK</td> </tr> <tr> <td>2</td> <td>2351.60</td> <td>24.41</td> <td>54.00</td> <td>-29.59</td> <td>16.62</td> <td>31.56</td> <td>7.10</td> <td>36.87</td> <td>6.00</td> <td>304</td> <td>298 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2351.60	49.23	74.00	-24.77	41.44	31.56	7.10	36.87	6.00	304	298 PEAK	2	2351.60	24.41	54.00	-29.59	16.62	31.56	7.10	36.87	6.00	304	298 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>104.28</td> <td>-----</td> <td>96.05</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>304</td> <td>298 PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>79.46</td> <td>-----</td> <td>71.23</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>304</td> <td>298 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	104.28	-----	96.05	31.91	7.18	36.86	6.00	304	298 PEAK	2	2402.00	79.46	-----	71.23	31.91	7.18	36.86	6.00	304
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2351.60	49.23	74.00	-24.77	41.44	31.56	7.10	36.87	6.00	304	298 PEAK																																																																																																		
2	2351.60	24.41	54.00	-29.59	16.62	31.56	7.10	36.87	6.00	304	298 AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2402.00	104.28	-----	96.05	31.91	7.18	36.86	6.00	304	298 PEAK																																																																																																			
2	2402.00	79.46	-----	71.23	31.91	7.18	36.86	6.00	304	298 AVERAGE																																																																																																			



Mode	1																																																																																																																
	Band Edge																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																
ANT	6																																																																																																																
Pol.	Vertical	Fundamental																																																																																																															
Peak																																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2383.19</td> <td>49.13</td> <td>74.00</td> <td>-24.87</td> <td>41.06</td> <td>31.78</td> <td>7.15</td> <td>36.86</td> <td>6.00</td> <td>362</td> <td>49</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2383.19</td> <td>24.31</td> <td>54.00</td> <td>-29.69</td> <td>16.24</td> <td>31.78</td> <td>7.15</td> <td>36.86</td> <td>6.00</td> <td>362</td> <td>49</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2383.19	49.13	74.00	-24.87	41.06	31.78	7.15	36.86	6.00	362	49	PEAK	2	2383.19	24.31	54.00	-29.69	16.24	31.78	7.15	36.86	6.00	362	49	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>103.29</td> <td>-----</td> <td>95.06</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>362</td> <td>49</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>78.47</td> <td>-----</td> <td>70.24</td> <td>31.91</td> <td>7.18</td> <td>36.86</td> <td>6.00</td> <td>362</td> <td>49</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	103.29	-----	95.06	31.91	7.18	36.86	6.00	362	49	PEAK	2	2402.00	78.47	-----	70.24	31.91	7.18	36.86	6.00	362	49
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	2383.19	49.13	74.00	-24.87	41.06	31.78	7.15	36.86	6.00	362	49	PEAK																																																																																																					
2	2383.19	24.31	54.00	-29.69	16.24	31.78	7.15	36.86	6.00	362	49	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	2402.00	103.29	-----	95.06	31.91	7.18	36.86	6.00	362	49	PEAK																																																																																																						
2	2402.00	78.47	-----	70.24	31.91	7.18	36.86	6.00	362	49	AVERAGE																																																																																																						



Mode	1																																																																																																
	Harmonic																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																
ANT	6																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>50.01</td> <td>74.00</td> <td>-23.99</td> <td>69.13</td> <td>34.09</td> <td>10.27</td> <td>63.48</td> <td>0.00</td> <td>108</td> <td>244</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>25.19</td> <td>54.00</td> <td>-28.81</td> <td>44.31</td> <td>34.09</td> <td>10.27</td> <td>63.48</td> <td>0.00</td> <td>108</td> <td>244</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	50.01	74.00	-23.99	69.13	34.09	10.27	63.48	0.00	108	244	PEAK	2	4804.00	25.19	54.00	-28.81	44.31	34.09	10.27	63.48	0.00	108	244	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>43.43</td> <td>74.00</td> <td>-30.57</td> <td>62.55</td> <td>34.09</td> <td>10.27</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	43.43	74.00	-30.57	62.55	34.09	10.27	63.48	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4804.00	50.01	74.00	-23.99	69.13	34.09	10.27	63.48	0.00	108	244	PEAK																																																																																					
2	4804.00	25.19	54.00	-28.81	44.31	34.09	10.27	63.48	0.00	108	244	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4804.00	43.43	74.00	-30.57	62.55	34.09	10.27	63.48	0.00	--	--	PEAK																																																																																					



Mode	2																																																																																																																										
	Harmonic																																																																																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																										
ANT	6																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>49.73</td> <td>74.00</td> <td>-24.27</td> <td>68.92</td> <td>33.94</td> <td>10.35</td> <td>63.48</td> <td>0.00</td> <td>104</td> <td>245</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>24.91</td> <td>54.00</td> <td>-29.09</td> <td>44.10</td> <td>33.94</td> <td>10.35</td> <td>63.48</td> <td>0.00</td> <td>104</td> <td>245</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>42.26</td> <td>74.00</td> <td>-31.74</td> <td>57.55</td> <td>35.60</td> <td>12.79</td> <td>63.68</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	49.73	74.00	-24.27	68.92	33.94	10.35	63.48	0.00	104	245	PEAK	2	4882.00	24.91	54.00	-29.09	44.10	33.94	10.35	63.48	0.00	104	245	AVERAGE	3	7323.00	42.26	74.00	-31.74	57.55	35.60	12.79	63.68	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>41.15</td> <td>74.00</td> <td>-32.85</td> <td>60.34</td> <td>33.94</td> <td>10.35</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>42.15</td> <td>74.00</td> <td>-31.85</td> <td>57.44</td> <td>35.60</td> <td>12.79</td> <td>63.68</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	41.15	74.00	-32.85	60.34	33.94	10.35	63.48	0.00	--	--	PEAK	2	7323.00	42.15	74.00	-31.85	57.44	35.60	12.79	63.68	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	4882.00	49.73	74.00	-24.27	68.92	33.94	10.35	63.48	0.00	104	245	PEAK																																																																																																															
2	4882.00	24.91	54.00	-29.09	44.10	33.94	10.35	63.48	0.00	104	245	AVERAGE																																																																																																															
3	7323.00	42.26	74.00	-31.74	57.55	35.60	12.79	63.68	0.00	--	--	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	4882.00	41.15	74.00	-32.85	60.34	33.94	10.35	63.48	0.00	--	--	PEAK																																																																																																															
2	7323.00	42.15	74.00	-31.85	57.44	35.60	12.79	63.68	0.00	--	--	PEAK																																																																																																															



Mode	3																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																														
ANT	6																																																																																																														
Pol.	Horizontal	Fundamental																																																																																																													
Peak																																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.95</td> <td>50.66</td> <td>74.00</td> <td>-23.34</td> <td>41.94</td> <td>32.24</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>31 PEAK</td> </tr> <tr> <td>2</td> <td>2483.95</td> <td>25.84</td> <td>54.00</td> <td>-28.16</td> <td>17.12</td> <td>32.24</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>31 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.95	50.66	74.00	-23.34	41.94	32.24	7.33	36.85	6.00	163	31 PEAK	2	2483.95	25.84	54.00	-28.16	17.12	32.24	7.33	36.85	6.00	163	31 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>104.71</td> <td>-----</td> <td>-----</td> <td>96.02</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>31 PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>79.89</td> <td>-----</td> <td>-----</td> <td>71.20</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>163</td> <td>31 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	104.71	-----	-----	96.02	32.22	7.32	36.85	6.00	163	31 PEAK	2	2480.00	79.89	-----	-----	71.20	32.22	7.32	36.85	6.00	163
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.95	50.66	74.00	-23.34	41.94	32.24	7.33	36.85	6.00	163	31 PEAK																																																																																																				
2	2483.95	25.84	54.00	-28.16	17.12	32.24	7.33	36.85	6.00	163	31 AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2480.00	104.71	-----	-----	96.02	32.22	7.32	36.85	6.00	163	31 PEAK																																																																																																				
2	2480.00	79.89	-----	-----	71.20	32.22	7.32	36.85	6.00	163	31 AVERAGE																																																																																																				



Mode	3																																																																																																																
	Band Edge																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHZ																																																																																																																
ANT	6																																																																																																																
Pol.	Vertical	Fundamental																																																																																																															
Peak																																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.26</td> <td>51.51</td> <td>74.00</td> <td>-22.49</td> <td>42.76</td> <td>32.26</td> <td>7.34</td> <td>36.85</td> <td>6.00</td> <td>302</td> <td>46</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2489.26</td> <td>26.69</td> <td>54.00</td> <td>-27.31</td> <td>17.94</td> <td>32.26</td> <td>7.34</td> <td>36.85</td> <td>6.00</td> <td>302</td> <td>46</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.26	51.51	74.00	-22.49	42.76	32.26	7.34	36.85	6.00	302	46	PEAK	2	2489.26	26.69	54.00	-27.31	17.94	32.26	7.34	36.85	6.00	302	46	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>103.35</td> <td>-----</td> <td>94.66</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>302</td> <td>46</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>78.53</td> <td>-----</td> <td>69.84</td> <td>32.22</td> <td>7.32</td> <td>36.85</td> <td>6.00</td> <td>302</td> <td>46</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	103.35	-----	94.66	32.22	7.32	36.85	6.00	302	46	PEAK	2	2480.00	78.53	-----	69.84	32.22	7.32	36.85	6.00	302	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2489.26	51.51	74.00	-22.49	42.76	32.26	7.34	36.85	6.00	302	46	PEAK																																																																																																					
2	2489.26	26.69	54.00	-27.31	17.94	32.26	7.34	36.85	6.00	302	46	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	2480.00	103.35	-----	94.66	32.22	7.32	36.85	6.00	302	46	PEAK																																																																																																						
2	2480.00	78.53	-----	69.84	32.22	7.32	36.85	6.00	302	46	AVERAGE																																																																																																						



Mode	3																																																																																																																										
	Harmonic																																																																																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																										
ANT	6																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>50.23</td> <td>74.00</td> <td>-23.77</td> <td>69.31</td> <td>33.96</td> <td>10.44</td> <td>63.48</td> <td>0.00</td> <td>101</td> <td>241</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>25.41</td> <td>54.00</td> <td>-28.59</td> <td>44.49</td> <td>33.96</td> <td>10.44</td> <td>63.48</td> <td>0.00</td> <td>101</td> <td>241</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>41.64</td> <td>74.00</td> <td>-32.36</td> <td>56.82</td> <td>35.64</td> <td>12.93</td> <td>63.75</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	50.23	74.00	-23.77	69.31	33.96	10.44	63.48	0.00	101	241	PEAK	2	4960.00	25.41	54.00	-28.59	44.49	33.96	10.44	63.48	0.00	101	241	AVERAGE	3	7440.00	41.64	74.00	-32.36	56.82	35.64	12.93	63.75	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>42.61</td> <td>74.00</td> <td>-31.39</td> <td>61.69</td> <td>33.96</td> <td>10.44</td> <td>63.48</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>41.44</td> <td>74.00</td> <td>-32.56</td> <td>56.62</td> <td>35.64</td> <td>12.93</td> <td>63.75</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	42.61	74.00	-31.39	61.69	33.96	10.44	63.48	0.00	--	--	PEAK	2	7440.00	41.44	74.00	-32.56	56.62	35.64	12.93	63.75	0.00	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	4960.00	50.23	74.00	-23.77	69.31	33.96	10.44	63.48	0.00	101	241	PEAK																																																																																																															
2	4960.00	25.41	54.00	-28.59	44.49	33.96	10.44	63.48	0.00	101	241	AVERAGE																																																																																																															
3	7440.00	41.64	74.00	-32.36	56.82	35.64	12.93	63.75	0.00	--	--	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	4960.00	42.61	74.00	-31.39	61.69	33.96	10.44	63.48	0.00	--	--	PEAK																																																																																																															
2	7440.00	41.44	74.00	-32.56	56.62	35.64	12.93	63.75	0.00	--	--	PEAK																																																																																																															



Mode	3																																																																																																																																																																																
	LF																																																																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																
ANT	1																																																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																																																															
QP																																																																																																																																																																																	
	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>19.52</td><td>-20.48</td><td>40.00</td><td>27.36</td><td>24.20</td><td>0.76</td><td>32.80</td><td>---</td><td>--- Peak</td></tr> <tr><td>2</td><td>91.11</td><td>19.49</td><td>-24.01</td><td>43.50</td><td>36.08</td><td>14.75</td><td>1.35</td><td>32.69</td><td>---</td><td>--- Peak</td></tr> <tr><td>3</td><td>150.28</td><td>19.71</td><td>-23.79</td><td>43.50</td><td>33.57</td><td>17.05</td><td>1.80</td><td>32.71</td><td>---</td><td>--- Peak</td></tr> <tr><td>4</td><td>187.14</td><td>19.93</td><td>-23.57</td><td>43.50</td><td>36.02</td><td>14.65</td><td>2.01</td><td>32.75</td><td>---</td><td>--- Peak</td></tr> <tr><td>5</td><td>726.46</td><td>27.14</td><td>-18.86</td><td>46.00</td><td>28.88</td><td>27.46</td><td>4.02</td><td>33.22</td><td>---</td><td>--- Peak</td></tr> <tr><td>6 p</td><td>959.26</td><td>29.77</td><td>-16.23</td><td>46.00</td><td>25.75</td><td>30.99</td><td>4.60</td><td>31.57</td><td>---</td><td>--- Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	30.97	19.52	-20.48	40.00	27.36	24.20	0.76	32.80	---	--- Peak	2	91.11	19.49	-24.01	43.50	36.08	14.75	1.35	32.69	---	--- Peak	3	150.28	19.71	-23.79	43.50	33.57	17.05	1.80	32.71	---	--- Peak	4	187.14	19.93	-23.57	43.50	36.02	14.65	2.01	32.75	---	--- Peak	5	726.46	27.14	-18.86	46.00	28.88	27.46	4.02	33.22	---	--- Peak	6 p	959.26	29.77	-16.23	46.00	25.75	30.99	4.60	31.57	---	--- Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1 p</td><td>41.64</td><td>33.68</td><td>-6.32</td><td>40.00</td><td>47.12</td><td>18.49</td><td>0.90</td><td>32.83</td><td>---</td><td>--- Peak</td></tr> <tr><td>2</td><td>91.11</td><td>25.04</td><td>-18.46</td><td>43.50</td><td>41.63</td><td>14.75</td><td>1.35</td><td>32.69</td><td>---</td><td>--- Peak</td></tr> <tr><td>3</td><td>153.19</td><td>23.61</td><td>-19.89</td><td>43.50</td><td>37.66</td><td>16.85</td><td>1.81</td><td>32.71</td><td>---</td><td>--- Peak</td></tr> <tr><td>4</td><td>558.65</td><td>25.06</td><td>-20.94</td><td>46.00</td><td>28.94</td><td>26.09</td><td>3.27</td><td>33.24</td><td>---</td><td>--- Peak</td></tr> <tr><td>5</td><td>960.23</td><td>31.01</td><td>-22.99</td><td>54.00</td><td>26.95</td><td>31.01</td><td>4.61</td><td>31.56</td><td>---</td><td>--- Peak</td></tr> <tr><td>6</td><td>988.36</td><td>31.20</td><td>-22.80</td><td>54.00</td><td>27.14</td><td>30.65</td><td>4.66</td><td>31.25</td><td>---</td><td>--- Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 p	41.64	33.68	-6.32	40.00	47.12	18.49	0.90	32.83	---	--- Peak	2	91.11	25.04	-18.46	43.50	41.63	14.75	1.35	32.69	---	--- Peak	3	153.19	23.61	-19.89	43.50	37.66	16.85	1.81	32.71	---	--- Peak	4	558.65	25.06	-20.94	46.00	28.94	26.09	3.27	33.24	---	--- Peak	5	960.23	31.01	-22.99	54.00	26.95	31.01	4.61	31.56	---	--- Peak	6	988.36	31.20	-22.80	54.00	27.14	30.65	4.66	31.25	---
Peak	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																							
1	30.97	19.52	-20.48	40.00	27.36	24.20	0.76	32.80	---	--- Peak																																																																																																																																																																							
2	91.11	19.49	-24.01	43.50	36.08	14.75	1.35	32.69	---	--- Peak																																																																																																																																																																							
3	150.28	19.71	-23.79	43.50	33.57	17.05	1.80	32.71	---	--- Peak																																																																																																																																																																							
4	187.14	19.93	-23.57	43.50	36.02	14.65	2.01	32.75	---	--- Peak																																																																																																																																																																							
5	726.46	27.14	-18.86	46.00	28.88	27.46	4.02	33.22	---	--- Peak																																																																																																																																																																							
6 p	959.26	29.77	-16.23	46.00	25.75	30.99	4.60	31.57	---	--- Peak																																																																																																																																																																							
Peak	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																							
1 p	41.64	33.68	-6.32	40.00	47.12	18.49	0.90	32.83	---	--- Peak																																																																																																																																																																							
2	91.11	25.04	-18.46	43.50	41.63	14.75	1.35	32.69	---	--- Peak																																																																																																																																																																							
3	153.19	23.61	-19.89	43.50	37.66	16.85	1.81	32.71	---	--- Peak																																																																																																																																																																							
4	558.65	25.06	-20.94	46.00	28.94	26.09	3.27	33.24	---	--- Peak																																																																																																																																																																							
5	960.23	31.01	-22.99	54.00	26.95	31.01	4.61	31.56	---	--- Peak																																																																																																																																																																							
6	988.36	31.20	-22.80	54.00	27.14	30.65	4.66	31.25	---	--- Peak																																																																																																																																																																							



Mode	3	
	18G-25G	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	<p>The graph shows the measured signal level in dBuV/m versus frequency in MHz for horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 18000 to 25000 MHz. A blue line represents the measured signal, which fluctuates around a mean level of approximately 40 dBuV/m. Two red horizontal lines indicate the FCC Part 15C limits: the upper limit is at 81.3 dBuV/m and the lower limit is at 48.8 dBuV/m. The measured signal remains well below the upper limit and above the lower limit.</p>	<p>The graph shows the measured signal level in dBuV/m versus frequency in MHz for vertical polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 18000 to 25000 MHz. A blue line represents the measured signal, which fluctuates around a mean level of approximately 40 dBuV/m. Two red horizontal lines indicate the FCC Part 15C limits: the upper limit is at 81.3 dBuV/m and the lower limit is at 48.8 dBuV/m. The measured signal remains well below the upper limit and above the lower limit.</p>