

Spot Check Evaluation

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : POCO
MODEL NAME : 24095PCADG
FCC ID : 2AFZZRA8EG
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(O),
27(Q), Part96
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Aug. 15, 2024 ~ Oct. 16, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Testing Site.....	5
1.6 Test Software.....	5
1.7 Applicable Standards.....	5
2 RE-USE OF MEASURED DATA.....	6
2.1 Introduction Section.....	6
2.2 Model Difference Information	6
2.3 Reference detail Section:	7
2.4 Spot Check Verification Data Section.....	8
3 LIST OF MEASURING EQUIPMENT.....	16
4 MEASUREMENT UNCERTAINTY	18
APPENDIX A. RADIATED SPURIOUS EMISSION TEST DATA	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471506-01K	Rev. 01	Initial issue of report	Sep. 10, 2024
FG471506-01K	Rev. 02	1. Added Conducted power for L/M/H test channels across all frequency bands 2. Added Radiated spurious emissions test data for LTE Band 48 in Appendix A	Oct. 17, 2024

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	POCO
Model Name	24095PCADG
FCC ID	2AFZZRA8EG
IMEI Code	Conducted: 862769070026585/862769070026593 for BT/WLAN 862769070029589/862769070029597 for WWAN Radiation: 862769070028524 for BT/WLAN 862769070029282/862769070029290 for WWAN Conduction: 862669070025702/862769070025710 DFS: 862769070026585/862769070026593
HW Version	135300O16
SW Version	Xiaomi HyperOS 1.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS TH01-KS DFS01-KS 03CH03-KS 03CH04-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	DFS01-KS	Sporton	Test Tools	1.0
3.	CO01-KS	AUDIX	E3	6.2009-8-24
4.	03CH03-KS	AUDIX	E3	210616
5.	03CH04-KS	AUDIX	E3	210616

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(O), 27(Q), Part96
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: 24095PCADG, FCC ID: 2AFZZRA8EG) is electrically identical to the reference device (Model: 24090RA29G, FCC ID: 2AFZZRA29G) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA471506-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: 2AFZZRA8EG .

2.2 Model Difference Information

The **main** difference between FCC ID: 2AFZZRA29G and FCC ID: 2AFZZRA8EG is as below:

- Removed LTE Band 12/13/17/26/32
- Removed TX1 B20 alternative path of B20 which used for low band + low band CA and ENDC

Other differences and all the details of similarity and difference can be found in the confidential documents (2AFZZRA8EG Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	2AFZZRA29G	Full test	FR471506A	2AFZZRA8EG	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	2AFZZRA29G	Full test	FR471506B	2AFZZRA8EG	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	2AFZZRA29G	Full test	FR471506C	2AFZZRA8EG	Spot check	Y, All test items
15E	U-NII	5180~5240	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5260~5320	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5500~5720	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5745~5825	2AFZZRA29G	Full test	FR471506E	2AFZZRA8EG	Spot check	Y, All test items
		5260~5320 5500~5720	2AFZZRA29G	Full test	FZ471506	2AFZZRA8EG	Spot check	Y, All test items
22, 24, 27, 96,	PCE (GSM)	GSM 850/1900	2AFZZRA29G	Full test	FG471506A	2AFZZRA8EG	Spot check	Y, All test items
	PCE (WCDMA)	Band II, IV, V	2AFZZRA29G	Full test	FG471506A	2AFZZRA8EG	Spot check	Y, All test items
	PCE/CBE (LTE)	B2/4/7/7C/38/38C/41/42/48/66	2AFZZRA29G	Full test	FG471506B FG471506C FG471506E FG471506F FG471506G	2AFZZRA8EG	Spot check	Y, All test items
	PCE/CBE (NR)	n2/n5/n7/n38/n41/n48/n66/n77/n78	2AFZZRA29G	Full test	FG471506I FG471506J FG471506K FG471506L FG471506M FG471506N	2AFZZRA8EG	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB}, \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB}, \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (DH5-CH00)	Number of Channels (N)	79	79	0	3
	Hopping Channel Separation (MHz)	1.004	1.002	0.002	3
	Dwell Time of Each Channel(s)	0.31	0.31	0	3
	20dB Bandwidth(MHz)	0.86	0.86	0	3
	99% Bandwidth(MHz)	0.76	0.76	0	3
	Conducted Band Edges(dBm)	-48.06	-49.2	1.14	3
	Conducted Spurious Emission(dBm)	-50.22	-50.55	0.33	3
BT (Ch78)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	51.51	51.02	0.49	3
BT	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
BLE 1Mbps (CH00)	6dB Bandwidth (MHz)	0.7	0.69	0.01	3
	99% Bandwidth (MHz)	1.04	1.04	0	3
	Power Spectral Density (dBm/3KHz)	-8.4	-8.6	0.2	3
	Conducted Band Edges and Spurious Emission (dBm)	-51.86	-52.32	0.46	3
	Conducted Spurious Emission (dBm)	-50.91	-51.88	0.97	3
BLE (CH38)	Radiated Band Edges and Radiated Spurious Emission (dBuV/m)	40.2	40.22	0.02	3
BLE	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth (MHz)	8.04	8.02	0.02	3
	99% Bandwidth (MHz)	13.23	13.14	0.09	3
	Power Spectral Density (dBm/3KHz)	-7.64	-7.88	0.24	3
	Conducted Band Edges and Spurious Emission (dBm)	-34.74	-35.55	0.81	3
	Conducted Spurious Emission (dBm)	-41.41	-42.08	0.67	3
WIFI 2.4G (802.11ax HE20 CH01)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.96	50.50	0.46	3
WLAN 2.4G	AC Conducted Emission (dBuV)	34.93	33.95	0.98	3
WIFI 5G (802.11a CH116)	26dB Emission Bandwidth (MHz)	23.73	23.66	0.07	3
	99% Occupied Bandwidth (MHz)	17.41	17.38	0.03	3
	Power Spectral Density (dBm/MHz)	6.9	6.88	0.02	3
WIFI 5G (802.11ax HE80 CH42)	Radiated Band Edges and Spurious Emission (dBuV/m)	50.86	50.89	0.03	3
WLAN 5G	AC Conducted Emission (dBuV)	38.5	40.8	2.3	3
WLAN 5G	DFS (S)	0.846028	0.848428	0.0024	3



Mode	Test Item	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 22/24/27 (LTE Band 48)	Peak-to-Average Ratio (dB)	5.42	5.16	0.26	3
	Occupied Bandwidth (MHz)	17.94	17.90	0.04	3
	Conducted Band Edge (dBm/MHz)	-14.08	-14.87	0.79	3
	Conducted Spurious Emission (dBm/MHz)	-42.80	-44.75	1.95	3
	Frequency Stability (ppm)	0.0016	0.0003	0.0013	3
Part 96 (LTE Band 48)	Radiated Spurious Emission (dBm)	-47.27	-49.88	2.61	3



Conducted power for Unlicensed bands

Test Item	Mode	2AFZZRA29G Parent Worst mode Test Result	2AFZZRA8EG Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR -CH 00-DH5	10.09	8.65	1.44	3
	BT BR/EDR -CH 39-DH5	8.29	7.04	1.25	3
	BT BR/EDR -CH 78-DH5	11.29	9.64	1.65	3
	BT BR/EDR -CH 00-2DH1	9.09	7.72	1.37	3
	BT BR/EDR -CH 39-2DH1	7.19	6.20	0.99	3
	BT BR/EDR -CH 78-2DH1	10.36	8.96	1.40	3
	BT BR/EDR -CH 00-3DH1	8.89	7.56	1.33	3
	BT BR/EDR -CH 39-3DH1	6.95	6.04	0.91	3
	BT BR/EDR -CH 78-3DH1	10.19	8.80	1.39	3
	BLE 1Mbps -CH00	6.49	7.02	0.31	3
	BLE 1Mbps -CH19	7.33	5.88	0.43	3
	BLE 1Mbps -CH39	6.31	6.12	0.43	3
	BLE 2Mbps -CH00	6.55	6.12	0.43	3
	BLE 2Mbps -CH19	7.37	7.05	0.32	3
	BLE 2Mbps -CH39	6.49	6.08	0.41	3
	11b-CH 01	17.18	16.87	0.31	3
	11b-CH 06	20.52	20.28	0.24	3
	11b-CH 11	16.96	16.64	0.32	3
	11g-CH 01	24.5	24.46	0.04	3
	11g-CH 06	24.88	24.42	0.46	3
	11g-CH 11	24.4	23.98	0.42	3
	11n HT20-CH 01	25.15	24.86	0.29	3
	11n HT20-CH 06	25	24.65	0.35	3
	11n HT20-CH 11	24.88	24.53	0.35	3
	11ax HE20-CH 01	24.4	24.08	0.32	3
	11ax HE20-CH 06	24.66	24.35	0.31	3
	11ax HE20-CH 11	24.31	24.02	0.29	3
	11a-CH 36	16.98	16.51	0.47	3
	11a-CH 44	16.91	16.58	0.33	3
	11a-CH 48	16.89	16.49	0.40	3
	11a-CH 52	16.88	16.65	0.23	3
	11a-CH 60	16.96	16.54	0.42	3
	11a-CH 64	16.82	16.59	0.23	3
	11a-CH 100	16.85	16.45	0.40	3
	11a-CH 116	17.06	16.91	0.15	3
	11a-CH 140	12.49	12.45	0.04	3
	11a-CH 149	17.17	16.91	0.26	3
	11a-CH 157	17.29	16.97	0.32	3
	11a-CH 165	17.21	16.92	0.29	3
	11n HT20-CH 36	16.02	15.65	0.37	3
	11n HT20-CH 44	16.00	15.53	0.47	3
	11n HT20-CH 48	15.79	15.32	0.47	3
	11n HT20-CH 52	15.72	15.42	0.30	3
	11n HT20-CH 60	15.87	15.45	0.42	3
	11n HT20-CH 64	15.84	15.51	0.33	3
	11n HT20-CH 100	15.89	15.40	0.49	3
	11n HT20-CH 116	16.13	16.04	0.09	3
	11n HT20-CH 140	11.50	11.48	0.02	3
	11n HT20-CH 149	16.06	16.00	0.06	3
	11n HT20-CH 157	16.26	15.96	0.30	3



	11n HT20-CH 165	16.20	16.02	0.18	3
	11ac VHT20-CH 36	16.08	15.68	0.40	3
	11ac VHT20-CH 44	16.06	15.58	0.48	3
	11ac VHT20-CH 48	15.85	15.45	0.40	3
	11ac VHT20-CH 52	15.79	15.45	0.34	3
	11ac VHT20-CH 60	15.90	15.47	0.43	3
	11ac VHT20-CH 64	15.87	15.54	0.33	3
	11ac VHT20-CH 100	15.94	15.46	0.48	3
	11ac VHT20-CH 116	16.17	16.06	0.11	3
	11ac VHT20-CH 140	11.58	11.52	0.06	3
	11ac VHT20-CH 149	16.12	16.01	0.11	3
	11ac VHT20-CH 157	16.33	15.98	0.35	3
	11ac VHT20-CH 165	16.24	16.04	0.20	3
	11ax HE20-CH 36	16.18	15.76	0.42	3
	11ax HE20-CH 44	16.14	15.67	0.47	3
	11ax HE20-CH 48	15.94	15.53	0.41	3
	11ax HE20-CH 52	15.86	15.53	0.33	3
	11ax HE20-CH 60	16.00	15.57	0.43	3
	11ax HE20-CH 64	15.97	15.62	0.35	3
	11ax HE20-CH 100	16.06	15.59	0.47	3
	11ax HE20-CH 116	16.24	16.13	0.11	3
	11ax HE20-CH 140	11.64	11.60	0.04	3
	11ax HE20-CH 149	16.24	16.10	0.14	3
	11ax HE20-CH 157	16.41	16.06	0.35	3
	11ax HE20-CH 165	16.35	16.13	0.22	3
	11n HT40-CH 38	14.11	13.65	0.46	3
	11n HT40-CH 46	15.06	14.57	0.49	3
	11n HT40-CH 54	15.01	14.60	0.41	3
	11n HT40-CH 62	14.52	14.20	0.32	3
	11n HT40-CH 102	13.80	13.62	0.18	3
	11n HT40-CH 110	14.77	14.62	0.15	3
	11n HT40-CH 134	15.23	15.06	0.17	3
	11n HT40-CH 151	15.32	15.13	0.19	3
	11n HT40-CH 159	15.36	15.09	0.27	3
	11ac VHT40-CH 38	14.34	14.16	0.18	3
	11ac VHT40-CH 46	15.80	15.32	0.48	3
	11ac VHT40-CH 54	15.88	15.40	0.48	3
	11ac VHT40-CH 62	14.44	14.07	0.37	3
	11ac VHT40-CH 102	13.72	13.44	0.28	3
	11ac VHT40-CH 110	15.76	15.39	0.37	3
	11ac VHT40-CH 134	15.51	15.40	0.11	3
	11ac VHT40-CH 151	16.10	15.94	0.16	3
	11ac VHT40-CH 159	16.24	15.86	0.38	3
	11ax40-CH 38	14.24	13.76	0.48	3
	11ax40-CH 46	15.17	14.69	0.48	3
	11ax40-CH 54	15.12	14.70	0.42	3
	11ax40-CH 62	14.65	14.29	0.36	3
	11ax40-CH 102	13.94	13.70	0.24	3
	11ax40-CH 110	14.88	14.73	0.15	3
	11ax40-CH 134	15.35	15.16	0.19	3
	11ax40-CH 151	15.41	15.21	0.20	3
	11ax40-CH 159	15.47	15.19	0.28	3
	11ac VHT80-CH 042	13.40	12.98	0.42	3
	11ac VHT80-CH 058	12.70	12.53	0.17	3
	11ac VHT80-CH 106	13.30	13.08	0.22	3



	11ac VHT80-CH 122	14.15	13.86	0.29	3
	11ac VHT80-CH 138	14.01	13.93	0.08	3
	11ac VHT80-CH 155	14.21	13.88	0.33	3
	11ax HE80-CH 042	13.57	13.09	0.48	3
	11ax HE80-CH 058	12.84	12.63	0.21	3
	11ax HE80-CH 106	13.43	13.16	0.27	3
	11ax HE80-CH 122	14.24	13.97	0.27	3
	11ax HE80-CH 138	14.13	14.02	0.11	3
	11ax HE80-CH 155	14.33	13.98	0.35	3

Conducted power/ERP/EIRP for Licensed bands

Test Item	Mode	Bandwidth	Channel	Frequency	Modulation	2AFZZRA29G Parent Worst mode Test Result		2AFZZRA8EG Variant Check Test Result		Deviation (dB)	Deviation Limit (dB)
						Coducted (dBm)	ERP/EIRP (W)	Coducted (dBm)	ERP/EIRP (W)		
Conducted Power /ERP/EIRP	GSM 850	/	128	824.2	GMSK	32.4	1.7378	32.15	1.6406	0.25	3
	GSM 850	/	189	836.4	GMSK	32.46	1.7620	32.26	1.6827	0.2	3
	GSM 850	/	251	848.8	GMSK	32.45	1.7579	32.28	1.6904	0.17	3
	GSM 1900	/	512	1850.2	GMSK	29.31	0.8531	29.12	0.8166	0.19	3
	GSM 1900	/	661	1880	GMSK	29.45	0.8810	29.22	0.8356	0.23	3
	GSM 1900	/	810	1909.8	GMSK	29.43	0.8770	29.18	0.8279	0.25	3
	WCDMA 850	/	4132	826.4	BPSK	24.48	0.2805	24.36	0.2729	0.12	3
	WCDMA 850	/	4182	836.4	BPSK	24.5	0.2818	24.38	0.2742	0.12	3
	WCDMA 850	/	4233	846.6	BPSK	24.44	0.2780	24.29	0.2685	0.15	3
	WCDMA1900	/	9262	1852.4	BPSK	22.91	0.1954	22.85	0.1928	0.06	3
	WCDMA1900	/	9400	1880	BPSK	22.98	0.1986	22.90	0.1950	0.08	3
	WCDMA1900	/	9538	1907.6	BPSK	22.93	0.1963	22.82	0.1914	0.11	3
	WCDMA1700	/	1312	1712.4	BPSK	23.91	0.2460	23.69	0.2339	0.22	3
	WCDMA1700	/	1413	1732.6	BPSK	23.96	0.2489	23.75	0.2371	0.21	3
	WCDMA1700	/	1513	1752.6	BPSK	23.92	0.2466	23.63	0.2307	0.29	3
	B2	20M	18700	1860	QPSK	23.01	0.2000	22.61	0.1824	0.4	3
	B2	20M	18900	1880	QPSK	23.05	0.2018	22.67	0.1849	0.38	3
	B2	20M	19100	1900	QPSK	22.98	0.1986	22.65	0.1841	0.33	3
	B4	20M	20050	1720	QPSK	23.81	0.2404	23.75	0.2371	0.06	3
	B4	20M	20175	1732.5	QPSK	23.86	0.2432	23.80	0.2399	0.06	3
	B4	20M	20300	1745	QPSK	23.83	0.2415	23.72	0.2355	0.11	3
	B66	20M	132072	1720	QPSK	23.83	0.2415	23.68	0.2333	0.15	3
	B66	20M	132322	1745	QPSK	23.94	0.2477	23.73	0.2360	0.21	3
	B66	20M	132572	1770	QPSK	23.93	0.2472	23.65	0.2317	0.28	3
	B7	20M	20850	2510	QPSK	23.68	0.2333	23.64	0.2312	0.04	3
	B7	20M	21100	2535	QPSK	23.75	0.2371	23.68	0.2333	0.07	3
	B7	20M	21350	2560	QPSK	23.66	0.2323	23.61	0.2296	0.05	3
	B7C	20M+20M	20850_21048	2510_2529.8	QPSK	23.24	0.2109	23.22	0.2099	0.02	3
	B7C	20M+20M	21001_21199	2525.1_2544.9	QPSK	23.29	0.2133	23.24	0.2109	0.05	3
	B7C	20M+20M	21152_21350	2540.2_2560	QPSK	23.28	0.2128	23.13	0.2056	0.15	3
	B38	20M	37850	2580	QPSK	23.43	0.2203	23.40	0.2188	0.03	3
	B38	20M	38000	2595	QPSK	23.52	0.2249	23.43	0.2203	0.09	3



	B38	20M	38150	2610	QPSK	23.48	0.2228	23.38	0.2178	0.1	3
	B41	20M	39750	2506	QPSK	23.44	0.2208	23.40	0.2188	0.04	3
	B41	20M	40620	2593	QPSK	23.6	0.2291	23.49	0.2234	0.11	3
	B41	20M	41490	2680	QPSK	23.54	0.2259	23.39	0.2183	0.15	3
	B38C-20M+20M	20M+20M	37850_38048	2580_2599.8	QPSK	23.38	0.2178	23.31	0.2143	0.07	3
	B38C-20M+20M	20M+20M	37901_38099	2585.1_2604.9	QPSK	23.39	0.2183	23.35	0.2163	0.04	3
	B38C-20M+20M	20M+20M	37952_38150	2590.2_2610	QPSK	23.36	0.2168	23.27	0.2123	0.09	3
	B42	20M	42190	3460	QPSK	24.56	0.2858	24.34	0.2716	0.22	3
	B42	20M	42590	3500	QPSK	24.59	0.2877	24.45	0.2786	0.14	3
	B42	20M	42990	3540	QPSK	24.54	0.2844	24.47	0.2799	0.07	3
	B48	20M	55340	3560	QPSK	24.41	0.2761	24.33	0.2710	0.08	3
	B48	20M	55830	3609	QPSK	24.48	0.2805	24.36	0.2729	0.12	3
	B48	20M	56640	3690	QPSK	24.38	0.2742	24.29	0.2685	0.09	3
	N2-L	20M	372000	1860	PI/2 BPSK	22.83	0.1919	22.78	0.1897	0.05	3
	N2-M	20M	376000	1880	PI/2 BPSK	22.78	0.1897	22.72	0.1871	0.06	3
	N2-H	20M	380000	1900	PI/2 BPSK	22.64	0.1837	22.61	0.1824	0.03	3
	N5-L	20M	166800	834	PI/2 BPSK	24.37	0.2735	24.33	0.2710	0.04	3
	N5-M	20M	167300	836.5	PI/2 BPSK	24.46	0.2793	24.41	0.2761	0.05	3
	N5-H	20M	167800	839	PI/2 BPSK	24.4	0.2754	24.28	0.2679	0.12	3
	N7-L	50M	505000	2525	PI/2 BPSK	22.85	0.1928	22.81	0.1910	0.04	3
	N7-M	50M	507000	2535	PI/2 BPSK	23.01	0.2000	22.98	0.1986	0.03	3
	N7-H	50M	509000	2545	PI/2 BPSK	23.3	0.2138	23.13	0.2056	0.17	3
	N38-L	40M	518000	2590	QPSK	23.16	0.2070	23.11	0.2046	0.05	3
	N38-M	40M	519000	2595	QPSK	23.16	0.2070	23.09	0.2037	0.07	3
	N38-H	40M	520000	2600	QPSK	23.18	0.2080	23.15	0.2065	0.03	3
	N41-L	100M	509202	2546.01	QPSK	23.16	0.2070	23.11	0.2046	0.05	3
	N41-M	100M	518598	2592.99	QPSK	23.23	0.2104	23.18	0.2080	0.05	3
	N41-H	100M	528000	2640	QPSK	23.03	0.2009	22.98	0.1986	0.05	3
	N66-L	40M	346000	1730	PI/2 BPSK	24.2	0.2630	24.16	0.2606	0.04	3
	N66-M	40M	349000	1745	PI/2 BPSK	24	0.2512	23.96	0.2489	0.04	3
	N66-H	40M	352000	1760	PI/2 BPSK	24.09	0.2564	24.03	0.2529	0.06	3
	N48-L	40M	638000	3570	PI/2 BPSK	24.23	0.2649	24.14	0.2594	0.09	3
	N48-M	40M	641666	3624.99	PI/2 BPSK	24.58	0.2871	24.48	0.2805	0.1	3
	N48-H	40M	645332	3679.98	PI/2 BPSK	24.15	0.2600	24.10	0.2570	0.05	3
	N77 27O-L	100M	650000	3750	PI/2 BPSK	26.17	0.4140	26.14	0.4111	0.03	3
	N77 27O-M	100M	656000	3840	PI/2 BPSK	26.19	0.4159	26.13	0.4102	0.06	3
	N77 27O-H	100M	662000	3930	PI/2 BPSK	26.4	0.4365	26.31	0.4276	0.09	3
	N78 27O	100M	650000	3750	QPSK	26.31	0.4276	26.27	0.4236	0.04	3
	N77 27Q	100M	633334	3500.01	PI/2 BPSK	26.3	0.4266	26.25	0.4217	0.05	3
	N78 27Q	100M	633334	3500.01	PI/2 BPSK	26.28	0.4246	26.11	0.4083	0.17	3

**Conclusion:**

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 28, 2024~ Oct. 16, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024		Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Aug. 28, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Aug. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Aug. 28, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Aug. 28, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 02, 2024	Aug. 30, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr 17, 2024	Aug. 30, 2024	Apr 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Aug. 30, 2024	NCR	Conducted (DFS01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;M ax 30dBm	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Aug. 15, 2024	Sep. 10, 2024	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 06, 2023	Aug. 15, 2024	Dec. 05, 2024	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 15, 2024	Oct. 22, 2024	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Oct. 15, 2023	Aug. 15, 2024	Oct. 14, 2024	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082394	1Ghz-18Ghz	Jan. 03, 2024	Aug. 15, 2024	Jan. 02, 2025	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 11, 2023	Aug. 15, 2024	Oct. 10, 2024	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 15, 2024	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required.



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 28, 2024~ Oct. 16, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024		Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 28, 2024~ Oct. 16, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 28, 2024~ Oct. 16, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 18, 2024	Aug. 22, 2024~ Oct. 15, 2024	Aug. 17, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 22, 2024~ Oct. 15, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz~18Ghz	Oct. 11, 2023	Aug. 22, 2024~ Oct. 15, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz~18Ghz	Oct. 10, 2024		Oct. 09, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 22, 2024~ Oct. 15, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.4 ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

**03CH03-KS(BT/WIF):****Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.22dB
---	--------

03CH04-KS(WWAN):**Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

-THE END-



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Jake Zhou	Relative Humidity :	53-58%
		Temperature :	23-26℃





Radiated Spurious Emission Test Modes for Co-location

Mode	Band	Band	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	Co-location	2.4G WIFI	6	802.11ax HE20	01	2412	MCS0	Full	-
		WWAN	3	Part 96 LTE Band 48 BW=20M					
Mode 2	Co-location	5G U-NII-1	6	802.11ax HE80	42	5210	MCS0	Full	-
		-	6	Bluetooth-LE	38	2478	2Mbps	Full	-
		WWAN	3	Part 96 LTE Band 48 BW=20M					

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ax HE20	01	2389.95	50.83	54.00	-3.17	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	01	4824.00	44.42	74.00	-29.58	H	PEAK	Pass	Harmonic
2	802.11ax HE80	42	5149.76	50.67	54.00	-3.33	H	AVERAGE	Pass	Band Edge
	802.11ax HE80	42	10420.00	44.50	68.20	-23.70	V	PEAK	Pass	Harmonic
	Bluetooth-LE	38	2485.24	40.48	54.00	-13.52	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	38	4956.00	46.87	54.00	-7.13	H	AVERAGE	Pass	Harmonic

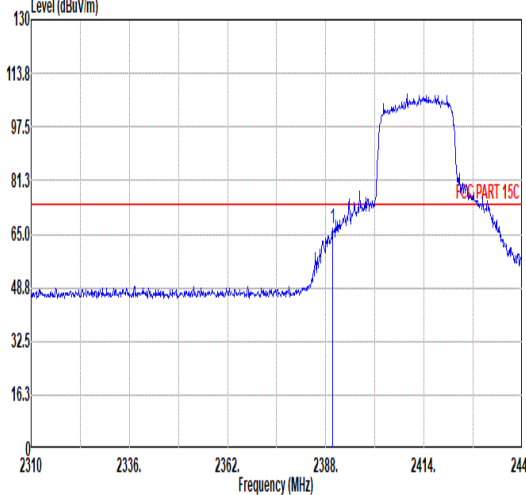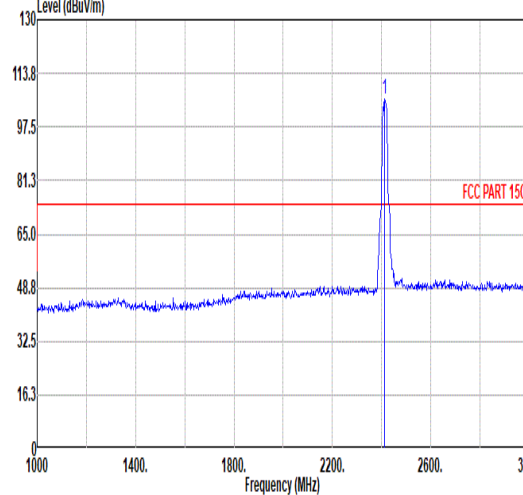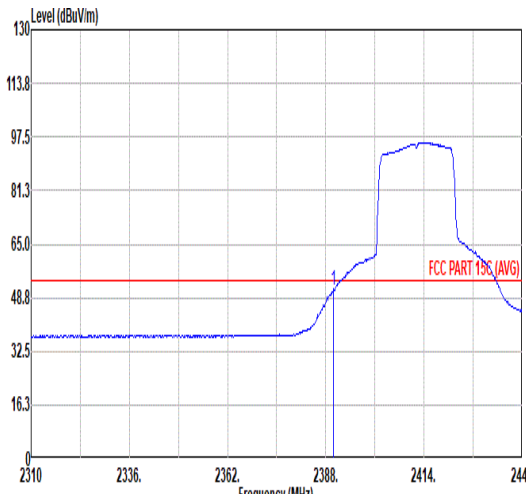
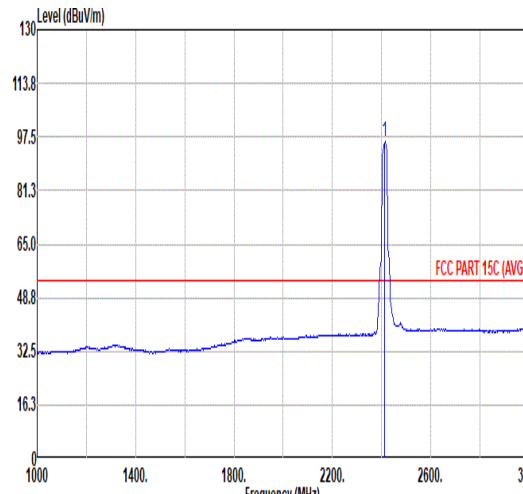


Mode	1																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																																																																														
ANT	6																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>66.56</td><td>74.00</td><td>-7.44</td><td>58.32</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	66.56	74.00	-7.44	58.32	31.94	7.16	36.86	6.00	206	311	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.97</td><td>-----</td><td>-----</td><td>97.49</td><td>32.14</td><td>7.20</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.97	-----	-----	97.49	32.14	7.20	36.86	6.00	206	311
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.82	66.56	74.00	-7.44	58.32	31.94	7.16	36.86	6.00	206	311	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	105.97	-----	-----	97.49	32.14	7.20	36.86	6.00	206	311	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.83</td><td>54.00</td><td>-3.17</td><td>42.59</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.83	54.00	-3.17	42.59	31.94	7.16	36.86	6.00	206	311	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.94</td><td>-----</td><td>-----</td><td>87.42</td><td>32.17</td><td>7.21</td><td>36.86</td><td>6.00</td><td>206</td><td>311</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.94	-----	-----	87.42	32.17	7.21	36.86	6.00	206	311
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.95	50.83	54.00	-3.17	42.59	31.94	7.16	36.86	6.00	206	311	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	95.94	-----	-----	87.42	32.17	7.21	36.86	6.00	206	311	AVERAGE																																																																																																			







Mode	1																																																					
	Band Edge																																																					
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																					
ANT	6																																																					
Pol.	Vertical						Fundamental																																															
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.91</td><td>65.71</td><td>74.00</td><td>-8.29</td><td>57.48</td><td>31.93</td><td>7.16</td><td>36.86</td><td>6.00</td><td>312</td><td>52 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	65.71	74.00	-8.29	57.48	31.93	7.16	36.86	6.00	312
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2388.91	65.71	74.00	-8.29	57.48	31.93	7.16	36.86	6.00	312	52 PEAK																																											
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>48.00</td><td>54.00</td><td>-6.00</td><td>39.76</td><td>31.94</td><td>7.16</td><td>36.86</td><td>6.00</td><td>312</td><td>52 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	48.00	54.00	-6.00	39.76	31.94	7.16	36.86	6.00	312
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.82	48.00	54.00	-6.00	39.76	31.94	7.16	36.86	6.00	312	52 AVERAGE																																											
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.99</td><td>-----</td><td>-----</td><td>95.51</td><td>32.14</td><td>7.20</td><td>36.86</td><td>6.00</td><td>312</td><td>52 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.99	-----	-----	95.51	32.14	7.20	36.86	6.00	312
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2412.00	103.99	-----	-----	95.51	32.14	7.20	36.86	6.00	312	52 PEAK																																											
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.97</td><td>-----</td><td>-----</td><td>85.49</td><td>32.14</td><td>7.20</td><td>36.86</td><td>6.00</td><td>312</td><td>52 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.97	-----	-----	85.49	32.14	7.20	36.86	6.00	312
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2412.00	93.97	-----	-----	85.49	32.14	7.20	36.86	6.00	312	52 AVERAGE																																											

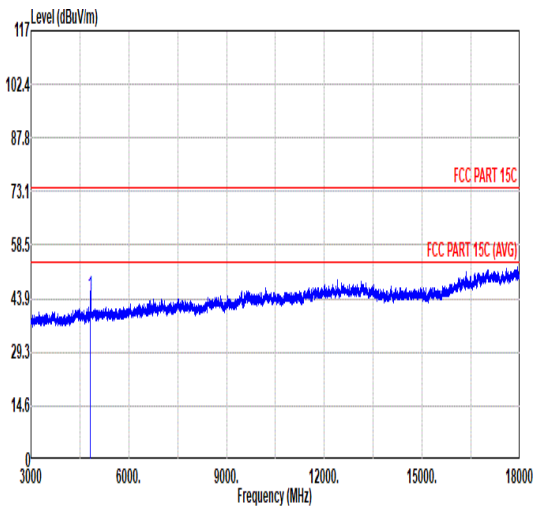
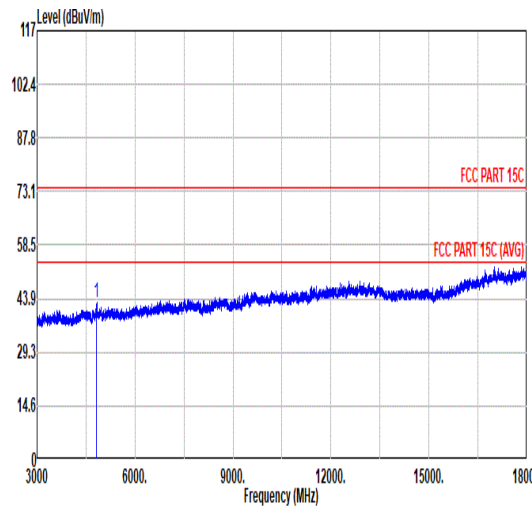


Mode	1																																																																																																							
	Harmonic																																																																																																							
	2400-2483.5_802.11ax HE20_CH01_Full_2412MHz																																																																																																							
ANT	6																																																																																																							
Pol.	Horizontal						Vertical																																																																																																	
Peak Avg																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>44.42</td><td>74.00</td><td>-29.58</td><td>64.97</td><td>34.40</td><td>10.29</td><td>65.24</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4824.00	44.42	74.00	-29.58	64.97	34.40	10.29	65.24	0.00	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>43.04</td><td>74.00</td><td>-30.96</td><td>63.59</td><td>34.40</td><td>10.29</td><td>65.24</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4824.00	43.04	74.00	-30.96	63.59	34.40	10.29	65.24	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	4824.00	44.42	74.00	-29.58	64.97	34.40	10.29	65.24	0.00	--	--	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	4824.00	43.04	74.00	-30.96	63.59	34.40	10.29	65.24	0.00	--	--	PEAK																																																																																												

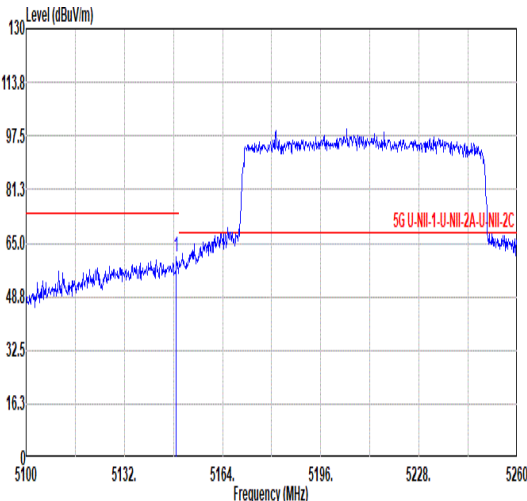
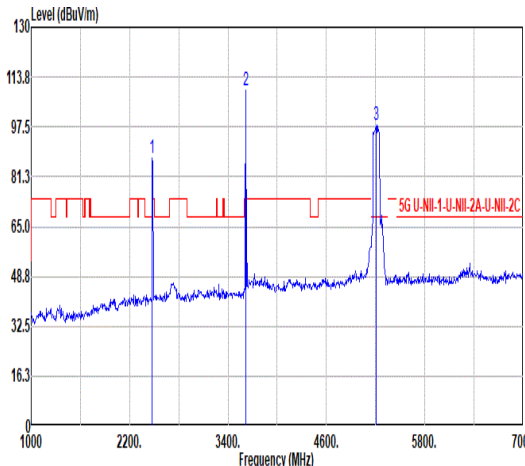
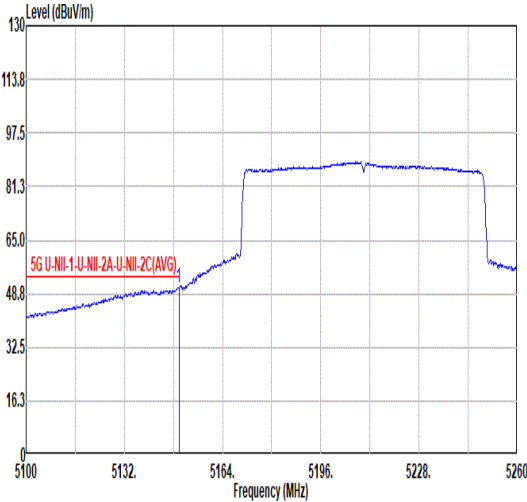
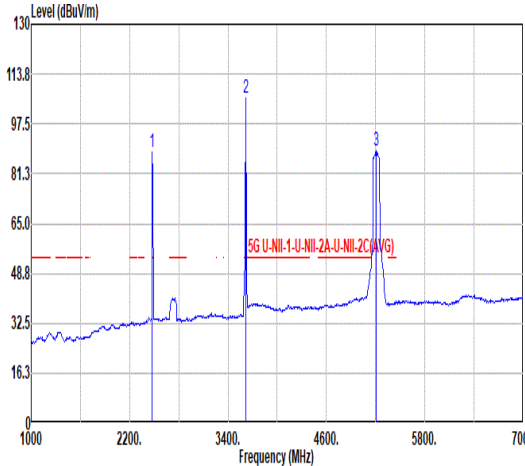


		2																																																																																																																								
Mode		Band Edge - L																																																																																																																								
		U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																																																																								
ANT		6																																																																																																																								
Pol.		Horizontal						Fundamental																																																																																																																		
Peak																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.96</td><td>60.84</td><td>74.00</td><td>-13.16</td><td>52.93</td><td>34.60</td><td>10.65</td><td>37.34</td><td>0.00</td><td>101</td><td>236</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5148.96	60.84	74.00	-13.16	52.93	34.60	10.65	37.34	0.00	101	236	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2476.00</td><td>87.52</td><td>-----</td><td>84.45</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>101</td><td>236</td><td>Peak</td></tr><tr><td>2</td><td>3616.00</td><td>109.54</td><td>-----</td><td>104.37</td><td>32.86</td><td>8.89</td><td>36.58</td><td>0.00</td><td>101</td><td>236</td><td>Peak</td></tr><tr><td>3</td><td>5210.00</td><td>98.23</td><td>-----</td><td>90.15</td><td>34.68</td><td>10.72</td><td>37.32</td><td>0.00</td><td>101</td><td>236</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2476.00	87.52	-----	84.45	32.60	7.32	36.85	0.00	101	236	Peak	2	3616.00	109.54	-----	104.37	32.86	8.89	36.58	0.00	101	236	Peak	3	5210.00	98.23	-----	90.15	34.68	10.72	37.32	0.00	101	236
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	5148.96	60.84	74.00	-13.16	52.93	34.60	10.65	37.34	0.00	101	236	PEAK																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	2476.00	87.52	-----	84.45	32.60	7.32	36.85	0.00	101	236	Peak																																																																																																															
2	3616.00	109.54	-----	104.37	32.86	8.89	36.58	0.00	101	236	Peak																																																																																																															
3	5210.00	98.23	-----	90.15	34.68	10.72	37.32	0.00	101	236	PEAK																																																																																																															
Avg																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>50.67</td><td>54.00</td><td>-3.33</td><td>42.76</td><td>34.60</td><td>10.65</td><td>37.34</td><td>0.00</td><td>101</td><td>236</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.76	50.67	54.00	-3.33	42.76	34.60	10.65	37.34	0.00	101	236	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2476.00</td><td>88.52</td><td>-----</td><td>85.45</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>101</td><td>236</td><td>Average</td></tr><tr><td>2</td><td>3616.00</td><td>106.02</td><td>-----</td><td>100.85</td><td>32.86</td><td>8.89</td><td>36.58</td><td>0.00</td><td>101</td><td>236</td><td>Average</td></tr><tr><td>3</td><td>5210.00</td><td>88.73</td><td>-----</td><td>80.65</td><td>34.69</td><td>10.71</td><td>37.32</td><td>0.00</td><td>101</td><td>236</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2476.00	88.52	-----	85.45	32.60	7.32	36.85	0.00	101	236	Average	2	3616.00	106.02	-----	100.85	32.86	8.89	36.58	0.00	101	236	Average	3	5210.00	88.73	-----	80.65	34.69	10.71	37.32	0.00	101	236
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	5149.76	50.67	54.00	-3.33	42.76	34.60	10.65	37.34	0.00	101	236	AVERAGE																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	2476.00	88.52	-----	85.45	32.60	7.32	36.85	0.00	101	236	Average																																																																																																															
2	3616.00	106.02	-----	100.85	32.86	8.89	36.58	0.00	101	236	Average																																																																																																															
3	5210.00	88.73	-----	80.65	34.69	10.71	37.32	0.00	101	236	AVERAGE																																																																																																															

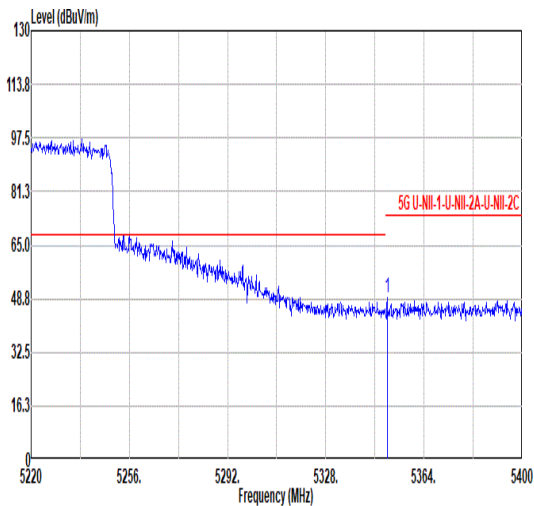
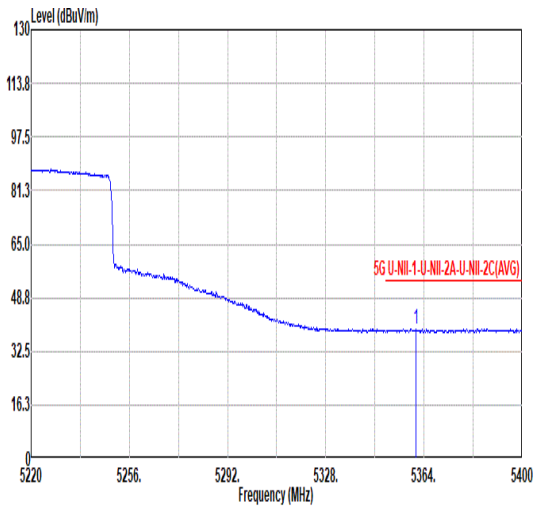


Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																							
ANT	6																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.50</td><td>49.25</td><td>74.00</td><td>-24.75</td><td>40.90</td><td>34.00</td><td>10.84</td><td>37.29</td><td>0.00</td><td>101</td><td>236</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.50	49.25	74.00	-24.75	40.90	34.00	10.84	37.29	0.00	101	236	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5350.50	49.25	74.00	-24.75	40.90	34.00	10.84	37.29	0.00	101	236	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5361.12</td><td>39.34</td><td>54.00</td><td>-14.66</td><td>31.02</td><td>34.76</td><td>10.85</td><td>37.29</td><td>0.00</td><td>101</td><td>236</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5361.12	39.34	54.00	-14.66	31.02	34.76	10.85	37.29	0.00	101	236	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5361.12	39.34	54.00	-14.66	31.02	34.76	10.85	37.29	0.00	101	236	AVERAGE																																												

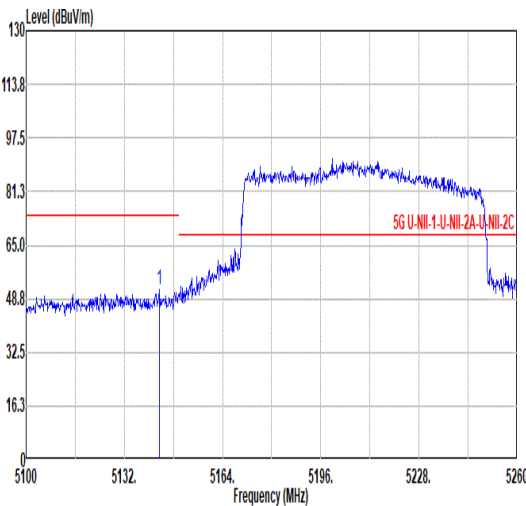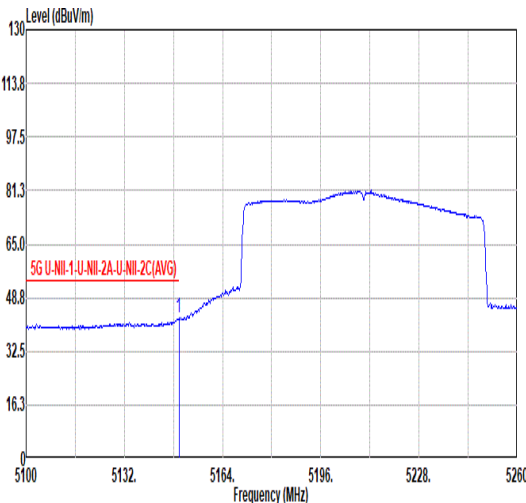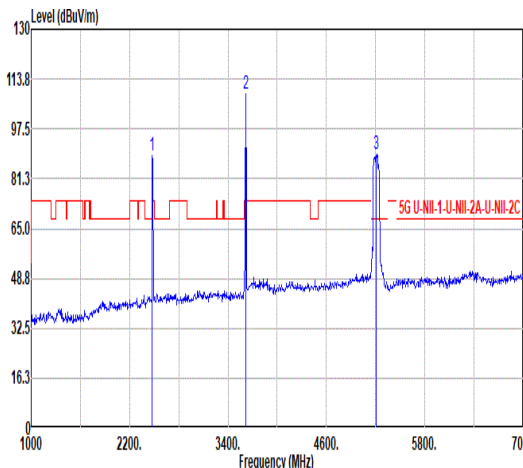
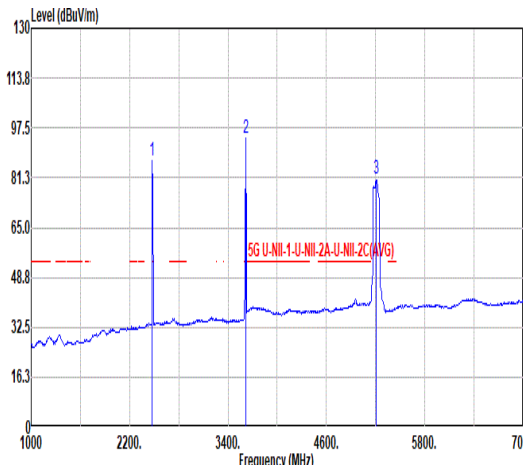


		2																																																																											
Mode		Band Edge - L																																																																											
		U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																											
ANT		6																																																																											
Pol.		Vertical					Fundamental																																																																						
Peak																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5143.36</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>43.40</td><td>34.63</td><td>10.65</td><td>37.34</td><td>0.00</td><td>376</td><td>116</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5143.36	51.34	74.00	-22.66	43.40	34.63	10.65	37.34	0.00	376	116	PEAK																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	5143.36	51.34	74.00	-22.66	43.40	34.63	10.65	37.34	0.00	376	116	PEAK																																																																	
Avg																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>34.57</td><td>34.60</td><td>10.65</td><td>37.34</td><td>0.00</td><td>376</td><td>116</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	42.48	54.00	-11.52	34.57	34.60	10.65	37.34	0.00	376	116	AVERAGE																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	5149.76	42.48	54.00	-11.52	34.57	34.60	10.65	37.34	0.00	376	116	AVERAGE																																																																	
Peak																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2476.00</td><td>88.86</td><td>-----</td><td>85.79</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>376</td><td>116</td><td>Peak</td></tr><tr><td>2</td><td>3616.00</td><td>108.67</td><td>-----</td><td>103.50</td><td>32.86</td><td>8.89</td><td>36.58</td><td>0.00</td><td>376</td><td>116</td><td>Peak</td></tr><tr><td>3</td><td>5210.00</td><td>89.32</td><td>-----</td><td>81.24</td><td>34.68</td><td>10.72</td><td>37.32</td><td>0.00</td><td>376</td><td>116</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2476.00	88.86	-----	85.79	32.60	7.32	36.85	0.00	376	116	Peak	2	3616.00	108.67	-----	103.50	32.86	8.89	36.58	0.00	376	116	Peak	3	5210.00	89.32	-----	81.24	34.68	10.72	37.32	0.00	376	116
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2476.00	88.86	-----	85.79	32.60	7.32	36.85	0.00	376	116	Peak																																																																		
2	3616.00	108.67	-----	103.50	32.86	8.89	36.58	0.00	376	116	Peak																																																																		
3	5210.00	89.32	-----	81.24	34.68	10.72	37.32	0.00	376	116	PEAK																																																																		
Avg																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2476.00</td><td>86.75</td><td>-----</td><td>83.68</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>376</td><td>116</td><td>Average</td></tr><tr><td>2</td><td>3616.00</td><td>94.11</td><td>-----</td><td>88.94</td><td>32.86</td><td>8.89</td><td>36.58</td><td>0.00</td><td>376</td><td>116</td><td>Average</td></tr><tr><td>3</td><td>5210.00</td><td>80.75</td><td>-----</td><td>77.68</td><td>32.60</td><td>7.32</td><td>36.85</td><td>0.00</td><td>376</td><td>116</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2476.00	86.75	-----	83.68	32.60	7.32	36.85	0.00	376	116	Average	2	3616.00	94.11	-----	88.94	32.86	8.89	36.58	0.00	376	116	Average	3	5210.00	80.75	-----	77.68	32.60	7.32	36.85	0.00	376	116
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	2476.00	86.75	-----	83.68	32.60	7.32	36.85	0.00	376	116	Average																																																																		
2	3616.00	94.11	-----	88.94	32.86	8.89	36.58	0.00	376	116	Average																																																																		
3	5210.00	80.75	-----	77.68	32.60	7.32	36.85	0.00	376	116	AVERAGE																																																																		



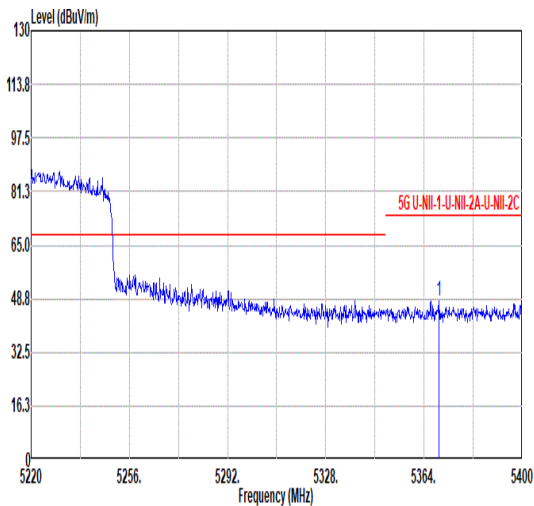
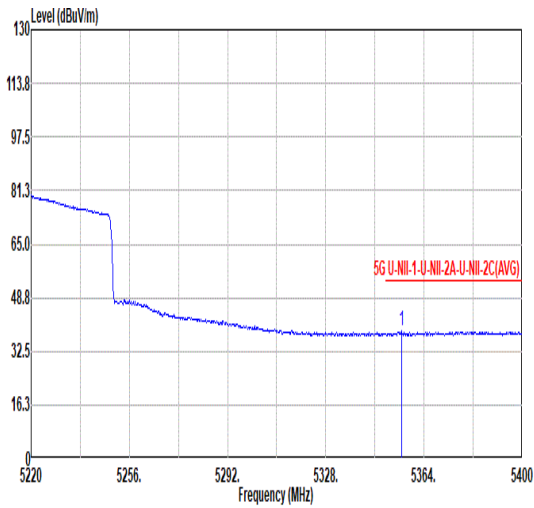


Mode	2																																																
	Band Edge - R																																																
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																
ANT	6																																																
Pol.	Vertical						Fundamental																																										
Peak							Blank																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5369.40</td><td>48.08</td><td>74.00</td><td>-25.92</td><td>39.79</td><td>34.72</td><td>10.86</td><td>37.29</td><td>0.00</td><td>376</td><td>116</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5369.40	48.08	74.00	-25.92	39.79	34.72
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																							
1	5369.40	48.08	74.00	-25.92	39.79	34.72	10.86	37.29	0.00	376	116	PEAK																																					
Avg							Blank																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5355.72</td><td>38.67</td><td>54.00</td><td>-15.33</td><td>30.33</td><td>34.78</td><td>10.85</td><td>37.29</td><td>0.00</td><td>376</td><td>116</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5355.72	38.67	54.00	-15.33	30.33	34.78
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																							
1	5355.72	38.67	54.00	-15.33	30.33	34.78	10.85	37.29	0.00	376	116	AVERAGE																																					



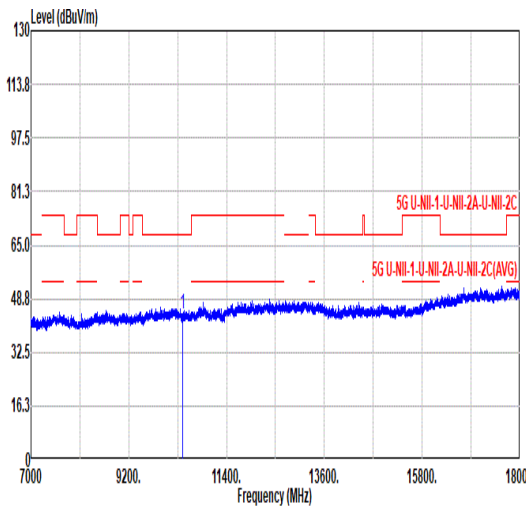
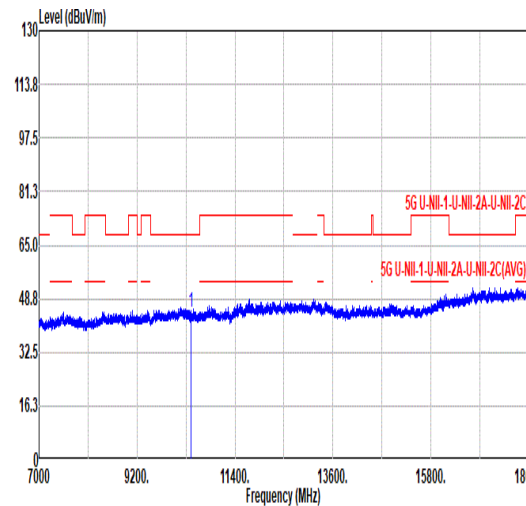


Mode	2																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																																																
ANT	6																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10420.00</td><td>44.20</td><td>68.20</td><td>-24.00</td><td>57.82</td><td>37.60</td><td>15.33</td><td>66.55</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	44.20	68.20	-24.00	57.82	37.60	15.33	66.55	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10420.00</td><td>44.50</td><td>68.20</td><td>-23.70</td><td>58.09</td><td>37.62</td><td>15.34</td><td>66.55</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	44.50	68.20	-23.70	58.09	37.62	15.34	66.55	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	10420.00	44.20	68.20	-24.00	57.82	37.60	15.33	66.55	0.00	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	10420.00	44.50	68.20	-23.70	58.09	37.62	15.34	66.55	0.00	--	PEAK																																																																																						

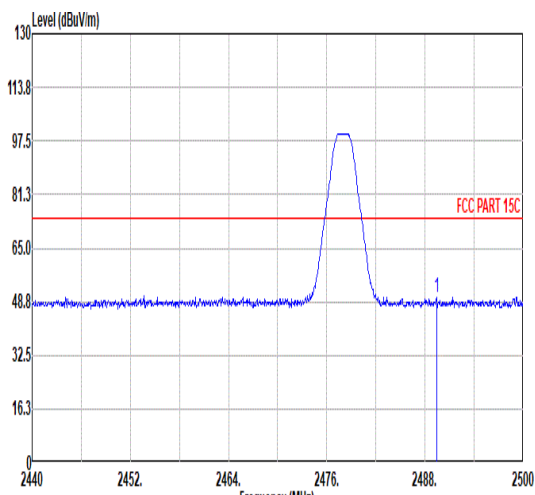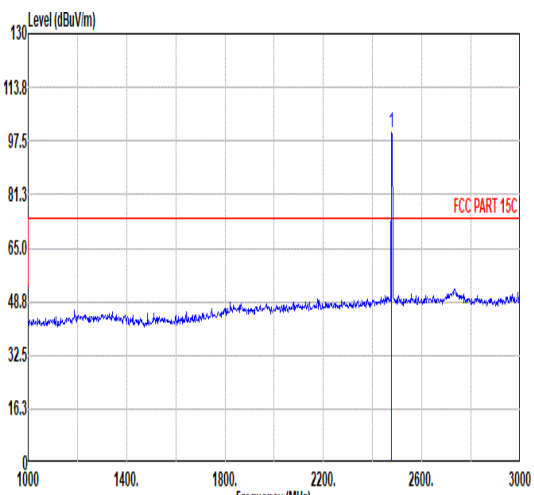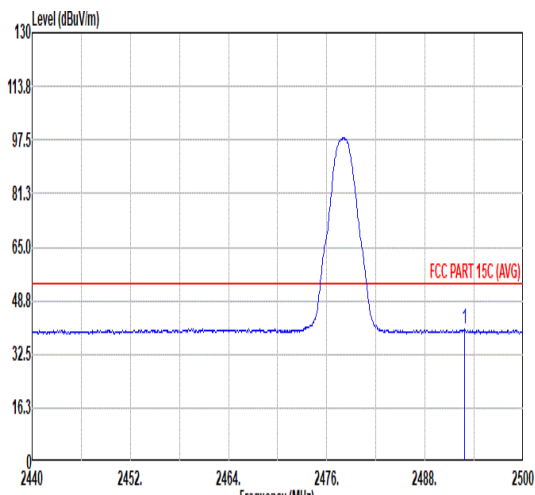
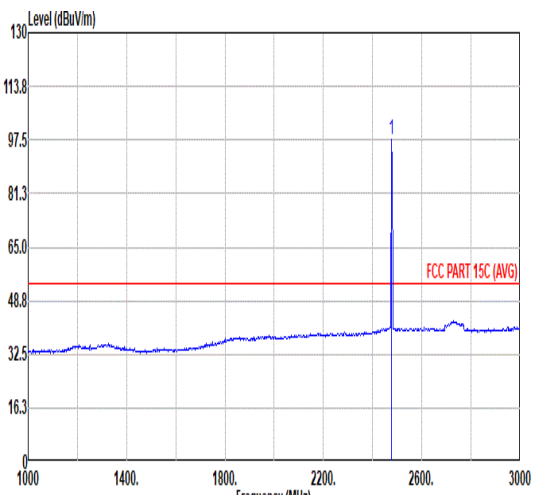


Mode	2																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																																		
ANT	6																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2489.44</td><td>50.27</td><td>74.00</td><td>-23.73</td><td>41.18</td><td>32.60</td><td>7.34</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.44	50.27	74.00	-23.73	41.18	32.60	7.34	36.85	6.00	163	301	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>100.04</td><td>-----</td><td>-----</td><td>90.97</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	100.04	-----	-----	90.97	32.60	7.32	36.85	6.00	163	301
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2489.44	50.27	74.00	-23.73	41.18	32.60	7.34	36.85	6.00	163	301	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	100.04	-----	-----	90.97	32.60	7.32	36.85	6.00	163	301	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2492.00</td><td>40.02</td><td>54.00</td><td>-13.98</td><td>30.92</td><td>32.60</td><td>7.35</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.00	40.02	54.00	-13.98	30.92	32.60	7.35	36.85	6.00	163	301	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>97.84</td><td>-----</td><td>-----</td><td>88.77</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>163</td><td>301</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	97.84	-----	-----	88.77	32.60	7.32	36.85	6.00	163	301
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2492.00	40.02	54.00	-13.98	30.92	32.60	7.35	36.85	6.00	163	301	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2478.00	97.84	-----	-----	88.77	32.60	7.32	36.85	6.00	163	301	AVERAGE																																																																																							

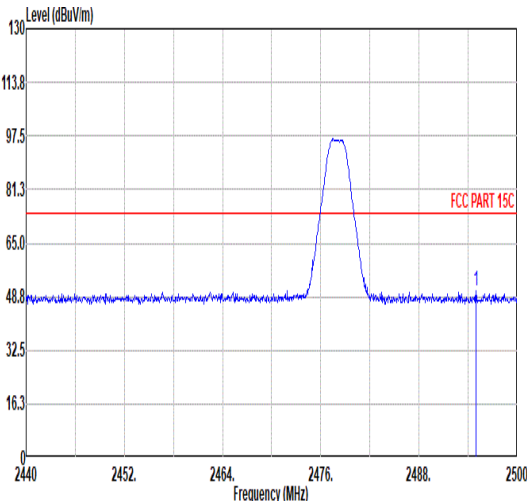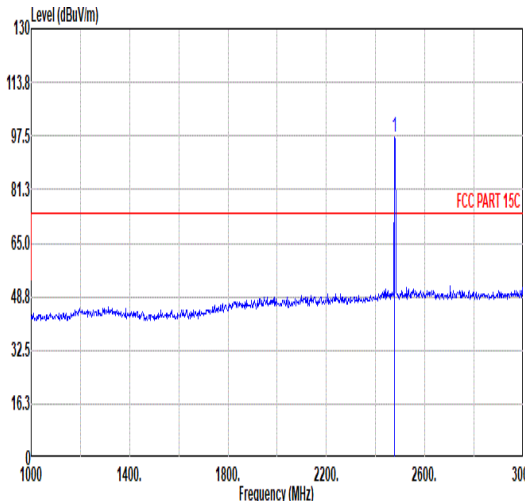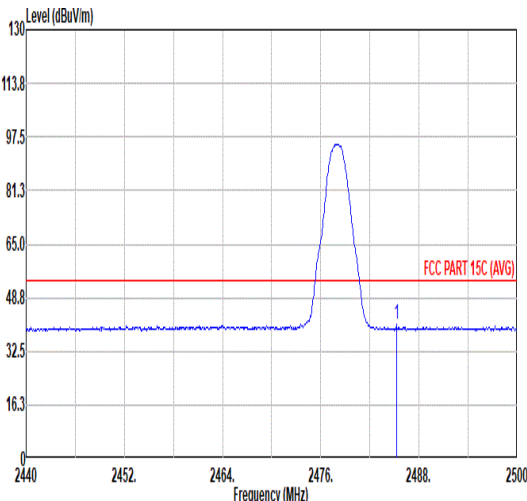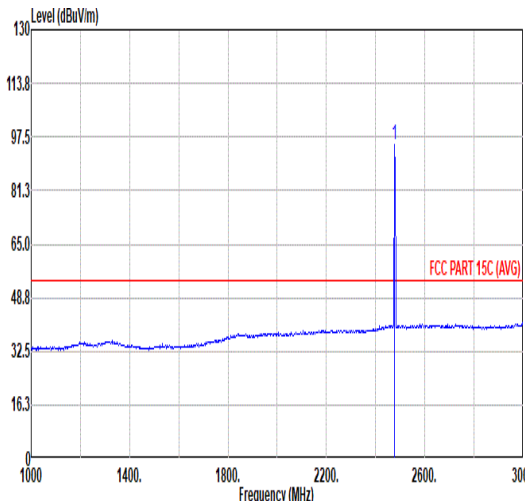

Mode	2																																																						
	Band Edge																																																						
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																						
ANT	6																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.96</td><td>50.36</td><td>74.00</td><td>-23.64</td><td>41.26</td><td>32.60</td><td>7.35</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.96	50.36	74.00	-23.64	41.26	32.60	7.35	36.85	6.00	303	56
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2494.96	50.36	74.00	-23.64	41.26	32.60	7.35	36.85	6.00	303	56	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>97.33</td><td>-----</td><td>-----</td><td>88.26</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	97.33	-----	-----	88.26	32.60	7.32	36.85	6.00	303	56
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2478.00	97.33	-----	-----	88.26	32.60	7.32	36.85	6.00	303	56	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.24</td><td>40.48</td><td>54.00</td><td>-13.52</td><td>31.40</td><td>32.60</td><td>7.33</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.24	40.48	54.00	-13.52	31.40	32.60	7.33	36.85	6.00	303	56
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2485.24	40.48	54.00	-13.52	31.40	32.60	7.33	36.85	6.00	303	56	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>95.32</td><td>-----</td><td>-----</td><td>86.25</td><td>32.60</td><td>7.32</td><td>36.85</td><td>6.00</td><td>303</td><td>56</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	95.32	-----	-----	86.25	32.60	7.32	36.85	6.00	303	56
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2478.00	95.32	-----	-----	86.25	32.60	7.32	36.85	6.00	303	56	AVERAGE																																											

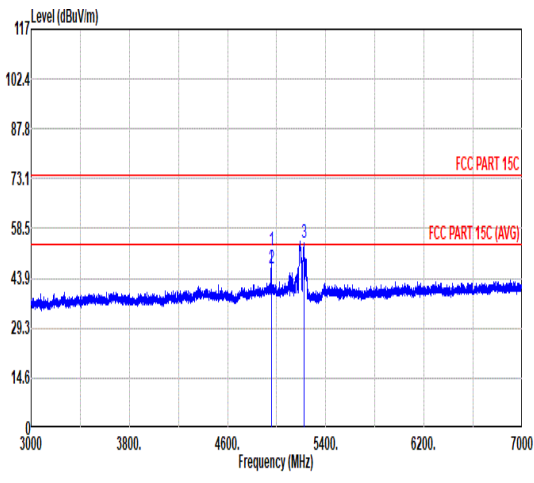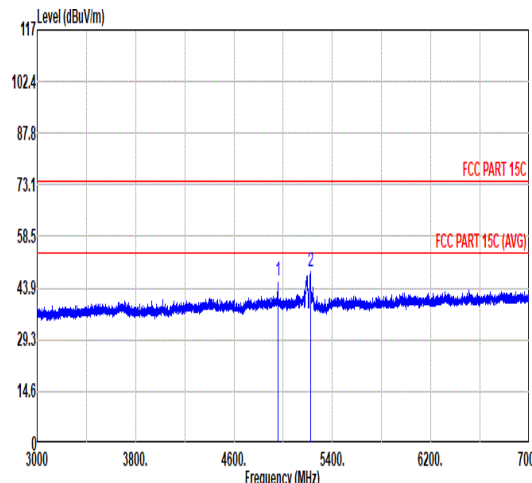

Mode	2																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_2400-2483.5_Bluetooth-LE_CH38_Full_2478MHz																																																																																																																																									
ANT	6																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																			
Peak Avg																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>51.92</td><td>74.00</td><td>-22.08</td><td>72.55</td><td>34.56</td><td>10.44</td><td>65.63</td><td>0.00</td><td>100</td><td>234</td><td>PEAK</td></tr><tr><td>2</td><td>4956.00</td><td>46.87</td><td>54.00</td><td>-7.13</td><td>67.50</td><td>34.56</td><td>10.44</td><td>65.63</td><td>0.00</td><td>100</td><td>234</td><td>AVERAGE</td></tr><tr><td>3</td><td>5222.00</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>74.58</td><td>34.66</td><td>10.73</td><td>65.70</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	51.92	74.00	-22.08	72.55	34.56	10.44	65.63	0.00	100	234	PEAK	2	4956.00	46.87	54.00	-7.13	67.50	34.56	10.44	65.63	0.00	100	234	AVERAGE	3	5222.00	54.27	74.00	-19.73	74.58	34.66	10.73	65.70	0.00	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>46.02</td><td>74.00</td><td>-27.98</td><td>66.65</td><td>34.56</td><td>10.44</td><td>65.63</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>5224.00</td><td>48.44</td><td>74.00</td><td>-25.56</td><td>68.76</td><td>34.65</td><td>10.73</td><td>65.70</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	46.02	74.00	-27.98	66.65	34.56	10.44	65.63	0.00	--	--	PEAK	2	5224.00	48.44	74.00	-25.56	68.76	34.65	10.73	65.70	0.00	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	4956.00	51.92	74.00	-22.08	72.55	34.56	10.44	65.63	0.00	100	234	PEAK																																																																																																																														
2	4956.00	46.87	54.00	-7.13	67.50	34.56	10.44	65.63	0.00	100	234	AVERAGE																																																																																																																														
3	5222.00	54.27	74.00	-19.73	74.58	34.66	10.73	65.70	0.00	--	--	Peak																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	4956.00	46.02	74.00	-27.98	66.65	34.56	10.44	65.63	0.00	--	--	PEAK																																																																																																																														
2	5224.00	48.44	74.00	-25.56	68.76	34.65	10.73	65.70	0.00	--	--	Peak																																																																																																																														

Note: For all plots above, the over limit line signals are Fundamental signal which can be ignored.




LTE Band 48 / 20MHz / QPSK / Ant.5								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7231	-58.82	-40	-18.82	-70.28	2.84	14.30	H
	10850	-56.40	-40	-16.40	-66.34	3.49	13.43	H
	14469	-61.02	-40	-21.02	-71.26	3.85	14.09	H
	7231	-60.93	-40	-20.93	-72.39	2.84	14.30	V
	10850	-49.88	-40	-9.88	-59.82	3.49	13.43	V
	14469	-57.38	-40	-17.38	-67.62	3.85	14.09	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Part 96_ LTE Band 48

ANT 5


Horizontal

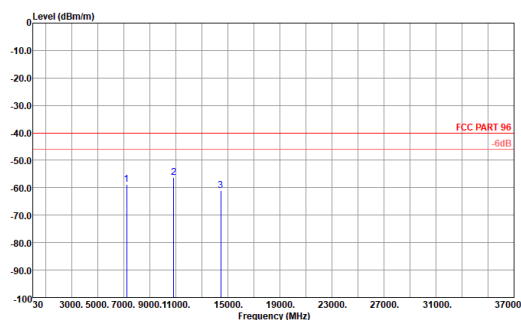

Site : 03CH04-KS
Condition : FCC PART 96 3m HF PART 22/24/27 HORIZONTAL

	Freq	Level	Over	Limit	Read	Pol/Phase
	MHz	dBm/m	Limit	Line	Level	
1	7231.00	-58.82	-18.82	-40.00	-53.06	HORIZONTAL
2	10850.00	-56.40	-16.40	-40.00	-57.88	HORIZONTAL
3	14469.00	-61.02	-21.02	-40.00	-65.52	HORIZONTAL

Vertical

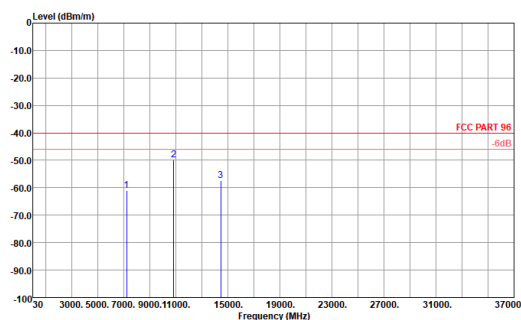

Site : 03CH04-KS
Condition : FCC PART 96 3m HF PART 22/24/27 VERTICAL

	Freq	Level	Over	Limit	Read	Pol/Phase
	MHz	dBm/m	Limit	Line	Level	
1	7231.00	-60.93	-20.93	-40.00	-55.14	VERTICAL
2	10850.00	-49.88	-9.88	-40.00	-51.26	VERTICAL
3	14469.00	-57.38	-17.38	-40.00	-61.87	VERTICAL



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 24090RA29G
FCC ID : 2AFZZRA29G
STANDARD : 47 CFR Part 27 Subpart O (3700-3980MHz)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jul. 23, 2024 ~ Aug. 23, 2024

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum EIRP and Emission Designator	6
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	13
3.1 Measuring Instruments	13
3.2 Test Setup	13
3.3 Test Result of Conducted Test	13
3.4 Conducted Output Power and EIRP	14
3.5 Peak-to-Average Ratio	15
3.6 Occupied Bandwidth	16
3.7 Conducted Band Edge	17
3.8 Conducted Spurious Emission	18
3.9 Frequency Stability	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	21
4.4 Radiated Spurious Emission	22
5 LIST OF MEASURING EQUIPMENT	23
6 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG471506M	Rev. 01	Initial issue of report	Aug. 23, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 29.7 dB at 7404.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	24090RA29G
FCC ID	2AFZZRA29G
IMEI Code	Conducted : 861793070041221/861793070041239 Radiation : 861793070039324/861793070039332
HW Version	135300O16
SW Version	Xiaomi HyperOS 1.0
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
SCS	30kHz
Bandwidth	n77: 10 / 15 / 20 / 40 / 50 / 60 / 80 / 90 / 100MHz n78: 10 / 15 / 20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 2> 5G NR n77: -1.81 dBi 5G NR n78: -1.81 dBi <Ant. 3> 5G NR n77: -0.81 dBi 5G NR n78: -4.71 dBi <Ant. 5> 5G NR n77: -0.6 dBi 5G NR n78: -0.6 dBi <Ant. 7> 5G NR n77: -2 dBi 5G NR n78: -2.94 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of ANT 5 for 5G NR n77/n78 is shown in the report.
2. The device supports n77(1T4R) SRS resources on Antenna 2/3/5/7, only the test data of worst Antenna 5 is showed in the report according to the maximum power.
3. 5G NR n77/n78 support SA and NSA mode. The whole testing has assessed SA mode for n77 by referring to the higher conducted power for conducted test items.
4. The device supports HPUE mode for 5G NR n77/n78.
5. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
6. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP and Emission Designator

5G NR n77 SA for SCS 30kHz		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3975.00	0.3631	8M57G7D	0.3148	8M57W7D
15	3705.52 ~ 3972.48	0.3715	13M6G7D	0.3020	13M6W7D
20	3710.01 ~ 3969.99	0.3758	18M3G7D	0.3055	18M2W7D
40	3720.00 ~ 3960.00	0.3707	37M8G7D	0.3105	37M8W7D
50	3725.01 ~ 3954.99	0.3690	47M5G7D	0.3013	47M6W7D
60	3730.02 ~ 3949.98	0.3724	57M7G7D	0.2979	57M8W7D
80	3740.01 ~ 3939.99	0.3631	77M6G7D	0.2924	77M6W7D
90	3745.02 ~ 3934.98	0.3556	87M5G7D	0.3581	87M6W7D
100	3750.00 ~ 3930.00	0.3802	97M4G7D	0.3251	97M7W7D



5G NR n78 SA for SCS 30kHz		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3795.00	0.3350	8M57G7D	0.2679	8M57W7D
15	3707.52 ~ 3792.48	0.3404	13M6G7D	0.2673	13M6W7D
20	3710.01 ~ 3789.99	0.3556	18M3G7D	0.2844	18M2W7D
30	3715.02 ~ 3784.98	0.3656	27M8G7D	0.3069	27M9W7D
40	3720.00 ~ 3780.00	0.3614	37M8G7D	0.3041	37M8W7D
50	3725.01 ~ 3774.99	0.3639	47M5G7D	0.2965	47M6W7D
60	3730.02 ~ 3769.98	0.3622	57M7G7D	0.3006	57M8W7D
70	3735.00 ~ 3765.00	0.3707	67M7G7D	0.3020	67M5W7D
80	3740.01 ~ 3759.99	0.3681	77M6G7D	0.3055	77M6W7D
90	3745.02 ~ 3754.98	0.3698	87M5G7D	0.3020	87M6W7D
100	3750.00 ~ 3750.00	0.3724	97M4G7D	0.2979	97M7W7D

Note:

1. 5G NR n77 overlaps the entire frequency range of 5G NR n78, and n77 power > n78 power. Therefore, the conducted test results of n77 provided in this report cover n78, except the 30M and 70M BW of n78 are additional test.
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH04-KS	AUDIX	E3	210616

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)											Modulation					RB #			Test Channel		
		10	15	20	25	30	40	50	60	70	80~90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Partial	Full	L	M	H
Max. Output Power	n77	v	v	v	-	-	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n77			v	-	-				-			v	v				v		v			
	n78				-	v							v	v				v		v		v	
26dB and 99% Bandwidth	n77	v	v	v	-	-	v	v	v	-	v	v		v	v	v	v			v		v	
	n78				-	v				v				v	v	v	v			v		v	
Conducted Band Edge	n77	v			-	-		v		-		v	v	v				v		v	v		v
	n78				-	v				v			v	v				v		v	v		v
Conducted Spurious Emission	n77	v			-	-		v		-		v	v	v				v			v	v	v
	n78				-	v				v			v	v				v			v	v	v
Frequency Stability	n77			v	-	-				-				v						v		v	
	n78				-	v								v						v		v	
E.I.R.P	n77	v	v	v	-	-	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n77	Worst Case																				v	
	n78	Worst Case																				v	
Note	1.	The mark "v" means that this configuration is chosen for testing																					
	2.	The mark "-" means that this bandwidth is not supported.																					
	3.	The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																					
	4.	Frequency Stability : Normal Voltage = 3.91V; Low Voltage =3.6V; High Voltage =4.3V.																					

2.2 Connection Diagram of Test System

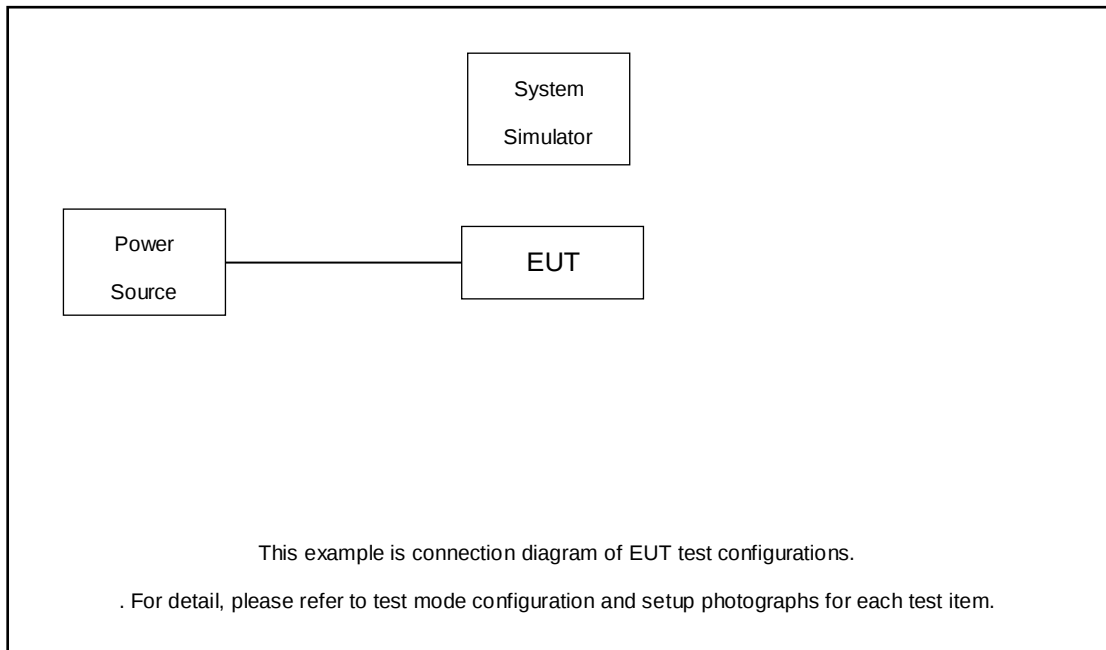

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.5 dB and 20dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 6.5 + 20 = 26.5 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G n77 (30kHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G n78(30kHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	3750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

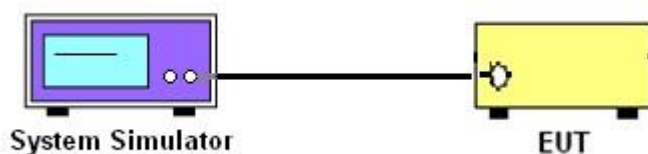

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

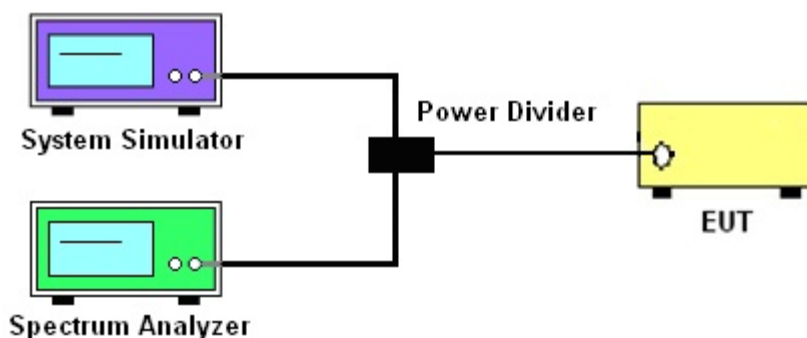

3.2.3 Frequency Stability

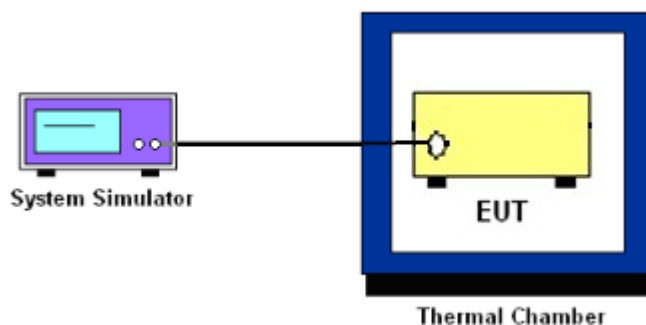

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

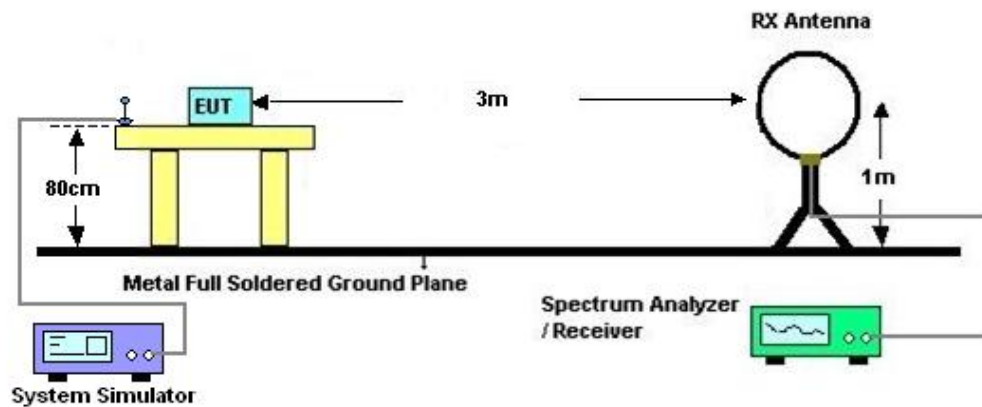

4.2.2 For radiated test from 30MHz to 1GHz

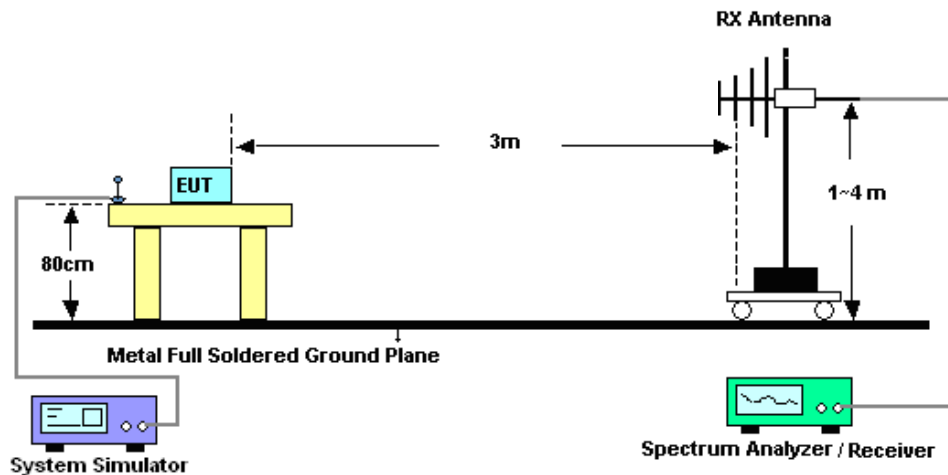

4.2.3 For radiated test above 1GHz

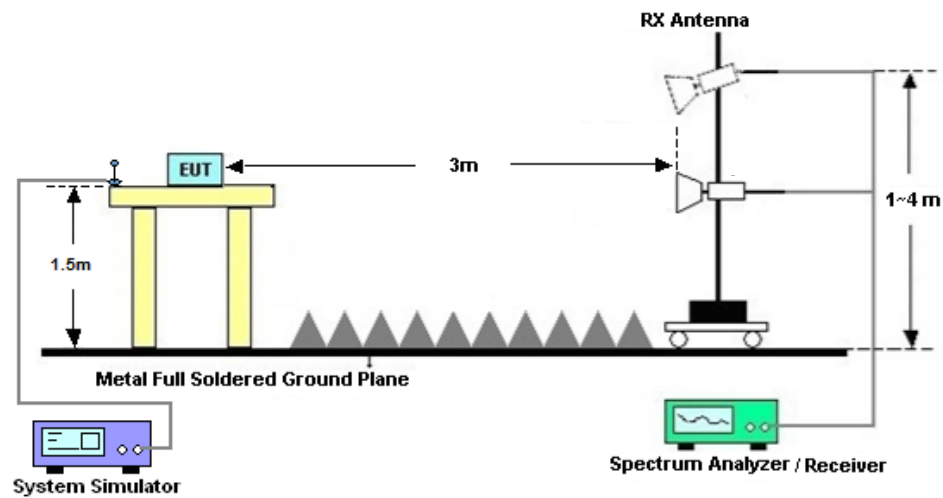

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 25, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Jul. 25, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jul. 25, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 11, 2023	Jul. 23, 2024~ Aug. 23, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11 2023	Jul. 23, 2024~ Aug. 23, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	Apr. 18, 2024	Jul. 23, 2024~ Aug. 23, 2024	Apr. 17, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Jul. 23, 2024~ Aug. 23, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Jul. 23, 2024~ Aug. 23, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Jul. 23, 2024~ Aug. 23, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Jul. 23, 2024~ Aug. 23, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 11, 2023	Jul. 23, 2024~ Aug. 23, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz-18Ghz	Oct. 11, 2023	Jul. 23, 2024~ Aug. 23, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 23, 2024~ Aug. 23, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 23, 2024~ Aug. 23, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 23, 2024~ Aug. 23, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.82dB
---	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N77_ANT5

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-0.6dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP(W)
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	135@67	25.55	24.95	0.3126
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	26.17	25.57	0.3606
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@271	25.87	25.27	0.3365
77	30	100	650000	3750	DFT-s-OFDM QPSK	135@67	25.6	25	0.3162
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@1	26.17	25.57	0.3606
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@271	25.93	25.33	0.3412
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	135@67	24.57	23.97	0.2495
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@1	25.26	24.66	0.2924
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@271	24.98	24.38	0.2742
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	135@67	23.13	22.53	0.1791
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@1	23.87	23.27	0.2123
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@271	23.68	23.08	0.2032
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	135@67	21.15	20.55	0.1135
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@1	21.69	21.09	0.1285
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@271	21.46	20.86	0.1219
77	30	100	650000	3750	CP-OFDM QPSK	137@68	24.07	23.47	0.2223
77	30	100	650000	3750	CP-OFDM QPSK	1@1	24.67	24.07	0.2553
77	30	100	650000	3750	CP-OFDM QPSK	1@271	24.46	23.86	0.2432
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	135@67	25.83	25.23	0.3334
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.66	25.06	0.3206
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@271	26.16	25.56	0.3597
77	30	100	656000	3840	DFT-s-OFDM QPSK	135@67	25.86	25.26	0.3357
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@1	25.74	25.14	0.3266
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@271	26.19	25.59	0.3622
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	135@67	24.87	24.27	0.2673
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.75	24.15	0.2600
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@271	25.35	24.75	0.2985
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	135@67	23.41	22.81	0.1910
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@1	23.42	22.82	0.1914
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@271	23.98	23.38	0.2178
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	135@67	21.41	20.81	0.1205
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@1	21.2	20.6	0.1148
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@271	21.75	21.15	0.1303
77	30	100	656000	3840	CP-OFDM QPSK	137@68	24.33	23.73	0.2360
77	30	100	656000	3840	CP-OFDM QPSK	1@1	24.2	23.6	0.2291
77	30	100	656000	3840	CP-OFDM QPSK	1@271	24.84	24.24	0.2655
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	135@67	26.23	25.63	0.3656



77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@1	26.1	25.5	0.3548
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@271	26.4	25.8	0.3802
77	30	100	662000	3930	DFT-s-OFDM QPSK	135@67	26.32	25.72	0.3733
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@1	26.09	25.49	0.3540
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@271	26.38	25.78	0.3784
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	135@67	25.37	24.77	0.2999
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@1	25.19	24.59	0.2877
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@271	25.72	25.12	0.3251
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	135@67	23.96	23.36	0.2168
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@1	23.86	23.26	0.2118
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@271	24.43	23.83	0.2415
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	135@67	21.97	21.37	0.1371
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@1	21.64	21.04	0.1271
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@271	22.15	21.55	0.1429
77	30	100	662000	3930	CP-OFDM QPSK	137@68	24.87	24.27	0.2673
77	30	100	662000	3930	CP-OFDM QPSK	1@1	24.63	24.03	0.2529
77	30	100	662000	3930	CP-OFDM QPSK	1@271	25.14	24.54	0.2844
77	30	10	647000	3705	DFT-s-OFDM PI/2 BPSK	1@1	25.84	25.24	0.3342
77	30	10	647000	3705	DFT-s-OFDM QPSK	1@1	25.91	25.31	0.3396
77	30	10	647000	3705	DFT-s-OFDM 16 QAM	1@1	24.95	24.35	0.2723
77	30	10	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.77	25.17	0.3289
77	30	10	656000	3840	DFT-s-OFDM QPSK	1@1	25.84	25.24	0.3342
77	30	10	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.88	24.28	0.2679
77	30	10	665000	3975	DFT-s-OFDM PI/2 BPSK	1@1	26.20	25.6	0.3631
77	30	10	665000	3975	DFT-s-OFDM QPSK	1@1	26.18	25.58	0.3614
77	30	10	665000	3975	DFT-s-OFDM 16 QAM	1@1	25.58	24.98	0.3148
77	30	15	647168	3707.52	DFT-s-OFDM PI/2 BPSK	1@1	25.82	25.22	0.3327
77	30	15	647168	3707.52	DFT-s-OFDM QPSK	1@1	25.84	25.24	0.3342
77	30	15	647168	3707.52	DFT-s-OFDM 16 QAM	1@1	24.91	24.31	0.2698
77	30	15	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.78	25.18	0.3296
77	30	15	656000	3840	DFT-s-OFDM QPSK	1@1	25.84	25.24	0.3342
77	30	15	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.89	24.29	0.2685
77	30	15	664832	3972.48	DFT-s-OFDM PI/2 BPSK	1@1	26.27	25.67	0.3690
77	30	15	664832	3972.48	DFT-s-OFDM QPSK	1@1	26.3	25.7	0.3715
77	30	15	664832	3972.48	DFT-s-OFDM 16 QAM	1@1	25.4	24.8	0.3020
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	1@1	25.8	25.2	0.3311
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	25.85	25.25	0.3350
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	24.9	24.3	0.2692
77	30	20	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.79	25.19	0.3304
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@1	25.85	25.25	0.3350
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.94	24.34	0.2716
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	1@1	26.33	25.73	0.3741
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	26.35	25.75	0.3758
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	25.45	24.85	0.3055
77	30	40	648000	3720	DFT-s-OFDM PI/2 BPSK	1@1	25.82	25.22	0.3327



77	30	40	648000	3720	DFT-s-OFDM QPSK	1@1	25.85	25.25	0.3350
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	24.98	24.38	0.2742
77	30	40	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.76	25.16	0.3281
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@1	25.79	25.19	0.3304
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.85	24.25	0.2661
77	30	40	664000	3960	DFT-s-OFDM PI/2 BPSK	1@1	26.16	25.56	0.3597
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@1	26.29	25.69	0.3707
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@1	25.52	24.92	0.3105
77	30	50	648334	3725.01	DFT-s-OFDM PI/2 BPSK	1@1	25.83	25.23	0.3334
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@1	25.9	25.3	0.3388
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@1	24.91	24.31	0.2698
77	30	50	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.69	25.09	0.3228
77	30	50	656000	3840	DFT-s-OFDM QPSK	1@1	25.75	25.15	0.3273
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.81	24.21	0.2636
77	30	50	663666	3954.99	DFT-s-OFDM PI/2 BPSK	1@1	26.22	25.62	0.3648
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@1	26.27	25.67	0.3690
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@1	25.39	24.79	0.3013
77	30	60	648668	3730.02	DFT-s-OFDM PI/2 BPSK	1@1	25.8	25.2	0.3311
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@1	25.88	25.28	0.3373
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@1	24.93	24.33	0.2710
77	30	60	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.69	25.09	0.3228
77	30	60	656000	3840	DFT-s-OFDM QPSK	1@1	25.67	25.07	0.3214
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.8	24.2	0.2630
77	30	60	663332	3949.98	DFT-s-OFDM PI/2 BPSK	1@1	26.24	25.64	0.3664
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@1	26.31	25.71	0.3724
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@1	25.34	24.74	0.2979
77	30	80	649334	3740.01	DFT-s-OFDM PI/2 BPSK	1@1	25.82	25.22	0.3327
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@1	25.86	25.26	0.3357
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@1	24.87	24.27	0.2673
77	30	80	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.65	25.05	0.3199
77	30	80	656000	3840	DFT-s-OFDM QPSK	1@1	25.68	25.08	0.3221
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.76	24.16	0.2606
77	30	80	662666	3939.99	DFT-s-OFDM PI/2 BPSK	1@1	26.12	25.52	0.3565
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@1	26.2	25.6	0.3631
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@1	25.26	24.66	0.2924
77	30	90	649668	3745.02	DFT-s-OFDM PI/2 BPSK	1@1	25.01	24.41	0.2761
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	1@1	25.98	25.38	0.3451
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	1@1	26.14	25.54	0.3581
77	30	90	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.65	25.05	0.3199
77	30	90	656000	3840	DFT-s-OFDM QPSK	1@1	25.71	25.11	0.3243
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.78	24.18	0.2618
77	30	90	662332	3934.98	DFT-s-OFDM PI/2 BPSK	1@1	26.11	25.51	0.3556
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	1@1	26.11	25.51	0.3556
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	1@1	25.19	24.59	0.2877



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0081	PASS	NV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0035	PASS	LV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0074	PASS	HV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0071	PASS	-30℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0052	PASS	-20℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0056	PASS	-10℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0068	PASS	0℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0031	PASS	10℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0015	PASS	20℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0027	PASS	30℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0036	PASS	40℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0052	PASS	50℃




Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	4.3	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	1@0	4.15	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	5.41	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	5.99	13	PASS



N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

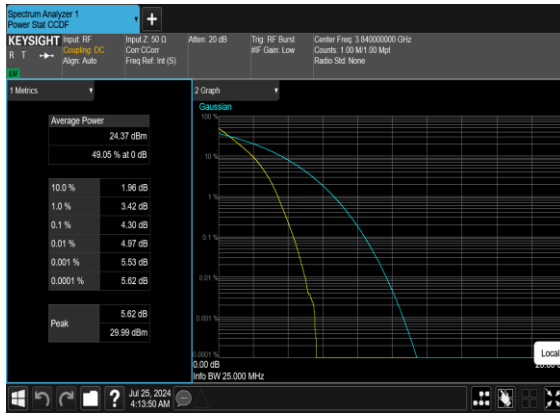

N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Mid_CH



N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH



N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH



**Occupied Bandwidth**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	10	656000	3840.0	CP-OFDM QPSK	24@0	8.5653	9.23
77	30	10	656000	3840.0	CP-OFDM 16 QAM	24@0	8.5705	9.181
77	30	10	656000	3840.0	CP-OFDM 64 QAM	24@0	8.5677	9.16
77	30	10	656000	3840.0	CP-OFDM 256 QAM	24@0	8.5669	9.133
77	30	15	656000	3840.0	CP-OFDM QPSK	38@0	13.58	14.44
77	30	15	656000	3840.0	CP-OFDM 16 QAM	38@0	13.619	14.41
77	30	15	656000	3840.0	CP-OFDM 64 QAM	38@0	13.55	14.51
77	30	15	656000	3840.0	CP-OFDM 256 QAM	38@0	13.572	14.3
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.261	18.95
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.182	19.04
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.191	18.92
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.2	18.82
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.843	39.16
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.762	39.31
77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.839	39.22
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.833	39.41
77	30	50	656000	3840.0	CP-OFDM QPSK	133@0	47.502	48.95
77	30	50	656000	3840.0	CP-OFDM 16 QAM	133@0	47.573	49.1
77	30	50	656000	3840.0	CP-OFDM 64 QAM	133@0	47.395	49.15
77	30	50	656000	3840.0	CP-OFDM 256 QAM	133@0	47.397	49.16
77	30	60	656000	3840.0	CP-OFDM QPSK	162@0	57.695	59.8
77	30	60	656000	3840.0	CP-OFDM 16 QAM	162@0	57.763	59.66
77	30	60	656000	3840.0	CP-OFDM 64 QAM	162@0	57.789	59.76
77	30	60	656000	3840.0	CP-OFDM 256 QAM	162@0	57.685	59.71




77	30	80	656000	3840.0	CP-OFDM QPSK	217@0	77.575	79.81
77	30	80	656000	3840.0	CP-OFDM 16 QAM	217@0	77.552	79.96
77	30	80	656000	3840.0	CP-OFDM 64 QAM	217@0	77.356	79.95
77	30	80	656000	3840.0	CP-OFDM 256 QAM	217@0	77.471	79.9
77	30	90	656000	3840.0	CP-OFDM QPSK	245@0	87.506	90.32
77	30	90	656000	3840.0	CP-OFDM 16 QAM	245@0	87.557	90.18
77	30	90	656000	3840.0	CP-OFDM 64 QAM	245@0	87.602	90.21
77	30	90	656000	3840.0	CP-OFDM 256 QAM	245@0	87.428	90.24
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.413	100.5
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.404	100.6
77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.549	100.5
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.698	100.5




N77(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

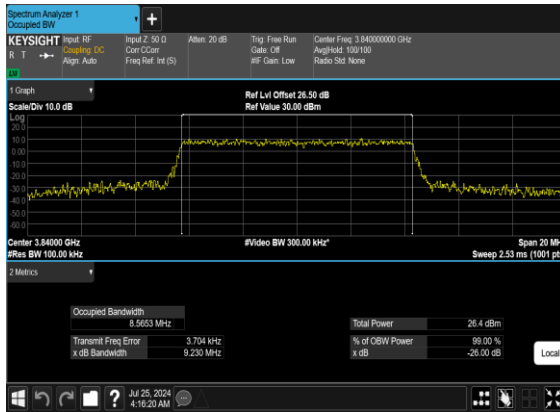


N77(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

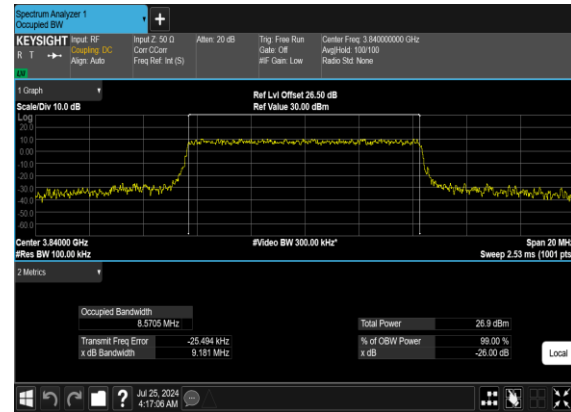

N77(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

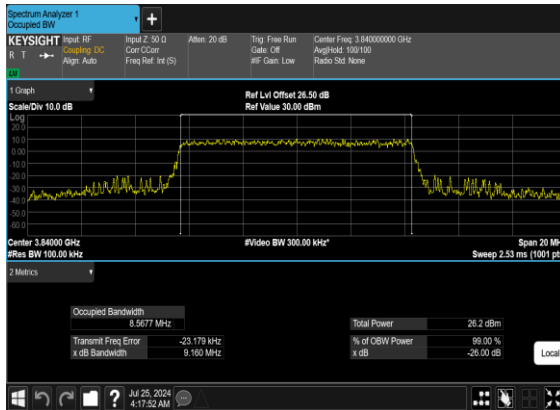


N77(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

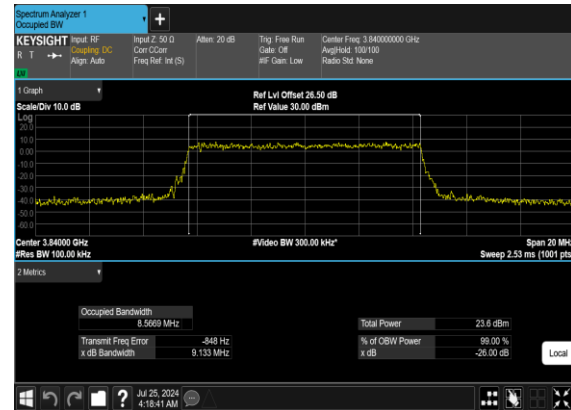





N77(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

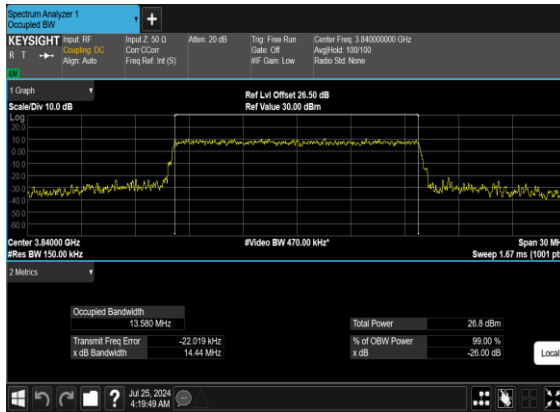


N77(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

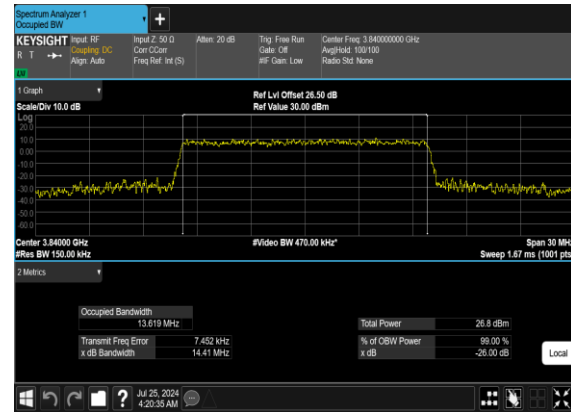

N77(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

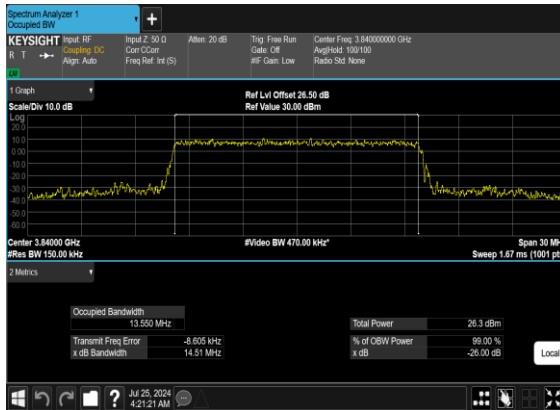


N77(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

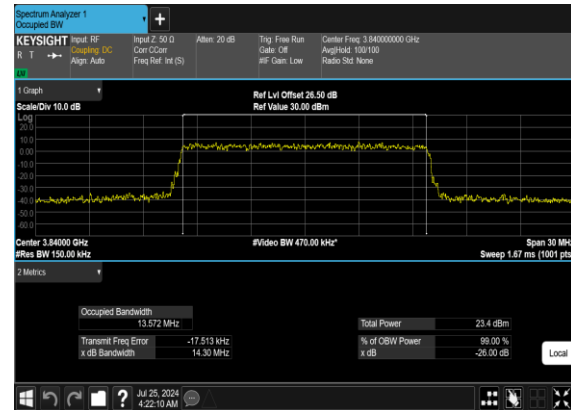





N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

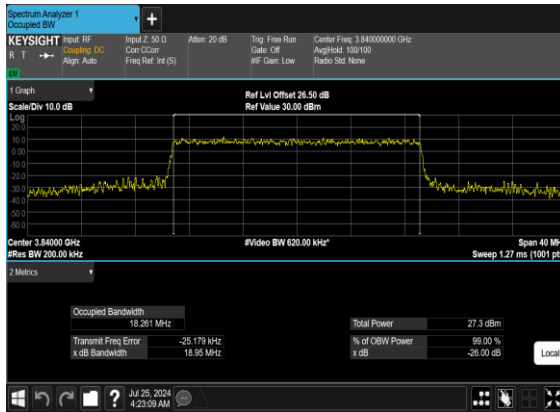


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

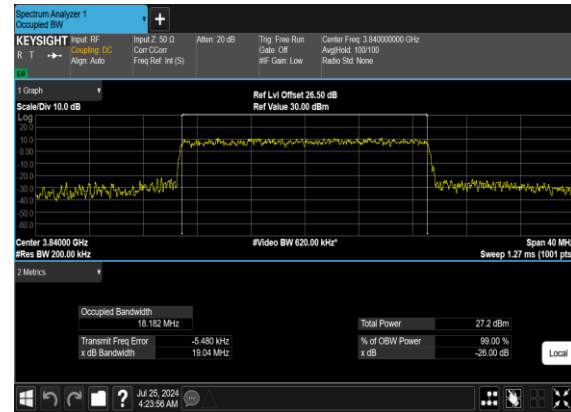

N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

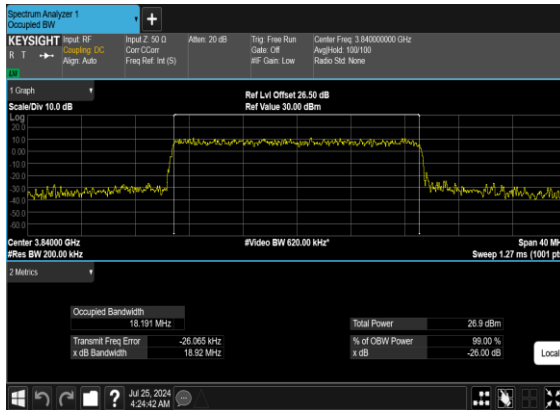


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

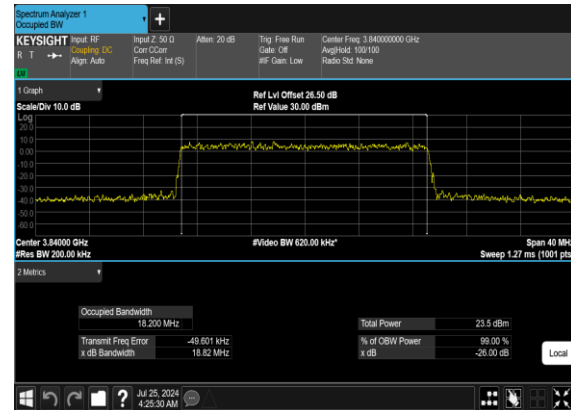





N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

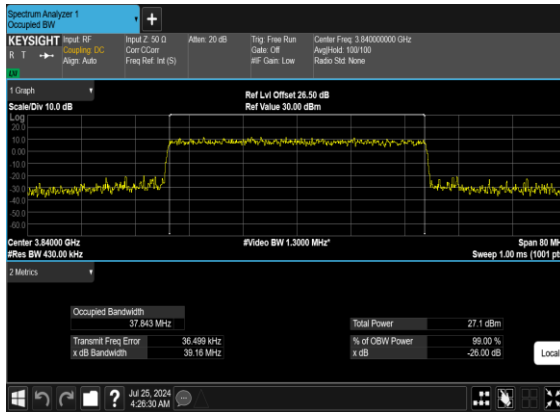


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

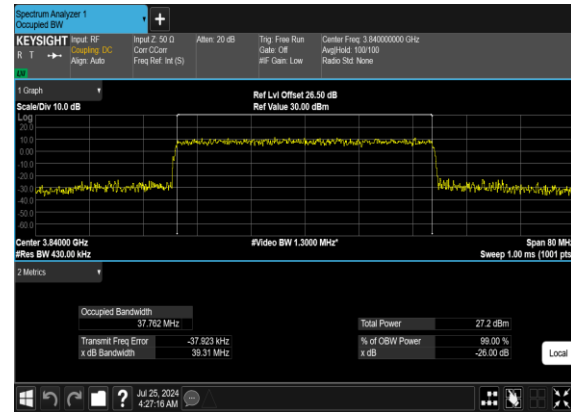

N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

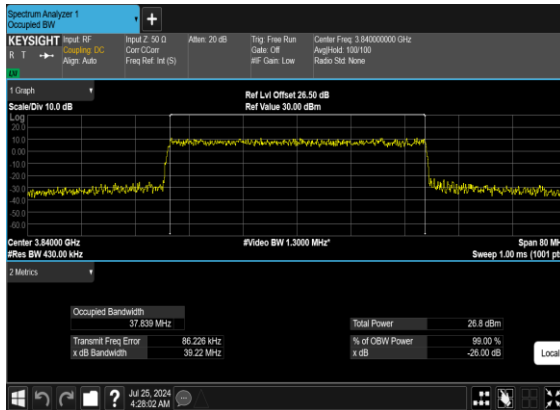


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

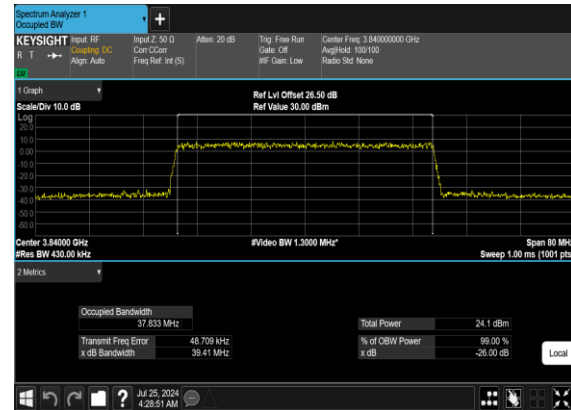





N77(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

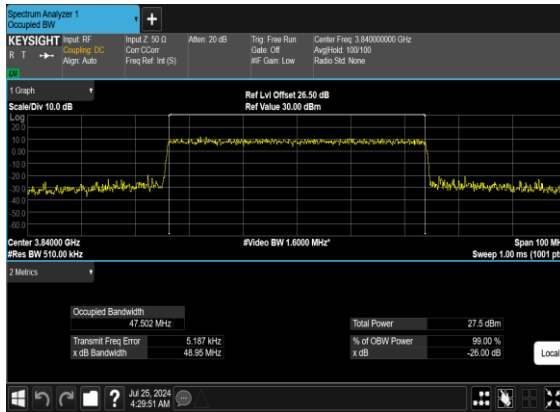


N77(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

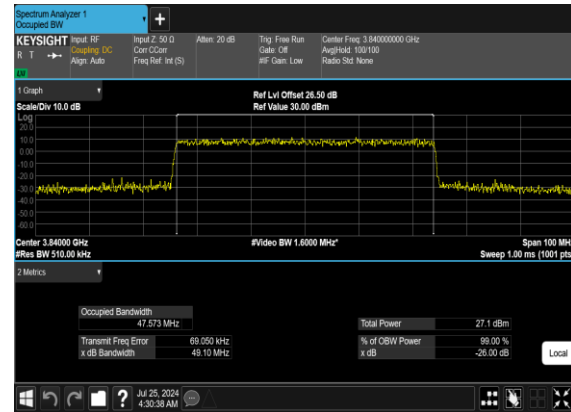

N77(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

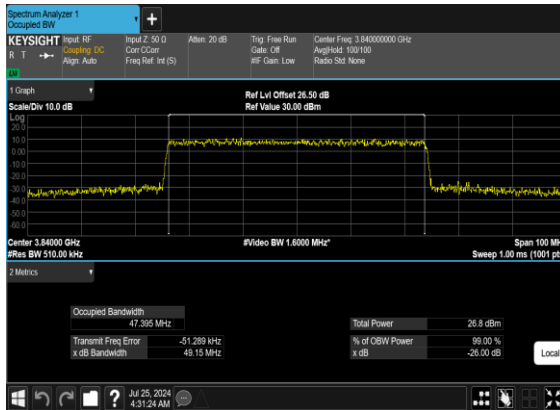


N77(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

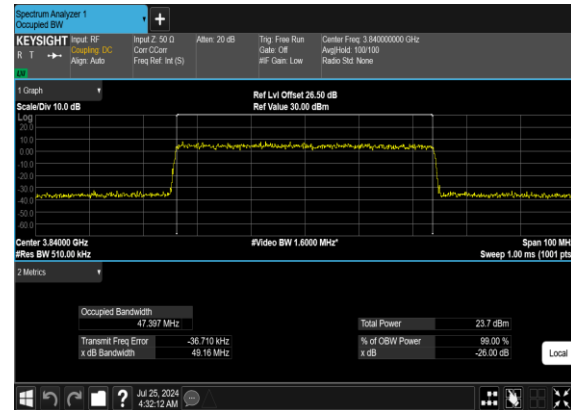





N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

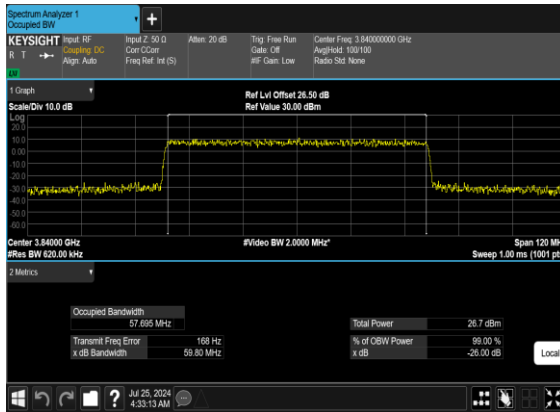


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

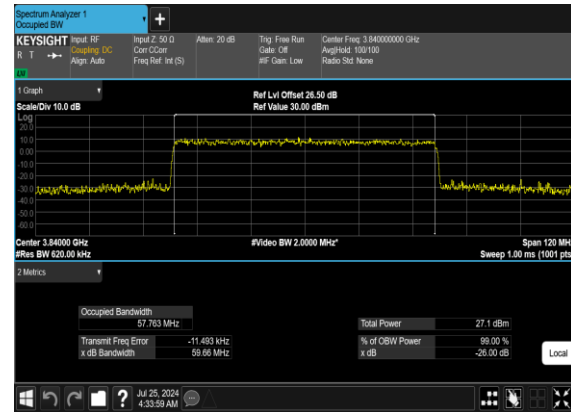

N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

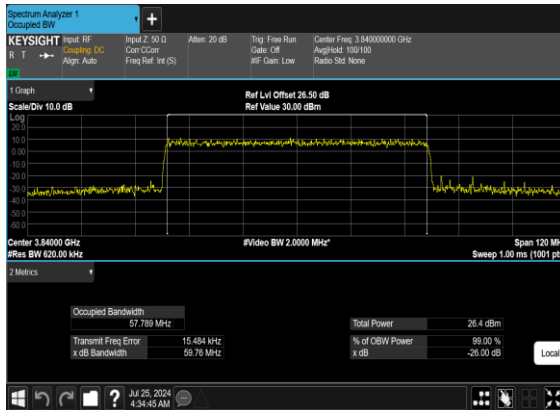


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

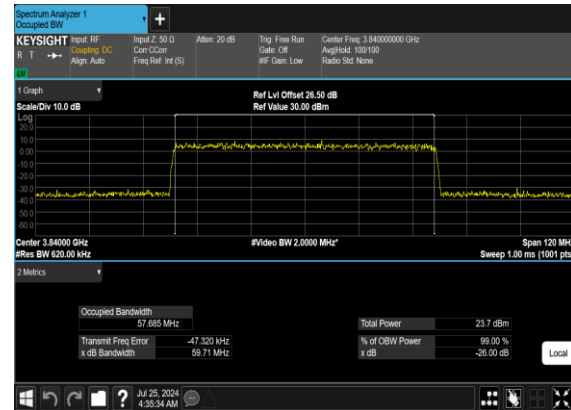





N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

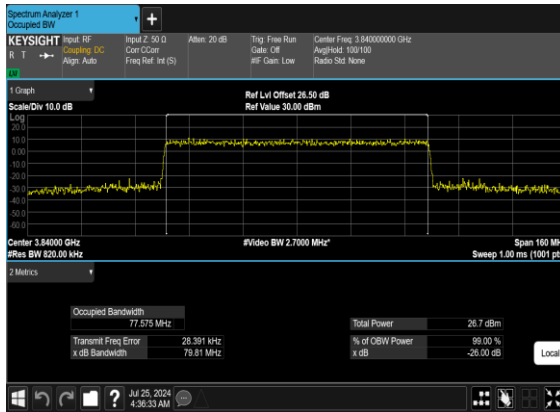


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

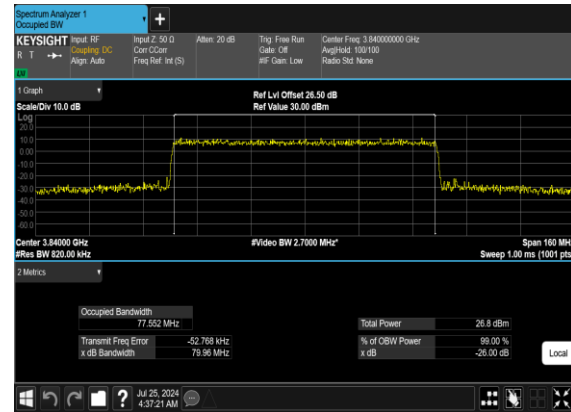

N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

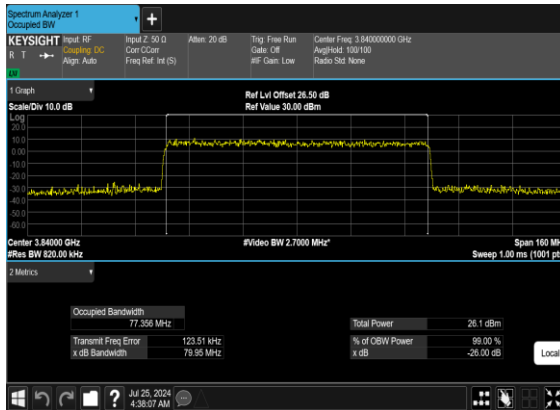


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

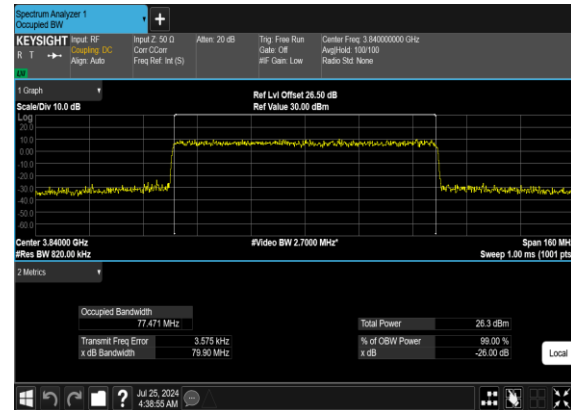





N77(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

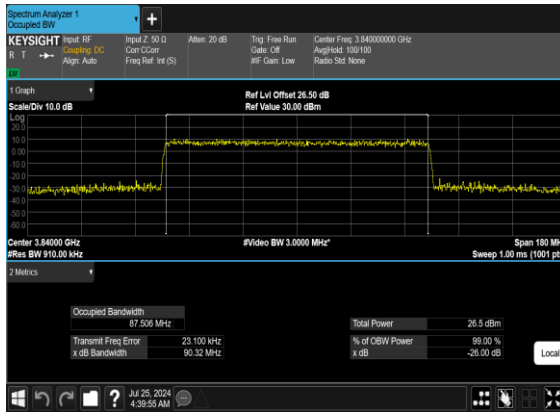


N77(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

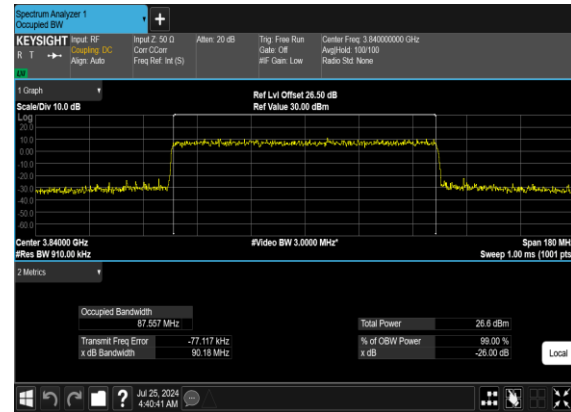

N77(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

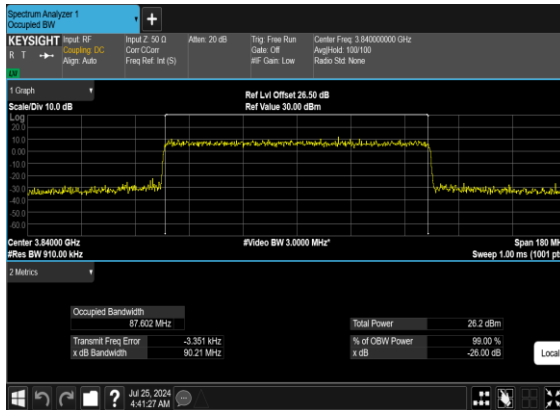


N77(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

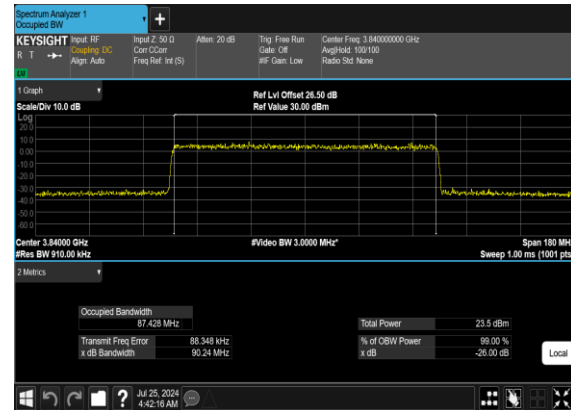





N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

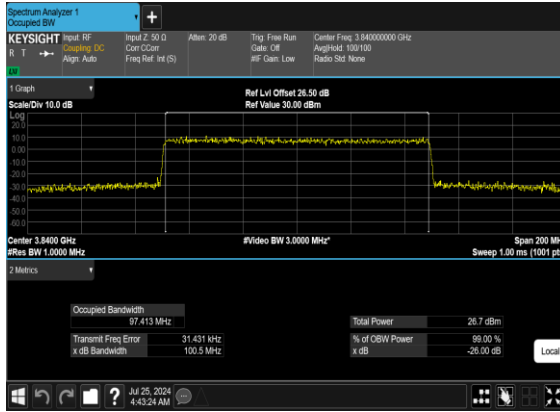


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

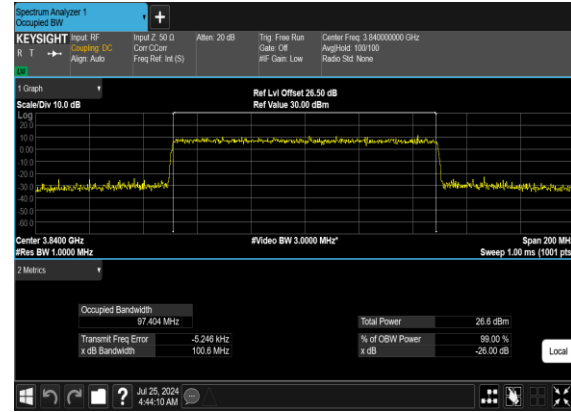

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

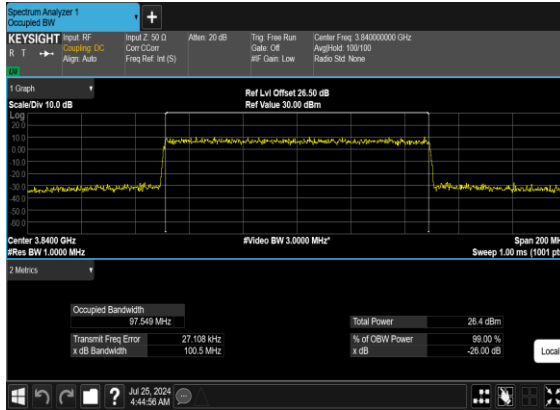

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

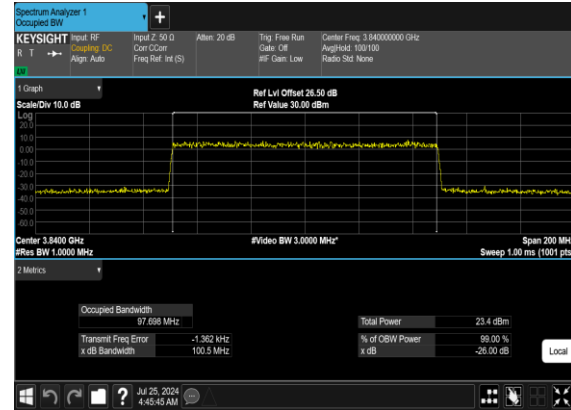

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	---



77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS




77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS




77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

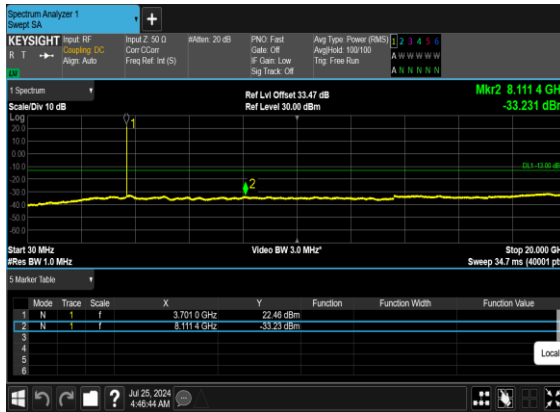


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

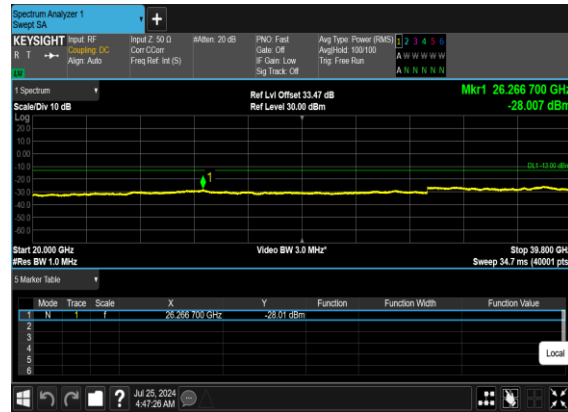

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

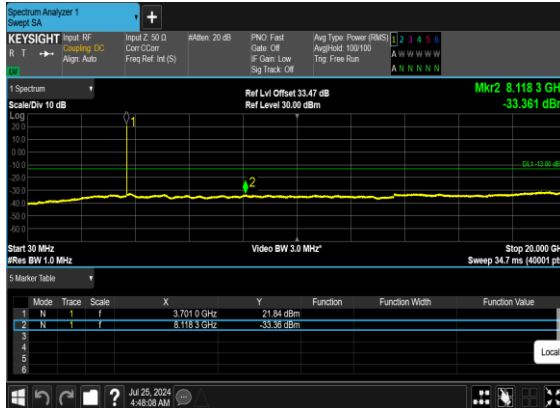


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

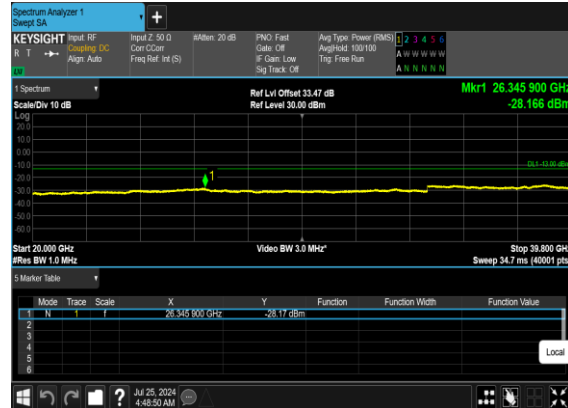





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

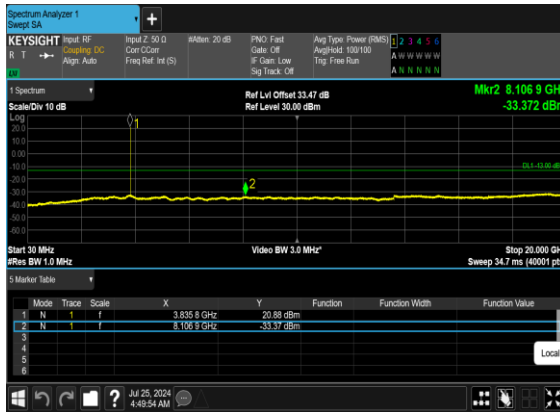

N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

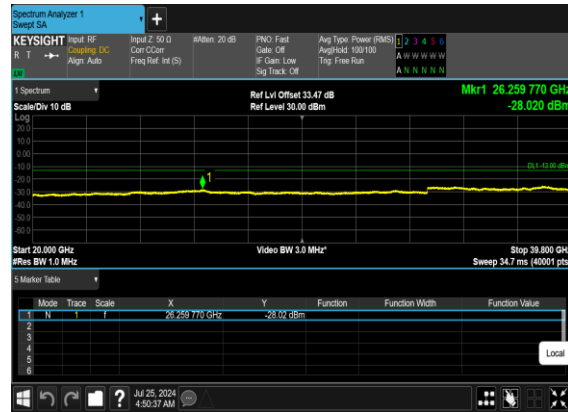

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

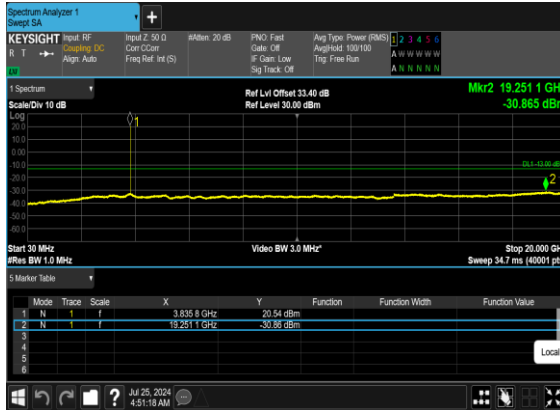


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH






N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

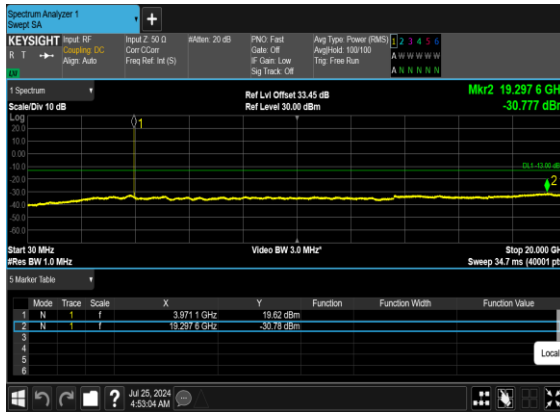


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH



N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

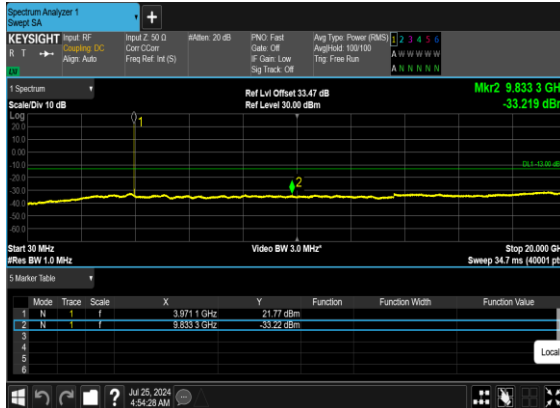


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

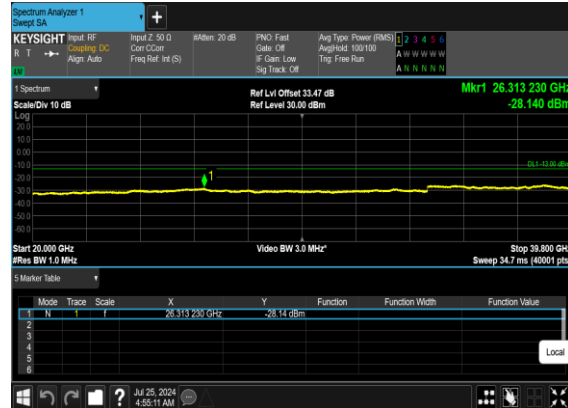





N77(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

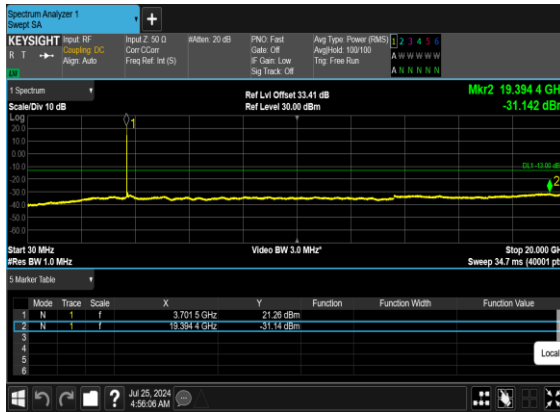


N77(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

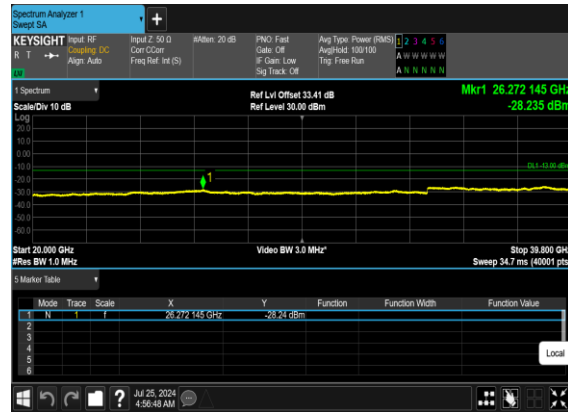

N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

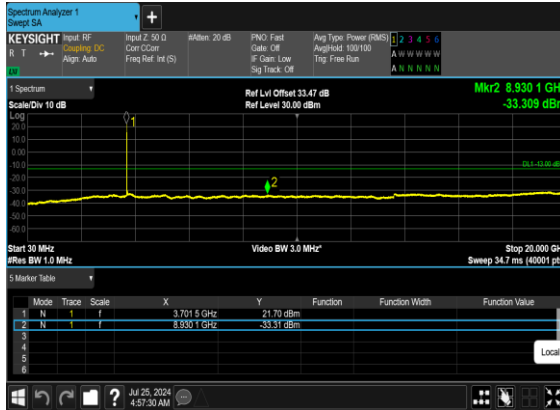


N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

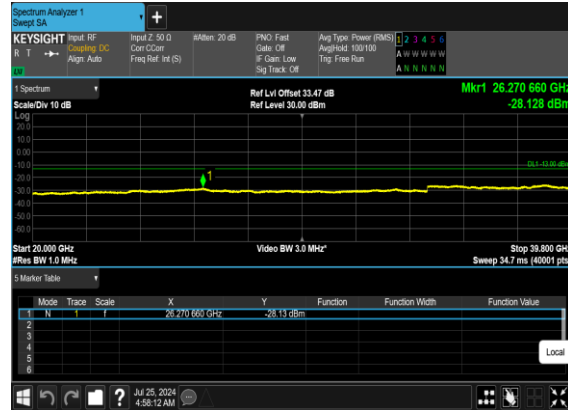





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

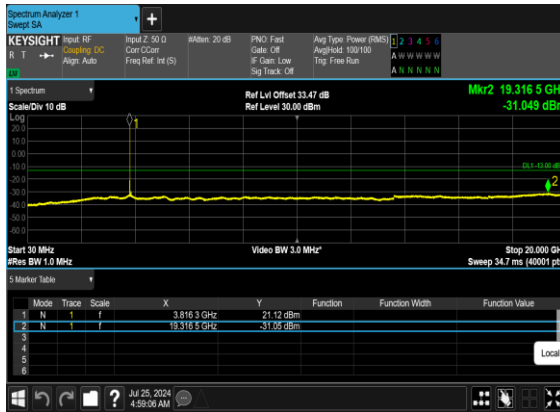


N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

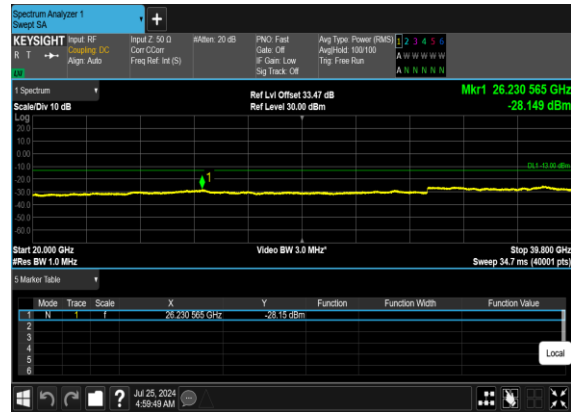

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

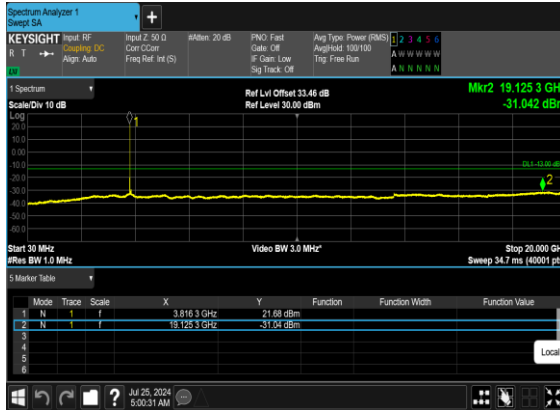


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

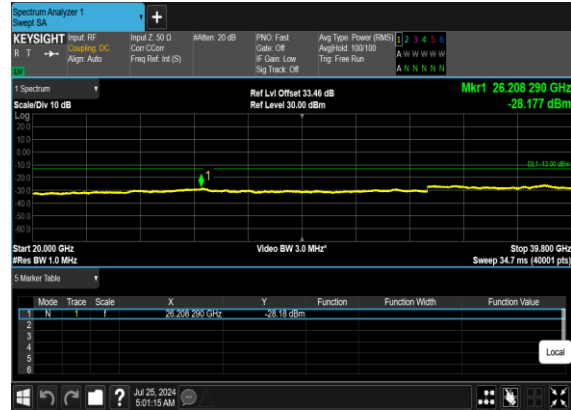





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

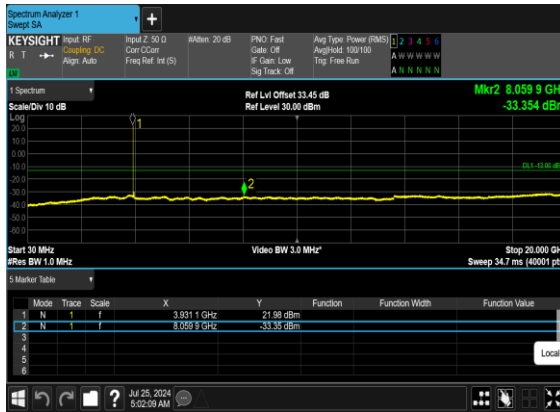

N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

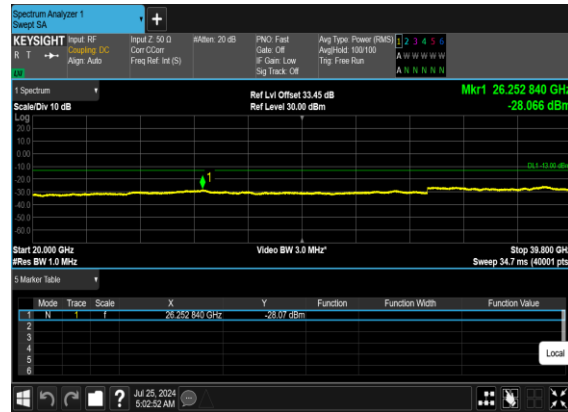

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

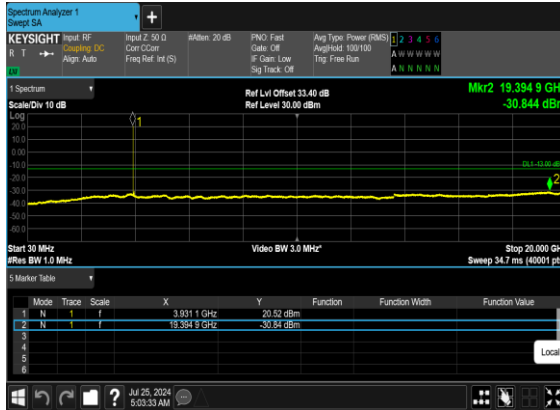

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

