



# FCC Test Report

APPLICANT : Xiaomi Communications Co., Ltd.  
EQUIPMENT : Mobile Phone  
BRAND NAME : Redmi  
MODEL NAME : 25080RABDG  
FCC ID : 2AFZZRABDG  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification  
TEST DATE(S) : Jul. 07, 2025 ~ Jul. 13, 2025

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

*Fly Liang*



Approved by: Fly Liang

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 8

    1.6. Test Location ..... 8

    1.7. Test Software ..... 8

    1.8. Applicable Standards ..... 9

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10**

    2.1. Test Mode ..... 10

    2.2. Connection Diagram of Test System ..... 12

    2.3. Support Unit used in test configuration and system ..... 12

    2.4. EUT Operation Test Setup ..... 13

**3. TEST RESULT ..... 14**

    3.1. Test of AC Conducted Emission Measurement ..... 14

    3.2. Test of Radiated Emission Measurement ..... 18

**4. LIST OF MEASURING EQUIPMENT ..... 23**

**5. MEASUREMENT UNCERTAINTY ..... 24**

**APPENDIX A. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC562503	Rev. 01	Initial issue of report	Aug. 12, 2025



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 6.72 dB at 0.16 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.09 dB at 58.13 MHz

Conformity Assessment Condition:
The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1. General Description

## 1.1. Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

## 1.2. Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	25080RABDG
FCC ID	2AFZZRABDG
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20 WLAN 2.4GHz 802.11ax HE20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 WLAN 5GHz 802.11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE GNSS/NFC
IMEI Code	Conduction: 862542070038789/862542070038797 for Sample 1 862542070086549/862542070086556 for Sample 2 862542070066129/862542070066137 for Sample 3 862542070067002/862542070067010 for Sample 4 Radiation: 862542070038961/862542070038979 for Sample 1 862542070086424/862542070086432 for Sample 2 862542070066129/862542070066137 for Sample 3 862542070071145/862542070071152 for Sample 4
HW Version	135100P16
SW Version	Xiaomi HyperOS 2.0
EUT Stage	Identical Prototype



Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four type of EUT. The difference between them are memory capacity, battery manufacturer and screen manufacturer. Sample 1 is 12+256G memory, Sunwoda battery and Tianma screen, sample 2 is 8+256G memory, NVT battery and CSOT screen, sample 3 is 8+512G memory, Sunwoda battery and Tianma screen, and sample 4 is 12+512G memory, COSMX battery and Visionox screen. According to the difference, we chose sample 1 to perform full test and sample 2/3/4 to verify the worst cases of sample 1.

### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 12 : 699 MHz ~ 716 MHz LTE Band 13 : 777 MHz ~ 787 MHz LTE Band 17 : 704 MHz ~ 716 MHz LTE Band 26 : 814 MHz ~ 849 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 42 : 3450 MHz ~ 3550 MHz LTE Band 48 : 3550 MHz ~ 3700 MHz LTE Band 66 : 1710 MHz ~ 1780 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n77 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz; 5G NR n78 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz; 802.11b/g/n/ax: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869 MHz ~ 894 MHz



	<p>GSM1900: 1930 MHz ~ 1990 MHz  WCDMA Band II: 1930 MHz ~ 1990 MHz  WCDMA Band IV : 2110 MHz ~ 2155 MHz  WCDMA Band V: 869 MHz ~ 894 MHz  LTE Band 2 : 1930 MHz ~ 1990 MHz  LTE Band 4 : 2110 MHz ~ 2155 MHz  LTE Band 5 : 869 MHz ~ 894 MHz  LTE Band 7 : 2620 MHz ~ 2690 MHz  LTE Band 12 : 729 MHz ~ 746 MHz  LTE Band 13 : 746 MHz ~ 756 MHz  LTE Band 17 : 734 MHz ~ 746 MHz  LTE Band 26 : 859 MHz ~ 894 MHz  LTE Band 38: 2570 MHz ~ 2620 MHz  LTE Band 41 : 2496 MHz ~ 2690 MHz  LTE Band 42 : 3450 MHz ~ 3550 MHz  LTE Band 48 : 3550 MHz ~ 3700 MHz  LTE Band 66 : 2110 MHz~ 2200 MHz  5G NR n2 : 1930 MHz ~ 1990 MHz  5G NR n5 : 869 MHz ~ 894 MHz  5G NR n7 : 2620 MHz ~ 2690 MHz  5G NR n12 : 729 MHz ~ 746 MHz  5G NR n26 : 859 MHz ~ 894 MHz  5G NR n38: 2570 MHz ~ 2620 MHz  5G NR n41 : 2496 MHz ~ 2690 MHz  5G NR n48 : 3550 MHz ~ 3700 MHz  5G NR n66 : 2110 MHz~ 2200 MHz  5G NR n77 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz;  5G NR n78 : 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3800 MHz;  802.11b/g/n/ax: 2400 MHz ~ 2483.5 MHz  802.11a/n/ac/ax: 5150 MHz ~ 5250 MHz;  5250 MHz ~ 5350 MHz;  5470 MHz ~ 5725 MHz  5725 MHz ~ 5850 MHz  Bluetooth: 2400 MHz ~ 2483.5 MHz  NFC : 13.56 MHz  GNSS : 1559 MHz ~ 1610 MHz</p>
<b>Antenna Type</b>	<p>WWAN: PIFA Antenna  WLAN 2.4GHz: IFA Antenna  WLAN 5GHz: Loop Antenna  Bluetooth: IFA Antenna  GNSS: PIFA Antenna  NFC: Loop Antenna</p>
<b>Type of Modulation</b>	<p>GSM/GPRS: GMSK  EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK  WCDMA : BPSK  HSPA : QPSK  HSPA+ : 16QAM  DC-HSDPA : 64QAM  LTE: QPSK / 16QAM / 64QAM / 256QAM  5G NR:  DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM)  CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)  802.11b: DSSS (DBPSK / DQPSK / CCK)  802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)  802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)</p>



	802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK
--	---

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO02-SZ ; 03CH05-SZ	CN1256	421272

### 1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b



## **1.8. Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + USB Cable 1 (Charging from Adapter 1) + SIM 1 for Sample 1
	Mode 2: WCDMA band V Rx(Middle) + ANT 1+ Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Battery + USB Cable 2 (Charging from Adapter 2) + SIM 2 for Sample 1
	Mode 3: LTE Band 26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable 3 (Charging from Adapter 1) + SIM 2 for Sample 1
	Mode 4: n5 Rx(Middle) + ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + NFC On + Battery + USB Cable 4 (Charging from Adapter 1) + SIM 2 for Sample 1
	Mode 5: LTE B13 Rx(High) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 1(EUT (eMMC) USB Data Link to NB) + SIM 2 for Sample 1
	Mode 6: LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 2 for Sample 1
	Mode 7: n12 Rx(Middle) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 2(NB USB Data Link to EUT (eMMC)) + SIM 2 for Sample 1
	Mode 8: LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 3(NB USB Data Link to EUT (eMMC)) + SIM 2 for Sample 1
	Mode 9: LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 4(NB USB Data Link to EUT (eMMC)) + SIM 2 for Sample 1
	Mode 10 : LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 2 for Sample 2
	Mode 11 : LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 2 for Sample 3
	Mode 12 : LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 2 for Sample 4



Radiated Emissions	<p>Mode 1: GSM 850 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + Camera(Rear) + Battery + USB Cable 1 (Charging from Adapter 1) + SIM 1 for Sample 1</p> <p>Mode 2: WCDMA band V Rx(Middle) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + Camera(Front) + Battery + USB Cable 2 (Charging from Adapter 2) + SIM 2 for Sample 1</p> <p>Mode 3: LTE Band 26 Rx(High) + ANT 0 + Bluetooth Idle + WLAN (5G) Idle + MPEG4(Run Color Bar) + Battery + USB Cable 3 (Charging from Adapter 1) + SIM 1 for Sample 1</p> <p>Mode 4: n5 Rx(Middle) + ANT 1 + Bluetooth Idle + WLAN (2.4G) Idle + NFC On + Battery + USB Cable 4 (Charging from Adapter 1) + SIM 1 for Sample 1</p> <p>Mode 5: LTE B13 Rx(High) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 1(EUT (eMMC) USB Data Link to NB) + SIM 1 for Sample 1</p> <p>Mode 6: LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx+ Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 1 for Sample 1</p> <p>Mode 7: LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 2(NB USB Data Link to EUT (eMMC)) + SIM 1 for Sample 1</p> <p>Mode 8: LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 3(NB USB Data Link to EUT (eMMC)) + SIM 1 for Sample 1</p> <p>Mode 9: LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable 4(NB USB Data Link to EUT (eMMC)) + SIM 1 for Sample 1</p> <p>Mode 10 : LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Battery + USB Cable(Typec to Typec)(EUT Charging to other phones) + SIM 1 for Sample 1</p> <p>Mode 11 : LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone SIM 1 for Sample 1</p> <p>Mode 12 : LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx+ Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 1 for Sample 2</p> <p>Mode 13 : LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx+ Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 1 for Sample 3</p> <p>Mode 14 : LTE B17 Rx(Low) + ANT 1 + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx+ Battery + USB Cable 1(NB USB Data Link to EUT (eMMC)) + SIM 1 for Sample 4</p>
<p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>1. The worst case of AC is mode 6; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 6; only the test data of this mode is reported.</li> <li>3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC.</li> <li>4. Pre-scanned Low/Middle/High channel for GSM 850/WCDMA Band V/LTE Band 13/17/26 and 5G NR n5/n12, the worst channel was recorded in this report.</li> </ol>	

## 2.2. Connection Diagram of Test System

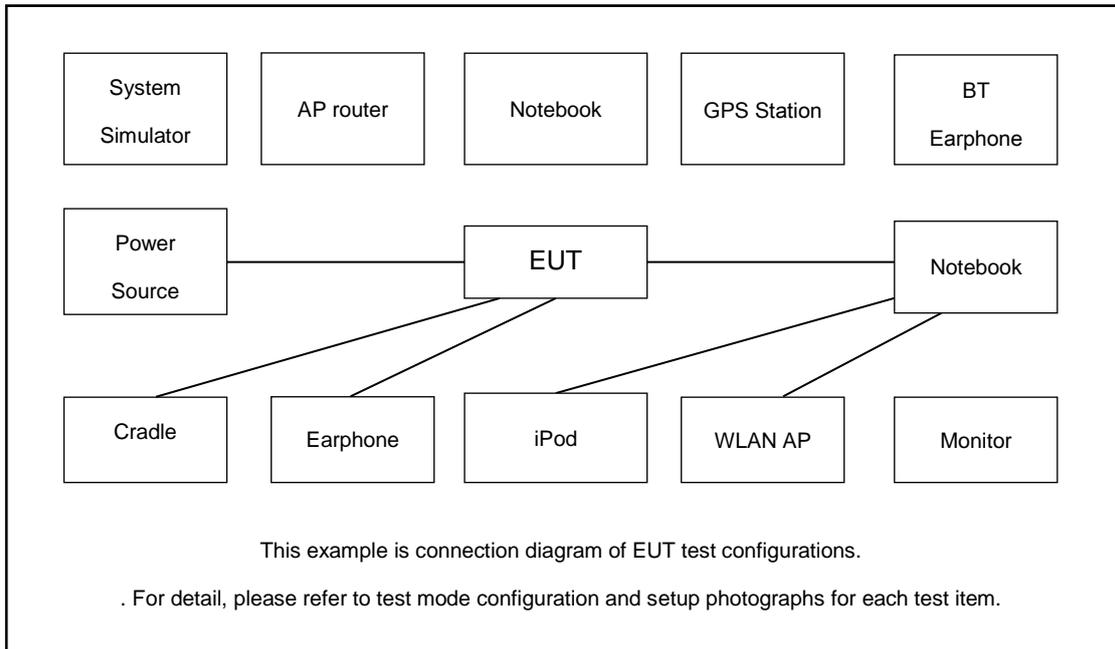

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Base Station(5G)	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
3.	Base Station(5G)	Anritsu	MT8000A	N/A	N/A	Unshielded,1.8m
4.	GPS Station	Labsat	RLLS03-2P	N/A	N/A	Unshielded,1.8m
5.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded,1.8m
6.	Notebook	DELL	Latiude 3400	N/A	N/A	Unshielded,1.8m
7.	Notebook	Thinkpad	Thinkpad E14	N/A	N/A	N/A
8.	Bluetooth Earphone	Samsung	HS3000	A3LHS3000	N/A	N/A
9.	WLAN AP	Dlink	DIR-820L	KA21R820LA1	N/A	Unshielded,1.8m
10.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
11.	iPod	apple	N/A	MC69029/A	N/A	N/A
12.	iPod	Apple	MC525 ZP/A	Fcc DoC	N/A	Shielded, 1.0m
13.	Mobile Phone	Xiaomi	P16	N/A	N/A	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA or LTE or 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.
5. Turn on NFC function



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

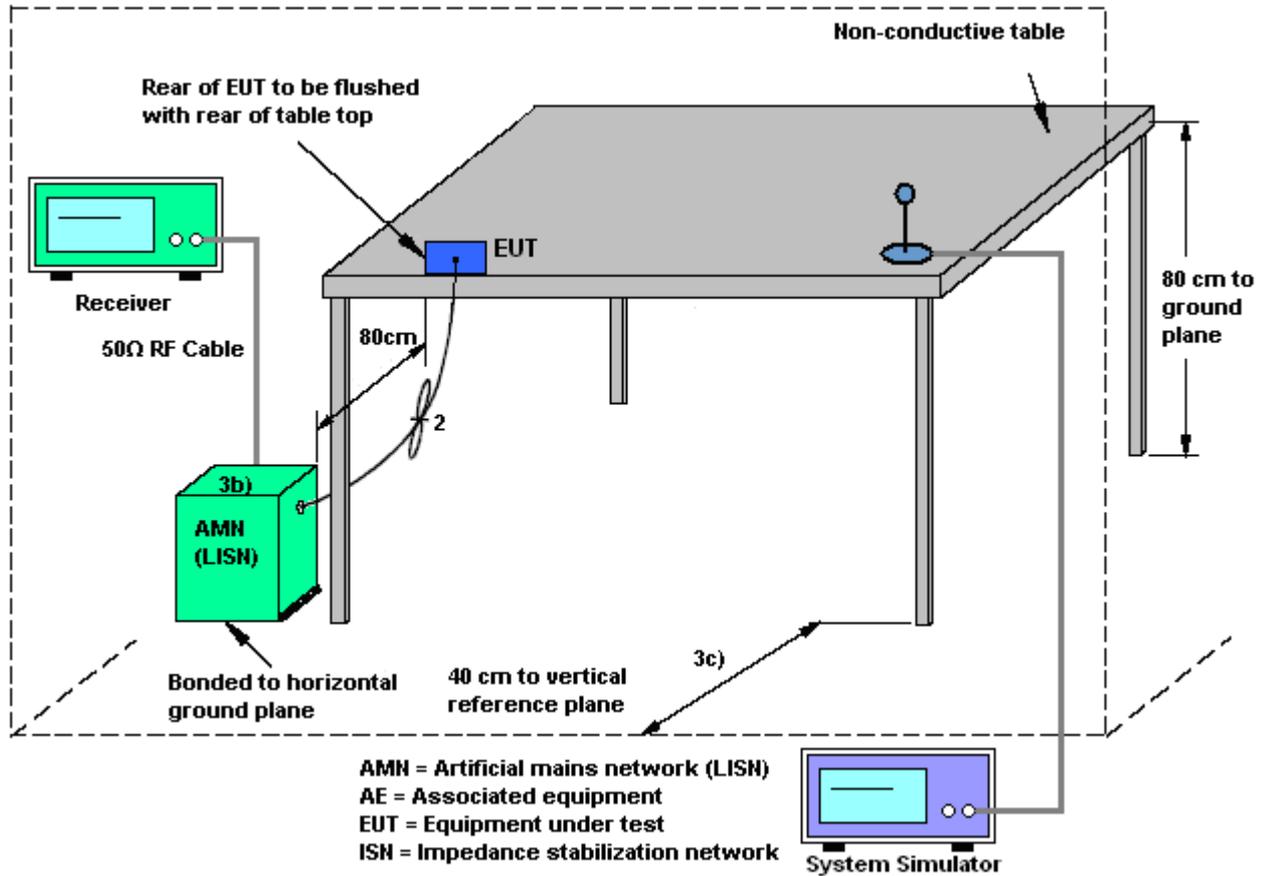



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

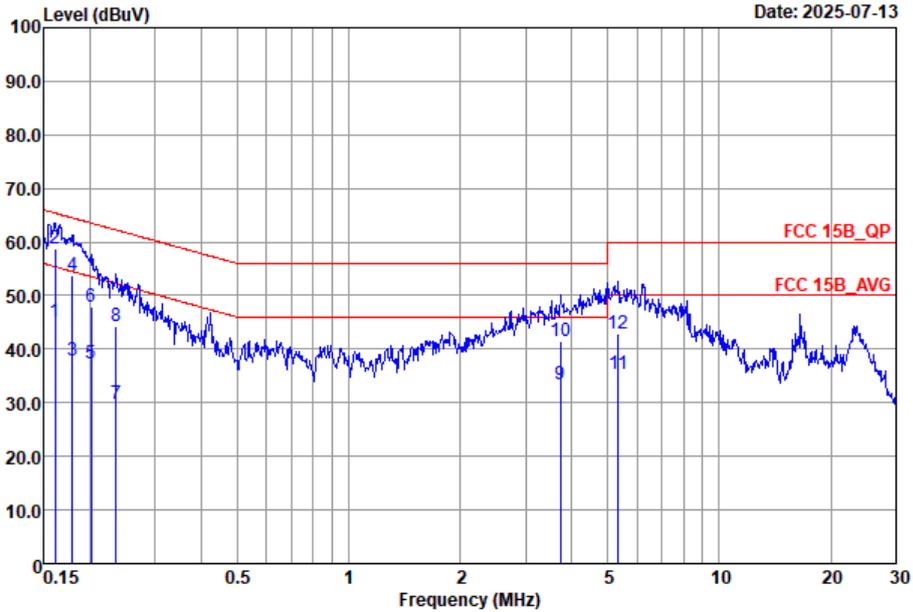


Site : CO02-SZ  
 Condition : FCC 15B\_QP LISN\_2025-L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	45.26	-10.12	55.38	25.40	9.67	10.19	Average
2 *	0.16	58.66	-6.72	65.38	38.80	9.67	10.19	QP
3	0.18	37.97	-16.53	54.50	18.10	9.69	10.18	Average
4	0.18	53.87	-10.63	64.50	34.00	9.69	10.18	QP
5	0.20	37.39	-16.15	53.54	17.50	9.71	10.18	Average
6	0.20	47.99	-15.55	63.54	28.10	9.71	10.18	QP
7	0.24	29.71	-22.55	52.26	9.80	9.72	10.19	Average
8	0.24	44.31	-17.95	62.26	24.40	9.72	10.19	QP
9	3.72	33.53	-12.47	46.00	13.60	9.66	10.27	Average
10	3.72	41.43	-14.57	56.00	21.50	9.66	10.27	QP
11	5.33	35.51	-14.49	50.00	15.60	9.65	10.26	Average
12	5.33	42.91	-17.09	60.00	23.00	9.65	10.26	QP



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

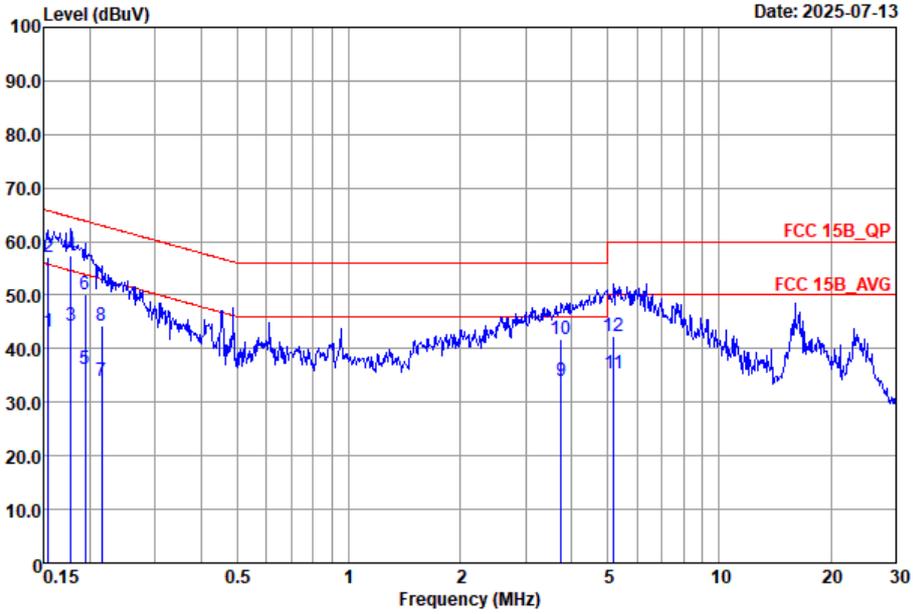

Site : C002-SZ  
 Condition : FCC 15B\_QP LISN\_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	43.09	-12.65	55.74	23.30	9.60	10.19	Average
2	0.15	56.99	-8.75	65.74	37.20	9.60	10.19	QP
3	0.18	44.37	-10.22	54.59	24.41	9.78	10.18	Average
4 *	0.18	57.47	-7.12	64.59	37.51	9.78	10.18	QP
5	0.19	36.32	-17.52	53.84	16.30	9.84	10.18	Average
6	0.19	50.22	-13.62	63.84	30.20	9.84	10.18	QP
7	0.22	34.04	-18.97	53.01	14.11	9.75	10.18	Average
8	0.22	44.34	-18.67	63.01	24.41	9.75	10.18	QP
9	3.74	34.03	-11.97	46.00	14.09	9.67	10.27	Average
10	3.74	41.73	-14.27	56.00	21.79	9.67	10.27	QP
11	5.19	35.28	-14.72	50.00	15.31	9.71	10.26	Average
12	5.19	42.48	-17.52	60.00	22.51	9.71	10.26	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

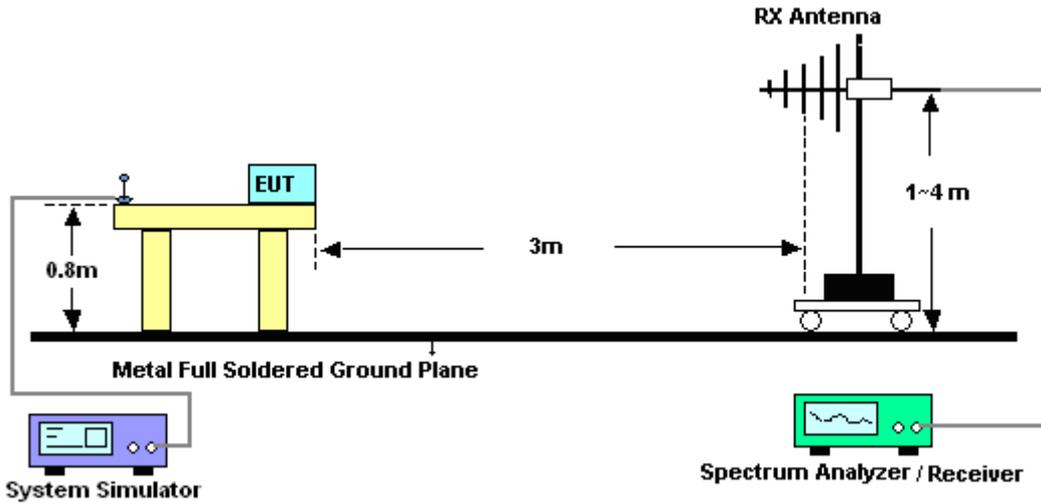


For radiated emissions above 1GHz

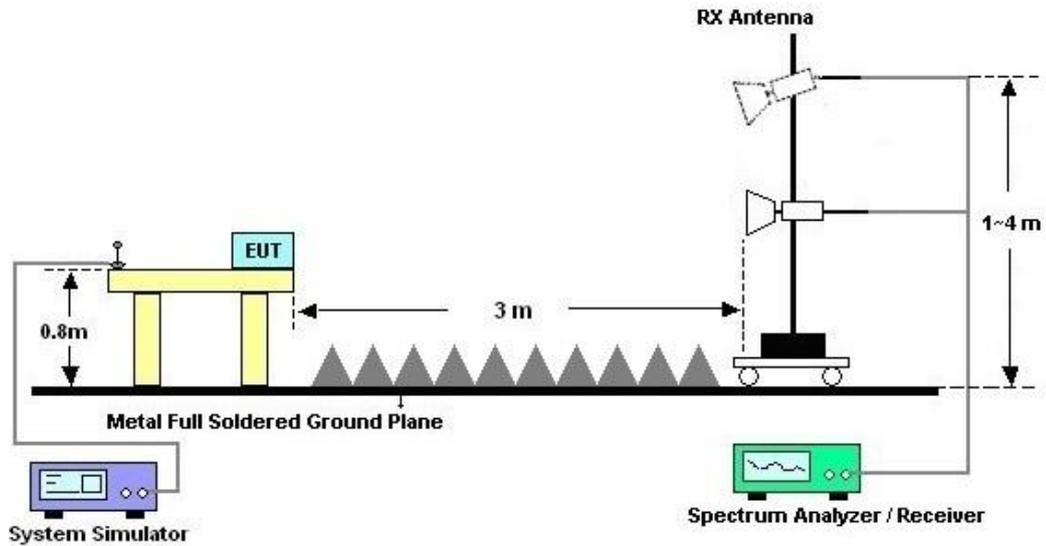



3.2.5. Test Result of Radiated Emission

Test Engineer :	TaoZhang	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored. #10 is RF signal which comes from WLAN (5G) Access Point used to connect the EUT, and which can be ignored.		

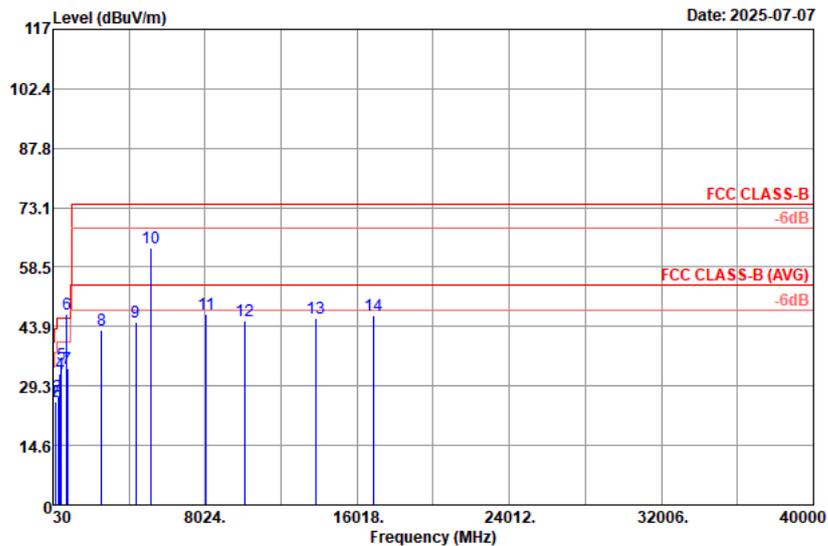


Site : 03CH05-SZ  
 Condition : FCC CLASS-B 3m VULB9168-01001 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg
1	58.13	25.32	-14.68	40.00	39.25	19.34	1.73	---	Peak
2	162.89	25.33	-18.17	43.50	39.44	18.39	2.40	---	Peak
3	298.69	26.88	-19.12	46.00	38.96	19.42	3.20	---	Peak
4	398.60	32.28	-13.72	46.00	42.07	21.60	3.31	---	Peak
5	480.08	34.58	-11.42	46.00	42.24	23.46	3.42	---	Peak
6 *	739.00	47.01			49.60	27.92	3.73	---	Peak
7	798.24	33.71	-12.29	46.00	34.50	28.94	4.37	---	Peak
8	2568.00	42.88	-31.12	74.00	55.88	33.04	7.36	---	Peak
9	4368.00	45.03	-28.97	74.00	53.98	34.60	9.60	---	Peak
10	5180.00	63.12			71.03	35.40	9.45	---	Peak
11	8088.00	46.83	-27.17	74.00	51.38	36.52	11.44	---	Peak
12	10098.00	45.35	-28.65	74.00	45.35	38.30	13.52	---	Peak
13	13833.00	45.85	-28.15	74.00	43.63	39.70	14.49	---	Peak
14	16911.00	46.53	-27.47	74.00	42.40	42.01	15.26	---	Peak



Test Engineer :	TaoZhang	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored. #10 is RF signal which comes from WLAN (5G) Access Point used to connect the EUT, and which can be ignored.		

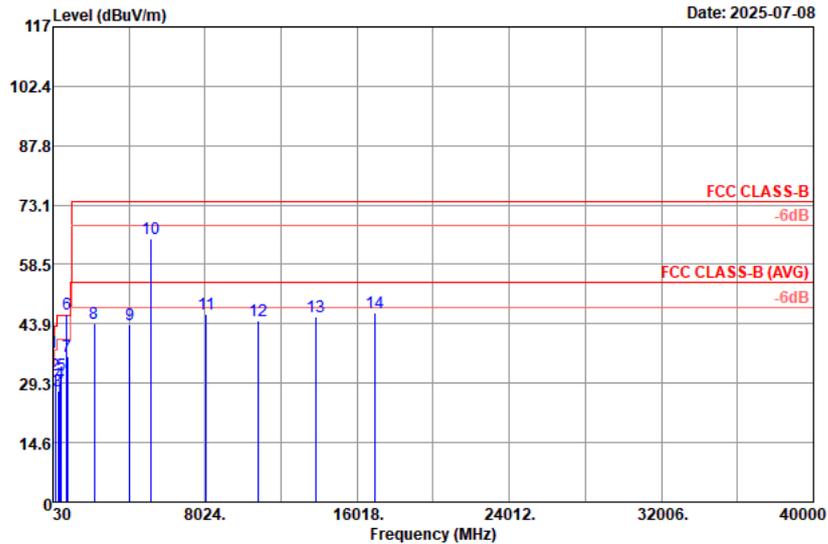

Site : 03CH05-SZ  
 Condition : FCC CLASS-B 3m VULB9168-01001 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg
1	58.13	36.91	-3.09	40.00	50.84	19.34	1.73	---	Peak
2	165.80	31.43	-12.07	43.50	45.73	18.19	2.41	---	Peak
3	310.33	27.44	-18.56	46.00	39.22	19.66	3.26	---	Peak
4	398.60	29.34	-16.66	46.00	39.13	21.60	3.31	---	Peak
5	480.08	31.27	-14.73	46.00	38.93	23.46	3.42	---	Peak
6 *	739.00	46.37			48.96	27.92	3.73	---	Peak
7	800.18	35.69	-10.31	46.00	36.43	28.97	4.39	---	Peak
8	2200.00	43.86	-30.14	74.00	57.78	32.50	6.80	---	Peak
9	4080.00	43.61	-30.39	74.00	52.91	34.36	9.37	---	Peak
10	5180.00	64.71			72.62	35.40	9.45	---	Peak
11	8096.00	46.33	-27.67	74.00	50.88	36.51	11.44	---	Peak
12	10809.00	44.64	-29.36	74.00	44.13	38.31	13.36	---	Peak
13	13833.00	45.60	-28.40	74.00	43.38	39.70	14.49	---	Peak
14	16956.00	46.52	-27.48	74.00	42.44	42.06	15.24	---	Peak

Note:

- Level(dBuV/m) = Read Level(dBuV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBuV/m) – Limit Line(dBuV/m)



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	Apr. 02, 2025	Jul. 07, 2025~ Jul. 08, 2025	Apr. 01, 2026	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 02, 2025	Jul. 07, 2025~ Jul. 08, 2025	Apr. 01, 2026	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Jul. 05, 2025	Jul. 07, 2025~ Jul. 08, 2025	Jul. 10, 2026	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz ~3000MHz	Apr. 02, 2025	Jul. 07, 2025~ Jul. 08, 2025	Apr. 01, 2026	Radiation (03CH05-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2025	Jul. 07, 2025~ Jul. 08, 2025	Jul. 03, 2026	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM01G18GA	060779	1GHz~18GHz	Dec. 25, 2024	Jul. 07, 2025~ Jul. 08, 2025	Dec. 24, 2025	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM18G40G	060778	18GHz~40GHz	Apr. 03, 2025	Jul. 07, 2025~ Jul. 08, 2025	Apr. 02, 2026	Radiation (03CH05-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	00983	15GHz~40GHz	Apr. 03, 2025	Jul. 07, 2025~ Jul. 08, 2025	Apr. 02, 2027	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	Oct. 14, 2024	Jul. 07, 2025~ Jul. 08, 2025	Oct. 13, 2025	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Jul. 07, 2025~ Jul. 08, 2025	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Jul. 07, 2025~ Jul. 08, 2025	NCR	Radiation (03CH05-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Jul. 13, 2025	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Jul. 13, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	61601000247 0	100Vac~250Vac	Dec.25, 2024	Jul. 13, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
Thermo meter	Anymetre	JR593	#14	- 10°C ~ 50°C 10%RH~99%RH	Jul. 05, 2025	Jul. 13, 2025	Jul. 04, 2026	Conduction (CO02-SZ)

NCR: No Calibration Required



## 5. Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.1 dB
---	--------

----- THE END -----