



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 25080RABDG
FCC ID : 2AFZZRABDG
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jun. 29, 2025 ~ Jul. 30, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang



Approved by: Fly Liang

Sporton International Inc. (ShenZhen)

***1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China***



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	28
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements.....	34
4 LIST OF MEASURING EQUIPMENT	35
5 MEASUREMENT UNCERTAINTY	36
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR562503C	Rev. 01	Initial issue of report	Aug. 12, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.44 dB at 4874.00 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.29 dB at 0.49 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	25080RABDG
FCC ID	2AFZZRABDG
IMEI Code	Conducted: 862542070028764/862542070028772 Conduction: 862542070038789/862542070038797 Radiation: 862542070036841/862542070036858
HW Version	135100P16
SW Version	Xiaomi HyperOS 2.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 17.61 dBm (0.0577 W) 802.11g : 22.14 dBm (0.1637 W) 802.11n HT20 : 23.22 dBm (0.2099 W) 802.11ax HE20 : 22.89 dBm (0.1945 W)
99% Occupied Bandwidth	802.11b : 12.95MHz 802.11g : 17.22MHz 802.11n HT20 : 18.17MHz 802.11ax HE20 : 19.06MHz
Antenna Type / Gain	IFA Antenna type with gain 1.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power/PSD > partial RU,



therefore the full RU perform full, and partial RU verify bandedge/spurious.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO02-SZ ; 03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11ax HE20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter)
Remark: For Radiated Test Cases, The tests were performed with Adapter and USB Cable.	


Co-location
802.11 11ax HE20 CH11 2462MHz Tx + 5G NR n48 Link

2.3 Connection Diagram of Test System

AC Conducted Emission:

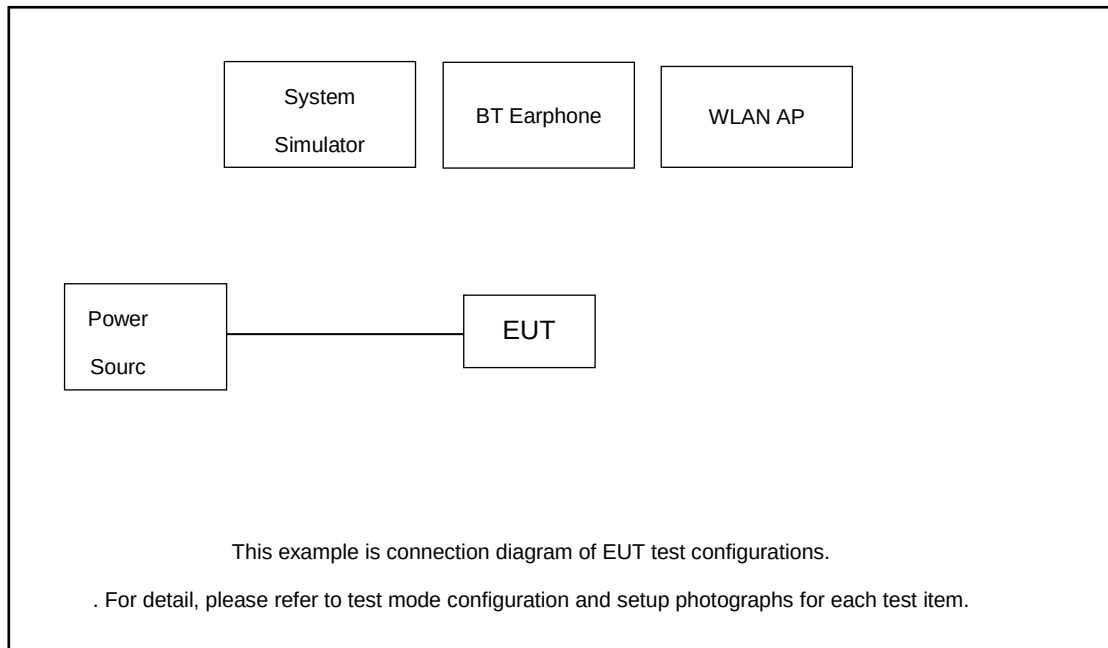

Radiated Emission:

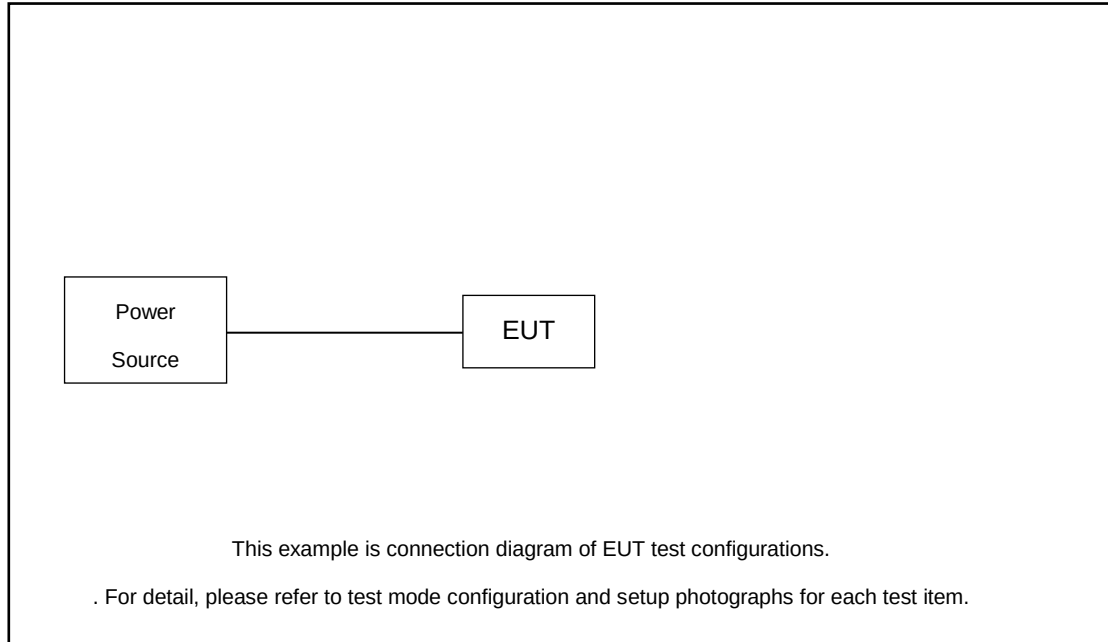

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
4.	Notebook	DELL	Latiude 3400	N/A	N/A	Unshielded,1.8m
5.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.3 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.3 + 10 = 11.3 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

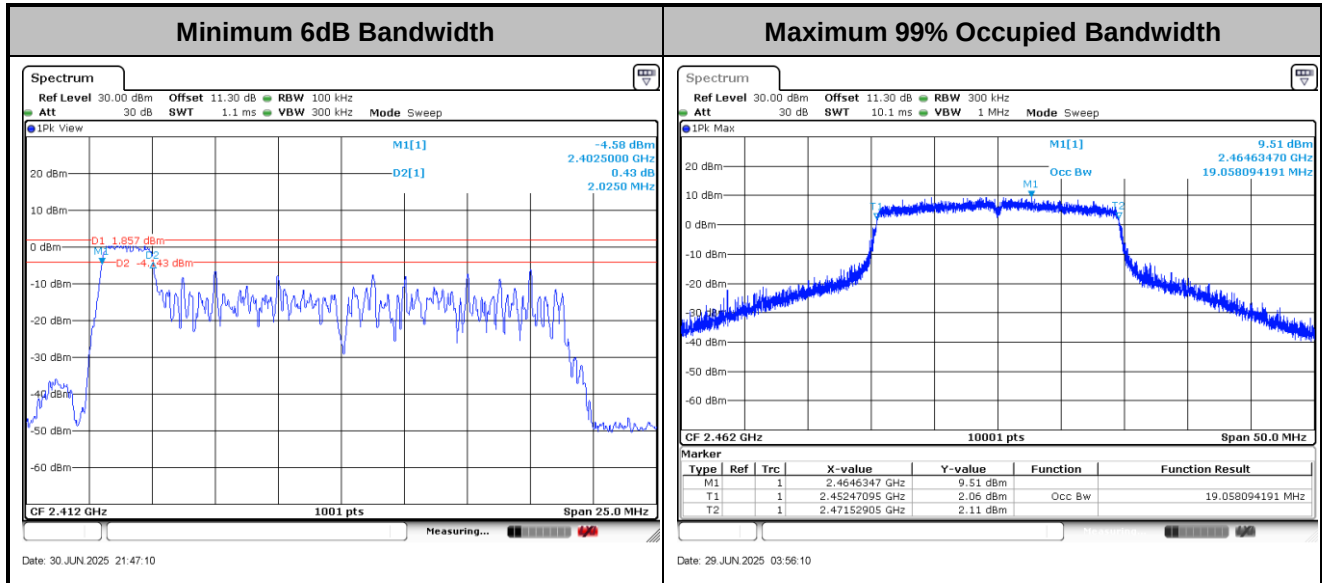

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

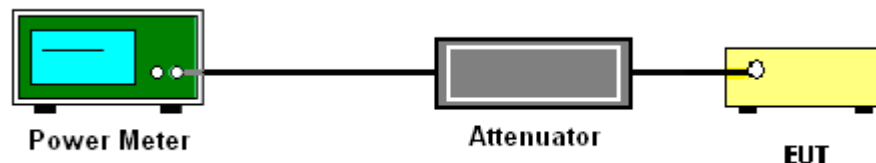

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

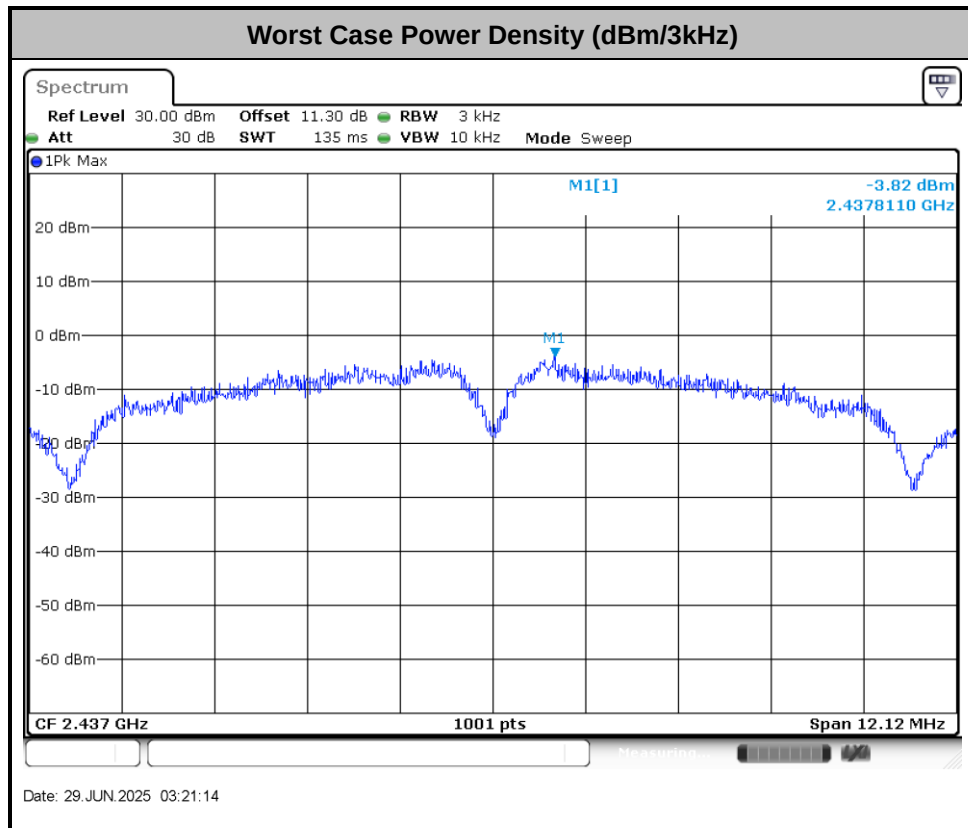

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	HuangKaibiao	Temperature :	21~25°C
		Relative Humidity :	51~54%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

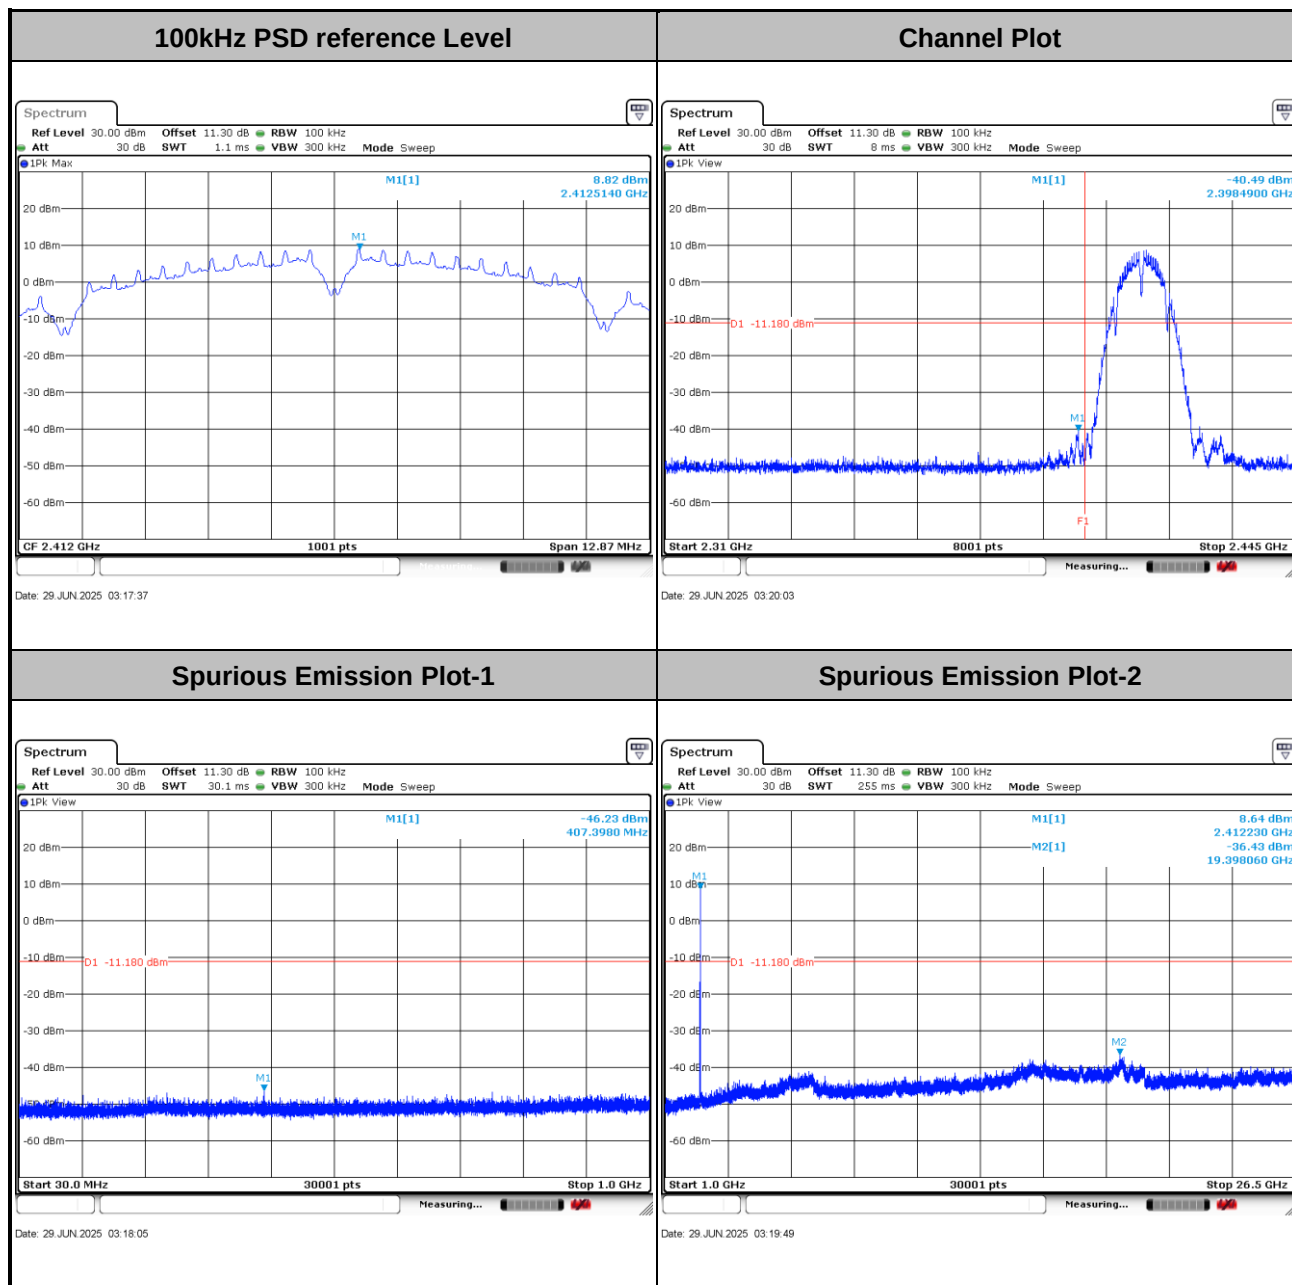




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

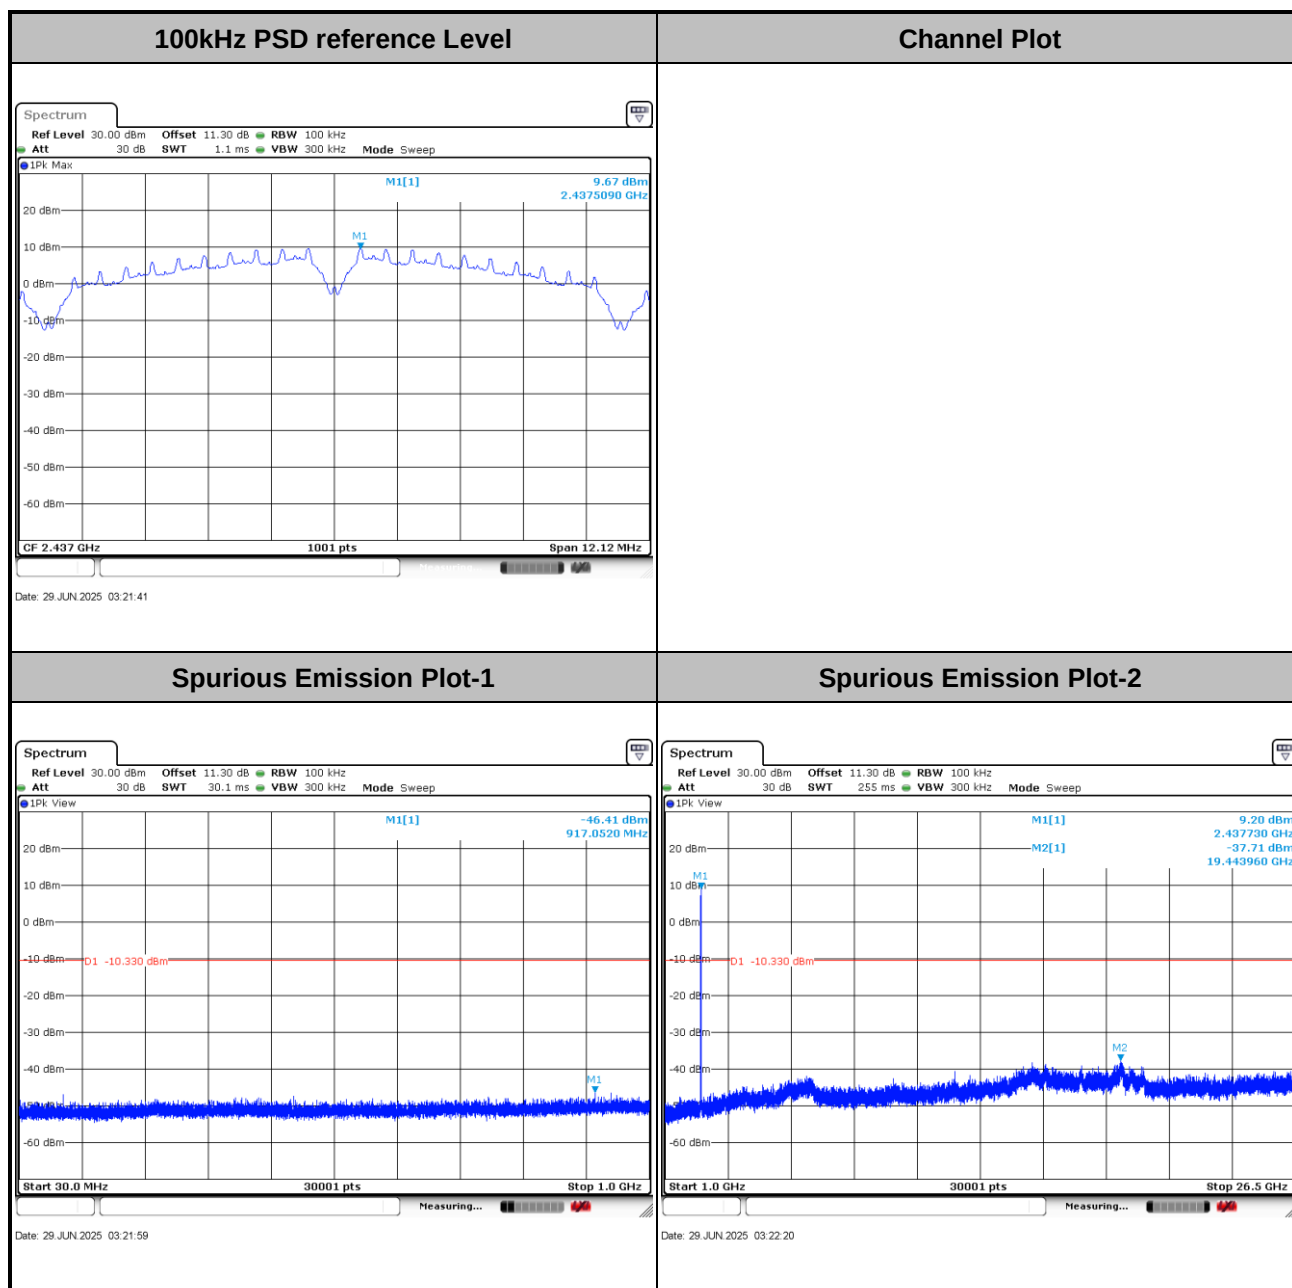




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

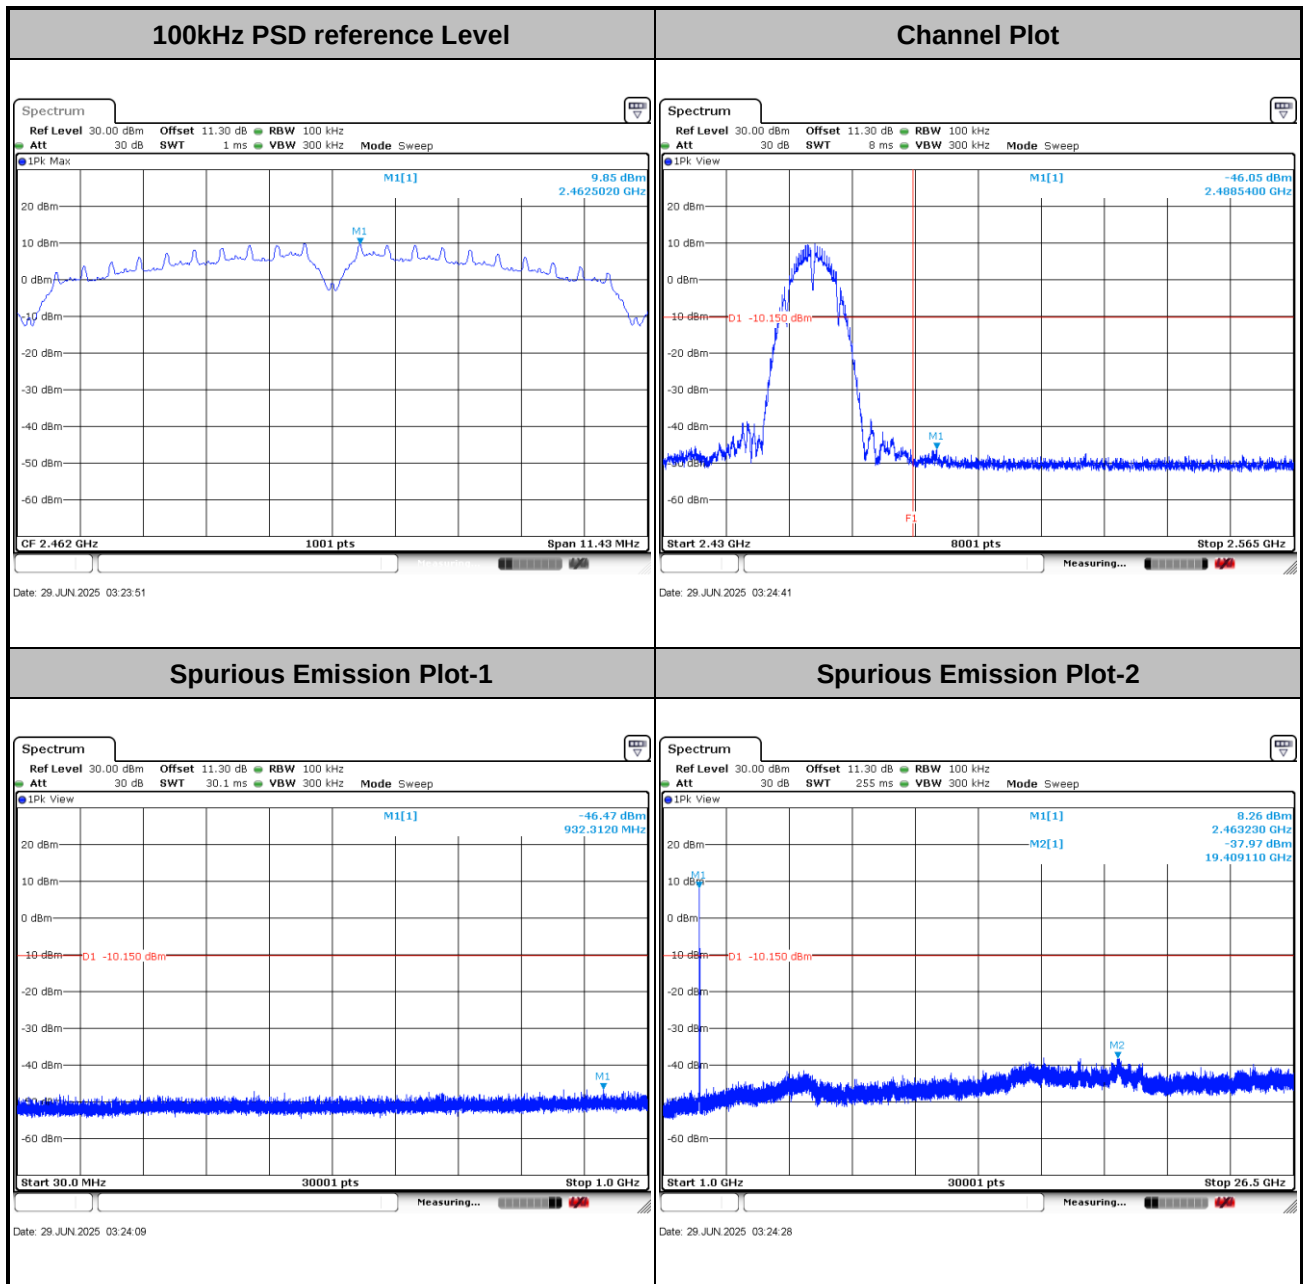




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----


100kHz PSD reference Level

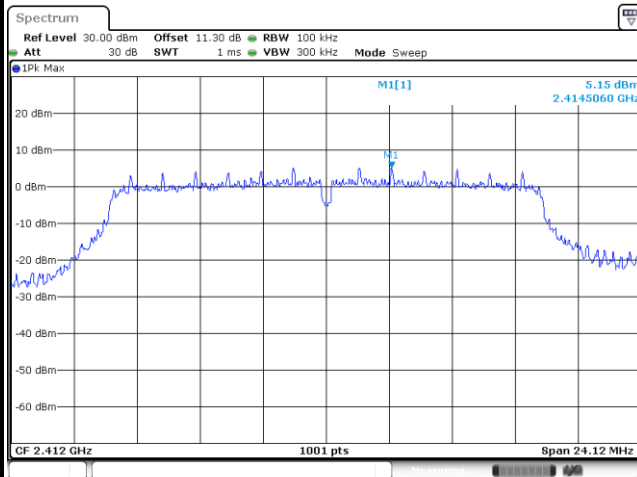


Channel Plot

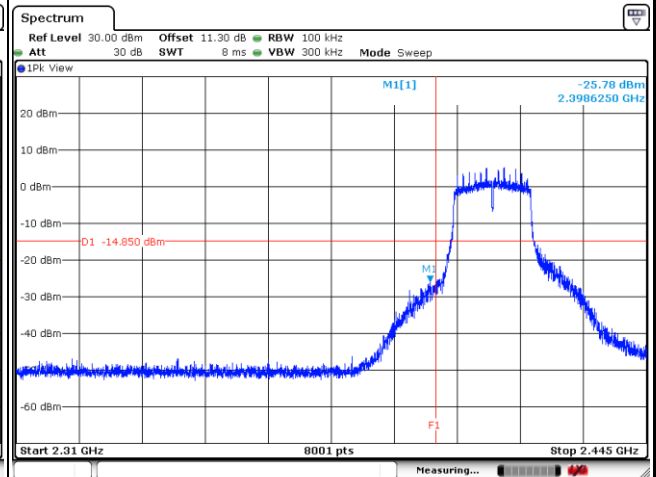

Spurious Emission Plot-1

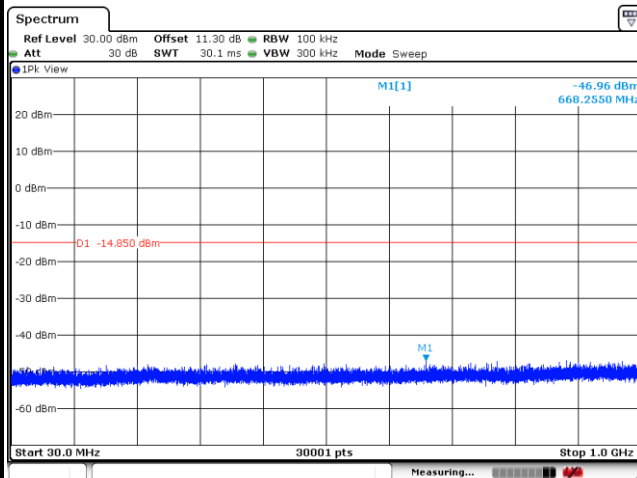


Spurious Emission Plot-2

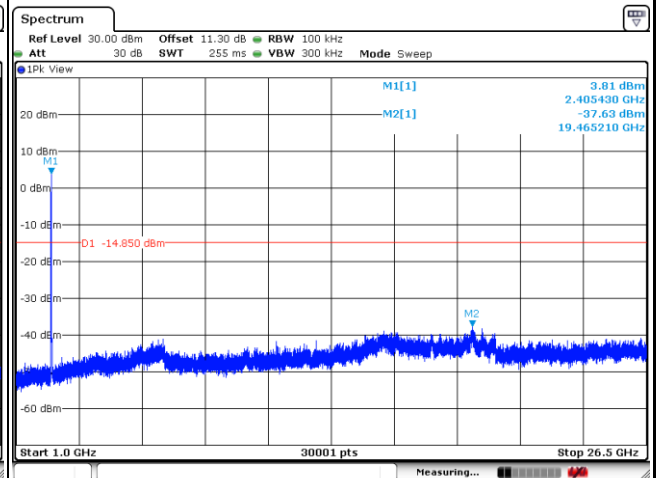



Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----


100kHz PSD reference Level

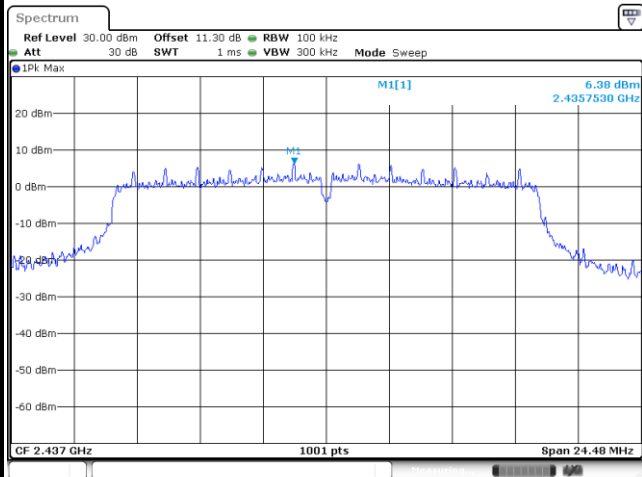

Date: 29 JUN 2025 03:28:59


Channel Plot

Spurious Emission Plot-1

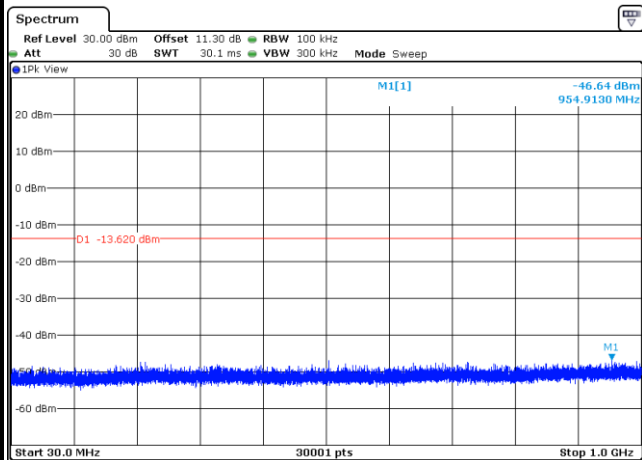

Date: 29 JUN 2025 03:29:21


Spurious Emission Plot-2

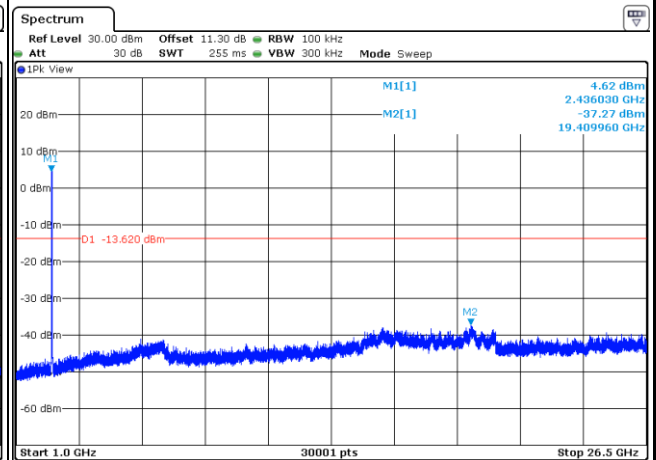

Date: 29 JUN 2025 03:31:11



Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

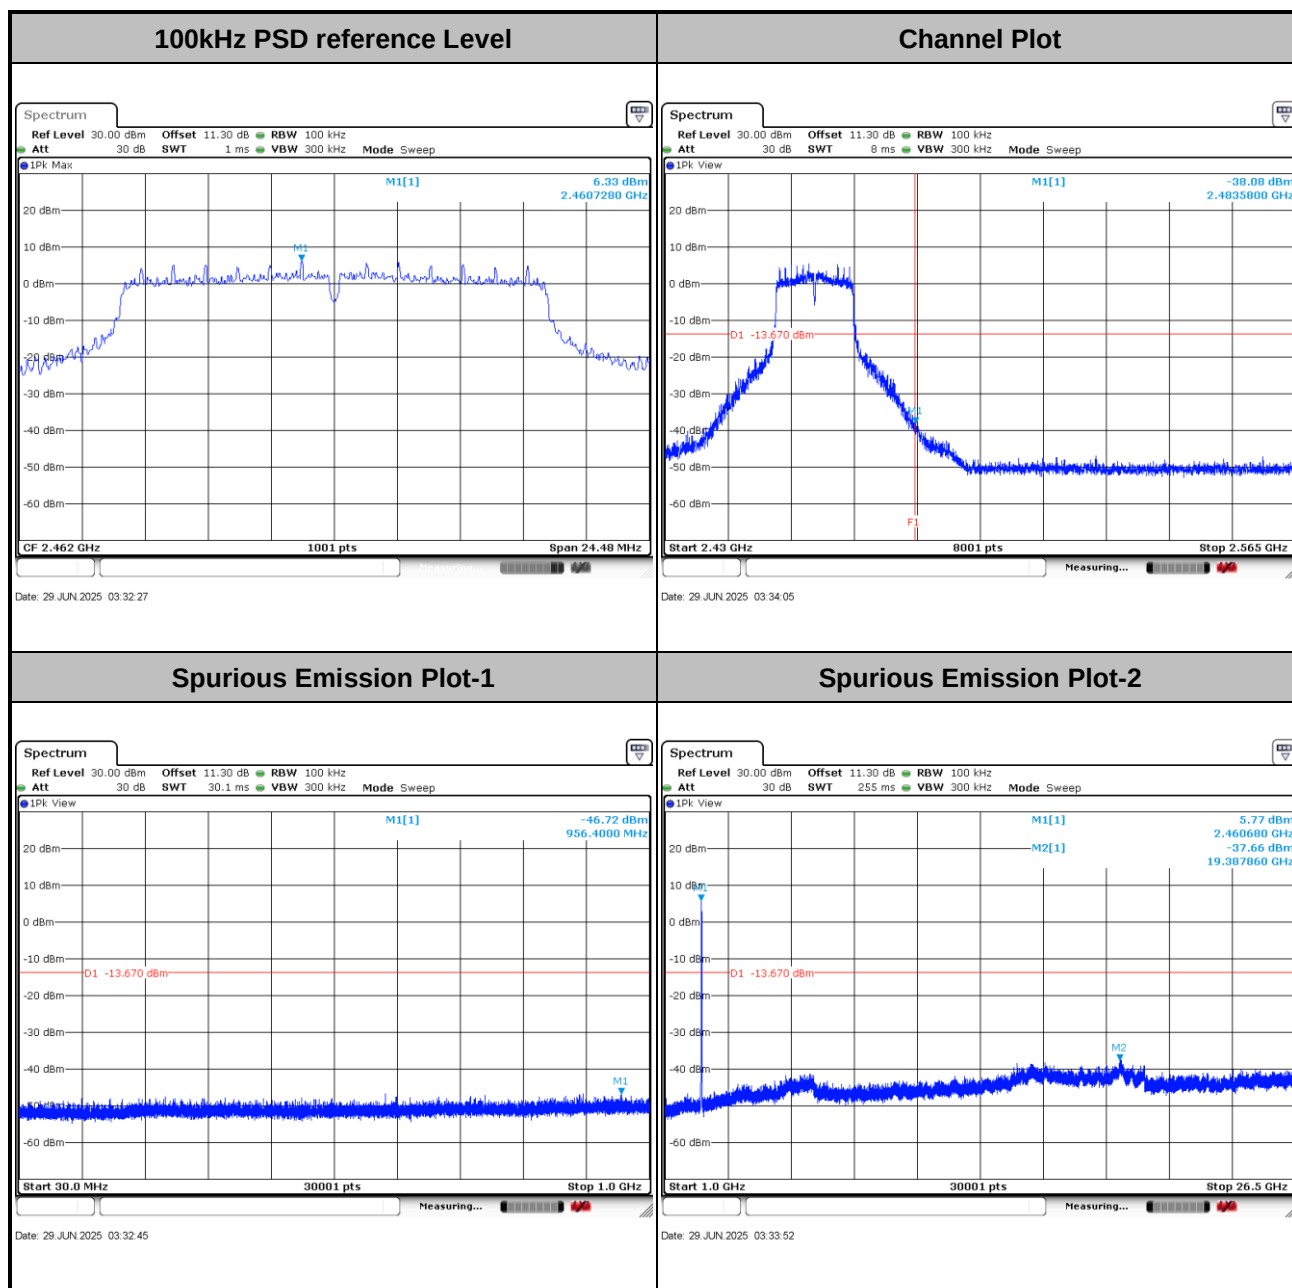




Test Mode : 802.11n HT20


Test Channel : 01

100kHz PSD reference Level

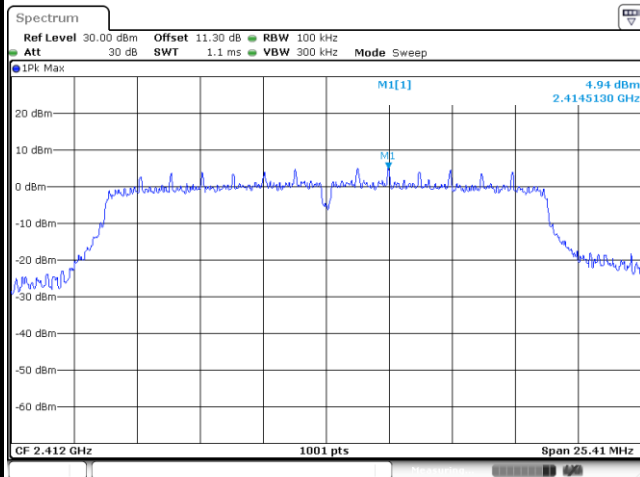


Date: 29 JUN 2025 03:36:04

Channel Plot

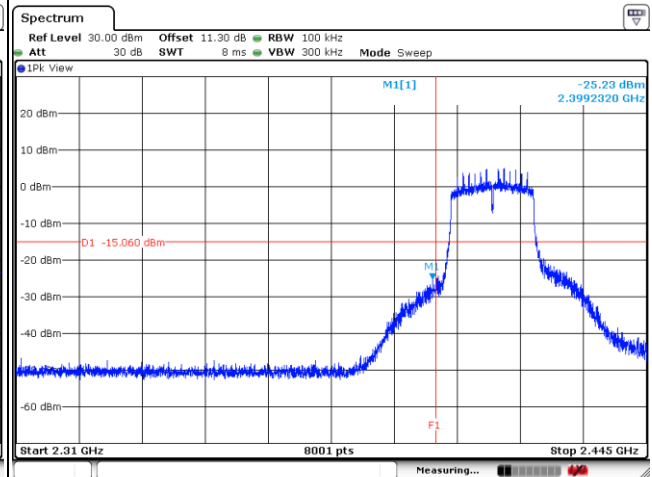


Date: 29 JUN 2025 03:39:00

Spurious Emission Plot-1

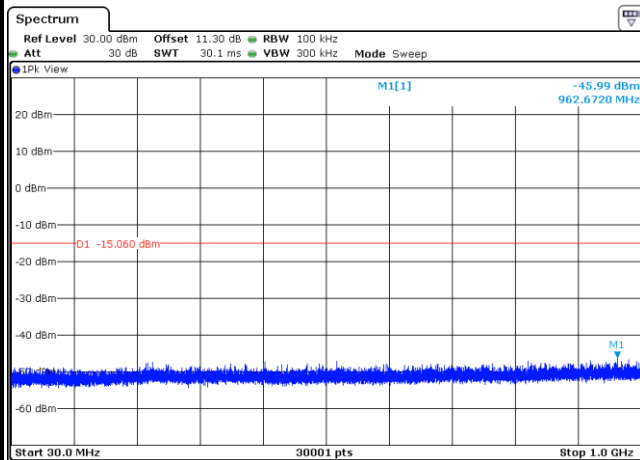

Date: 29 JUN 2025 03:36:21

Spurious Emission Plot-2

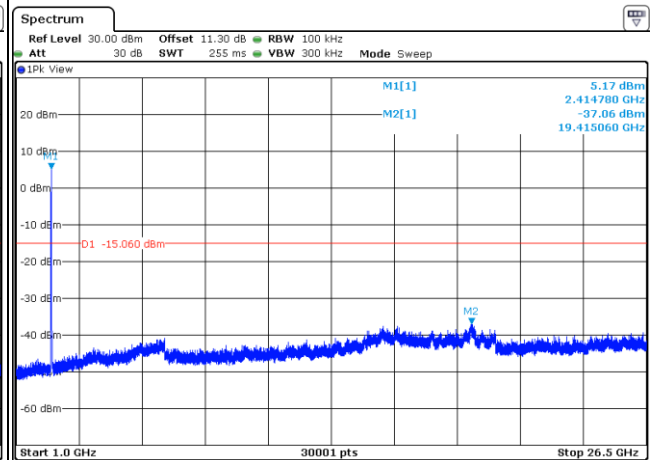


Date: 29 JUN 2025 03:38:45




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

100kHz PSD reference Level

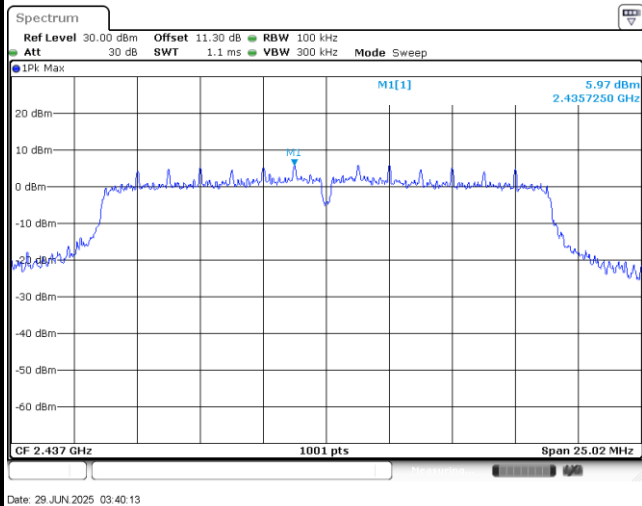


Channel Plot

Spurious Emission Plot-1

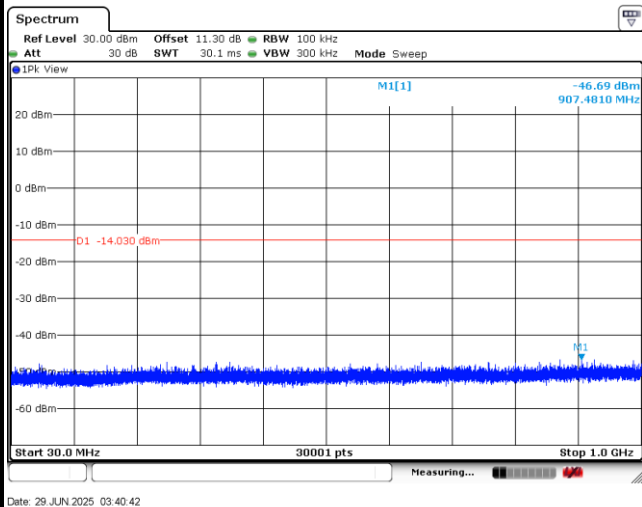

Spurious Emission Plot-2

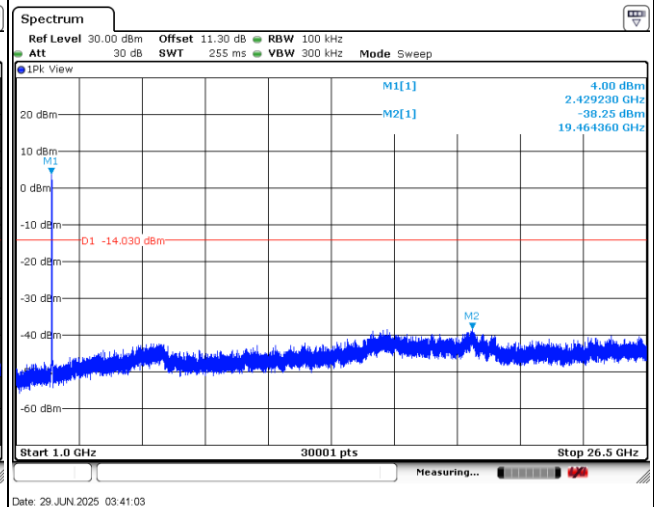





Test Mode : 802.11n HT20

Test Channel : 11


100kHz PSD reference Level

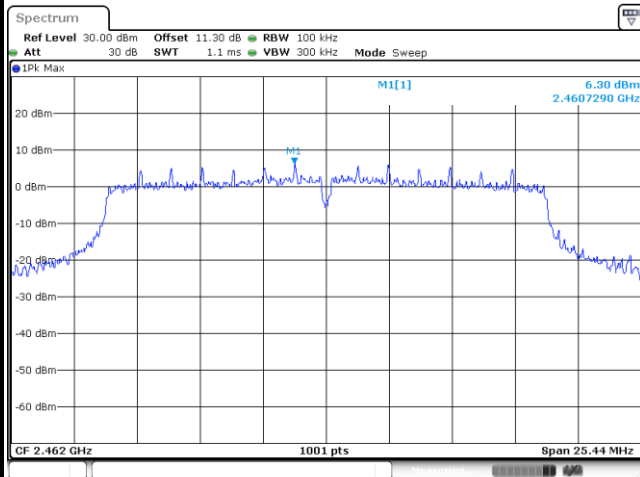


Channel Plot

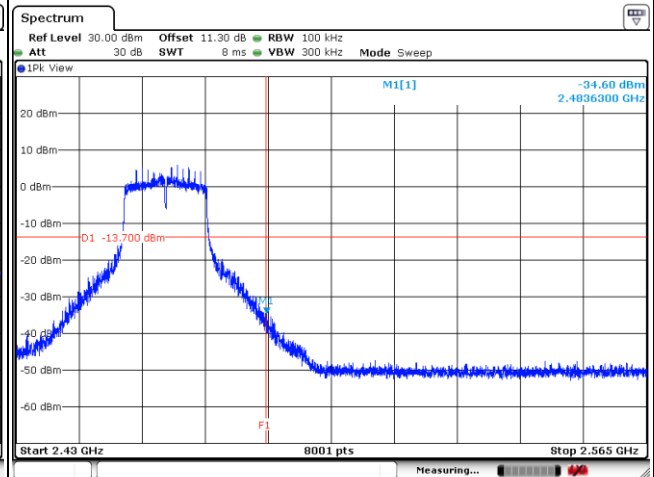

Spurious Emission Plot-1

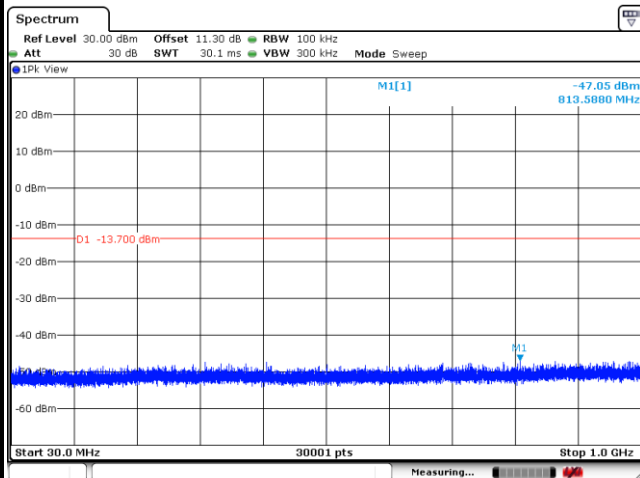


Spurious Emission Plot-2

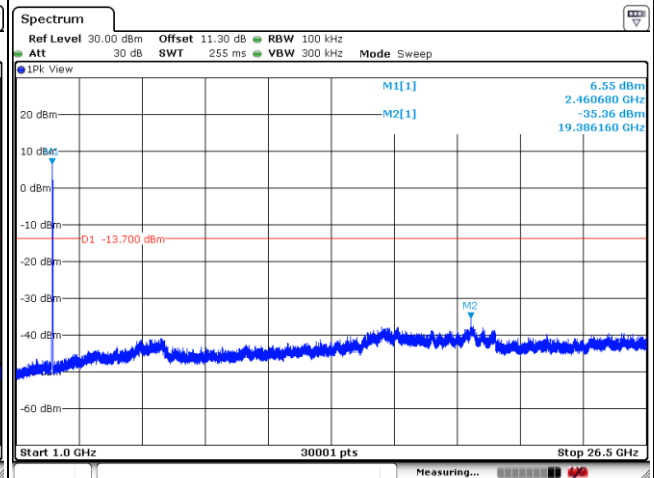




Test Mode :	802.11ax HE20	Test Channel :	03
-------------	---------------	----------------	----

100kHz PSD reference Level

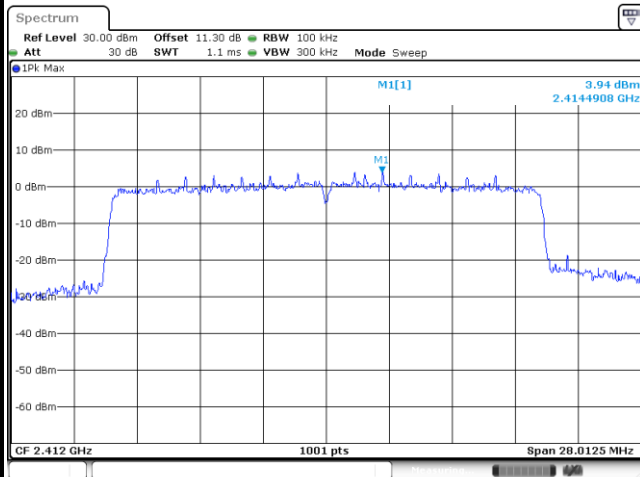


Date: 29 JUN 2025 03:48:43

Channel Plot

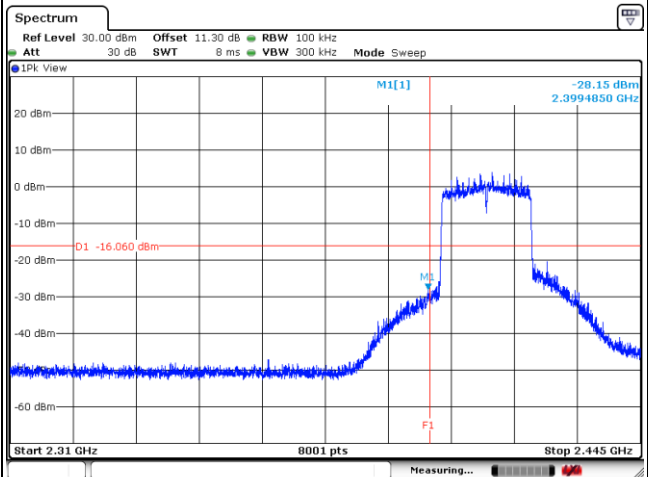


Date: 29 JUN 2025 03:51:48

Spurious Emission Plot-1

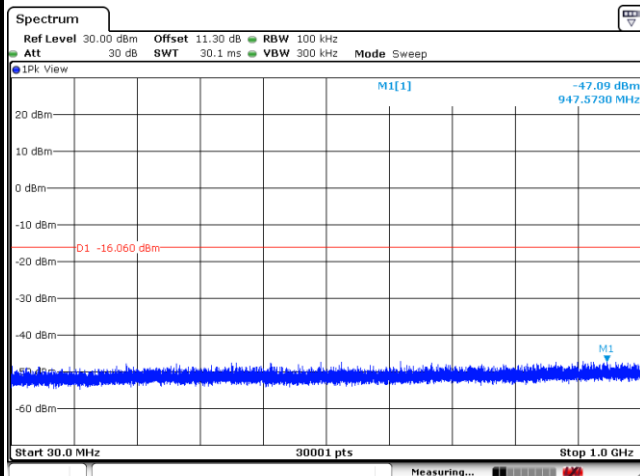

Date: 29 JUN 2025 03:51:20

Spurious Emission Plot-2

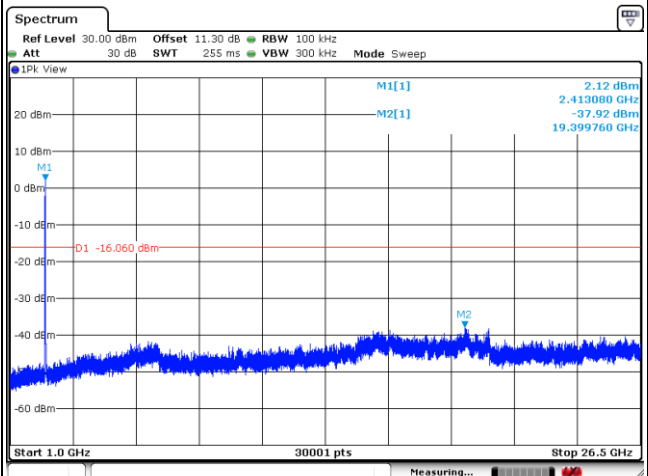


Date: 29 JUN 2025 03:51:36




Test Mode :	802.11ax HE20	Test Channel :	06
-------------	---------------	----------------	----

100kHz PSD reference Level

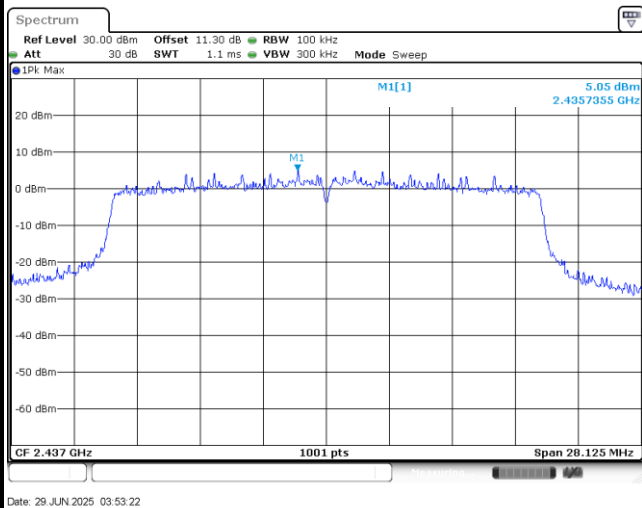


Channel Plot

Spurious Emission Plot-1

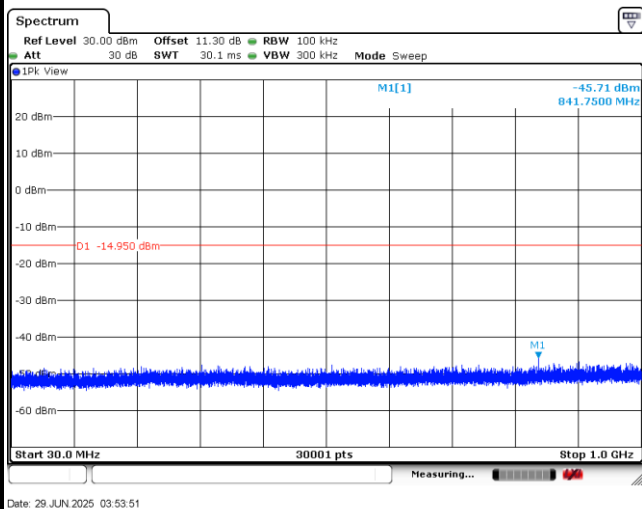


Spurious Emission Plot-2

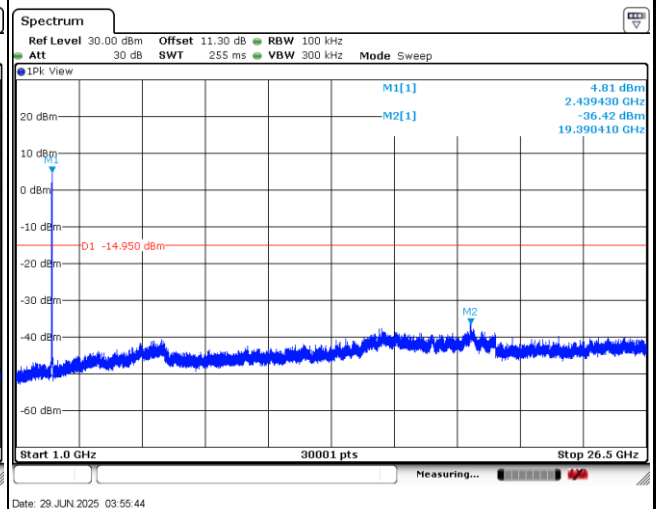



Test Mode :	802.11ax HE20	Test Channel :	09
-------------	---------------	----------------	----

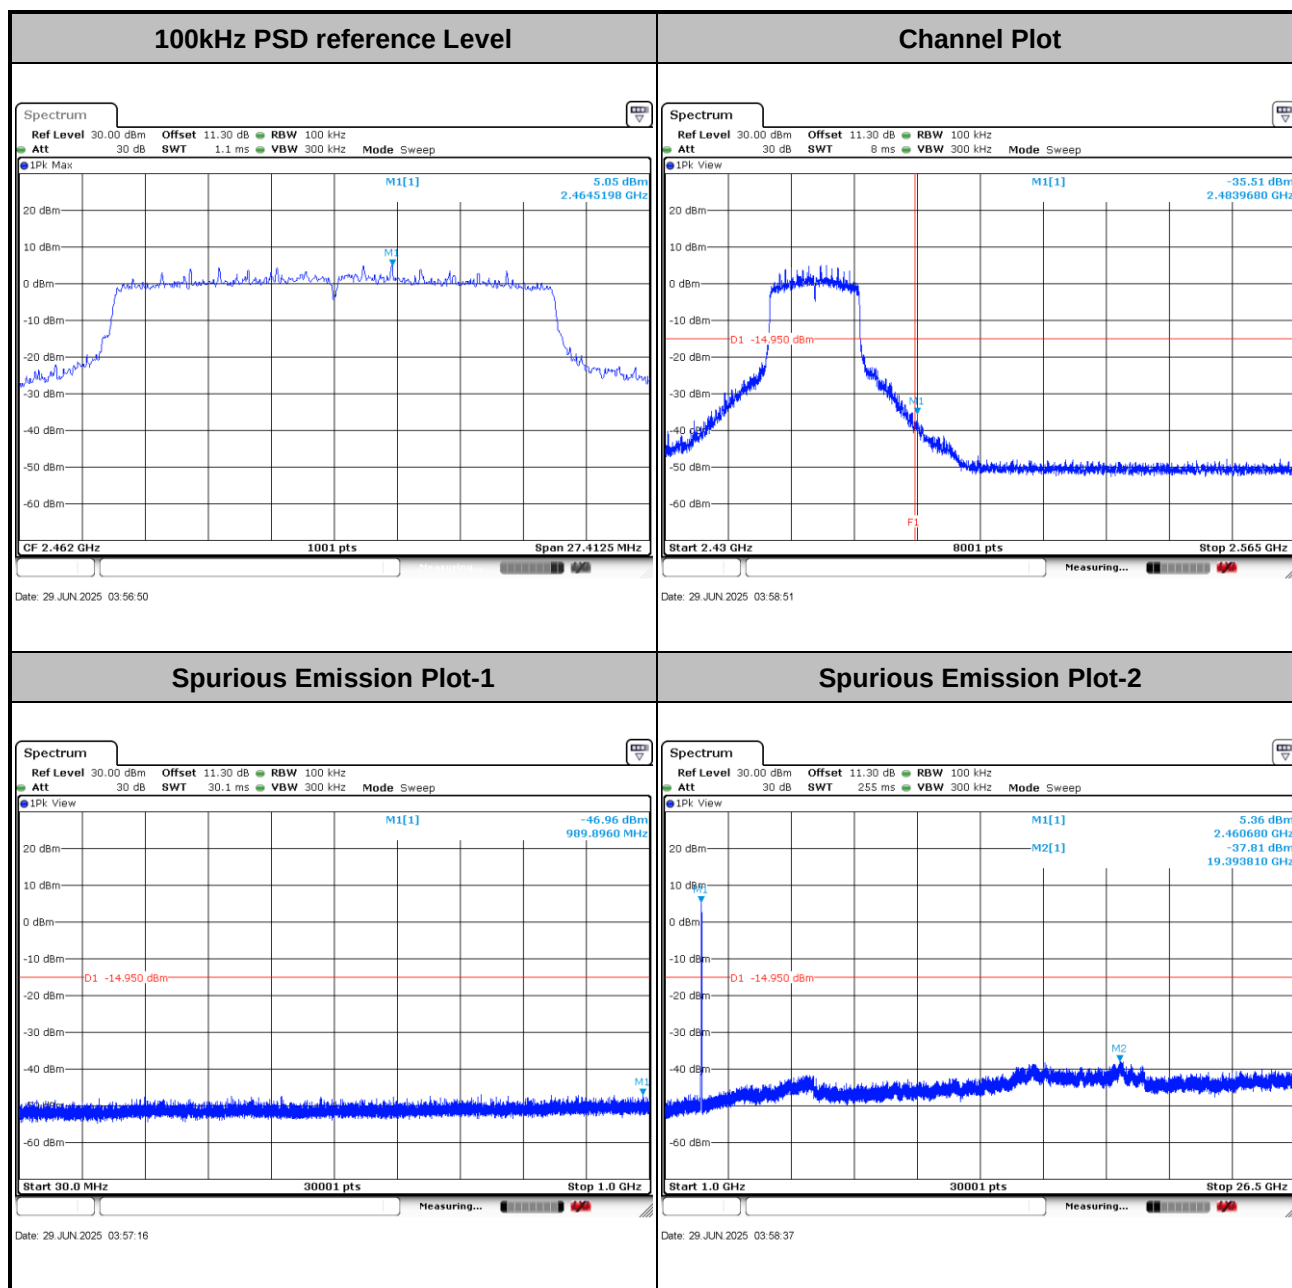

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

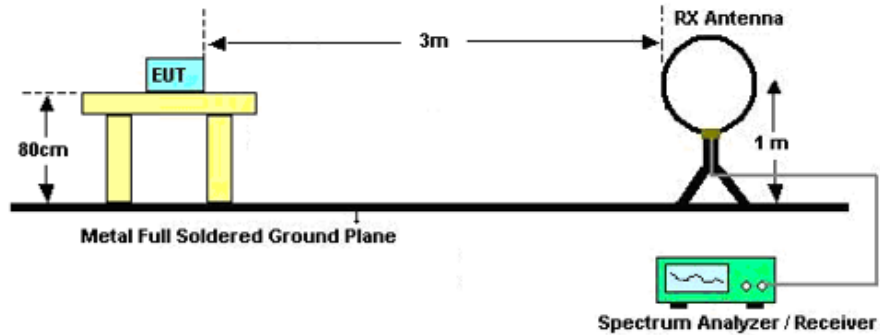

For radiated emissions from 30MHz to 1GHz

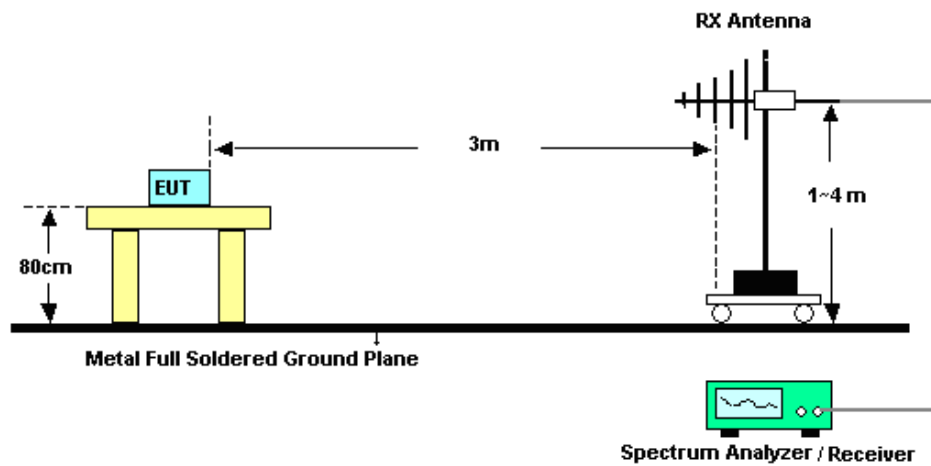

For radiated emissions above 1GHz

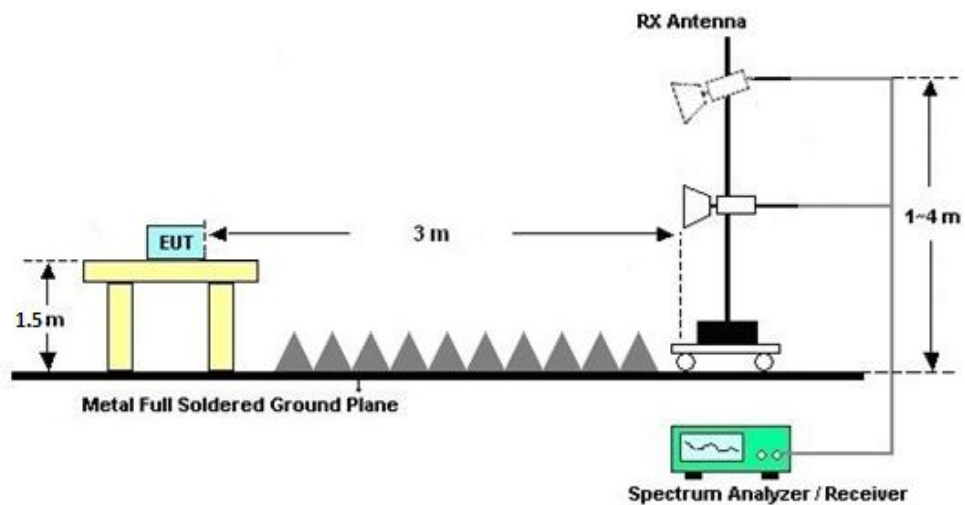

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

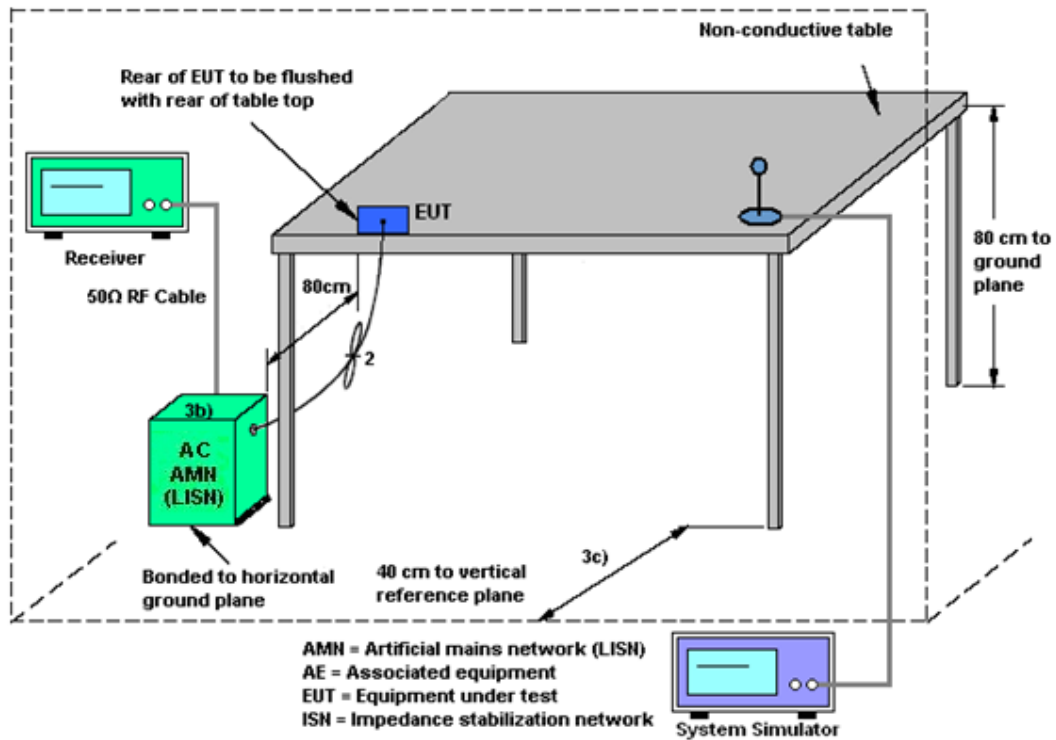

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Jul. 13, 2025	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Jul. 13, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Jul. 13, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 25, 2024	Jul. 02, 2025~Jul. 30, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Jul. 02, 2025~Jul. 30, 2025	Jul. 02, 2026	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Jul. 02, 2025~Jul. 30, 2025	Dec. 27, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Jul. 02, 2025~Jul. 30, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2025	Jul. 02, 2025~Jul. 30, 2025	Jul. 03, 2026	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2025	Jul. 02, 2025~Jul. 30, 2025	Apr. 02, 2027	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	Jul. 02, 2025~Jul. 30, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Jul. 02, 2025~Jul. 30, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 14, 2024	Jul. 02, 2025~Jul. 30, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Jul. 02, 2025~Jul. 30, 2025	Jul. 02, 2026	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14, 2024	Jul. 02, 2025~Jul. 30, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 02, 2025~Jul. 30, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jul. 02, 2025~Jul. 30, 2025	NCR	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Jun. 29, 2025~Jun. 30, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Jun. 29, 2025~Jun. 30, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 14, 2024	Jun. 29, 2025~Jun. 30, 2025	Oct. 13, 2025	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	HuangKaibiao	Temperature:	21~25	°C
Test Date:	2025/6/29~2025/6/30	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant8	Ant8		
11b	1Mbps	1	1	2412	12.75	8.58	0.50	Pass
11b	1Mbps	1	6	2437	12.94	8.08	0.50	Pass
11b	1Mbps	1	11	2462	12.95	7.62	0.50	Pass
11g	6Mbps	1	1	2412	17.22	16.08	0.50	Pass
11g	6Mbps	1	6	2437	16.90	16.32	0.50	Pass
11g	6Mbps	1	11	2462	16.89	16.32	0.50	Pass
HT20	MCS0	1	1	2412	18.17	16.94	0.50	Pass
HT20	MCS0	1	6	2437	18.08	16.68	0.50	Pass
HT20	MCS0	1	11	2462	18.07	16.96	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant8	Ant8	Ant8	Ant8	Ant8	
11b	1Mbps	1	1	2412	14.90	30.00	1.00	15.90	36.00	Pass
11b	1Mbps	1	6	2437	15.40	30.00	1.00	16.40	36.00	Pass
11b	1Mbps	1	11	2462	15.40	30.00	1.00	16.40	36.00	Pass
11g	6Mbps	1	1	2412	13.10	30.00	1.00	14.10	36.00	Pass
11g	6Mbps	1	2	2417	15.00	30.00	1.00	16.00	36.00	Pass
11g	6Mbps	1	6	2437	15.30	30.00	1.00	16.30	36.00	Pass
11g	6Mbps	1	10	2457	15.50	30.00	1.00	16.50	36.00	Pass
11g	6Mbps	1	11	2462	13.00	30.00	1.00	14.00	36.00	Pass
HT20	MCS0	1	1	2412	12.60	30.00	1.00	13.60	36.00	Pass
HT20	MCS0	1	2	2417	15.40	30.00	1.00	16.40	36.00	Pass
HT20	MCS0	1	6	2437	15.50	30.00	1.00	16.50	36.00	Pass
HT20	MCS0	1	10	2457	15.90	30.00	1.00	16.90	36.00	Pass
HT20	MCS0	1	11	2462	12.70	30.00	1.00	13.70	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
						Ant8	Ant8		
HE20	MCS0	1	1	2412	Full	18.94	18.68	0.50	Pass
HE20	MCS0	1	1	2412	26/0		2.03	0.50	Pass
HE20	MCS0	1	1	2412	52/37		12.05	0.50	Pass
HE20	MCS0	1	1	2412	106/53		17.18	0.50	Pass
HE20	MCS0	1	6	2437	Full	19.05	18.75	0.50	Pass
HE20	MCS0	1	11	2462	Full	19.06	18.28	0.50	Pass
HE20	MCS0	1	11	2462	26/8		2.05	0.50	Pass
HE20	MCS0	1	11	2462	52/40		15.88	0.50	Pass
HE20	MCS0	1	11	2462	106/54		15.93	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant8	Ant8	Ant8	Ant8	Ant8	
HE20	MCS0	1	1	2412	Full	12.20	30.00	1.00	13.20	36.00	Pass
HE20	MCS0	1	1	2412	26/0	1.90	30.00	1.00	2.90	36.00	Pass
HE20	MCS0	1	1	2412	52/37	4.50	30.00	1.00	5.50	36.00	Pass
HE20	MCS0	1	1	2412	106/53	7.30	30.00	1.00	8.30	36.00	Pass
HE20	MCS0	1	2	2417	Full	15.50	30.00	1.00	16.50	36.00	Pass
HE20	MCS0	1	6	2437	Full	15.60	30.00	1.00	16.60	36.00	Pass
HE20	MCS0	1	10	2457	Full	15.50	30.00	1.00	16.50	36.00	Pass
HE20	MCS0	1	11	2462	Full	12.10	30.00	1.00	13.10	36.00	Pass
HE20	MCS0	1	11	2462	26/8	2.80	30.00	1.00	3.80	36.00	Pass
HE20	MCS0	1	11	2462	52/40	5.80	30.00	1.00	6.80	36.00	Pass
HE20	MCS0	1	11	2462	106/54	8.70	30.00	1.00	9.70	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant8	Ant8	Ant8	Ant8	Ant8	
11b	1Mbps	1	1	2412	16.23	30.00	1.00	17.23	36.00	Pass
11b	1Mbps	1	6	2437	17.44	30.00	1.00	18.44	36.00	Pass
11b	1Mbps	1	11	2462	17.61	30.00	1.00	18.61	36.00	Pass
11g	6Mbps	1	1	2412	21.69	30.00	1.00	22.69	36.00	Pass
11g	6Mbps	1	2	2417	20.12	30.00	1.00	21.12	36.00	Pass
11g	6Mbps	1	6	2437	21.24	30.00	1.00	22.24	36.00	Pass
11g	6Mbps	1	10	2457	22.14	30.00	1.00	23.14	36.00	Pass
11g	6Mbps	1	11	2462	21.53	30.00	1.00	22.53	36.00	Pass
HT20	MCS0	1	1	2412	21.76	30.00	1.00	22.76	36.00	Pass
HT20	MCS0	1	2	2417	21.88	30.00	1.00	22.88	36.00	Pass
HT20	MCS0	1	6	2437	22.30	30.00	1.00	23.30	36.00	Pass
HT20	MCS0	1	10	2457	23.22	30.00	1.00	24.22	36.00	Pass
HT20	MCS0	1	11	2462	21.67	30.00	1.00	22.67	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant8	Ant8	Ant8	Ant8	Ant8	
HE20	MCS0	1	1	2412	Full	21.05	30.00	1.00	22.05	36.00	Pass
HE20	MCS1	1	1	2412	26/0	12.70	30.00	1.00	13.70	36.00	Pass
HE20	MCS2	1	1	2412	52/37	15.24	30.00	1.00	16.24	36.00	Pass
HE20	MCS3	1	1	2412	106/53	18.16	30.00	1.00	19.16	36.00	Pass
HE20	MCS4	1	2	2417	Full	21.96	30.00	1.00	22.96	36.00	Pass
HE20	MCS0	1	6	2437	Full	22.81	30.00	1.00	23.81	36.00	Pass
HE20	MCS12	1	10	2457	Full	22.89	30.00	1.00	23.89	36.00	Pass
HE20	MCS0	1	11	2462	Full	20.85	30.00	1.00	21.85	36.00	Pass
HE20	MCS0	1	11	2462	26/8	13.46	30.00	1.00	14.46	36.00	Pass
HE20	MCS0	1	11	2462	52/40	16.61	30.00	1.00	17.61	36.00	Pass
HE20	MCS0	1	11	2462	106/54	19.95	30.00	1.00	20.95	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)		DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant8	Worse + 3.01	Ant8	Ant8	
11b	1Mbps	1	1	2412	-5.67		1.00	8.00	Pass
11b	1Mbps	1	6	2437	-3.82		1.00	8.00	Pass
11b	1Mbps	1	11	2462	-4.85		1.00	8.00	Pass
11g	6Mbps	1	1	2412	-8.44		1.00	8.00	Pass
11g	6Mbps	1	6	2437	-7.95		1.00	8.00	Pass
11g	6Mbps	1	11	2462	-8.07		1.00	8.00	Pass
HT20	MCS0	1	1	2412	-8.62		1.00	8.00	Pass
HT20	MCS0	1	6	2437	-8.40		1.00	8.00	Pass
HT20	MCS0	1	11	2462	-8.37		1.00	8.00	Pass

TEST RESULTS DATA
Peak Power Spectral Density


2.4GHz Band Single Antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
						Ant8	Ant8	Ant8	
HE20	MCS0	1	1	2412	Full	-11.07	1.00	8.00	Pass
HE20	MCS0	1	1	2412	26/0	-11.43	1.00	8.00	Pass
HE20	MCS0	1	1	2412	52/37	-11.52	1.00	8.00	Pass
HE20	MCS0	1	1	2412	106/53	-11.85	1.00	8.00	Pass
HE20	MCS0	1	6	2437	Full	-10.09	1.00	8.00	Pass
HE20	MCS0	1	11	2462	Full	-8.95	1.00	8.00	Pass
HE20	MCS0	1	11	2462	26/8	-9.45	1.00	8.00	Pass
HE20	MCS0	1	11	2462	52/40	-9.17	1.00	8.00	Pass
HE20	MCS0	1	11	2462	106/54	-9.31	1.00	8.00	Pass

Measured power density (dBm) has offset with cable loss.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

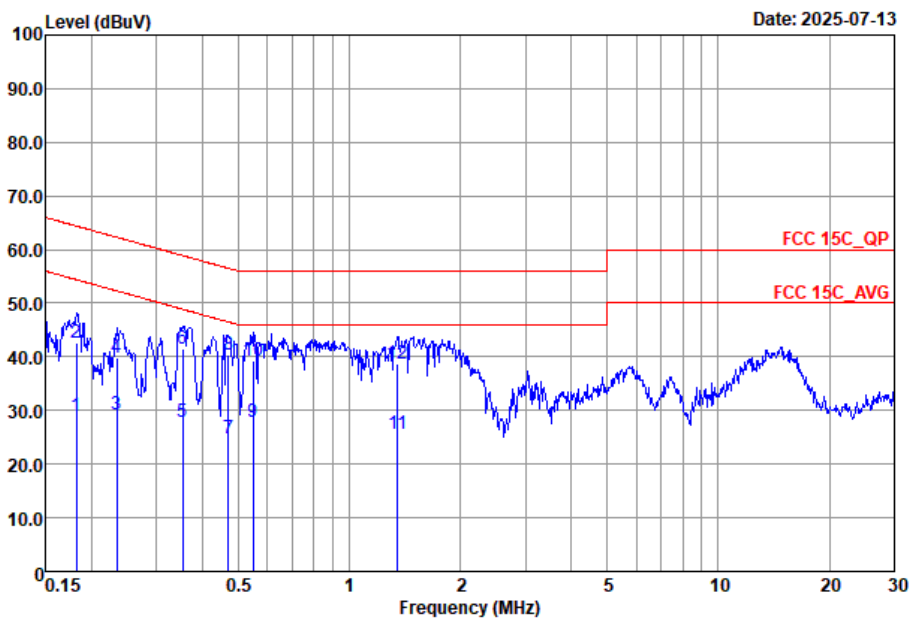


Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18	28.88	-25.49	54.37	9.01	9.69	10.18	Average
2	0.18	42.68	-21.69	64.37	22.81	9.69	10.18	QP
3	0.23	29.21	-23.09	52.30	9.30	9.72	10.19	Average
4	0.23	39.91	-22.39	62.30	20.00	9.72	10.19	QP
5	0.35	27.95	-20.92	48.87	8.00	9.73	10.22	Average
6	0.35	41.55	-17.32	58.87	21.60	9.73	10.22	QP
7	0.47	24.92	-21.57	46.49	4.99	9.69	10.24	Average
8 *	0.47	40.42	-16.07	56.49	20.49	9.69	10.24	QP
9	0.55	27.91	-18.09	46.00	8.00	9.67	10.24	Average
10	0.55	39.21	-16.79	56.00	19.30	9.67	10.24	QP
11	1.35	25.71	-20.29	46.00	5.80	9.67	10.24	Average
12	1.35	38.61	-17.39	56.00	18.70	9.67	10.24	QP



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

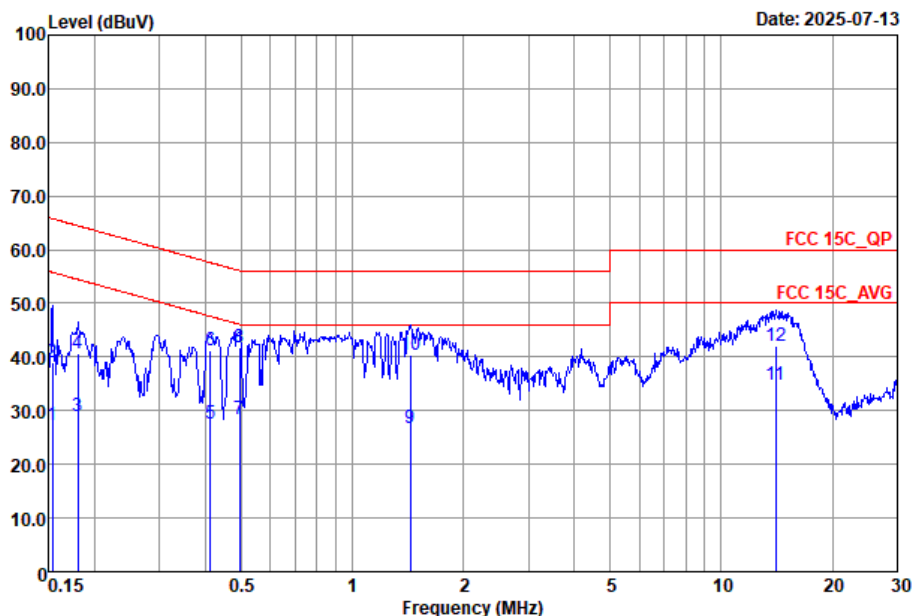

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	27.18	-28.60	55.78	7.40	9.59	10.19	Average
2	0.15	38.98	-26.80	65.78	19.20	9.59	10.19	QP
3	0.18	29.08	-25.38	54.46	9.11	9.79	10.18	Average
4	0.18	40.78	-23.68	64.46	20.81	9.79	10.18	QP
5	0.41	27.60	-19.99	47.59	7.49	9.88	10.23	Average
6	0.41	41.10	-16.49	57.59	20.99	9.88	10.23	QP
7	0.49	28.51	-17.59	46.10	8.20	10.07	10.24	Average
8 *	0.49	41.81	-14.29	56.10	21.50	10.07	10.24	QP
9	1.43	26.64	-19.36	46.00	6.69	9.70	10.25	Average
10	1.43	40.34	-15.66	56.00	20.39	9.70	10.25	QP
11	14.06	34.75	-15.25	50.00	14.79	9.70	10.26	Average
12	14.06	41.95	-18.05	60.00	21.99	9.70	10.26	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	HuaCong Liang	Relative Humidity :	48~49%
		Temperature :	24~25°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 10	2400-2483.5	8	802.11b	1	2412	1Mbps	-	-
Mode 11	2400-2483.5	8	802.11b	6	2437	1Mbps	-	-
Mode 12	2400-2483.5	8	802.11b	11	2462	1Mbps	-	-
Mode 13	2400-2483.5	8	802.11g	1	2412	6Mbps	-	-
Mode 14	2400-2483.5	8	802.11g	6	2437	6Mbps	-	-
Mode 15	2400-2483.5	8	802.11g	11	2462	6Mbps	-	-
Mode 16	2400-2483.5	8	802.11n HT20	1	2412	MCS0	Full	-
Mode 17	2400-2483.5	8	802.11n HT20	6	2437	MCS0	Full	-
Mode 18	2400-2483.5	8	802.11n HT20	11	2462	MCS0	Full	-
Mode 19	2400-2483.5	8	802.11ax HE20	1	2412	MCS0	Full	-
Mode 20	2400-2483.5	8	802.11ax HE20	6	2437	MCS0	Full	-
Mode 21	2400-2483.5	8	802.11ax HE20	11	2462	MCS0	Full	-
Mode 22	2400-2483.5	8	802.11ax HE20	1	2412	MCS0	Partial RU26/0	-
Mode 23	2400-2483.5	8	802.11ax HE20	1	2412	MCS0	Partial RU52/37	-
Mode 24	2400-2483.5	8	802.11ax HE20	1	2412	MCS0	Partial RU106/53	-
Mode 25	2400-2483.5	8	802.11ax HE20	11	2462	MCS0	Partial RU26/8	-
Mode 26	2400-2483.5	8	802.11ax HE20	11	2462	MCS0	Partial RU52/40	-
Mode 27	2400-2483.5	8	802.11ax HE20	11	2462	MCS0	Partial RU106/54	-
Mode 30	2400-2483.5	8	11ax HE20 LF	11	2462	MCS0	-	LF
Mode 31	2400-2483.5	8	802.11g	6	2437	6Mbps	-	-
Mode 32	2400-2483.5	8	802.11n HT20	6	2437	MCS0	Full	-
Mode 33	2400-2483.5	8	802.11ax HE20	6	2437	MCS0	Full	-
Mode 34	2400-2483.5	8	802.11g	10	2457	6Mbps	-	-
Mode 35	2400-2483.5	8	802.11n HT20	10	2457	MCS0	-	-
Mode 36	2400-2483.5	8	802.11ax HE20	10	2457	MCS0	-	-
Mode 37	2400-2483.5	8	802.11g	2	2417	6Mbps	-	-
Mode 38	2400-2483.5	8	802.11n HT20	2	2417	MCS0	-	-
Mode 39	2400-2483.5	8	802.11ax HE20	2	2417	MCS0	-	-

Co-location

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 40	CO_TX	8	11ax HE20	11	2462	MCS0	-	-
		6	NR	N48	-	-	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
10	802.11b	1	2385.40	42.14	54.00	-11.86	H	AVERAGE	Pass	Band Edge
10	802.11b	1	4824.00	47.40	54.00	-6.60	H	Average	Pass	Harmonic
11	802.11b	6	-	-	-	-	-	-	-	Band Edge
11	802.11b	6	4874.00	51.56	54.00	-2.44	H	Average	Pass	Harmonic
12	802.11b	11	2486.93	48.11	54.00	-5.89	H	AVERAGE	Pass	Band Edge
12	802.11b	11	4924.00	49.11	54.00	-4.89	H	Average	Pass	Harmonic
13	802.11g	1	2389.95	49.85	54.00	-4.15	H	AVERAGE	Pass	Band Edge
13	802.11g	1	4824.00	45.10	74.00	-28.90	H	Peak	Pass	Harmonic
14	802.11g	6	-	-	-	-	-	-	-	Band Edge
14	802.11g	6	7311.00	45.55	74.00	-28.45	V	Peak	Pass	Harmonic
15	802.11g	11	2483.51	49.92	54.00	-4.08	H	AVERAGE	Pass	Band Edge
15	802.11g	11	7386.00	45.67	74.00	-28.33	V	Peak	Pass	Harmonic
16	802.11n HT20	1	2389.69	49.72	54.00	-4.28	H	AVERAGE	Pass	Band Edge
16	802.11n HT20	1	4824.00	44.52	74.00	-29.48	H	Peak	Pass	Harmonic
17	802.11n HT20	6	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	6	7311.00	45.31	74.00	-28.69	H	Peak	Pass	Harmonic
18	802.11n HT20	11	2483.51	48.94	54.00	-5.06	H	AVERAGE	Pass	Band Edge
18	802.11n HT20	11	7386.00	45.94	74.00	-28.06	V	Peak	Pass	Harmonic
19	802.11ax HE20	1	2389.95	49.97	54.00	-4.03	H	AVERAGE	Pass	Band Edge
19	802.11ax HE20	1	4824.00	44.63	74.00	-29.37	H	Peak	Pass	Harmonic
20	802.11ax HE20	6	-	-	-	-	-	-	-	Band Edge
20	802.11ax HE20	6	7311.00	45.78	74.00	-28.22	V	Peak	Pass	Harmonic
21	802.11ax HE20	11	2483.55	50.80	54.00	-3.20	H	AVERAGE	Pass	Band Edge
21	802.11ax HE20	11	7386.00	45.12	74.00	-28.88	H	Peak	Pass	Harmonic
22	802.11ax HE20	1	2389.82	36.24	54.00	-17.76	H	AVERAGE	Pass	Band Edge
22	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
23	802.11ax HE20	1	2389.04	37.07	54.00	-16.93	H	AVERAGE	Pass	Band Edge
23	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
24	802.11ax HE20	1	2389.82	39.34	54.00	-14.66	H	AVERAGE	Pass	Band Edge
24	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
25	802.11ax HE20	11	2485.90	37.27	54.00	-16.73	H	AVERAGE	Pass	Band Edge
25	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
26	802.11ax HE20	11	2487.04	38.32	54.00	-15.68	H	AVERAGE	Pass	Band Edge
26	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE20	11	2484.23	45.46	54.00	-8.54	H	AVERAGE	Pass	Band Edge
27	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
30	11ax HE20 LF	11	33.88	25.52	40.00	-14.48	V	Peak	Pass	LF
31	802.11g	6	2486.52	43.02	54.00	-10.98	H	AVERAGE	Pass	Band Edge
31	802.11g	6	-	-	-	-	-	-	-	Harmonic
32	802.11n HT20	6	2486.52	42.91	54.00	-11.09	H	AVERAGE	Pass	Band Edge
32	802.11n HT20	6	-	-	-	-	-	-	-	Harmonic
33	802.11ax HE20	6	2485.89	42.56	54.00	-11.44	H	AVERAGE	Pass	Band Edge
33	802.11ax HE20	6	-	-	-	-	-	-	-	Harmonic
34	802.11g	10	2483.66	49.81	54.00	-4.19	H	AVERAGE	Pass	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
34	802.11g	10	-	-	-	-	-	-	-	Harmonic
35	802.11n HT20	10	2483.70	49.37	54.00	-4.63	H	AVERAGE	Pass	Band Edge
35	802.11n HT20	10	-	-	-	-	-	-	-	Harmonic
36	802.11ax HE20	10	2483.62	50.66	54.00	-3.34	H	AVERAGE	Pass	Band Edge
36	802.11ax HE20	10	-	-	-	-	-	-	-	Harmonic
37	802.11g	2	2389.82	49.98	54.00	-4.02	H	AVERAGE	Pass	Band Edge
37	802.11g	2	-	-	-	-	-	-	-	Harmonic
38	802.11n HT20	2	2389.95	48.77	54.00	-5.23	H	AVERAGE	Pass	Band Edge
38	802.11n HT20	2	-	-	-	-	-	-	-	Harmonic
39	802.11ax HE20	2	2389.95	48.14	54.00	-5.86	H	AVERAGE	Pass	Band Edge
39	802.11ax HE20	2	-	-	-	-	-	-	-	Harmonic

Co-location

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
40	802.11ax HE20	11	2483.51	49.48	54.00	-4.52	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	11	7386.00	45.92	74.00	-28.08	V	Peak	Pass	Harmonic

CO-TX WWAN RSE of table 2

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
40	5G NR n48	641666	7212	46.92	55.16	-8.24	H	PEAK	Pass	Harmonic
40	5G NR n48	641666	10818	51.98	55.16	-3.18	H	PEAK	Pass	Harmonic
40	5G NR n48	641666	7212	46.18	55.16	-8.98	V	PEAK	Pass	Harmonic
40	5G NR n48	641666	10818	51.55	55.16	-3.61	V	PEAK	Pass	Harmonic

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm, -40dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBuV/m

d_{Meas} is the measurement distance, in m, 3m



Mode	10																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH1_2412MHz																																																																																	
ANT	8																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>48.04</td><td>74.00</td><td>-25.96</td><td>43.22</td><td>30.60</td><td>6.86</td><td>32.64</td><td>135 333 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	48.04	74.00	-25.96	43.22	30.60	6.86	32.64	135 333 PEAK	Level (dBuV/m) Date: 2025-07-03 Frequency (MHz) PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>107.43</td><td>-----</td><td>-----</td><td>102.56</td><td>30.62</td><td>6.89</td><td>32.64</td><td>135 333 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.43	-----	-----	102.56	30.62	6.89	32.64	135 333 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.17	48.04	74.00	-25.96	43.22	30.60	6.86	32.64	135 333 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	107.43	-----	-----	102.56	30.62	6.89	32.64	135 333 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-07-03 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.40</td><td>42.14</td><td>54.00</td><td>-11.86</td><td>37.33</td><td>30.60</td><td>6.86</td><td>32.65</td><td>135 333 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2385.40	42.14	54.00	-11.86	37.33	30.60	6.86	32.65	135 333 AVERAGE	Level (dBuV/m) Date: 2025-07-03 Frequency (MHz) AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.31</td><td>-----</td><td>-----</td><td>100.44</td><td>30.62</td><td>6.89</td><td>32.64</td><td>135 333 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.31	-----	-----	100.44	30.62	6.89	32.64	135 333 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2385.40	42.14	54.00	-11.86	37.33	30.60	6.86	32.65	135 333 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	105.31	-----	-----	100.44	30.62	6.89	32.64	135 333 AVERAGE																																																																									



Mode	10									
	Band Edge									
	2400-2483.5_802.11b_CH1_2412MHz									
ANT	8									
Pol.	Vertical					Fundamental				
Peak	Level (dBuV/m) Date: 2025-07-03 1 2386.96 47.66 74.00 -26.34 42.85 30.60 6.86 32.65 384 250 PEAK					Level (dBuV/m) Date: 2025-07-03 1 2412.00 103.25 ----- 98.38 30.62 6.89 32.64 384 250 PEAK				
	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2386.96 47.66 74.00 -26.34 42.85 30.60 6.86 32.65 384 250 PEAK					Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2412.00 103.25 ----- 98.38 30.62 6.89 32.64 384 250 PEAK				
Avg	Level (dBuV/m) Date: 2025-07-03 1 2386.57 36.82 54.00 -17.18 32.01 30.60 6.86 32.65 384 250 AVERAGE					Level (dBuV/m) Date: 2025-07-03 1 2412.00 101.22 ----- 96.35 30.62 6.89 32.64 384 250 AVERAGE				
	Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2386.57 36.82 54.00 -17.18 32.01 30.60 6.86 32.65 384 250 AVERAGE					Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2412.00 101.22 ----- 96.35 30.62 6.89 32.64 384 250 AVERAGE				







Mode	10																																																																																																																					
	Harmonic																																																																																																																					
	2400-2483.5_802.11b_CH1_2412MHz																																																																																																																					
ANT	8																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																															
Peak Avg	Level (dBuV/m) Date: 2025-07-02 300060009000120001500018000 Frequency (MHz)						Level (dBuV/m) Date: 2025-07-02 300060009000120001500018000 Frequency (MHz)																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>52.19</td><td>74.00</td><td>-21.81</td><td>59.32</td><td>35.30</td><td>10.16</td><td>52.59</td><td>371</td><td>79</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>47.40</td><td>54.00</td><td>-6.60</td><td>54.53</td><td>35.30</td><td>10.16</td><td>52.59</td><td>371</td><td>79</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	52.19	74.00	-21.81	59.32	35.30	10.16	52.59	371	79	Peak	2	4824.00	47.40	54.00	-6.60	54.53	35.30	10.16	52.59	371	79	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>50.82</td><td>74.00</td><td>-23.18</td><td>57.95</td><td>35.30</td><td>10.16</td><td>52.59</td><td>302</td><td>247</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>46.43</td><td>54.00</td><td>-7.57</td><td>53.56</td><td>35.30</td><td>10.16</td><td>52.59</td><td>302</td><td>247</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	50.82	74.00	-23.18	57.95	35.30	10.16	52.59	302	247	Peak	2	4824.00	46.43	54.00	-7.57	53.56	35.30	10.16	52.59	302	247	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4824.00	52.19	74.00	-21.81	59.32	35.30	10.16	52.59	371	79	Peak																																																																																																											
2	4824.00	47.40	54.00	-6.60	54.53	35.30	10.16	52.59	371	79	Average																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4824.00	50.82	74.00	-23.18	57.95	35.30	10.16	52.59	302	247	Peak																																																																																																											
2	4824.00	46.43	54.00	-7.57	53.56	35.30	10.16	52.59	302	247	Average																																																																																																											



Mode	11																																																																																																																																																									
	Harmonic																																																																																																																																																									
	2400-2483.5_802.11b_CH6_2437MHz																																																																																																																																																									
ANT	8																																																																																																																																																									
Pol.	Horizontal							Vertical																																																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2025-07-03 PEAK_74 AVG_54							Level (dBuV/m) Date: 2025-07-03 PEAK_74 AVG_54																																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>54.23</td><td>74.00</td><td>-19.77</td><td>61.23</td><td>35.35</td><td>10.27</td><td>52.62</td><td>338</td><td>55</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>51.56</td><td>54.00</td><td>-2.44</td><td>58.56</td><td>35.35</td><td>10.27</td><td>52.62</td><td>338</td><td>55</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.82</td><td>74.00</td><td>-28.18</td><td>49.45</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>									Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	54.23	74.00	-19.77	61.23	35.35	10.27	52.62	338	55	Peak	2	4874.00	51.56	54.00	-2.44	58.56	35.35	10.27	52.62	338	55	Average	3	7311.00	45.82	74.00	-28.18	49.45	36.58	12.01	52.22	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>51.43</td><td>74.00</td><td>-22.57</td><td>58.43</td><td>35.35</td><td>10.27</td><td>52.62</td><td>329</td><td>253</td><td>Peak</td></tr><tr><td>2</td><td>4874.00</td><td>48.54</td><td>54.00</td><td>-5.46</td><td>55.54</td><td>35.35</td><td>10.27</td><td>52.62</td><td>329</td><td>253</td><td>Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.69</td><td>74.00</td><td>-28.31</td><td>49.32</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>									Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	51.43	74.00	-22.57	58.43	35.35	10.27	52.62	329	253	Peak	2	4874.00	48.54	54.00	-5.46	55.54	35.35	10.27	52.62	329	253	Average	3	7311.00	45.69	74.00	-28.31	49.32	36.58	12.01	52.22	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	4874.00	54.23	74.00	-19.77	61.23	35.35	10.27	52.62	338	55	Peak																																																																																																																																															
2	4874.00	51.56	54.00	-2.44	58.56	35.35	10.27	52.62	338	55	Average																																																																																																																																															
3	7311.00	45.82	74.00	-28.18	49.45	36.58	12.01	52.22	---	---	Peak																																																																																																																																															
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	4874.00	51.43	74.00	-22.57	58.43	35.35	10.27	52.62	329	253	Peak																																																																																																																																															
2	4874.00	48.54	54.00	-5.46	55.54	35.35	10.27	52.62	329	253	Average																																																																																																																																															
3	7311.00	45.69	74.00	-28.31	49.32	36.58	12.01	52.22	---	---	Peak																																																																																																																																															

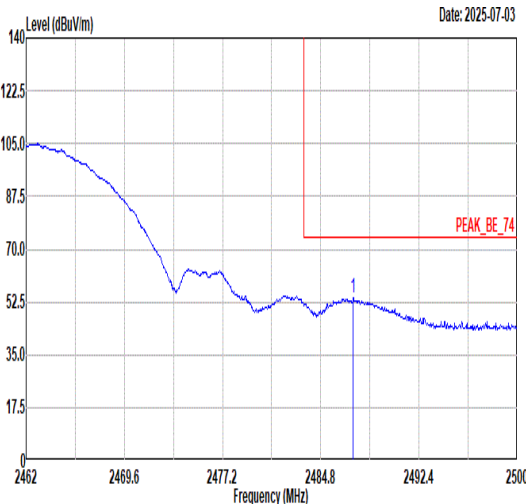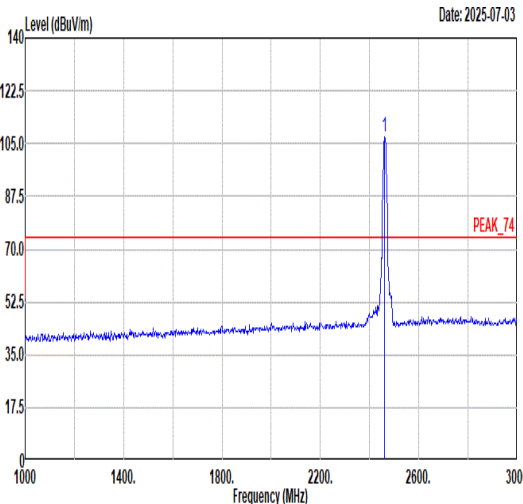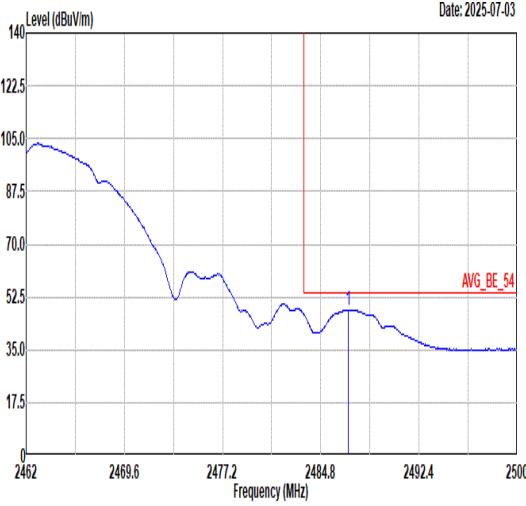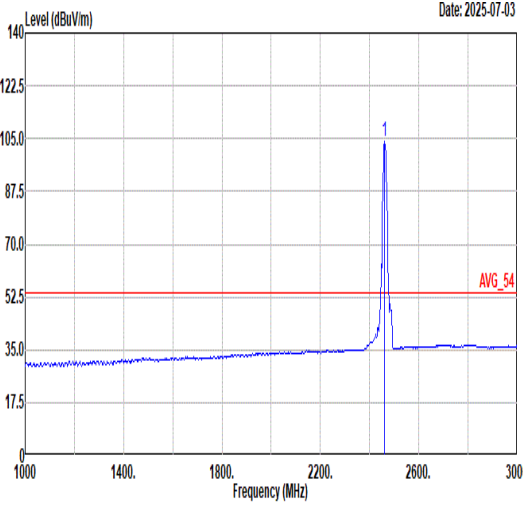

Mode	12																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11b_CH11_2462MHz																																																																																								
ANT	8																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.31</td><td>53.90</td><td>74.00</td><td>-20.10</td><td>48.90</td><td>30.63</td><td>6.98</td><td>32.61</td><td>129 332 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2487.31	53.90	74.00	-20.10	48.90	30.63	6.98	32.61	129 332 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>107.41</td><td>-----</td><td>-----</td><td>102.40</td><td>30.68</td><td>6.95</td><td>32.62</td><td>129 332 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.41	-----	-----	102.40	30.68	6.95	32.62
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2487.31	53.90	74.00	-20.10	48.90	30.63	6.98	32.61	129 332 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	107.41	-----	-----	102.40	30.68	6.95	32.62	129 332 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.93</td><td>48.11</td><td>54.00</td><td>-5.89</td><td>43.11</td><td>30.63</td><td>6.98</td><td>32.61</td><td>129 332 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2486.93	48.11	54.00	-5.89	43.11	30.63	6.98	32.61	129 332 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>103.91</td><td>-----</td><td>-----</td><td>98.90</td><td>30.68</td><td>6.95</td><td>32.62</td><td>129 332 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.91	-----	-----	98.90	30.68	6.95	32.62
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2486.93	48.11	54.00	-5.89	43.11	30.63	6.98	32.61	129 332 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	103.91	-----	-----	98.90	30.68	6.95	32.62	129 332 AVERAGE																																																																																







Mode	12																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11b_CH11_2462MHz																																																																																								
ANT	8																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2486.93</td><td>48.04</td><td>74.00</td><td>-25.96</td><td>43.04</td><td>30.63</td><td>6.98</td><td>32.61</td><td>377</td><td>241 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2486.93	48.04	74.00	-25.96	43.04	30.63	6.98	32.61	377	241 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>103.10</td><td>-----</td><td>-----</td><td>98.09</td><td>30.68</td><td>6.95</td><td>32.62</td><td>377</td><td>241 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	103.10	-----	-----	98.09	30.68	6.95	32.62	377
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2486.93	48.04	74.00	-25.96	43.04	30.63	6.98	32.61	377	241 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2462.00	103.10	-----	-----	98.09	30.68	6.95	32.62	377	241 PEAK																																																																																
Avg																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2487.04</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>35.68</td><td>30.63</td><td>6.98</td><td>32.61</td><td>377</td><td>241 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2487.04	40.68	54.00	-13.32	35.68	30.63	6.98	32.61	377	241 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>99.75</td><td>-----</td><td>-----</td><td>94.74</td><td>30.68</td><td>6.95</td><td>32.62</td><td>377</td><td>241 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	99.75	-----	-----	94.74	30.68	6.95	32.62	377
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2487.04	40.68	54.00	-13.32	35.68	30.63	6.98	32.61	377	241 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2462.00	99.75	-----	-----	94.74	30.68	6.95	32.62	377	241 AVERAGE																																																																																







Mode	12																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																													
ANT	8																																																																																																													
Pol.	Horizontal							Vertical																																																																																																						
Peak Avg																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4924.00</td><td>51.87</td><td>74.00</td><td>-22.13</td><td>58.66</td><td>35.54</td><td>10.32</td></tr><tr><td>2</td><td>4924.00</td><td>49.11</td><td>54.00</td><td>-4.89</td><td>55.90</td><td>35.54</td><td>10.32</td></tr><tr><td>3</td><td>7386.00</td><td>45.07</td><td>74.00</td><td>-28.93</td><td>48.77</td><td>36.57</td><td>11.98</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	51.87	74.00	-22.13	58.66	35.54	10.32	2	4924.00	49.11	54.00	-4.89	55.90	35.54	10.32	3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4924.00</td><td>48.35</td><td>74.00</td><td>-25.65</td><td>55.14</td><td>35.54</td><td>10.32</td></tr><tr><td>2</td><td>4924.00</td><td>45.48</td><td>54.00</td><td>-8.52</td><td>52.27</td><td>35.54</td><td>10.32</td></tr><tr><td>3</td><td>7386.00</td><td>45.07</td><td>74.00</td><td>-28.93</td><td>48.77</td><td>36.57</td><td>11.98</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	48.35	74.00	-25.65	55.14	35.54	10.32	2	4924.00	45.48	54.00	-8.52	52.27	35.54	10.32	3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	4924.00	51.87	74.00	-22.13	58.66	35.54	10.32																																																																																																							
2	4924.00	49.11	54.00	-4.89	55.90	35.54	10.32																																																																																																							
3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	4924.00	48.35	74.00	-25.65	55.14	35.54	10.32																																																																																																							
2	4924.00	45.48	54.00	-8.52	52.27	35.54	10.32																																																																																																							
3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98																																																																																																							
<table><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4924.00</td><td>51.87</td><td>74.00</td><td>-22.13</td><td>58.66</td><td>35.54</td><td>10.32</td></tr><tr><td>2</td><td>4924.00</td><td>49.11</td><td>54.00</td><td>-4.89</td><td>55.90</td><td>35.54</td><td>10.32</td></tr><tr><td>3</td><td>7386.00</td><td>45.07</td><td>74.00</td><td>-28.93</td><td>48.77</td><td>36.57</td><td>11.98</td></tr></table>																MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4924.00	51.87	74.00	-22.13	58.66	35.54	10.32	2	4924.00	49.11	54.00	-4.89	55.90	35.54	10.32	3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98	<table><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4924.00</td><td>48.35</td><td>74.00</td><td>-25.65</td><td>55.14</td><td>35.54</td><td>10.32</td></tr><tr><td>2</td><td>4924.00</td><td>45.48</td><td>54.00</td><td>-8.52</td><td>52.27</td><td>35.54</td><td>10.32</td></tr><tr><td>3</td><td>7386.00</td><td>45.07</td><td>74.00</td><td>-28.93</td><td>48.77</td><td>36.57</td><td>11.98</td></tr></table>																MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4924.00	48.35	74.00	-25.65	55.14	35.54	10.32	2	4924.00	45.48	54.00	-8.52	52.27	35.54	10.32	3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																							
1	4924.00	51.87	74.00	-22.13	58.66	35.54	10.32																																																																																																							
2	4924.00	49.11	54.00	-4.89	55.90	35.54	10.32																																																																																																							
3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																							
1	4924.00	48.35	74.00	-25.65	55.14	35.54	10.32																																																																																																							
2	4924.00	45.48	54.00	-8.52	52.27	35.54	10.32																																																																																																							
3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98																																																																																																							
<table><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4924.00</td><td>51.87</td><td>74.00</td><td>-22.13</td><td>58.66</td><td>35.54</td><td>10.32</td></tr><tr><td>2</td><td>4924.00</td><td>49.11</td><td>54.00</td><td>-4.89</td><td>55.90</td><td>35.54</td><td>10.32</td></tr><tr><td>3</td><td>7386.00</td><td>45.07</td><td>74.00</td><td>-28.93</td><td>48.77</td><td>36.57</td><td>11.98</td></tr></table>																MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4924.00	51.87	74.00	-22.13	58.66	35.54	10.32	2	4924.00	49.11	54.00	-4.89	55.90	35.54	10.32	3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98	<table><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4924.00</td><td>48.35</td><td>74.00</td><td>-25.65</td><td>55.14</td><td>35.54</td><td>10.32</td></tr><tr><td>2</td><td>4924.00</td><td>45.48</td><td>54.00</td><td>-8.52</td><td>52.27</td><td>35.54</td><td>10.32</td></tr><tr><td>3</td><td>7386.00</td><td>45.07</td><td>74.00</td><td>-28.93</td><td>48.77</td><td>36.57</td><td>11.98</td></tr></table>																MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4924.00	48.35	74.00	-25.65	55.14	35.54	10.32	2	4924.00	45.48	54.00	-8.52	52.27	35.54	10.32	3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																							
1	4924.00	51.87	74.00	-22.13	58.66	35.54	10.32																																																																																																							
2	4924.00	49.11	54.00	-4.89	55.90	35.54	10.32																																																																																																							
3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																							
1	4924.00	48.35	74.00	-25.65	55.14	35.54	10.32																																																																																																							
2	4924.00	45.48	54.00	-8.52	52.27	35.54	10.32																																																																																																							
3	7386.00	45.07	74.00	-28.93	48.77	36.57	11.98																																																																																																							

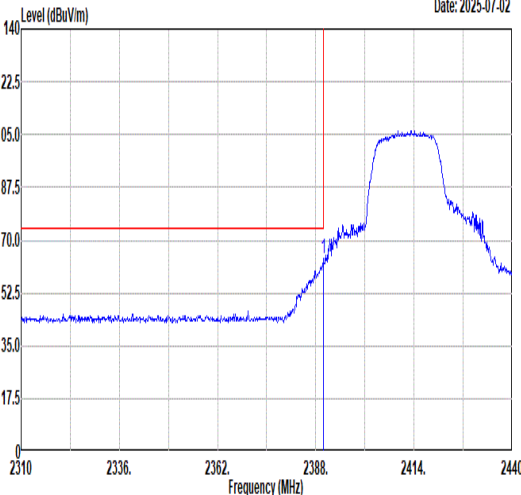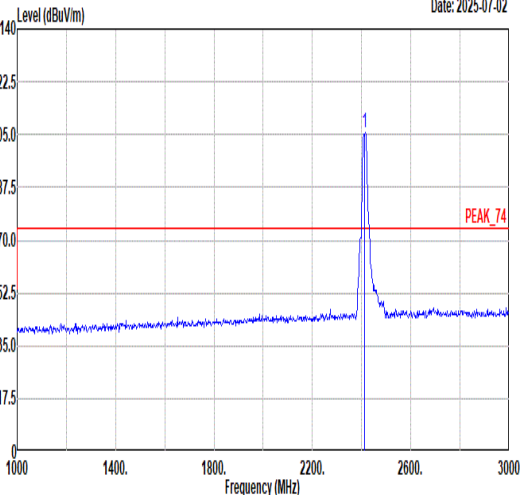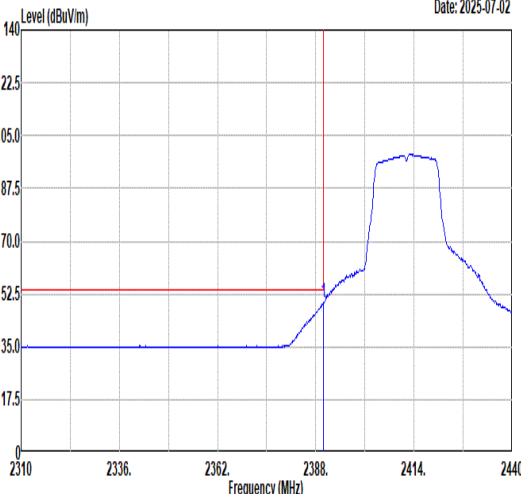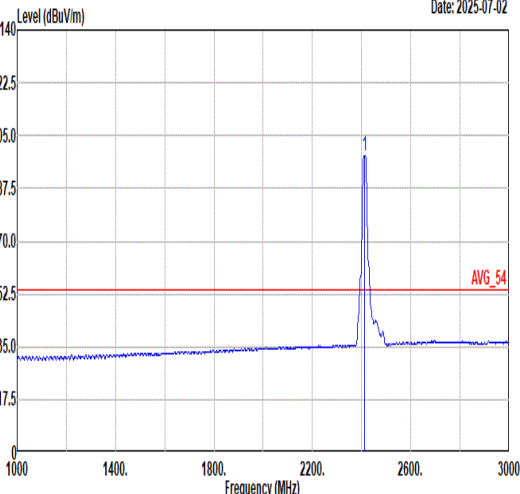

Mode	13																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH1_2412MHz																																																																																									
ANT	8																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>63.93</td><td>74.00</td><td>-10.07</td><td>59.10</td><td>30.60</td><td>6.87</td><td>32.64</td><td>141 327 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	63.93	74.00	-10.07	59.10	30.60	6.87	32.64	141 327 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.53</td><td>-----</td><td>-----</td><td>100.63</td><td>30.63</td><td>6.90</td><td>32.63</td><td>141 327 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.53	-----	-----	100.63	30.63	6.90	32.63	141 327 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.95	63.93	74.00	-10.07	59.10	30.60	6.87	32.64	141 327 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	105.53	-----	-----	100.63	30.63	6.90	32.63	141 327 PEAK																																																																																	
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>49.85</td><td>54.00</td><td>-4.15</td><td>45.02</td><td>30.60</td><td>6.87</td><td>32.64</td><td>141 327 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.85	54.00	-4.15	45.02	30.60	6.87	32.64	141 327 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.44</td><td>-----</td><td>-----</td><td>93.55</td><td>30.63</td><td>6.89</td><td>32.63</td><td>141 327 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.44	-----	-----	93.55	30.63	6.89	32.63	141 327 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.95	49.85	54.00	-4.15	45.02	30.60	6.87	32.64	141 327 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	98.44	-----	-----	93.55	30.63	6.89	32.63	141 327 AVERAGE																																																																																	

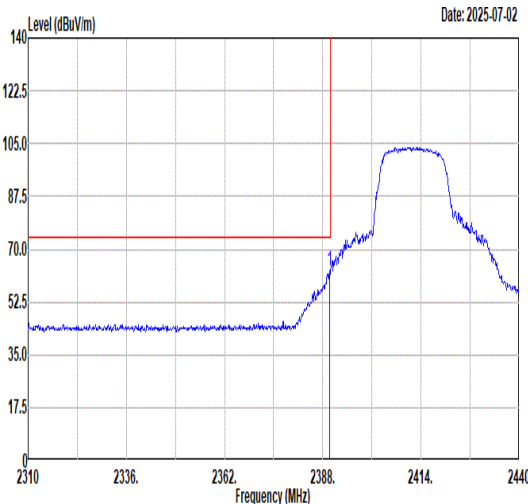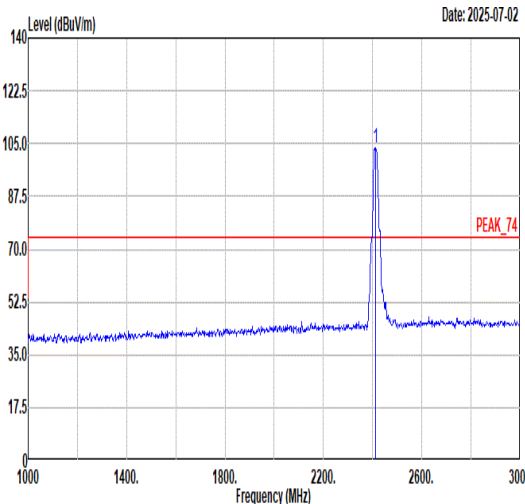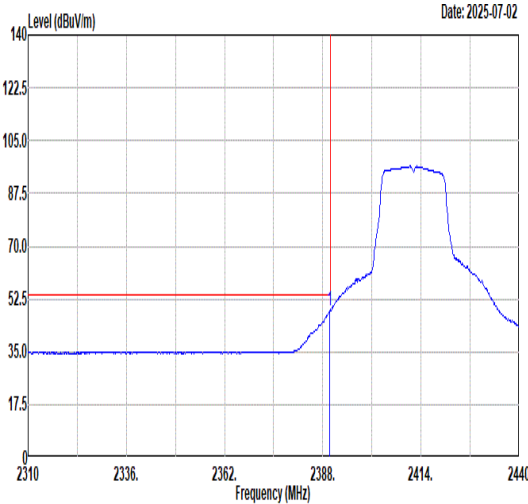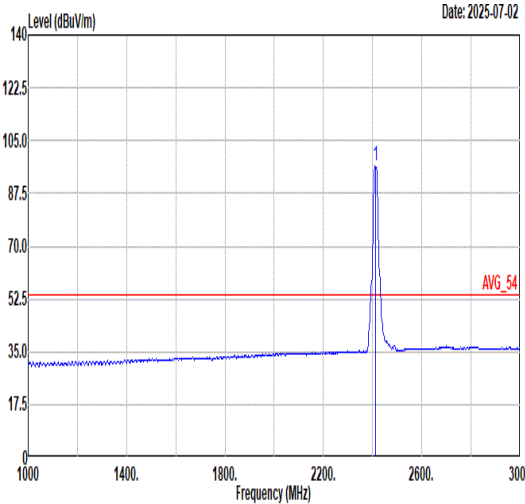

Mode	13																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11g_CH1_2412MHz																																																																																			
ANT	8																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Date: 2025-07-02  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>62.94</td><td>74.00</td><td>-11.06</td><td>58.11</td><td>30.60</td><td>6.87</td><td>32.64</td><td>393</td><td>251 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	62.94	74.00	-11.06	58.11	30.60	6.87	32.64	393	251 PEAK	Date: 2025-07-02  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>103.66</td><td>-----</td><td>-----</td><td>98.79</td><td>30.62</td><td>6.89</td><td>32.64</td><td>393</td><td>251 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.66	-----	-----	98.79	30.62	6.89	32.64	393	251 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.82	62.94	74.00	-11.06	58.11	30.60	6.87	32.64	393	251 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	103.66	-----	-----	98.79	30.62	6.89	32.64	393	251 PEAK																																																																										
Avg	Date: 2025-07-02  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>48.35</td><td>54.00</td><td>-5.65</td><td>43.52</td><td>30.60</td><td>6.87</td><td>32.64</td><td>393</td><td>251 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	48.35	54.00	-5.65	43.52	30.60	6.87	32.64	393	251 AVERAGE	Date: 2025-07-02  Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>96.45</td><td>-----</td><td>-----</td><td>91.58</td><td>30.62</td><td>6.89</td><td>32.64</td><td>393</td><td>251 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.45	-----	-----	91.58	30.62	6.89	32.64	393	251 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.82	48.35	54.00	-5.65	43.52	30.60	6.87	32.64	393	251 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	96.45	-----	-----	91.58	30.62	6.89	32.64	393	251 AVERAGE																																																																										







Mode	13																																																																																												
	Harmonic																																																																																												
	2400-2483.5_802.11g_CH1_2412MHz																																																																																												
ANT	8																																																																																												
Pol.	Horizontal						Vertical																																																																																						
Peak Avg	Level (dBuV/m) Date: 2025-07-03 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>45.10</td><td>74.00</td><td>-28.90</td><td>52.23</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.10	74.00	-28.90	52.23	35.30	10.16	52.59	---	---	Peak	Level (dBuV/m) Date: 2025-07-03 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.83</td><td>74.00</td><td>-30.17</td><td>50.96</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.83	74.00	-30.17	50.96	35.30	10.16	52.59	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	45.10	74.00	-28.90	52.23	35.30	10.16	52.59	---	---	Peak																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	43.83	74.00	-30.17	50.96	35.30	10.16	52.59	---	---	Peak																																																																																		



Mode	14																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11g_CH6_2437MHz																																																																																																																							
ANT	8																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Date: 2025-07-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>44.12</td><td>74.00</td><td>-29.88</td><td>51.12</td><td>35.35</td><td>10.27</td><td>52.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.30</td><td>74.00</td><td>-28.70</td><td>48.93</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	44.12	74.00	-29.88	51.12	35.35	10.27	52.62	---	---	Peak	2	7311.00	45.30	74.00	-28.70	48.93	36.58	12.01	52.22	---	---	Peak	Date: 2025-07-03 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>43.58</td><td>74.00</td><td>-30.42</td><td>50.58</td><td>35.35</td><td>10.27</td><td>52.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.55</td><td>74.00</td><td>-28.45</td><td>49.18</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	43.58	74.00	-30.42	50.58	35.35	10.27	52.62	---	---	Peak	2	7311.00	45.55	74.00	-28.45	49.18	36.58	12.01	52.22	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4874.00	44.12	74.00	-29.88	51.12	35.35	10.27	52.62	---	---	Peak																																																																																																													
2	7311.00	45.30	74.00	-28.70	48.93	36.58	12.01	52.22	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4874.00	43.58	74.00	-30.42	50.58	35.35	10.27	52.62	---	---	Peak																																																																																																													
2	7311.00	45.55	74.00	-28.45	49.18	36.58	12.01	52.22	---	---	Peak																																																																																																													

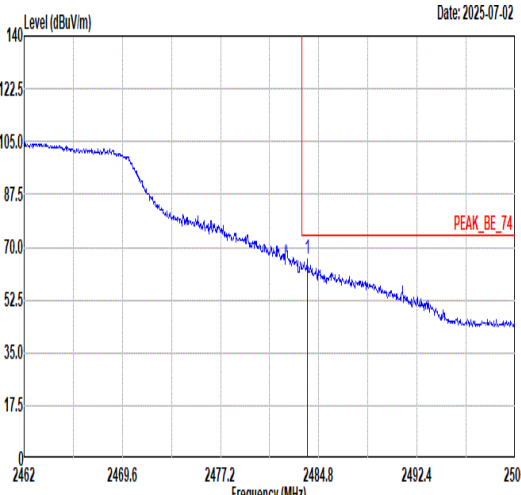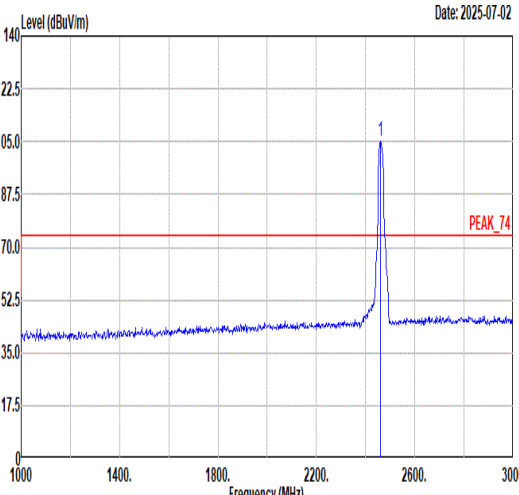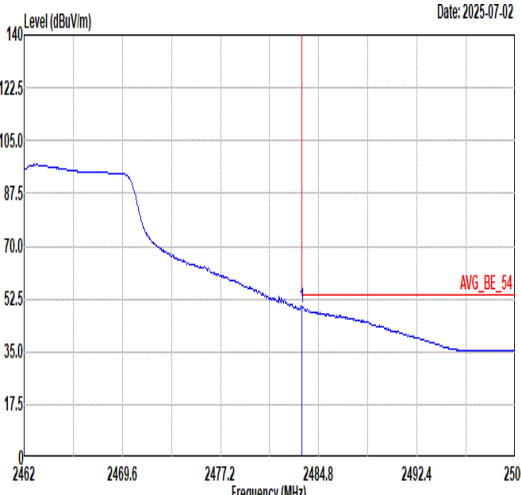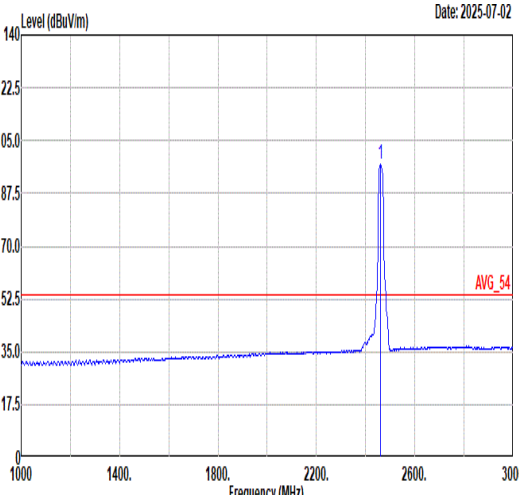

Mode	15																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																																											
ANT	8																																																																																											
Pol.	Horizontal					Fundamental																																																																																						
Peak	 Level (dBuV/m) Date: 2025-07-02 PEAK_BE_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.93</td><td>65.89</td><td>74.00</td><td>-8.11</td><td>60.89</td><td>30.63</td><td>6.98</td><td>32.61</td><td>105</td><td>326 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.93	65.89	74.00	-8.11	60.89	30.63	6.98	32.61	105	326 PEAK	 Level (dBuV/m) Date: 2025-07-02 PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>104.93</td><td>-----</td><td>-----</td><td>99.92</td><td>30.68</td><td>6.95</td><td>32.62</td><td>105</td><td>326 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.93	-----	-----	99.92	30.68	6.95	32.62	105	326 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2483.93	65.89	74.00	-8.11	60.89	30.63	6.98	32.61	105	326 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	104.93	-----	-----	99.92	30.68	6.95	32.62	105	326 PEAK																																																																																		
Avg	 Level (dBuV/m) Date: 2025-07-02 AVG_BE_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>49.92</td><td>54.00</td><td>-4.08</td><td>44.92</td><td>30.63</td><td>6.98</td><td>32.61</td><td>105</td><td>326 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	49.92	54.00	-4.08	44.92	30.63	6.98	32.61	105	326 AVERAGE	 Level (dBuV/m) Date: 2025-07-02 AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>97.32</td><td>-----</td><td>-----</td><td>92.31</td><td>30.68</td><td>6.95</td><td>32.62</td><td>105</td><td>326 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.32	-----	-----	92.31	30.68	6.95	32.62	105	326 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2483.51	49.92	54.00	-4.08	44.92	30.63	6.98	32.61	105	326 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	97.32	-----	-----	92.31	30.68	6.95	32.62	105	326 AVERAGE																																																																																		







Mode	15																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																									
ANT	8																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-07-02 PEAK_BE_74 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.51</td><td>63.67</td><td>74.00</td><td>-10.33</td><td>58.67</td><td>30.63</td><td>6.98</td><td>32.61</td><td>363</td><td>250 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.51	63.67	74.00	-10.33	58.67	30.63	6.98	32.61	363	250 PEAK	Level (dBuV/m) Date: 2025-07-02 PEAK_74 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>101.94</td><td>-----</td><td>-----</td><td>96.93</td><td>30.68</td><td>6.95</td><td>32.62</td><td>363</td><td>250 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	101.94	-----	-----	96.93	30.68	6.95	32.62	363	250 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.51	63.67	74.00	-10.33	58.67	30.63	6.98	32.61	363	250 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2462.00	101.94	-----	-----	96.93	30.68	6.95	32.62	363	250 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-07-02 AVG_BE_54 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.51</td><td>47.23</td><td>54.00</td><td>-6.77</td><td>42.23</td><td>30.63</td><td>6.98</td><td>32.61</td><td>363</td><td>250 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.51	47.23	54.00	-6.77	42.23	30.63	6.98	32.61	363	250 AVERAGE	Level (dBuV/m) Date: 2025-07-02 AVG_54 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>94.88</td><td>-----</td><td>-----</td><td>89.87</td><td>30.68</td><td>6.95</td><td>32.62</td><td>363</td><td>250 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	94.88	-----	-----	89.87	30.68	6.95	32.62	363	250 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.51	47.23	54.00	-6.77	42.23	30.63	6.98	32.61	363	250 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2462.00	94.88	-----	-----	89.87	30.68	6.95	32.62	363	250 AVERAGE																																																																																	



Mode	15																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																			
ANT	8																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2025-07-03 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.60</td><td>74.00</td><td>-29.40</td><td>51.39</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>48.96</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	44.60	74.00	-29.40	51.39	35.54	10.32	52.65	---	---	Peak	2	7386.00	45.26	74.00	-28.74	48.96	36.57	11.98	52.25	---	---	Peak	Level (dBuV/m) Date: 2025-07-03 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>43.55</td><td>74.00</td><td>-30.45</td><td>50.34</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.67</td><td>74.00</td><td>-28.33</td><td>49.37</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	43.55	74.00	-30.45	50.34	35.54	10.32	52.65	---	---	Peak	2	7386.00	45.67	74.00	-28.33	49.37	36.57	11.98	52.25	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4924.00	44.60	74.00	-29.40	51.39	35.54	10.32	52.65	---	---	Peak																																																																																																									
2	7386.00	45.26	74.00	-28.74	48.96	36.57	11.98	52.25	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4924.00	43.55	74.00	-30.45	50.34	35.54	10.32	52.65	---	---	Peak																																																																																																									
2	7386.00	45.67	74.00	-28.33	49.37	36.57	11.98	52.25	---	---	Peak																																																																																																									

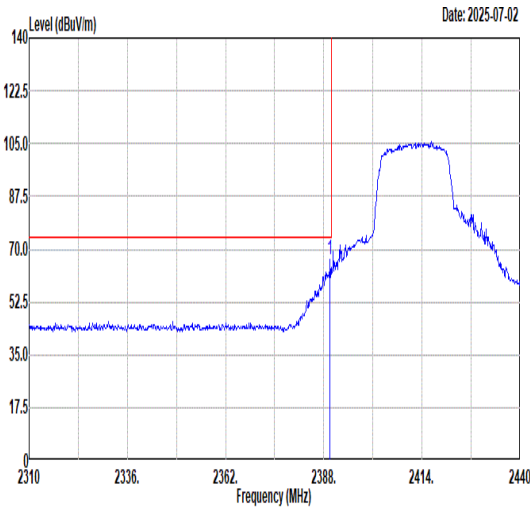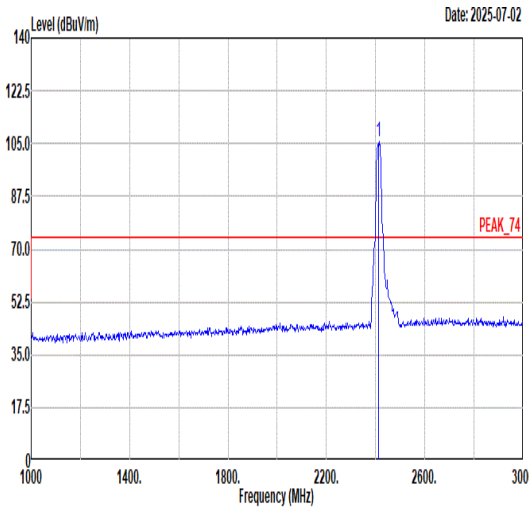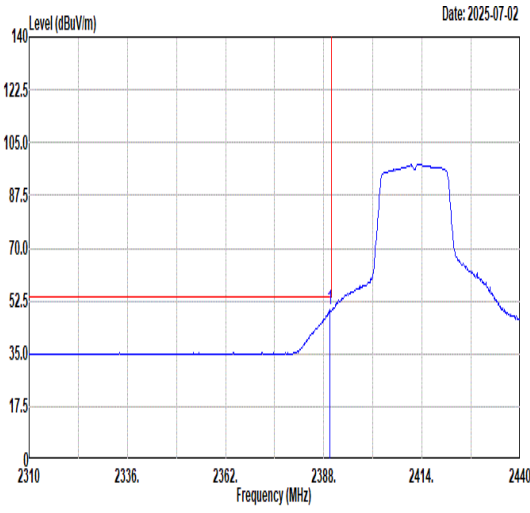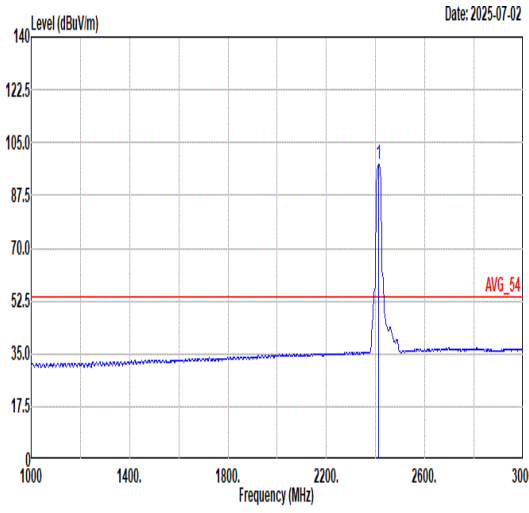

		16																																																																																								
Mode	Band Edge																																																																																									
	2400-2483.5_802.11n HT20_CH1_Full_2412MHz																																																																																									
ANT	8																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	 Level (dBuV/m) Date: 2025-07-02 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>66.70</td><td>74.00</td><td>-7.30</td><td>61.87</td><td>30.60</td><td>6.87</td><td>32.64</td><td>141 327 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2389.69	66.70	74.00	-7.30	61.87	30.60	6.87	32.64	141 327 PEAK	 Level (dBuV/m) Date: 2025-07-02 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>105.47</td><td>-----</td><td>-----</td><td>100.57</td><td>30.63</td><td>6.90</td><td>32.63</td><td>141 327 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2412.00	105.47	-----	-----	100.57	30.63	6.90	32.63	141 327 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	2389.69	66.70	74.00	-7.30	61.87	30.60	6.87	32.64	141 327 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	2412.00	105.47	-----	-----	100.57	30.63	6.90	32.63	141 327 PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2025-07-02 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>49.72</td><td>54.00</td><td>-4.28</td><td>44.89</td><td>30.60</td><td>6.87</td><td>32.64</td><td>141 327 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2389.69	49.72	54.00	-4.28	44.89	30.60	6.87	32.64	141 327 AVERAGE	 Level (dBuV/m) Date: 2025-07-02 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>97.57</td><td>-----</td><td>-----</td><td>92.68</td><td>30.63</td><td>6.89</td><td>32.63</td><td>141 327 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2412.00	97.57	-----	-----	92.68	30.63	6.89	32.63	141 327 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	2389.69	49.72	54.00	-4.28	44.89	30.60	6.87	32.64	141 327 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	2412.00	97.57	-----	-----	92.68	30.63	6.89	32.63	141 327 AVERAGE																																																																																	



Mode	16	
	Band Edge	
	2400-2483.5_802.11n HT20_CH1_Full_2412MHz	
ANT	8	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2025-07-02	



Mode	16																																																																																												
	Harmonic																																																																																												
	2400-2483.5_802.11n HT20_CH1_Full_2412MHz																																																																																												
ANT	8																																																																																												
Pol.	Horizontal										Vertical																																																																																		
Peak Avg	Level (dBuV/m) Date: 2025-07-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>44.52</td><td>74.00</td><td>-29.48</td><td>51.65</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.52	74.00	-29.48	51.65	35.30	10.16	52.59	---	---	Peak	Level (dBuV/m) Date: 2025-07-03 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>43.60</td><td>74.00</td><td>-30.40</td><td>50.73</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.60	74.00	-30.40	50.73	35.30	10.16	52.59	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	44.52	74.00	-29.48	51.65	35.30	10.16	52.59	---	---	Peak																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4824.00	43.60	74.00	-30.40	50.73	35.30	10.16	52.59	---	---	Peak																																																																																		







Mode	17																																																														
	Harmonic																																																														
	2400-2483.5_802.11n_HT20_CH6_Full_2437MHz																																																														
ANT	8																																																														
Pol.	Horizontal						Vertical																																																								
Peak Avg																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.54</td><td>74.00</td><td>-29.46</td><td>51.54</td><td>35.35</td><td>10.27</td><td>52.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.31</td><td>74.00</td><td>-28.69</td><td>48.94</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4874.00	44.54	74.00	-29.46	51.54	35.35	10.27	52.62	---	---	Peak	2	7311.00	45.31	74.00	-28.69	48.94	36.58	12.01	52.22	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																								
1	4874.00	44.54	74.00	-29.46	51.54	35.35	10.27	52.62	---	---	Peak																																																				
2	7311.00	45.31	74.00	-28.69	48.94	36.58	12.01	52.22	---	---	Peak																																																				
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>43.93</td><td>74.00</td><td>-30.07</td><td>50.93</td><td>35.35</td><td>10.27</td><td>52.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.64</td><td>74.00</td><td>-29.36</td><td>48.27</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4874.00	43.93	74.00	-30.07	50.93	35.35	10.27	52.62	---	---	Peak	2	7311.00	44.64	74.00	-29.36	48.27	36.58	12.01	52.22	---	---	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																								
1	4874.00	43.93	74.00	-30.07	50.93	35.35	10.27	52.62	---	---	Peak																																																				
2	7311.00	44.64	74.00	-29.36	48.27	36.58	12.01	52.22	---	---	Peak																																																				



Mode	18																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11n_HT20_CH11_Full_2462MHz																																																																													
ANT	8																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.81</td><td>65.63</td><td>74.00</td><td>-8.37</td><td>60.63</td><td>30.63</td><td>6.98</td><td>32.61</td><td>104</td><td>326 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.81	65.63	74.00	-8.37	60.63	30.63	6.98	32.61	104	326 PEAK	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>103.64</td><td>-----</td><td>-----</td><td>98.63</td><td>30.68</td><td>6.95</td><td>32.62</td><td>104</td><td>326 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	103.64	-----	-----	98.63	30.68	6.95	32.62	104	326 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2483.81	65.63	74.00	-8.37	60.63	30.63	6.98	32.61	104	326 PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2462.00	103.64	-----	-----	98.63	30.68	6.95	32.62	104	326 PEAK																																																																					
Avg	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.51</td><td>48.94</td><td>54.00</td><td>-5.06</td><td>43.94</td><td>30.63</td><td>6.98</td><td>32.61</td><td>104</td><td>326 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.51	48.94	54.00	-5.06	43.94	30.63	6.98	32.61	104	326 AVERAGE	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>96.09</td><td>-----</td><td>-----</td><td>91.08</td><td>30.68</td><td>6.95</td><td>32.62</td><td>104</td><td>326 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	96.09	-----	-----	91.08	30.68	6.95	32.62	104	326 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2483.51	48.94	54.00	-5.06	43.94	30.63	6.98	32.61	104	326 AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2462.00	96.09	-----	-----	91.08	30.68	6.95	32.62	104	326 AVERAGE																																																																					

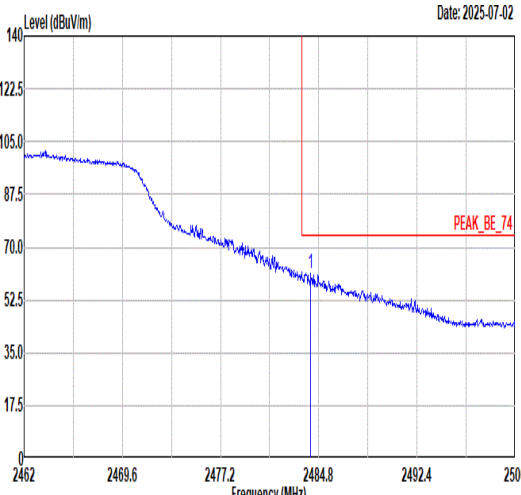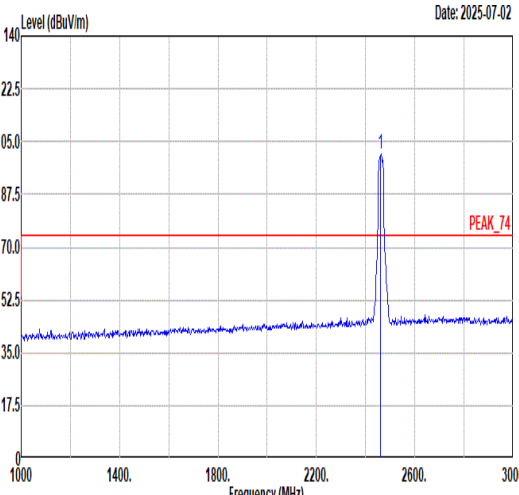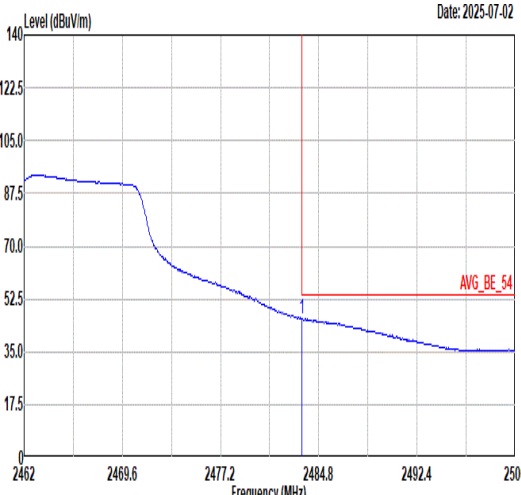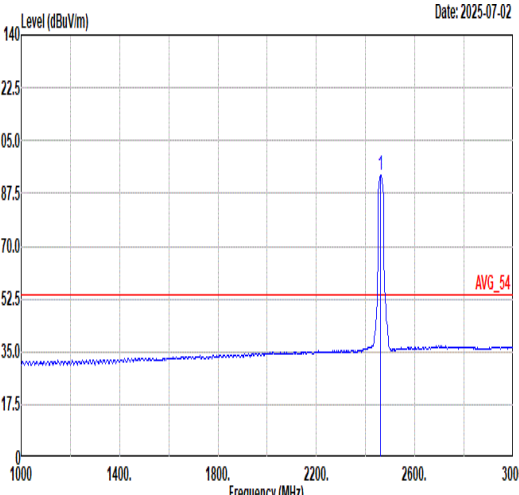

Mode	18																																																																																
	Band Edge																																																																																
	2400-2483.5_802.11n_HT20_CH11_Full_2462MHz																																																																																
ANT	8																																																																																
Pol.	Vertical					Fundamental																																																																											
Peak																																																																																	
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.19</td><td>61.43</td><td>74.00</td><td>-12.57</td><td>56.43</td><td>30.63</td><td>6.98</td><td>32.61</td><td>363</td><td>247</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2484.19	61.43	74.00	-12.57	56.43	30.63	6.98	32.61	363	247	PEAK	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>101.02</td><td>-----</td><td>-----</td><td>96.01</td><td>30.67</td><td>6.95</td><td>32.61</td><td>363</td><td>247</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	101.02	-----	-----	96.01	30.67	6.95	32.61	363	247
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2484.19	61.43	74.00	-12.57	56.43	30.63	6.98	32.61	363	247	PEAK																																																																						
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2462.00	101.02	-----	-----	96.01	30.67	6.95	32.61	363	247	PEAK																																																																						
Avg																																																																																	
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>45.90</td><td>54.00</td><td>-8.10</td><td>40.90</td><td>30.63</td><td>6.98</td><td>32.61</td><td>363</td><td>247</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.51	45.90	54.00	-8.10	40.90	30.63	6.98	32.61	363	247	AVERAGE	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>93.59</td><td>-----</td><td>-----</td><td>88.58</td><td>30.68</td><td>6.95</td><td>32.62</td><td>363</td><td>247</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	93.59	-----	-----	88.58	30.68	6.95	32.62	363	247
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2483.51	45.90	54.00	-8.10	40.90	30.63	6.98	32.61	363	247	AVERAGE																																																																						
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2462.00	93.59	-----	-----	88.58	30.68	6.95	32.62	363	247	AVERAGE																																																																						



Mode	18																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11n HT20_CH11_Full_2462MHz																																																																																																																							
ANT	8																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>51.00</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.09</td><td>74.00</td><td>-28.91</td><td>48.79</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	44.21	74.00	-29.79	51.00	35.54	10.32	52.65	---	---	Peak	2	7386.00	45.09	74.00	-28.91	48.79	36.57	11.98	52.25	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>43.31</td><td>74.00</td><td>-30.69</td><td>50.10</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.94</td><td>74.00</td><td>-28.06</td><td>49.64</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	43.31	74.00	-30.69	50.10	35.54	10.32	52.65	---	---	Peak	2	7386.00	45.94	74.00	-28.06	49.64	36.57	11.98	52.25	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	44.21	74.00	-29.79	51.00	35.54	10.32	52.65	---	---	Peak																																																																																																													
2	7386.00	45.09	74.00	-28.91	48.79	36.57	11.98	52.25	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	43.31	74.00	-30.69	50.10	35.54	10.32	52.65	---	---	Peak																																																																																																													
2	7386.00	45.94	74.00	-28.06	49.64	36.57	11.98	52.25	---	---	Peak																																																																																																													





Mode	19																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11ax HE20_CH1_Full_2412MHz																																																																																	
ANT	8																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>64.16</td><td>74.00</td><td>-9.84</td><td>59.33</td><td>30.60</td><td>6.87</td><td>32.64</td><td>142 326 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2389.56	64.16	74.00	-9.84	59.33	30.60	6.87	32.64	142 326 PEAK	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>107.09</td><td>-----</td><td>-----</td><td>102.18</td><td>30.64</td><td>6.90</td><td>32.63</td><td>142 326 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2412.00	107.09	-----	-----	102.18	30.64	6.90	32.63	142 326 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																									
1	2389.56	64.16	74.00	-9.84	59.33	30.60	6.87	32.64	142 326 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																									
1	2412.00	107.09	-----	-----	102.18	30.64	6.90	32.63	142 326 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>49.97</td><td>54.00</td><td>-4.03</td><td>45.14</td><td>30.60</td><td>6.87</td><td>32.64</td><td>142 326 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2389.95	49.97	54.00	-4.03	45.14	30.60	6.87	32.64	142 326 AVERAGE	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>96.80</td><td>-----</td><td>-----</td><td>91.93</td><td>30.62</td><td>6.89</td><td>32.64</td><td>142 326 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	2412.00	96.80	-----	-----	91.93	30.62	6.89	32.64	142 326 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																									
1	2389.95	49.97	54.00	-4.03	45.14	30.60	6.87	32.64	142 326 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																									
1	2412.00	96.80	-----	-----	91.93	30.62	6.89	32.64	142 326 AVERAGE																																																																									



Mode	19																																									
	Band Edge																																									
	2400-2483.5_802.11ax HE20_CH1_Full_2412MHz																																									
ANT	8																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-07-02 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2388.65</td><td>62.39</td><td>74.00</td><td>-11.61</td><td>57.57</td><td>30.60</td><td>6.86</td><td>32.64</td><td>352</td><td>249 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2388.65	62.39	74.00	-11.61	57.57	30.60	6.86	32.64	352	249 PEAK	Level (dBuV/m) Date: 2025-07-02 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>102.90</td><td>-----</td><td>-----</td><td>98.03</td><td>30.62</td><td>6.89</td><td>32.64</td><td>352</td><td>249 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	102.90	-----	-----	98.03	30.62	6.89	32.64	352	249 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2388.65	62.39	74.00	-11.61	57.57	30.60	6.86	32.64	352	249 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	102.90	-----	-----	98.03	30.62	6.89	32.64	352	249 PEAK																																	
Avg	Level (dBuV/m) Date: 2025-07-02 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.95</td><td>48.01</td><td>54.00</td><td>-5.99</td><td>43.18</td><td>30.60</td><td>6.87</td><td>32.64</td><td>352</td><td>249 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.95	48.01	54.00	-5.99	43.18	30.60	6.87	32.64	352	249 AVERAGE	Level (dBuV/m) Date: 2025-07-02 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>93.10</td><td>-----</td><td>-----</td><td>88.23</td><td>30.62</td><td>6.89</td><td>32.64</td><td>352</td><td>249 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	93.10	-----	-----	88.23	30.62	6.89	32.64	352	249 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2389.95	48.01	54.00	-5.99	43.18	30.60	6.87	32.64	352	249 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	93.10	-----	-----	88.23	30.62	6.89	32.64	352	249 AVERAGE																																	



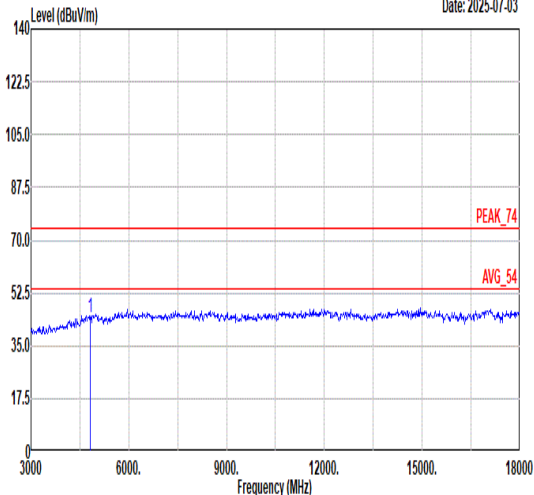
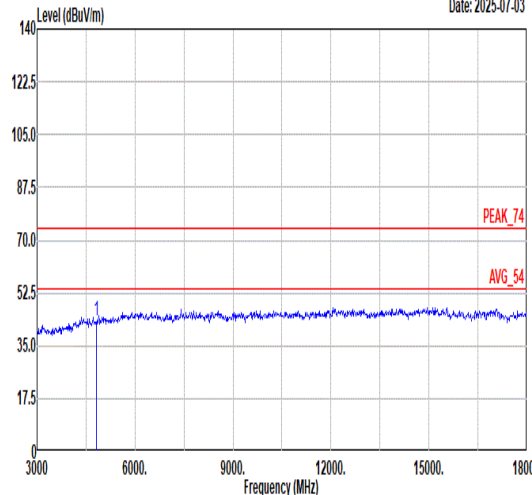


Mode	19																																																			
	Harmonic																																																			
	2400-2483.5_802.11ax HE20_CH1_Full_2412MHz																																																			
ANT	8																																																			
Pol.	Horizontal																																																			
Peak Avg	Level (dBuV/m) Date: 2025-07-03  PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.63</td><td>74.00</td><td>-29.37</td><td>51.76</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.63	74.00	-29.37	51.76	35.30	10.16	52.59	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	4824.00	44.63	74.00	-29.37	51.76	35.30	10.16	52.59	---	---	Peak																																									
Peak Avg	Level (dBuV/m) Date: 2025-07-03  PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.49</td><td>74.00</td><td>-30.51</td><td>50.62</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.49	74.00	-30.51	50.62	35.30	10.16	52.59	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	4824.00	43.49	74.00	-30.51	50.62	35.30	10.16	52.59	---	---	Peak																																									



Mode	20																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_802.11ax HE20_CH6_Full_2437MHz																																																																																																																			
ANT	8																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2025-07-03 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>45.34</td><td>74.00</td><td>-28.66</td><td>52.34</td><td>35.35</td><td>10.27</td><td>52.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.59</td><td>74.00</td><td>-29.41</td><td>48.22</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	45.34	74.00	-28.66	52.34	35.35	10.27	52.62	---	---	Peak	2	7311.00	44.59	74.00	-29.41	48.22	36.58	12.01	52.22	---	---	Peak	Level (dBuV/m) Date: 2025-07-03 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>43.85</td><td>74.00</td><td>-30.15</td><td>50.85</td><td>35.35</td><td>10.27</td><td>52.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.78</td><td>74.00</td><td>-28.22</td><td>49.41</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	43.85	74.00	-30.15	50.85	35.35	10.27	52.62	---	---	Peak	2	7311.00	45.78	74.00	-28.22	49.41	36.58	12.01	52.22	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4874.00	45.34	74.00	-28.66	52.34	35.35	10.27	52.62	---	---	Peak																																																																																																									
2	7311.00	44.59	74.00	-29.41	48.22	36.58	12.01	52.22	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4874.00	43.85	74.00	-30.15	50.85	35.35	10.27	52.62	---	---	Peak																																																																																																									
2	7311.00	45.78	74.00	-28.22	49.41	36.58	12.01	52.22	---	---	Peak																																																																																																									

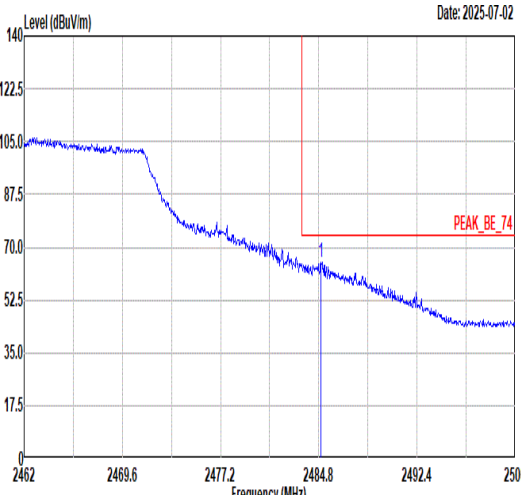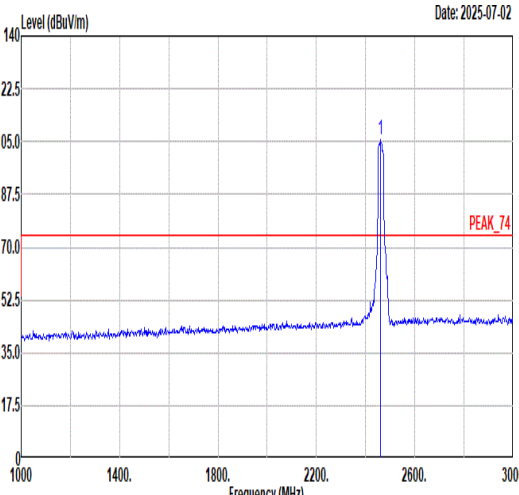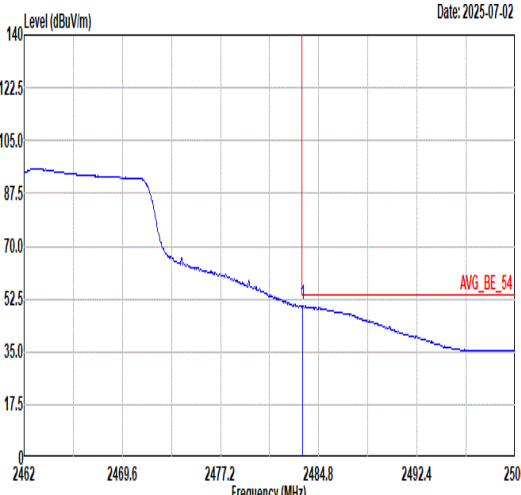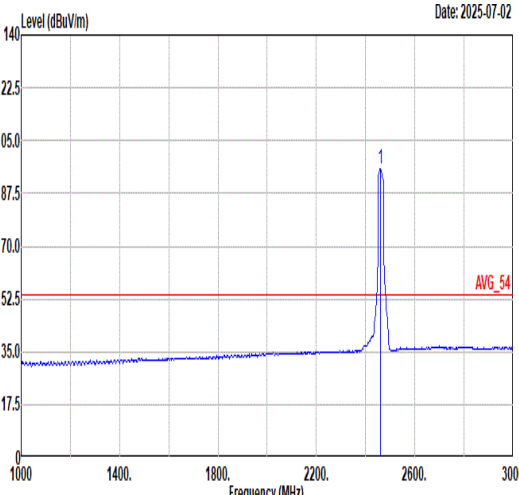

Mode	21																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11ax HE20_CH11_Full_2462MHz																																																																																											
ANT	8																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) PEAK_BE_74 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.99</td><td>65.00</td><td>74.00</td><td>-9.00</td><td>60.00</td><td>30.63</td><td>6.98</td><td>32.61</td><td>105</td><td>326</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.99	65.00	74.00	-9.00	60.00	30.63	6.98	32.61	105	326	PEAK	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>105.52</td><td>-----</td><td>-----</td><td>100.51</td><td>30.68</td><td>6.95</td><td>32.62</td><td>105</td><td>326</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	105.52	-----	-----	100.51	30.68	6.95	32.62	105	326	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2484.99	65.00	74.00	-9.00	60.00	30.63	6.98	32.61	105	326	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2462.00	105.52	-----	-----	100.51	30.68	6.95	32.62	105	326	PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) AVG_BE_54 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.55</td><td>50.80</td><td>54.00</td><td>-3.20</td><td>45.80</td><td>30.63</td><td>6.98</td><td>32.61</td><td>105</td><td>326</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.55	50.80	54.00	-3.20	45.80	30.63	6.98	32.61	105	326	AVERAGE	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>95.76</td><td>-----</td><td>-----</td><td>90.75</td><td>30.68</td><td>6.95</td><td>32.62</td><td>105</td><td>326</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	95.76	-----	-----	90.75	30.68	6.95	32.62	105	326	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.55	50.80	54.00	-3.20	45.80	30.63	6.98	32.61	105	326	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2462.00	95.76	-----	-----	90.75	30.68	6.95	32.62	105	326	AVERAGE																																																																																	



Mode	21																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11ax HE20_CH11_Full_2462MHz																																																																																											
ANT	8																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>62.10</td><td>74.00</td><td>-11.90</td><td>57.10</td><td>30.63</td><td>6.98</td><td>32.61</td><td>363</td><td>247</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.62	62.10	74.00	-11.90	57.10	30.63	6.98	32.61	363	247	PEAK	Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.38</td><td>-----</td><td>-----</td><td>97.37</td><td>30.68</td><td>6.95</td><td>32.62</td><td>363</td><td>247</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	102.38	-----	-----	97.37	30.68	6.95	32.62	363	247	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.62	62.10	74.00	-11.90	57.10	30.63	6.98	32.61	363	247	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2462.00	102.38	-----	-----	97.37	30.68	6.95	32.62	363	247	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>46.42</td><td>54.00</td><td>-7.58</td><td>41.42</td><td>30.63</td><td>6.98</td><td>32.61</td><td>363</td><td>247</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.62	46.42	54.00	-7.58	41.42	30.63	6.98	32.61	363	247	AVERAGE	Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>92.75</td><td>-----</td><td>-----</td><td>87.74</td><td>30.68</td><td>6.95</td><td>32.62</td><td>363</td><td>247</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	92.75	-----	-----	87.74	30.68	6.95	32.62	363	247	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.62	46.42	54.00	-7.58	41.42	30.63	6.98	32.61	363	247	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2462.00	92.75	-----	-----	87.74	30.68	6.95	32.62	363	247	AVERAGE																																																																																	



Mode	21																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_802.11ax HE20_CH11_Full_2462MHz																																																																																																																			
ANT	8																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2025-07-03 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>45.01</td><td>74.00</td><td>-28.99</td><td>51.80</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.12</td><td>74.00</td><td>-28.88</td><td>48.82</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	45.01	74.00	-28.99	51.80	35.54	10.32	52.65	---	---	Peak	2	7386.00	45.12	74.00	-28.88	48.82	36.57	11.98	52.25	---	---	Peak	Level (dBuV/m) Date: 2025-07-03 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>43.73</td><td>74.00</td><td>-30.27</td><td>50.52</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.86</td><td>74.00</td><td>-29.14</td><td>48.56</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	43.73	74.00	-30.27	50.52	35.54	10.32	52.65	---	---	Peak	2	7386.00	44.86	74.00	-29.14	48.56	36.57	11.98	52.25	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4924.00	45.01	74.00	-28.99	51.80	35.54	10.32	52.65	---	---	Peak																																																																																																									
2	7386.00	45.12	74.00	-28.88	48.82	36.57	11.98	52.25	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4924.00	43.73	74.00	-30.27	50.52	35.54	10.32	52.65	---	---	Peak																																																																																																									
2	7386.00	44.86	74.00	-29.14	48.56	36.57	11.98	52.25	---	---	Peak																																																																																																									



Mode	22	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH1_Partial RU26/O_2412MHz	
ANT	8	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2025-07-02 1 2386.83 45.76 74.00 -28.24 40.95 30.60 6.86 32.65 111 324 PEAK	Level (dBuV/m) Date: 2025-07-02 1 2412.00 108.76 ----- 103.91 30.61 6.88 32.64 111 324 PEAK
	Level (dBuV/m) Date: 2025-07-02 1 2389.82 36.24 54.00 -17.76 31.41 30.60 6.87 32.64 111 324 AVERAGE	Level (dBuV/m) Date: 2025-07-02 1 2412.00 98.65 ----- 93.80 30.61 6.88 32.64 111 324 AVERAGE



Mode	22																																																						
	Band Edge																																																						
	2400-2483.5_802.11ax HE20_CH1_Partial RU26/0_2412MHz																																																						
ANT	8																																																						
Pol.	Vertical	Fundamental																																																					
Peak	Level (dBuV/m) Date: 2025-07-02 1 2388.65 45.96 74.00 -28.04 41.14 30.60 6.86 32.64 395 250 PEAK	Level (dBuV/m) Date: 2025-07-02 1 2412.00 104.78 ----- 99.93 30.61 6.88 32.64 395 250 PEAK																																																					
	Limit Margin Read Ant Cable Preamp APos TPos <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2388.65</td><td>45.96</td><td>74.00</td><td>-28.04</td><td>41.14</td><td>30.60</td><td>6.86</td><td>32.64 395 250 PEAK</td></tr></table>	Freq	Level	Line	(dB)	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm deg	1	2388.65	45.96	74.00	-28.04	41.14	30.60	6.86	32.64 395 250 PEAK	Limit Margin Read Ant Cable Preamp APos TPos <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2412.00</td><td>104.78</td><td>-----</td><td>99.93</td><td>30.61</td><td>6.88</td><td>32.64</td><td>395 250 PEAK</td></tr></table>	Freq	Level	Line	(dB)	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm deg	1	2412.00	104.78	-----	99.93	30.61	6.88	32.64
Freq	Level	Line	(dB)	Level Factor	Loss Factor			Remark																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm deg																																															
1	2388.65	45.96	74.00	-28.04	41.14	30.60	6.86	32.64 395 250 PEAK																																															
Freq	Level	Line	(dB)	Level Factor	Loss Factor			Remark																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm deg																																															
1	2412.00	104.78	-----	99.93	30.61	6.88	32.64	395 250 PEAK																																															
Avg	Level (dBuV/m) Date: 2025-07-02 1 2389.82 35.87 54.00 -18.13 31.04 30.60 6.87 32.64 395 250 AVERAGE	Level (dBuV/m) Date: 2025-07-02 1 2412.00 95.37 ----- 90.52 30.61 6.88 32.64 395 250 AVERAGE																																																					
	Limit Margin Read Ant Cable Preamp APos TPos <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2389.82</td><td>35.87</td><td>54.00</td><td>-18.13</td><td>31.04</td><td>30.60</td><td>6.87</td><td>32.64 395 250 AVERAGE</td></tr></table>	Freq	Level	Line	(dB)	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm deg	1	2389.82	35.87	54.00	-18.13	31.04	30.60	6.87	32.64 395 250 AVERAGE	Limit Margin Read Ant Cable Preamp APos TPos <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.37</td><td>-----</td><td>90.52</td><td>30.61</td><td>6.88</td><td>32.64</td><td>395 250 AVERAGE</td></tr></table>	Freq	Level	Line	(dB)	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm deg	1	2412.00	95.37	-----	90.52	30.61	6.88	32.64
Freq	Level	Line	(dB)	Level Factor	Loss Factor			Remark																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm deg																																															
1	2389.82	35.87	54.00	-18.13	31.04	30.60	6.87	32.64 395 250 AVERAGE																																															
Freq	Level	Line	(dB)	Level Factor	Loss Factor			Remark																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm deg																																															
1	2412.00	95.37	-----	90.52	30.61	6.88	32.64	395 250 AVERAGE																																															







Mode	23																																									
	Band Edge																																									
	2400-2483.5_802.11ax HE20_CH1_Partial RU52/37_2412MHz																																									
ANT	8																																									
Pol.	Horizontal	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-07-02 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.82</td><td>49.37</td><td>74.00</td><td>-24.63</td><td>44.54</td><td>30.60</td><td>6.87</td><td>32.64</td><td>113</td><td>326 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.82	49.37	74.00	-24.63	44.54	30.60	6.87	32.64	113	326 PEAK	Level (dBuV/m) Date: 2025-07-02 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>107.63</td><td>-----</td><td>-----</td><td>102.78</td><td>30.61</td><td>6.88</td><td>32.64</td><td>113</td><td>326 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	107.63	-----	-----	102.78	30.61	6.88	32.64	113	326 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2389.82	49.37	74.00	-24.63	44.54	30.60	6.87	32.64	113	326 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	107.63	-----	-----	102.78	30.61	6.88	32.64	113	326 PEAK																																	
Avg	Level (dBuV/m) Date: 2025-07-02 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.04</td><td>37.07</td><td>54.00</td><td>-16.93</td><td>32.25</td><td>30.60</td><td>6.86</td><td>32.64</td><td>113</td><td>326 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.04	37.07	54.00	-16.93	32.25	30.60	6.86	32.64	113	326 AVERAGE	Level (dBuV/m) Date: 2025-07-02 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>98.88</td><td>-----</td><td>-----</td><td>94.03</td><td>30.61</td><td>6.88</td><td>32.64</td><td>113</td><td>326 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	98.88	-----	-----	94.03	30.61	6.88	32.64	113	326 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2389.04	37.07	54.00	-16.93	32.25	30.60	6.86	32.64	113	326 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	98.88	-----	-----	94.03	30.61	6.88	32.64	113	326 AVERAGE																																	







Mode	23																																																																																		
	Band Edge																																																																																		
	2400-2483.5_802.11ax HE20_CH1_Partial RU52/37_2412MHz																																																																																		
ANT	8																																																																																		
Pol.	Vertical						Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-07-02 1 2388.65 46.55 74.00 -27.45 41.73 30.60 6.86 32.64 344 248 PEAK						Level (dBuV/m) Date: 2025-07-02 1 2412.00 104.98 ----- 100.13 30.61 6.88 32.64 344 248 PEAK																																																																												
	Limit Margin Read Ant Cable Preamp APos TPos <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2388.65</td><td>46.55</td><td>74.00</td><td>-27.45</td><td>41.73</td><td>30.60</td><td>6.86</td><td>32.64</td><td>344</td><td>248</td><td>PEAK</td></tr></table>						Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg			1	2388.65	46.55	74.00	-27.45	41.73	30.60	6.86	32.64	344	248	PEAK	Limit Margin Read Ant Cable Preamp APos TPos <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2412.00</td><td>104.98</td><td>-----</td><td>-----</td><td>100.13</td><td>30.61</td><td>6.88</td><td>32.64</td><td>344</td><td>248</td><td>PEAK</td></tr></table>						Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg			1	2412.00	104.98	-----	-----	100.13	30.61	6.88	32.64	344	248
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																										
1	2388.65	46.55	74.00	-27.45	41.73	30.60	6.86	32.64	344	248	PEAK																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																										
1	2412.00	104.98	-----	-----	100.13	30.61	6.88	32.64	344	248	PEAK																																																																								
Avg	Level (dBuV/m) Date: 2025-07-02 1 2389.95 36.22 54.00 -17.78 31.39 30.60 6.87 32.64 344 248 AVERAGE						Level (dBuV/m) Date: 2025-07-02 1 2412.00 95.60 ----- 90.75 30.61 6.88 32.64 344 248 AVERAGE																																																																												
	Limit Margin Read Ant Cable Preamp APos TPos <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2389.95</td><td>36.22</td><td>54.00</td><td>-17.78</td><td>31.39</td><td>30.60</td><td>6.87</td><td>32.64</td><td>344</td><td>248</td><td>AVERAGE</td></tr></table>						Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg			1	2389.95	36.22	54.00	-17.78	31.39	30.60	6.87	32.64	344	248	AVERAGE	Limit Margin Read Ant Cable Preamp APos TPos <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2412.00</td><td>95.60</td><td>-----</td><td>-----</td><td>90.75</td><td>30.61</td><td>6.88</td><td>32.64</td><td>344</td><td>248</td><td>AVERAGE</td></tr></table>						Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg			1	2412.00	95.60	-----	-----	90.75	30.61	6.88	32.64	344	248
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																										
1	2389.95	36.22	54.00	-17.78	31.39	30.60	6.87	32.64	344	248	AVERAGE																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																										
1	2412.00	95.60	-----	-----	90.75	30.61	6.88	32.64	344	248	AVERAGE																																																																								

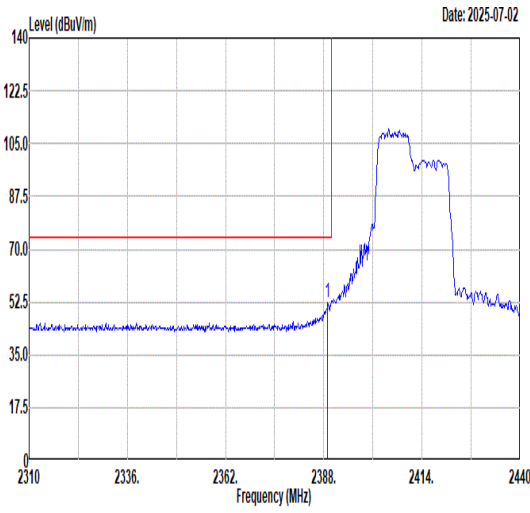
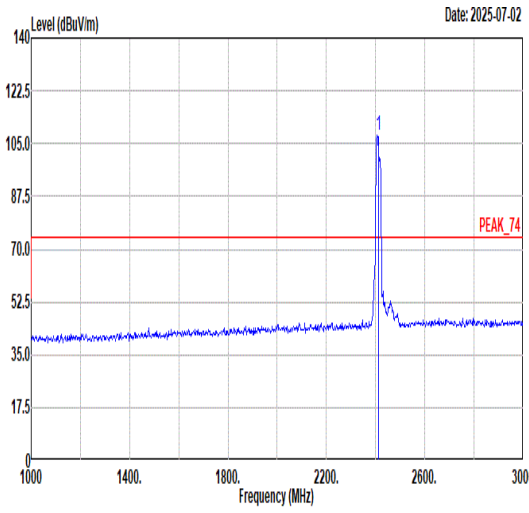
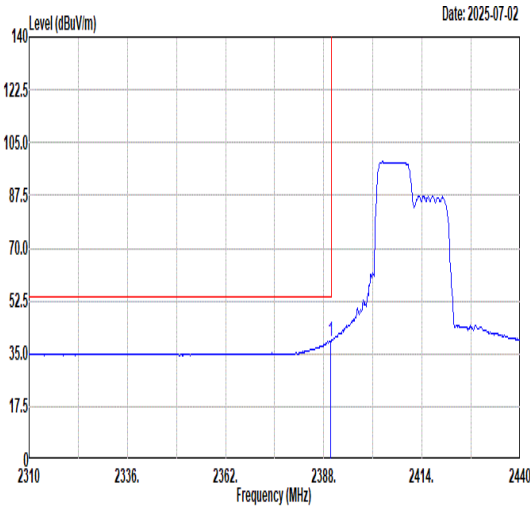
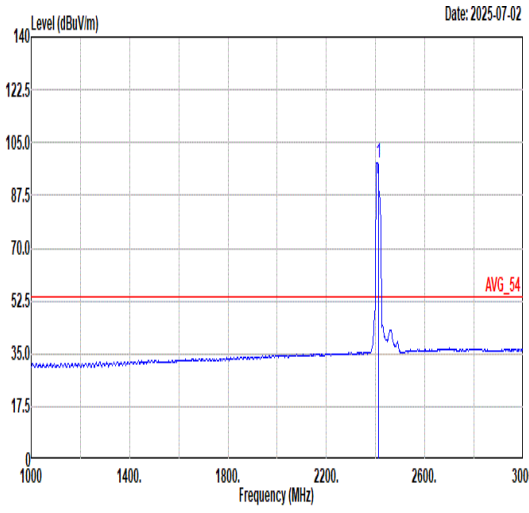


		24																																																																																								
Mode		Band Edge																																																																																								
		2400-2483.5_802.11ax HE20_CH1_Partial RU106/53_2412MHz																																																																																								
ANT		8																																																																																								
Pol.		Horizontal					Fundamental																																																																																			
Peak	 Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.04</td><td>52.18</td><td>74.00</td><td>-21.82</td><td>47.36</td><td>30.60</td><td>6.86</td><td>32.64</td><td>112 326 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.04	52.18	74.00	-21.82	47.36	30.60	6.86	32.64	112 326 PEAK	 Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>108.00</td><td>-----</td><td>-----</td><td>103.15</td><td>30.61</td><td>6.88</td><td>32.64</td><td>112 326 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.00	-----	-----	103.15	30.61	6.88	32.64	112 326 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.04	52.18	74.00	-21.82	47.36	30.60	6.86	32.64	112 326 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	108.00	-----	-----	103.15	30.61	6.88	32.64	112 326 PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>39.34</td><td>54.00</td><td>-14.66</td><td>34.51</td><td>30.60</td><td>6.87</td><td>32.64</td><td>112 326 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.82	39.34	54.00	-14.66	34.51	30.60	6.87	32.64	112 326 AVERAGE	 Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>98.46</td><td>-----</td><td>-----</td><td>93.61</td><td>30.61</td><td>6.88</td><td>32.64</td><td>112 326 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.46	-----	-----	93.61	30.61	6.88	32.64	112 326 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.82	39.34	54.00	-14.66	34.51	30.60	6.87	32.64	112 326 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	98.46	-----	-----	93.61	30.61	6.88	32.64	112 326 AVERAGE																																																																																	

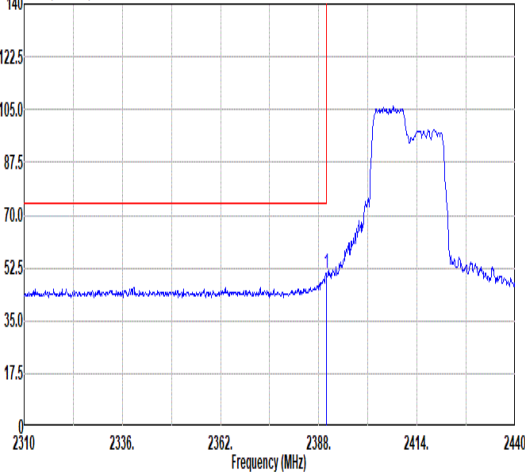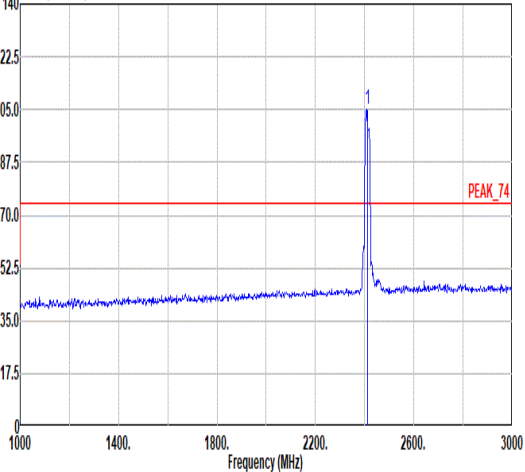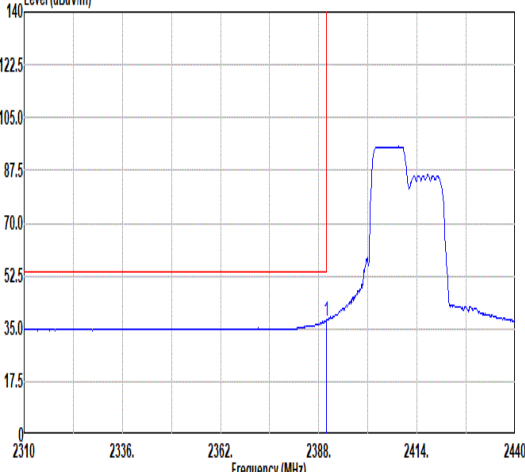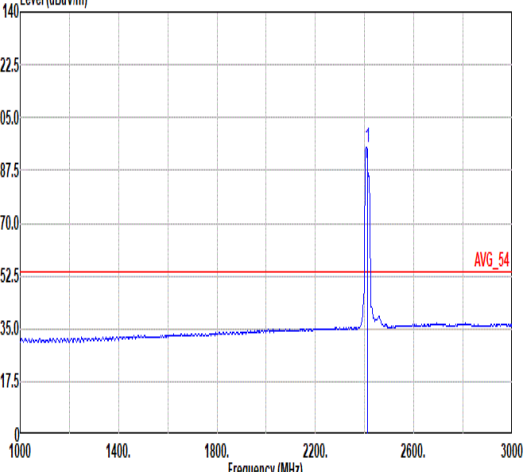

Mode	24	
	Band Edge	
	2400-2483.5_802.11ax HE20_CH1_Partial RU106/53_2412MHz	
ANT	8	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2025-07-02  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.95 50.98 74.00 -23.02 46.15 30.60 6.87 32.64 388 247 PEAK	Level (dBuV/m) Date: 2025-07-02  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2412.00 105.35 ----- 100.48 30.62 6.89 32.64 388 247 PEAK
	Level (dBuV/m) Date: 2025-07-02  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2389.95 37.64 54.00 -16.36 32.81 30.60 6.87 32.64 388 247 AVERAGE	Level (dBuV/m) Date: 2025-07-02  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 2412.00 95.27 ----- 90.40 30.62 6.89 32.64 388 247 AVERAGE

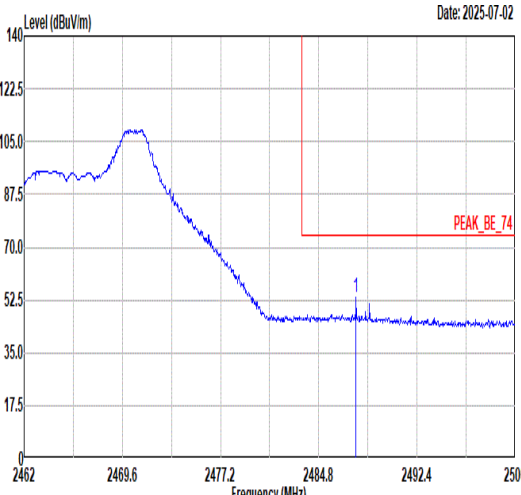
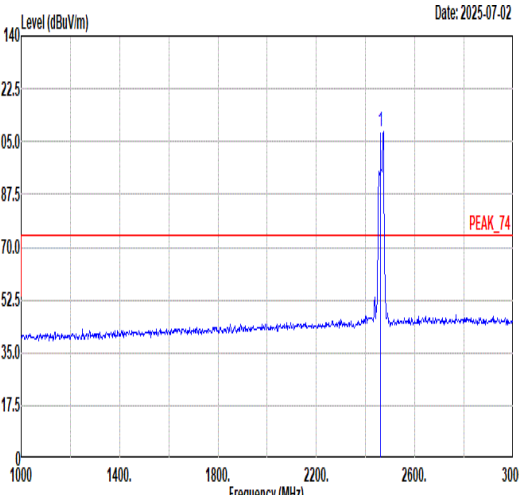
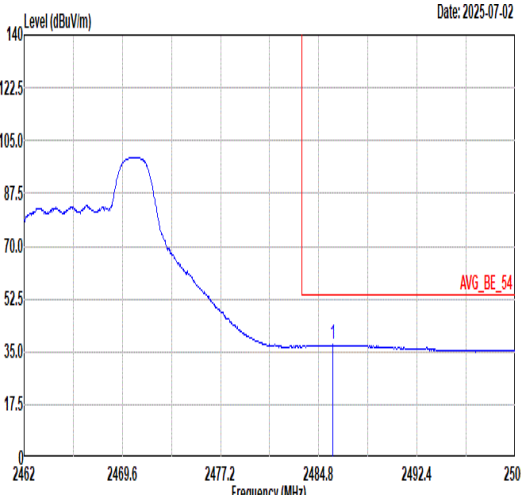
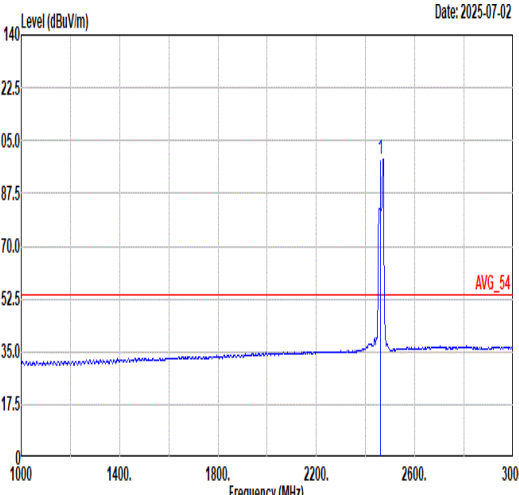


Mode	25																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11ax HE20_CH11_Partial RU26/8_2462MHz																																																																																									
ANT	8																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.69</td><td>53.48</td><td>74.00</td><td>-20.52</td><td>48.48</td><td>30.62</td><td>6.98</td><td>32.60</td><td>100 326 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2487.69	53.48	74.00	-20.52	48.48	30.62	6.98	32.60	100 326 PEAK	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.43</td><td>-----</td><td>-----</td><td>103.42</td><td>30.66</td><td>6.96</td><td>32.61</td><td>100 326 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.43	-----	-----	103.42	30.66	6.96	32.61	100 326 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2487.69	53.48	74.00	-20.52	48.48	30.62	6.98	32.60	100 326 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	108.43	-----	-----	103.42	30.66	6.96	32.61	100 326 PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.90</td><td>37.27</td><td>54.00</td><td>-16.73</td><td>32.27</td><td>30.63</td><td>6.98</td><td>32.61</td><td>100 326 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.90	37.27	54.00	-16.73	32.27	30.63	6.98	32.61	100 326 AVERAGE	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.04</td><td>-----</td><td>-----</td><td>94.03</td><td>30.66</td><td>6.96</td><td>32.61</td><td>100 326 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.04	-----	-----	94.03	30.66	6.96	32.61	100 326 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2485.90	37.27	54.00	-16.73	32.27	30.63	6.98	32.61	100 326 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	99.04	-----	-----	94.03	30.66	6.96	32.61	100 326 AVERAGE																																																																																	



Mode	25																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11ax HE20_CH11_Partial RU26/8_2462MHz																																																																													
ANT	8																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	Date: 2025-07-02 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2486.93</td><td>47.56</td><td>74.00</td><td>-26.44</td><td>42.56</td><td>30.63</td><td>6.98</td><td>32.61</td><td>370</td><td>249 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2486.93	47.56	74.00	-26.44	42.56	30.63	6.98	32.61	370	249 PEAK	Date: 2025-07-02 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>105.17</td><td>-----</td><td>-----</td><td>100.16</td><td>30.66</td><td>6.96</td><td>32.61</td><td>370</td><td>249 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	105.17	-----	-----	100.16	30.66	6.96	32.61	370	249 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2486.93	47.56	74.00	-26.44	42.56	30.63	6.98	32.61	370	249 PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2462.00	105.17	-----	-----	100.16	30.66	6.96	32.61	370	249 PEAK																																																																					
Avg	Date: 2025-07-02 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2486.21</td><td>36.51</td><td>54.00</td><td>-17.49</td><td>31.51</td><td>30.63</td><td>6.98</td><td>32.61</td><td>370</td><td>249 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2486.21	36.51	54.00	-17.49	31.51	30.63	6.98	32.61	370	249 AVERAGE	Date: 2025-07-02 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>96.04</td><td>-----</td><td>-----</td><td>91.03</td><td>30.66</td><td>6.96</td><td>32.61</td><td>370</td><td>249 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	96.04	-----	-----	91.03	30.66	6.96	32.61	370	249 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2486.21	36.51	54.00	-17.49	31.51	30.63	6.98	32.61	370	249 AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 2462.00	96.04	-----	-----	91.03	30.66	6.96	32.61	370	249 AVERAGE																																																																					

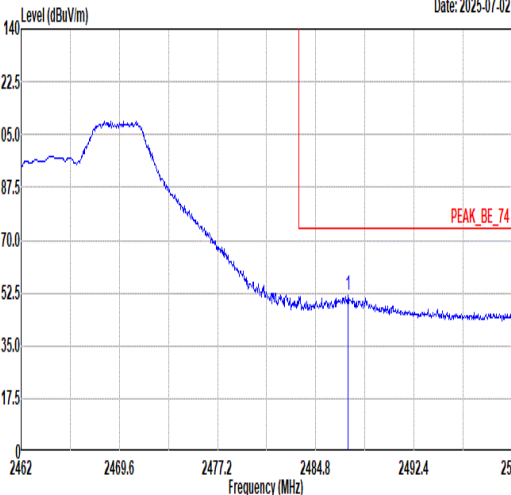
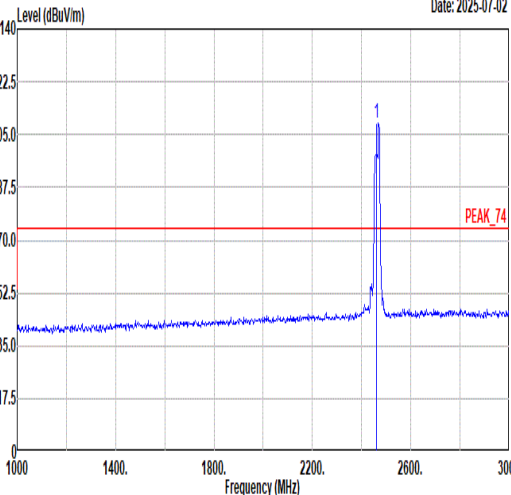
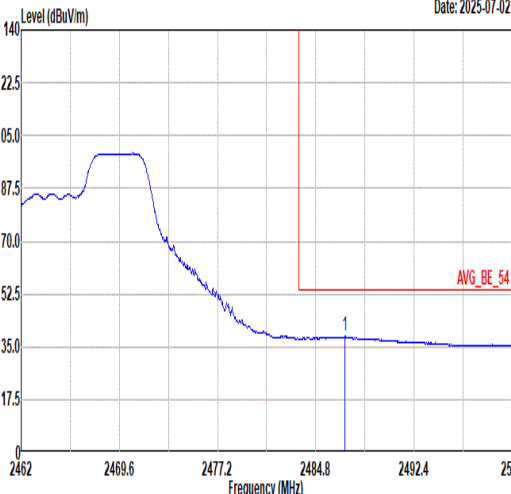
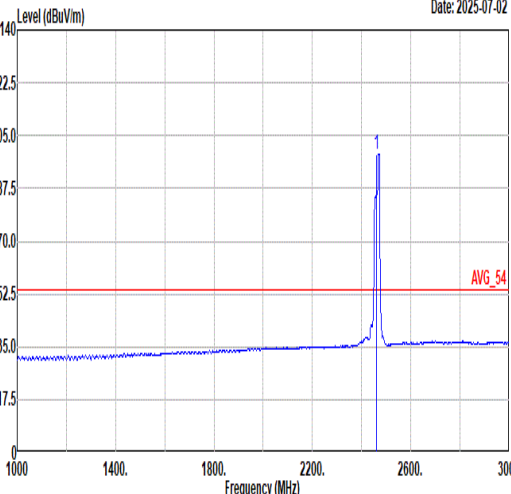


Mode	26																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11ax HE20_CH11_Partial RU52/40_2462MHz																																																																																											
ANT	8																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) PEAK_BE_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.27</td><td>51.73</td><td>74.00</td><td>-22.27</td><td>46.73</td><td>30.63</td><td>6.98</td><td>32.61</td><td>100</td><td>326</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2487.27	51.73	74.00	-22.27	46.73	30.63	6.98	32.61	100	326	PEAK	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.99</td><td>-----</td><td>-----</td><td>103.98</td><td>30.66</td><td>6.96</td><td>32.61</td><td>100</td><td>326</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.99	-----	-----	103.98	30.66	6.96	32.61	100	326	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2487.27	51.73	74.00	-22.27	46.73	30.63	6.98	32.61	100	326	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	108.99	-----	-----	103.98	30.66	6.96	32.61	100	326	PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2462 2469.6 2477.2 2484.8 2492.4 2500 Frequency (MHz) AVG_BE_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.04</td><td>38.32</td><td>54.00</td><td>-15.68</td><td>33.32</td><td>30.63</td><td>6.98</td><td>32.61</td><td>100</td><td>326</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2487.04	38.32	54.00	-15.68	33.32	30.63	6.98	32.61	100	326	AVERAGE	 Level (dBuV/m) Date: 2025-07-02 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.90</td><td>-----</td><td>-----</td><td>93.89</td><td>30.66</td><td>6.96</td><td>32.61</td><td>100</td><td>326</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.90	-----	-----	93.89	30.66	6.96	32.61	100	326	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2487.04	38.32	54.00	-15.68	33.32	30.63	6.98	32.61	100	326	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2462.00	98.90	-----	-----	93.89	30.66	6.96	32.61	100	326	AVERAGE																																																																																	



Mode	26																																																																																																																	
	Band Edge																																																																																																																	
	2400-2483.5_802.11ax HE20_CH11_Partial RU52/40_2462MHz																																																																																																																	
ANT	8																																																																																																																	
Pol.	Vertical	Fundamental																																																																																																																
Peak	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2483.93</td><td>46.85</td><td>74.00</td><td>-27.15</td><td>41.85</td><td>30.63</td><td>6.98</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>32.61</td><td>332</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>247</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2483.93	46.85	74.00	-27.15	41.85	30.63	6.98							32.61	332								247								PEAK	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2462.00</td><td>104.77</td><td>-----</td><td>-----</td><td>99.76</td><td>30.66</td><td>6.96</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>32.61</td><td>332</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>247</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2462.00	104.77	-----	-----	99.76	30.66	6.96							32.61	332								247								PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																																											
1	2483.93	46.85	74.00	-27.15	41.85	30.63	6.98																																																																																																											
						32.61	332																																																																																																											
							247																																																																																																											
							PEAK																																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																																											
1	2462.00	104.77	-----	-----	99.76	30.66	6.96																																																																																																											
						32.61	332																																																																																																											
							247																																																																																																											
							PEAK																																																																																																											
Avg	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2486.43</td><td>36.36</td><td>54.00</td><td>-17.64</td><td>31.36</td><td>30.63</td><td>6.98</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>32.61</td><td>332</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>247</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2486.43	36.36	54.00	-17.64	31.36	30.63	6.98							32.61	332								247								AVERAGE	Level (dBuV/m) Date: 2025-07-02 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2462.00</td><td>95.30</td><td>-----</td><td>-----</td><td>90.29</td><td>30.66</td><td>6.96</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>32.61</td><td>332</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>247</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2462.00	95.30	-----	-----	90.29	30.66	6.96							32.61	332								247								AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																																											
1	2486.43	36.36	54.00	-17.64	31.36	30.63	6.98																																																																																																											
						32.61	332																																																																																																											
							247																																																																																																											
							AVERAGE																																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																																											
1	2462.00	95.30	-----	-----	90.29	30.66	6.96																																																																																																											
						32.61	332																																																																																																											
							247																																																																																																											
							AVERAGE																																																																																																											

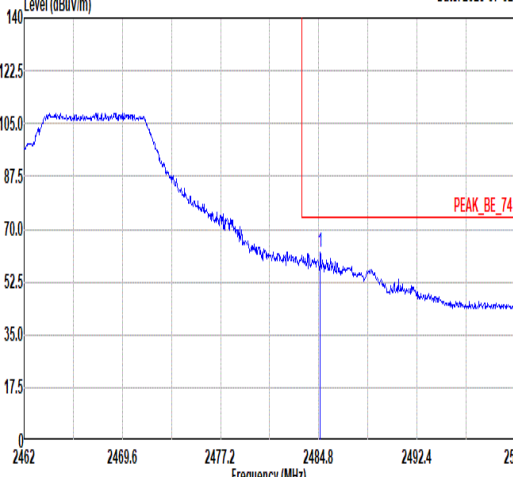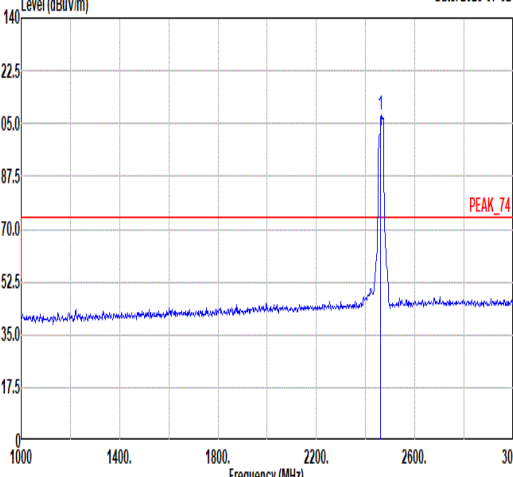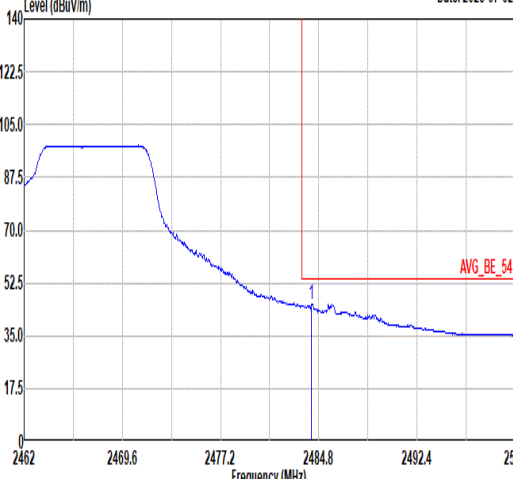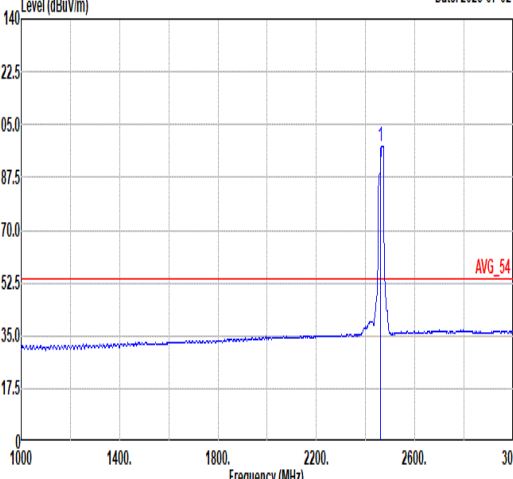

Mode	27																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11ax HE20_CH11_Partial RU106/54_2462MHz																																																																																									
ANT	8																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-07-02  PEAK_BE_74 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.91</td><td>62.48</td><td>74.00</td><td>-11.52</td><td>57.48</td><td>30.63</td><td>6.98</td><td>32.61</td><td>104 326 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.91	62.48	74.00	-11.52	57.48	30.63	6.98	32.61	104 326 PEAK	Level (dBuV/m) Date: 2025-07-02  PEAK_74 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>107.55</td><td>-----</td><td>-----</td><td>102.54</td><td>30.67</td><td>6.95</td><td>32.61</td><td>104 326 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.55	-----	-----	102.54	30.67	6.95	32.61	104 326 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2484.91	62.48	74.00	-11.52	57.48	30.63	6.98	32.61	104 326 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	107.55	-----	-----	102.54	30.67	6.95	32.61	104 326 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-07-02  AVG_BE_54 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.23</td><td>45.46</td><td>54.00</td><td>-8.54</td><td>40.46</td><td>30.63</td><td>6.98</td><td>32.61</td><td>104 326 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.23	45.46	54.00	-8.54	40.46	30.63	6.98	32.61	104 326 AVERAGE	Level (dBuV/m) Date: 2025-07-02  AVG_54 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>97.86</td><td>-----</td><td>-----</td><td>92.85</td><td>30.66</td><td>6.96</td><td>32.61</td><td>104 326 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.86	-----	-----	92.85	30.66	6.96	32.61	104 326 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2484.23	45.46	54.00	-8.54	40.46	30.63	6.98	32.61	104 326 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	97.86	-----	-----	92.85	30.66	6.96	32.61	104 326 AVERAGE																																																																																	