

EUT EXTERNAL PHOTOS


FRONT VIEW OF EUT




REAR VIEW OF EUT




LEFT VIEW OF EUT

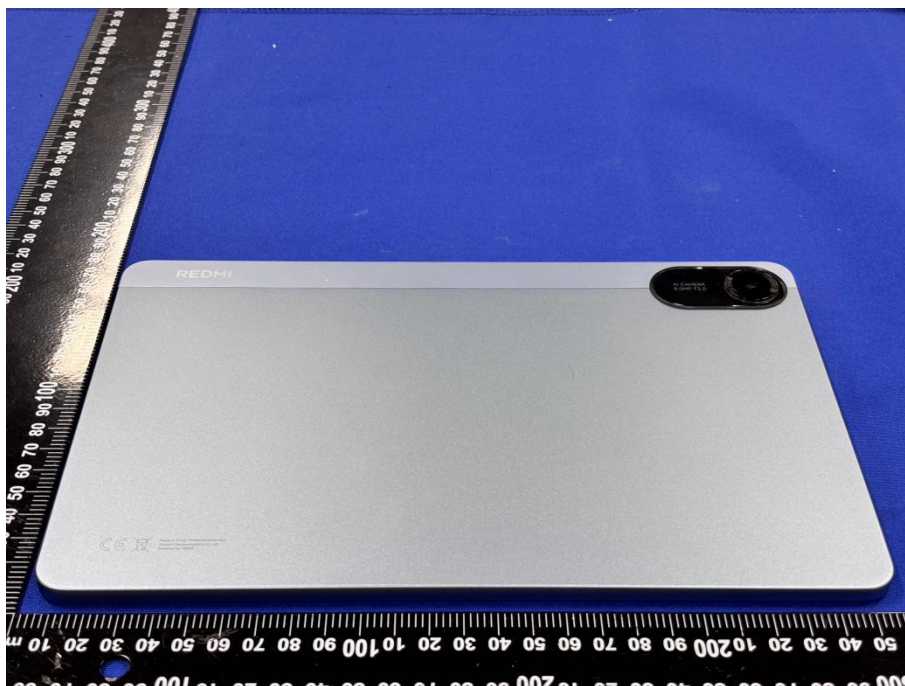


RIGHT VIEW OF EUT

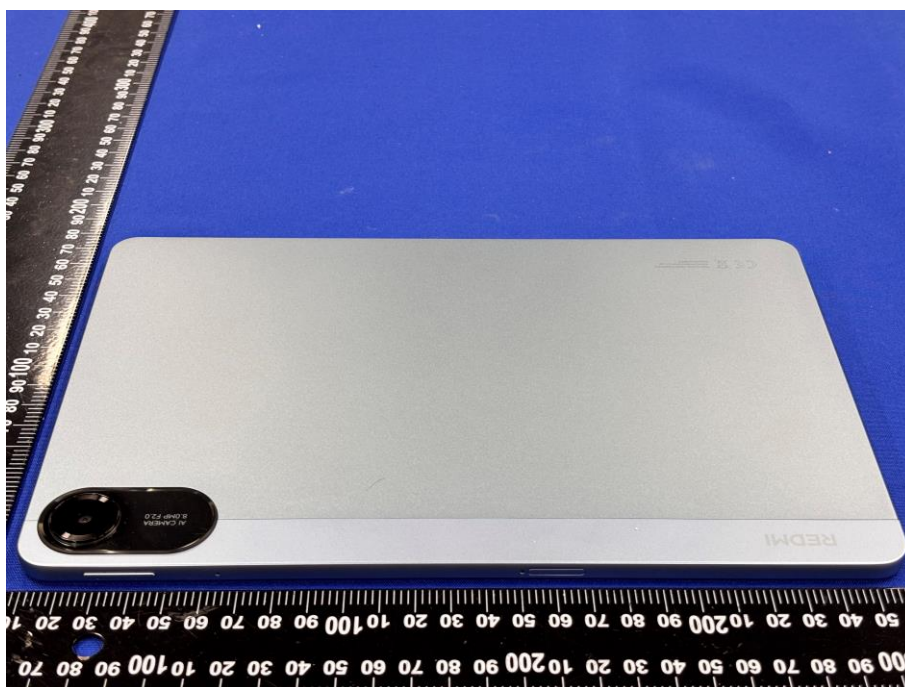


TOP VIEW OF EUT

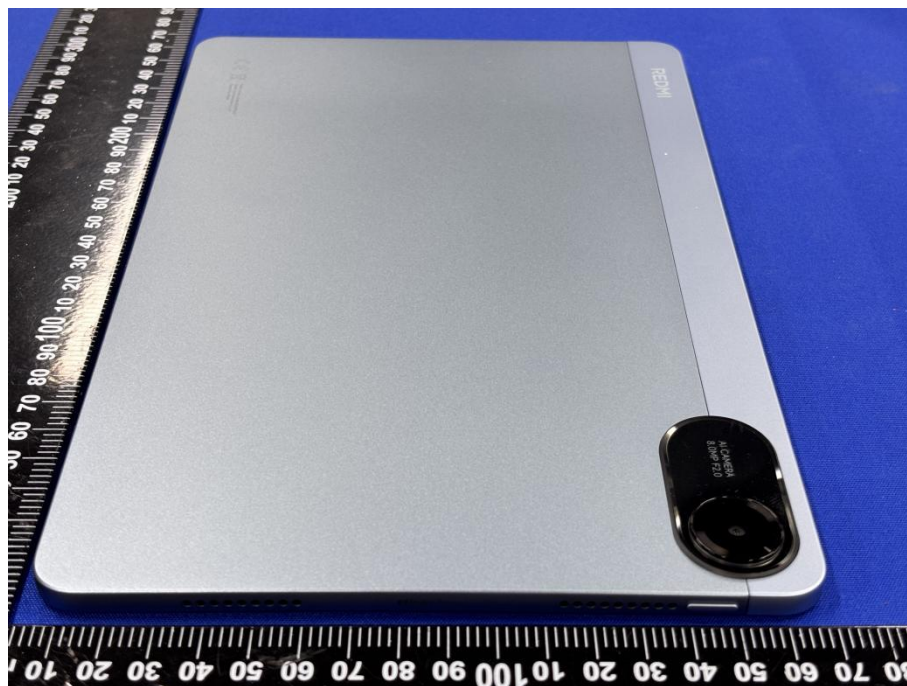

BOTTOM VIEW OF EUT

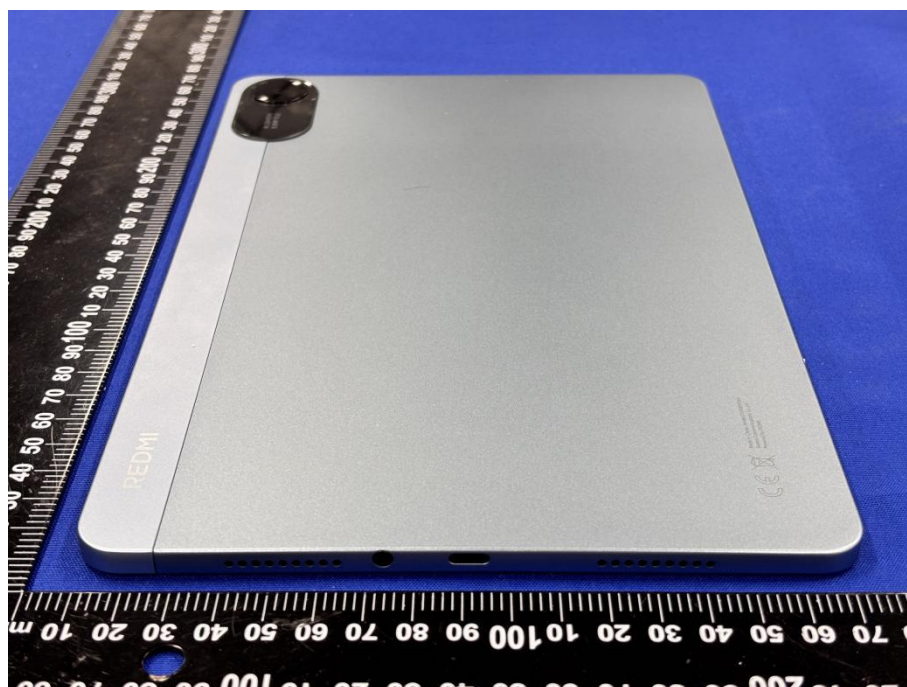


Accessory-Power Supply Unit 1 (MDY-18-EJ(US Plug))

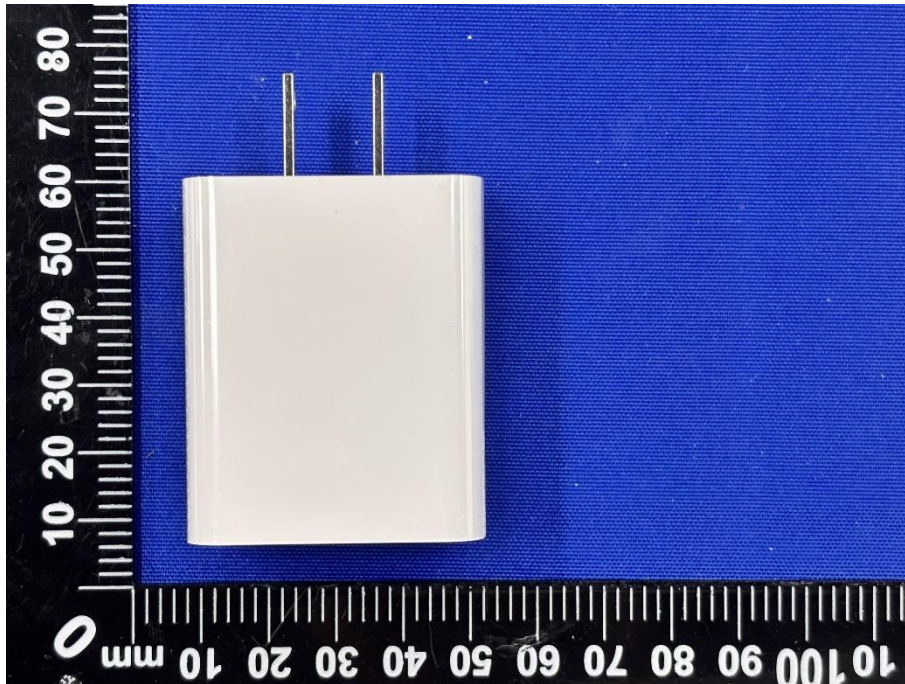

CLOSE-UP



Accessory-Power Supply Unit 2 (MDY-18-EJ(US Plug))

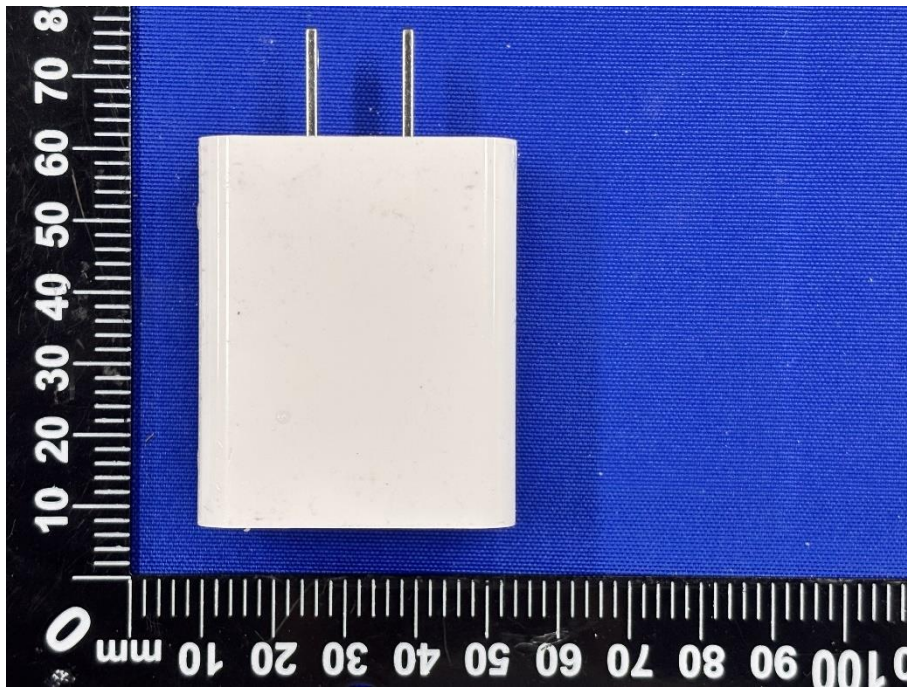


CLOSE-UP



Accessory- USB Cable 1 (B43220)



Accessory- USB Cable 2 (H43220)

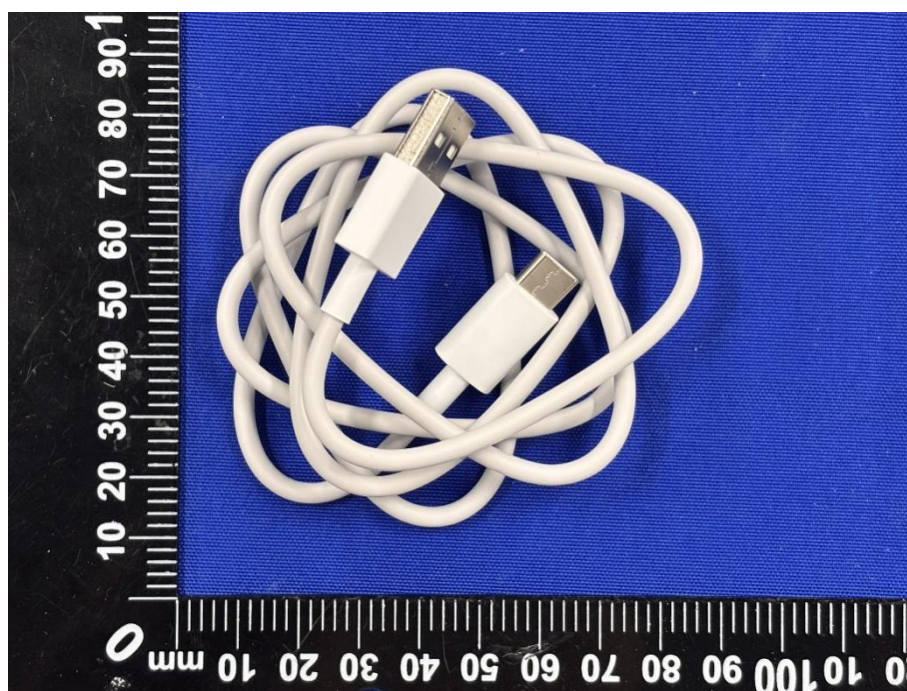

Accessory- USB Cable 3 (K43220)



Accessory- USB Cable 4 (L43220)



Ancillary Equipment:

Ancillary Equipment 1	Li-Polymer Battery 1	
	Brand Name	MI
	Model No.	BM82
	Serial No.	N/A
	Capacitance	Rated: 8800mAh/33.80Wh Typical: 9000mAh/34.56Wh
	Rated Voltage	3.84Vdc
	Limited Voltage	4.45Vdc
	Manufacturer	Chongqing CosMX Battery Co., Ltd.
Ancillary Equipment 2	Li-Polymer Battery (alternative) 2	
	Brand Name	MI
	Model No.	BM82
	Serial No.	N/A
	Capacitance	Rated: 8800mAh/33.80Wh Typical: 9000mAh/34.56Wh
	Rated Voltage	3.84Vdc
	Limited Voltage	4.45Vdc
	Manufacturer	Zhejiang Sunwoda Electronic Co., Ltd.
Ancillary Equipment 3	Power Supply Unit 1	
	Brand Name	MI
	Model No.	MDY-18-EJ (US Plug)
	Supplier	Chenyang
	Rated Input	100-240Vac, 50/60Hz, 0.5A
	Normal Output	5.0 Vdc, 3.0A
Ancillary Equipment 4	Power Supply Unit (alternative) 2	
	Brand Name	MI
	Model No.	MDY-18-EJ (US Plug)
	Supplier	AoHai
	Rated Input	100-240Vac, 50/60Hz, 0.5A
	Normal Output	5.0 Vdc, 3.0A
Ancillary Equipment 5	USB Cable 1	
	Model No.	B43220
	Length (Approx.)	1.0 m
Ancillary Equipment 6	USB Cable 2	
	Model No.	H43220
	Length (Approx.)	1.0 m
Ancillary Equipment 7	USB Cable 3	
	Model No.	K43220
	Length (Approx.)	1.0 m
Ancillary Equipment 8	USB Cable 4	
	Model No.	L43220
	Length (Approx.)	1.0 m

Note 1: All adapters are tested, only the worst data of MDY-18-EJ-Chenyang shown in this report.
Note 2: All batteries are tested, only the worst data of BM82 (Chongqing CosMX Battery Co., Ltd.) shown in this report.
Note 3: All USB cable are tested, only the worst data of B43220 shown in this report.

--BLANK BELOW--