



CHANNEL	TX Channel 60	DETECTOR	Peak (PK)				
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)				
ANTENNA DOLADITY & TEST DISTANCE, HODIZONTAL AT 2 M							

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,297.900	99.71			43.45	Н	181.2	1.00
5	5,350.000	58.69	74.00	15.31	43.55	Н	5.3	2.00
5	5,351.600	59.07	74.00	14.93	43.55	Н	226.7	2.00



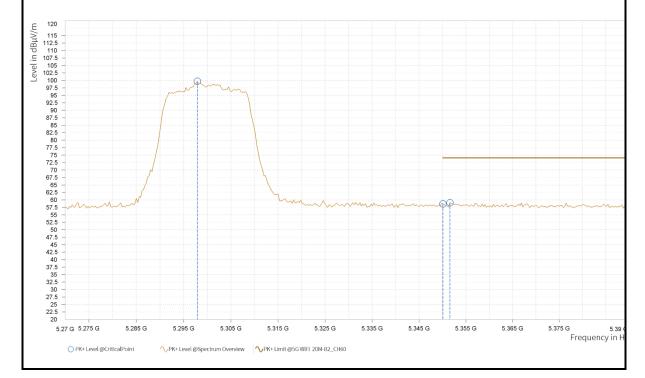


	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]			
5	5,300.900	86.58			43.45	Н	128.6	2.00			
5	5,350.400	44.37	54.00	9.63	43.55	Н	1	2.00			
5	5,352.800	44.33	54.00	9.67	43.55	Н	1	2.00			
120 115 112.5 110 107.5 105.5 100.5											

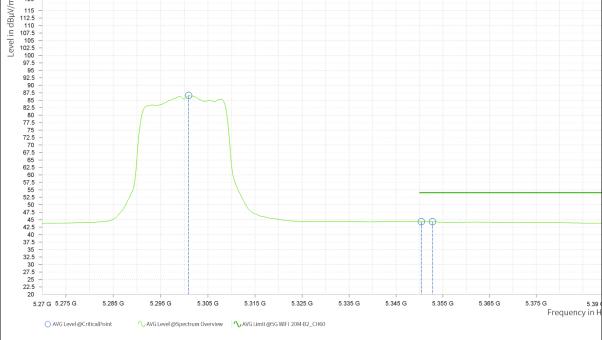




	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg Frequency [MHz] PK+ Level [dBμV/m] PK+ Limit [dBμV/m] PK+ Margin [dB] Polarization Azimuth Height [m]										
5	5,298.500	107.71			43.45	V	279.1	1.00		
5	5,350.000	58.78	74.00	15.22	43.55	V	36.6	2.00		
5	5 5,363.900 59.39 74.00 14.61 43.55 V 5 1.00									
	•	•	•		•	•	•			

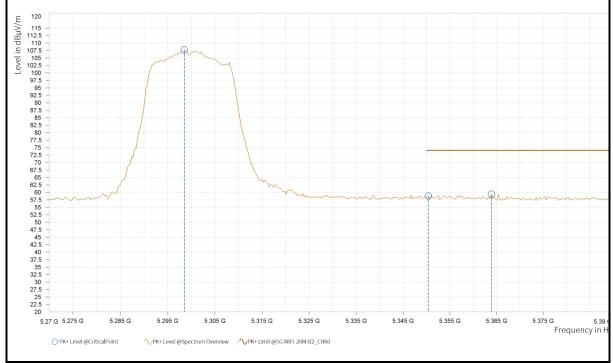



TAS Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]		
5	5,302.100	95.38			43.46	V	282.8	1.00		
5	5,350.000	44.50	54.00	9.50	43.55	V	269.8	2.00		
5	5,353.400	44.38	54.00	9.62	43.55	V	128.7	2.00		
ω/120 115 112.5 110 107.5 105 102.5										

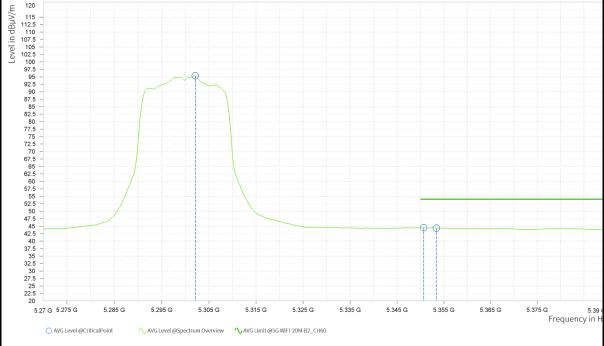


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5300MHz: Fundamental frequency.



CHANNEL	TX Channel 64	DETECTOR	Peak (PK)				
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)				
ANTENNA DOLADITY & TEST DISTANCE, HODIZONTAL AT 2 M							

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,318.400	101.95			43.49	Н	88	1.00
6	5,350.000	58.19	74.00	15.81	43.55	Н	273.2	2.00
6	5,368.400	59.87	74.00	14.13	43.55	Н	7.4	2.00

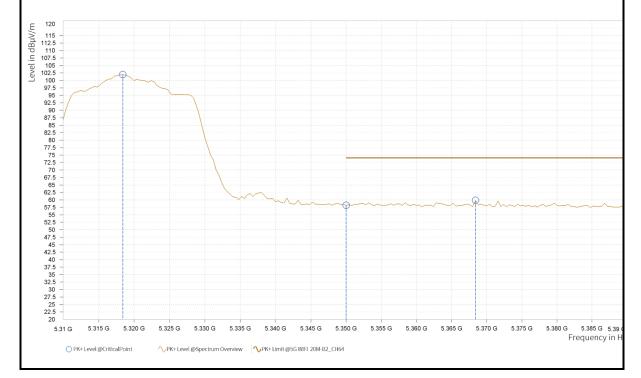



	Α	NTENNA P	OLARITY 8	TEST DIS	TANCE: HO	RIZONTAL A	T 3 M	
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,318.400	89.29			43.49	Н	86.8	1.00
6	5,350.000	44.38	54.00	9.62	43.55	Н	0.9	2.00
6	5,351.200	44.32	54.00	9.68	43.55	Н	137	2.00
E 120 120 112,5 107,5 90,5 90,5 90,5 90,5 90,5 90,5 90,5 90					ΦΦ			

5.335 G 5.340 G 5.345 G

5.350 G


5.315 G

O AVG Level @CriticalPoint

5.380 G 5.385 G 5.39 G Frequency in H




	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg Frequency [MHz] PK+ Level [dBμV/m] PK+ Limit [dBμV/m] PK+ Margin [dB] Polarization Azimuth Height [m]										
6	5,320.800	108.05			43.49	V	269.5	1.00		
6	5,350.000	58.42	74.00	15.58	43.55	V	89.3	2.00		
6	5,379.600	60.00	74.00	14.00	43.55	V	0.9	2.00		
	•									

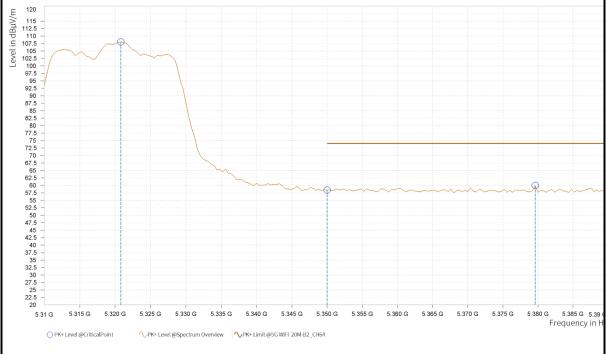



REAU Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]		
6	5,319.200	97.03			43.49	V	270.8	1.00		
6	5,350.000	44.56	54.00	9.44	43.55	V	270.8	1.00		
6	5,350.800	44.52	54.00	9.48	43.55	V	90.4	2.00		
- 120	C 120 : : : : : : : : : : : : : : :									
E 120										

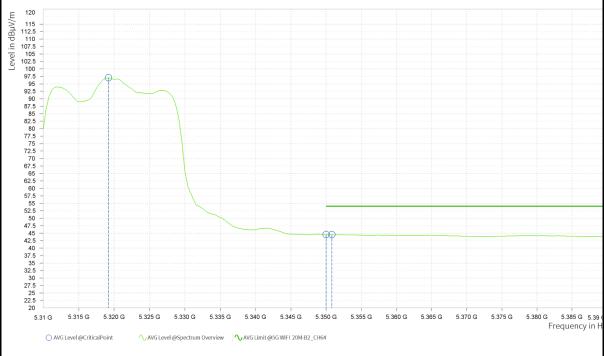


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5320MHz: Fundamental frequency.




802.11ac (40MHz)								
CHANNEL	TX Channel 54	DETECTOR	Peak (PK)					
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)					
ANTENN	A DOLADITY & TEST DIS	TANCE: HODIZONTAL	AT 2 M					

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,263.833	98.22			43.62	Н	48.5	1.00
3	5,350.000	58.22	74.00	15.78	43.55	Н	359	2.00
3	5,380.433	59.08	74.00	14.92	43.55	Н	146.6	2.00

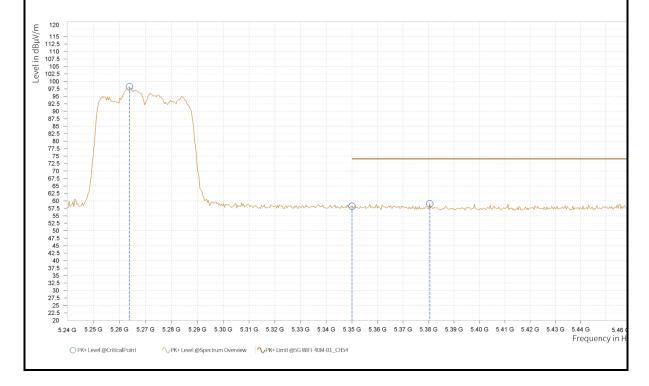




	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M												
Rg Frequency [MHz] AVG Level [dBμV/m] AVG Limit [dBμV/m] AVG Margin [dB] Correction [dB] Polarization Azimuth [deg] Anter Heig [m]													
3	5,268.600	87.39			43.59	Н	90.4	1.00					
3	5,350.000	44.17	54.00	9.83	43.55	Н	90.4	1.00					
3	5,356.600	44.24	54.00	9.76	43.55	Н	42.5	1.00					

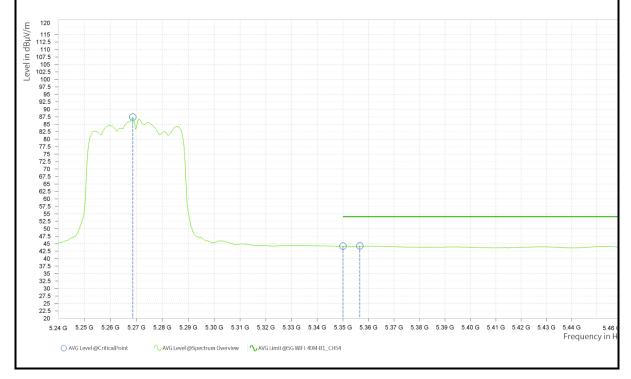




		ANTENNA	POLARITY	& TEST DI	STANCE: V	ERTICAL AT	3 M	
Rg Frequency PK+ Level PK+ Limit Margin Correction Polarization Azimuth He								Antenna Height [m]
3	5,268.230	103.08			43.60	V	325.8	1.00
3	5,350.000	57.83	74.00	16.17	43.55	V	272.1	2.00
3	5,428.467	59.51	74.00	14.49	43.84	V	5	1.00

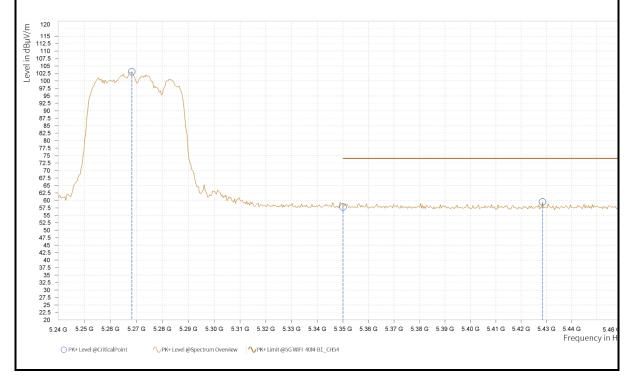



REAU Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
Rg Frequency [MHz] AVG Level [dBμV/m] AVG Limit [dBμV/m] Frequency [dBμV/m] AVG Limit [dBμV/m] Polarization Azimuth [deg] Antenr												
3	5,268.233	95.47			43.60	V	80.9	2.00				
3	5,350.000	44.33	54.00	9.67	43.55	V	317.6	2.00				
3	5,394.000	44.47	54.00	9.53	43.55	V	127.4	2.00				

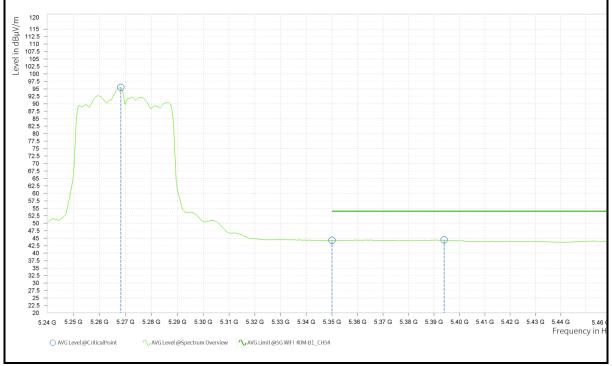

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5270MHz: Fundamental frequency.



TAS Test Report No.: PSU-QBJ2507100110RF03

CHAN	NNEL		ТХ	Channel 62	2	DETECTOR	२	Peak (PK)	
FREC	QUENCY RA	NGE	1G	Hz ~ 40GH:	Z	FUNCTION		Average (AV)	
	Α	NTENN	A P	OLARITY 8	TEST DIS	TANCE: HO	RIZONTAL A	AT 3 M	
Rg	Frequency [MHz]	PK+ Le	vel m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,317.500	100.80	0			43.49	Н	178.9	1.00
4	5,350.000	60.38	3	74.00	13.62	43.55	Н	269.6	1.00
4	5,350.500	60.50		74.00	13.50	43.55	Н	269.6	1.00
E/Nf8p ut 120, 110, 112, 5 110, 110, 110, 110, 110, 110, 110, 1									

O PK+ Level @CriticalPoint


5.39 Frequency in H

√PK+ Level @Spectrum Overview

√PK+ Limit @5G WIFI 40M-B2_CH62




	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg Frequency [MHz] AVG Level [dBμV/m] AVG Limit [dBμV/m] AVG Margin [dB] Polarization Azimuth Heigh [m]												
4	5,312.500	90.50			43.48	Н	103.6	2.00				
4	5,350.000	45.11	54.00	8.89	43.55	Н	355	2.00				
4	5,350.500	44.94	54.00	9.06	43.55	Н	355	2.00				

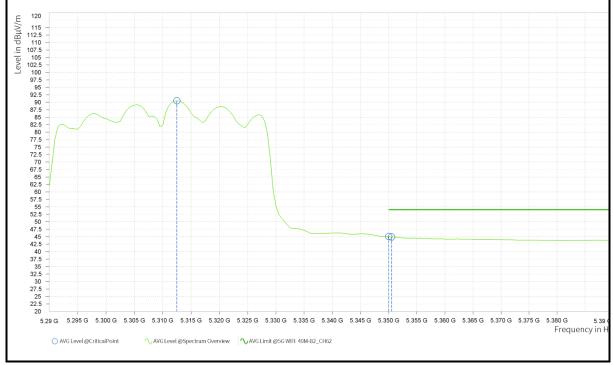




	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
Rg	Rg Frequency PK+ Level PK+ Limit Margin [dB] Correction Polarization Azimuth Heigh [deg]											
4	5,307.000	103.34		[GD]	43.47	V	261.3	1.00				
4	5,350.000	65.41	74.00	8.59	43.55	V	141.8	2.00				
4	5,352.000	64.89	74.00	9.11	43.55	V	40.2	1.00				

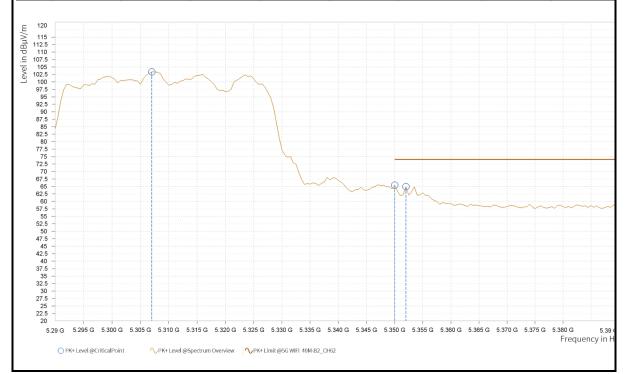



TAS Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
Rg Frequency [MHz] AVG Level [dBμV/m] AVG Limit [dBμV/m] Correction [dB] Polarization Azimuth [deg] Antenn Height												
4	5,306.500	94.51			43.47	V	79.7	2.00				
4	5,350.000	47.72	54.00	6.28	43.55	V	317.6	2.00				
4	5,352.000	48.23	54.00	5.77	43.55	V	128.6	2.00				

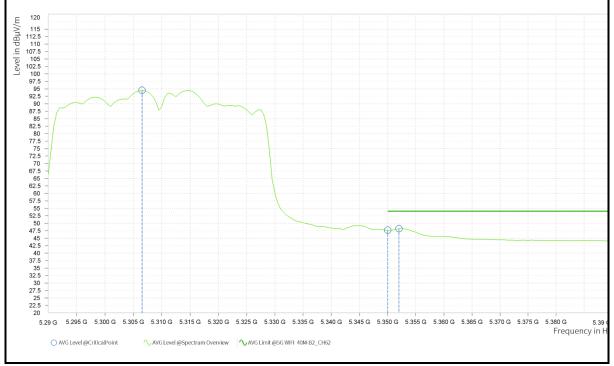


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5310MHz: Fundamental frequency.



802.11ac (80MHz)								
CHANNEL	TX Channel 58	DETECTOR	Peak (PK)					
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)					

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,291.700	98.37			43.48	Н	82.1	2.00
1	5,350.000	57.92	74.00	16.08	43.55	Н	4.2	2.00
1	5,356.600	59.49	74.00	14.51	43.55	Н	1	1.00

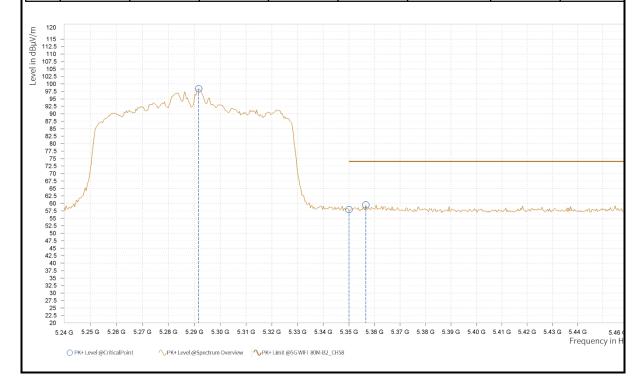




	Δ	NTENNA P	OLARITY 8	TEST DIS	TANCE: HO	RIZONTAL A	T 3 M				
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]			
1	5,291.700	87.23			43.48	Н	83.3	2.00			
1	5,350.000	44.85	54.00	9.15	43.55	Н	89.2	1.00			
1	5,351.100	44.80	54.00	9.20	43.55	Н	89.2	1.00			






	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]				
1	5,295.367	102.48			43.47	٧	79.6	2.00				
1	5,350.000	58.68	74.00	15.32	43.55	V	317.5	2.00				
1	5,355.500	60.72	74.00	13.28	43.55	٧	127.4	2.00				

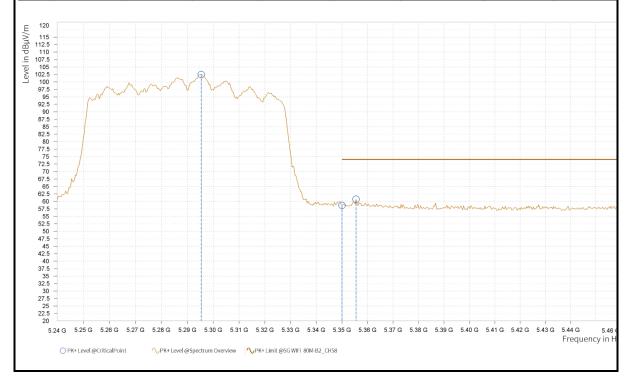



REAU Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M												
Rg Frequency [MHz] AVG Level [dBμV/m] AVG Limit [dBμV/m] AVG Margin [dB] Polarization Azimuth Heig [m]													
1	5,294.633	90.65			43.47	V	84.4	2.00					
1	5,350.000	46.01	54.00	7.99	43.55	٧	274.4	1.00					
1	5,356.600	46.00	54.00	8.00	43.55	V	317.5	2.00					

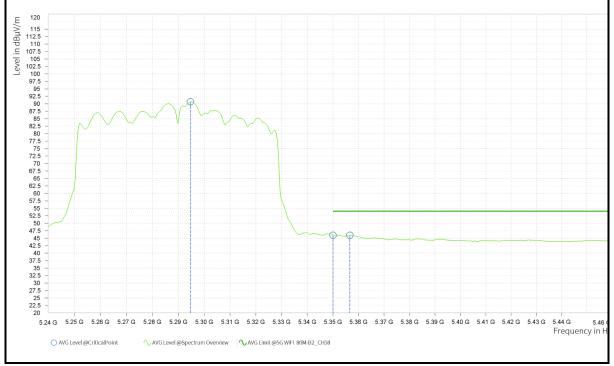


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5290MHz: Fundamental frequency.



Test Report No.: PSU-QBJ2507100110RF03


802.11AX (20MHz)									
CHANNEL	TX Channel 52	DETECTOR	Peak (PK)						
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)						

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,261.280	103.88			43.63	Н	70.1	2.00
4	5,350.000	58.40	74.00	15.60	43.55	Н	70.1	2.00
4	5,360.075	59.64	74.00	14.36	43.55	Н	70.1	2.00

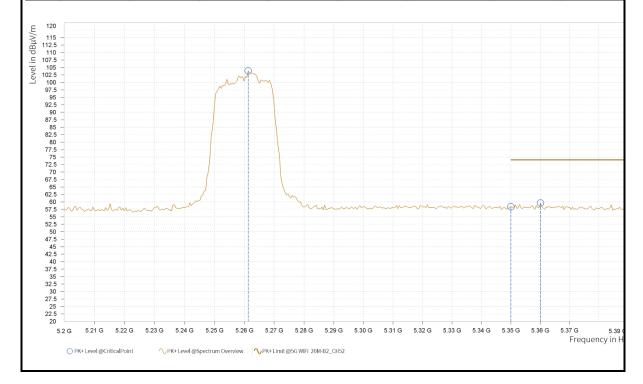




	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]				
4	5,262.225	90.33			43.62	Н	43.7	1.00				
4	5,350.000	44.17	54.00	9.83	43.55	Н	220.7	2.00				
4	5,364.350	44.29	54.00	9.71	43.55	Н	1	1.00				
el in dBµV/m 115.5 110. 107.5 105												

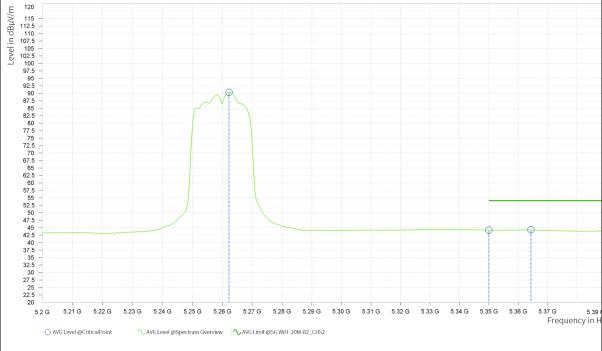



	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]				
4	5,259.380	110.11			43.64	V	284	1.00				
4	5,350.000	58.20	74.00	15.80	43.55	V	2.4	2.00				
4	5,352.000	59.13	74.00	14.87	43.55	V	5.1	1.00				
⊊ 120	•											

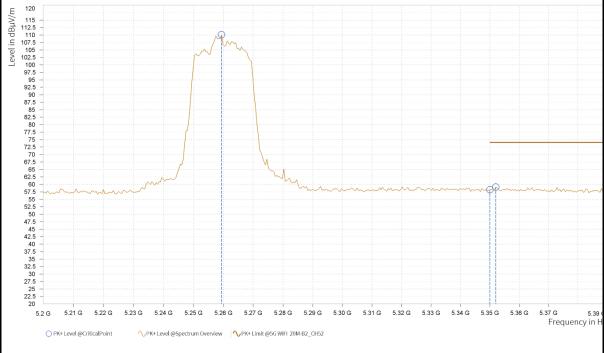



Test Report No.: PSU-QBJ2507100110RF03


Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dΒμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,257.000	96.28			43.65	V	79.6	2.00
4	5,350.000	44.32	54.00	9.68	43.55	V	128.6	2.00
4	5,362.450	44.30	54.00	9.70	43.55	V	290	1.00
110.5 115.5 105.5	52 G 521 G 522	G 523G 524G	5.25 G 5.26 G 5	27 G 528 G 528	G 5.30 G 5.31 G	5.32 G 5.33 G 5.34 G	5.35 G 5.36 G	5.37G 5

- 1 Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- 2 Margin value = Limit value- Emission level.
- 3 5260MHz: Fundamental frequency.




CHANNEL	TX Channel 60	DETECTOR	Peak (PK)					
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)					
ANTENNA DOLADITY & TEST DISTANCE, HODIZONTAL AT 2 M								

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,294.600	102.78			43.47	Н	27	2.00
5	5,350.000	58.27	74.00	15.73	43.55	Н	268.5	2.00
5	5,375.300	59.09	74.00	14.91	43.55	Н	5.1	1.00

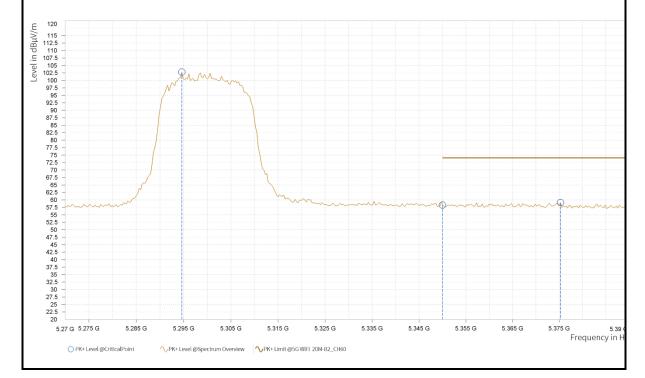



	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]				
5	5,294.900	87.92			43.47	Н	28.2	2.00				
5	5,350.000	44.29	54.00	9.71	43.55	Н	90.5	1.00				
5	5,364.500	44.27	54.00	9.73	43.55	Н	5.1	1.00				
el in dBµV/m 115.5 110 107.5 105												

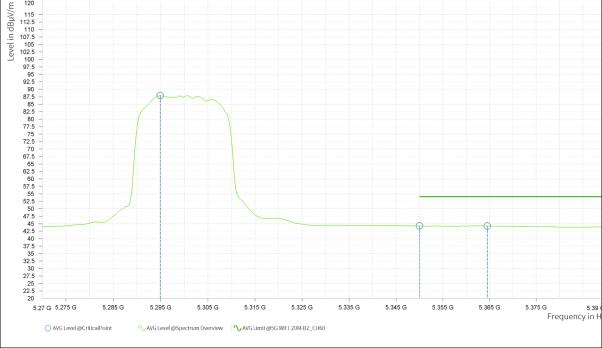



	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
Rg	Rg Frequency [MHz] PK+ Level [dBμV/m] PK+ Limit [dBμV/m] PK+ Margin [dB] Polarization Azimuth Height [m]											
5	5,296.400	109.57			43.46	V	288.7	1.00				
5	5,350.000	58.48	74.00	15.52	43.55	V	73.7	2.00				
5	5,354.600	59.18	74.00	14.82	43.55	٧	5.8	1.00				

