



	Δ	NTENNA P	OLARITY 8	TEST DIS	TANCE: HO	RIZONTAL A	T 3 M	
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,450.000	43.84	54.00	10.16	44.19	Н	211	1.00
6	5,453.200	44.07	54.00	9.93	44.12	Н	304.3	1.00
6	5,552.163	88.92			44.55	Н	359	2.00
	•	1						



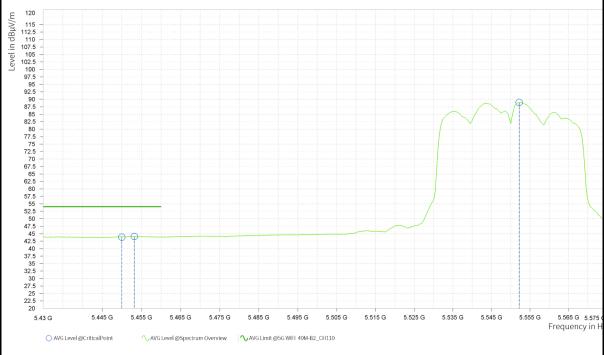


		ANTENNA	POLARITY	& TEST DI	STANCE: V	ERTICAL AT	3 M		
Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	
6	5,445.225	59.01	74.00	14.99	44.03	٧	221.8	2.00	
6	5,460.000	57.96	74.00	16.04	44.19	V	5.1	1.00	
6	5,547.450	107.59			44.57	٧	127.4	2.00	

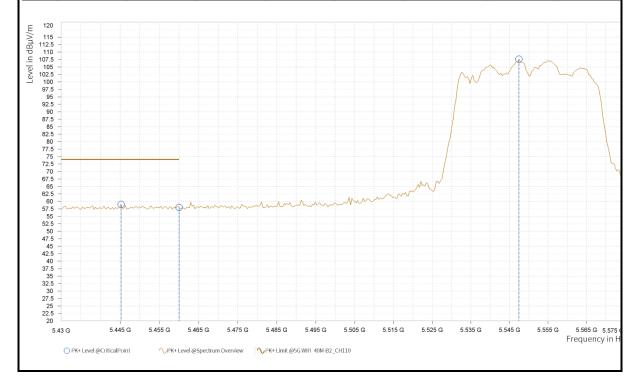



REAU Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]			
6	5,454.650	44.15	54.00	9.85	44.14	V	136.9	1.00			
6	5,460.000	43.97	54.00	10.03	44.19	V	286.3	1.00			
6	5,551.800	93.43			44.55	V	286.3	1.00			
	•										

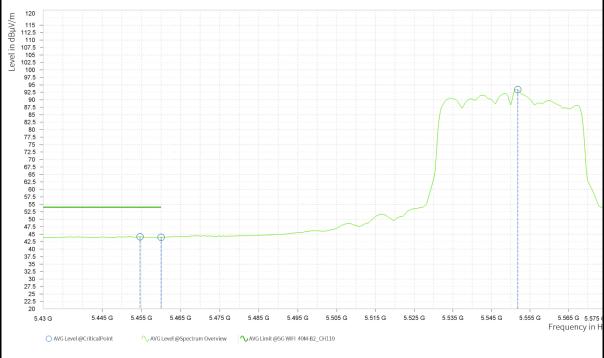


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5500MHz: Fundamental frequency.
- 4. #: Out of restricted band.



CHANNEL	TX Channel 134	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,672.000	101.30			44.42	Н	31.9	2.00
8	5,725.000	58.68	68.20	9.52	44.48	Н	0.9	2.00
8	5,734.000	59.26	68.20	8.94	44.49	Н	0.9	2.00

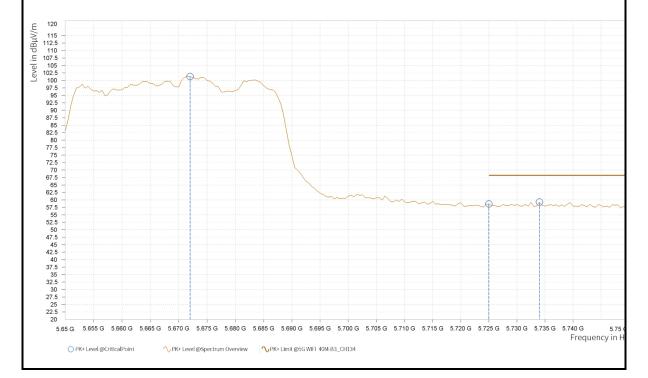



Test Report No.: PSU-QBJ2507100110RF03

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,666.000	106.19			44.41	V	79.7	2.00
8	5,725.000	58.10	68.20	10.10	44.48	V	1	1.00
8	5,725.500	58.88	68.20	9.32	44.48	V	129.8	2.00
120 115 115 110 110 110 100 100 100 100 10						M		

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor

√PK+ Level @Spectrum Overview
√PK+ Limit @5G WIFI 40M-B3_CH134


- 2. Margin value = Limit value- Emission level.
- 3. 5670MHz: Fundamental frequency.
- 4. #: Out of restricted band.

O PK+ Level @CriticalPoint



CHANNEL	TX Channel 142	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,714.100	99.47			44.48	Н	7	2.00
9	5,850.000	59.57	68.20	8.63	44.73	Н	359	2.00
9	5,891.933	59.71	68.20	8.49	44.58	Н	354.2	1.00

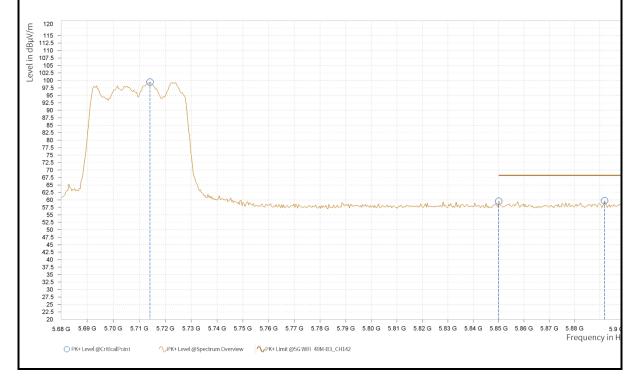



Test Report No.: PSU-QBJ2507100110RF03

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenn Height [m]
9	5,703.830	105.26			44.48	V	318.8	2.00
9	5,850.000	58.93	68.20	9.27	44.73	V	225.5	2.00
9	5,877.267	59.27	68.20	8.93	44.63	V	359.1	1.00
120 112.5 110.5 107.5 107.5 100.5 100.0 97.5 92.5 80.5 7.5 7.5 7.5 7.5 7.5 7.5 7.5 7.5 7.5 7			L. Marine			······································		· P

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor

↑PK+ Level @Spectrum Overview

↑PK+ Limit @5G WIFI 40M-B3_CH142


- 2. Margin value = Limit value- Emission level.
- 3. 5710MHz: Fundamental frequency.
- 4. #: Out of restricted band.

O PK+ Level @CriticalPoint




802.11ac (20MHz)									
CHANNEL	TX Channel 100	DETECTOR	Peak (PK)						
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)						
ANTEN	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
7	5,448.450	58.75	74.00	15.25	44.07	Н	319.9	1.00
7	5,460.000	57.92	74.00	16.08	44.19	Н	227.8	1.00
7	5,502.000	101.85			44.67	Н	88	2.00

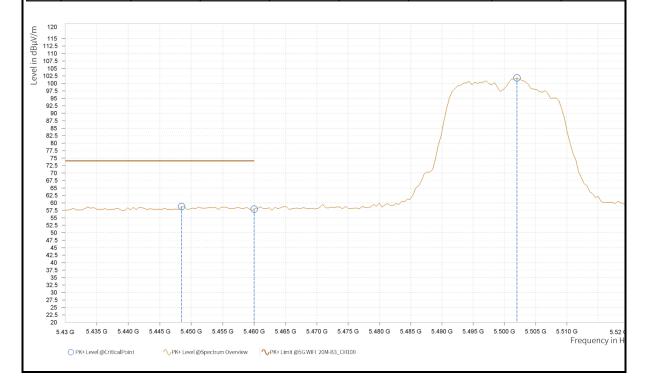




	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]				
7	5,452.950	44.10	54.00	9.90	44.12	Н	1	1.00				
7	5,460.000	43.92	54.00	10.08	44.19	Н	88	1.00				
7	5,493.900	89.79			44.58	Н	42.5	2.00				
	•											
E 120												

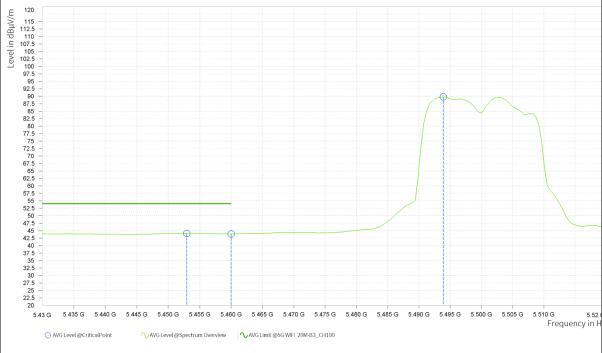




	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
Prequency PK+ Level PK+ Limit PK+ Correction Relaxization Azimu								Antenna			
Rg	[MHz]	[dBµV/m]	[dBµV/m]	Margin [dB]	[dB]	Polarization	[deg]	Height [m]			
7	5,434.500	58.72	74.00	15.28	43.91	V	359.1	1.00			
7	5,460.000	58.21	74.00	15.79	44.19	V	315.1	1.00			
7	5,502.000	107.89			44.67	V	269.5	1.00			

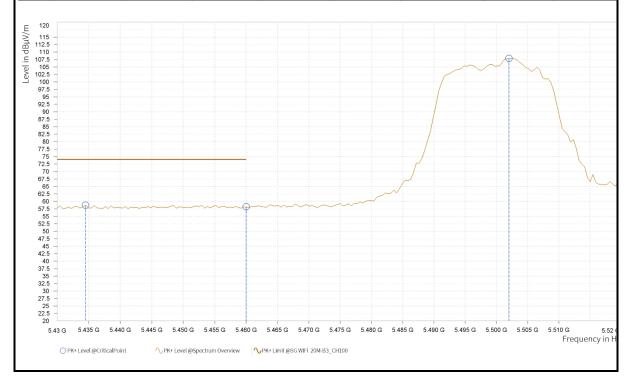



TAS Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]		
7	5,452.050	44.18	54.00	9.82	44.11	V	134.5	1.00		
7	5,460.000	44.06	54.00	9.94	44.19	٧	273.1	1.00		
7	5,501.550	95.67			44.66	V	273.1	1.00		

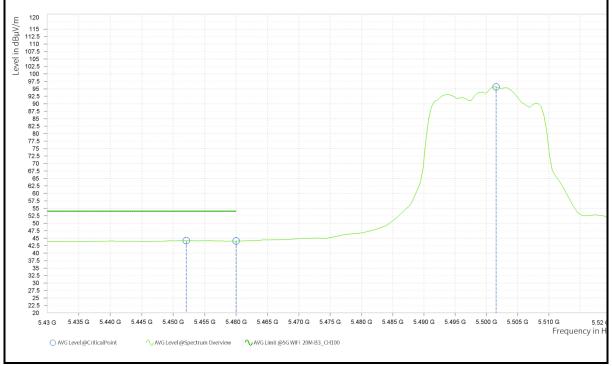


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5500MHz: Fundamental frequency.
- 4. #: Out of restricted band.




CHANNEL	TX Channel 116	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,455.075	59.35	74.00	14.65	44.14	Н	258.8	1.00
8	5,460.000	57.87	74.00	16.13	44.18	Н	133.4	2.00
8	5,582.580	105.67			44.44	Н	0.9	2.00

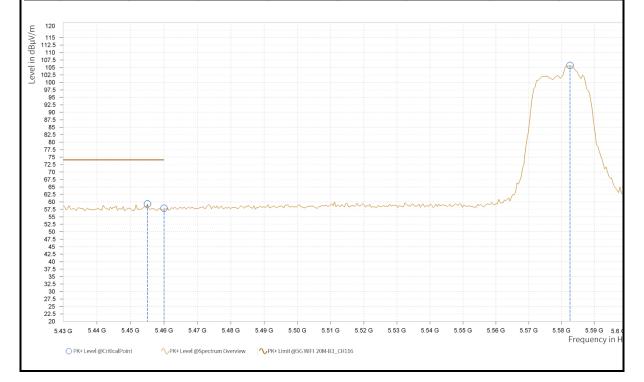




	Δ	NTENNA P	OLARITY 8	TEST DIS	TANCE: HO	RIZONTAL A	T 3 M	
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,453.375	44.07	54.00	9.93	44.12	Н	1	1.00
8	5,460.000	43.88	54.00	10.12	44.18	Н	359.1	1.00
8	5,582.575	94.05			44.44	Н	6.5	2.00
Tevel in dBµV/m 115.5 107.5 107.5 108 109 100.9 97.5								

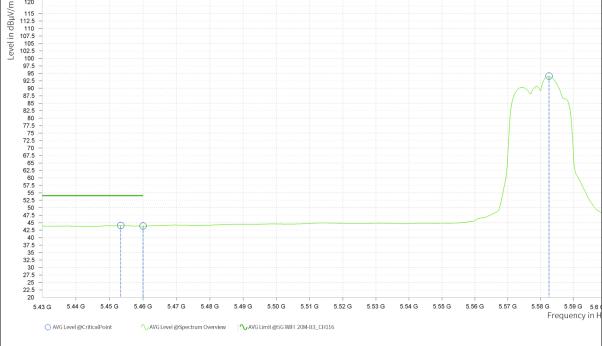




	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]		
8	5,451.675	58.87	74.00	15.13	44.10	V	354.2	1.00		
8	5,460.000	59.18	74.00	14.82	44.18	V	355	2.00		
8	5,581.300	112.15			44.45	V	133.4	2.00		

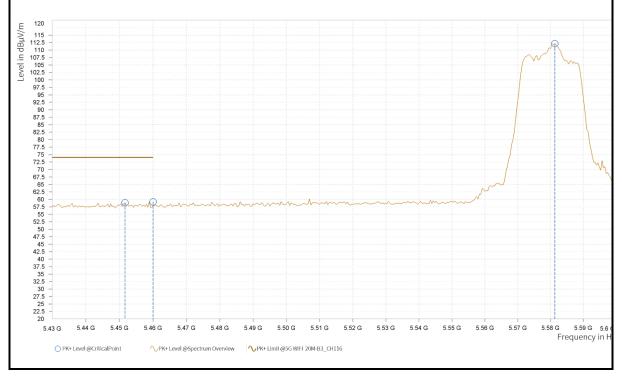



REAU Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]		
8	5,452.525	44.04	54.00	9.96	44.11	V	359.1	1.00		
8	5,460.000	43.91	54.00	10.09	44.17	V	1	1.00		
8	5,580.880	100.37			44.45	V	133.4	2.00		
E 120					•					

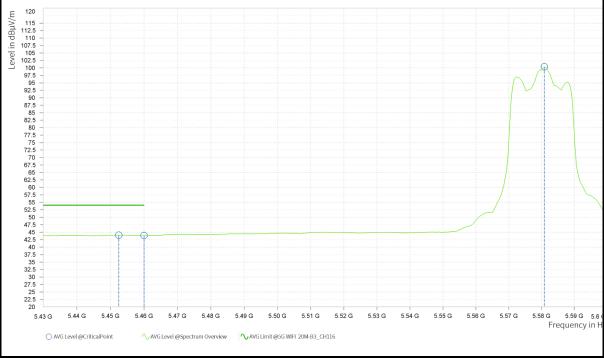


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5580MHz: Fundamental frequency.
- 4. #: Out of restricted band.



CHANNEL	TX Channel 140	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)


Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,701.900	103.74			44.48	Н	36.6	2.00
10	5,725.000	59.23	68.20	8.97	44.48	Н	359	1.00
10	5,725.625	59.23	68.20	8.97	44.48	Н	359	1.00

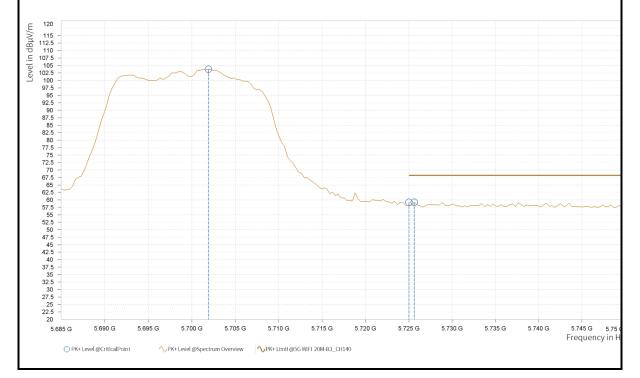



REAU Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]		
10	5,698.650	110.05			44.48	V	128.6	2.00		
10	5,725.000	58.23	68.20	9.97	44.48	V	35.5	2.00		
10	5,727.250	60.04	68.20	8.16	44.48	V	80.9	2.00		
	•	•					•			

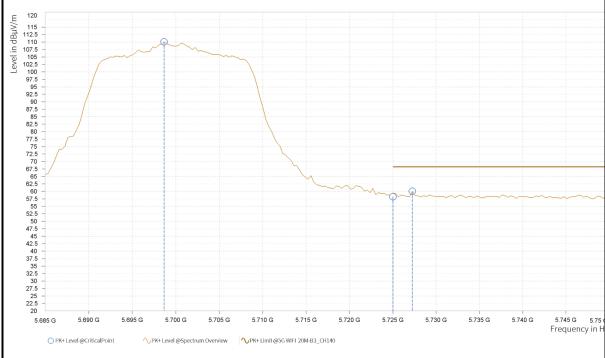


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5700MHz: Fundamental frequency.
- 4. #: Out of restricted band.



CHANNEL	TX Channel 144	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)


Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
9	5,722.000	104.16			44.48	Н	5	2.00
9	5,850.000	58.39	68.20	9.81	44.73	Н	90.3	1.00
9	5,862.000	60.05	68.20	8.15	44.69	Н	288.7	1.00

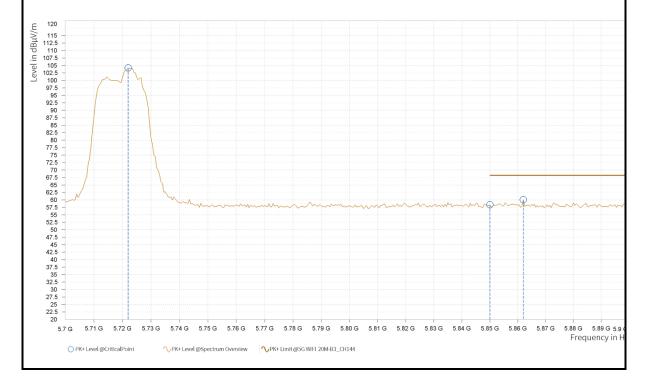



REAU Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]		
9	5,721.500	108.47			44.48	V	276.8	1.00		
9	5,850.000	58.75	68.20	9.45	44.73	V	89.2	1.00		
9	5,858.500	59.27	68.20	8.93	44.70	V	1	1.00		
120 115 112.5 110 107.5 102.5 102.5										

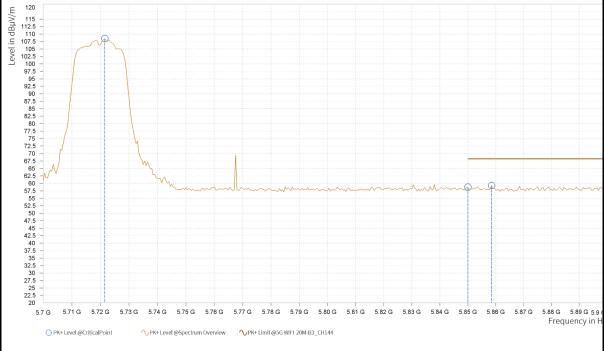


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5720MHz: Fundamental frequency.
- 4. #: Out of restricted band.




802.11ac (40MHz)									
CHANNEL	TX Channel 102	DETECTOR	Peak (PK)						
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)						
ANITEN	INA DOLADITY & TECT DI	CTANCE, HODIZONTAL	AT 2 M						

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,456.000	59.35	74.00	14.65	44.15	Н	3.4	2.00
5	5,460.000	57.95	74.00	16.05	44.20	Н	1	1.00
5	5,521.000	100.60			44.71	Н	126.2	2.00

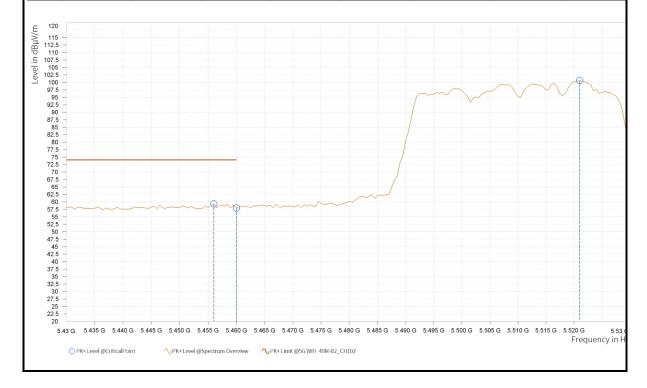




	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Rg Frequency [MHz] AVG Level [dBμV/m] AVG Limit [dBμV/m] AVG Margin [dB] Polarization Azimuth Height [m]								
5	5,459.500	44.20	54.00	9.80	44.19	Н	122.6	2.00	
5	5,460.000	44.24	54.00	9.76	44.20	Н	122.6	2.00	
5	5,511.500	90.73			44.76	Н	122.6	2.00	

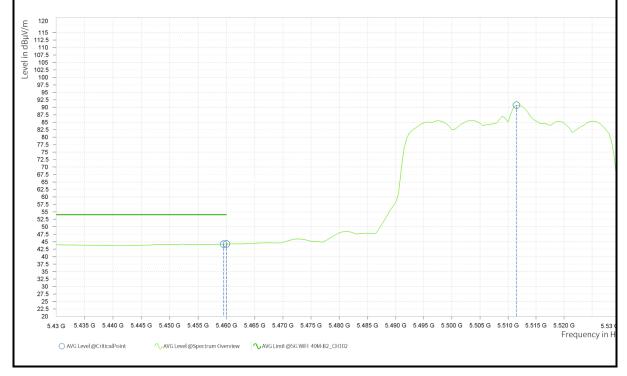




	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Rg	Rg Frequency [MHz] PK+ Level [dBμV/m] PK+ Limit [dBμV/m] PK+ Margin [dB] Polarization Azimuth Height [m]									
5	5,450.500	59.75	74.00	14.25	44.09	V	359.1	1.00		
5	5,460.000	58.77	74.00	15.23	44.20	V	89.2	1.00		
5	5,511.500	104.48			44.76	V	317.6	2.00		

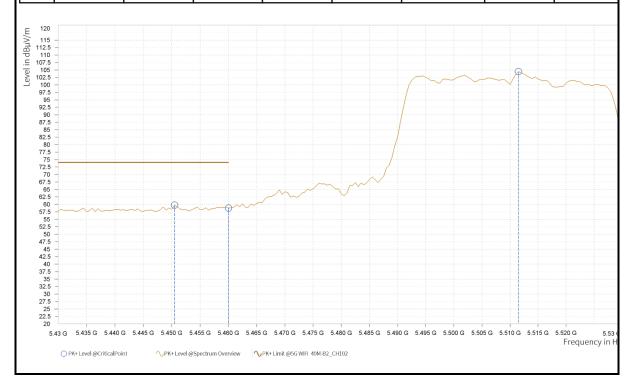



TAS Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Rg Frequency [MHz] AVG Level [dBμV/m] AVG Limit [dBμV/m] AVG Margin [dB] Correction [dB] Polarization Azimuth [deg] Antenna Height [m]								
5	5,459.500	45.91	54.00	8.09	44.19	V	116.6	2.00	
5	5,460.000	46.41	54.00	7.59	44.20	V	116.6	2.00	
5	5,511.500	92.82			44.76	V	116.6	2.00	

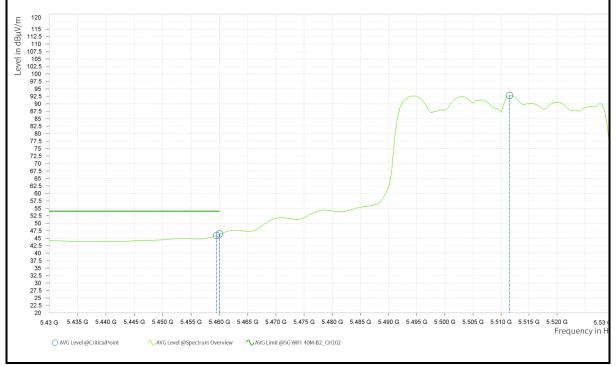


- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5510MHz: Fundamental frequency.
- 4. #: Out of restricted band.




CHANNEL	TX Channel 110	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,455.375	58.87	74.00	15.13	44.14	Н	355.5	2.00
6	5,460.000	57.82	74.00	16.18	44.19	Н	359	1.00
6	5,552.160	101.59			44.55	Н	359	2.00

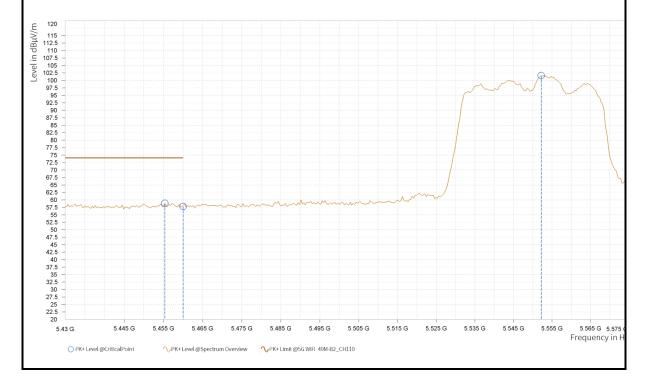




	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	
6	5,451.750	44.10	54.00	9.90	44.10	Н	267.4	2.00	
6	5,460.000	44.07	54.00	9.93	44.19	Н	187.1	1.00	
6	5,552.888	89.99			44.54	Н	0.9	2.00	
€ 120									

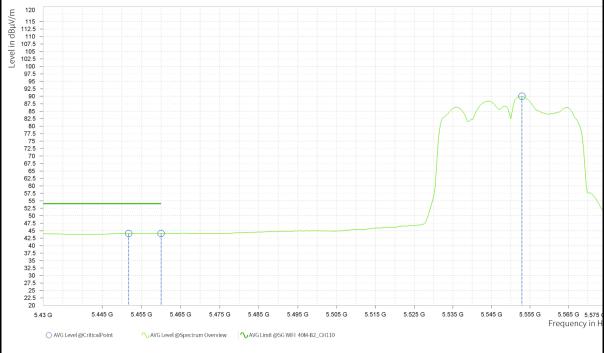




	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Rg Frequency [MHz] PK+ Level [dBμV/m] PK+ Limit [dBμV/m] PK+ Margin [dB] Polarization Azimuth Height [m]								
6	5,433.988	58.64	74.00	15.36	43.90	V	266.1	2.00	
6	5,460.000	57.41	74.00	16.59	44.19	V	186	1.00	
6	5,553.250	104.97			44.54	V	281.6	1.00	

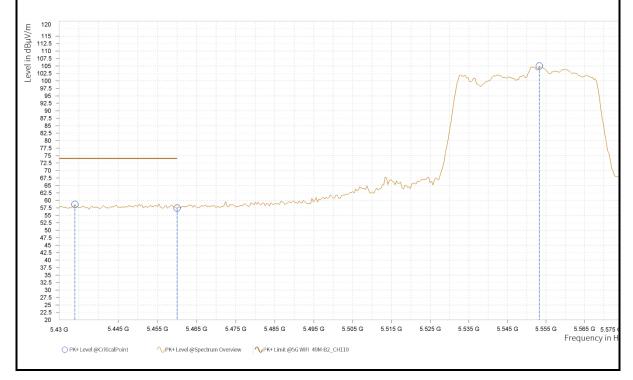



REAU Test Report No.: PSU-QBJ2507100110RF03

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Rg Frequency [MHz] AVG Level [dBμV/m] AVG Limit [dBμV/m] Correction [dB] Polarization Azimuth [deg] Antenna Height [m]								
6	5,452.475	44.40	54.00	9.60	44.11	V	82	2.00	
6	5,460.000	44.13	54.00	9.87	44.19	V	82	2.00	
6	5,548.900	95.56			44.56	V	129.8	2.00	

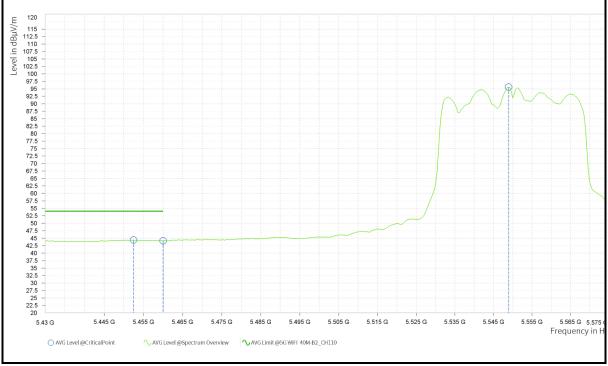

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 2. Margin value = Limit value- Emission level.
- 3. 5500MHz: Fundamental frequency.
- 4. #: Out of restricted band.



CHANNEL	TX Channel 134	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
8	5,671.500	99.73			44.42	Н	0.9	2.00
8	5,725.000	58.41	68.20	9.79	44.48	Н	86.8	1.00
8	5,734.000	59.24	68.20	8.96	44.49	Н	41.4	2.00

