





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,466.400	110.22			37.85	V	122.6	2.00
2	2,483.500	67.46	74.00	6.54	37.88	V	190.7	1.00
2	2,484.160	67.24	74.00	6.76	37.88	V	190.7	1.00



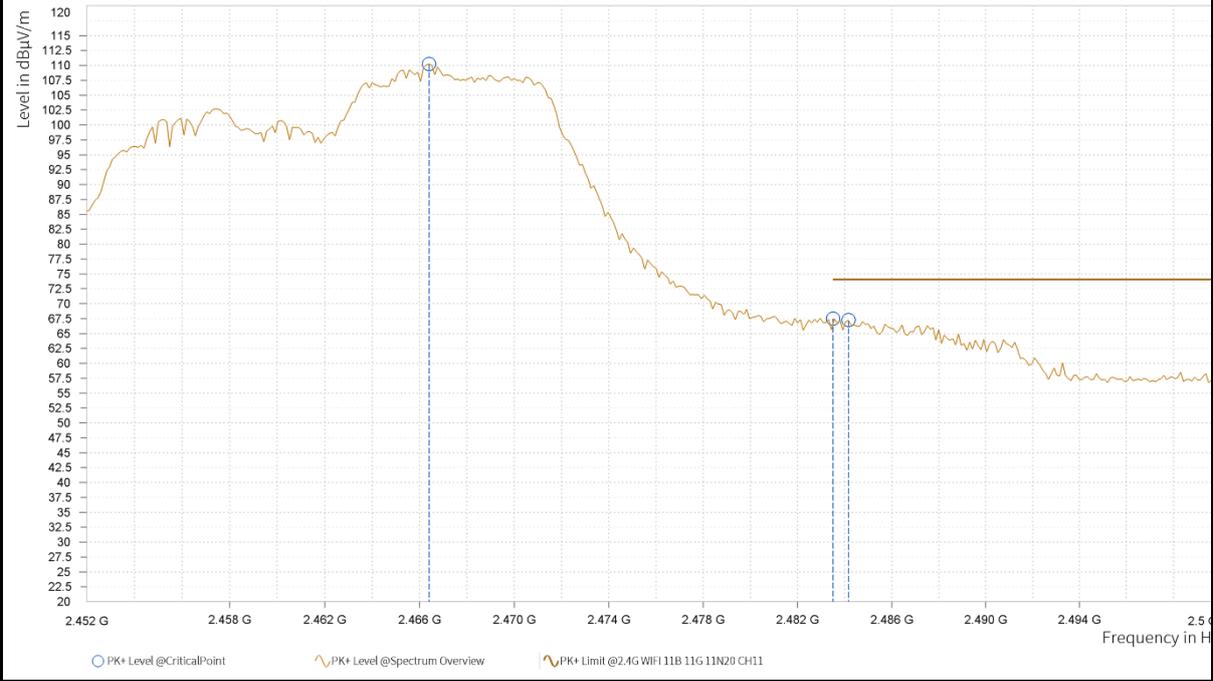

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,466.640	92.05			37.85	V	120.2	2.00
2	2,483.500	43.51	54.00	10.49	37.88	V	267.3	2.00
2	2,484.400	43.67	54.00	10.33	37.88	V	192	1.00

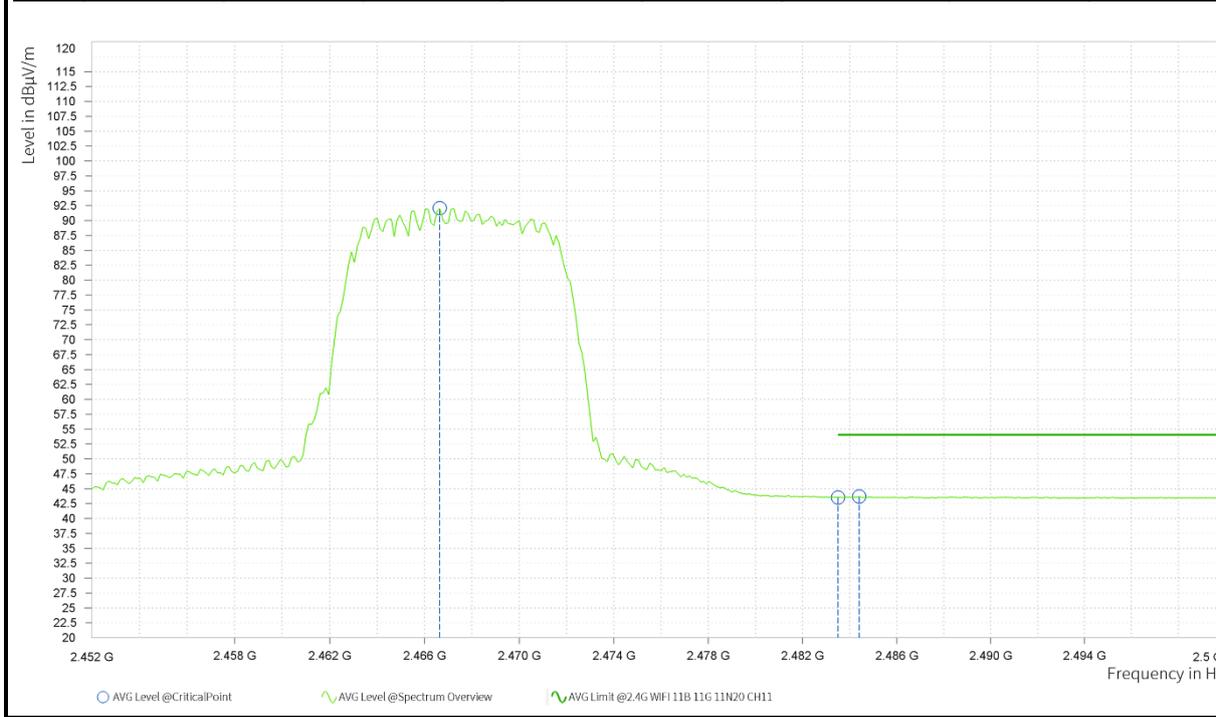

REMARKS:

- 16. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
- 17. Margin value = Limit value- Emission level.
- 18. 2462MHz: Fundamental frequency.



BELOW 1GHz WORST-CASE DATA

ANT 10:


BT-LE_2M			
CHANNEL	TX Channel 19	ODETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	37.518	27.22	40.00	12.78	-10.49	H	318.4	1.00	120.000
1	51.292	24.01	40.00	15.99	-8.98	H	318.4	1.00	120.000
1	107.309	17.89	43.50	25.61	-11.08	H	0.9	2.00	120.000
1	238.356	16.79	46.00	29.21	-8.55	H	359.1	1.00	120.000
1	431.047	20.54	46.00	25.46	-2.24	H	0.9	2.00	120.000
1	742.902	24.71	46.00	21.29	0.06	H	359.1	1.00	120.000

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

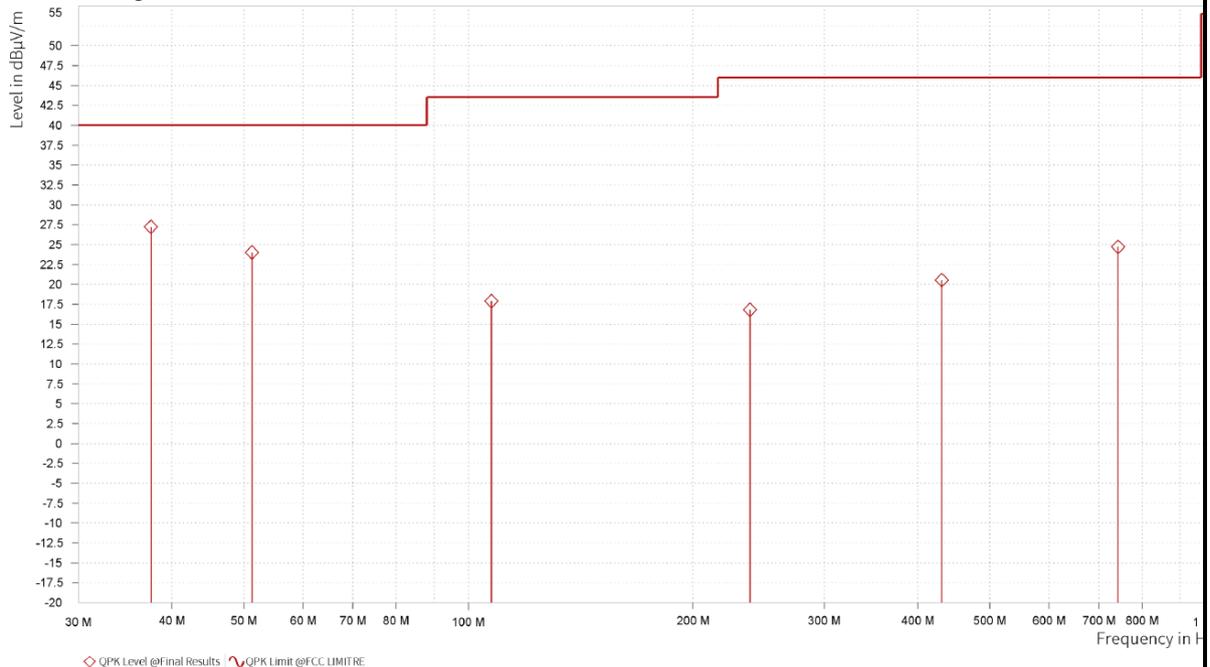




CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	33.492	25.95	40.00	14.05	-13.76	V	359.1	1.00	120.000
1	74.863	19.71	40.00	20.29	-16.50	V	4.8	1.00	120.000
1	118.173	19.36	43.50	24.14	-11.67	V	320.7	1.00	120.000
1	226.619	15.14	46.00	30.86	-9.57	V	320.7	1.00	120.000
1	396.515	18.95	46.00	27.05	-3.19	V	39.2	2.00	120.000
1	758.713	24.15	46.00	21.85	0.34	V	39.2	2.00	120.000

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

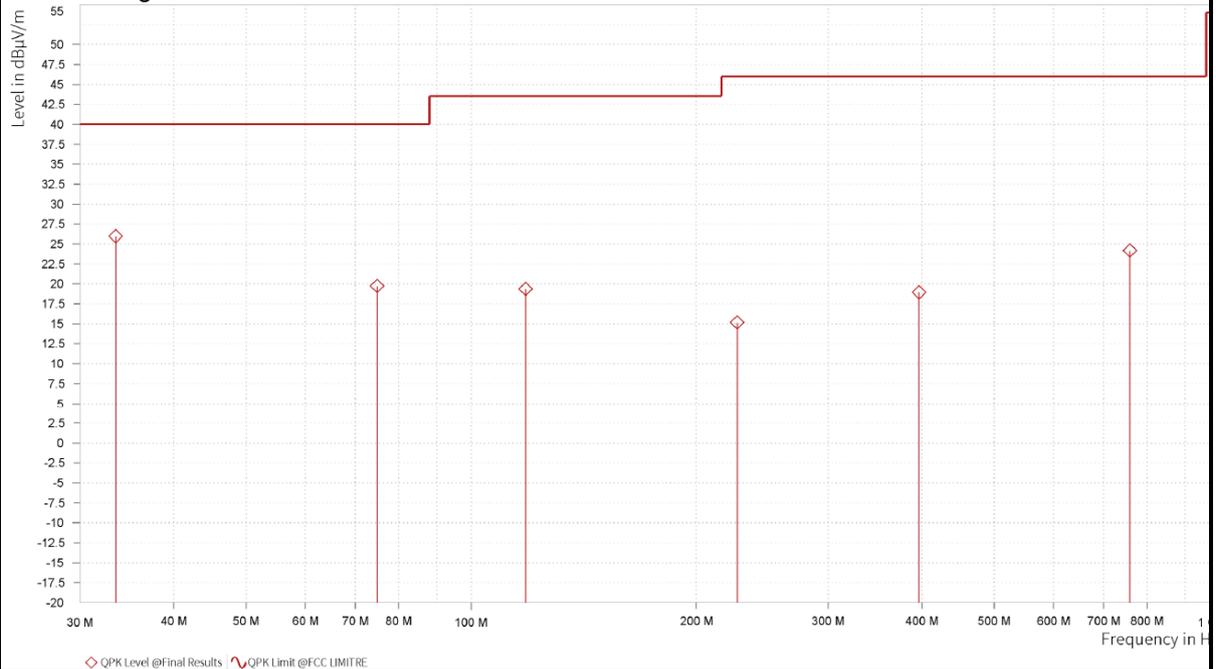





ABOVE 1GHz TEST DATA

Note:

1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.
2. All other emissions were greater than 20dB below the limit was not recorded

ANT 7:

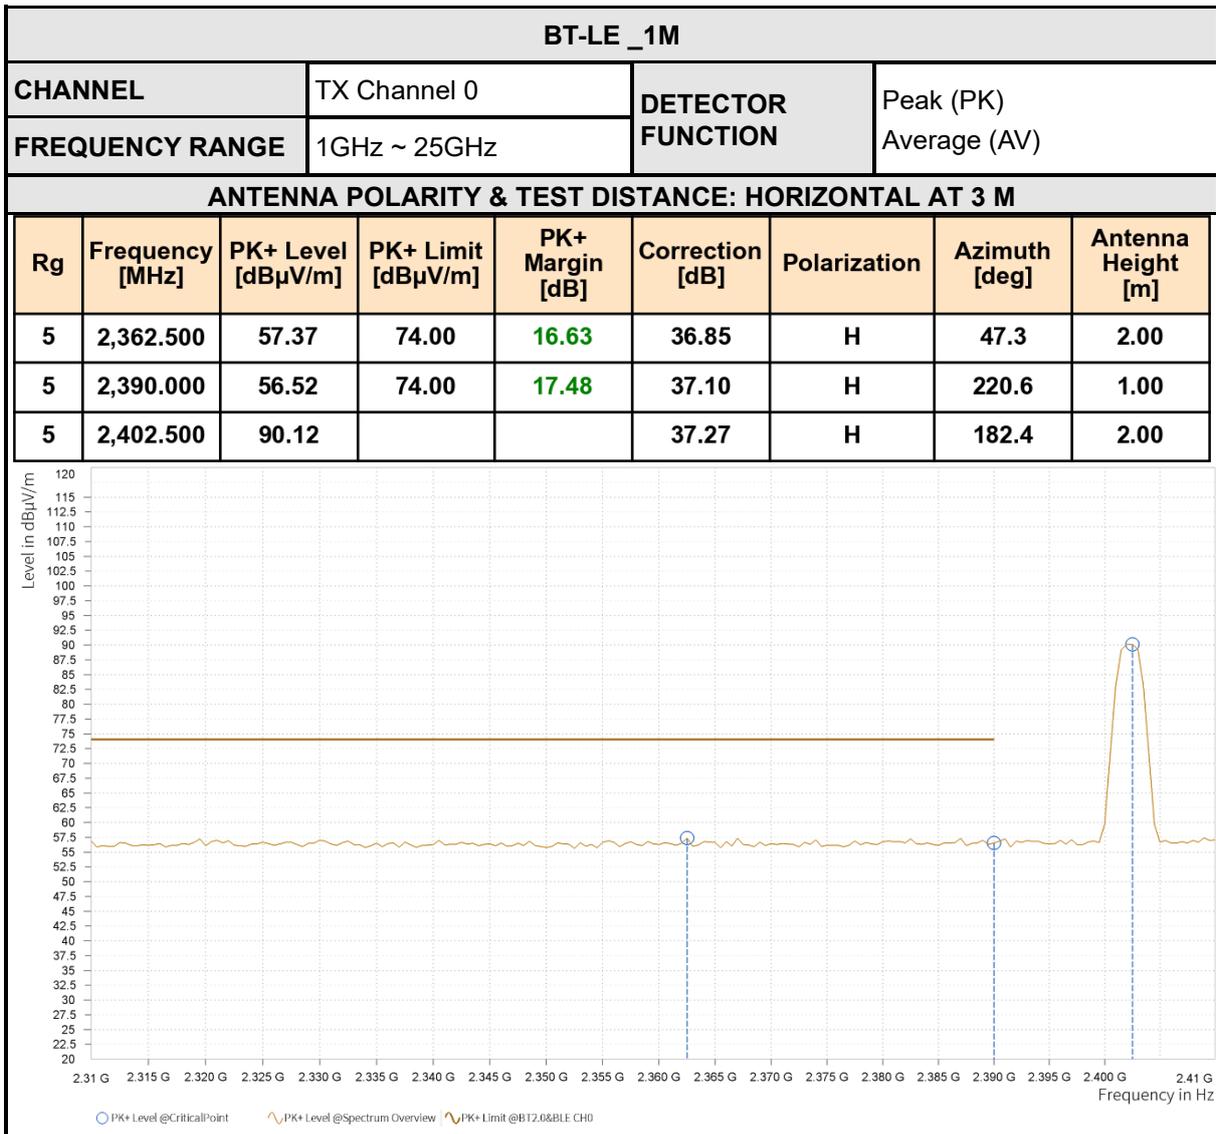


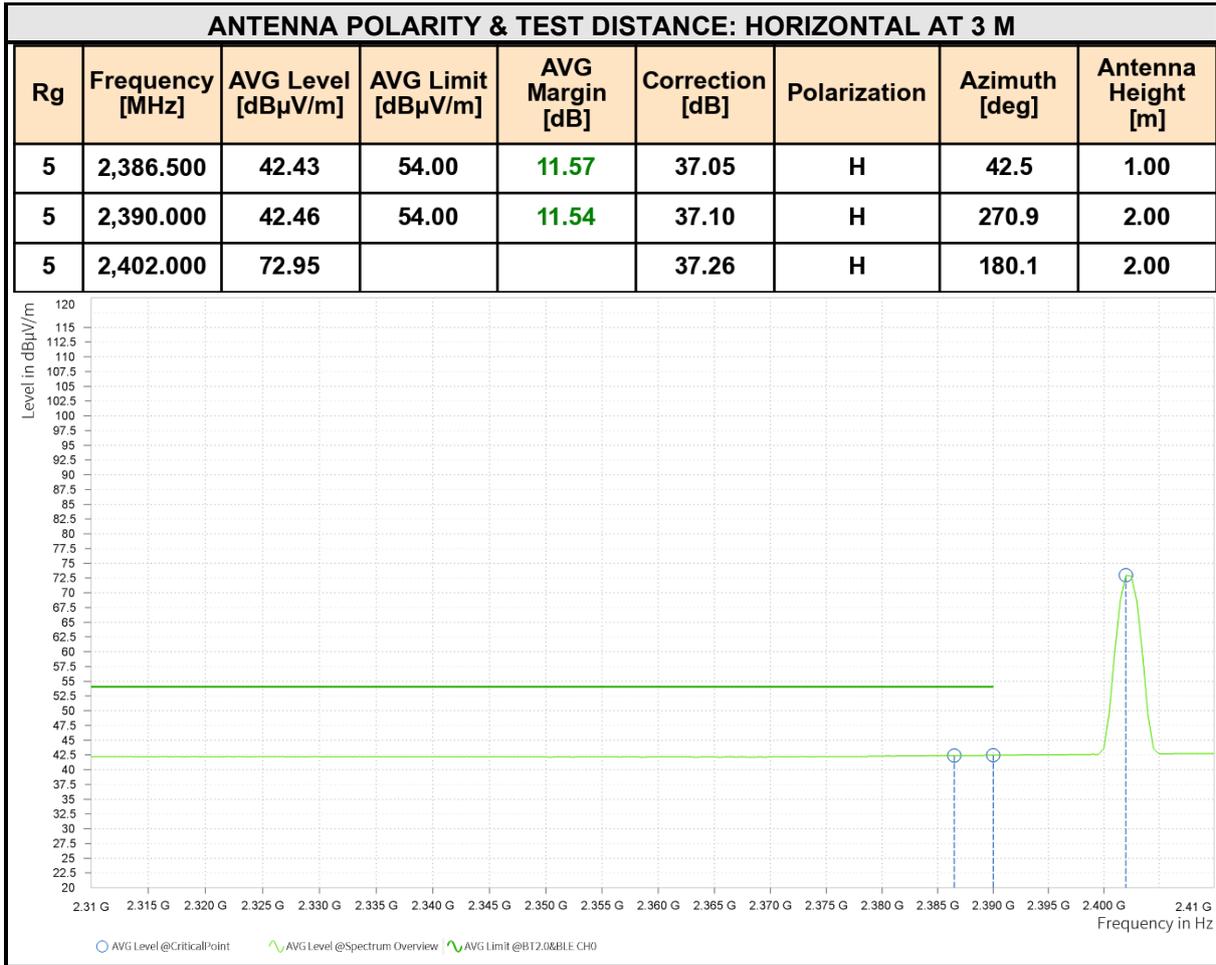




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,337.500	57.67	74.00	16.33	36.90	V	1	1.00
5	2,390.000	56.36	74.00	17.64	37.10	V	268.4	1.00
5	2,402.500	92.91			37.27	V	143	2.00

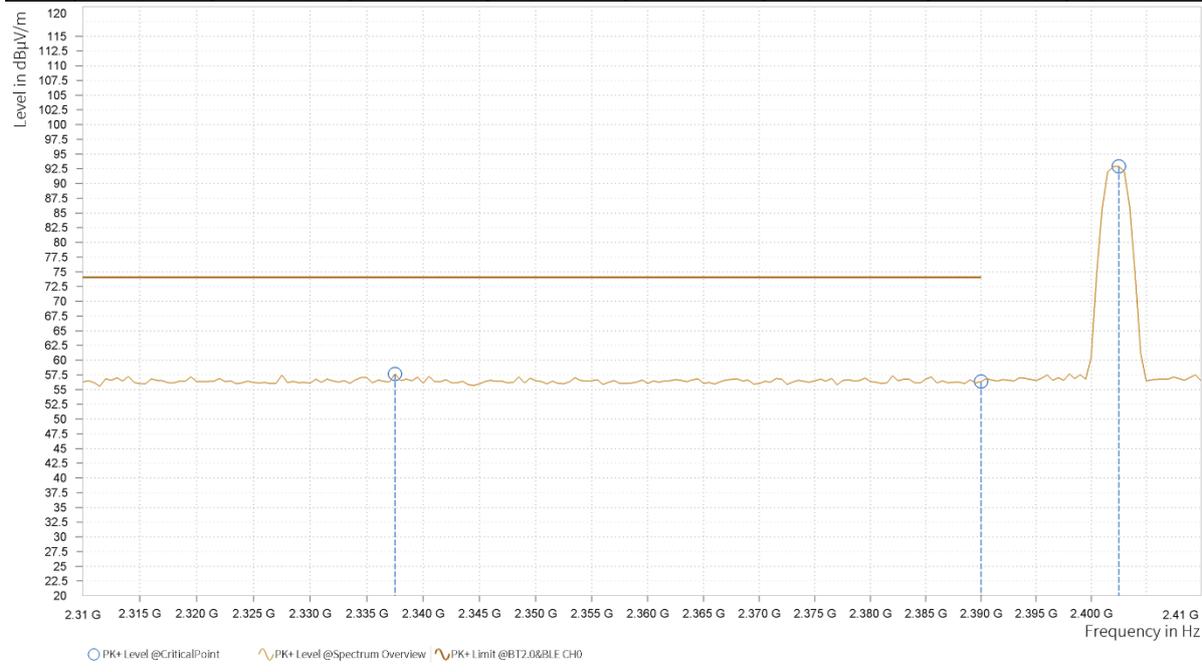

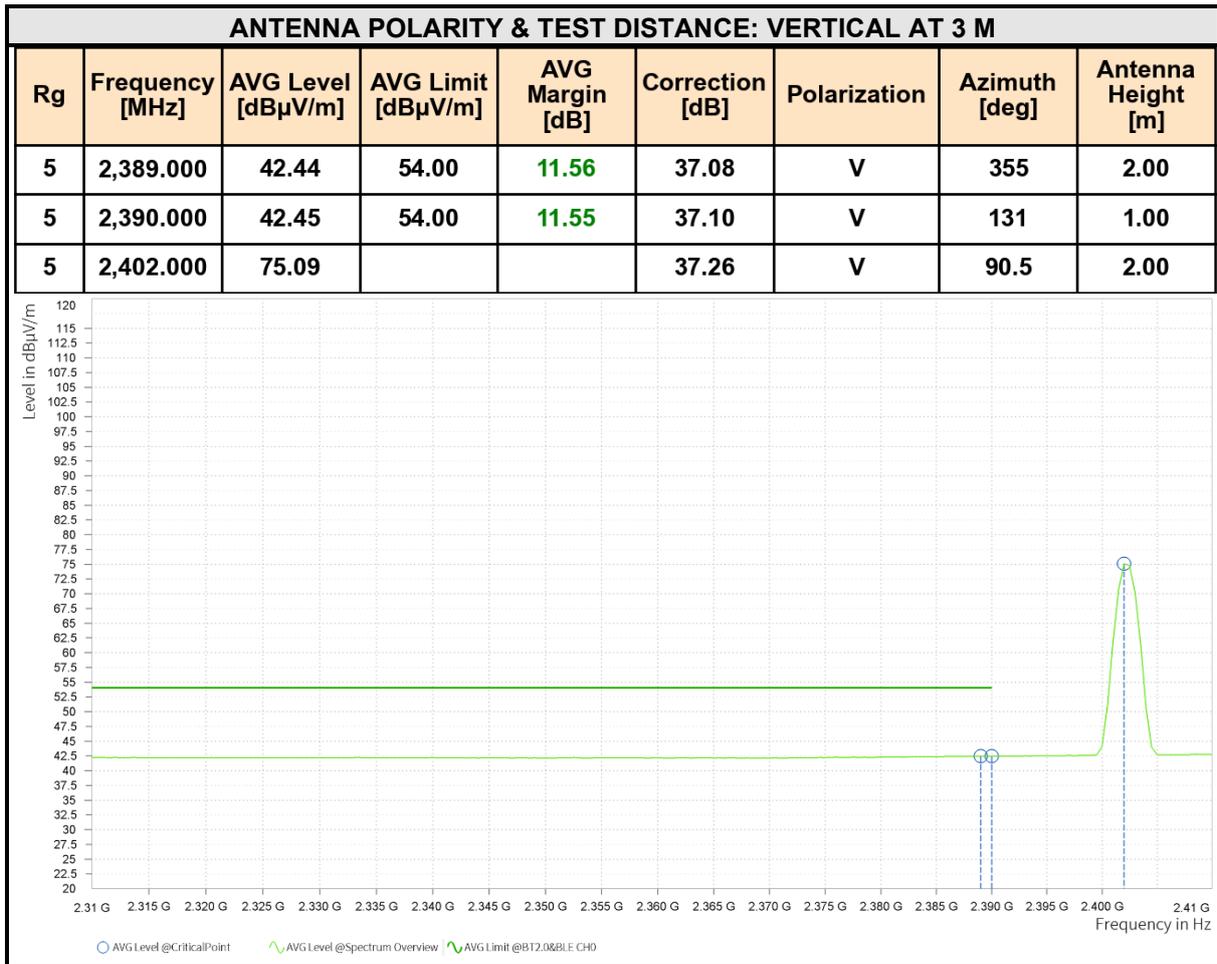

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2402MHz: Fundamental frequency.




CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.51	74.00	24.49	38.65	54.00	15.35	14.77	H	91.3	1.00
2	7,320.000	55.23	74.00	18.77	44.68	54.00	9.32	21.11	H	17	2.00

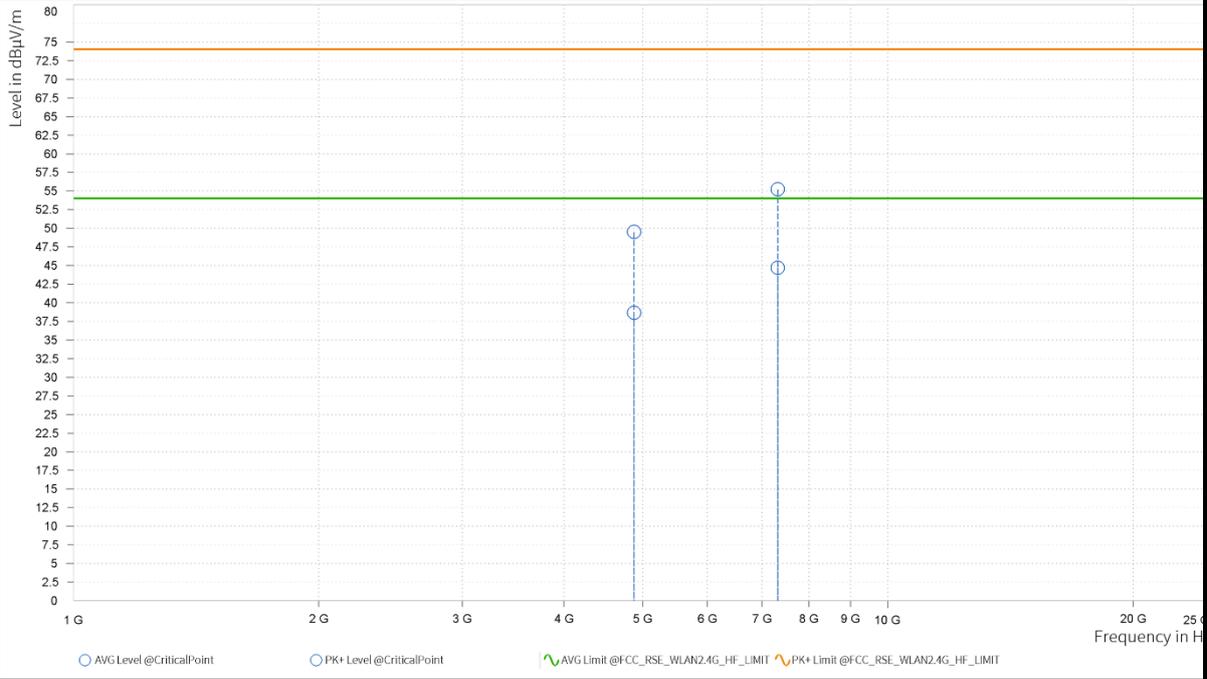


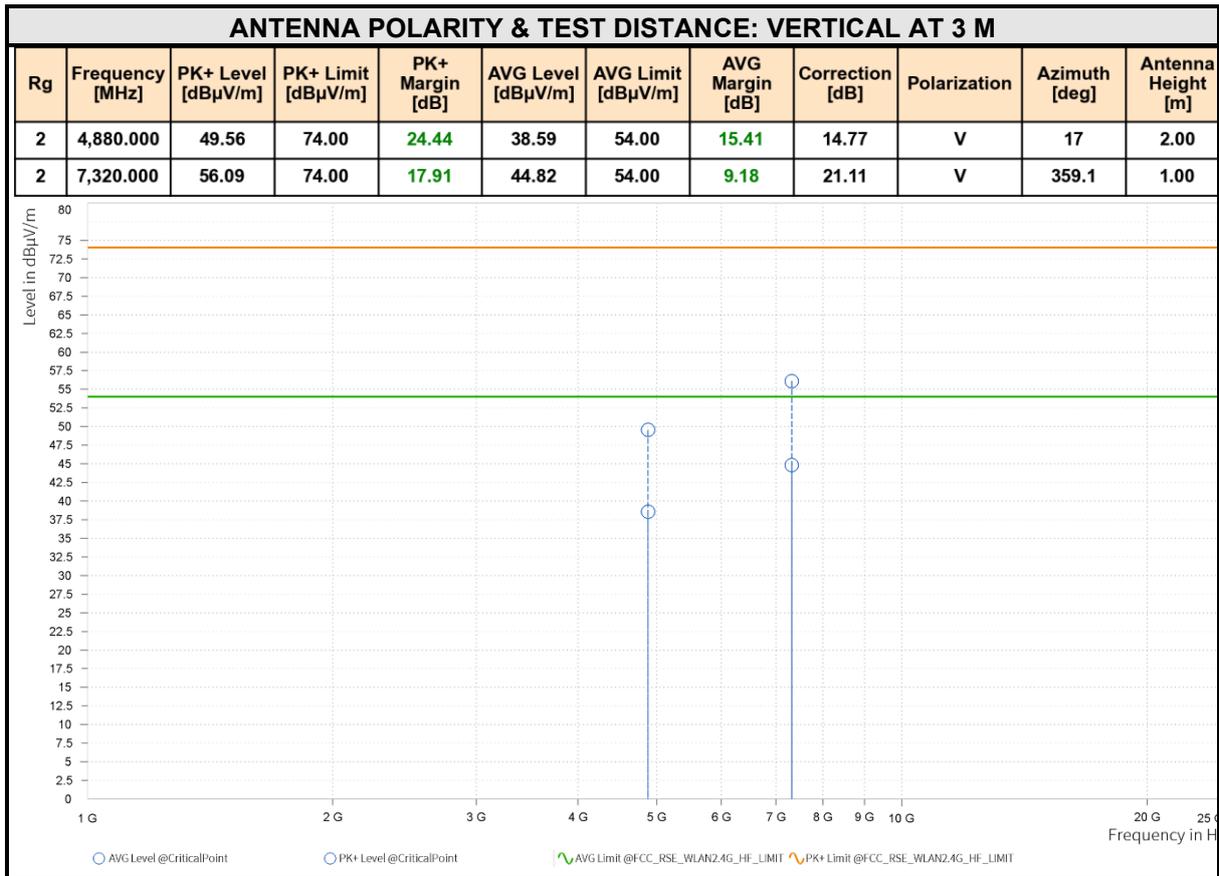



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2440MHz: Fundamental frequency.

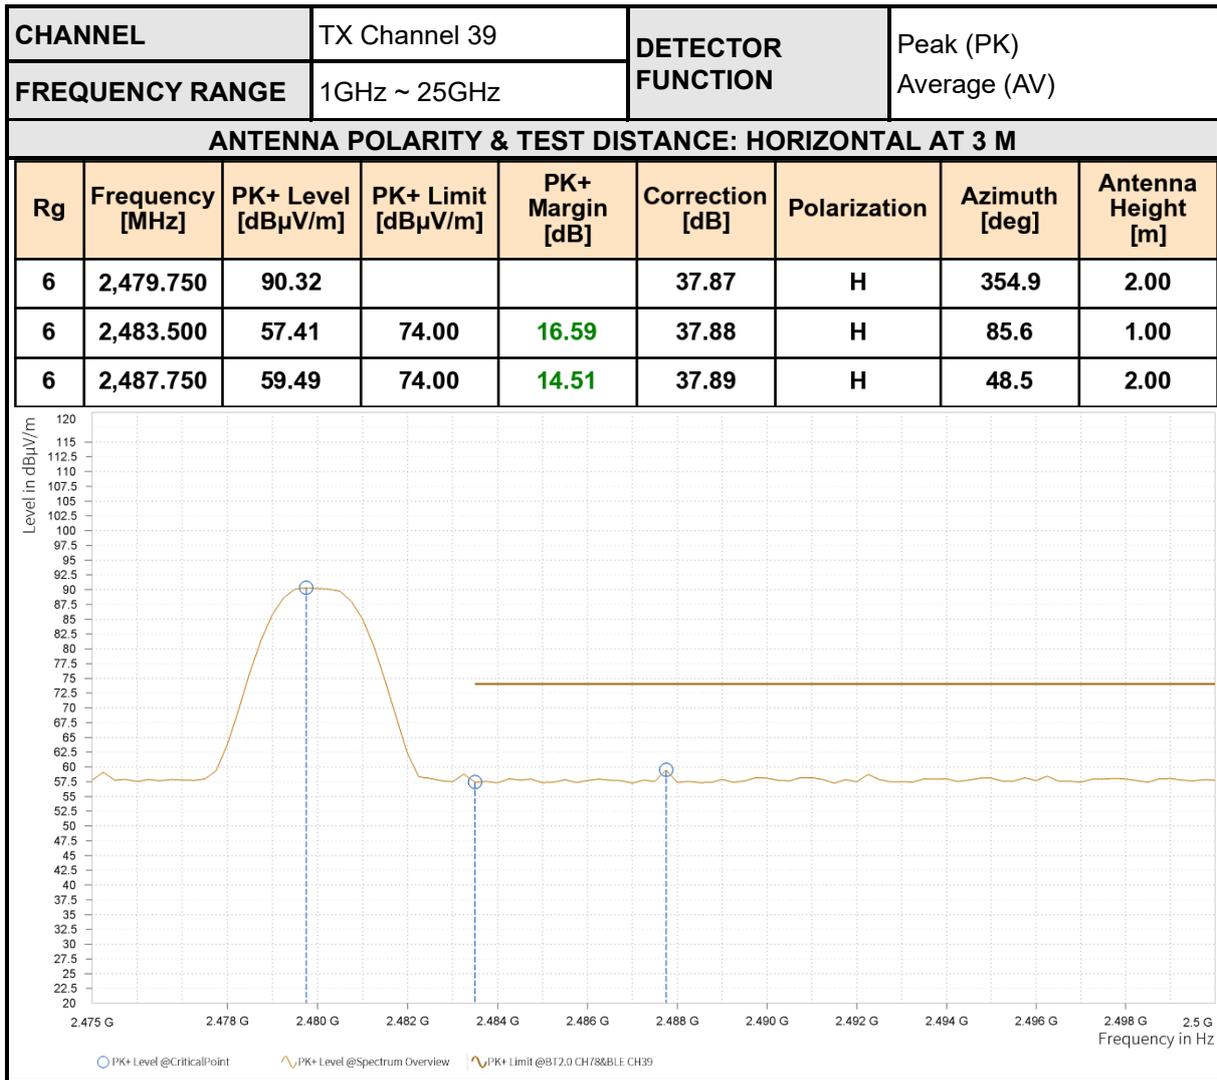

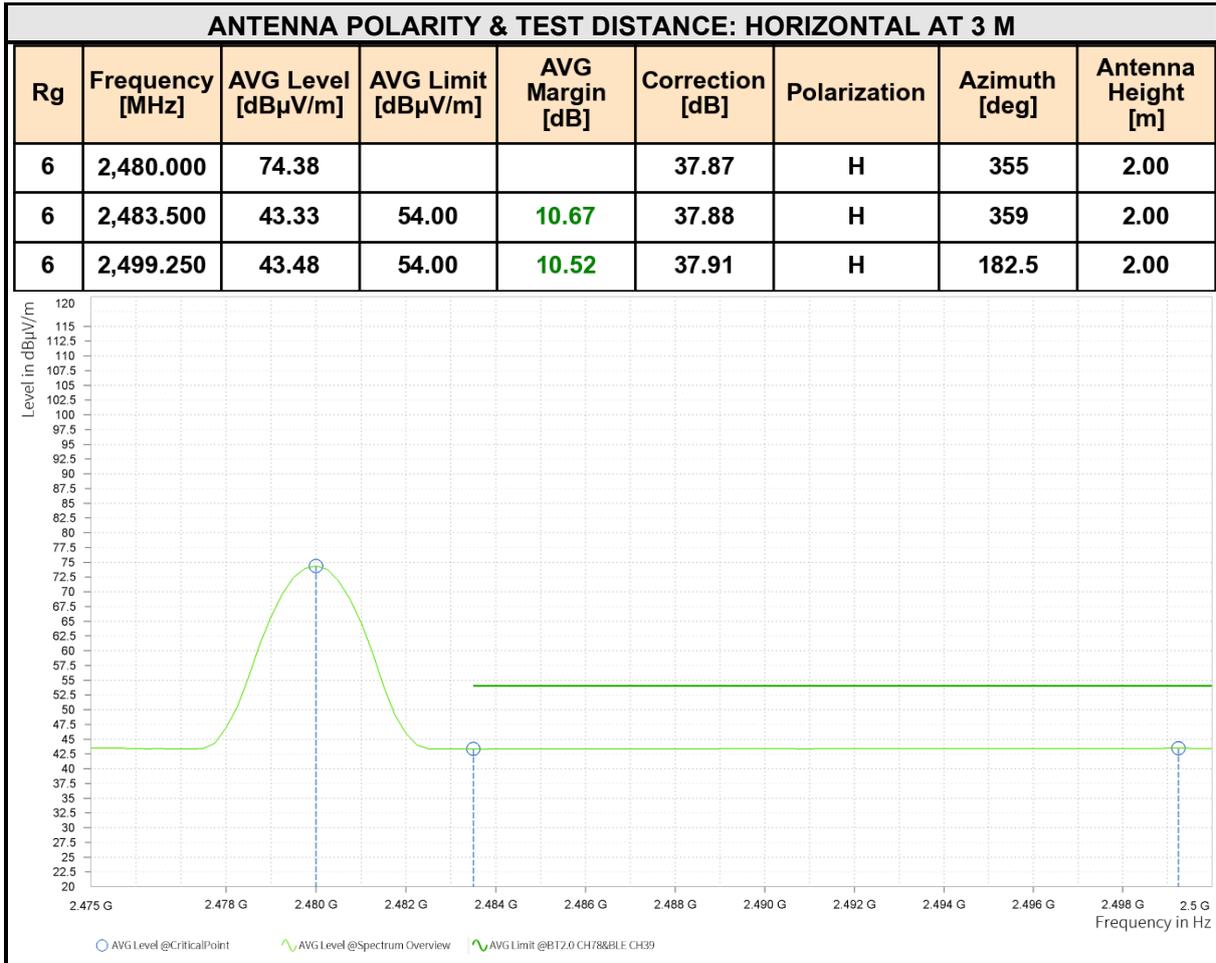


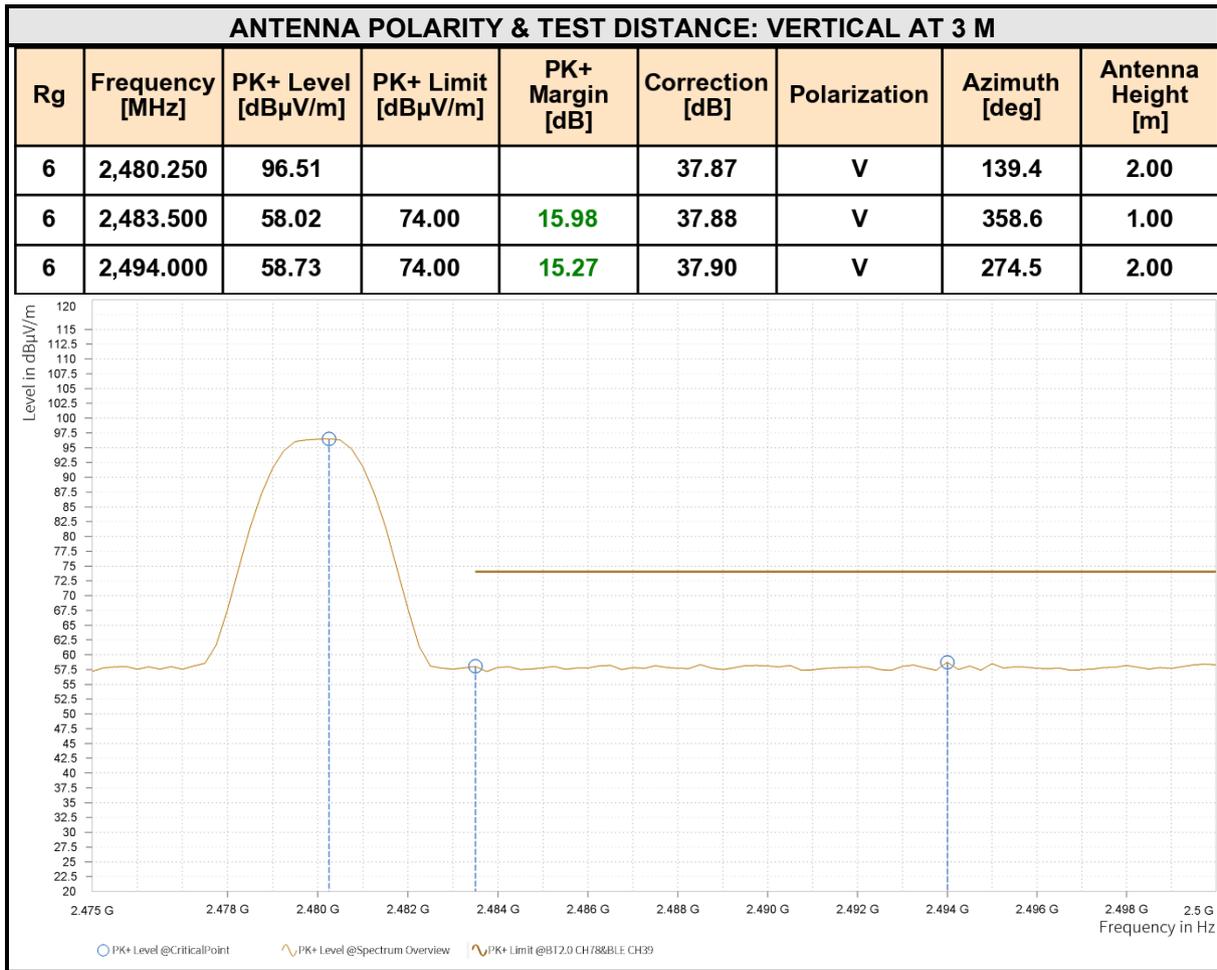


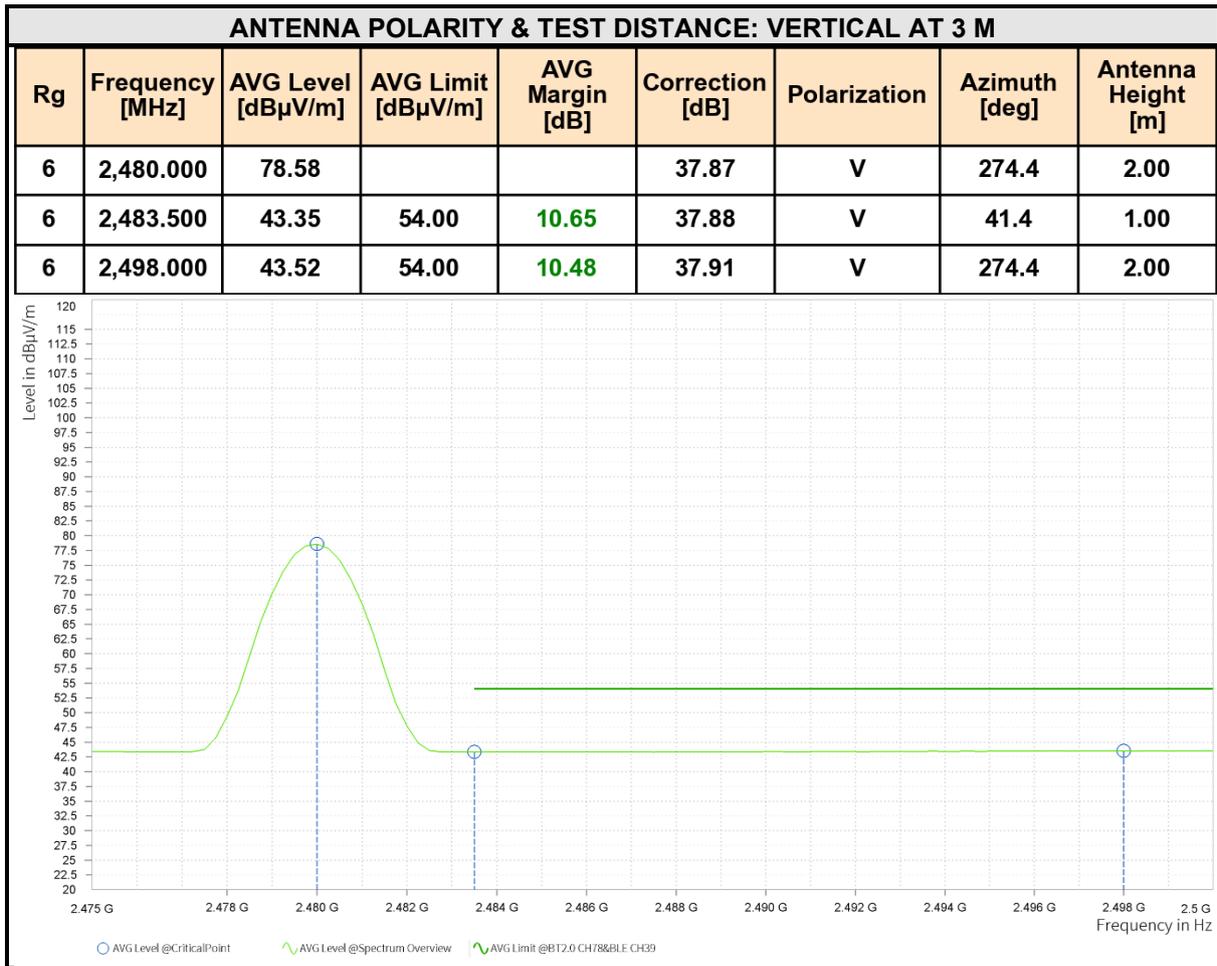



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2480MHz: Fundamental frequency.

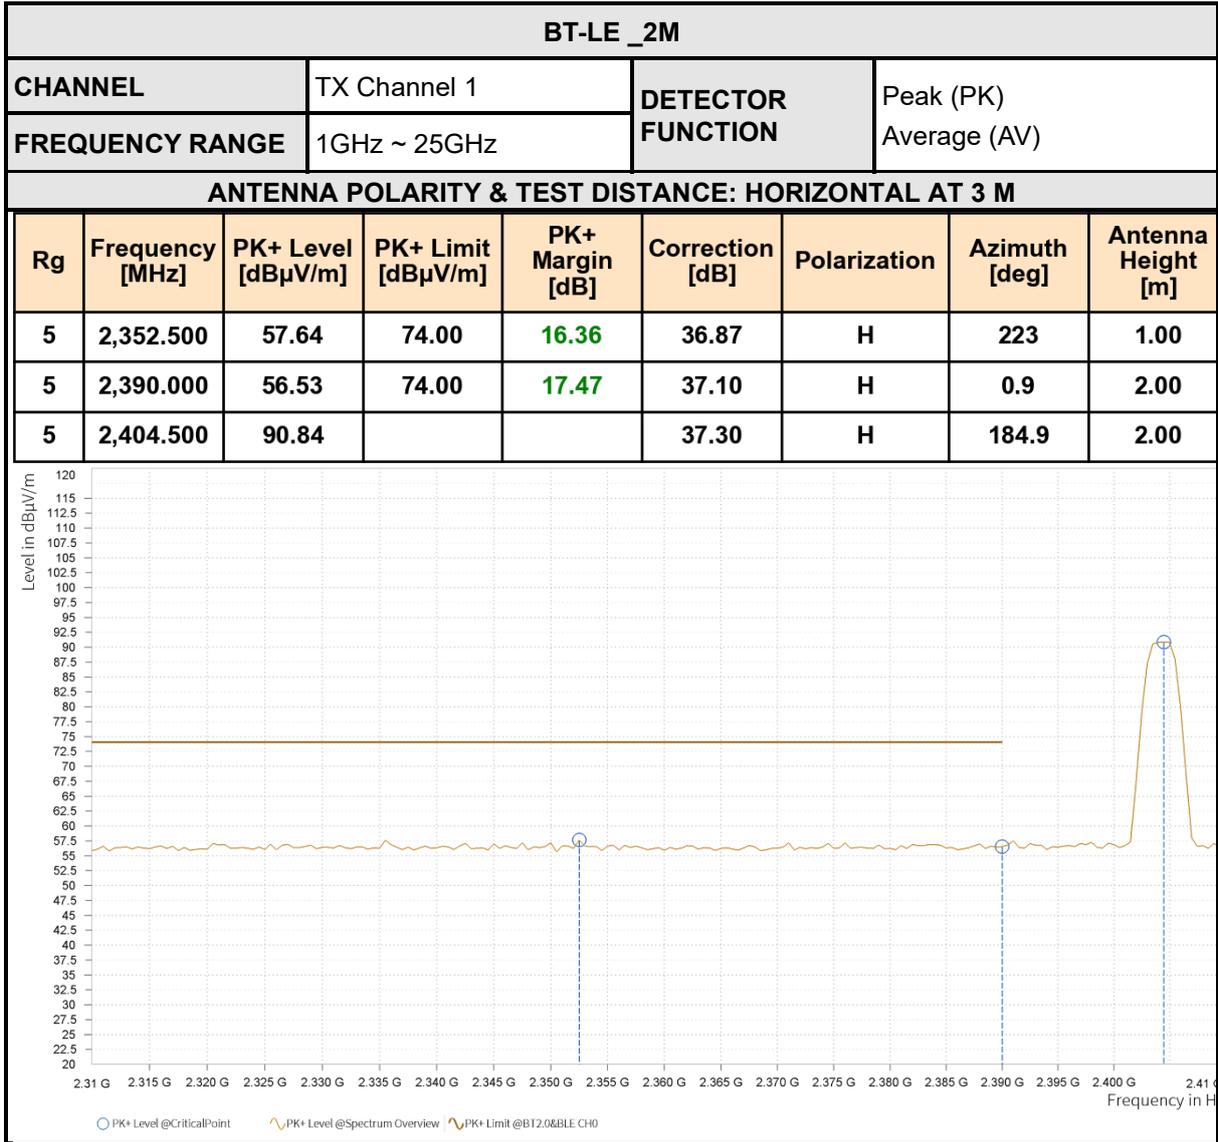

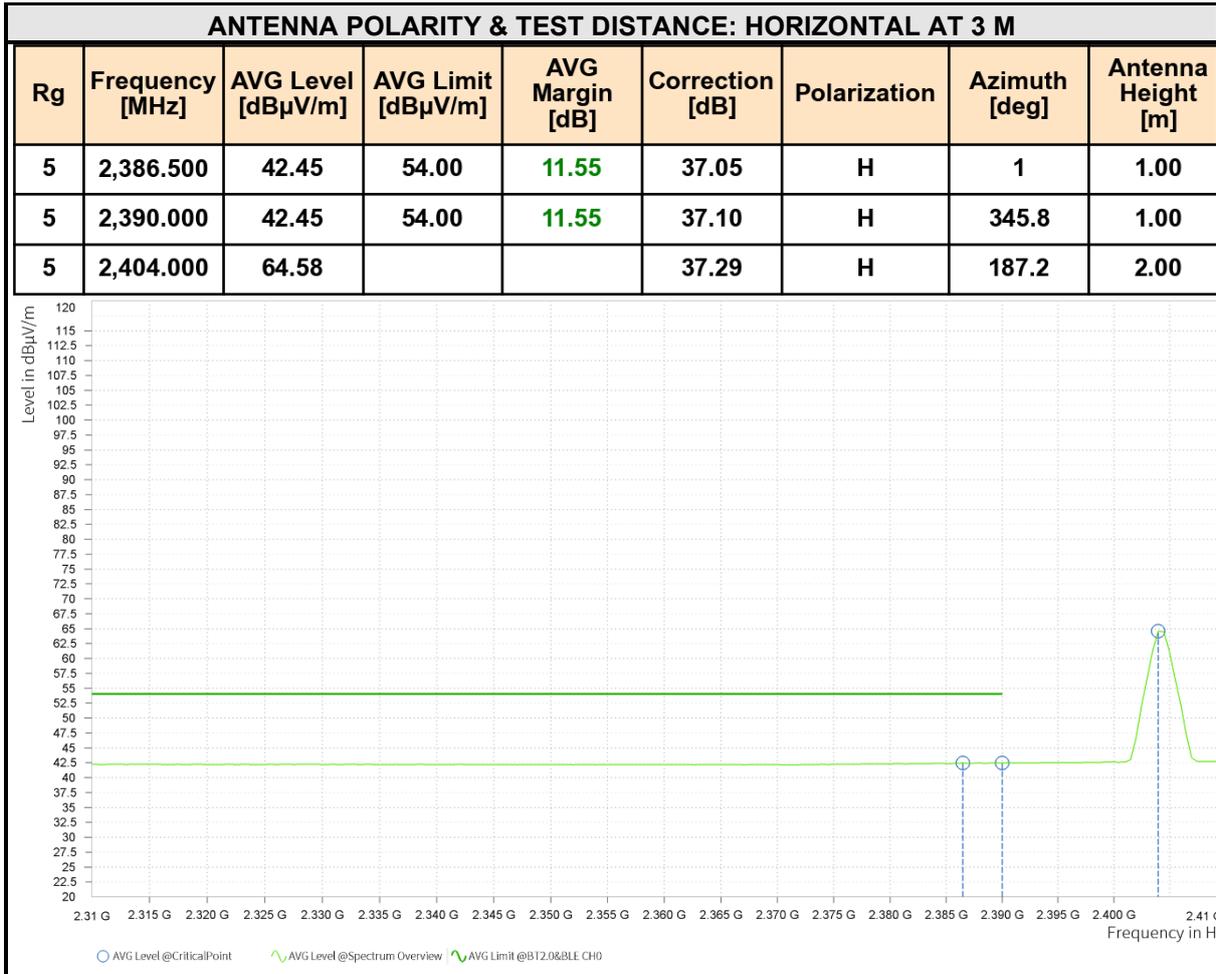

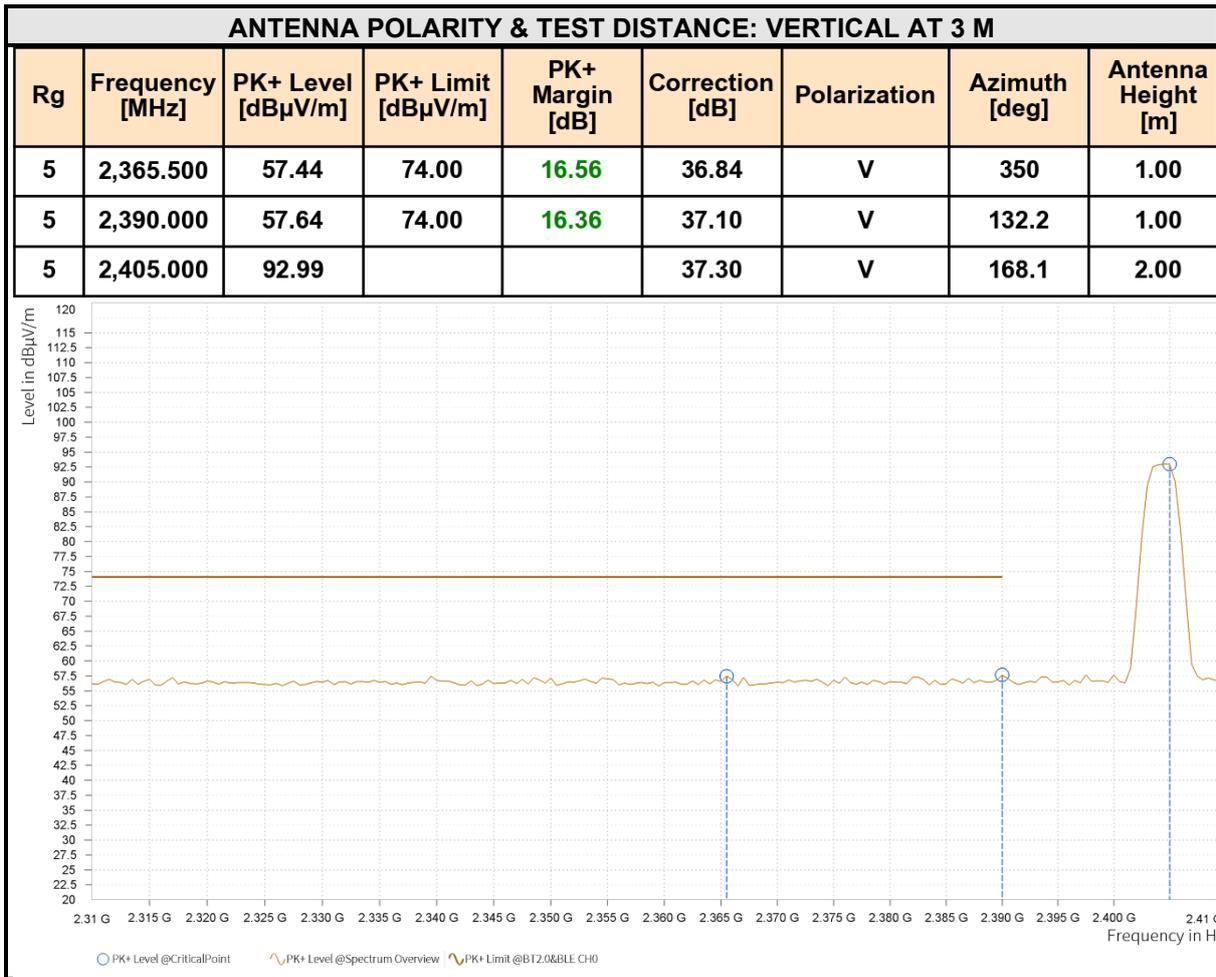

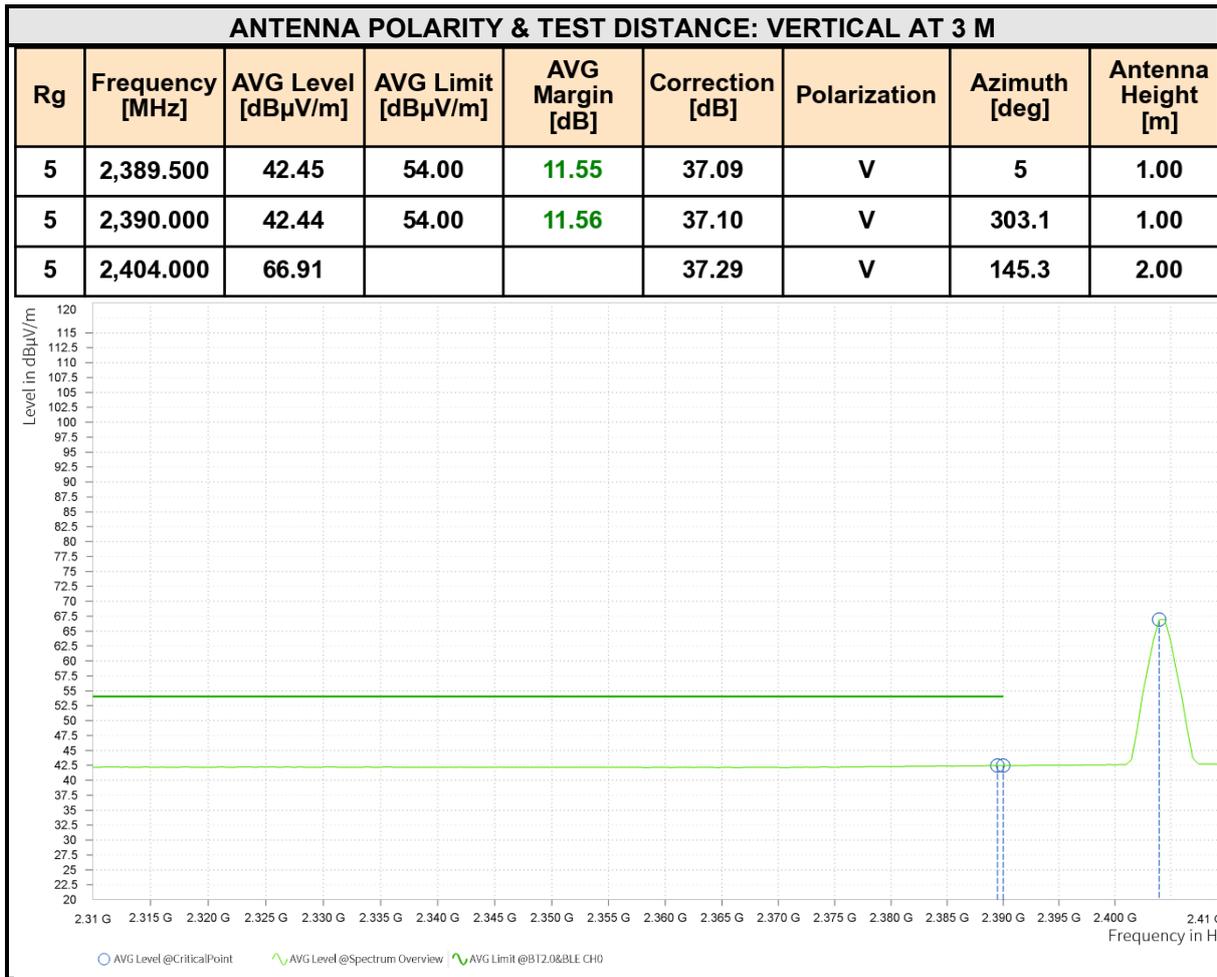

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2404MHz: Fundamental frequency.




CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.42	74.00	24.58	38.54	54.00	15.46	14.77	H	359	2.00
2	7,320.000	55.07	74.00	18.93	44.82	54.00	9.18	21.11	H	17	2.00

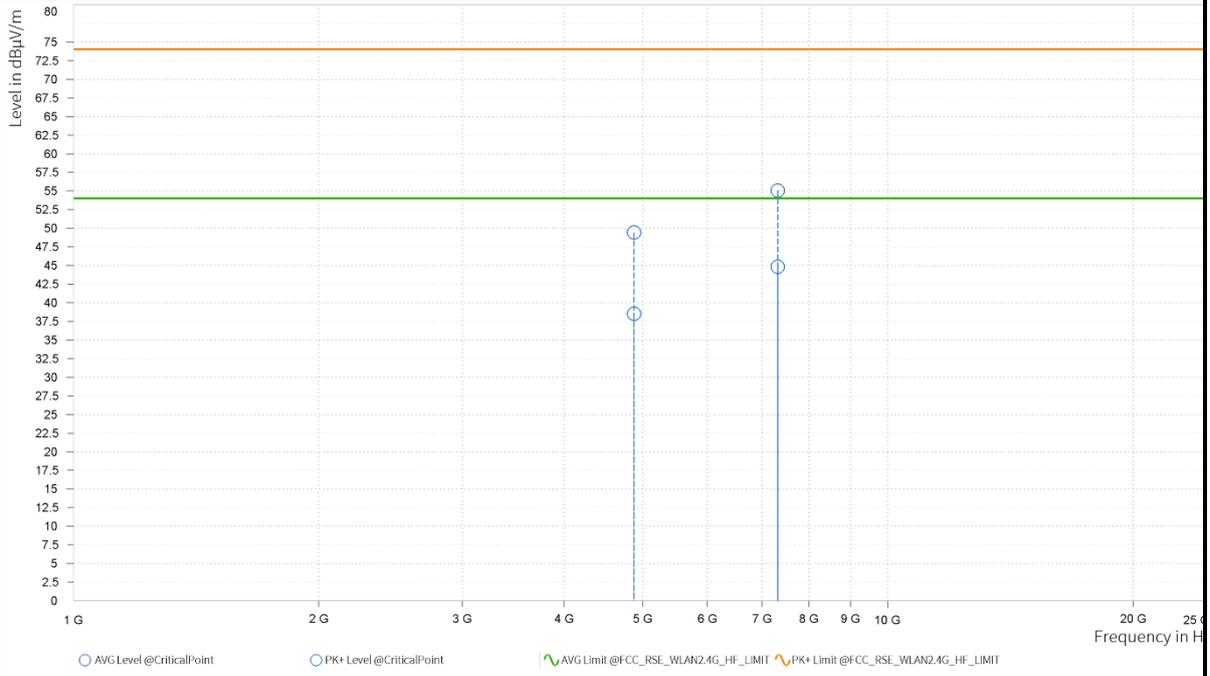

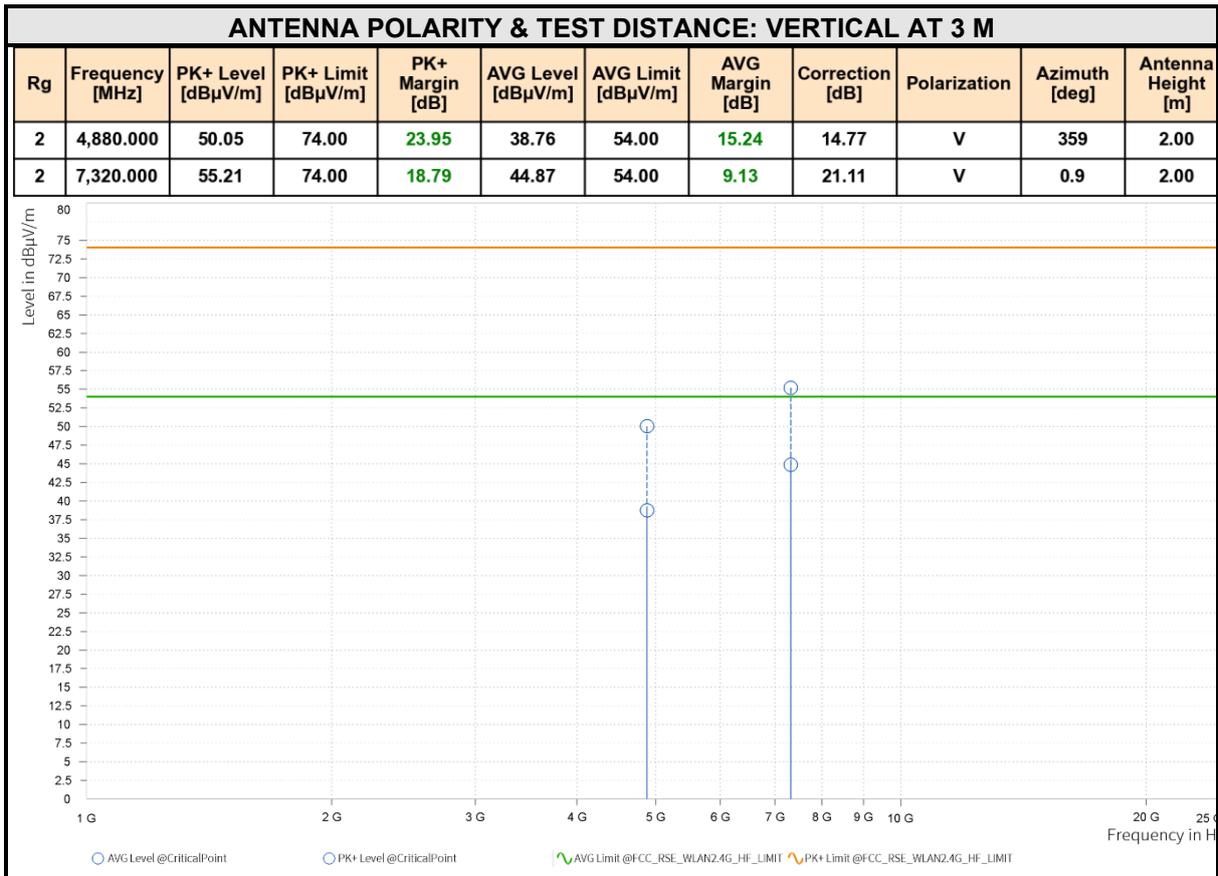

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor.
2. Margin value = Limit value–Emission level.
3. 2440MHz: Fundamental frequency.




CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,477.750	92.70			37.87	H	140.6	2.00
6	2,483.500	57.99	74.00	16.01	37.88	H	40.2	1.00
6	2,489.500	58.75	74.00	15.25	37.89	H	217.1	1.00

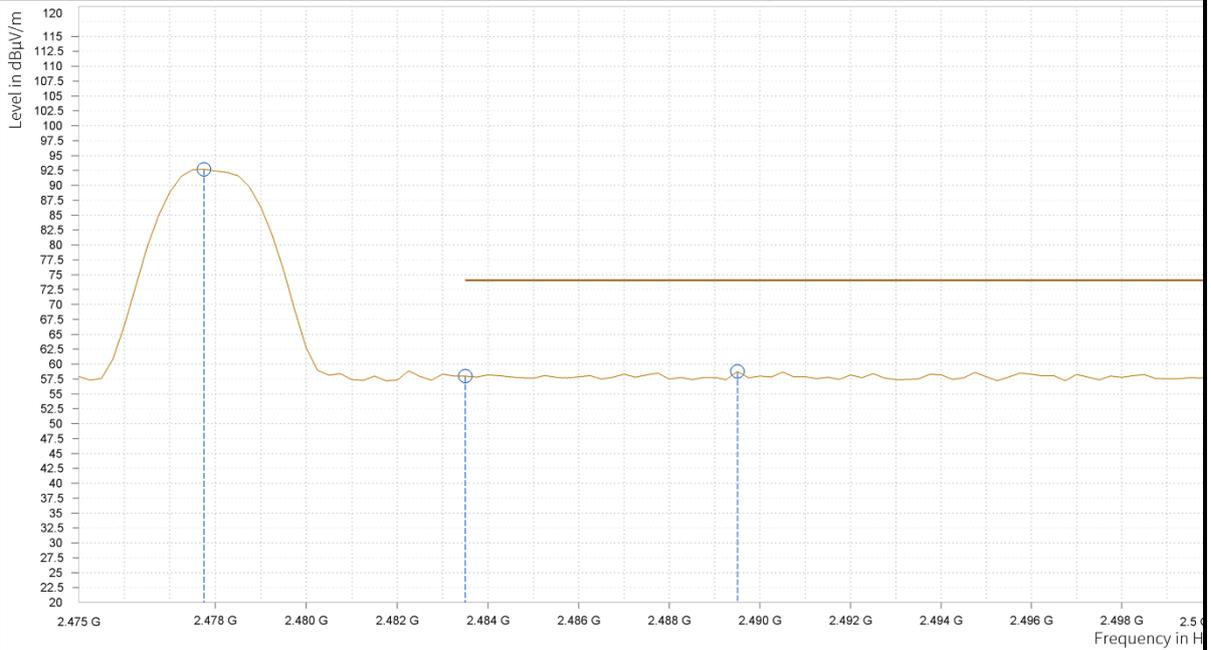


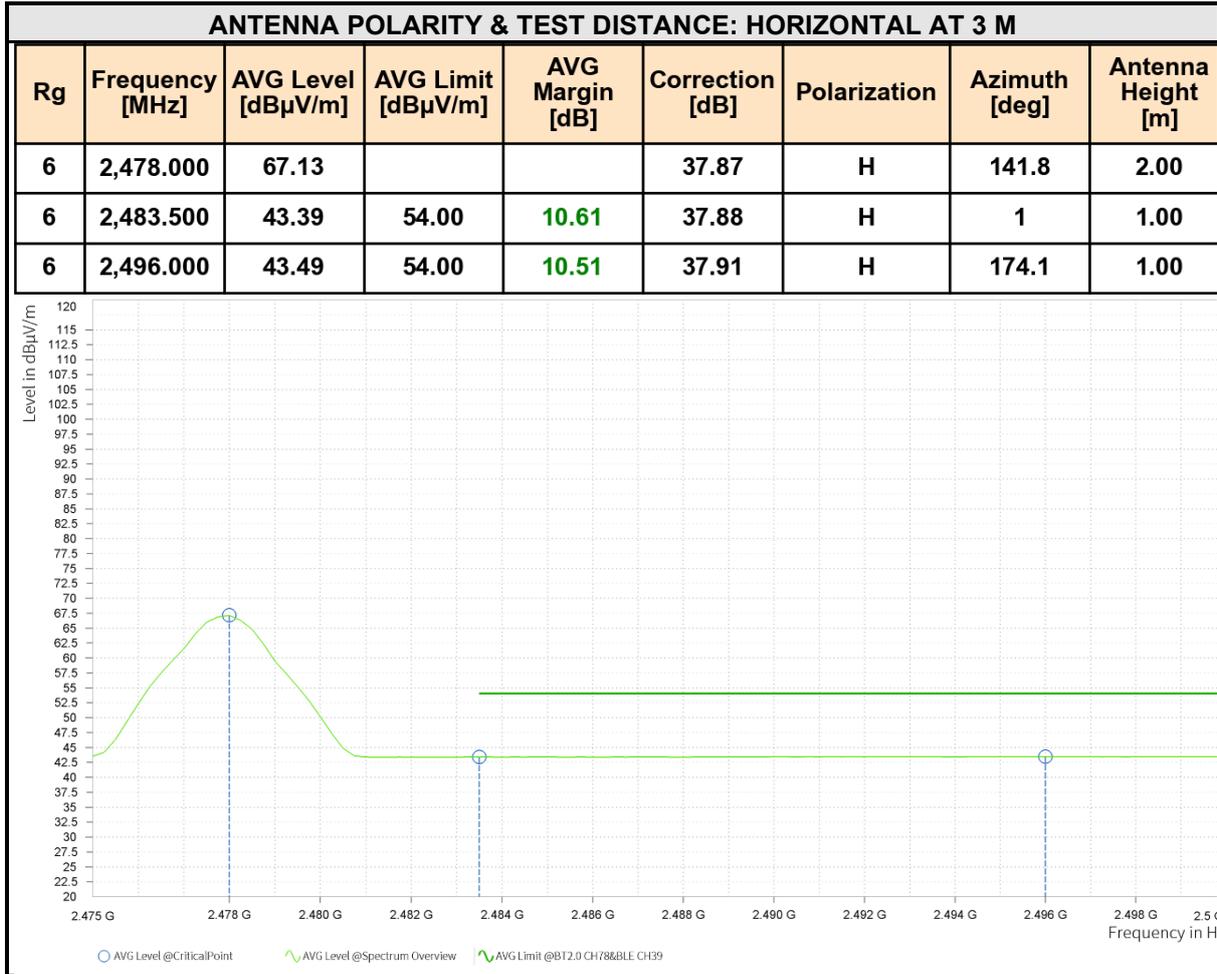




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,477.750	95.82			37.87	V	231.5	2.00
6	2,483.500	57.62	74.00	16.38	37.88	V	174.1	1.00
6	2,487.000	58.49	74.00	15.51	37.89	V	263.6	1.00

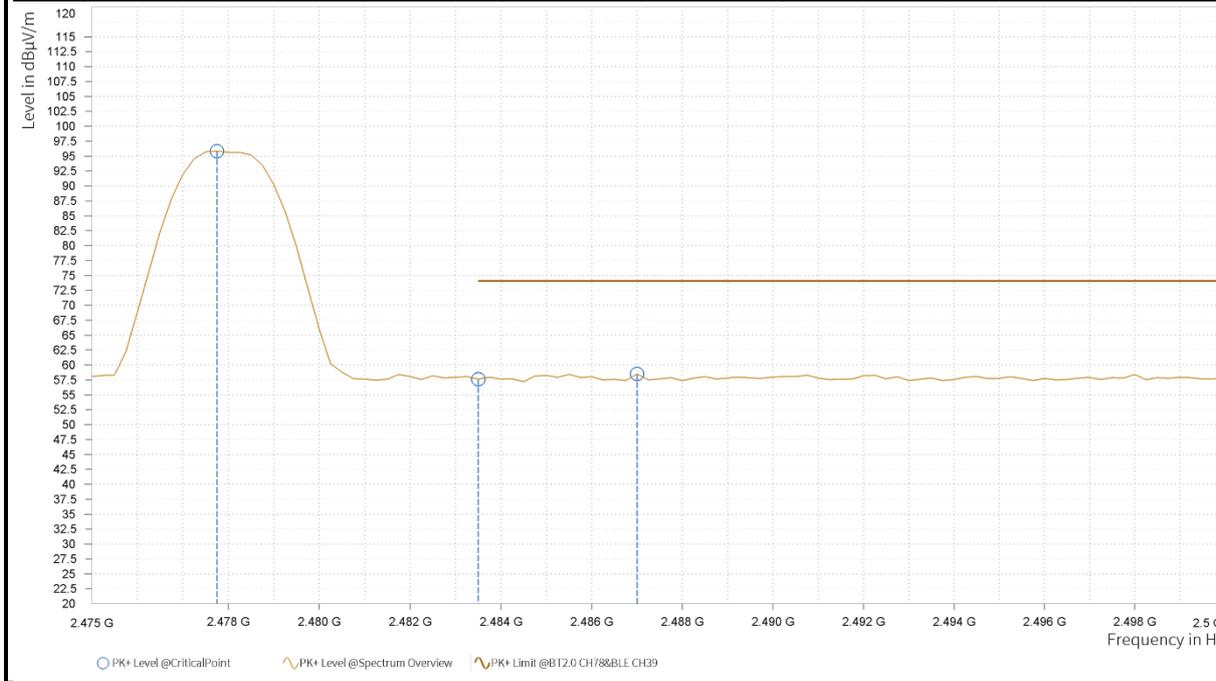


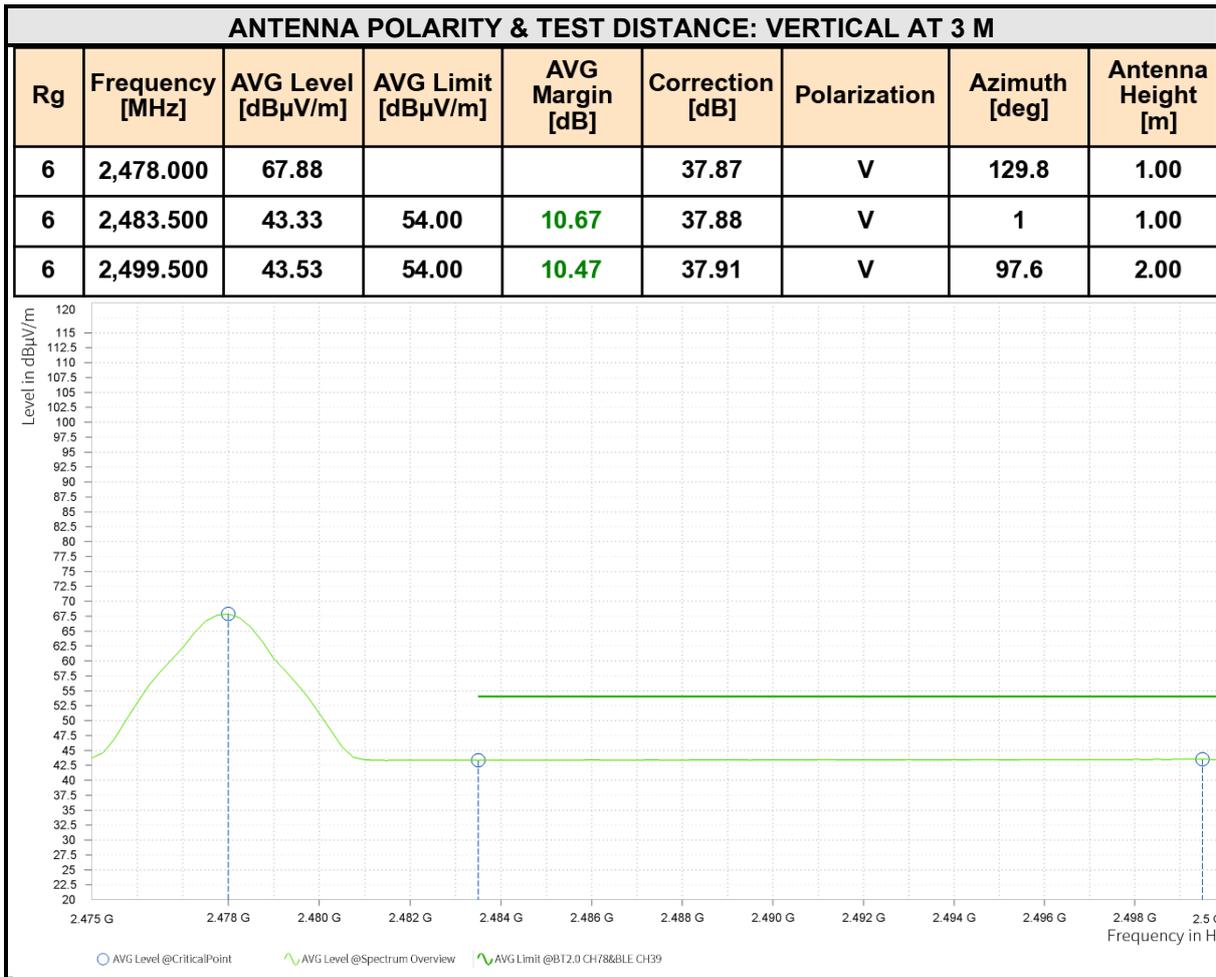



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2478MHz: Fundamental frequency.

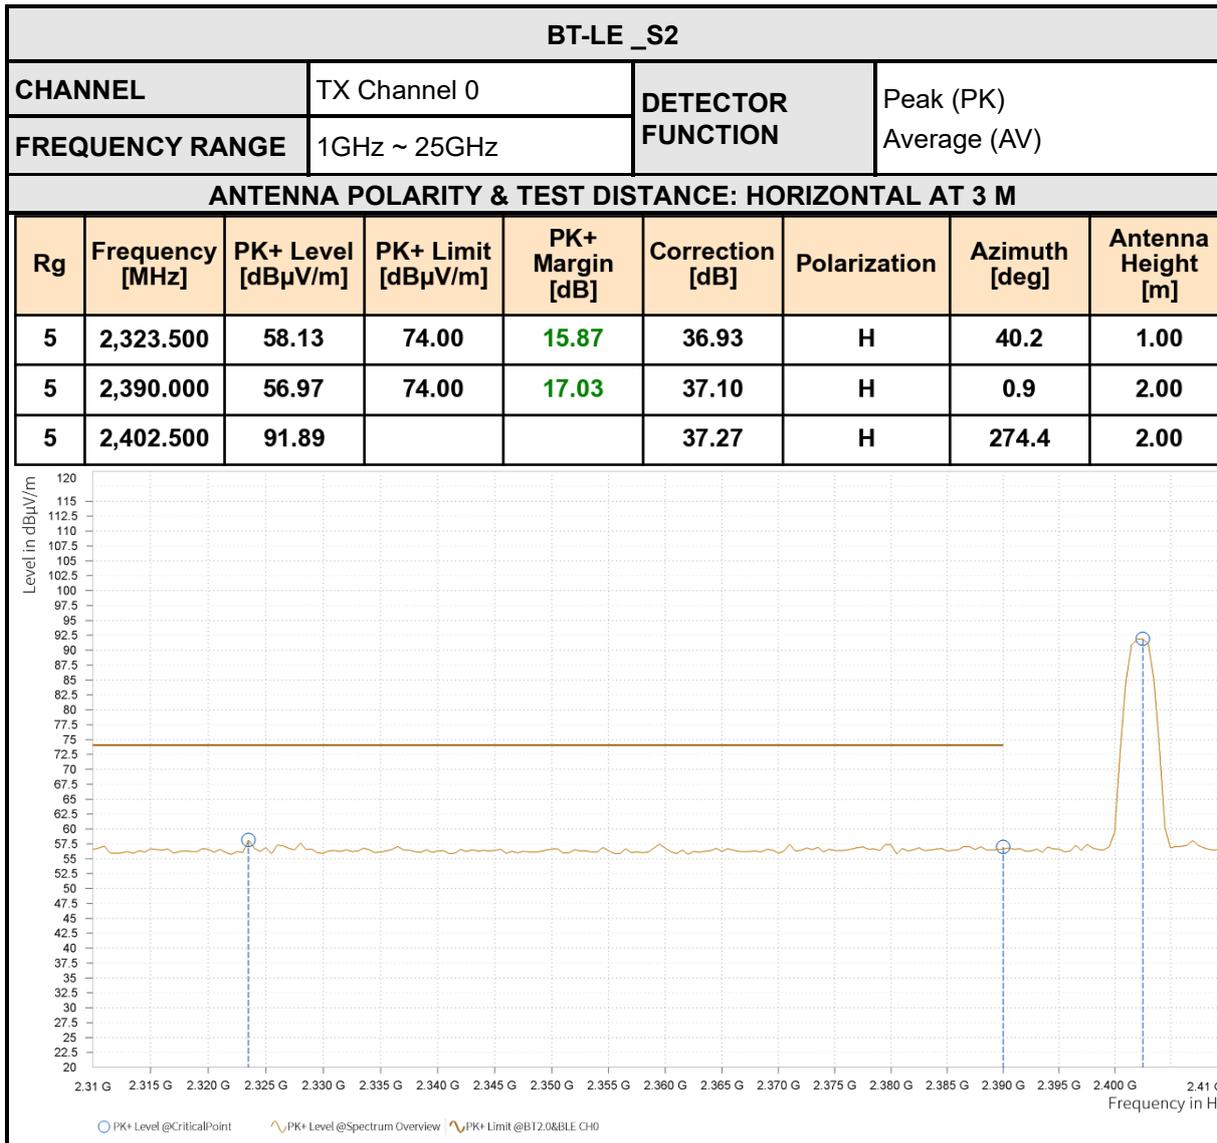

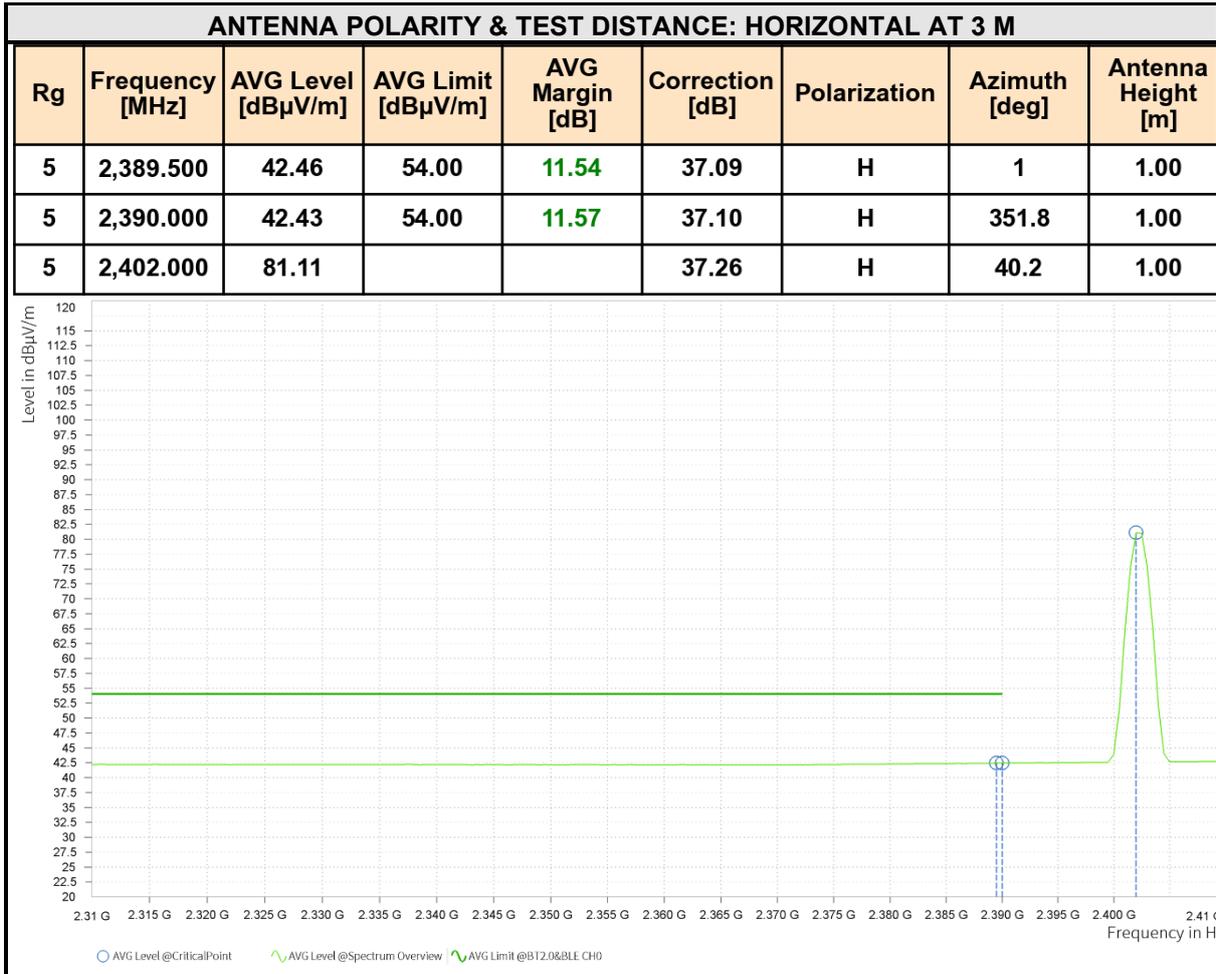

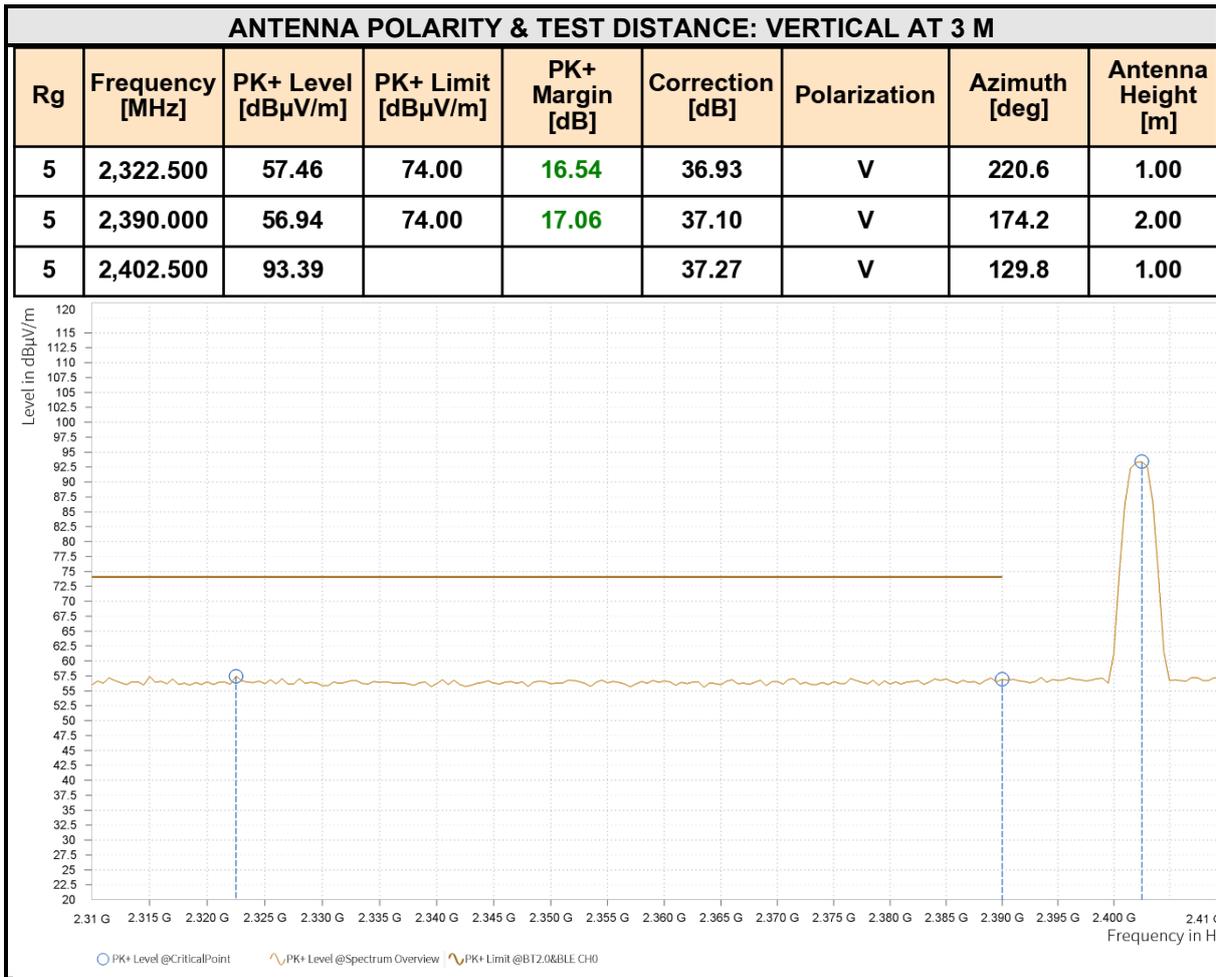

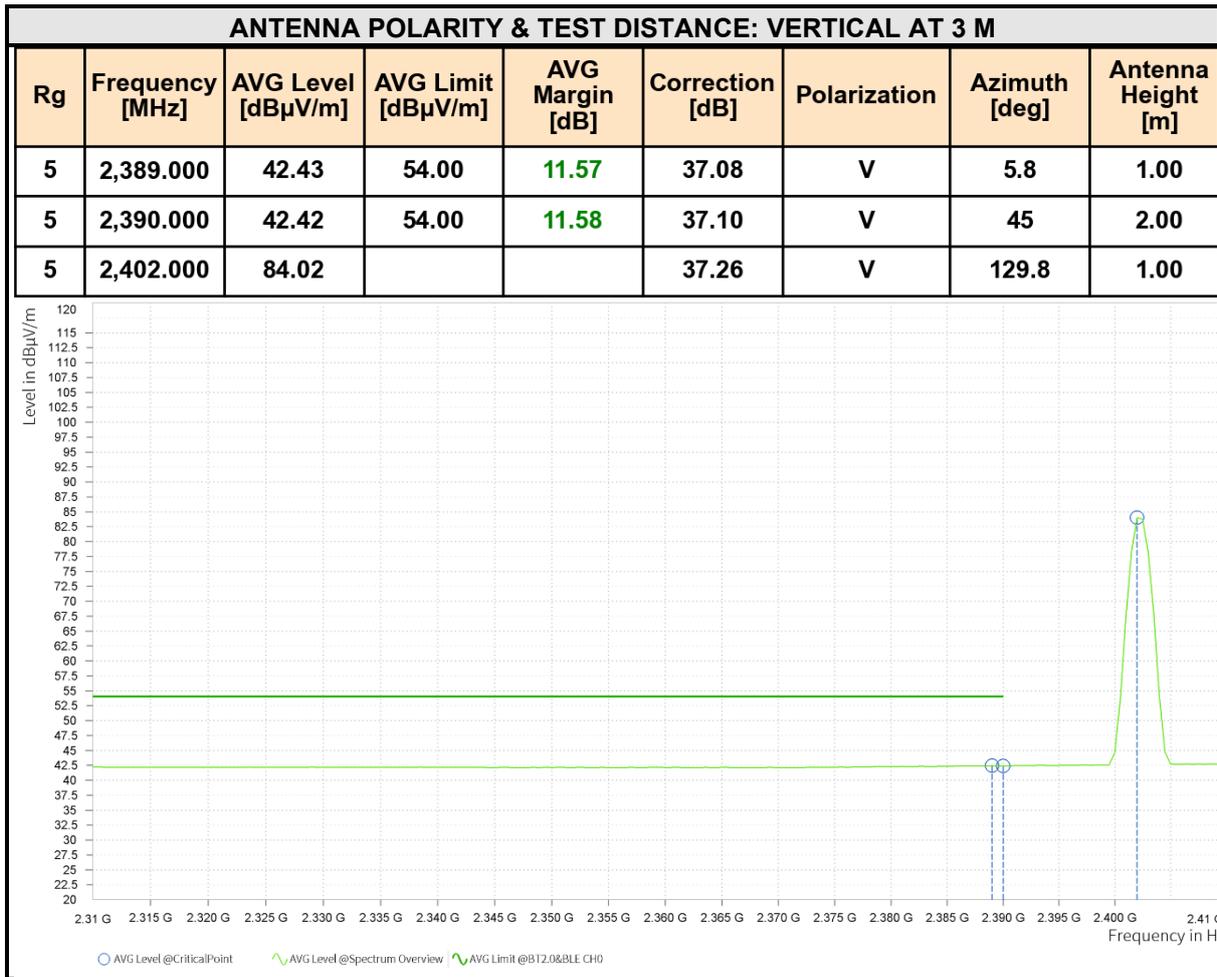

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2402MHz: Fundamental frequency.