

Test report No:  
NIE: 2515BRCB.003A1

## Test report

### Test and Certification for Citizens Broadband Radio Service ( CBRS): 940660 D02 CPE-CBSD Handshake Procedures

|                                           |                                                                                                                                                      |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Identification of item tested             | CBRS CPE-CBSD                                                                                                                                        |
| Trademark                                 | Baicells                                                                                                                                             |
| Model and /or type reference              | EG7010A-M11                                                                                                                                          |
| Other identification of the product       | FCC ID: 2AG32EG7010AM11N                                                                                                                             |
| Features                                  | CPE-CBSD with Domain Proxy                                                                                                                           |
| Final HW Version:                         | A                                                                                                                                                    |
| Final SW Version:                         | Domain Proxy: BaiOMC Rev-18822<br>CPE-CBSD: BaiCE_BG_1.2.1                                                                                           |
| Manufacturer                              | Baicells Technologies Co., Ltd. 3F, Hui Yuan Development Building, No.1 Shangdi Information Industry Base, Haidian Dist., Beijing, PR China, 100085. |
| Test method requested, standard           | 940660 D02 CPE-CBSD Handshake Procedures                                                                                                             |
| Approved by (name / position & signature) | Gonzalo Casado (Lab Manager)<br>                                |
| Date of issue                             | 2020-Aug-18                                                                                                                                          |
| Report template No                        | FDT08_22                                                                                                                                             |

# Index

Competences and guarantees ..... 3

General conditions..... 3

Abbreviations..... 4

Data provided by the client ..... 4

Usage of samples..... 4

Identification of the client..... 4

Testing period and place..... 4

Document history ..... 5

Remarks and comments ..... 5

List of equipment used during the test ..... 6

Test Setup Diagram ..... 7

Testing verdicts ..... 7

Test Results Summary ..... 7

Appendix A: Test results ..... 8

Appendix B: Photographs..... 9

Appendix C: Test Cases Details ..... 9

Appendix D: Spectrum Analyzer Screenshots ..... 11

## Competences and guarantees

---

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification and the Accreditation Bodies.

## Abbreviations

| Abbreviation | Meaning                                 |
|--------------|-----------------------------------------|
| CBRS         | Citizens Broadband Radio Services       |
| CBSD         | Citizens Broadband Radio Service Device |
| DP           | Domain Proxy                            |
| DUT          | Device Under Test                       |
| SAS          | Spectrum Access System                  |
| UUT          | Unit Under Test                         |
| CPI          | Certified Professional Installer        |
| N/A          | Not Applicable                          |
| SA           | Spectrum Analyzer                       |

## Data provided by the client

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Information provided by the client: HW and SW versions of the equipment under test.

## Usage of samples

Samples undergoing test have been selected by: the client

Sample M/01 is composed of the following elements:

| Control N° | Description           | Model       | Serial N°           | Date of reception |
|------------|-----------------------|-------------|---------------------|-------------------|
| 2515b.01   | CPE-CBSD              | EG7010A-M11 | 1203000039192TP0950 | 2019-Dec-12       |
| NA         | Domain Proxy Software | BaiOMC      | Not Applicable      | Not Applicable    |

1. Sample M/01 has undergone the test(s) specified in subclause “Test method requested”.

## Identification of the client

Same as manufacturer

## Testing period and place

|               |                                                                                      |
|---------------|--------------------------------------------------------------------------------------|
| Test Location | DEKRA Certification Inc<br>405 Glenn Drive, Suite 12, Sterling, Virginia, USA, 20164 |
| Date (start)  | 2019-Dec-18                                                                          |
| Date (finish) | 2019-Dec-21                                                                          |

## Document history

| Report number   | Date        | Description    |
|-----------------|-------------|----------------|
| 02515bRCB.003   | 2019-Dec-26 | First release  |
| 02515bRCB.003A1 | 2020-Aug-18 | Second Release |

## Modifications to the reference test report

It was introduced the following modifications in respect to the test report number 2515bRCB.003 related with the same samples, in the next clauses and sub-clauses:

| Clauses/ Sub-Clauses                       | Modification                  | Justification         |
|--------------------------------------------|-------------------------------|-----------------------|
| Page 1/Other identification of the product | FCC ID updated                | Requested by customer |
| Page 5,30,31                               | Antenna Gain and EIRP Updated | Requested by customer |


## Remarks and comments

Testing performed by Gonzalo Casado  
Antenna gain is 15dBi

## List of equipment used during the test

| Description      | Model                                                              | Test Equipment |                            |               |
|------------------|--------------------------------------------------------------------|----------------|----------------------------|---------------|
|                  |                                                                    | Control Number | SW Version                 | Serial Number |
| Signal Analyzer  | N9010A Agilent EXA                                                 | 0018           | A.12.13                    | MY47191206    |
| Test SAS Harness | Test SAS harness<br>WInnForum software Test<br>Harness for<br>CBSD | -              | V1.0.03                    | N/A           |
| BTS-CBSD         | mBS31001                                                           | -              | BaiBS_QRTBA_0.3.1_rf_ready | 191000004     |

Test Setup Diagram

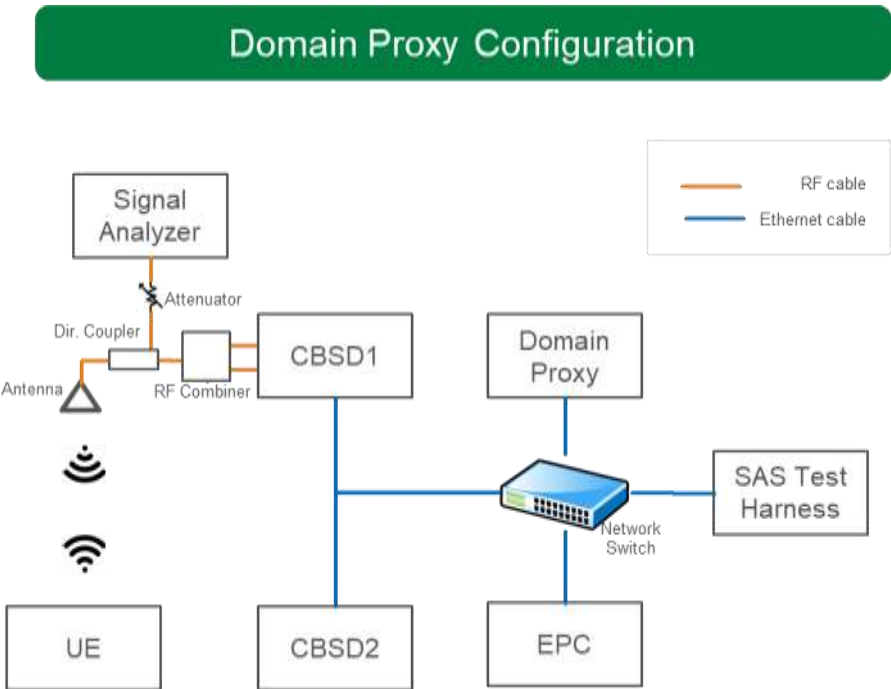

Testing verdicts

|                  |     |
|------------------|-----|
| Not applicable : | N/A |
| Pass :           | P   |
| Fail :           | F   |
| Not measured :   | N/M |

Test Results Summary

| Test Cases Verdicts        | Number of Test Cases |
|----------------------------|----------------------|
| Not applicable :           | 0                    |
| Pass :                     | 2                    |
| Fail :                     | 0                    |
| Not measured :             | 0                    |
| Total Number of Test Cases | 2                    |

## Appendix A: Test results

| ID        | Requirement Description                                                                                                                                                                                                                                                             | Verdict | Date       | Sample |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|--------|
| CPE.KDB.1 | CPE Handshake transmissions are limited in duration and duty cycle to the minimum time necessary to get a grant from the SAS; this time should not exceed 1 second within any 10-second period, 10seconds within any 300-second period, or 20 seconds within any 3600-second period | P       | 2019-12-19 | M/01   |
| CPE.KDB.2 | Verify that the CPE-CBSD register with SAS even with transmit power level below 23dBm EIRP                                                                                                                                                                                          | P       | 2019-12-21 | M/01   |

Notes:

- Signal Analyzer Screenshots included in appendix D
- Test cases steps described in appendix C



## Appendix B: Photographs



**Figure B1.** Top View of DUT

## Appendix C: Test Cases Details

- CPE.KDB.1: Verify that CPE Handshake transmissions are limited in duration and duty cycle to the minimum time necessary to get a grant from the SAS; this time should not exceed 1 second within any 10-second period, 10seconds within any 300-second period, or 20 seconds within any 3600-second period

Test Case applicable only to CPE-CBSD

| # | Test Execution Steps                                                                                                                               |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Verify that CPE-CBSD doesn't have any active grant                                                                                                 |
| 2 | Measure CPE-CBSD transmission durations                                                                                                            |
| 3 | Verify that CPE-CBDS transmission duration doesn't exceed 1 second within 10seconds, 10 seconds within 300seconds and 20seconds within 3600seconds |

- CPE.KDB.2: Verify that the CPE-CBSD register with SAS even with transmit power level below 23dBm EIRP

Test Case applicable only to CPE-CBSD


| # | Test Execution Steps                                                                                                                  |
|---|---------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Adjust RF path attenuation between CPE-CBSD and CBSD so that the CPE-CBSD transmit power is below 23dBm EIRP                          |
| 2 | Execute Power Measurement script from WinnForum software Test Harness for CBSD package                                                |
| 3 | Trigger CPE-CBSD request to register to test SAS                                                                                      |
| 4 | Verify that CPE-CBSD is registered successfully with test SAS and CPE-CBSD transmit power is below 23dBm EIRP using rf equipment.     |
| 5 | Trigger CPE-CBSD request to request grant to test SAS                                                                                 |
| 6 | Verify that CPE-CBSD is receives grant successfully from test SAS and CPE-CBSD transmit power is below 23dBm EIRP using rf equipment. |
| 7 | Start Uplink traffic to occupy channel                                                                                                |
| 8 | Measure Uplink Channel Power and verify that it doesn't exceed maxEIRP indicated in grant                                             |

## Appendix D: Spectrum Analyzer Screenshots

### 1. CPE.KDB1: Results for CPE-CBSD transmission duty cycle without grant


| Time Period (s) | Time Limit (s) | DUT Tx Duration Measured (s) | Result |
|-----------------|----------------|------------------------------|--------|
| 10              | 1              | 0.47                         | PASS   |
| 300             | 10             | 2.19                         | PASS   |
| 3600            | 20             | 5.39                         | PASS   |


1.1. 1 seconds within 10 second period

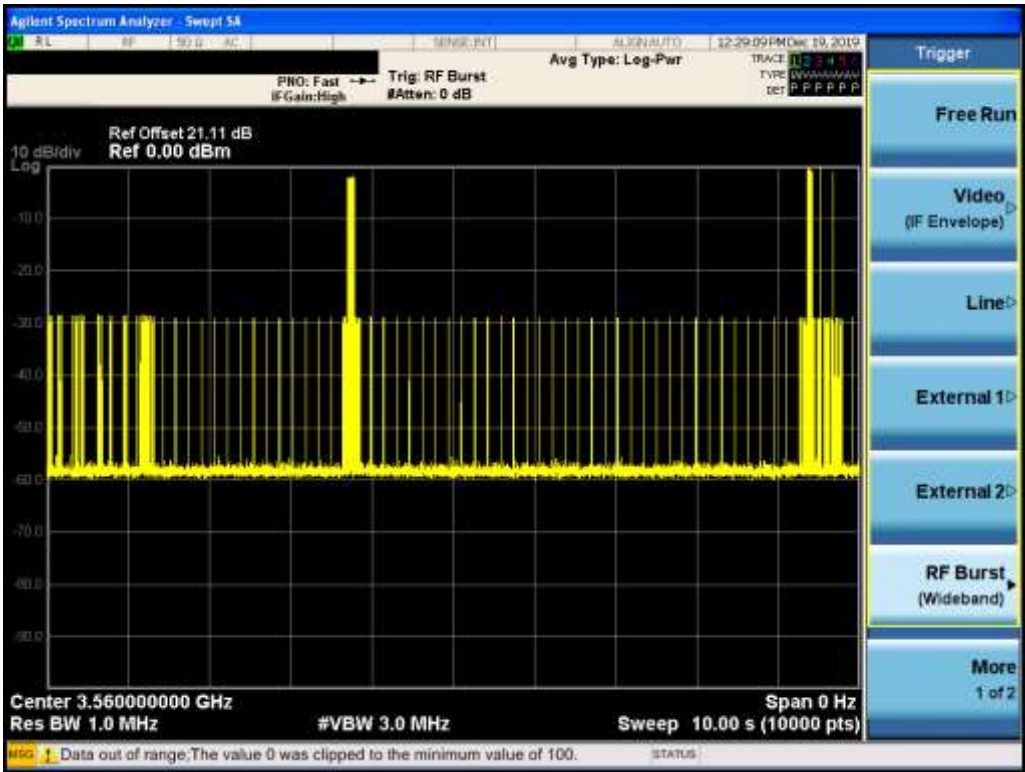

## 1.2. 10 seconds within 300 second period

Note: The 300-period test was measured by doing 10 consecutive automatic sweeps of 30seconds. The value reported is the aggregated time of all the sweeps where signal was detected by the signal analyzer

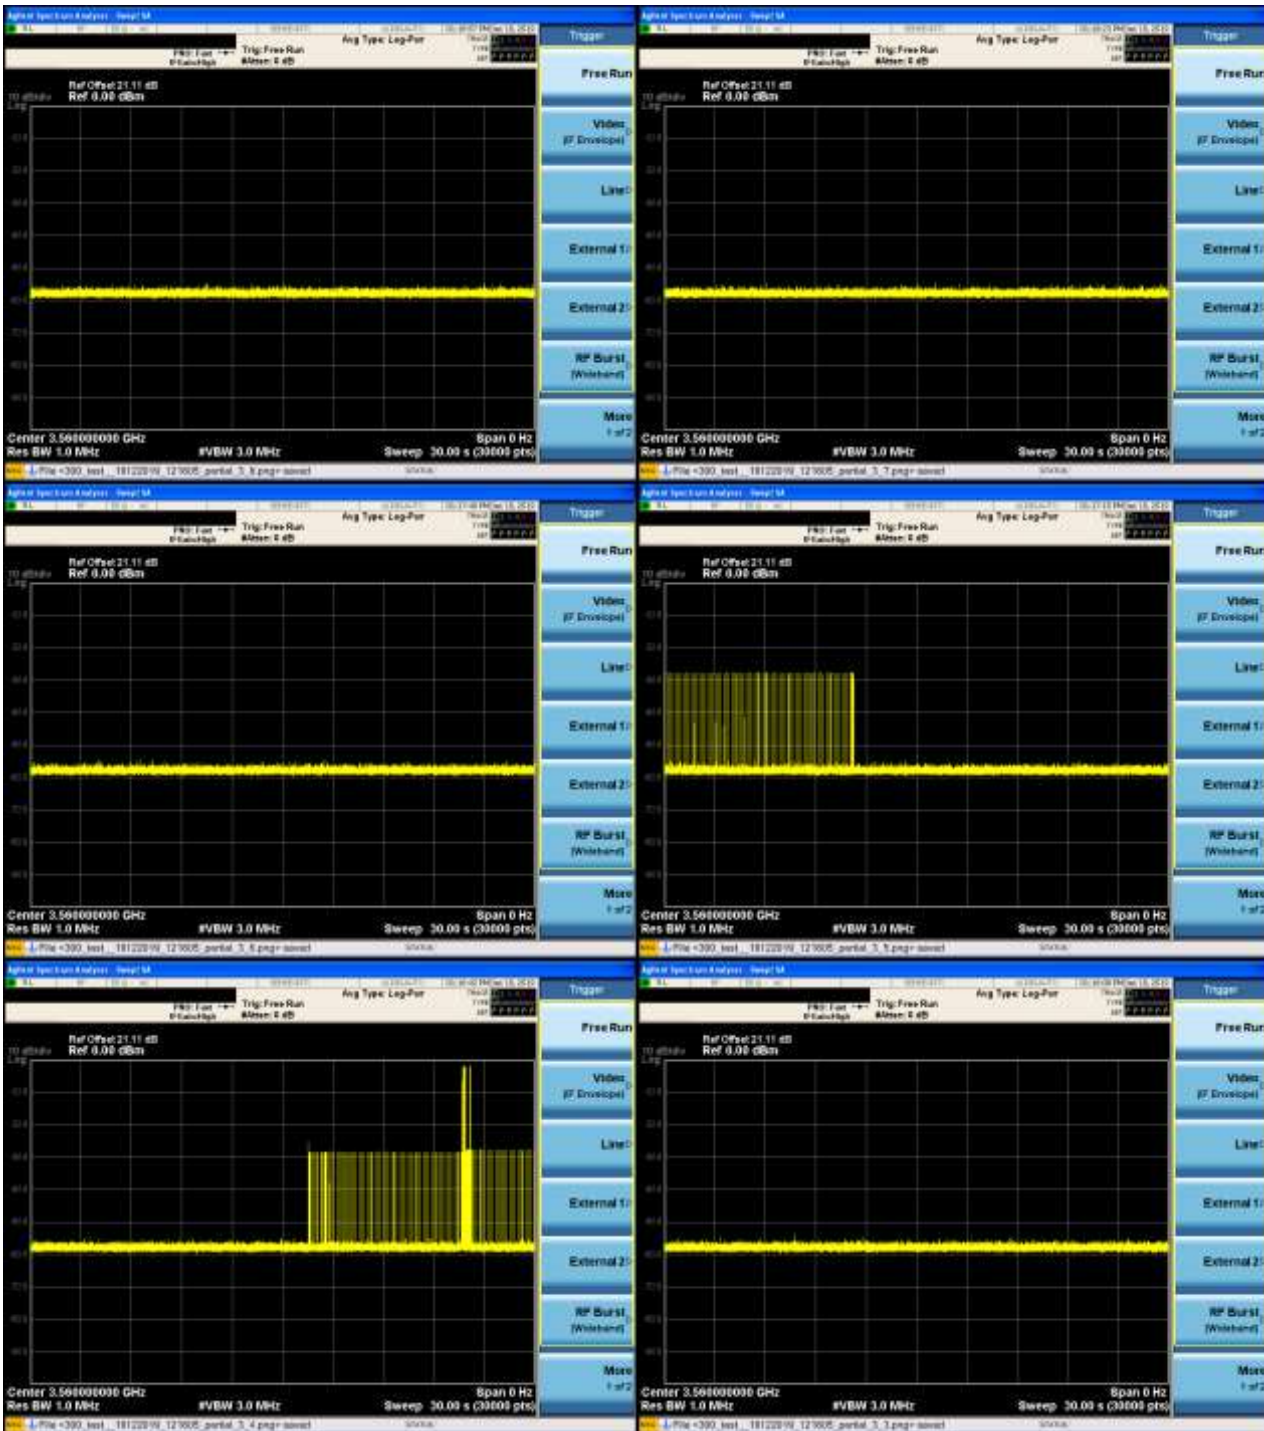

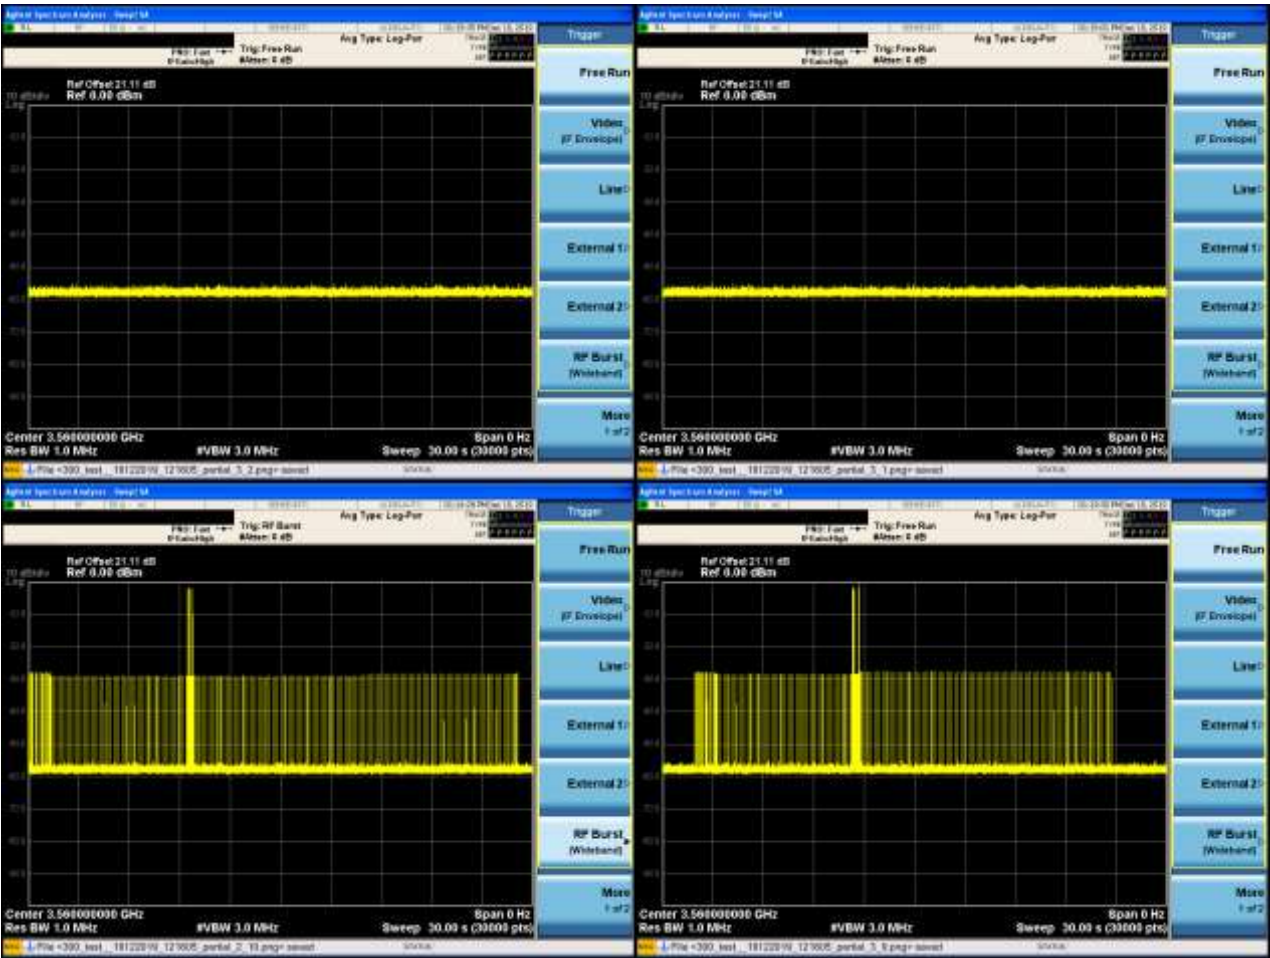


### 1.3. 20 seconds within 3600 second period


Note: The 3600-period test was measured by doing 90 consecutive automatic sweeps of 40seconds and 40000 points with a measurement time resolution of 1ms . The value reported is the aggregated time of all the sweeps where signal was detected by the signal analyzer






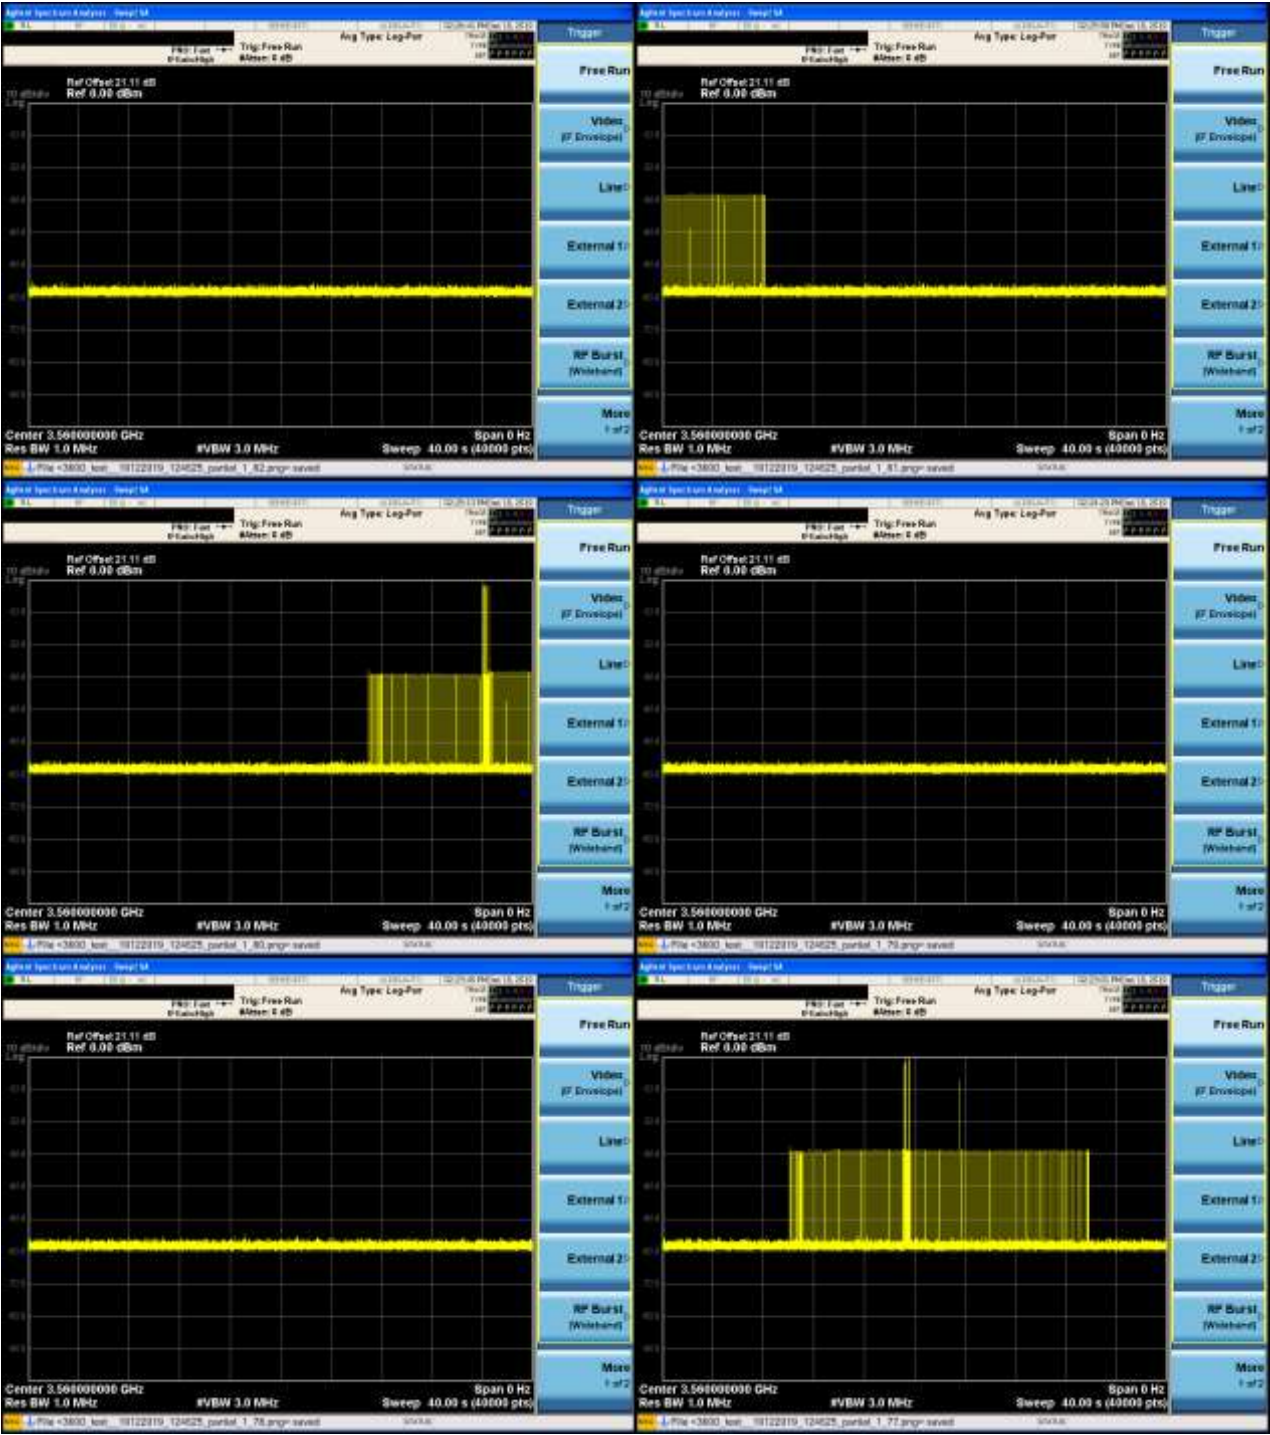



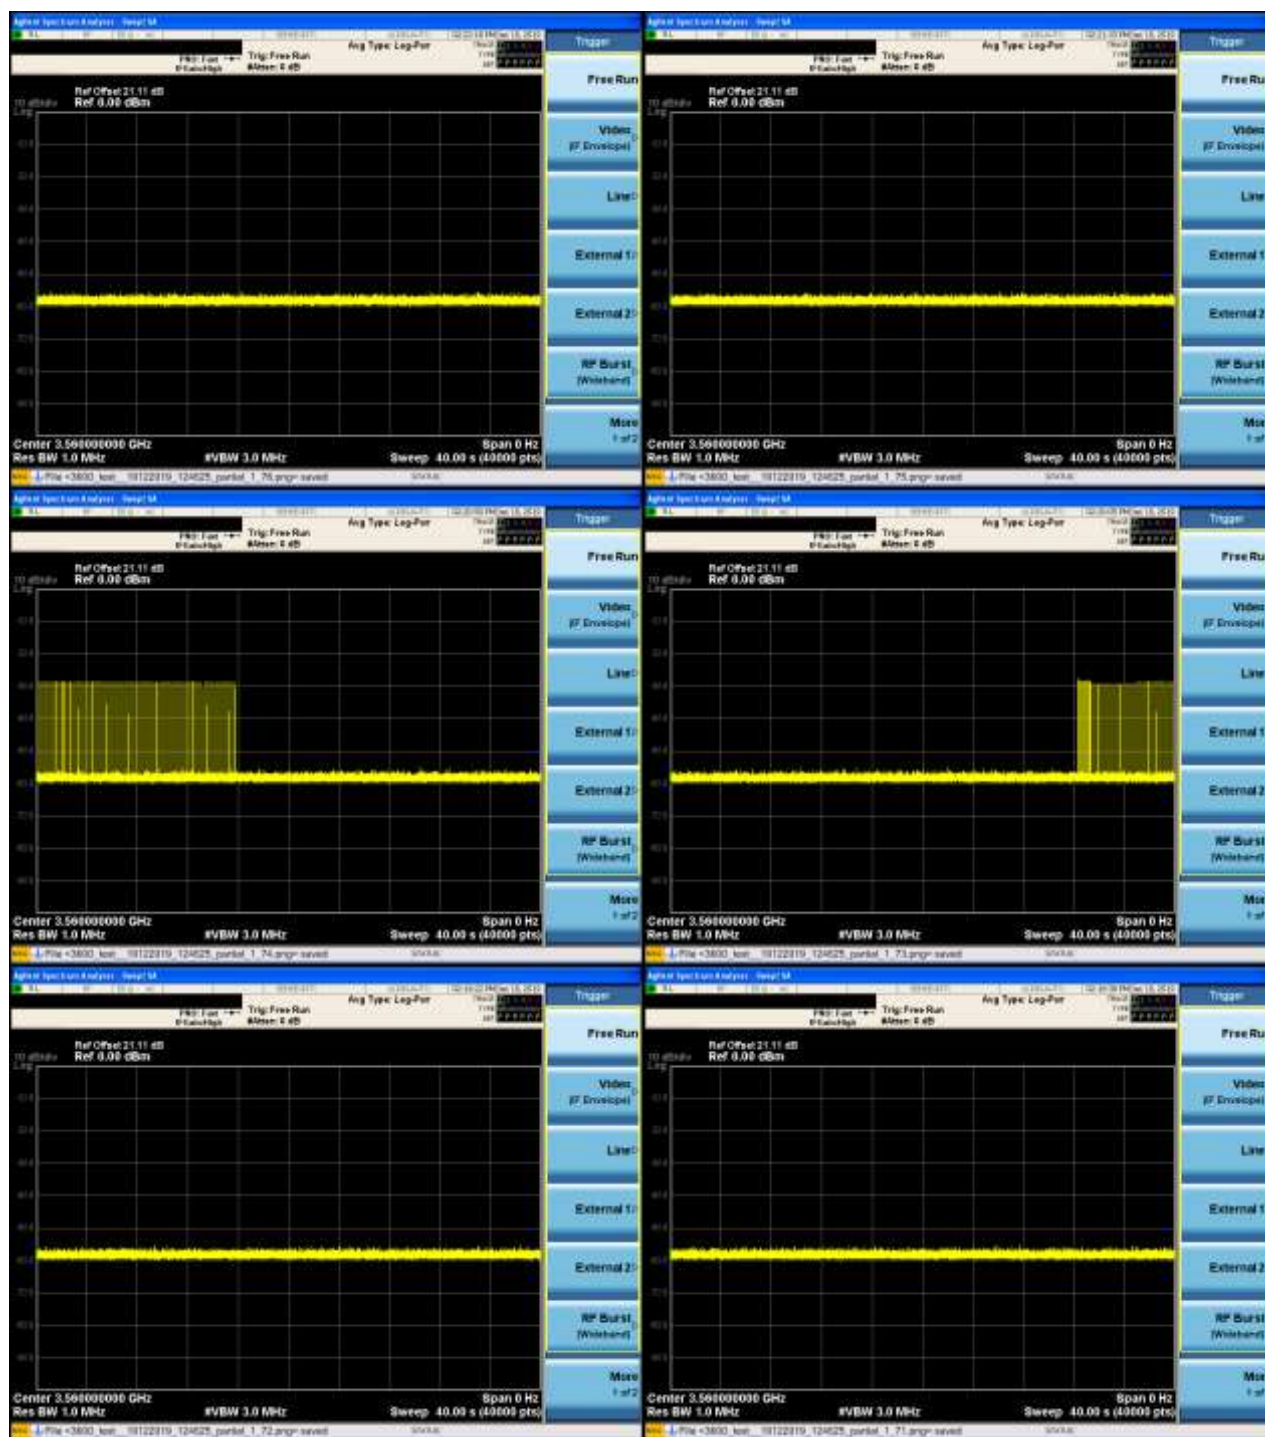

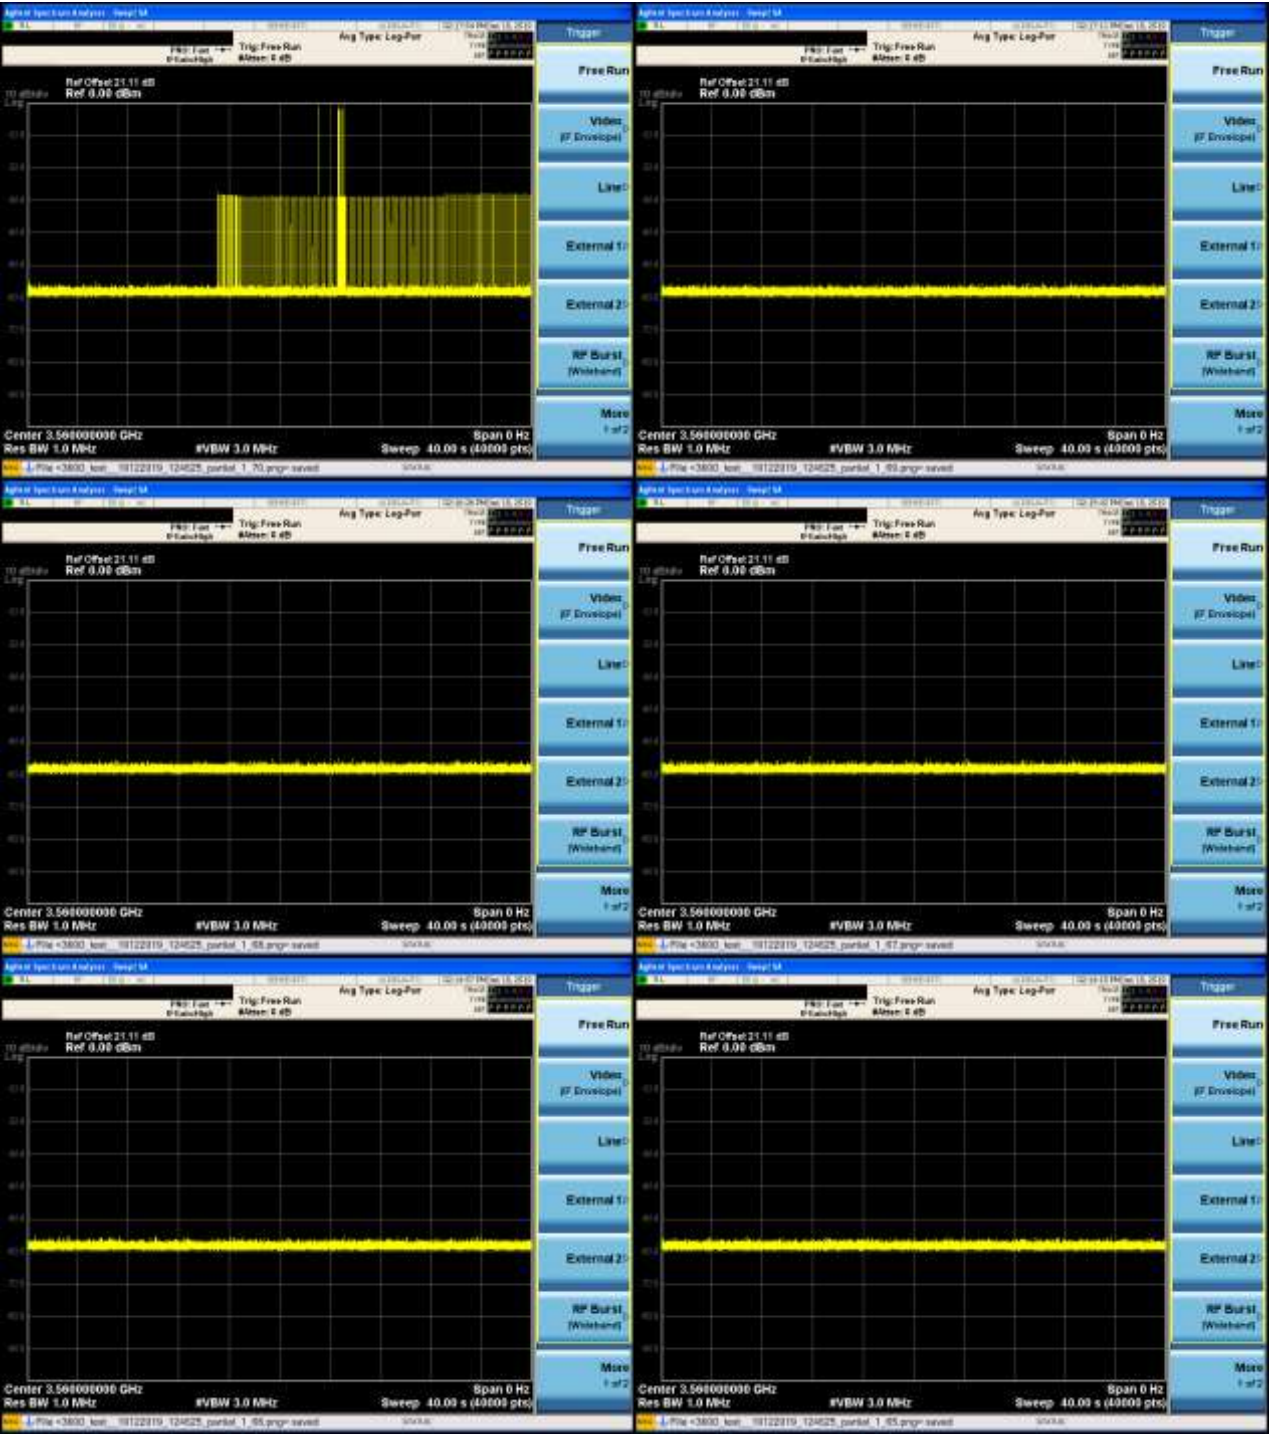
























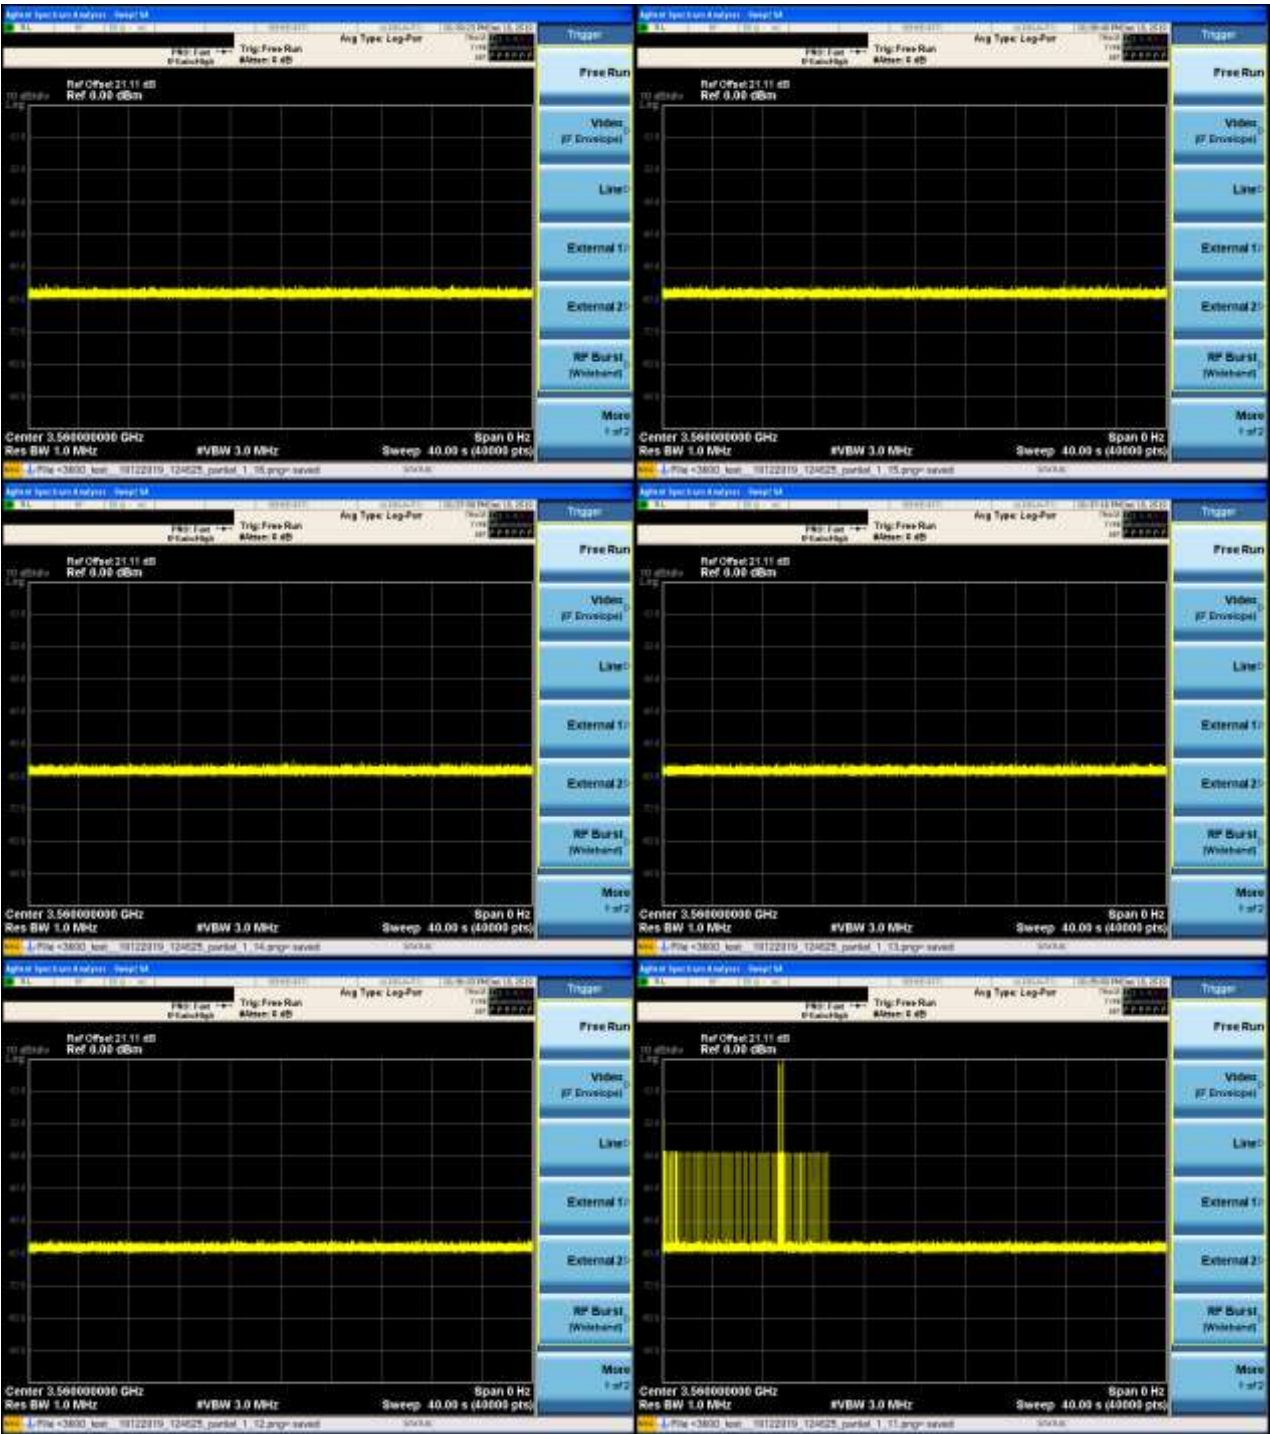

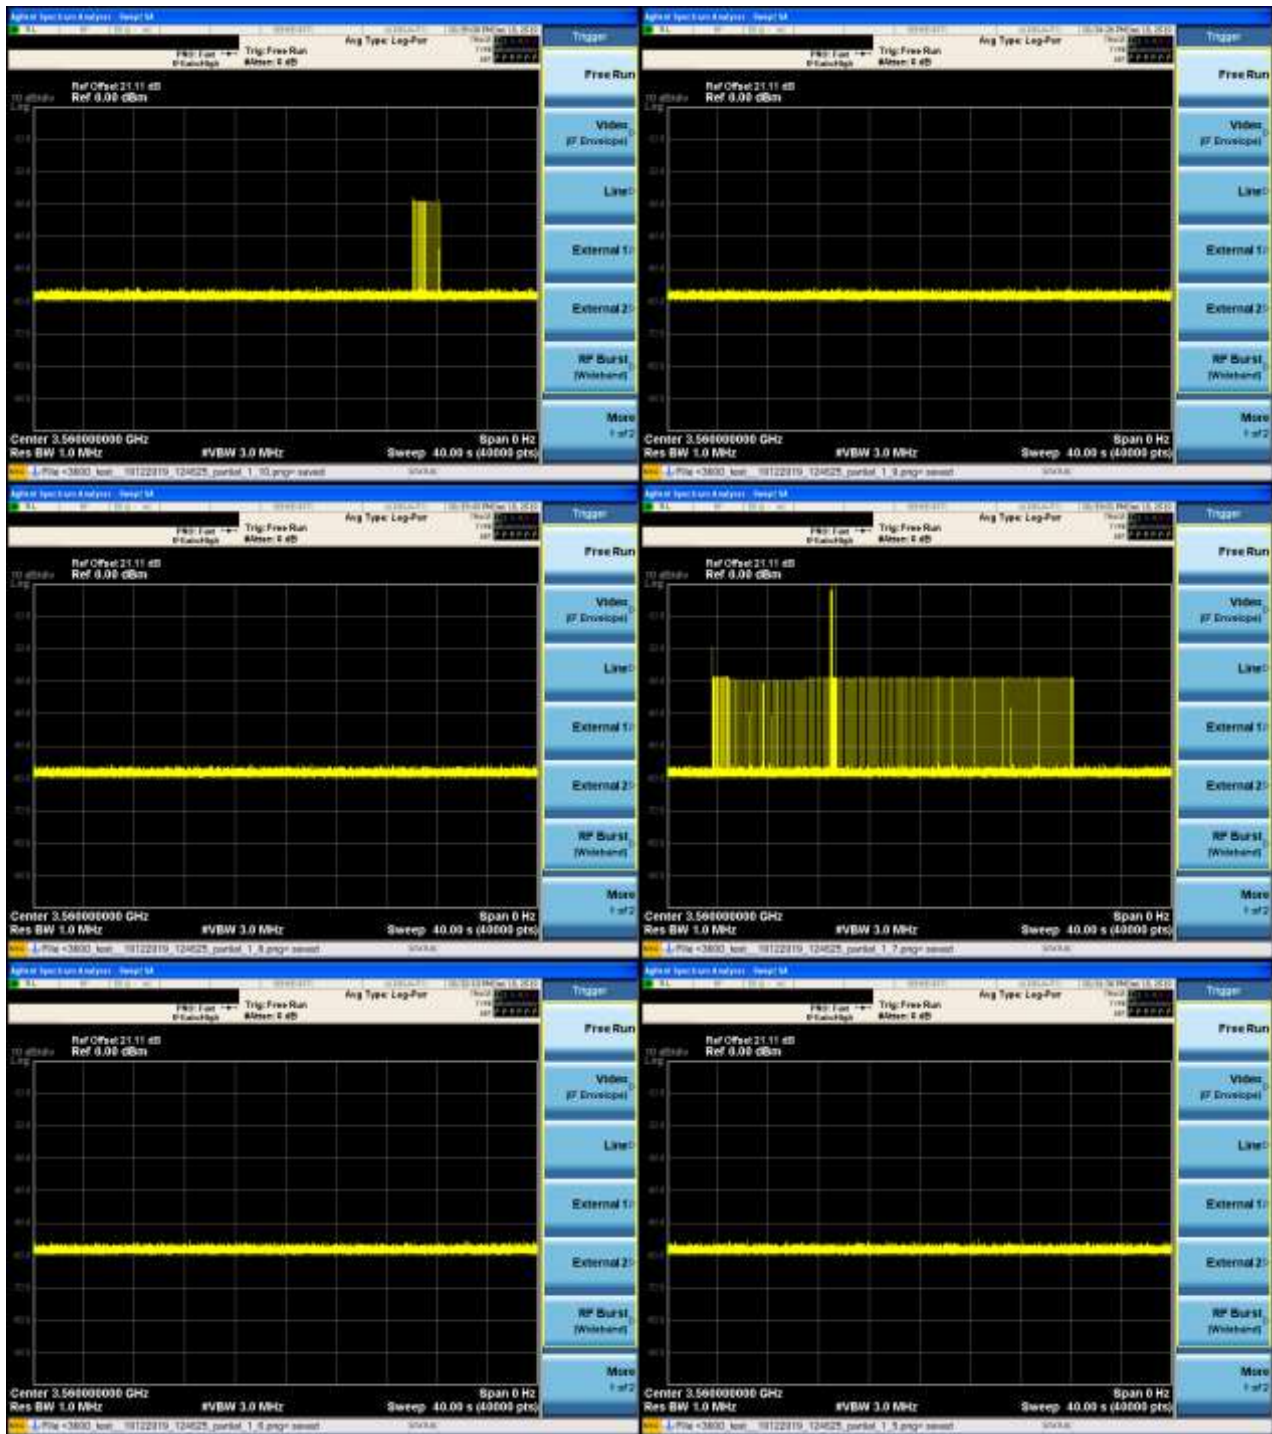



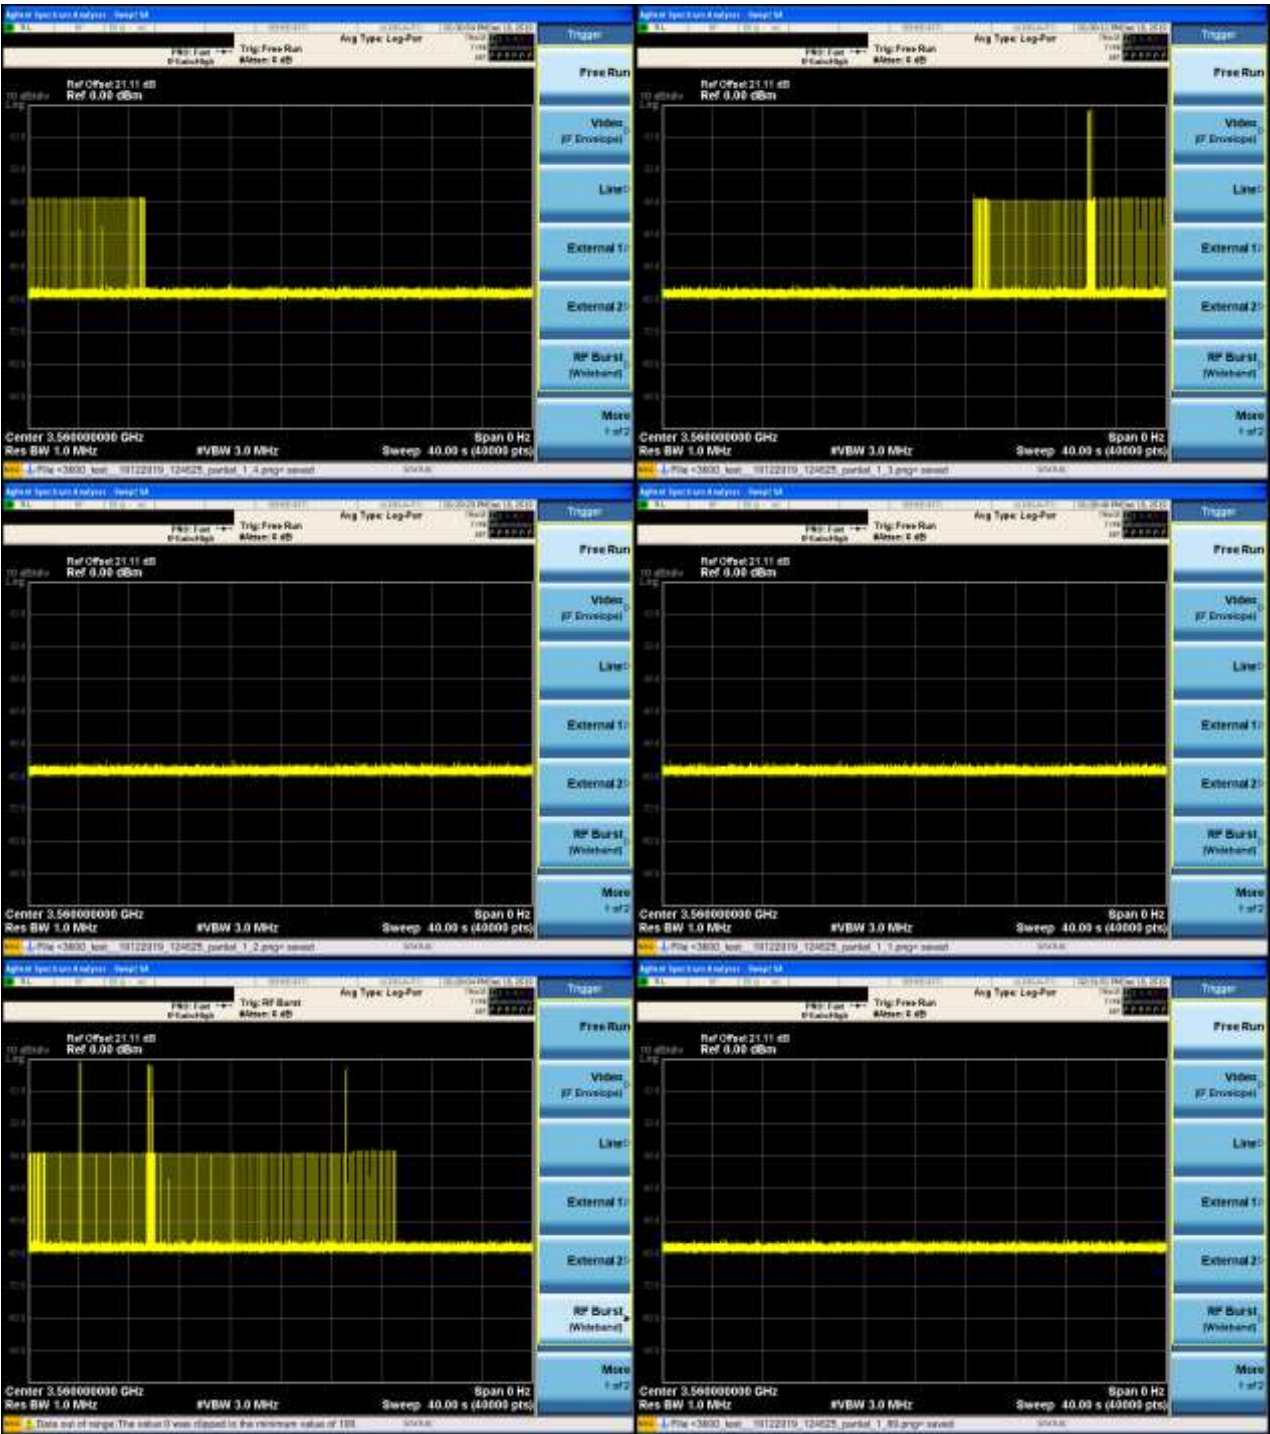

## 2. CPE.KDB.2: Verify CPE-CBSD can register with SAS with transmit power below 23dBm EIRP



Figure CPE.KDB.2 A: MaxHold trace capture during registration and grant request procedure. This plot shows that the CPE-CBSD was able to register with test-SAS and obtain a grant operating at transmit power below 23dBm/10MHz EIRP.

MaxHold transmit power measured while obtaining grant is 17.99dBm/10MHz EIRP

Peak Power Spectral Density EIRP detected during grant request procedure was 7.99 dBm/MHz EIRP

### Notes

Peak PSD EIRP (dBm/MHz) = Antenna Gain (15dBi) + Conducted Peak PSD ( -7.006 dBm/MHz)

Transmit power EIRP (dBm/10MHz) = Antenna Gain (15dBi) + Conducted Channel Power (2.99 dBm/10MHz)

RF Path loss = 21.11 dB (Already considered in rf equipment measurement)

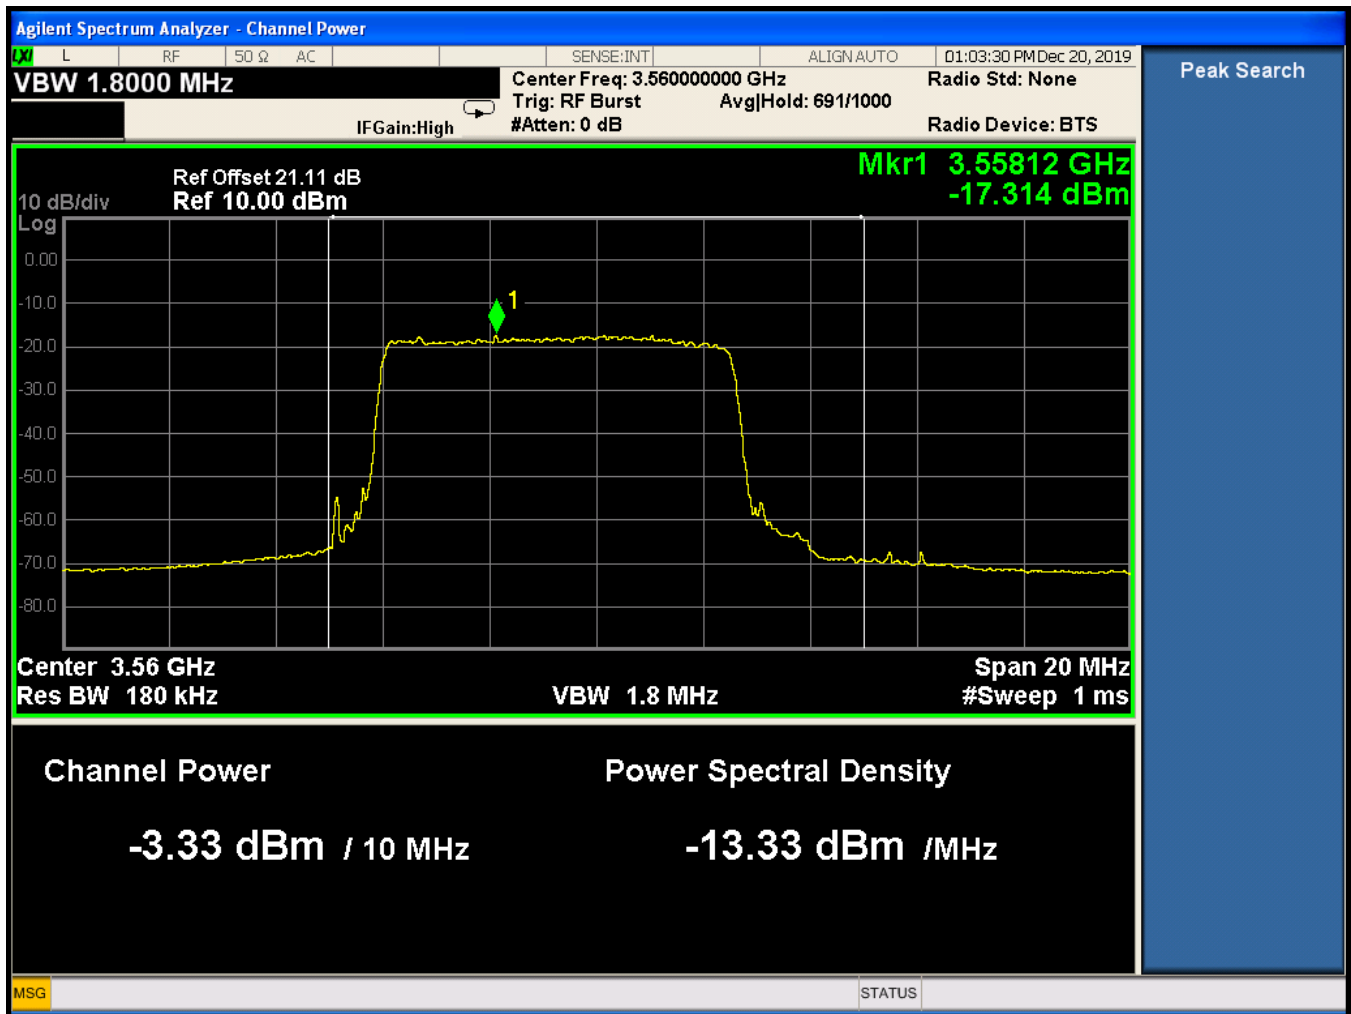


Figure CPE.KDB.2s B: CPE-CBSD EIRP transmit channel power measurement after CPE-CBSD has obtained a grant from test SAS and it is fully utilizing the channel with user data traffic. This plot shows CPE-CBSD obtains connection and can operate at below 23dBm/10MHz EIRP

Measured CPE-CBSD transmit power is 11.67 (dBm/10MHz) EIRP

Note: Channel Power calculated as:

$$\text{EIRP (dBm/10MHz)} = \text{Antenna Gain (15dBi)} + \text{Conducted Tx. Power ( -3.33 dBm/10 MHz)}$$

$$\text{RF Path loss} = 21.11\text{dB (Already considered in rf equipment measurement)}$$