



RF TEST REPORT

Report No.: SET2022-03557

Product Name: LTE Turbo UE

Model No.: EG8015Q-M11

FCC ID: 2AG32EG8015QM11

Applicant: Baicells Technologies Co., Ltd.

Address: 9-10F, 1stBldg., No.81BeiqingRoad, Haidian District, Beijing, China

Dates of Testing: 04/02/2022 - 07/27/2022

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 367 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report


Product: LTE Turbo UE
Trade Name: Baicells
Applicant.....: Baicells Technologies Co., Ltd.
Applicant Address.....: 9-10F, 1stBldg., No.81BeiqingRoad, Haidian District,
Beijing, China
Manufacturer: Baicells Technologies Co., Ltd.
Manufacturer Address: 9-10F, 1stBldg., No.81BeiqingRoad, Haidian District,
Beijing, China
Test Standards: 47 CFR Part 15 Subpart E 15.407
ANSI C63.10-2013
Test Result.....: Pass

Tested by:  2022.07.28

Sun, Test Engineer

Reviewed by:  2022.07.28

Chris You, Senior Engineer

Approved by:  2022.07.28

Shuangwen Zhang, Manager

Table of Contents

1. GENERAL INFORMATION.....	5
1.1. EUT Description	5
1.2. Test Standards and Results.....	6
1.3. Channel List	7
1.4. Test environment and mode	8
1.5. Table for Supporting Units.....	10
1.6. Laboratory Facilities	11
2. 47 CFR PART 15E REQUIREMENTS	12
2.1. Antenna requirement	12
2.2. Maximum Conducted Output Power	13
2.3. Power spectral density (PSD)	15
2.4. Emission Bandwidth and Occupied Bandwidth.....	17
2.5. Frequency Stability	19
2.6. Radiated Band Edge and Spurious Emission.....	21
2.7. AC Power Line Conducted Emission.....	76
3. LIST OF MEASURING EQUIPMENT.....	80
4. UNCERTAINTY OF EVALUATION.....	81
APPENDIX A	82



Change History		
Issue	Date	Reason for change
1.0	2022.07.28	First edition

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	LTE Turbo UE
Model No.	EG8015Q-M11
Hardware Version	ver.A
Software Version	BaiCE_LT_1.0.16
EUT supports Radios application	WLAN5.0GHz 802.11a/n/ac/ax
Product Type	Fixed point-to-point access points
Modulation Type	802.11a/n: OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) 802.11ax: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM)
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: up to 600 Mbps(4x4MIMO) 802.11ac: up to 3466.667 Mbps(4x4MIMO) 802.11ax: up to 4803.922 Mbps(4x4MIMO)
Frequency Range	UNII-1: 5150 ~ 5250MHz UNII-3: 5725 ~ 5850MHz
Channel Bandwidth	802.11a: 20MHz 802.11n: 20MHz/40MHz 802.11ac/ax: 20MHz/40MHz/80MHz
Channel Number	UNII-1: 4 for 802.11a, 802.11n(HT20), 802.11ac(VHT20), 802.11ax(HE20) 2 for 802.11n(HT40), 802.11ac(VHT40), 802.11ax(HE40) 1 for 802.11ac(VHT80), 802.11ax(HE80) UNII-3: 5 for 802.11a, 802.11n(HT20), 802.11ac(VHT20), 802.11ax(HE20) 2 for 802.11n(HT40), 802.11ac(VHT40)), 802.11ax(HE40) 1 for 802.11ac(VHT80), 802.11ax(HE80)
Antenna Type	Internal Antenna
Antenna Gain	Antenna 0/1/2/3/4/5: 10.0dBi
Output Power (Max.)	UNII-1: 28.84dBm UNII-3: 28.94dBm
AC adapter	Model: G0720-240-100 Input: AC100-240V, 50/60Hz, MAX 0.75A Output: DC 24.0V, 1.0A, 24.0W
Remark	Device contain two 5G WIFI module, there are module QCN9024 that support ANT0, ANT1, ANT2 and ANT3 is 4x4MIMO. And module QCN5052 Support ANT4 and ANT5 is 2*2MIMO.

1.2. Test Standards and Results

The objective of the report is to perform testing according to below standards for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E §15.407	Radio Frequency Devices
2	KDB789033 D02 General UNII Test Procedures New Rules v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
3	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
4	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test detailed items/section required by FCC rules and results are as below:

No.	FCC Rule	Description	Result
1	15.203 15.407(a)	Antenna Requirement	PASS
2	15.407(a)(1)(iii) 15.407(a)(3)(i)	Maximum Conducted Output Power	PASS
3	15.407(a)(12)	26dB Emission Bandwidth 99% Occupied Bandwidth	PASS
4	15.407(e)	6dB Emission Bandwidth	PASS
5	15.407(a)(1)(iii) 15.407(a)(3)(i)	Power spectral density (PSD)	PASS
6	15.207	AC Power Line Conducted Emission	PASS
7	15.205 15.209 15.407(b)	Radiated Band Edges and Spurious Emission	PASS
8	15.407(g)	Frequency Stability	PASS

1.3. Channel List

Operated band in 5150 MHz ~ 5250MHz

4 channels are provided for 802.11a, 802.11n-HT20, 802.11ac-VHT20 and 802.11ax-HE20.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	44	5220
40	5200	48	5240

2 channels are provided for 802.11n-HT40, 802.11ac-VHT40 and 802.11ax-HE40.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
38	5190	46	5230

1 channels are provided for 802.11ac-VHT80 and 802.11ax-HE80.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
42	5210	/	/

Operated band in 5725 MHz ~ 5850MHz

5 channels are provided for 802.11a, 802.11n-HT20, 802.11ac-VHT20, 802.11ax-HE20.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

2 channels are provided for 802.11n-HT40, 802.11ac-VHT40, 802.11ax-HE40.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
151	5755	159	5795

1 channel are provided for 802.11ac-VHT80, 802.11ax-HE80.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
155	5775	/	/

1.4. Test environment and mode

During the measurement, the environmental conditions were within the listed ranges:

Operating Environment	
Temperature	15°C - 35°C
Humidity	30% -60%
Atmospheric Pressure	86KPa-106KPa
Test mode:	
Continuously transmitting mode	Keeps the EUT in 100% duty cycle transmitting with modulation in SISO, duty cycle factor is not required.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

For Frequency band 5150 ~ 5250 MHz				
Test Mode	Frequency(MHz)			Data rate
	LCH	MCH	HCH	
802.11a	5180	5220	5240	6 Mbps
802.11n-HT20/ac-VHT20/ax-HE20				MCS 0
802.11n-HT40/ac-VHT40/ax-HE40	5190	/	5230	MCS 0
802.11ac-VHT80/ax-HE80	5210	/	/	MCS 0
Note: After scanning all modulation types and data rates for all test patterns, the above list was found to be the worst case.				

For Frequency band 5725 ~ 5850 MHz				
Test Mode	Frequency(MHz)			Data rate
	LCH	MCH	HCH	
802.11a	5745	5785	5825	6 Mbps
802.11n-HT20/ac-VHT20/ax-HE20				MCS 0
802.11n-HT40/ac-VHT40/ax-HE40	5755	/	5795	MCS 0
802.11ac-VHT80/ax-HE80	5775	/	/	MCS 0
Note: After scanning all modulation types and data rates for all test patterns, the above list was found to be the worst case.				

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation modes or test configuration modes mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX A SISO Mode
Mode 2	TX 802.11n-HT20 SISO Mode
Mode 3	TX 802.11n-HT40 SISO Mode
Mode 4	TX 802.11ac-VHT20 SISO Mode
Mode 5	TX 802.11ac-VHT40 SISO Mode
Mode 6	TX 802.11ac-VHT80 SISO Mode
Mode 7	TX 802.11ax-HE20 SISO Mode
Mode 8	TX 802.11ax-HE40 SISO Mode
Mode 9	TX 802.11ax-HE80 SISO Mode
Mode 10	TX 802.11n-HT20 2*2MIMO Mode
Mode 11	TX 802.11n-HT40 2*2MIMO Mode
Mode 12	TX 802.11ac-VHT20 2*2MIMO Mode
Mode 13	TX 802.11ac-VHT40 2*2MIMO Mode
Mode 14	TX 802.11ac-VHT80 2*2MIMO Mode
Mode 15	TX 802.11ax-HE20 4*4MIMO Mode
Mode 16	TX 802.11ax-HE40 4*4MIMO Mode
Mode 17	TX 802.11ax-HE80 4*4MIMO Mode
Mode 18	TX 802.11n-HT20 4*4MIMO Mode
Mode 19	TX 802.11n-HT40 4*4MIMO Mode
Mode 20	TX 802.11ac-VHT20 4*4MIMO Mode
Mode 21	TX 802.11ac-VHT40 4*4MIMO Mode
Mode 22	TX 802.11ac-VHT80 4*4MIMO Mode
Mode 23	TX 802.11ax-HE20 4*4MIMO Mode
Mode 24	TX 802.11ax-HE40 4*4MIMO Mode
Mode 25	TX 802.11ax-HE80 4*4MIMO Mode
Mode 26	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 26	TX Mode
For Radiated Test	
Final Test Mode	Description
Mode 1	TX A SISO Mode
Mode 2	TX 802.11n-HT20 SISO Mode
Mode 3	TX 802.11n-HT40 SISO Mode
Mode 4	TX 802.11ac-VHT20 SISO Mode
Mode 5	TX 802.11ac-VHT40 SISO Mode
Mode 6	TX 802.11ac-VHT80 SISO Mode
Mode 7	TX 802.11ax-HE20 SISO Mode
Mode 8	TX 802.11ax-HE40 SISO Mode
Mode 9	TX 802.11ax-HE80 SISO Mode
Mode 10	TX 802.11n-HT20 2*2MIMO Mode
Mode 11	TX 802.11n-HT40 2*2MIMO Mode
Mode 12	TX 802.11ac-VHT20 2*2MIMO Mode
Mode 13	TX 802.11ac-VHT40 2*2MIMO Mode
Mode 14	TX 802.11ac-VHT80 2*2MIMO Mode
Mode 15	TX 802.11ax-HE20 4*4MIMO Mode
Mode 16	TX 802.11ax-HE40 4*4MIMO Mode
Mode 17	TX 802.11ax-HE80 4*4MIMO Mode
Mode 18	TX 802.11n-HT20 4*4MIMO Mode
Mode 19	TX 802.11n-HT40 4*4MIMO Mode
Mode 20	TX 802.11ac-VHT20 4*4MIMO Mode
Mode 21	TX 802.11ac-VHT40 4*4MIMO Mode
Mode 22	TX 802.11ac-VHT80 4*4MIMO Mode
Mode 23	TX 802.11ax-HE20 4*4MIMO Mode
Mode 24	TX 802.11ax-HE40 4*4MIMO Mode
Mode 25	TX 802.11ax-HE80 4*4MIMO Mode

1.5. Table for Supporting Units

No.	Equipment	Brand Name	Model Name	Manufacturer	Serial No.	Note
1	Laptop	HP	TPN-Q221	HP	5CD14347QB	FCC DOC

1.6. Laboratory Facilities

FCC-Registration No.: 406086

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Jun. 30th, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

2. 47 CFR Part 15E Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

For fixed point-to-point access points operating in the band 5.15-5.25 GHz, Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

For fixed point-to-point U-NII devices operating in the band 5.725-5.850 GHz, may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

2.1.2. Antenna Information

Antenna Category: Internal Antenna

A internal Antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

Antenna General Information:

No.	EUT	Ant. Type	Operating frequency range	Antenna No.	Ant. Gain
1	LTE Turbo UE	Internal	UNII-1, UNII-3	ANT 0/1/2/3/4/5	10.0dBi

2.1.3. Result: comply

The EUT has six permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Maximum Conducted Output Power

2.2.1. Limit of Maximum Conducted Output Power

FCC Part 15.407(a)

The maximum conducted output power should not exceed:


Band	EUT Category	Limit
U-NII-1	☐ Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21dBm) at any elevation angle above 30 degrees as measured from the horizon)
	☒ Fixed point-to-point Access device	1 Watt (30 dBm)
	☐ Indoor Access Point	1 Watt (30 dBm)
	☐ Mobile and portable client device	250mW (24 dBm)
U-NII-3	☒	1 Watt (30 dBm)

Note: B* is the 26 dB emission bandwidth in MHz.

2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3. Test Setup

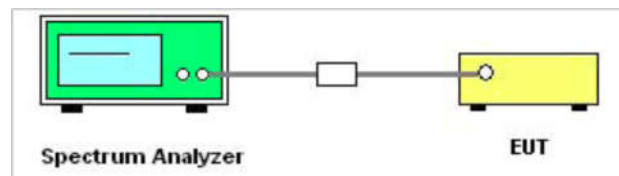

2.2.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.E.2.b and ANSI C63.10-2013 Section 12.3.2.2.
2. The RF output of EUT was connected to spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Power is calculated by integrating over the spectrum of the entire 99% OBW signal using the instrument's band power measurement feature.
4. Set span to encompass the entire 99% OBW of the signal.
5. Set RBW = 1MHz, VBW $\geq$ 3MHz, Sweep time = Auto, Detector = power averaging (RMS).
6. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Replace the EUT center frequency and repeat steps 3~7.



2.2.5. Test Results of Maximum Conducted Output Power

Please refer to APPENDIX A for detail

2.3. Power spectral density (PSD)

2.3.1. Limit of Power Spectral Density

FCC Part 15.407(a)


The maximum power spectral density should not exceed:

Band	EUT Category	Limit
U-NII-1	☐ Outdoor Access Point	17 dBm/MHz
	☒ Fixed point-to-point Access device	
	☒ Indoor Access Point	
	☐ Mobile and portable client device	11 dBm/MHz
U-NII-3	☒	30dBm/500kHz

2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.3.3. Test Setup

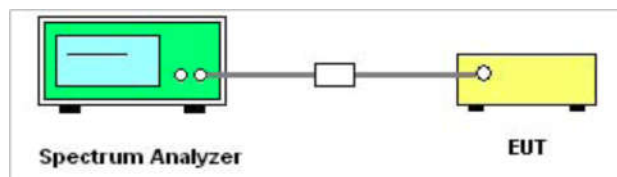

2.3.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.F and ANSI C63.10-2013 Section 12.5.
2. The RF output of EUT was connected to spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set span to encompass the entire 99% OBW of the signal.
4. For U-NII-1 Band: Set RBW = 1MHz, VBW $\geq$ 3MHz, Sweep time = Auto, Detector = power averaging (RMS).
5. For U-NII-3 Band: Set RBW = 500kHz, VBW $\geq$ 3MHz, Sweep time = Auto, Detector = power averaging (RMS).
6. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.
9. Replace the EUT center frequency and repeat steps 3~8.

2.3.5. Test Result of Power Spectral Density

Please refer to APPENDIX A for detail

2.4. Emission Bandwidth and Occupied Bandwidth

2.4.1. Limit of Emission Bandwidth and Occupied Bandwidth


26dB Emission Bandwidth and 99% Occupied Bandwidth no Bandwidth limit.

The minimum 6dB bandwidth of U-NII-3 shall be at least 500 kHz.

2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3. Test Description

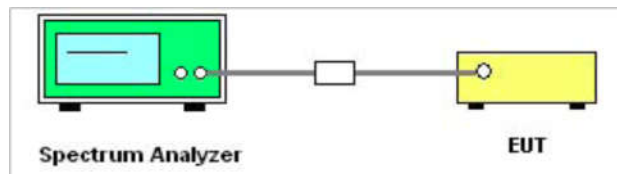

2.4.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.C.D and ANSI C63.10-2013 Section 12.4.
2. The RF output of EUT was connected to spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Use the spectrum analyzer “Channel Bandwidth” function to easurement the 26dB EBW, 6dB EBW and 99% OBW.
4. Set center frequency to the nominal EUT channel center frequency.
5. Set span = 1.5 times to 5.0 times the OBW or EBW.
6. For 26dB EBW and 99% OBW Measurement:
Set RBW = approximately 1% EBW or 1.5 times to 5.0 times the OBW, $VBW \geq 3 \times RBW$.
7. For 6dB EBW Measurement:
Set RBW =100kHz, $VBW \geq 3 \times RBW$.
8. Set Detector = Peak, Trace mode = max hold and Sweep time = auto couple.
9. Allow the trace to stabilize.
10. Replace the EUT center frequency and repeat steps 3~9.

2.4.5. Test Results of Emission Bandwidth and Occupied Bandwidth

Please refer to APPENDIX A for detail

2.5. Frequency Stability


2.5.1. Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.5.3. Test Setup

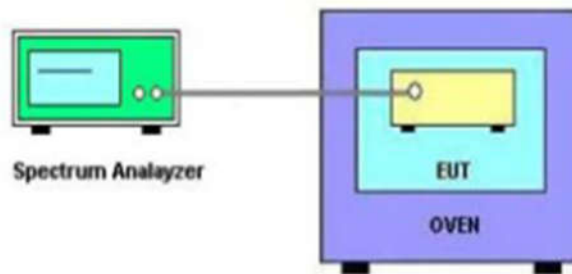

2.5.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.A.3 and ANSI C63.10-2013 Section 6.8.
2. The EUT is installed in an environment test chamber with external power source, was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set the chamber to operate at 50°C and external power source to output at nominal voltage of EUT.
5. A sufficient stabilization period at each temperatures in used prior to each frequency measurement.
6. The test shall be performed under -30°C to 50°C and 85% to 115% of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
7. Replace the EUT center frequency and repeat steps 3~6.

2.5.5. Test Result of Frequency Stability

Please refer to APPENDIX A for detail

2.6. Radiated Band Edge and Spurious Emission

2.6.1. Limit of Radiated Band Edges and Spurious Emission

Radiated emission which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level ($\mu\text{V/m}$).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

FCC Part 15.407(b)			
Frequency Band (MHz)	Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength @3m (dB $\mu\text{V/m}$)
5150 - 5250	Outside of the 5.15~5.35 GHz	-27	68.2
5725 - 5850	< 5650	-27	68.2
	5650~5700	-27~10	68.2~105.2
	5700~5720	10~15.6	105.2~110.8
	5720~5725	15.6~27	110.8~122.2
	5850~5855	27~15.6	122.2~110.8
	5855~5875	15.6~10	110.8~105.2
	5875~5925	10~-27	105.2~68.2
	> 5925	-27	68.2

Note:

- 1) $\text{EIRP}[\text{dBm}] = \text{E}[\text{dB}\mu\text{V/m}] + 20 \log (d[\text{m}]) - 104.77$, d is the measurement distance in m.
- 2) $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V/m}$, for $\text{EIRP}[\text{dBm}] = -27\text{dBm}$.
 $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 105.2 \text{ dB}\mu\text{V/m}$, for $\text{EIRP}[\text{dBm}] = 10\text{dBm}$.
 $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 110.8 \text{ dB}\mu\text{V/m}$, for $\text{EIRP}[\text{dBm}] = 15.6\text{dBm}$.
 $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 122.2 \text{ dB}\mu\text{V/m}$, for $\text{EIRP}[\text{dBm}] = 27\text{dBm}$.

Applicable To	Limit	
KDB 789033 D02 General UNII Test Procedures New Rules v02r01	Field Strength at 3m	
	PK: 68.2(dB μ V/m)	AV: 54 (dB μ V/m)

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41	/	/	/


Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
²Above 38.6.

2.6.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.6.3. Test Setup


For radiated emissions from 9 kHz to 30 MHz

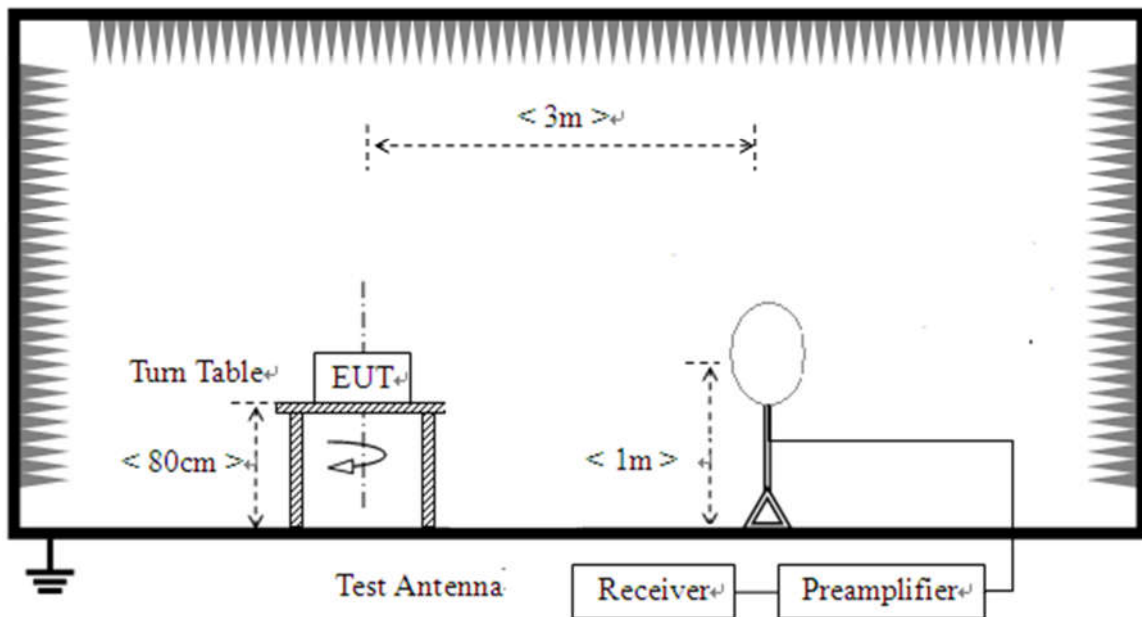

For radiated emissions from 30MHz to 1GHz

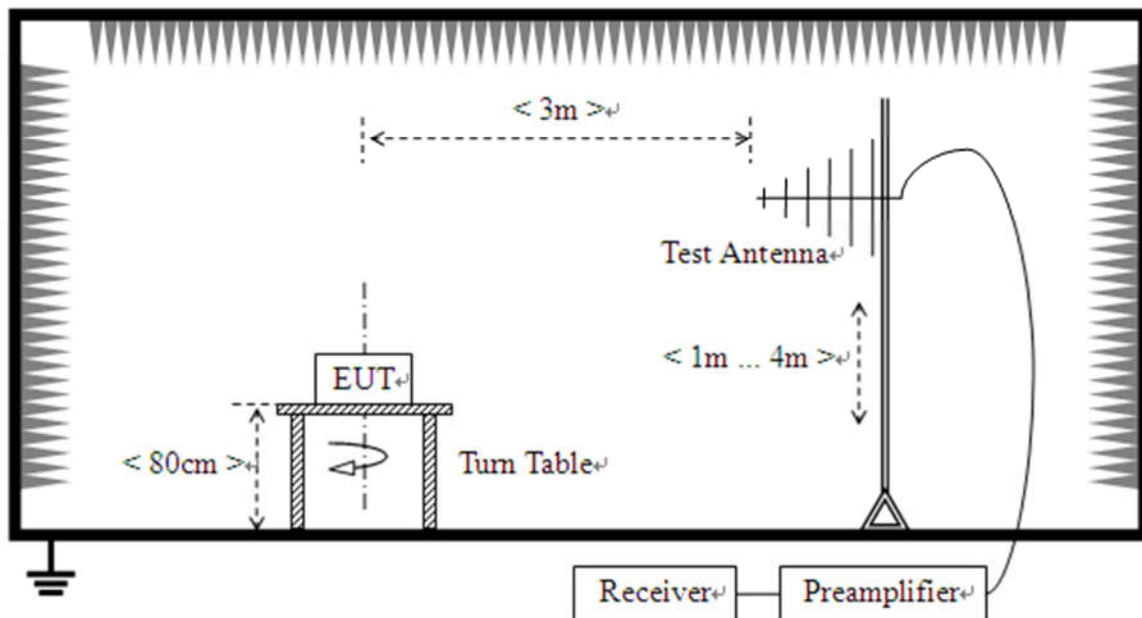

For radiated emissions above 1GHz

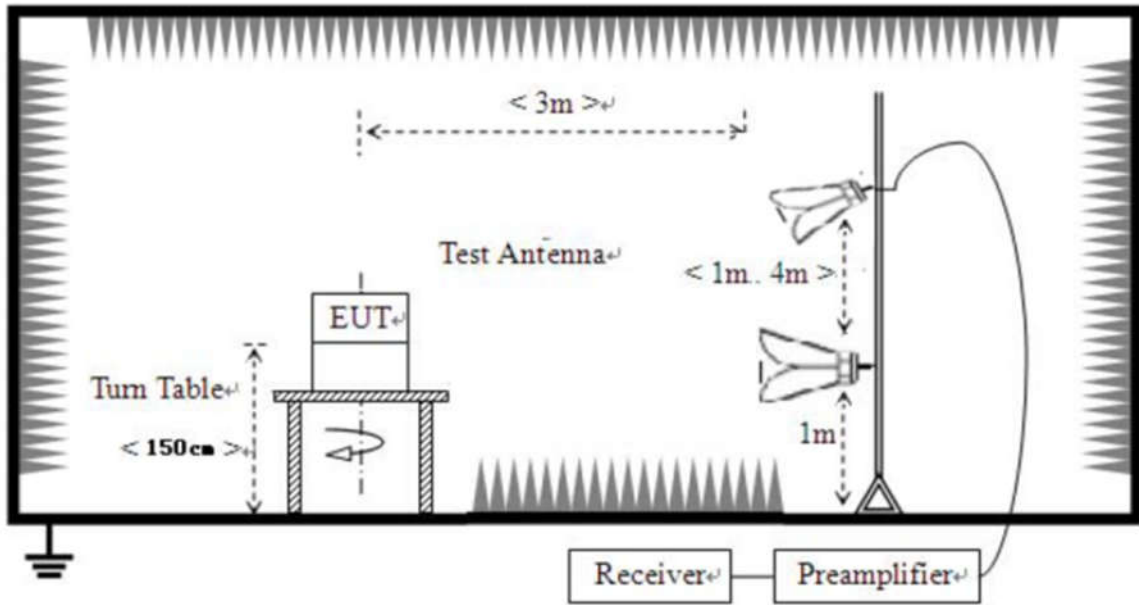

2.6.4. Test Procedures

1. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
6. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. Only worst-Case mode data provide here, 802.11a (20MHz) 5180MHz for Below 1GHz.

2.6.5. Test Result of Radiated Band Edge and Spurious Emission

For 9 kHz to 30MHz

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For 30MHz to 1000 MHz

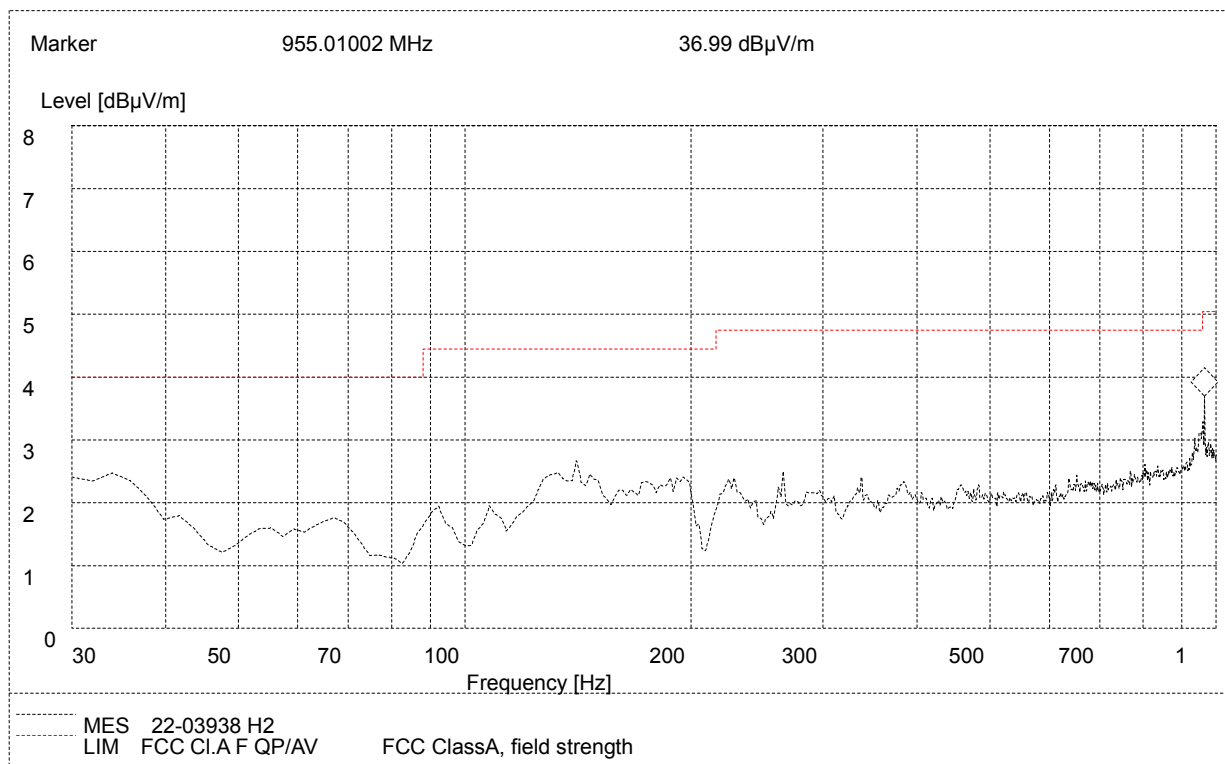


Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Corr.Factor (dB/m)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Polarity
30.000000	22.04	120.000	19.3	100.0	40.0	17.96	Horizontal
33.880000	22.04	120.000	16.7	100.0	40.0	17.96	Horizontal
140.800000	22.14	120.000	12.6	100.0	43.5	21.36	Horizontal
191.340000	22.33	120.000	10.0	100.0	43.5	21.17	Horizontal
265.210000	24.01	120.000	15.1	100.0	46.0	21.99	Horizontal
955.010000	35.04	120.000	25.8	100.0	46.0	10.96	Horizontal

Test Result : Pass

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

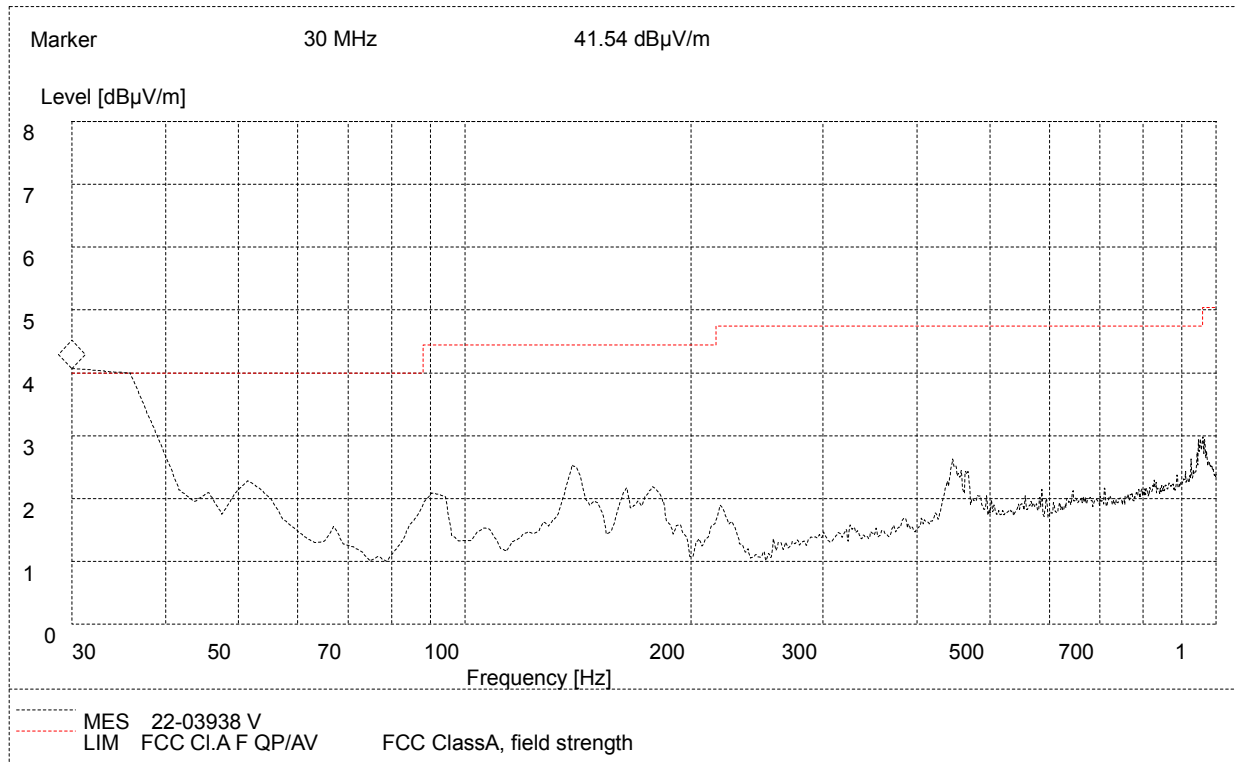

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Corr.Factor (dB/m)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Polarity
30.000000	38.05	120.000	19.3	100.0	40.0	1.95	Vertical
35.830000	39.15	120.000	16.7	100.0	40.0	0.85	Vertical
140.800000	27.06	120.000	12.6	100.0	43.5	16.44	Vertical
177.730000	24.15	120.000	11.9	100.0	43.5	19.35	Vertical
449.870000	28.14	120.000	18.9	100.0	46.0	17.86	Vertical
958.170000	32.04	120.000	25.8	100.0	46.0	13.96	Vertical

Test Result : Pass

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value – Emission Level.
4. The other emission levels were very low against the limit.

For 1GHz to 40 GHz (module QCN9024)

U-NII-1_802.11a_5180MHz - ANT0									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.29	68.20	-15.91	1.60	200	44.79	7.50	Horizontal	Peak
5150.00	40.98	54.00	-13.02	1.60	200	33.48	7.50	Horizontal	Average
10360.00	54.71	68.20	-13.49	1.60	200	34.91	19.80	Horizontal	Peak
10360.00	42.67	54.00	-11.33	1.60	200	22.87	19.80	Horizontal	Average
5150.00	52.10	68.20	-16.10	1.70	180	44.60	7.50	Vertical	Peak
5150.00	40.16	54.00	-13.84	1.70	180	32.66	7.50	Vertical	Average
10360.00	52.65	68.20	-15.55	1.70	180	32.85	19.80	Vertical	Peak
10360.00	43.12	54.00	-10.88	1.70	180	23.32	19.80	Vertical	Average
U-NII-1_802.11a_5220MHz - ANT0									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	54.32	68.20	-13.88	1.60	200	34.42	19.90	Horizontal	Peak
10440.00	42.20	54.00	-11.80	1.60	200	22.30	19.90	Horizontal	Average
10440.00	53.07	68.20	-15.13	1.70	180	33.17	19.90	Vertical	Peak
10440.00	43.19	54.00	-10.81	1.70	180	23.29	19.90	Vertical	Average
U-NII-1_802.11a_5240MHz - ANT0									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.21	68.20	-14.99	1.60	200	45.21	8.00	Horizontal	Peak
5350.00	41.31	54.00	-12.69	1.60	200	33.31	8.00	Horizontal	Average
10480.00	55.13	68.20	-13.07	1.60	200	35.23	19.90	Horizontal	Peak
10480.00	42.63	54.00	-11.37	1.60	200	22.73	19.90	Horizontal	Average
5350.00	52.61	68.20	-15.59	1.70	180	44.61	8.00	Vertical	Peak
5350.00	41.47	54.00	-12.53	1.70	180	33.47	8.00	Vertical	Average
10480.00	52.58	68.20	-15.62	1.70	180	32.68	19.90	Vertical	Peak
10480.00	42.75	54.00	-11.25	1.70	180	22.85	19.90	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

U-NII-1_802.11a_5180MHz - ANT1

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.35	68.20	-15.85	1.60	200	44.85	7.50	Horizontal	Peak
5150.00	41.31	54.00	-12.69	1.60	200	33.81	7.50	Horizontal	Average
10360.00	54.55	68.20	-13.65	1.60	200	34.75	19.80	Horizontal	Peak
10360.00	42.02	54.00	-11.98	1.60	200	22.22	19.80	Horizontal	Average
5150.00	53.00	68.20	-15.20	1.70	180	45.50	7.50	Vertical	Peak
5150.00	40.69	54.00	-13.31	1.70	180	33.19	7.50	Vertical	Average
10360.00	53.05	68.20	-15.15	1.70	180	33.25	19.80	Vertical	Peak
10360.00	43.11	54.00	-10.89	1.70	180	23.31	19.80	Vertical	Average

U-NII-1_802.11a_5220MHz - ANT1

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	53.73	68.20	-14.47	1.60	200	33.83	19.90	Horizontal	Peak
10440.00	41.74	54.00	-12.26	1.60	200	21.84	19.90	Horizontal	Average
10440.00	53.54	68.20	-14.66	1.70	180	33.64	19.90	Vertical	Peak
10440.00	42.63	54.00	-11.37	1.70	180	22.73	19.90	Vertical	Average

U-NII-1_802.11a_5240MHz - ANT1

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.43	68.20	-14.77	1.60	200	45.43	8.00	Horizontal	Peak
5350.00	41.24	54.00	-12.76	1.60	200	33.24	8.00	Horizontal	Average
10480.00	54.91	68.20	-13.29	1.60	200	35.01	19.90	Horizontal	Peak
10480.00	42.60	54.00	-11.40	1.60	200	22.70	19.90	Horizontal	Average
5350.00	51.79	68.20	-16.41	1.70	180	43.79	8.00	Vertical	Peak
5350.00	41.24	54.00	-12.76	1.70	180	33.24	8.00	Vertical	Average
10480.00	52.72	68.20	-15.48	1.70	180	32.82	19.90	Vertical	Peak
10480.00	42.41	54.00	-11.59	1.70	180	22.51	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-1_802.11a_5180MHz - ANT2

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.48	68.20	-15.72	1.60	200	44.98	7.50	Horizontal	Peak
5150.00	41.27	54.00	-12.73	1.60	200	33.77	7.50	Horizontal	Average
10360.00	54.77	68.20	-13.43	1.60	200	34.97	19.80	Horizontal	Peak
10360.00	42.31	54.00	-11.69	1.60	200	22.51	19.80	Horizontal	Average
5150.00	52.57	68.20	-15.63	1.70	180	45.07	7.50	Vertical	Peak
5150.00	40.64	54.00	-13.36	1.70	180	33.14	7.50	Vertical	Average
10360.00	52.58	68.20	-15.62	1.70	180	32.78	19.80	Vertical	Peak
10360.00	43.17	54.00	-10.83	1.70	180	23.37	19.80	Vertical	Average

U-NII-1_802.11a_5220MHz - ANT2

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	54.22	68.20	-13.98	1.60	200	34.32	19.90	Horizontal	Peak
10440.00	42.21	54.00	-11.79	1.60	200	22.31	19.90	Horizontal	Average
10440.00	53.30	68.20	-14.90	1.70	180	33.40	19.90	Vertical	Peak
10440.00	43.01	54.00	-10.99	1.70	180	23.11	19.90	Vertical	Average

U-NII-1_802.11a_5240MHz - ANT2

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	52.96	68.20	-15.24	1.60	200	44.96	8.00	Horizontal	Peak
5350.00	41.25	54.00	-12.75	1.60	200	33.25	8.00	Horizontal	Average
10480.00	55.00	68.20	-13.20	1.60	200	35.10	19.90	Horizontal	Peak
10480.00	42.43	54.00	-11.57	1.60	200	22.53	19.90	Horizontal	Average
5350.00	52.13	68.20	-16.07	1.70	180	44.13	8.00	Vertical	Peak
5350.00	41.61	54.00	-12.39	1.70	180	33.61	8.00	Vertical	Average
10480.00	52.95	68.20	-15.25	1.70	180	33.05	19.90	Vertical	Peak
10480.00	42.57	54.00	-11.43	1.70	180	22.67	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-1_802.11a_5180MHz - ANT3

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.23	68.20	-15.97	1.60	200	44.73	7.50	Horizontal	Peak
5150.00	41.72	54.00	-12.28	1.60	200	34.22	7.50	Horizontal	Average
10360.00	54.88	68.20	-13.32	1.60	200	35.08	19.80	Horizontal	Peak
10360.00	41.60	54.00	-12.40	1.60	200	21.80	19.80	Horizontal	Average
5150.00	53.07	68.20	-15.13	1.70	180	45.57	7.50	Vertical	Peak
5150.00	40.73	54.00	-13.27	1.70	180	33.23	7.50	Vertical	Average
10360.00	53.23	68.20	-14.97	1.70	180	33.43	19.80	Vertical	Peak
10360.00	43.37	54.00	-10.63	1.70	180	23.57	19.80	Vertical	Average

U-NII-1_802.11a_5220MHz - ANT3

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	53.56	68.20	-14.64	1.60	200	33.66	19.90	Horizontal	Peak
10440.00	42.08	54.00	-11.92	1.60	200	22.18	19.90	Horizontal	Average
10440.00	53.82	68.20	-14.38	1.70	180	33.92	19.90	Vertical	Peak
10440.00	43.12	54.00	-10.88	1.70	180	23.22	19.90	Vertical	Average

U-NII-1_802.11a_5240MHz - ANT3

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.65	68.20	-14.55	1.60	200	45.65	8.00	Horizontal	Peak
5350.00	41.59	54.00	-12.41	1.60	200	33.59	8.00	Horizontal	Average
10480.00	54.71	68.20	-13.49	1.60	200	34.81	19.90	Horizontal	Peak
10480.00	42.81	54.00	-11.19	1.60	200	22.91	19.90	Horizontal	Average
5350.00	51.66	68.20	-16.54	1.70	180	43.66	8.00	Vertical	Peak
5350.00	41.14	54.00	-12.86	1.70	180	33.14	8.00	Vertical	Average
10480.00	52.73	68.20	-15.47	1.70	180	32.83	19.90	Vertical	Peak
10480.00	42.85	54.00	-11.15	1.70	180	22.95	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-1_802.11a_5180MHz - ANT4

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	51.75	68.20	-16.45	1.50	180	44.25	7.50	Horizontal	Peak
5150.00	41.38	54.00	-12.62	1.50	180	33.88	7.50	Horizontal	Average
10360.00	55.17	68.20	-13.03	1.50	180	35.37	19.80	Horizontal	Peak
10360.00	41.29	54.00	-12.71	1.50	180	21.49	19.80	Horizontal	Average
5150.00	53.42	68.20	-14.78	1.60	120	45.92	7.50	Vertical	Peak
5150.00	40.38	54.00	-13.62	1.60	120	32.88	7.50	Vertical	Average
10360.00	53.56	68.20	-14.64	1.60	120	33.76	19.80	Vertical	Peak
10360.00	43.11	54.00	-10.89	1.60	120	23.31	19.80	Vertical	Average

U-NII-1_802.11a_5220MHz - ANT4

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	53.18	68.20	-15.02	1.50	180	33.28	19.90	Horizontal	Peak
10440.00	42.32	54.00	-11.68	1.50	180	22.42	19.90	Horizontal	Average
10440.00	53.48	68.20	-14.72	1.60	120	33.58	19.90	Vertical	Peak
10440.00	43.24	54.00	-10.76	1.60	120	23.34	19.90	Vertical	Average

U-NII-1_802.11a_5240MHz - ANT4

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.55	68.20	-14.65	1.50	180	45.55	8.00	Horizontal	Peak
5350.00	41.98	54.00	-12.02	1.50	180	33.98	8.00	Horizontal	Average
10480.00	54.44	68.20	-13.76	1.50	180	34.54	19.90	Horizontal	Peak
10480.00	42.74	54.00	-11.26	1.50	180	22.84	19.90	Horizontal	Average
5350.00	51.96	68.20	-16.24	1.60	120	43.96	8.00	Vertical	Peak
5350.00	40.82	54.00	-13.18	1.60	120	32.82	8.00	Vertical	Average
10480.00	52.31	68.20	-15.89	1.60	120	32.41	19.90	Vertical	Peak
10480.00	43.19	54.00	-10.81	1.60	120	23.29	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-1_802.11a_5180MHz - ANT5

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.00	68.20	-16.20	1.50	180	44.50	7.50	Horizontal	Peak
5150.00	41.07	54.00	-12.93	1.50	180	33.57	7.50	Horizontal	Average
10360.00	54.54	68.20	-13.66	1.50	180	34.74	19.80	Horizontal	Peak
10360.00	41.59	54.00	-12.41	1.50	180	21.79	19.80	Horizontal	Average
5150.00	52.57	68.20	-15.63	1.60	120	45.07	7.50	Vertical	Peak
5150.00	40.29	54.00	-13.71	1.60	120	32.79	7.50	Vertical	Average
10360.00	53.37	68.20	-14.83	1.60	120	33.57	19.80	Vertical	Peak
10360.00	42.82	54.00	-11.18	1.60	120	23.02	19.80	Vertical	Average

U-NII-1_802.11a_5220MHz - ANT5

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	53.40	68.20	-14.80	1.50	180	33.50	19.90	Horizontal	Peak
10440.00	41.50	54.00	-12.50	1.50	180	21.60	19.90	Horizontal	Average
10440.00	53.54	68.20	-14.66	1.60	120	33.64	19.90	Vertical	Peak
10440.00	42.23	54.00	-11.77	1.60	120	22.33	19.90	Vertical	Average

U-NII-1_802.11a_5240MHz - ANT5

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.54	68.20	-14.66	1.50	180	45.54	8.00	Horizontal	Peak
5350.00	41.55	54.00	-12.45	1.50	180	33.55	8.00	Horizontal	Average
10480.00	55.16	68.20	-13.04	1.50	180	35.26	19.90	Horizontal	Peak
10480.00	42.77	54.00	-11.23	1.50	180	22.87	19.90	Horizontal	Average
5350.00	51.94	68.20	-16.26	1.60	120	43.94	8.00	Vertical	Peak
5350.00	41.01	54.00	-12.99	1.60	120	33.01	8.00	Vertical	Average
10480.00	52.93	68.20	-15.27	1.60	120	33.03	19.90	Vertical	Peak
10480.00	42.35	54.00	-11.65	1.60	120	22.45	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-1_802.11n-HT20_5180MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.70	68.20	-15.50	1.60	200	45.20	7.50	Horizontal	Peak
5150.00	41.12	54.00	-12.88	1.60	200	33.62	7.50	Horizontal	Average
10360.00	54.93	68.20	-13.27	1.60	200	35.13	19.80	Horizontal	Peak
10360.00	42.60	54.00	-11.40	1.60	200	22.80	19.80	Horizontal	Average
5150.00	52.43	68.20	-15.77	1.70	180	44.93	7.50	Vertical	Peak
5150.00	40.14	54.00	-13.86	1.70	180	32.64	7.50	Vertical	Average
10360.00	52.21	68.20	-15.99	1.70	180	32.41	19.80	Vertical	Peak
10360.00	43.18	54.00	-10.82	1.70	180	23.38	19.80	Vertical	Average

U-NII-1_802.11n-HT20_5220MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	54.21	68.20	-13.99	1.60	200	34.31	19.90	Horizontal	Peak
10440.00	42.05	54.00	-11.95	1.60	200	22.15	19.90	Horizontal	Average
10440.00	53.51	68.20	-14.69	1.70	180	33.61	19.90	Vertical	Peak
10440.00	42.84	54.00	-11.16	1.70	180	22.94	19.90	Vertical	Average

U-NII-1_802.11n-HT20_5240MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.22	68.20	-14.98	1.60	200	45.22	8.00	Horizontal	Peak
5350.00	41.01	54.00	-12.99	1.60	200	33.01	8.00	Horizontal	Average
10480.00	55.19	68.20	-13.01	1.60	200	35.29	19.90	Horizontal	Peak
10480.00	42.91	54.00	-11.09	1.60	200	23.01	19.90	Horizontal	Average
5350.00	52.55	68.20	-15.65	1.70	180	44.55	8.00	Vertical	Peak
5350.00	41.82	54.00	-12.18	1.70	180	33.82	8.00	Vertical	Average
10480.00	52.50	68.20	-15.70	1.70	180	32.60	19.90	Vertical	Peak
10480.00	42.68	54.00	-11.32	1.70	180	22.78	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

U-NII-1_802.11ac-VHT20_5180MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.95	68.20	-15.25	1.60	200	45.45	7.50	Horizontal	Peak
5150.00	40.69	54.00	-13.31	1.60	200	33.19	7.50	Horizontal	Average
10360.00	54.57	68.20	-13.63	1.60	200	34.77	19.80	Horizontal	Peak
10360.00	42.48	54.00	-11.52	1.60	200	22.68	19.80	Horizontal	Average
5150.00	52.65	68.20	-15.55	1.70	180	45.15	7.50	Vertical	Peak
5150.00	40.37	54.00	-13.63	1.70	180	32.87	7.50	Vertical	Average
10360.00	52.01	68.20	-16.19	1.70	180	32.21	19.80	Vertical	Peak
10360.00	43.30	54.00	-10.70	1.70	180	23.50	19.80	Vertical	Average

U-NII-1_802.11ac-VHT20_5220MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	54.58	68.20	-13.62	1.60	200	34.68	19.90	Horizontal	Peak
10440.00	41.72	54.00	-12.28	1.60	200	21.82	19.90	Horizontal	Average
10440.00	53.51	68.20	-14.69	1.70	180	33.61	19.90	Vertical	Peak
10440.00	42.90	54.00	-11.10	1.70	180	23.00	19.90	Vertical	Average

U-NII-1_802.11ac-VHT20_5240MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	52.88	68.20	-15.32	1.60	200	44.88	8.00	Horizontal	Peak
5350.00	41.32	54.00	-12.68	1.60	200	33.32	8.00	Horizontal	Average
10480.00	55.53	68.20	-12.67	1.60	200	35.63	19.90	Horizontal	Peak
10480.00	43.15	54.00	-10.85	1.60	200	23.25	19.90	Horizontal	Average
5350.00	52.34	68.20	-15.86	1.70	180	44.34	8.00	Vertical	Peak
5350.00	41.44	54.00	-12.56	1.70	180	33.44	8.00	Vertical	Average
10480.00	52.45	68.20	-15.75	1.70	180	32.55	19.90	Vertical	Peak
10480.00	42.31	54.00	-11.69	1.70	180	22.41	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

U-NII-1_802.11ax-HE20_5180MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	53.39	68.20	-14.81	1.60	200	45.89	7.50	Horizontal	Peak
5150.00	40.36	54.00	-13.64	1.60	200	32.86	7.50	Horizontal	Average
10360.00	54.18	68.20	-14.02	1.60	200	34.38	19.80	Horizontal	Peak
10360.00	42.79	54.00	-11.21	1.60	200	22.99	19.80	Horizontal	Average
5150.00	52.83	68.20	-15.37	1.70	180	45.33	7.50	Vertical	Peak
5150.00	40.69	54.00	-13.31	1.70	180	33.19	7.50	Vertical	Average
10360.00	51.94	68.20	-16.26	1.70	180	32.14	19.80	Vertical	Peak
10360.00	43.74	54.00	-10.26	1.70	180	23.94	19.80	Vertical	Average

U-NII-1_802.11ax-HE20_5220MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	54.50	68.20	-13.70	1.60	200	34.60	19.90	Horizontal	Peak
10440.00	41.87	54.00	-12.13	1.60	200	21.97	19.90	Horizontal	Average
10440.00	53.50	68.20	-14.70	1.70	180	33.60	19.90	Vertical	Peak
10440.00	42.59	54.00	-11.41	1.70	180	22.69	19.90	Vertical	Average

U-NII-1_802.11ax-HE20_5240MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.24	68.20	-14.96	1.60	200	45.24	8.00	Horizontal	Peak
5350.00	40.98	54.00	-13.02	1.60	200	32.98	8.00	Horizontal	Average
10480.00	55.27	68.20	-12.93	1.60	200	35.37	19.90	Horizontal	Peak
10480.00	42.94	54.00	-11.06	1.60	200	23.04	19.90	Horizontal	Average
5350.00	51.98	68.20	-16.22	1.70	180	43.98	8.00	Vertical	Peak
5350.00	41.84	54.00	-12.16	1.70	180	33.84	8.00	Vertical	Average
10480.00	52.16	68.20	-16.04	1.70	180	32.26	19.90	Vertical	Peak
10480.00	42.59	54.00	-11.41	1.70	180	22.69	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

U-NII-1_802.11n-HT40_5190MHz - 4×4 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	53.55	68.20	-14.65	1.60	200	46.05	7.50	Horizontal	Peak
5150.00	41.51	54.00	-12.49	1.60	200	34.01	7.50	Horizontal	Average
10380.00	55.07	68.20	-13.13	1.60	200	35.27	19.80	Horizontal	Peak
10380.00	42.91	54.00	-11.09	1.60	200	23.11	19.80	Horizontal	Average
5150.00	52.88	68.20	-15.32	1.70	180	45.38	7.50	Vertical	Peak
5150.00	41.24	54.00	-12.76	1.70	180	33.74	7.50	Vertical	Average
10380.00	52.77	68.20	-15.43	1.70	180	32.97	19.80	Vertical	Peak
10380.00	42.83	54.00	-11.17	1.70	180	23.03	19.80	Vertical	Average

U-NII-1_802.11n-HT40_5230MHz - 4×4 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	52.84	68.20	-15.36	1.60	200	44.84	8.00	Horizontal	Peak
5350.00	40.94	54.00	-13.06	1.60	200	32.94	8.00	Horizontal	Average
10460.00	55.14	68.20	-13.06	1.60	200	35.24	19.90	Horizontal	Peak
10460.00	43.06	54.00	-10.94	1.60	200	23.16	19.90	Horizontal	Average
5350.00	53.01	68.20	-15.19	1.70	180	45.01	8.00	Vertical	Peak
5350.00	41.05	54.00	-12.95	1.70	180	33.05	8.00	Vertical	Average
10460.00	52.01	68.20	-16.19	1.70	180	32.11	19.90	Vertical	Peak
10460.00	42.29	54.00	-11.71	1.70	180	22.39	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

U-NII-1_802.11ac-VHT40_5190MHz - 4×4 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	53.69	68.20	-14.51	1.60	200	46.19	7.50	Horizontal	Peak
5150.00	41.78	54.00	-12.22	1.60	200	34.28	7.50	Horizontal	Average
10380.00	54.73	68.20	-13.47	1.60	200	34.93	19.80	Horizontal	Peak
10380.00	42.94	54.00	-11.06	1.60	200	23.14	19.80	Horizontal	Average
5150.00	53.05	68.20	-15.15	1.70	180	45.55	7.50	Vertical	Peak
5150.00	41.71	54.00	-12.29	1.70	180	34.21	7.50	Vertical	Average
10380.00	53.11	68.20	-15.09	1.70	180	33.31	19.80	Vertical	Peak
10380.00	42.36	54.00	-11.64	1.70	180	22.56	19.80	Vertical	Average

U-NII-1_802.11ac-VHT40_5230MHz - 4×4 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	52.52	68.20	-15.68	1.60	200	44.52	8.00	Horizontal	Peak
5350.00	41.20	54.00	-12.80	1.60	200	33.20	8.00	Horizontal	Average
10460.00	55.17	68.20	-13.03	1.60	200	35.27	19.90	Horizontal	Peak
10460.00	43.02	54.00	-10.98	1.60	200	23.12	19.90	Horizontal	Average
5350.00	52.68	68.20	-15.52	1.70	180	44.68	8.00	Vertical	Peak
5350.00	40.95	54.00	-13.05	1.70	180	32.95	8.00	Vertical	Average
10460.00	52.18	68.20	-16.02	1.70	180	32.28	19.90	Vertical	Peak
10460.00	42.58	54.00	-11.42	1.70	180	22.68	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

U-NII-1_802.11ax-HE40_5190MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	54.01	68.20	-14.19	1.60	200	46.51	7.50	Horizontal	Peak
5150.00	42.21	54.00	-11.79	1.60	200	34.71	7.50	Horizontal	Average
10380.00	54.39	68.20	-13.81	1.60	200	34.59	19.80	Horizontal	Peak
10380.00	42.45	54.00	-11.55	1.60	200	22.65	19.80	Horizontal	Average
5150.00	53.30	68.20	-14.90	1.70	180	45.80	7.50	Vertical	Peak
5150.00	41.98	54.00	-12.02	1.70	180	34.48	7.50	Vertical	Average
10380.00	53.16	68.20	-15.04	1.70	180	33.36	19.80	Vertical	Peak
10380.00	42.06	54.00	-11.94	1.70	180	22.26	19.80	Vertical	Average
U-NII-1_802.11ax-HE40_5230MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.01	68.20	-15.19	1.60	200	45.01	8.00	Horizontal	Peak
5350.00	40.98	54.00	-13.02	1.60	200	32.98	8.00	Horizontal	Average
10460.00	54.87	68.20	-13.33	1.60	200	34.97	19.90	Horizontal	Peak
10460.00	43.50	54.00	-10.50	1.60	200	23.60	19.90	Horizontal	Average
5350.00	52.84	68.20	-15.36	1.70	180	44.84	8.00	Vertical	Peak
5350.00	40.82	54.00	-13.18	1.70	180	32.82	8.00	Vertical	Average
10460.00	52.53	68.20	-15.67	1.70	180	32.63	19.90	Vertical	Peak
10460.00	43.00	54.00	-11.00	1.70	180	23.10	19.90	Vertical	Average
<i>Remark:</i> 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.									

U-NII-1_802.11ac-VHT80_5210MHz - 4×4 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.07	68.20	-16.13	1.60	200	44.57	7.50	Horizontal	Peak
5150.00	40.75	54.00	-13.25	1.60	200	33.25	7.50	Horizontal	Average
5350.00	52.23	68.20	-15.97	1.60	200	44.23	8.00	Horizontal	Peak
5350.00	41.81	54.00	-12.19	1.60	200	33.81	8.00	Horizontal	Average
10420.00	53.33	68.20	-14.87	1.60	200	33.43	19.90	Horizontal	Peak
10420.00	42.42	54.00	-11.58	1.60	200	22.52	19.90	Horizontal	Average
5150.00	52.04	68.20	-16.16	1.70	180	44.54	7.50	Vertical	Peak
5150.00	41.54	54.00	-12.46	1.70	180	34.04	7.50	Vertical	Average
5350.00	52.63	68.20	-15.57	1.70	180	44.63	8.00	Vertical	Peak
5350.00	41.14	54.00	-12.86	1.70	180	33.14	8.00	Vertical	Average
10420.00	52.37	68.20	-15.83	1.70	180	32.47	19.90	Vertical	Peak
10420.00	41.73	54.00	-12.27	1.70	180	21.83	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

U-NII-1_802.11ax-HE80_5210MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.06	68.20	-16.14	1.60	200	44.56	7.50	Horizontal	Peak
5150.00	41.25	54.00	-12.75	1.60	200	33.75	7.50	Horizontal	Average
5350.00	52.05	68.20	-16.15	1.60	200	44.05	8.00	Horizontal	Peak
5350.00	41.43	54.00	-12.57	1.60	200	33.43	8.00	Horizontal	Average
10420.00	53.38	68.20	-14.82	1.60	200	33.48	19.90	Horizontal	Peak
10420.00	41.94	54.00	-12.06	1.60	200	22.04	19.90	Horizontal	Average
5150.00	52.38	68.20	-15.82	1.70	180	44.88	7.50	Vertical	Peak
5150.00	41.61	54.00	-12.39	1.70	180	34.11	7.50	Vertical	Average
5350.00	52.28	68.20	-15.92	1.70	180	44.28	8.00	Vertical	Peak
5350.00	41.09	54.00	-12.91	1.70	180	33.09	8.00	Vertical	Average
10420.00	52.20	68.20	-16.00	1.70	180	32.30	19.90	Vertical	Peak
10420.00	41.47	54.00	-12.53	1.70	180	21.57	19.90	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.									

(module QCN5052)

U-NII-1_802.11n-HT20_5180MHz - 2×2 MIMO									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.91	68.20	-15.29	1.50	180	45.41	7.50	Horizontal	Peak
5150.00	41.45	54.00	-12.55	1.50	180	33.95	7.50	Horizontal	Average
10360.00	54.65	68.20	-13.55	1.50	180	34.85	19.80	Horizontal	Peak
10360.00	43.29	54.00	-10.71	1.50	180	23.49	19.80	Horizontal	Average
5150.00	51.88	68.20	-16.32	1.60	120	44.38	7.50	Vertical	Peak
5150.00	40.88	54.00	-13.12	1.60	120	33.38	7.50	Vertical	Average
10360.00	52.69	68.20	-15.51	1.60	120	32.89	19.80	Vertical	Peak
10360.00	43.30	54.00	-10.70	1.60	120	23.50	19.80	Vertical	Average

U-NII-1_802.11n-HT20_5220MHz - 2×2 MIMO									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	54.53	68.20	-13.67	1.50	180	34.63	19.90	Horizontal	Peak
10440.00	42.22	54.00	-11.78	1.50	180	22.32	19.90	Horizontal	Average
10440.00	52.97	68.20	-15.23	1.60	120	33.07	19.90	Vertical	Peak
10440.00	43.24	54.00	-10.76	1.60	120	23.34	19.90	Vertical	Average

U-NII-1_802.11n-HT20_5240MHz - 2×2 MIMO									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.21	68.20	-14.99	1.50	180	45.21	8.00	Horizontal	Peak
5350.00	41.31	54.00	-12.69	1.50	180	33.31	8.00	Horizontal	Average
10480.00	55.13	68.20	-13.07	1.50	180	35.23	19.90	Horizontal	Peak
10480.00	42.63	54.00	-11.37	1.50	180	22.73	19.90	Horizontal	Average
5350.00	52.61	68.20	-15.59	1.60	120	44.61	8.00	Vertical	Peak
5350.00	41.47	54.00	-12.53	1.60	120	33.47	8.00	Vertical	Average
10480.00	52.58	68.20	-15.62	1.60	120	32.68	19.90	Vertical	Peak
10480.00	42.75	54.00	-11.25	1.60	120	22.85	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-1_802.11ac-VHT20_5180MHz - 2×2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.58	68.20	-15.62	1.50	180	45.08	7.50	Horizontal	Peak
5150.00	41.09	54.00	-12.91	1.50	180	33.59	7.50	Horizontal	Average
10360.00	54.63	68.20	-13.57	1.50	180	34.83	19.80	Horizontal	Peak
10360.00	42.89	54.00	-11.11	1.50	180	23.09	19.80	Horizontal	Average
5150.00	51.91	68.20	-16.29	1.60	120	44.41	7.50	Vertical	Peak
5150.00	40.45	54.00	-13.55	1.60	120	32.95	7.50	Vertical	Average
10360.00	53.11	68.20	-15.09	1.60	120	33.31	19.80	Vertical	Peak
10360.00	42.81	54.00	-11.19	1.60	120	23.01	19.80	Vertical	Average

U-NII-1_802.11ac-VHT20_5220MHz - 2×2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	54.71	68.20	-13.49	1.50	180	34.81	19.90	Horizontal	Peak
10440.00	42.55	54.00	-11.45	1.50	180	22.65	19.90	Horizontal	Average
10440.00	53.11	68.20	-15.09	1.60	120	33.21	19.90	Vertical	Peak
10440.00	43.40	54.00	-10.60	1.60	120	23.50	19.90	Vertical	Average

U-NII-1_802.11ac-VHT20_5240MHz - 2×2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.42	68.20	-14.78	1.50	180	45.42	8.00	Horizontal	Peak
5350.00	41.66	54.00	-12.34	1.50	180	33.66	8.00	Horizontal	Average
10480.00	54.77	68.20	-13.43	1.50	180	34.87	19.90	Horizontal	Peak
10480.00	42.67	54.00	-11.33	1.50	180	22.77	19.90	Horizontal	Average
5350.00	52.46	68.20	-15.74	1.60	120	44.46	8.00	Vertical	Peak
5350.00	41.16	54.00	-12.84	1.60	120	33.16	8.00	Vertical	Average
10480.00	52.78	68.20	-15.42	1.60	120	32.88	19.90	Vertical	Peak
10480.00	43.16	54.00	-10.84	1.60	120	23.26	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-1_802.11ax-HE20_5180MHz - 2×2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	53.33	68.20	-14.87	1.50	180	45.83	7.50	Horizontal	Peak
5150.00	41.12	54.00	-12.88	1.50	180	33.62	7.50	Horizontal	Average
10360.00	54.83	68.20	-13.37	1.50	180	35.03	19.80	Horizontal	Peak
10360.00	43.46	54.00	-10.54	1.50	180	23.66	19.80	Horizontal	Average
5150.00	51.57	68.20	-16.63	1.60	120	44.07	7.50	Vertical	Peak
5150.00	41.25	54.00	-12.75	1.60	120	33.75	7.50	Vertical	Average
10360.00	52.80	68.20	-15.40	1.60	120	33.00	19.80	Vertical	Peak
10360.00	43.20	54.00	-10.80	1.60	120	23.40	19.80	Vertical	Average

U-NII-1_802.11ax-HE20_5220MHz - 2×2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
10440.00	54.21	68.20	-13.99	1.50	180	34.31	19.90	Horizontal	Peak
10440.00	41.92	54.00	-12.08	1.50	180	22.02	19.90	Horizontal	Average
10440.00	53.33	68.20	-14.87	1.60	120	33.43	19.90	Vertical	Peak
10440.00	43.12	54.00	-10.88	1.60	120	23.22	19.90	Vertical	Average

U-NII-1_802.11ax-HE20_5240MHz - 2×2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	52.98	68.20	-15.22	1.50	180	44.98	8.00	Horizontal	Peak
5350.00	41.32	54.00	-12.68	1.50	180	33.32	8.00	Horizontal	Average
10480.00	54.40	68.20	-13.80	1.50	180	34.50	19.90	Horizontal	Peak
10480.00	42.39	54.00	-11.61	1.50	180	22.49	19.90	Horizontal	Average
5350.00	52.92	68.20	-15.28	1.60	120	44.92	8.00	Vertical	Peak
5350.00	40.88	54.00	-13.12	1.60	120	32.88	8.00	Vertical	Average
10480.00	52.98	68.20	-15.22	1.60	120	33.08	19.90	Vertical	Peak
10480.00	43.24	54.00	-10.76	1.60	120	23.34	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-1_802.11n-HT40_5190MHz - 2×2 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.97	68.20	-15.23	1.50	180	45.47	7.50	Horizontal	Peak
5150.00	41.55	54.00	-12.45	1.50	180	34.05	7.50	Horizontal	Average
10380.00	54.16	68.20	-14.04	1.50	180	34.36	19.80	Horizontal	Peak
10380.00	43.57	54.00	-10.43	1.50	180	23.77	19.80	Horizontal	Average
5150.00	51.83	68.20	-16.37	1.60	120	44.33	7.50	Vertical	Peak
5150.00	40.79	54.00	-13.21	1.60	120	33.29	7.50	Vertical	Average
10380.00	53.01	68.20	-15.19	1.60	120	33.21	19.80	Vertical	Peak
10380.00	43.66	54.00	-10.34	1.60	120	23.86	19.80	Vertical	Average

U-NII-1_802.11n-HT40_5230MHz - 2×2 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.14	68.20	-15.06	1.50	180	45.14	8.00	Horizontal	Peak
5350.00	41.73	54.00	-12.27	1.50	180	33.73	8.00	Horizontal	Average
10460.00	54.83	68.20	-13.37	1.50	180	34.93	19.90	Horizontal	Peak
10460.00	42.56	54.00	-11.44	1.50	180	22.66	19.90	Horizontal	Average
5350.00	53.07	68.20	-15.13	1.60	120	45.07	8.00	Vertical	Peak
5350.00	41.35	54.00	-12.65	1.60	120	33.35	8.00	Vertical	Average
10460.00	52.18	68.20	-16.02	1.60	120	32.28	19.90	Vertical	Peak
10460.00	42.90	54.00	-11.10	1.60	120	23.00	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-1_802.11ac-VHT40_5190MHz - 2×2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.80	68.20	-15.40	1.50	180	45.30	7.50	Horizontal	Peak
5150.00	41.71	54.00	-12.29	1.50	180	34.21	7.50	Horizontal	Average
10380.00	54.12	68.20	-14.08	1.50	180	34.32	19.80	Horizontal	Peak
10380.00	43.71	54.00	-10.29	1.50	180	23.91	19.80	Horizontal	Average
5150.00	51.69	68.20	-16.51	1.60	120	44.19	7.50	Vertical	Peak
5150.00	40.99	54.00	-13.01	1.60	120	33.49	7.50	Vertical	Average
10380.00	53.15	68.20	-15.05	1.60	120	33.35	19.80	Vertical	Peak
10380.00	44.02	54.00	-9.98	1.60	120	24.22	19.80	Vertical	Average

U-NII-1_802.11ac-VHT40_5230MHz - 2×2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.08	68.20	-15.12	1.50	180	45.08	8.00	Horizontal	Peak
5350.00	41.27	54.00	-12.73	1.50	180	33.27	8.00	Horizontal	Average
10460.00	54.84	68.20	-13.36	1.50	180	34.94	19.90	Horizontal	Peak
10460.00	42.16	54.00	-11.84	1.50	180	22.26	19.90	Horizontal	Average
5350.00	53.40	68.20	-14.80	1.60	120	45.40	8.00	Vertical	Peak
5350.00	40.95	54.00	-13.05	1.60	120	32.95	8.00	Vertical	Average
10460.00	51.74	68.20	-16.46	1.60	120	31.84	19.90	Vertical	Peak
10460.00	43.34	54.00	-10.66	1.60	120	23.44	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-1_802.11ax-HE40_5190MHz - 2×2 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.48	68.20	-15.72	1.50	180	44.98	7.50	Horizontal	Peak
5150.00	41.42	54.00	-12.58	1.50	180	33.92	7.50	Horizontal	Average
10380.00	53.73	68.20	-14.47	1.50	180	33.93	19.80	Horizontal	Peak
10380.00	43.42	54.00	-10.58	1.50	180	23.62	19.80	Horizontal	Average
5150.00	52.07	68.20	-16.13	1.60	120	44.57	7.50	Vertical	Peak
5150.00	40.83	54.00	-13.17	1.60	120	33.33	7.50	Vertical	Average
10380.00	52.89	68.20	-15.31	1.60	120	33.09	19.80	Vertical	Peak
10380.00	44.07	54.00	-9.93	1.60	120	24.27	19.80	Vertical	Average
U-NII-1_802.11ax-HE40_5230MHz - 2×2 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	53.28	68.20	-14.92	1.50	180	45.28	8.00	Horizontal	Peak
5350.00	41.05	54.00	-12.95	1.50	180	33.05	8.00	Horizontal	Average
10460.00	54.44	68.20	-13.76	1.50	180	34.54	19.90	Horizontal	Peak
10460.00	41.81	54.00	-12.19	1.50	180	21.91	19.90	Horizontal	Average
5350.00	53.89	68.20	-14.31	1.60	120	45.89	8.00	Vertical	Peak
5350.00	41.42	54.00	-12.58	1.60	120	33.42	8.00	Vertical	Average
10460.00	51.74	68.20	-16.46	1.60	120	31.84	19.90	Vertical	Peak
10460.00	43.71	54.00	-10.29	1.60	120	23.81	19.90	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 4 and ANT 5 is 2*2MIMO.									

U-NII-1_802.11ac-VHT80_5210MHz - 2×2 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.23	68.20	-15.97	1.50	180	44.73	7.50	Horizontal	Peak
5150.00	41.27	54.00	-12.73	1.50	180	33.77	7.50	Horizontal	Average
5350.00	52.45	68.20	-15.75	1.50	180	44.45	8.00	Horizontal	Peak
5350.00	42.62	54.00	-11.38	1.50	180	34.62	8.00	Horizontal	Average
10420.00	53.29	68.20	-14.91	1.50	180	33.39	19.90	Horizontal	Peak
10420.00	41.97	54.00	-12.03	1.50	180	22.07	19.90	Horizontal	Average
5150.00	52.4	68.20	-15.80	1.60	120	44.90	7.50	Vertical	Peak
5150.00	41.24	54.00	-12.76	1.60	120	33.74	7.50	Vertical	Average
5350.00	52.3	68.20	-15.90	1.60	120	44.30	8.00	Vertical	Peak
5350.00	41.16	54.00	-12.84	1.60	120	33.16	8.00	Vertical	Average
10420.00	51.89	68.20	-16.31	1.60	120	31.99	19.90	Vertical	Peak
10420.00	42.69	54.00	-11.31	1.60	120	22.79	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-1_802.11ax-HE80_5210MHz - 2×2 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	52.29	68.20	-15.91	1.50	180	44.79	7.50	Horizontal	Peak
5150.00	40.87	54.00	-13.13	1.50	180	33.37	7.50	Horizontal	Average
5350.00	52.16	68.20	-16.04	1.50	180	44.16	8.00	Horizontal	Peak
5350.00	42.29	54.00	-11.71	1.50	180	34.29	8.00	Horizontal	Average
10420.00	53.15	68.20	-15.05	1.50	180	33.25	19.90	Horizontal	Peak
10420.00	41.96	54.00	-12.04	1.50	180	22.06	19.90	Horizontal	Average
5150.00	52.51	68.20	-15.69	1.60	120	45.01	7.50	Vertical	Peak
5150.00	41.24	54.00	-12.76	1.60	120	33.74	7.50	Vertical	Average
5350.00	52.15	68.20	-16.05	1.60	120	44.15	8.00	Vertical	Peak
5350.00	41.19	54.00	-12.81	1.60	120	33.19	8.00	Vertical	Average
10420.00	52.32	68.20	-15.88	1.60	120	32.42	19.90	Vertical	Peak
10420.00	42.20	54.00	-11.80	1.60	120	22.30	19.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-3_802.11a_5745MHz - ANT0

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.05	68.20	-15.15	1.60	200	43.59	9.46	Horizontal	Peak
5700.00	53.65	105.20	-51.55	1.60	200	44.06	9.59	Horizontal	Peak
5720.00	53.41	110.80	-57.39	1.60	200	43.77	9.64	Horizontal	Peak
5725.00	54.45	122.20	-67.75	1.60	200	44.80	9.65	Horizontal	Peak
11490.00	53.75	68.20	-14.45	1.60	200	32.05	21.70	Horizontal	Peak
11490.00	43.65	54.00	-10.35	1.60	200	21.95	21.70	Horizontal	Average
5650.00	52.55	68.20	-15.65	1.70	180	43.09	9.46	Vertical	Peak
5700.00	53.83	105.20	-51.37	1.70	180	44.24	9.59	Vertical	Peak
5720.00	53.97	110.80	-56.83	1.70	180	44.33	9.64	Vertical	Peak
5725.00	54.26	122.20	-67.94	1.70	180	44.61	9.65	Vertical	Peak
11490.00	54.80	68.20	-13.40	1.70	180	33.10	21.70	Vertical	Peak
11490.00	43.34	54.00	-10.66	1.70	180	21.64	21.70	Vertical	Average

U-NII-3_802.11a_5825MHz - ANT0

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.43	122.20	-68.77	1.60	200	43.65	9.78	Horizontal	Peak
5855.00	53.95	110.80	-56.85	1.60	200	44.16	9.79	Horizontal	Peak
5875.00	53.28	105.20	-51.92	1.60	200	43.44	9.84	Horizontal	Peak
5925.00	54.42	68.20	-13.78	1.60	200	44.45	9.97	Horizontal	Peak
11650.00	54.61	68.20	-13.59	1.60	200	32.71	21.90	Horizontal	Peak
11650.00	43.30	54.00	-10.70	1.60	200	21.40	21.90	Horizontal	Average
5850.00	53.03	122.20	-69.17	1.70	180	43.25	9.78	Vertical	Peak
5855.00	53.51	110.80	-57.29	1.70	180	43.72	9.79	Vertical	Peak
5875.00	54.89	105.20	-50.31	1.70	180	45.05	9.84	Vertical	Peak
5925.00	54.26	68.20	-13.94	1.70	180	44.29	9.97	Vertical	Peak
11650.00	55.21	68.20	-12.99	1.70	180	33.31	21.90	Vertical	Peak
11650.00	42.59	54.00	-11.41	1.70	180	20.69	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-3_802.11a_5745MHz - ANT1

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.52	68.20	-14.68	1.60	200	44.06	9.46	Horizontal	Peak
5700.00	53.81	105.20	-51.39	1.60	200	44.22	9.59	Horizontal	Peak
5720.00	53.74	110.80	-57.06	1.60	200	44.10	9.64	Horizontal	Peak
5725.00	54.07	122.20	-68.13	1.60	200	44.42	9.65	Horizontal	Peak
11490.00	53.65	68.20	-14.55	1.60	200	31.95	21.70	Horizontal	Peak
11490.00	43.62	54.00	-10.38	1.60	200	21.92	21.70	Horizontal	Average
5650.00	52.87	68.20	-15.33	1.70	180	43.41	9.46	Vertical	Peak
5700.00	54.07	105.20	-51.13	1.70	180	44.48	9.59	Vertical	Peak
5720.00	54.26	110.80	-56.54	1.70	180	44.62	9.64	Vertical	Peak
5725.00	54.43	122.20	-67.77	1.70	180	44.78	9.65	Vertical	Peak
11490.00	55.06	68.20	-13.14	1.70	180	33.36	21.70	Vertical	Peak
11490.00	43.87	54.00	-10.13	1.70	180	22.17	21.70	Vertical	Average

U-NII-3_802.11a_5825MHz - ANT1

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.94	122.20	-68.26	1.60	200	44.16	9.78	Horizontal	Peak
5855.00	53.48	110.80	-57.32	1.60	200	43.69	9.79	Horizontal	Peak
5875.00	52.59	105.20	-52.61	1.60	200	42.75	9.84	Horizontal	Peak
5925.00	54.70	68.20	-13.50	1.60	200	44.73	9.97	Horizontal	Peak
11650.00	54.89	68.20	-13.31	1.60	200	32.99	21.90	Horizontal	Peak
11650.00	44.01	54.00	-9.99	1.60	200	22.11	21.90	Horizontal	Average
5850.00	52.97	122.20	-69.23	1.70	180	43.19	9.78	Vertical	Peak
5855.00	53.69	110.80	-57.11	1.70	180	43.90	9.79	Vertical	Peak
5875.00	54.76	105.20	-50.44	1.70	180	44.92	9.84	Vertical	Peak
5925.00	54.16	68.20	-14.04	1.70	180	44.19	9.97	Vertical	Peak
11650.00	55.06	68.20	-13.14	1.70	180	33.16	21.90	Vertical	Peak
11650.00	43.07	54.00	-10.93	1.70	180	21.17	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-3_802.11a_5745MHz - ANT2

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.38	68.20	-14.82	1.60	200	43.92	9.46	Horizontal	Peak
5700.00	53.83	105.20	-51.37	1.60	200	44.24	9.59	Horizontal	Peak
5720.00	53.58	110.80	-57.22	1.60	200	43.94	9.64	Horizontal	Peak
5725.00	54.45	122.20	-67.75	1.60	200	44.80	9.65	Horizontal	Peak
11490.00	53.95	68.20	-14.25	1.60	200	32.25	21.70	Horizontal	Peak
11490.00	43.40	54.00	-10.60	1.60	200	21.70	21.70	Horizontal	Average
5650.00	52.96	68.20	-15.24	1.70	180	43.50	9.46	Vertical	Peak
5700.00	53.90	105.20	-51.30	1.70	180	44.31	9.59	Vertical	Peak
5720.00	53.89	110.80	-56.91	1.70	180	44.25	9.64	Vertical	Peak
5725.00	54.11	122.20	-68.09	1.70	180	44.46	9.65	Vertical	Peak
11490.00	54.85	68.20	-13.35	1.70	180	33.15	21.70	Vertical	Peak
11490.00	43.57	54.00	-10.43	1.70	180	21.87	21.70	Vertical	Average

U-NII-3_802.11a_5825MHz - ANT2

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.82	122.20	-68.38	1.60	200	44.04	9.78	Horizontal	Peak
5855.00	53.70	110.80	-57.10	1.60	200	43.91	9.79	Horizontal	Peak
5875.00	52.82	105.20	-52.38	1.60	200	42.98	9.84	Horizontal	Peak
5925.00	54.86	68.20	-13.34	1.60	200	44.89	9.97	Horizontal	Peak
11650.00	54.69	68.20	-13.51	1.60	200	32.79	21.90	Horizontal	Peak
11650.00	43.70	54.00	-10.30	1.60	200	21.80	21.90	Horizontal	Average
5850.00	53.45	122.20	-68.75	1.70	180	43.67	9.78	Vertical	Peak
5855.00	53.32	110.80	-57.48	1.70	180	43.53	9.79	Vertical	Peak
5875.00	54.89	105.20	-50.31	1.70	180	45.05	9.84	Vertical	Peak
5925.00	54.01	68.20	-14.19	1.70	180	44.04	9.97	Vertical	Peak
11650.00	55.21	68.20	-12.99	1.70	180	33.31	21.90	Vertical	Peak
11650.00	42.84	54.00	-11.16	1.70	180	20.94	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-3_802.11a_5745MHz - ANT3

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.02	68.20	-15.18	1.60	200	43.56	9.46	Horizontal	Peak
5700.00	53.69	105.20	-51.51	1.60	200	44.10	9.59	Horizontal	Peak
5720.00	53.24	110.80	-57.56	1.60	200	43.60	9.64	Horizontal	Peak
5725.00	54.19	122.20	-68.01	1.60	200	44.54	9.65	Horizontal	Peak
11490.00	53.43	68.20	-14.77	1.60	200	31.73	21.70	Horizontal	Peak
11490.00	43.97	54.00	-10.03	1.60	200	22.27	21.70	Horizontal	Average
5650.00	53.33	68.20	-14.87	1.70	180	43.87	9.46	Vertical	Peak
5700.00	53.69	105.20	-51.51	1.70	180	44.10	9.59	Vertical	Peak
5720.00	54.58	110.80	-56.22	1.70	180	44.94	9.64	Vertical	Peak
5725.00	54.22	122.20	-67.98	1.70	180	44.57	9.65	Vertical	Peak
11490.00	55.22	68.20	-12.98	1.70	180	33.52	21.70	Vertical	Peak
11490.00	44.24	54.00	-9.76	1.70	180	22.54	21.70	Vertical	Average

U-NII-3_802.11a_5825MHz - ANT3

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.83	122.20	-68.37	1.60	200	44.05	9.78	Horizontal	Peak
5855.00	53.82	110.80	-56.98	1.60	200	44.03	9.79	Horizontal	Peak
5875.00	52.34	105.20	-52.86	1.60	200	42.50	9.84	Horizontal	Peak
5925.00	54.39	68.20	-13.81	1.60	200	44.42	9.97	Horizontal	Peak
11650.00	55.29	68.20	-12.91	1.60	200	33.39	21.90	Horizontal	Peak
11650.00	44.27	54.00	-9.73	1.60	200	22.37	21.90	Horizontal	Average
5850.00	52.60	122.20	-69.60	1.70	180	42.82	9.78	Vertical	Peak
5855.00	53.82	110.80	-56.98	1.70	180	44.03	9.79	Vertical	Peak
5875.00	54.71	105.20	-50.49	1.70	180	44.87	9.84	Vertical	Peak
5925.00	54.15	68.20	-14.05	1.70	180	44.18	9.97	Vertical	Peak
11650.00	54.96	68.20	-13.24	1.70	180	33.06	21.90	Vertical	Peak
11650.00	43.21	54.00	-10.79	1.70	180	21.31	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-3_802.11a_5745MHz - ANT4

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	52.97	68.20	-15.23	1.50	180	43.51	9.46	Horizontal	Peak
5700.00	53.93	105.20	-51.27	1.50	180	44.34	9.59	Horizontal	Peak
5720.00	52.95	110.80	-57.85	1.50	180	43.31	9.64	Horizontal	Peak
5725.00	55.64	122.20	-66.56	1.50	180	45.99	9.65	Horizontal	Peak
11490.00	54.19	68.20	-14.01	1.50	180	32.49	21.70	Horizontal	Peak
11490.00	42.93	54.00	-11.07	1.50	180	21.23	21.70	Horizontal	Average
5650.00	52.80	68.20	-15.40	1.60	120	43.34	9.46	Vertical	Peak
5700.00	53.14	105.20	-52.06	1.60	120	43.55	9.59	Vertical	Peak
5720.00	53.82	110.80	-56.98	1.60	120	44.18	9.64	Vertical	Peak
5725.00	54.18	122.20	-68.02	1.60	120	44.53	9.65	Vertical	Peak
11490.00	54.40	68.20	-13.80	1.60	120	32.70	21.70	Vertical	Peak
11490.00	43.46	54.00	-10.54	1.60	120	21.76	21.70	Vertical	Average

U-NII-3_802.11a_5825MHz - ANT4

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.13	122.20	-69.07	1.50	180	43.35	9.78	Horizontal	Peak
5855.00	54.48	110.80	-56.32	1.50	180	44.69	9.79	Horizontal	Peak
5875.00	53.31	105.20	-51.89	1.50	180	43.47	9.84	Horizontal	Peak
5925.00	54.39	68.20	-13.81	1.50	180	44.42	9.97	Horizontal	Peak
11650.00	54.27	68.20	-13.93	1.50	180	32.37	21.90	Horizontal	Peak
11650.00	44.12	54.00	-9.88	1.50	180	22.22	21.90	Horizontal	Average
5850.00	52.87	122.20	-69.33	1.60	120	43.09	9.78	Vertical	Peak
5855.00	53.37	110.80	-57.43	1.60	120	43.58	9.79	Vertical	Peak
5875.00	55.12	105.20	-50.08	1.60	120	45.28	9.84	Vertical	Peak
5925.00	54.54	68.20	-13.66	1.60	120	44.57	9.97	Vertical	Peak
11650.00	55.94	68.20	-12.26	1.60	120	34.04	21.90	Vertical	Peak
11650.00	42.44	54.00	-11.56	1.60	120	20.54	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-3_802.11a_5745MHz - ANT5

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	52.92	68.20	-15.28	1.50	180	43.46	9.46	Horizontal	Peak
5700.00	53.63	105.20	-51.57	1.50	180	44.04	9.59	Horizontal	Peak
5720.00	53.35	110.80	-57.45	1.50	180	43.71	9.64	Horizontal	Peak
5725.00	54.72	122.20	-67.48	1.50	180	45.07	9.65	Horizontal	Peak
11490.00	54.03	68.20	-14.17	1.50	180	32.33	21.70	Horizontal	Peak
11490.00	43.18	54.00	-10.82	1.50	180	21.48	21.70	Horizontal	Average
5650.00	52.29	68.20	-15.91	1.60	120	42.83	9.46	Vertical	Peak
5700.00	53.71	105.20	-51.49	1.60	120	44.12	9.59	Vertical	Peak
5720.00	53.70	110.80	-57.10	1.60	120	44.06	9.64	Vertical	Peak
5725.00	54.42	122.20	-67.78	1.60	120	44.77	9.65	Vertical	Peak
11490.00	54.38	68.20	-13.82	1.60	120	32.68	21.70	Vertical	Peak
11490.00	43.13	54.00	-10.87	1.60	120	21.43	21.70	Vertical	Average

U-NII-3_802.11a_5825MHz - ANT5

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.35	122.20	-68.85	1.50	180	43.57	9.78	Horizontal	Peak
5855.00	54.02	110.80	-56.78	1.50	180	44.23	9.79	Horizontal	Peak
5875.00	53.38	105.20	-51.82	1.50	180	43.54	9.84	Horizontal	Peak
5925.00	54.42	68.20	-13.78	1.50	180	44.45	9.97	Horizontal	Peak
11650.00	54.67	68.20	-13.53	1.50	180	32.77	21.90	Horizontal	Peak
11650.00	43.68	54.00	-10.32	1.50	180	21.78	21.90	Horizontal	Average
5850.00	52.93	122.20	-69.27	1.60	120	43.15	9.78	Vertical	Peak
5855.00	53.85	110.80	-56.95	1.60	120	44.06	9.79	Vertical	Peak
5875.00	55.38	105.20	-49.82	1.60	120	45.54	9.84	Vertical	Peak
5925.00	54.53	68.20	-13.67	1.60	120	44.56	9.97	Vertical	Peak
11650.00	55.49	68.20	-12.71	1.60	120	33.59	21.90	Vertical	Peak
11650.00	42.84	54.00	-11.16	1.60	120	20.94	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-3_802.11a_5785MHz - ANT0

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.95	68.20	-14.25	1.60	200	32.25	21.70	Horizontal	Peak
11570.00	42.94	54.00	-11.06	1.60	200	21.24	21.70	Horizontal	Average
11570.00	53.45	68.20	-14.75	1.70	180	31.75	21.70	Vertical	Peak
11570.00	41.98	54.00	-12.02	1.70	180	20.28	21.70	Vertical	Average

U-NII-3_802.11a_5785MHz - ANT1

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.72	68.20	-14.48	1.60	200	32.02	21.70	Horizontal	Peak
11570.00	43.54	54.00	-10.46	1.60	200	21.84	21.70	Horizontal	Average
11570.00	53.38	68.20	-14.82	1.70	180	31.68	21.70	Vertical	Peak
11570.00	42.11	54.00	-11.89	1.70	180	20.41	21.70	Vertical	Average

U-NII-3_802.11a_5785MHz - ANT2

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	54.11	68.20	-14.09	1.60	200	32.41	21.70	Horizontal	Peak
11570.00	43.07	54.00	-10.93	1.60	200	21.37	21.70	Horizontal	Average
11570.00	53.48	68.20	-14.72	1.70	180	31.78	21.70	Vertical	Peak
11570.00	41.93	54.00	-12.07	1.70	180	20.23	21.70	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-3_802.11a_5785MHz - ANT3

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.83	68.20	-14.37	1.60	200	32.13	21.70	Horizontal	Peak
11570.00	43.14	54.00	-10.86	1.60	200	21.44	21.70	Horizontal	Average
11570.00	54.25	68.20	-13.95	1.70	180	32.55	21.70	Vertical	Peak
11570.00	42.81	54.00	-11.19	1.70	180	21.11	21.70	Vertical	Average

U-NII-3_802.11a_5785MHz - ANT4

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.50	68.20	-14.70	1.60	200	31.80	21.70	Horizontal	Peak
11570.00	43.37	54.00	-10.63	1.60	200	21.67	21.70	Horizontal	Average
11570.00	53.84	68.20	-14.36	1.70	180	32.14	21.70	Vertical	Peak
11570.00	42.47	54.00	-11.53	1.70	180	20.77	21.70	Vertical	Average

U-NII-3_802.11a_5785MHz - ANT5

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.90	68.20	-14.30	1.60	200	32.20	21.70	Horizontal	Peak
11570.00	42.94	54.00	-11.06	1.60	200	21.24	21.70	Horizontal	Average
11570.00	54.67	68.20	-13.53	1.70	180	32.97	21.70	Vertical	Peak
11570.00	42.92	54.00	-11.08	1.70	180	21.22	21.70	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

U-NII-3_802.11n-HT20_5745MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.07	68.20	-15.13	1.60	200	43.61	9.46	Horizontal	Peak
5700.00	53.20	105.20	-52.00	1.60	200	43.61	9.59	Horizontal	Peak
5720.00	53.91	110.80	-56.89	1.60	200	44.27	9.64	Horizontal	Peak
5725.00	54.63	122.20	-67.57	1.60	200	44.98	9.65	Horizontal	Peak
11490.00	53.95	68.20	-14.25	1.60	200	32.25	21.70	Horizontal	Peak
11490.00	43.20	54.00	-10.80	1.60	200	21.50	21.70	Horizontal	Average
5650.00	52.83	68.20	-15.37	1.70	180	43.37	9.46	Vertical	Peak
5700.00	53.46	105.20	-51.74	1.70	180	43.87	9.59	Vertical	Peak
5720.00	53.79	110.80	-57.01	1.70	180	44.15	9.64	Vertical	Peak
5725.00	53.97	122.20	-68.23	1.70	180	44.32	9.65	Vertical	Peak
11490.00	55.02	68.20	-13.18	1.70	180	33.32	21.70	Vertical	Peak
11490.00	43.36	54.00	-10.64	1.70	180	21.66	21.70	Vertical	Average
U-NII-3_802.11n-HT20_5825MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.57	122.20	-68.63	1.60	200	43.79	9.78	Horizontal	Peak
5855.00	53.88	110.80	-56.92	1.60	200	44.09	9.79	Horizontal	Peak
5875.00	53.17	105.20	-52.03	1.60	200	43.33	9.84	Horizontal	Peak
5925.00	54.62	68.20	-13.58	1.60	200	44.65	9.97	Horizontal	Peak
11650.00	54.82	68.20	-13.38	1.60	200	32.92	21.90	Horizontal	Peak
11650.00	43.35	54.00	-10.65	1.60	200	21.45	21.90	Horizontal	Average
5850.00	53.14	122.20	-69.06	1.70	180	43.36	9.78	Vertical	Peak
5855.00	53.33	110.80	-57.47	1.70	180	43.54	9.79	Vertical	Peak
5875.00	54.56	105.20	-50.64	1.70	180	44.72	9.84	Vertical	Peak
5925.00	54.33	68.20	-13.87	1.70	180	44.36	9.97	Vertical	Peak
11650.00	55.24	68.20	-12.96	1.70	180	33.34	21.90	Vertical	Peak
11650.00	42.13	54.00	-11.87	1.70	180	20.23	21.90	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.									

U-NII-3_802.11ac-VHE20_5745MHz - 4×4 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.23	68.20	-14.97	1.60	200	43.77	9.46	Horizontal	Peak
5700.00	54.08	105.20	-51.12	1.60	200	44.49	9.59	Horizontal	Peak
5720.00	53.45	110.80	-57.35	1.60	200	43.81	9.64	Horizontal	Peak
5725.00	54.45	122.20	-67.75	1.60	200	44.80	9.65	Horizontal	Peak
11490.00	53.56	68.20	-14.64	1.60	200	31.86	21.70	Horizontal	Peak
11490.00	43.88	54.00	-10.12	1.60	200	22.18	21.70	Horizontal	Average
5650.00	52.75	68.20	-15.45	1.70	180	43.29	9.46	Vertical	Peak
5700.00	54.06	105.20	-51.14	1.70	180	44.47	9.59	Vertical	Peak
5720.00	53.58	110.80	-57.22	1.70	180	43.94	9.64	Vertical	Peak
5725.00	54.48	122.20	-67.72	1.70	180	44.83	9.65	Vertical	Peak
11490.00	54.75	68.20	-13.45	1.70	180	33.05	21.70	Vertical	Peak
11490.00	43.12	54.00	-10.88	1.70	180	21.42	21.70	Vertical	Average

U-NII-3_802.11ac-VHT20_5825MHz - 4×4 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.60	122.20	-68.60	1.60	200	43.82	9.78	Horizontal	Peak
5855.00	53.62	110.80	-57.18	1.60	200	43.83	9.79	Horizontal	Peak
5875.00	52.34	105.20	-52.86	1.60	200	42.50	9.84	Horizontal	Peak
5925.00	54.86	68.20	-13.34	1.60	200	44.89	9.97	Horizontal	Peak
11650.00	54.80	68.20	-13.40	1.60	200	32.90	21.90	Horizontal	Peak
11650.00	44.06	54.00	-9.94	1.60	200	22.16	21.90	Horizontal	Average
5850.00	52.84	122.20	-69.36	1.70	180	43.06	9.78	Vertical	Peak
5855.00	53.04	110.80	-57.76	1.70	180	43.25	9.79	Vertical	Peak
5875.00	54.21	105.20	-50.99	1.70	180	44.37	9.84	Vertical	Peak
5925.00	54.00	68.20	-14.20	1.70	180	44.03	9.97	Vertical	Peak
11650.00	55.62	68.20	-12.58	1.70	180	33.72	21.90	Vertical	Peak
11650.00	41.84	54.00	-12.16	1.70	180	19.94	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

U-NII-3_802.11ax-HE20_5745MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.36	68.20	-14.84	1.60	200	43.90	9.46	Horizontal	Peak
5700.00	54.33	105.20	-50.87	1.60	200	44.74	9.59	Horizontal	Peak
5720.00	53.42	110.80	-57.38	1.60	200	43.78	9.64	Horizontal	Peak
5725.00	54.26	122.20	-67.94	1.60	200	44.61	9.65	Horizontal	Peak
11490.00	53.76	68.20	-14.44	1.60	200	32.06	21.70	Horizontal	Peak
11490.00	43.86	54.00	-10.14	1.60	200	22.16	21.70	Horizontal	Average
5650.00	53.19	68.20	-15.01	1.70	180	43.73	9.46	Vertical	Peak
5700.00	54.39	105.20	-50.81	1.70	180	44.80	9.59	Vertical	Peak
5720.00	53.77	110.80	-57.03	1.70	180	44.13	9.64	Vertical	Peak
5725.00	54.86	122.20	-67.34	1.70	180	45.21	9.65	Vertical	Peak
11490.00	54.36	68.20	-13.84	1.70	180	32.66	21.70	Vertical	Peak
11490.00	42.91	54.00	-11.09	1.70	180	21.21	21.70	Vertical	Average
U-NII-3_802.11ax-HE20_5825MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.10	122.20	-69.10	1.60	200	43.32	9.78	Horizontal	Peak
5855.00	53.24	110.80	-57.56	1.60	200	43.45	9.79	Horizontal	Peak
5875.00	52.41	105.20	-52.79	1.60	200	42.57	9.84	Horizontal	Peak
5925.00	55.31	68.20	-12.89	1.60	200	45.34	9.97	Horizontal	Peak
11650.00	54.50	68.20	-13.70	1.60	200	32.60	21.90	Horizontal	Peak
11650.00	43.77	54.00	-10.23	1.60	200	21.87	21.90	Horizontal	Average
5850.00	52.77	122.20	-69.43	1.70	180	42.99	9.78	Vertical	Peak
5855.00	53.35	110.80	-57.45	1.70	180	43.56	9.79	Vertical	Peak
5875.00	54.63	105.20	-50.57	1.70	180	44.79	9.84	Vertical	Peak
5925.00	53.60	68.20	-14.60	1.70	180	43.63	9.97	Vertical	Peak
11650.00	55.91	68.20	-12.29	1.70	180	34.01	21.90	Vertical	Peak
11650.00	42.07	54.00	-11.93	1.70	180	20.17	21.90	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.									

U-NII-3_802.11n-HT20_5785MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.64	68.20	-14.56	1.60	200	31.94	21.70	Horizontal	Peak
11570.00	43.61	54.00	-10.39	1.60	200	21.91	21.70	Horizontal	Average
11570.00	54.01	68.20	-14.19	1.70	180	32.31	21.70	Vertical	Peak
11570.00	42.50	54.00	-11.50	1.70	180	20.80	21.70	Vertical	Average

U-NII-3_802.11ac-VHT20_5785MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.64	68.20	-14.56	1.60	200	31.94	21.70	Horizontal	Peak
11570.00	43.17	54.00	-10.83	1.60	200	21.47	21.70	Horizontal	Average
11570.00	53.43	68.20	-14.77	1.70	180	31.73	21.70	Vertical	Peak
11570.00	41.63	54.00	-12.37	1.70	180	19.93	21.70	Vertical	Average

U-NII-3_802.11ax-HE20_5785MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.68	68.20	-14.52	1.60	200	31.98	21.70	Horizontal	Peak
11570.00	43.34	54.00	-10.66	1.60	200	21.64	21.70	Horizontal	Average
11570.00	53.68	68.20	-14.52	1.70	180	31.98	21.70	Vertical	Peak
11570.00	42.12	54.00	-11.88	1.70	180	20.42	21.70	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

U-NII-3_802.11n-HT40_5755MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.40	68.20	-14.80	1.60	200	43.94	9.46	Horizontal	Peak
5700.00	53.74	105.20	-51.46	1.60	200	44.15	9.59	Horizontal	Peak
5720.00	53.06	110.80	-57.74	1.60	200	43.42	9.64	Horizontal	Peak
5725.00	54.46	122.20	-67.74	1.60	200	44.81	9.65	Horizontal	Peak
11510.00	53.18	68.20	-15.02	1.60	200	31.48	21.70	Horizontal	Peak
11510.00	43.91	54.00	-10.09	1.60	200	22.21	21.70	Horizontal	Average
5650.00	52.83	68.20	-15.37	1.70	180	43.37	9.46	Vertical	Peak
5700.00	53.84	105.20	-51.36	1.70	180	44.25	9.59	Vertical	Peak
5720.00	53.57	110.80	-57.23	1.70	180	43.93	9.64	Vertical	Peak
5725.00	54.04	122.20	-68.16	1.70	180	44.39	9.65	Vertical	Peak
11510.00	55.00	68.20	-13.20	1.70	180	33.30	21.70	Vertical	Peak
11510.00	42.85	54.00	-11.15	1.70	180	21.15	21.70	Vertical	Average
U-NII-3_802.11n-HT40_5795MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.94	122.20	-68.26	1.60	200	44.16	9.78	Horizontal	Peak
5855.00	54.32	110.80	-56.48	1.60	200	44.53	9.79	Horizontal	Peak
5875.00	52.67	105.20	-52.53	1.60	200	42.83	9.84	Horizontal	Peak
5925.00	54.90	68.20	-13.30	1.60	200	44.93	9.97	Horizontal	Peak
11590.00	54.96	68.20	-13.24	1.60	200	33.06	21.90	Horizontal	Peak
11590.00	43.73	54.00	-10.27	1.60	200	21.83	21.90	Horizontal	Average
5850.00	52.81	122.20	-69.39	1.70	180	43.03	9.78	Vertical	Peak
5855.00	52.85	110.80	-57.95	1.70	180	43.06	9.79	Vertical	Peak
5875.00	54.39	105.20	-50.81	1.70	180	44.55	9.84	Vertical	Peak
5925.00	53.83	68.20	-14.37	1.70	180	43.86	9.97	Vertical	Peak
11590.00	54.78	68.20	-13.42	1.70	180	32.88	21.90	Vertical	Peak
11590.00	42.06	54.00	-11.94	1.70	180	20.16	21.90	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.									

U-NII-3_802.11ac-VHT40_5755MHz - 4×4 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.01	68.20	-15.19	1.60	200	43.55	9.46	Horizontal	Peak
5700.00	53.36	105.20	-51.84	1.60	200	43.77	9.59	Horizontal	Peak
5720.00	53.11	110.80	-57.69	1.60	200	43.47	9.64	Horizontal	Peak
5725.00	54.89	122.20	-67.31	1.60	200	45.24	9.65	Horizontal	Peak
11510.00	52.79	68.20	-15.41	1.60	200	31.09	21.70	Horizontal	Peak
11510.00	43.97	54.00	-10.03	1.60	200	22.27	21.70	Horizontal	Average
5650.00	53.30	68.20	-14.90	1.70	180	43.84	9.46	Vertical	Peak
5700.00	53.87	105.20	-51.33	1.70	180	44.28	9.59	Vertical	Peak
5720.00	53.63	110.80	-57.17	1.70	180	43.99	9.64	Vertical	Peak
5725.00	53.72	122.20	-68.48	1.70	180	44.07	9.65	Vertical	Peak
11510.00	55.30	68.20	-12.90	1.70	180	33.60	21.70	Vertical	Peak
11510.00	42.53	54.00	-11.47	1.70	180	20.83	21.70	Vertical	Average

U-NII-3_802.11ac-VHT40_5795MHz - 4×4 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.47	122.20	-68.73	1.60	200	43.69	9.78	Horizontal	Peak
5855.00	53.90	110.80	-56.90	1.60	200	44.11	9.79	Horizontal	Peak
5875.00	52.54	105.20	-52.66	1.60	200	42.70	9.84	Horizontal	Peak
5925.00	54.96	68.20	-13.24	1.60	200	44.99	9.97	Horizontal	Peak
11590.00	54.68	68.20	-13.52	1.60	200	32.78	21.90	Horizontal	Peak
11590.00	44.20	54.00	-9.80	1.60	200	22.30	21.90	Horizontal	Average
5850.00	52.77	122.20	-69.43	1.70	180	42.99	9.78	Vertical	Peak
5855.00	52.83	110.80	-57.97	1.70	180	43.04	9.79	Vertical	Peak
5875.00	53.89	105.20	-51.31	1.70	180	44.05	9.84	Vertical	Peak
5925.00	54.25	68.20	-13.95	1.70	180	44.28	9.97	Vertical	Peak
11590.00	55.17	68.20	-13.03	1.70	180	33.27	21.90	Vertical	Peak
11590.00	41.98	54.00	-12.02	1.70	180	20.08	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

U-NII-3_802.11ax-HE40_5755MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.47	68.20	-14.73	1.60	200	44.01	9.46	Horizontal	Peak
5700.00	52.94	105.20	-52.26	1.60	200	43.35	9.59	Horizontal	Peak
5720.00	53.14	110.80	-57.66	1.60	200	43.50	9.64	Horizontal	Peak
5725.00	55.30	122.20	-66.90	1.60	200	45.65	9.65	Horizontal	Peak
11510.00	52.45	68.20	-15.75	1.60	200	30.75	21.70	Horizontal	Peak
11510.00	43.81	54.00	-10.19	1.60	200	22.11	21.70	Horizontal	Average
5650.00	52.92	68.20	-15.28	1.70	180	43.46	9.46	Vertical	Peak
5700.00	53.88	105.20	-51.32	1.70	180	44.29	9.59	Vertical	Peak
5720.00	53.41	110.80	-57.39	1.70	180	43.77	9.64	Vertical	Peak
5725.00	53.43	122.20	-68.77	1.70	180	43.78	9.65	Vertical	Peak
11510.00	55.71	68.20	-12.49	1.70	180	34.01	21.70	Vertical	Peak
11510.00	42.11	54.00	-11.89	1.70	180	20.41	21.70	Vertical	Average
U-NII-3_802.11ax-HE40_5795MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.45	122.20	-68.75	1.60	200	43.67	9.78	Horizontal	Peak
5855.00	53.50	110.80	-57.30	1.60	200	43.71	9.79	Horizontal	Peak
5875.00	52.31	105.20	-52.89	1.60	200	42.47	9.84	Horizontal	Peak
5925.00	55.19	68.20	-13.01	1.60	200	45.22	9.97	Horizontal	Peak
11590.00	54.99	68.20	-13.21	1.60	200	33.09	21.90	Horizontal	Peak
11590.00	44.06	54.00	-9.94	1.60	200	22.16	21.90	Horizontal	Average
5850.00	52.29	122.20	-69.91	1.70	180	42.51	9.78	Vertical	Peak
5855.00	52.62	110.80	-58.18	1.70	180	42.83	9.79	Vertical	Peak
5875.00	54.34	105.20	-50.86	1.70	180	44.50	9.84	Vertical	Peak
5925.00	54.66	68.20	-13.54	1.70	180	44.69	9.97	Vertical	Peak
11590.00	54.75	68.20	-13.45	1.70	180	32.85	21.90	Vertical	Peak
11590.00	42.36	54.00	-11.64	1.70	180	20.46	21.90	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.									

U-NII-3_802.11ac-VHT80_5775MHz - 4×4 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	54.09	68.20	-14.11	1.60	200	44.63	9.46	Horizontal	Peak
5700.00	53.41	105.20	-51.79	1.60	200	43.82	9.59	Horizontal	Peak
5720.00	53.23	110.80	-57.57	1.60	200	43.59	9.64	Horizontal	Peak
5725.00	54.17	122.20	-68.03	1.60	200	44.52	9.65	Horizontal	Peak
5850.00	54.80	122.20	-67.40	1.60	200	45.02	9.78	Horizontal	Peak
5855.00	53.68	110.80	-57.12	1.60	200	43.89	9.79	Horizontal	Peak
5875.00	55.01	105.20	-50.19	1.60	200	45.17	9.84	Horizontal	Peak
5925.00	53.88	68.20	-14.32	1.60	200	43.91	9.97	Horizontal	Peak
11550.00	54.12	68.20	-14.08	1.60	200	32.32	21.80	Horizontal	Peak
11550.00	43.32	54.00	-10.68	1.60	200	21.52	21.80	Horizontal	Average
5650.00	53.12	68.20	-15.08	1.70	180	43.66	9.46	Vertical	Peak
5700.00	54.24	105.20	-50.96	1.70	180	44.65	9.59	Vertical	Peak
5720.00	54.05	110.80	-56.75	1.70	180	44.41	9.64	Vertical	Peak
5725.00	53.86	122.20	-68.34	1.70	180	44.21	9.65	Vertical	Peak
5850.00	53.02	122.20	-69.18	1.70	180	43.24	9.78	Vertical	Peak
5855.00	54.69	110.80	-56.11	1.70	180	44.90	9.79	Vertical	Peak
5875.00	54.32	105.20	-50.88	1.70	180	44.48	9.84	Vertical	Peak
5925.00	53.69	68.20	-14.51	1.70	180	43.72	9.97	Vertical	Peak
11550.00	54.28	68.20	-13.92	1.70	180	32.48	21.80	Vertical	Peak
11550.00	42.32	54.00	-11.68	1.70	180	20.52	21.80	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

U-NII-3_802.11ax-HE80_5775MHz - 4×4 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.63	68.20	-14.57	1.60	200	44.17	9.46	Horizontal	Peak
5700.00	52.95	105.20	-52.25	1.60	200	43.36	9.59	Horizontal	Peak
5720.00	53.13	110.80	-57.67	1.60	200	43.49	9.64	Horizontal	Peak
5725.00	54.52	122.20	-67.68	1.60	200	44.87	9.65	Horizontal	Peak
5850.00	54.35	122.20	-67.85	1.60	200	44.57	9.78	Horizontal	Peak
5855.00	53.63	110.80	-57.17	1.60	200	43.84	9.79	Horizontal	Peak
5875.00	54.52	105.20	-50.68	1.60	200	44.68	9.84	Horizontal	Peak
5925.00	54.24	68.20	-13.96	1.60	200	44.27	9.97	Horizontal	Peak
11550.00	54.46	68.20	-13.74	1.60	200	32.66	21.80	Horizontal	Peak
11550.00	43.71	54.00	-10.29	1.60	200	21.91	21.80	Horizontal	Average
5650.00	53.22	68.20	-14.98	1.70	180	43.76	9.46	Vertical	Peak
5700.00	54.16	105.20	-51.04	1.70	180	44.57	9.59	Vertical	Peak
5720.00	53.80	110.80	-57.00	1.70	180	44.16	9.64	Vertical	Peak
5725.00	54.10	122.20	-68.10	1.70	180	44.45	9.65	Vertical	Peak
5850.00	53.08	122.20	-69.12	1.70	180	43.30	9.78	Vertical	Peak
5855.00	54.82	110.80	-55.98	1.70	180	45.03	9.79	Vertical	Peak
5875.00	54.50	105.20	-50.70	1.70	180	44.66	9.84	Vertical	Peak
5925.00	53.27	68.20	-14.93	1.70	180	43.30	9.97	Vertical	Peak
11550.00	54.24	68.20	-13.96	1.70	180	32.44	21.80	Vertical	Peak
11550.00	42.67	54.00	-11.33	1.70	180	20.87	21.80	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.									

U-NII-3_802.11n-HT20_5745MHz - 2×2 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	52.63	68.20	-15.57	1.50	180	43.17	9.46	Horizontal	Peak
5700.00	53.95	105.20	-51.25	1.50	180	44.36	9.59	Horizontal	Peak
5720.00	53.35	110.80	-57.45	1.50	180	43.71	9.64	Horizontal	Peak
5725.00	55.18	122.20	-67.02	1.50	180	45.53	9.65	Horizontal	Peak
11490.00	54.07	68.20	-14.13	1.50	180	32.37	21.70	Horizontal	Peak
11490.00	42.76	54.00	-11.24	1.50	180	21.06	21.70	Horizontal	Average
5650.00	52.77	68.20	-15.43	1.60	120	43.31	9.46	Vertical	Peak
5700.00	53.45	105.20	-51.75	1.60	120	43.86	9.59	Vertical	Peak
5720.00	53.88	110.80	-56.92	1.60	120	44.24	9.64	Vertical	Peak
5725.00	54.29	122.20	-67.91	1.60	120	44.64	9.65	Vertical	Peak
11490.00	54.66	68.20	-13.54	1.60	120	32.96	21.70	Vertical	Peak
11490.00	43.48	54.00	-10.52	1.60	120	21.78	21.70	Vertical	Average

U-NII-3_802.11n-HT20_5825MHz - 2×2 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	52.69	122.20	-69.51	1.50	180	42.91	9.78	Horizontal	Peak
5855.00	54.47	110.80	-56.33	1.50	180	44.68	9.79	Horizontal	Peak
5875.00	53.23	105.20	-51.97	1.50	180	43.39	9.84	Horizontal	Peak
5925.00	53.99	68.20	-14.21	1.50	180	44.02	9.97	Horizontal	Peak
11650.00	54.58	68.20	-13.62	1.50	180	32.68	21.90	Horizontal	Peak
11650.00	44.31	54.00	-9.69	1.50	180	22.41	21.90	Horizontal	Average
5850.00	53.23	122.20	-68.97	1.60	120	43.45	9.78	Vertical	Peak
5855.00	53.47	110.80	-57.33	1.60	120	43.68	9.79	Vertical	Peak
5875.00	55.04	105.20	-50.16	1.60	120	45.20	9.84	Vertical	Peak
5925.00	54.97	68.20	-13.23	1.60	120	45.00	9.97	Vertical	Peak
11650.00	56.31	68.20	-11.89	1.60	120	34.41	21.90	Vertical	Peak
11650.00	42.82	54.00	-11.18	1.60	120	20.92	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-3_802.11ac-VHE20_5745MHz - 2×2 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	52.44	68.20	-15.76	1.50	180	42.98	9.46	Horizontal	Peak
5700.00	53.40	105.20	-51.80	1.50	180	43.81	9.59	Horizontal	Peak
5720.00	52.84	110.80	-57.96	1.50	180	43.20	9.64	Horizontal	Peak
5725.00	55.86	122.20	-66.34	1.50	180	46.21	9.65	Horizontal	Peak
11490.00	53.97	68.20	-14.23	1.50	180	32.27	21.70	Horizontal	Peak
11490.00	43.51	54.00	-10.49	1.50	180	21.81	21.70	Horizontal	Average
5650.00	53.00	68.20	-15.20	1.60	120	43.54	9.46	Vertical	Peak
5700.00	53.28	105.20	-51.92	1.60	120	43.69	9.59	Vertical	Peak
5720.00	54.27	110.80	-56.53	1.60	120	44.63	9.64	Vertical	Peak
5725.00	54.28	122.20	-67.92	1.60	120	44.63	9.65	Vertical	Peak
11490.00	54.33	68.20	-13.87	1.60	120	32.63	21.70	Vertical	Peak
11490.00	42.63	54.00	-11.37	1.60	120	20.93	21.70	Vertical	Average

U-NII-3_802.11ac-VHT20_5825MHz - 2×2 MIMO

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	52.28	122.20	-69.92	1.50	180	42.50	9.78	Horizontal	Peak
5855.00	54.12	110.80	-56.68	1.50	180	44.33	9.79	Horizontal	Peak
5875.00	53.40	105.20	-51.80	1.50	180	43.56	9.84	Horizontal	Peak
5925.00	54.39	68.20	-13.81	1.50	180	44.42	9.97	Horizontal	Peak
11650.00	53.97	68.20	-14.23	1.50	180	32.07	21.90	Horizontal	Peak
11650.00	43.93	54.00	-10.07	1.50	180	22.03	21.90	Horizontal	Average
5850.00	53.12	122.20	-69.08	1.60	120	43.34	9.78	Vertical	Peak
5855.00	53.09	110.80	-57.71	1.60	120	43.30	9.79	Vertical	Peak
5875.00	54.67	105.20	-50.53	1.60	120	44.83	9.84	Vertical	Peak
5925.00	53.83	68.20	-14.37	1.60	120	43.86	9.97	Vertical	Peak
11650.00	55.89	68.20	-12.31	1.60	120	33.99	21.90	Vertical	Peak
11650.00	42.23	54.00	-11.77	1.60	120	20.33	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-3_802.11ax-HE20_5745MHz - 2×2 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	52.50	68.20	-15.70	1.50	180	43.04	9.46	Horizontal	Peak
5700.00	53.44	105.20	-51.76	1.50	180	43.85	9.59	Horizontal	Peak
5720.00	53.29	110.80	-57.51	1.50	180	43.65	9.64	Horizontal	Peak
5725.00	55.72	122.20	-66.48	1.50	180	46.07	9.65	Horizontal	Peak
11490.00	54.13	68.20	-14.07	1.50	180	32.43	21.70	Horizontal	Peak
11490.00	43.02	54.00	-10.98	1.50	180	21.32	21.70	Horizontal	Average
5650.00	52.73	68.20	-15.47	1.60	120	43.27	9.46	Vertical	Peak
5700.00	52.86	105.20	-52.34	1.60	120	43.27	9.59	Vertical	Peak
5720.00	54.29	110.80	-56.51	1.60	120	44.65	9.64	Vertical	Peak
5725.00	53.95	122.20	-68.25	1.60	120	44.30	9.65	Vertical	Peak
11490.00	53.99	68.20	-14.21	1.60	120	32.29	21.70	Vertical	Peak
11490.00	43.10	54.00	-10.90	1.60	120	21.40	21.70	Vertical	Average
U-NII-3_802.11ax-HE20_5825MHz - 2×2 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	52.67	122.20	-69.53	1.50	180	42.89	9.78	Horizontal	Peak
5855.00	54.02	110.80	-56.78	1.50	180	44.23	9.79	Horizontal	Peak
5875.00	53.60	105.20	-51.60	1.50	180	43.76	9.84	Horizontal	Peak
5925.00	54.16	68.20	-14.04	1.50	180	44.19	9.97	Horizontal	Peak
11650.00	54.11	68.20	-14.09	1.50	180	32.21	21.90	Horizontal	Peak
11650.00	44.40	54.00	-9.60	1.50	180	22.50	21.90	Horizontal	Average
5850.00	53.14	122.20	-69.06	1.60	120	43.36	9.78	Vertical	Peak
5855.00	53.43	110.80	-57.37	1.60	120	43.64	9.79	Vertical	Peak
5875.00	55.04	105.20	-50.16	1.60	120	45.20	9.84	Vertical	Peak
5925.00	54.08	68.20	-14.12	1.60	120	44.11	9.97	Vertical	Peak
11650.00	56.22	68.20	-11.98	1.60	120	34.32	21.90	Vertical	Peak
11650.00	42.06	54.00	-11.94	1.60	120	20.16	21.90	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 4 and ANT 5 is 2*2MIMO.									

U-NII-3_802.11n-HT20_5785MHz - 2×2 MIMO									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.58	68.20	-14.62	1.50	180	31.88	21.70	Horizontal	Peak
11570.00	43.52	54.00	-10.48	1.50	180	21.82	21.70	Horizontal	Average
11570.00	54.06	68.20	-14.14	1.60	120	32.36	21.70	Vertical	Peak
11570.00	42.85	54.00	-11.15	1.60	120	21.15	21.70	Vertical	Average
U-NII-3_802.11ac-VHT20_5785MHz - 2×2 MIMO									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.68	68.20	-14.52	1.50	180	31.98	21.70	Horizontal	Peak
11570.00	43.48	54.00	-10.52	1.50	180	21.78	21.70	Horizontal	Average
11570.00	54.43	68.20	-13.77	1.60	120	32.73	21.70	Vertical	Peak
11570.00	42.70	54.00	-11.30	1.60	120	21.00	21.70	Vertical	Average
U-NII-3_802.11ax-HE20_5785MHz - 2×2 MIMO									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
11570.00	53.24	68.20	-14.96	1.50	180	31.54	21.70	Horizontal	Peak
11570.00	43.24	54.00	-10.76	1.50	180	21.54	21.70	Horizontal	Average
11570.00	53.84	68.20	-14.36	1.60	120	32.14	21.70	Vertical	Peak
11570.00	42.69	54.00	-11.31	1.60	120	20.99	21.70	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 4 and ANT 5 is 2*2MIMO.									

U-NII-3_802.11n-HT40_5755MHz - 2×2 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	52.72	68.20	-15.48	1.50	180	43.26	9.46	Horizontal	Peak
5700.00	53.51	105.20	-51.69	1.50	180	43.92	9.59	Horizontal	Peak
5720.00	53.08	110.80	-57.72	1.50	180	43.44	9.64	Horizontal	Peak
5725.00	54.72	122.20	-67.48	1.50	180	45.07	9.65	Horizontal	Peak
11510.00	52.69	68.20	-15.51	1.50	180	30.99	21.70	Horizontal	Peak
11510.00	43.97	54.00	-10.03	1.50	180	22.27	21.70	Horizontal	Average
5650.00	53.09	68.20	-15.11	1.60	120	43.63	9.46	Vertical	Peak
5700.00	54.25	105.20	-50.95	1.60	120	44.66	9.59	Vertical	Peak
5720.00	53.74	110.80	-57.06	1.60	120	44.10	9.64	Vertical	Peak
5725.00	54.10	122.20	-68.10	1.60	120	44.45	9.65	Vertical	Peak
11510.00	55.88	68.20	-12.32	1.60	120	34.18	21.70	Vertical	Peak
11510.00	42.58	54.00	-11.42	1.60	120	20.88	21.70	Vertical	Average
U-NII-3_802.11n-HT40_5795MHz - 2×2 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.75	122.20	-68.45	1.50	180	43.97	9.78	Horizontal	Peak
5855.00	54.71	110.80	-56.09	1.50	180	44.92	9.79	Horizontal	Peak
5875.00	52.66	105.20	-52.54	1.50	180	42.82	9.84	Horizontal	Peak
5925.00	55.26	68.20	-12.94	1.50	180	45.29	9.97	Horizontal	Peak
11590.00	55.34	68.20	-12.86	1.50	180	33.44	21.90	Horizontal	Peak
11590.00	43.81	54.00	-10.19	1.50	180	21.91	21.90	Horizontal	Average
5850.00	52.30	122.20	-69.90	1.60	120	42.52	9.78	Vertical	Peak
5855.00	52.05	110.80	-58.75	1.60	120	42.26	9.79	Vertical	Peak
5875.00	54.58	105.20	-50.62	1.60	120	44.74	9.84	Vertical	Peak
5925.00	53.57	68.20	-14.63	1.60	120	43.60	9.97	Vertical	Peak
11590.00	55.17	68.20	-13.03	1.60	120	33.27	21.90	Vertical	Peak
11590.00	42.05	54.00	-11.95	1.60	120	20.15	21.90	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 4 and ANT 5 is 2*2MIMO.									

U-NII-3_802.11ac-VHT40_5755MHz - 2×2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	52.94	68.20	-15.26	1.50	180	43.48	9.46	Horizontal	Peak
5700.00	53.53	105.20	-51.67	1.50	180	43.94	9.59	Horizontal	Peak
5720.00	52.69	110.80	-58.11	1.50	180	43.05	9.64	Horizontal	Peak
5725.00	54.34	122.20	-67.86	1.50	180	44.69	9.65	Horizontal	Peak
11510.00	53.18	68.20	-15.02	1.50	180	31.48	21.70	Horizontal	Peak
11510.00	43.53	54.00	-10.47	1.50	180	21.83	21.70	Horizontal	Average
5650.00	53.32	68.20	-14.88	1.60	120	43.86	9.46	Vertical	Peak
5700.00	54.32	105.20	-50.88	1.60	120	44.73	9.59	Vertical	Peak
5720.00	53.83	110.80	-56.97	1.60	120	44.19	9.64	Vertical	Peak
5725.00	54.08	122.20	-68.12	1.60	120	44.43	9.65	Vertical	Peak
11510.00	55.49	68.20	-12.71	1.60	120	33.79	21.70	Vertical	Peak
11510.00	42.39	54.00	-11.61	1.60	120	20.69	21.70	Vertical	Average

U-NII-3_802.11ac-VHT40_5795MHz - 2×2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.48	122.20	-68.72	1.50	180	43.70	9.78	Horizontal	Peak
5855.00	54.34	110.80	-56.46	1.50	180	44.55	9.79	Horizontal	Peak
5875.00	52.56	105.20	-52.64	1.50	180	42.72	9.84	Horizontal	Peak
5925.00	54.82	68.20	-13.38	1.50	180	44.85	9.97	Horizontal	Peak
11590.00	55.29	68.20	-12.91	1.50	180	33.39	21.90	Horizontal	Peak
11590.00	43.85	54.00	-10.15	1.50	180	21.95	21.90	Horizontal	Average
5850.00	52.31	122.20	-69.89	1.60	120	42.53	9.78	Vertical	Peak
5855.00	52.35	110.80	-58.45	1.60	120	42.56	9.79	Vertical	Peak
5875.00	54.52	105.20	-50.68	1.60	120	44.68	9.84	Vertical	Peak
5925.00	54.06	68.20	-14.14	1.60	120	44.09	9.97	Vertical	Peak
11590.00	55.06	68.20	-13.14	1.60	120	33.16	21.90	Vertical	Peak
11590.00	42.51	54.00	-11.49	1.60	120	20.61	21.90	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-3_802.11ax-HE40_5755MHz - 2×2 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	52.57	68.20	-15.63	1.50	180	43.11	9.46	Horizontal	Peak
5700.00	53.79	105.20	-51.41	1.50	180	44.20	9.59	Horizontal	Peak
5720.00	53.23	110.80	-57.57	1.50	180	43.59	9.64	Horizontal	Peak
5725.00	54.57	122.20	-67.63	1.50	180	44.92	9.65	Horizontal	Peak
11510.00	52.95	68.20	-15.25	1.50	180	31.25	21.70	Horizontal	Peak
11510.00	44.11	54.00	-9.89	1.50	180	22.41	21.70	Horizontal	Average
5650.00	52.81	68.20	-15.39	1.60	120	43.35	9.46	Vertical	Peak
5700.00	54.05	105.20	-51.15	1.60	120	44.46	9.59	Vertical	Peak
5720.00	53.51	110.80	-57.29	1.60	120	43.87	9.64	Vertical	Peak
5725.00	53.93	122.20	-68.27	1.60	120	44.28	9.65	Vertical	Peak
11510.00	55.51	68.20	-12.69	1.60	120	33.81	21.70	Vertical	Peak
11510.00	43.00	54.00	-11.00	1.60	120	21.30	21.70	Vertical	Average
U-NII-3_802.11ax-HE40_5795MHz - 2×2 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	53.87	122.20	-68.33	1.50	180	44.09	9.78	Horizontal	Peak
5855.00	55.11	110.80	-55.69	1.50	180	45.32	9.79	Horizontal	Peak
5875.00	52.64	105.20	-52.56	1.50	180	42.80	9.84	Horizontal	Peak
5925.00	55.31	68.20	-12.89	1.50	180	45.34	9.97	Horizontal	Peak
11590.00	55.34	68.20	-12.86	1.50	180	33.44	21.90	Horizontal	Peak
11590.00	44.21	54.00	-9.79	1.50	180	22.31	21.90	Horizontal	Average
5850.00	52.28	122.20	-69.92	1.60	120	42.50	9.78	Vertical	Peak
5855.00	51.65	110.80	-59.15	1.60	120	41.86	9.79	Vertical	Peak
5875.00	54.99	105.20	-50.21	1.60	120	45.15	9.84	Vertical	Peak
5925.00	53.81	68.20	-14.39	1.60	120	43.84	9.97	Vertical	Peak
11590.00	54.67	68.20	-13.53	1.60	120	32.77	21.90	Vertical	Peak
11590.00	42.29	54.00	-11.71	1.60	120	20.39	21.90	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 4 and ANT 5 is 2*2MIMO.									

U-NII-3_802.11ac-VHT80_5775MHz - 2x2 MIMO

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.40	68.20	-14.80	1.50	180	43.94	9.46	Horizontal	Peak
5700.00	53.25	105.20	-51.95	1.50	180	43.66	9.59	Horizontal	Peak
5720.00	54.12	110.80	-56.68	1.50	180	44.48	9.64	Horizontal	Peak
5725.00	53.69	122.20	-68.51	1.50	180	44.04	9.65	Horizontal	Peak
5850.00	55.06	122.20	-67.14	1.50	180	45.28	9.78	Horizontal	Peak
5855.00	53.90	110.80	-56.90	1.50	180	44.11	9.79	Horizontal	Peak
5875.00	55.06	105.20	-50.14	1.50	180	45.22	9.84	Horizontal	Peak
5925.00	53.14	68.20	-15.06	1.50	180	43.17	9.97	Horizontal	Peak
11550.00	53.59	68.20	-14.61	1.50	180	31.79	21.80	Horizontal	Peak
11550.00	42.43	54.00	-11.57	1.50	180	20.63	21.80	Horizontal	Average
5650.00	53.36	68.20	-14.84	1.60	120	43.90	9.46	Vertical	Peak
5700.00	54.29	105.20	-50.91	1.60	120	44.70	9.59	Vertical	Peak
5720.00	54.93	110.80	-55.87	1.60	120	45.29	9.64	Vertical	Peak
5725.00	53.25	122.20	-68.95	1.60	120	43.60	9.65	Vertical	Peak
5850.00	53.79	122.20	-68.41	1.60	120	44.01	9.78	Vertical	Peak
5855.00	53.88	110.80	-56.92	1.60	120	44.09	9.79	Vertical	Peak
5875.00	54.49	105.20	-50.71	1.60	120	44.65	9.84	Vertical	Peak
5925.00	53.56	68.20	-14.64	1.60	120	43.59	9.97	Vertical	Peak
11550.00	53.99	68.20	-14.21	1.60	120	32.19	21.80	Vertical	Peak
11550.00	42.14	54.00	-11.86	1.60	120	20.34	21.80	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. ANT 4 and ANT 5 is 2*2MIMO.

U-NII-3_802.11ax-HE80_5775MHz - 2×2 MIMO									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	53.84	68.20	-14.36	1.50	180	44.38	9.46	Horizontal	Peak
5700.00	52.92	105.20	-52.28	1.50	180	43.33	9.59	Horizontal	Peak
5720.00	53.65	110.80	-57.15	1.50	180	44.01	9.64	Horizontal	Peak
5725.00	53.93	122.20	-68.27	1.50	180	44.28	9.65	Horizontal	Peak
5850.00	55.17	122.20	-67.03	1.50	180	45.39	9.78	Horizontal	Peak
5855.00	54.14	110.80	-56.66	1.50	180	44.35	9.79	Horizontal	Peak
5875.00	54.90	105.20	-50.30	1.50	180	45.06	9.84	Horizontal	Peak
5925.00	53.51	68.20	-14.69	1.50	180	43.54	9.97	Horizontal	Peak
11550.00	53.69	68.20	-14.51	1.50	180	31.89	21.80	Horizontal	Peak
11550.00	42.91	54.00	-11.09	1.50	180	21.11	21.80	Horizontal	Average
5650.00	53.39	68.20	-14.81	1.60	120	43.93	9.46	Vertical	Peak
5700.00	54.20	105.20	-51.00	1.60	120	44.61	9.59	Vertical	Peak
5720.00	54.43	110.80	-56.37	1.60	120	44.79	9.64	Vertical	Peak
5725.00	53.49	122.20	-68.71	1.60	120	43.84	9.65	Vertical	Peak
5850.00	53.33	122.20	-68.87	1.60	120	43.55	9.78	Vertical	Peak
5855.00	54.21	110.80	-56.59	1.60	120	44.42	9.79	Vertical	Peak
5875.00	54.14	105.20	-51.06	1.60	120	44.30	9.84	Vertical	Peak
5925.00	53.60	68.20	-14.60	1.60	120	43.63	9.97	Vertical	Peak
11550.00	54.07	68.20	-14.13	1.60	120	32.27	21.80	Vertical	Peak
11550.00	42.63	54.00	-11.37	1.60	120	20.83	21.80	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report. 5. ANT 4 and ANT 5 is 2*2MIMO.									

2.7. AC Power Line Conducted Emission

2.7.1. Limit of AC Power Line Conducted Emission

FCC Part 15.207:


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

2.7.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3. Test Setup

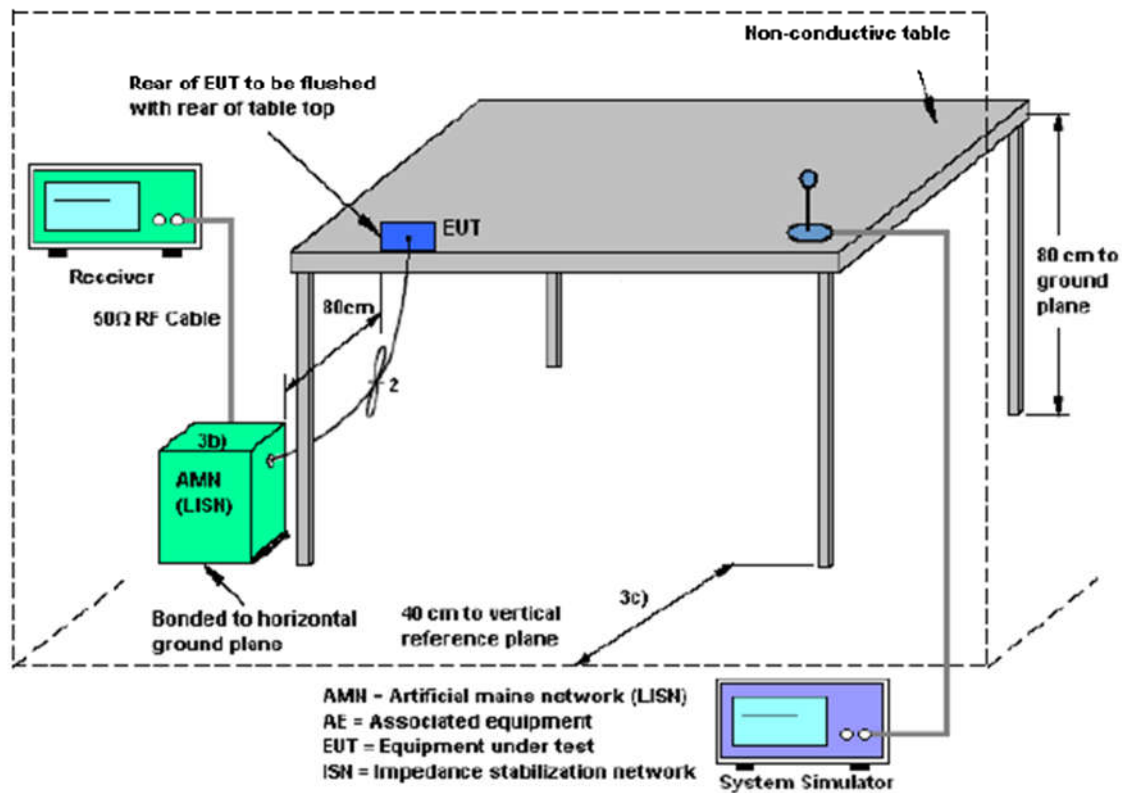


2.7.4. Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.7.5. Test Result of AC Power Line Conducted Emission

The EUT configuration of the emission tests is 5G WLAN Link + RJ45 Cable (Charging from Adapter)

Line Phase

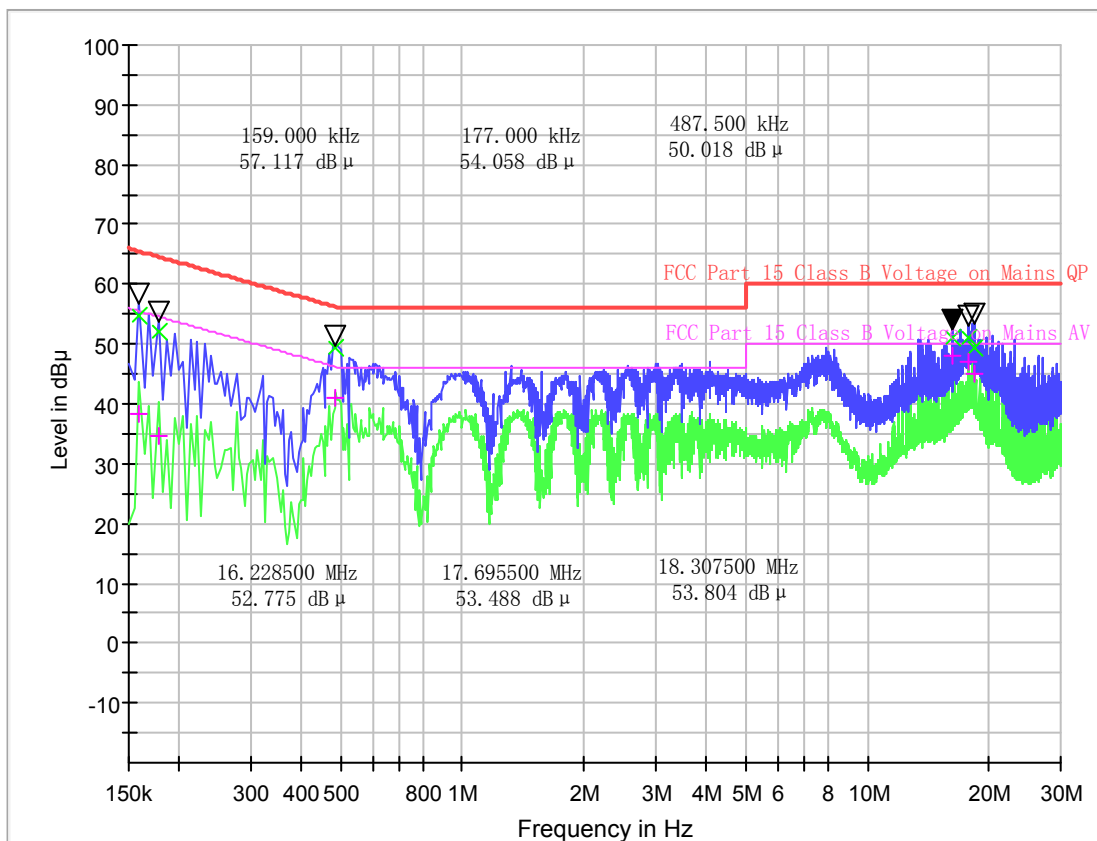


Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Cabel Loss (dB)	Corr.Factor (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)	Margin - AV (dB)	Limit - AV (dB μ V)
0.159000	54.76	38.32	0.2	10.2	10.76	65.5	17.20	55.5
0.177000	52.10	34.79	0.2	10.2	12.53	64.6	19.84	54.6
0.487500	49.48	41.14	0.2	10.2	6.73	56.2	5.07	46.2
16.228500	51.18	47.90	0.5	10.5	8.82	60.0	2.10	50.0
17.695500	51.11	47.07	0.5	10.5	8.89	60.0	2.93	50.0
18.307500	49.35	45.03	0.5	10.5	10.65	60.0	4.97	50.0

Test Result : Pass

Remark:

1. Correction factor = Cabel loss+ attenuation factor.
2. attenuation factor = 10dB.

Neutral Phase

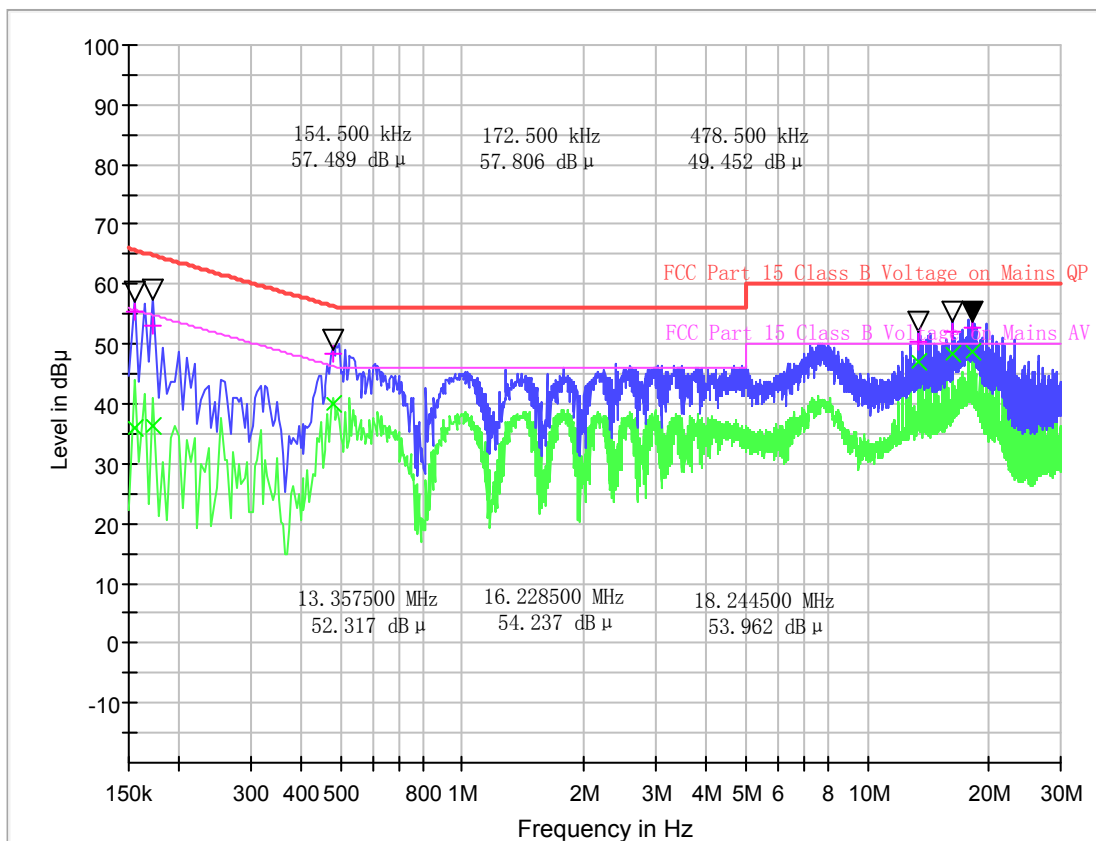

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Cabel Loss (dB)	Corr.Factor (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)	Margin - AV (dB)	Limit - AV (dB μ V)
0.154500	55.32	35.96	0.2	10.2	10.43	65.8	19.79	55.8
0.172500	53.15	36.29	0.2	10.2	11.69	64.8	18.55	54.8
0.478500	48.46	39.95	0.2	10.2	7.91	56.4	6.42	46.4
13.357500	50.24	46.90	0.5	10.5	9.76	60.0	3.10	50.0
16.228500	52.00	48.52	0.5	10.5	8.00	60.0	1.48	50.0
18.244500	52.58	48.60	0.5	10.5	7.42	60.0	1.40	50.0

Test Result : Pass

Remark:

1. Correction factor = Cabel loss+ attenuation factor.
2. attenuation factor = 10dB.

3. List of measuring equipment

Item	Description	Manufacturer	Model	Serial No.	Cal. Date	Due Date
1	EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2021.08.03	2022.08.02
2	5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
3	Loop Antenna	Schwarz beck	HFH2-Z2	A0304220	2019.04.26	2022.04.25
					2022.05.02	2025.05.01
4	Broadband antenna (30MHz~1GHz)	R&S	HL562	A0304224	2020.06.19	2023.06.18
5	EMI Horn Ant. (1-18G)	ETC	1209	A150402241	2021.01.02	2024.01.01
6	Horn antenna (18GHz~26.5GHz)	AR	AT4510	A0804450	2020.06.19	2023.06.18
7	Amplifier 30M~1GHz	MILMEGA	80RF1000-10004	A140101634	2020.09.22	2023.09.21
8	Amplifier 1G~18GHz	MILMEGA	AS0104R-800/400	A160302517	2021.12.23	2022.12.22
9	Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2021.04.26	2022.04.25
					2022.03.25	2023.03.24
10	Test Receiver	R&S	ESIB7	A0501375	2021.05.24	2022.05.23
					2022.04.18	2023.04.17
11	Broadband Ant.	2786	ETC	A150402240	2021.09.16	2024.03.03
12	3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
13	Temperature chamber	TABAI	PS-232	A8708054	2021.09.24	2022.09.23
14	Wideband Radio Communication tester	R&S	CMW500	A130101034	2021.01.26	2023.01.25
15	Test Receiver	KEYSIGHT	N9038A	A141202036	2021.09.20	2022.08.04
16	LISN	ROHDE&SCHWARZ	ENV216	A140701847	2021.09.21	2022.08.02
17	Cable	MATCHING PAD	W7	/	2021.08.01	2022.08.02

4. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of AC Power Line Conducted Emission Measurement (150kHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	2.8dB
--	-------

Uncertainty of Radiated Emission Measurement (9kHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	3.5dB
--	-------

Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	3.91dB
--	--------

Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	4.5dB
--	-------

Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	4.9dB
--	-------

Uncertainty of RF Conducted Measurement (9kHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	1.2dB
--	-------

Appendix A

Output power(module QCN9024)

Test results

U-NII-1 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5180	Ant0	0.00	22.59	30	Pass
802.11n (20MHz)	5220	Ant0	0.00	22.64	30	Pass
802.11n (20MHz)	5240	Ant0	0.00	22.66	30	Pass
802.11n (40MHz)	5190	Ant0	0.00	22.43	30	Pass
802.11n (40MHz)	5230	Ant0	0.00	22.55	30	Pass
802.11ac (20MHz)	5180	Ant0	0.00	22.56	30	Pass
802.11ac (20MHz)	5220	Ant0	0.00	22.67	30	Pass
802.11ac (20MHz)	5240	Ant0	0.00	22.70	30	Pass
802.11ac (40MHz)	5190	Ant0	0.00	23.17	30	Pass
802.11ac (40MHz)	5230	Ant0	0.00	22.53	30	Pass
802.11ac (80MHz)	5210	Ant0	0.00	22.22	30	Pass
802.11a (20MHz)	5180	Ant0	0.00	22.83	30	Pass
802.11a (20MHz)	5220	Ant0	0.00	22.89	30	Pass
802.11a (20MHz)	5240	Ant0	0.00	22.75	30	Pass
802.11ax (20MHz)	5180	Ant0	0.00	22.89	30	Pass
802.11ax (20MHz)	5220	Ant0	0.00	22.34	30	Pass
802.11ax (20MHz)	5240	Ant0	0.00	22.39	30	Pass
802.11ax (40MHz)	5190	Ant0	0.00	22.75	30	Pass
802.11ax (40MHz)	5230	Ant0	0.00	22.51	30	Pass
802.11ax (80MHz)	5210	Ant0	0.00	22.18	30	Pass

U-NII-1 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5180	Ant1	0.00	22.42	30	Pass
802.11n (20MHz)	5220	Ant1	0.00	22.45	30	Pass
802.11n (20MHz)	5240	Ant1	0.00	22.53	30	Pass
802.11n (40MHz)	5190	Ant1	0.00	22.55	30	Pass
802.11n (40MHz)	5230	Ant1	0.00	22.64	30	Pass
802.11ac (20MHz)	5180	Ant1	0.00	22.37	30	Pass
802.11ac (20MHz)	5220	Ant1	0.00	22.38	30	Pass
802.11ac (20MHz)	5240	Ant1	0.00	22.38	30	Pass
802.11ac (40MHz)	5190	Ant1	0.00	22.73	30	Pass
802.11ac (40MHz)	5230	Ant1	0.00	22.56	30	Pass
802.11ac (80MHz)	5210	Ant1	0.00	22.20	30	Pass
802.11a (20MHz)	5180	Ant1	0.00	23.08	30	Pass
802.11a (20MHz)	5220	Ant1	0.00	23.08	30	Pass
802.11a (20MHz)	5240	Ant1	0.00	23.00	30	Pass
802.11ax (20MHz)	5180	Ant1	0.00	22.24	30	Pass
802.11ax (20MHz)	5220	Ant1	0.00	22.27	30	Pass
802.11ax (20MHz)	5240	Ant1	0.00	22.35	30	Pass
802.11ax (40MHz)	5190	Ant1	0.00	22.92	30	Pass
802.11ax (40MHz)	5230	Ant1	0.00	22.76	30	Pass
802.11ax (80MHz)	5210	Ant1	0.00	22.19	30	Pass

U-NII-1 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5180	Ant2	0.00	22.25	30	Pass
802.11n (20MHz)	5220	Ant2	0.00	22.40	30	Pass
802.11n (20MHz)	5240	Ant2	0.00	22.41	30	Pass
802.11n (40MHz)	5190	Ant2	0.00	22.66	30	Pass
802.11n (40MHz)	5230	Ant2	0.00	22.69	30	Pass
802.11ac (20MHz)	5180	Ant2	0.00	22.41	30	Pass
802.11ac (20MHz)	5220	Ant2	0.00	22.43	30	Pass
802.11ac (20MHz)	5240	Ant2	0.00	22.45	30	Pass
802.11ac (40MHz)	5190	Ant2	0.00	22.66	30	Pass
802.11ac (40MHz)	5230	Ant2	0.00	22.68	30	Pass
802.11ac (80MHz)	5210	Ant2	0.00	22.16	30	Pass
802.11a (20MHz)	5180	Ant2	0.00	22.54	30	Pass
802.11a (20MHz)	5220	Ant2	0.00	22.53	30	Pass
802.11a (20MHz)	5240	Ant2	0.00	22.52	30	Pass
802.11ax (20MHz)	5180	Ant2	0.00	22.32	30	Pass
802.11ax (20MHz)	5220	Ant2	0.00	22.31	30	Pass
802.11ax (20MHz)	5240	Ant2	0.00	22.30	30	Pass
802.11ax (40MHz)	5190	Ant2	0.00	22.58	30	Pass
802.11ax (40MHz)	5230	Ant2	0.00	22.37	30	Pass
802.11ax (80MHz)	5210	Ant2	0.00	22.08	30	Pass

U-NII-1 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5180	Ant3	0.00	22.60	30	Pass
802.11n (20MHz)	5220	Ant3	0.00	22.65	30	Pass
802.11n (20MHz)	5240	Ant3	0.00	22.38	30	Pass
802.11n (40MHz)	5190	Ant3	0.00	22.92	30	Pass
802.11n (40MHz)	5230	Ant3	0.00	22.79	30	Pass
802.11ac (20MHz)	5180	Ant3	0.00	22.12	30	Pass
802.11ac (20MHz)	5220	Ant3	0.00	22.03	30	Pass
802.11ac (20MHz)	5240	Ant3	0.00	22.06	30	Pass
802.11ac (40MHz)	5190	Ant3	0.00	22.66	30	Pass
802.11ac (40MHz)	5230	Ant3	0.00	22.69	30	Pass
802.11ac (80MHz)	5210	Ant3	0.00	22.34	30	Pass
802.11a (20MHz)	5180	Ant3	0.00	22.73	30	Pass
802.11a (20MHz)	5220	Ant3	0.00	22.75	30	Pass
802.11a (20MHz)	5240	Ant3	0.00	22.72	30	Pass
802.11ax (20MHz)	5180	Ant3	0.00	22.33	30	Pass
802.11ax (20MHz)	5220	Ant3	0.00	22.38	30	Pass
802.11ax (20MHz)	5240	Ant3	0.00	22.30	30	Pass
802.11ax (40MHz)	5190	Ant3	0.00	22.57	30	Pass
802.11ax (40MHz)	5230	Ant3	0.00	22.51	30	Pass
802.11ax (80MHz)	5210	Ant3	0.00	22.11	30	Pass

U-NII-1 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5180	Ant4	0.00	22.42	30	Pass
802.11n (20MHz)	5220	Ant4	0.00	22.41	30	Pass
802.11n (20MHz)	5240	Ant4	0.00	22.36	30	Pass
802.11n (40MHz)	5190	Ant4	0.00	22.71	30	Pass
802.11n (40MHz)	5230	Ant4	0.00	22.55	30	Pass
802.11ac (20MHz)	5180	Ant4	0.00	22.37	30	Pass
802.11ac (20MHz)	5220	Ant4	0.00	22.34	30	Pass
802.11ac (20MHz)	5240	Ant4	0.00	22.35	30	Pass
802.11ac (40MHz)	5190	Ant4	0.00	22.73	30	Pass
802.11ac (40MHz)	5230	Ant4	0.00	22.59	30	Pass
802.11ac (80MHz)	5210	Ant4	0.00	22.31	30	Pass
802.11a (20MHz)	5180	Ant4	0.00	22.60	30	Pass
802.11a (20MHz)	5220	Ant4	0.00	22.53	30	Pass
802.11a (20MHz)	5240	Ant4	0.00	22.54	30	Pass
802.11ax (20MHz)	5180	Ant4	0.00	22.54	30	Pass
802.11ax (20MHz)	5220	Ant4	0.00	22.42	30	Pass
802.11ax (20MHz)	5240	Ant4	0.00	22.42	30	Pass
802.11ax (40MHz)	5190	Ant4	0.00	22.79	30	Pass
802.11ax (40MHz)	5230	Ant4	0.00	22.55	30	Pass
802.11ax (80MHz)	5210	Ant4	0.00	22.18	30	Pass

U-NII-1 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5180	Ant5	0.00	22.31	30	Pass
802.11n (20MHz)	5220	Ant5	0.00	22.29	30	Pass
802.11n (20MHz)	5240	Ant5	0.00	22.34	30	Pass
802.11n (40MHz)	5190	Ant5	0.00	22.42	30	Pass
802.11n (40MHz)	5230	Ant5	0.00	22.64	30	Pass
802.11ac (20MHz)	5180	Ant5	0.00	22.52	30	Pass
802.11ac (20MHz)	5220	Ant5	0.00	22.49	30	Pass
802.11ac (20MHz)	5240	Ant5	0.00	22.50	30	Pass
802.11ac (40MHz)	5190	Ant5	0.00	22.66	30	Pass
802.11ac (40MHz)	5230	Ant5	0.00	22.56	30	Pass
802.11ac (80MHz)	5210	Ant5	0.00	22.29	30	Pass
802.11a (20MHz)	5180	Ant5	0.00	22.39	30	Pass
802.11a (20MHz)	5220	Ant5	0.00	22.39	30	Pass
802.11a (20MHz)	5240	Ant5	0.00	22.33	30	Pass
802.11ax (20MHz)	5180	Ant5	0.00	22.39	30	Pass
802.11ax (20MHz)	5220	Ant5	0.00	22.37	30	Pass
802.11ax (20MHz)	5240	Ant5	0.00	22.36	30	Pass
802.11ax (40MHz)	5190	Ant5	0.00	22.69	30	Pass
802.11ax (40MHz)	5230	Ant5	0.00	22.59	30	Pass
802.11ax (80MHz)	5210	Ant5	0.00	22.28	30	Pass

U-NII-1 AVGSA Output Power - 4×4 MIMO								
Mode	Frequency (MHz)	Max Power (dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant0	Ant1	Ant2	Ant3			
802.11n (20MHz)	5180	22.59	22.42	22.25	22.60	28.49	30	Pass
802.11n (20MHz)	5220	22.64	22.45	22.40	22.65	28.56	30	Pass
802.11n (20MHz)	5240	22.66	22.53	22.41	22.38	28.52	30	Pass
802.11n (40MHz)	5190	22.43	22.55	22.66	22.92	28.66	30	Pass
802.11n (40MHz)	5230	22.55	22.64	22.69	22.79	28.69	30	Pass
802.11ac (20MHz)	5180	22.56	22.37	22.41	22.12	28.39	30	Pass
802.11ac (20MHz)	5220	22.67	22.38	22.43	22.03	28.40	30	Pass
802.11ac (20MHz)	5240	22.70	22.38	22.45	22.06	28.42	30	Pass
802.11ac (40MHz)	5190	23.17	22.73	22.66	22.66	28.83	30	Pass
802.11ac (40MHz)	5230	22.53	22.56	22.68	22.69	28.64	30	Pass
802.11ac (80MHz)	5210	22.22	22.20	22.16	22.34	28.25	30	Pass
802.11a (20MHz)	5180	22.83	23.08	22.54	22.73	28.82	30	Pass
802.11a (20MHz)	5220	22.89	23.08	22.53	22.75	28.84	30	Pass
802.11a (20MHz)	5240	22.75	23.00	22.52	22.72	28.77	30	Pass
802.11ax (20MHz)	5180	22.89	22.24	22.32	22.33	28.47	30	Pass
802.11ax (20MHz)	5220	22.34	22.27	22.31	22.38	28.35	30	Pass
802.11ax (20MHz)	5240	22.39	22.35	22.30	22.30	28.36	30	Pass
802.11ax (40MHz)	5190	22.75	22.92	22.58	22.57	28.73	30	Pass
802.11ax (40MHz)	5230	22.51	22.76	22.37	22.51	28.56	30	Pass
802.11ax (80MHz)	5210	22.18	22.19	22.08	22.11	28.16	30	Pass

Note:

1) ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

2) All transmit signals are completely uncorrelated with each other.

3) Total Power = $10 \cdot \log \{10^{(\text{Ant 0 Max Power}/10)} + 10^{(\text{Ant 1 Max Power}/10)} + 10^{(\text{Ant 2 Max Power}/10)} + 10^{(\text{Ant 3 Max Power}/10)}\}$.

U-NII-1 AVGSA Output Power - 2×2 MIMO						
Mode	Frequency (MHz)	Max Power (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant4	Ant5			
802.11n (20MHz)	5180	22.42	22.31	25.38	30	Pass
802.11n (20MHz)	5220	22.41	22.29	25.36	30	Pass
802.11n (20MHz)	5240	22.36	22.34	25.36	30	Pass
802.11n (40MHz)	5190	22.71	22.42	25.58	30	Pass
802.11n (40MHz)	5230	22.55	22.64	25.61	30	Pass
802.11ac (20MHz)	5180	22.37	22.52	25.46	30	Pass
802.11ac (20MHz)	5220	22.34	22.49	25.43	30	Pass
802.11ac (20MHz)	5240	22.35	22.50	25.44	30	Pass
802.11ac (40MHz)	5190	22.73	22.66	25.71	30	Pass
802.11ac (40MHz)	5230	22.59	22.56	25.59	30	Pass
802.11ac (80MHz)	5210	22.31	22.29	25.31	30	Pass
802.11a (20MHz)	5180	22.60	22.39	25.51	30	Pass
802.11a (20MHz)	5220	22.53	22.39	25.47	30	Pass
802.11a (20MHz)	5240	22.54	22.33	25.45	30	Pass
802.11ax (20MHz)	5180	22.54	22.39	25.48	30	Pass
802.11ax (20MHz)	5220	22.42	22.37	25.41	30	Pass
802.11ax (20MHz)	5240	22.42	22.36	25.40	30	Pass
802.11ax (40MHz)	5190	22.79	22.69	25.75	30	Pass
802.11ax (40MHz)	5230	22.55	22.59	25.58	30	Pass
802.11ax (80MHz)	5210	22.18	22.28	25.24	30	Pass

Note:

1) ANT 4 and ANT 5 is 2*2MIMO.

2) All transmit signals are completely uncorrelated with each other.

3) Total Power = $10 \cdot \log \{ 10^{(Ant\ 4\ Max\ Power/10)} + 10^{(Ant\ 5\ Max\ Power/10)} \}$.

U-NII-3 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5745	Ant0	0.00	21.49	30	Pass
802.11n (20MHz)	5785	Ant0	0.00	21.90	30	Pass
802.11n (20MHz)	5825	Ant0	0.00	21.54	30	Pass
802.11n (40MHz)	5755	Ant0	0.00	22.28	30	Pass
802.11n (40MHz)	5795	Ant0	0.00	22.41	30	Pass
802.11ac (20MHz)	5745	Ant0	0.00	21.76	30	Pass
802.11ac (20MHz)	5785	Ant0	0.00	21.97	30	Pass
802.11ac (20MHz)	5825	Ant0	0.00	21.84	30	Pass
802.11ac (40MHz)	5755	Ant0	0.00	22.30	30	Pass
802.11ac (40MHz)	5795	Ant0	0.00	22.39	30	Pass
802.11ac (80MHz)	5775	Ant0	0.00	22.33	30	Pass
802.11a (20MHz)	5745	Ant0	0.00	21.36	30	Pass
802.11a (20MHz)	5785	Ant0	0.00	21.68	30	Pass
802.11a (20MHz)	5825	Ant0	0.00	21.59	30	Pass
802.11ax (20MHz)	5745	Ant0	0.00	21.66	30	Pass
802.11ax (20MHz)	5785	Ant0	0.00	22.03	30	Pass
802.11ax (20MHz)	5825	Ant0	0.00	21.88	30	Pass
802.11ax (40MHz)	5755	Ant0	0.00	22.33	30	Pass
802.11ax (40MHz)	5795	Ant0	0.00	22.47	30	Pass
802.11ax (80MHz)	5775	Ant0	0.00	22.28	30	Pass

U-NII-3 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5745	Ant1	0.00	22.78	30	Pass
802.11n (20MHz)	5785	Ant1	0.00	22.95	30	Pass
802.11n (20MHz)	5825	Ant1	0.00	22.40	30	Pass
802.11n (40MHz)	5755	Ant1	0.00	23.13	30	Pass
802.11n (40MHz)	5795	Ant1	0.00	23.19	30	Pass
802.11ac (20MHz)	5745	Ant1	0.00	22.92	30	Pass
802.11ac (20MHz)	5785	Ant1	0.00	22.83	30	Pass
802.11ac (20MHz)	5825	Ant1	0.00	22.30	30	Pass
802.11ac (40MHz)	5755	Ant1	0.00	23.39	30	Pass
802.11ac (40MHz)	5795	Ant1	0.00	23.32	30	Pass
802.11ac (80MHz)	5775	Ant1	0.00	23.22	30	Pass
802.11a (20MHz)	5745	Ant1	0.00	22.55	30	Pass
802.11a (20MHz)	5785	Ant1	0.00	22.58	30	Pass
802.11a (20MHz)	5825	Ant1	0.00	22.21	30	Pass
802.11ax (20MHz)	5745	Ant1	0.00	22.84	30	Pass
802.11ax (20MHz)	5785	Ant1	0.00	24.08	30	Pass
802.11ax (20MHz)	5825	Ant1	0.00	23.61	30	Pass
802.11ax (40MHz)	5755	Ant1	0.00	23.46	30	Pass
802.11ax (40MHz)	5795	Ant1	0.00	23.45	30	Pass
802.11ax (80MHz)	5775	Ant1	0.00	23.21	30	Pass

U-NII-3 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5745	Ant2	0.00	22.92	30	Pass
802.11n (20MHz)	5785	Ant2	0.00	21.36	30	Pass
802.11n (20MHz)	5825	Ant2	0.00	21.15	30	Pass
802.11n (40MHz)	5755	Ant2	0.00	21.31	30	Pass
802.11n (40MHz)	5795	Ant2	0.00	21.57	30	Pass
802.11ac (20MHz)	5745	Ant2	0.00	20.89	30	Pass
802.11ac (20MHz)	5785	Ant2	0.00	21.16	30	Pass
802.11ac (20MHz)	5825	Ant2	0.00	21.13	30	Pass
802.11ac (40MHz)	5755	Ant2	0.00	21.42	30	Pass
802.11ac (40MHz)	5795	Ant2	0.00	21.58	30	Pass
802.11ac (80MHz)	5775	Ant2	0.00	21.44	30	Pass
802.11a (20MHz)	5745	Ant2	0.00	20.76	30	Pass
802.11a (20MHz)	5785	Ant2	0.00	21.17	30	Pass
802.11a (20MHz)	5825	Ant2	0.00	20.94	30	Pass
802.11ax (20MHz)	5745	Ant2	0.00	20.78	30	Pass
802.11ax (20MHz)	5785	Ant2	0.00	21.08	30	Pass
802.11ax (20MHz)	5825	Ant2	0.00	21.10	30	Pass
802.11ax (40MHz)	5755	Ant2	0.00	21.19	30	Pass
802.11ax (40MHz)	5795	Ant2	0.00	21.55	30	Pass
802.11ax (80MHz)	5775	Ant2	0.00	21.22	30	Pass

U-NII-3 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5745	Ant3	0.00	23.00	30	Pass
802.11n (20MHz)	5785	Ant3	0.00	22.92	30	Pass
802.11n (20MHz)	5825	Ant3	0.00	22.70	30	Pass
802.11n (40MHz)	5755	Ant3	0.00	23.54	30	Pass
802.11n (40MHz)	5795	Ant3	0.00	23.52	30	Pass
802.11ac (20MHz)	5745	Ant3	0.00	23.13	30	Pass
802.11ac (20MHz)	5785	Ant3	0.00	23.28	30	Pass
802.11ac (20MHz)	5825	Ant3	0.00	23.16	30	Pass
802.11ac (40MHz)	5755	Ant3	0.00	23.83	30	Pass
802.11ac (40MHz)	5795	Ant3	0.00	23.77	30	Pass
802.11ac (80MHz)	5775	Ant3	0.00	23.73	30	Pass
802.11a (20MHz)	5745	Ant3	0.00	22.55	30	Pass
802.11a (20MHz)	5785	Ant3	0.00	22.79	30	Pass
802.11a (20MHz)	5825	Ant3	0.00	22.72	30	Pass
802.11ax (20MHz)	5745	Ant3	0.00	23.16	30	Pass
802.11ax (20MHz)	5785	Ant3	0.00	23.20	30	Pass
802.11ax (20MHz)	5825	Ant3	0.00	23.17	30	Pass
802.11ax (40MHz)	5755	Ant3	0.00	23.82	30	Pass
802.11ax (40MHz)	5795	Ant3	0.00	23.84	30	Pass
802.11ax (80MHz)	5775	Ant3	0.00	23.79	30	Pass

(module QCN5052)

U-NII-3 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5745	Ant4	0.00	22.58	30	Pass
802.11n (20MHz)	5785	Ant4	0.00	22.53	30	Pass
802.11n (20MHz)	5825	Ant4	0.00	22.11	30	Pass
802.11n (40MHz)	5755	Ant4	0.00	22.93	30	Pass
802.11n (40MHz)	5795	Ant4	0.00	22.80	30	Pass
802.11ac (20MHz)	5745	Ant4	0.00	22.60	30	Pass
802.11ac (20MHz)	5785	Ant4	0.00	22.58	30	Pass
802.11ac (20MHz)	5825	Ant4	0.00	22.25	30	Pass
802.11ac (40MHz)	5755	Ant4	0.00	23.17	30	Pass
802.11ac (40MHz)	5795	Ant4	0.00	23.19	30	Pass
802.11ac (80MHz)	5775	Ant4	0.00	23.06	30	Pass
802.11a (20MHz)	5745	Ant4	0.00	22.39	30	Pass
802.11a (20MHz)	5785	Ant4	0.00	22.49	30	Pass
802.11a (20MHz)	5825	Ant4	0.00	22.06	30	Pass
802.11ax (20MHz)	5745	Ant4	0.00	22.65	30	Pass
802.11ax (20MHz)	5785	Ant4	0.00	22.57	30	Pass
802.11ax (20MHz)	5825	Ant4	0.00	22.35	30	Pass
802.11ax (40MHz)	5755	Ant4	0.00	23.15	30	Pass
802.11ax (40MHz)	5795	Ant4	0.00	23.10	30	Pass
802.11ax (80MHz)	5775	Ant4	0.00	23.01	30	Pass

U-NII-3 AVGSA Output Power						
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5745	Ant5	0.00	23.18	30	Pass
802.11n (20MHz)	5785	Ant5	0.00	21.64	30	Pass
802.11n (20MHz)	5825	Ant5	0.00	21.47	30	Pass
802.11n (40MHz)	5755	Ant5	0.00	21.88	30	Pass
802.11n (40MHz)	5795	Ant5	0.00	22.00	30	Pass
802.11ac (20MHz)	5745	Ant5	0.00	21.33	30	Pass
802.11ac (20MHz)	5785	Ant5	0.00	21.59	30	Pass
802.11ac (20MHz)	5825	Ant5	0.00	21.50	30	Pass
802.11ac (40MHz)	5755	Ant5	0.00	21.98	30	Pass
802.11ac (40MHz)	5795	Ant5	0.00	21.89	30	Pass
802.11ac (80MHz)	5775	Ant5	0.00	22.08	30	Pass
802.11a (20MHz)	5745	Ant5	0.00	21.37	30	Pass
802.11a (20MHz)	5785	Ant5	0.00	21.37	30	Pass
802.11a (20MHz)	5825	Ant5	0.00	21.31	30	Pass
802.11ax (20MHz)	5745	Ant5	0.00	21.38	30	Pass
802.11ax (20MHz)	5785	Ant5	0.00	21.64	30	Pass
802.11ax (20MHz)	5825	Ant5	0.00	21.51	30	Pass
802.11ax (40MHz)	5755	Ant5	0.00	21.92	30	Pass
802.11ax (40MHz)	5795	Ant5	0.00	22.23	30	Pass
802.11ax (80MHz)	5775	Ant5	0.00	22.36	30	Pass

(module QCN9024)
U-NII-3 AVGSA Output Power - 4×4 MIMO

Mode	Frequency (MHz)	Max Power (dBm)				Total Power (dBm)	Limit (dBm)	Result
		Ant0	Ant1	Ant2	Ant3			
802.11n (20MHz)	5745	21.49	22.78	22.92	23.00	28.61	30	Pass
802.11n (20MHz)	5785	21.90	22.95	21.36	22.92	28.36	30	Pass
802.11n (20MHz)	5825	21.54	22.40	21.15	22.70	28.01	30	Pass
802.11n (40MHz)	5755	22.28	23.13	21.31	23.54	28.67	30	Pass
802.11n (40MHz)	5795	22.41	23.19	21.57	23.52	28.76	30	Pass
802.11ac (20MHz)	5745	21.76	22.92	20.89	23.13	28.29	30	Pass
802.11ac (20MHz)	5785	21.97	22.83	21.16	23.28	28.41	30	Pass
802.11ac (20MHz)	5825	21.84	22.30	21.13	23.16	28.19	30	Pass
802.11ac (40MHz)	5755	22.30	23.39	21.42	23.83	28.86	30	Pass
802.11ac (40MHz)	5795	22.39	23.32	21.58	23.77	28.87	30	Pass
802.11ac (80MHz)	5775	22.33	23.22	21.44	23.73	28.79	30	Pass
802.11a (20MHz)	5745	21.36	22.55	20.76	22.55	27.89	30	Pass
802.11a (20MHz)	5785	21.68	22.58	21.17	22.79	28.13	30	Pass
802.11a (20MHz)	5825	21.59	22.21	20.94	22.72	27.94	30	Pass
802.11ax (20MHz)	5745	21.66	22.84	20.78	23.16	28.23	30	Pass
802.11ax (20MHz)	5785	22.03	24.08	21.08	23.20	28.77	30	Pass
802.11ax (20MHz)	5825	21.88	23.61	21.10	23.17	28.57	30	Pass
802.11ax (40MHz)	5755	22.33	23.46	21.19	23.82	28.84	30	Pass
802.11ax (40MHz)	5795	22.47	23.45	21.55	23.84	28.94	30	Pass
802.11ax (80MHz)	5775	22.28	23.21	21.22	23.79	28.75	30	Pass

Note:

1) ANT 0, ANT 1, ANT 2 and ANT 3 is 4*4MIMO.

2) All transmit signals are completely uncorrelated with each other.

3) Total Power = $10 \cdot \log \{10^{(\text{Ant 0 Max Power}/10)} + 10^{(\text{Ant 1 Max Power}/10)} + 10^{(\text{Ant 2 Max Power}/10)} + 10^{(\text{Ant 3 Max Power}/10)}\}$.

(module QCN5052)

U-NII-3 AVGSA Output Power - 2×2 MIMO						
Mode	Frequency (MHz)	Max Power (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Ant4	Ant5			
802.11n (20MHz)	5745	22.58	23.18	25.90	30	Pass
802.11n (20MHz)	5785	22.53	21.64	25.12	30	Pass
802.11n (20MHz)	5825	22.11	21.47	24.81	30	Pass
802.11n (40MHz)	5755	22.93	21.88	25.45	30	Pass
802.11n (40MHz)	5795	22.80	22.00	25.43	30	Pass
802.11ac (20MHz)	5745	22.60	21.33	25.02	30	Pass
802.11ac (20MHz)	5785	22.58	21.59	25.12	30	Pass
802.11ac (20MHz)	5825	22.25	21.50	24.90	30	Pass
802.11ac (40MHz)	5755	23.17	21.98	25.63	30	Pass
802.11ac (40MHz)	5795	23.19	21.89	25.60	30	Pass
802.11ac (80MHz)	5775	23.06	22.08	25.61	30	Pass
802.11a (20MHz)	5745	22.39	21.37	24.92	30	Pass
802.11a (20MHz)	5785	22.49	21.37	24.98	30	Pass
802.11a (20MHz)	5825	22.06	21.31	24.71	30	Pass
802.11ax (20MHz)	5745	22.65	21.38	25.07	30	Pass
802.11ax (20MHz)	5785	22.57	21.64	25.14	30	Pass
802.11ax (20MHz)	5825	22.35	21.51	24.96	30	Pass
802.11ax (40MHz)	5755	23.15	21.92	25.59	30	Pass
802.11ax (40MHz)	5795	23.10	22.23	25.70	30	Pass
802.11ax (80MHz)	5775	23.01	22.36	25.71	30	Pass

Note:


1) ANT 4 and ANT 5 is 2*2MIMO.

2) All transmit signals are completely uncorrelated with each other.


3) Total Power = $10 \cdot \log \{ 10^{(\text{Ant 4 Max Power}/10)} + 10^{(\text{Ant 5 Max Power}/10)} \}$.

Test plots


U-NII-1 Output Power-802.11n(20MHz)
,5180MHz,Ant0

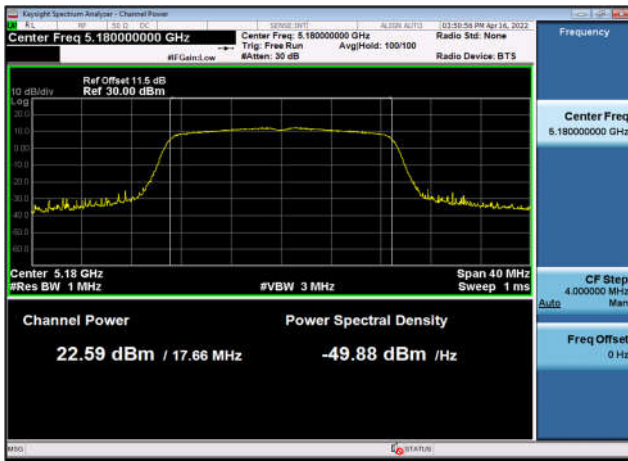


U-NII-1 Output Power-802.11n(20MHz)
,5220MHz,Ant0

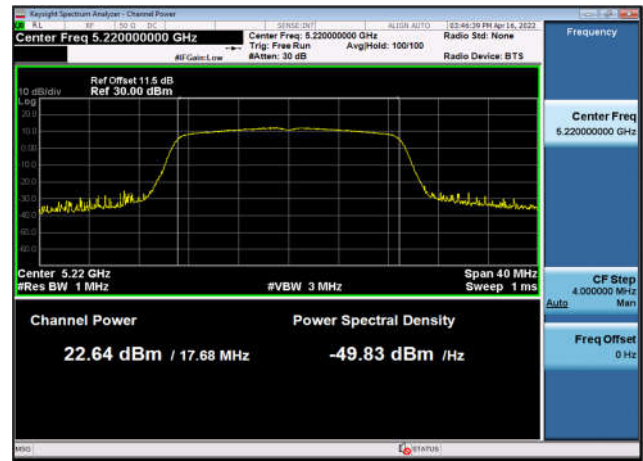


U-NII-1 Output Power-802.11n(20MHz)
,5240MHz,Ant0

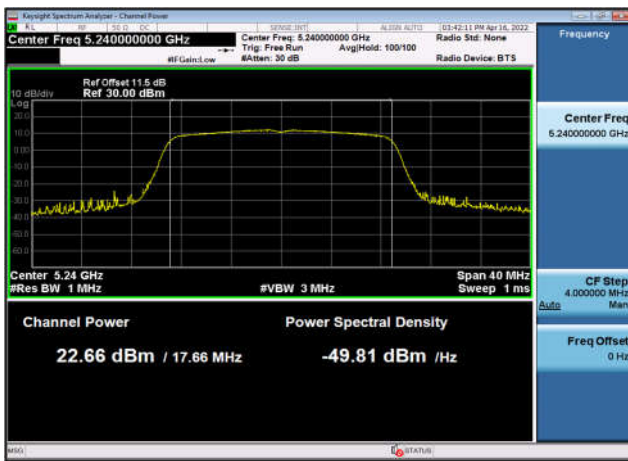


U-NII-1 Output Power-802.11n(40MHz)
,5190MHz,Ant0

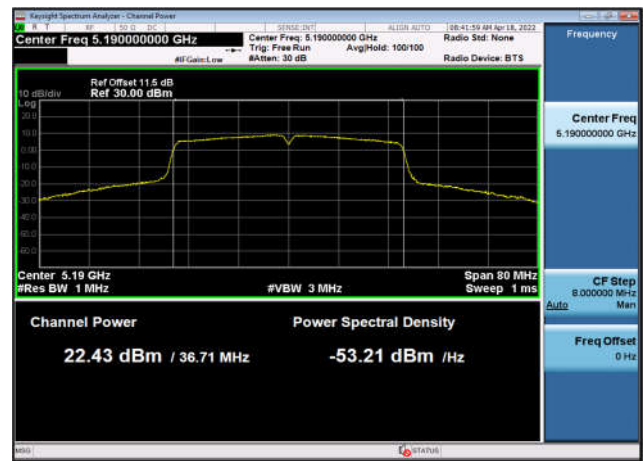


U-NII-1 Output Power-802.11n(40MHz)
,5230MHz,Ant0

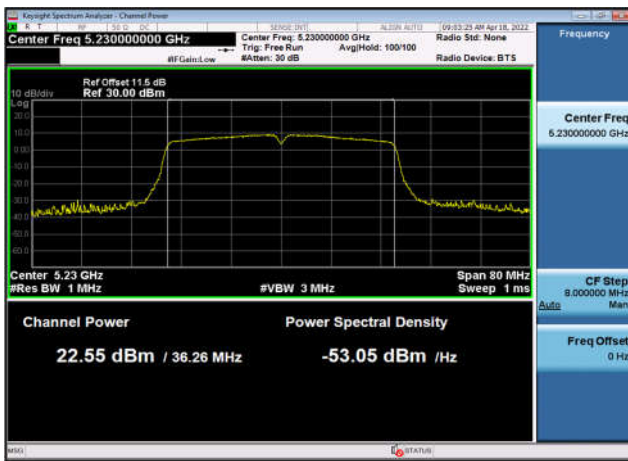


U-NII-1 Output Power-802.11a(20MHz)
,5180MHz,Ant0

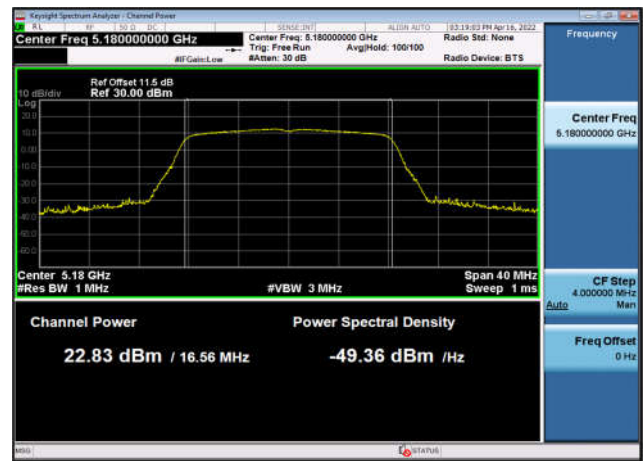


U-NII-1 Output Power-802.11a(20MHz)
,5220MHz,Ant0

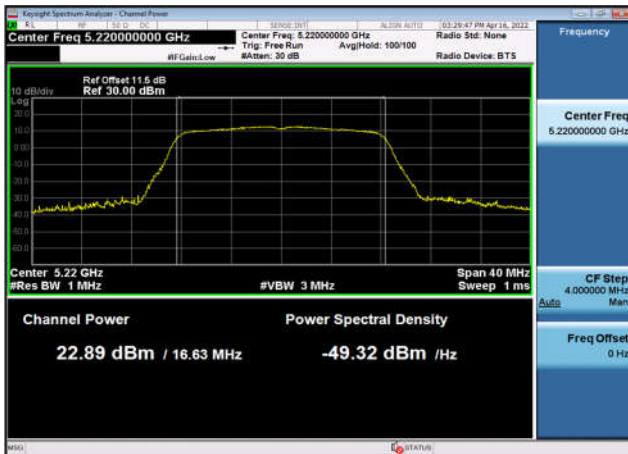


U-NII-1 Output Power-802.11a(20MHz)
,5240MHz,Ant0

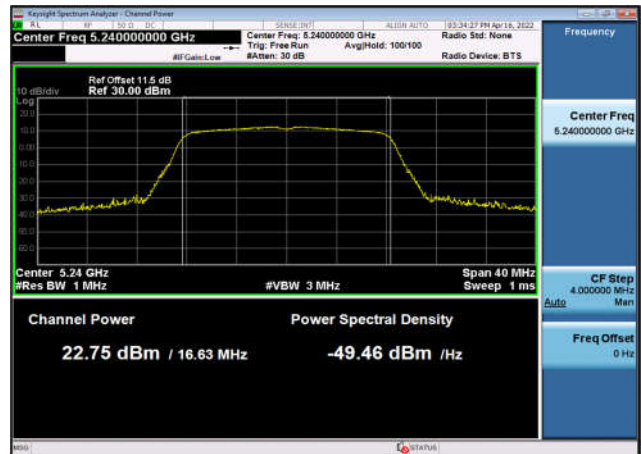


U-NII-1 Output Power-802.11ac(20MHz)
,5180MHz,Ant0

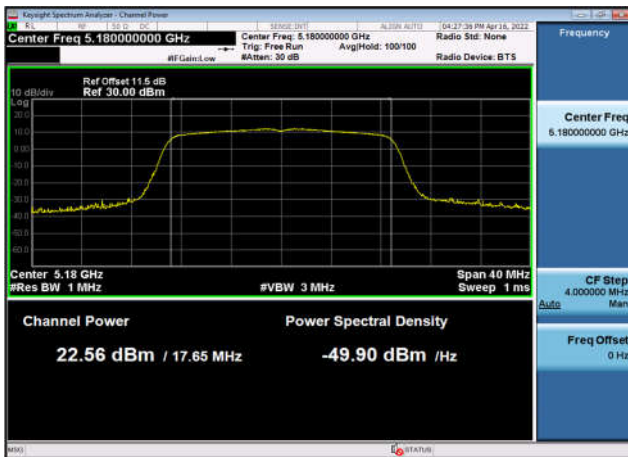


U-NII-1 Output Power-802.11ac(20MHz)
,5220MHz,Ant0

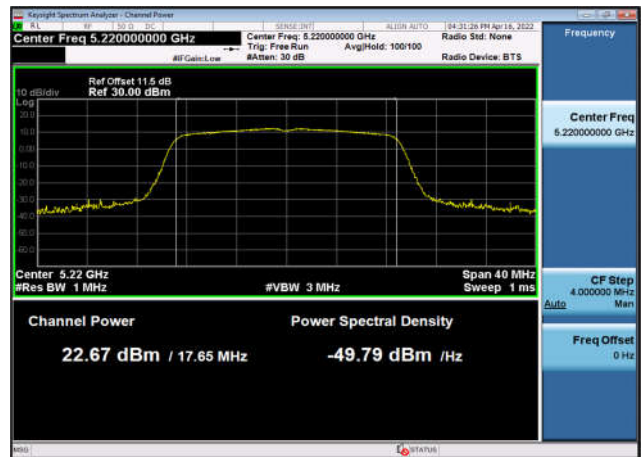


U-NII-1 Output Power-802.11ac(20MHz)
,5240MHz,Ant0

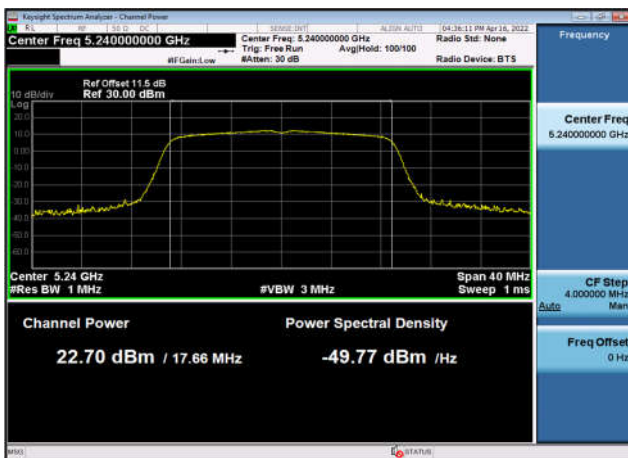


U-NII-1 Output Power-802.11ac(40MHz)
,5190MHz,Ant0

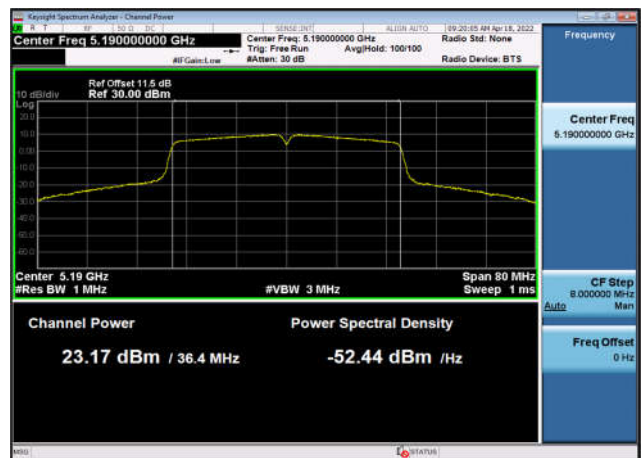


U-NII-1 Output Power-802.11ac(40MHz)
,5230MHz,Ant0

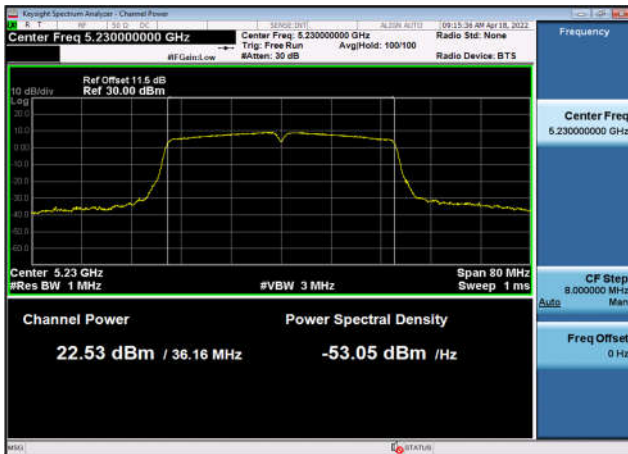


U-NII-1 Output Power-802.11ac(80MHz)
,5210MHz,Ant0

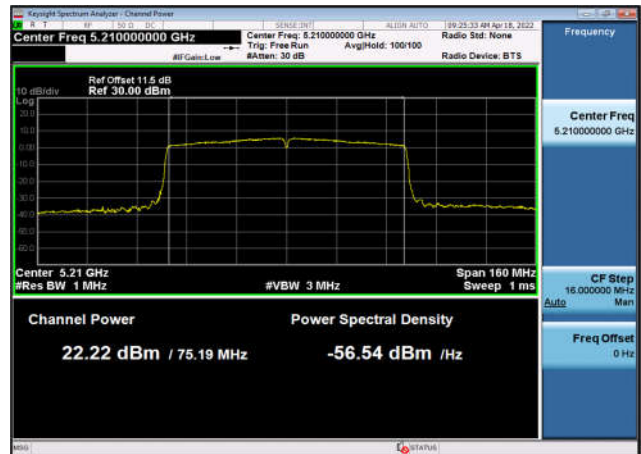


U-NII-1 Output Power-802.11ax(20MHz)
,5180MHz,Ant0

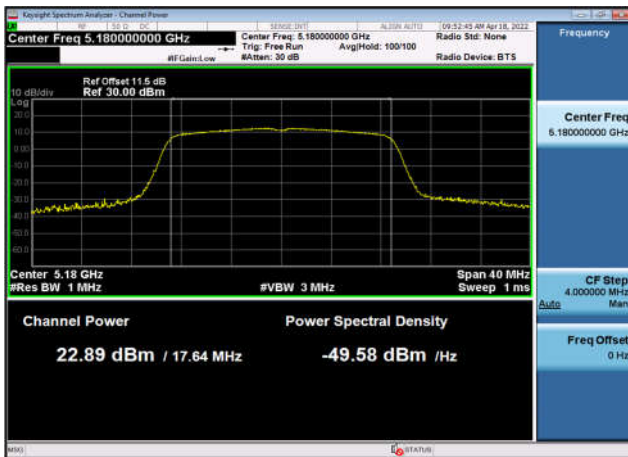


U-NII-1 Output Power-802.11ax(20MHz)
,5220MHz,Ant0

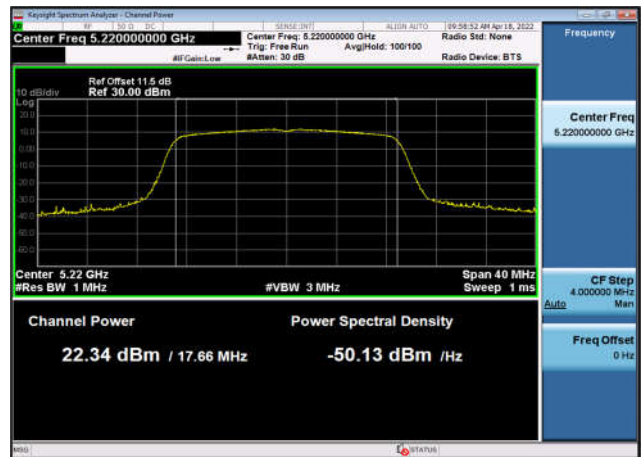


U-NII-1 Output Power-802.11ax(20MHz)
,5240MHz,Ant0

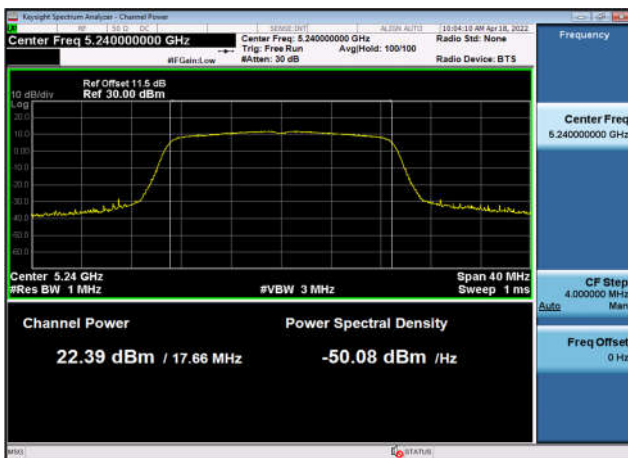

U-NII-1 Output Power-802.11ax(40MHz)
,5190MHz,Ant0

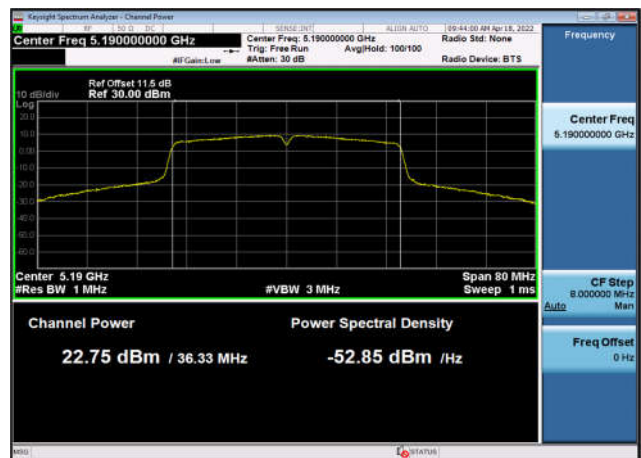


U-NII-1 Output Power-802.11ax(40MHz)
,5230MHz,Ant0

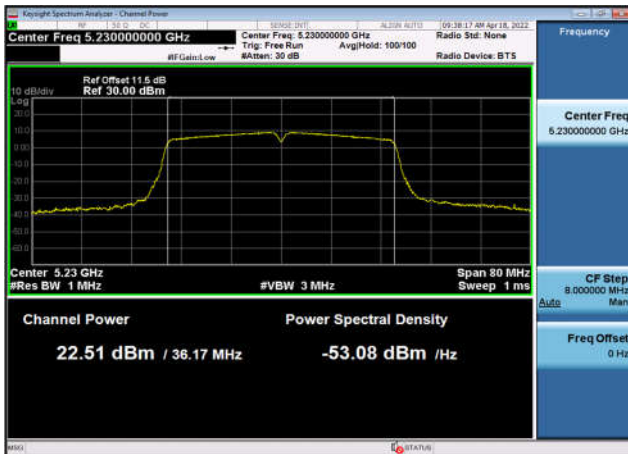


U-NII-1 Output Power-802.11ax(80MHz)
,5210MHz,Ant0




U-NII-1 Output Power-802.11n(20MHz)
,5180MHz,Ant1

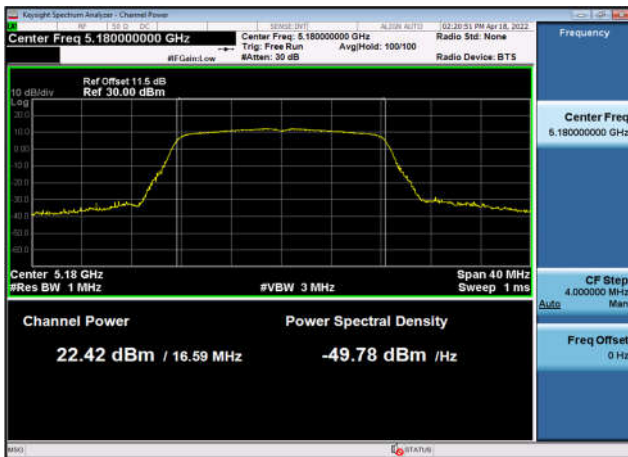


U-NII-1 Output Power-802.11n(20MHz)
,5220MHz,Ant1

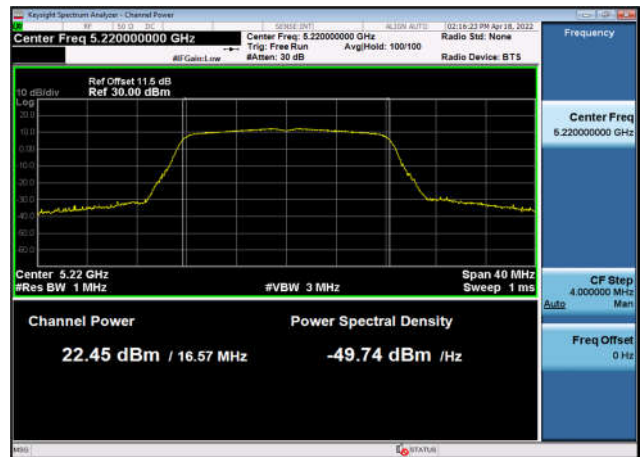


U-NII-1 Output Power-802.11n(20MHz)
,5240MHz,Ant1

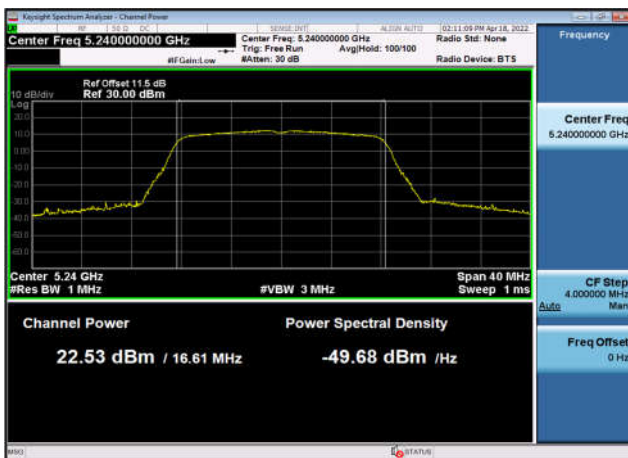

U-NII-1 Output Power-802.11n(40MHz)
,5190MHz,Ant1

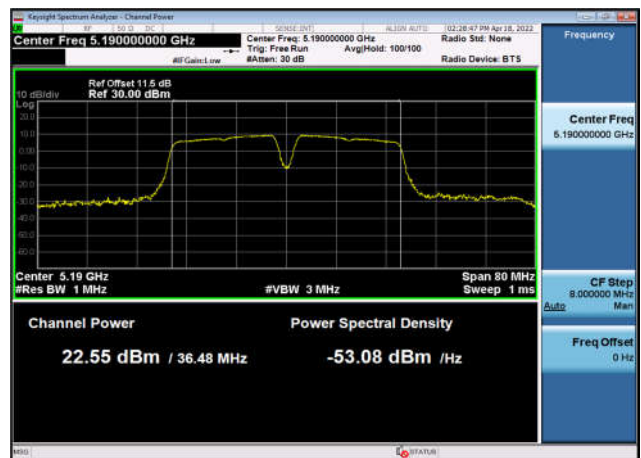

U-NII-1 Output Power-802.11n(40MHz)
,5230MHz,Ant1

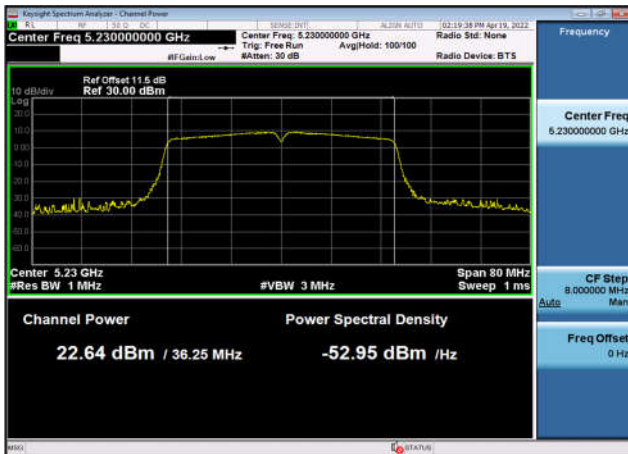


U-NII-1 Output Power-802.11a(20MHz)
,5180MHz,Ant1




U-NII-1 Output Power-802.11a(20MHz)
,5220MHz,Ant1




U-NII-1 Output Power-802.11a(20MHz)
,5240MHz,Ant1

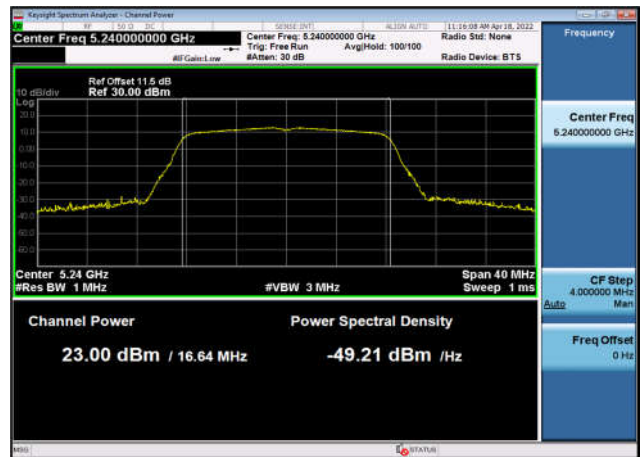


U-NII-1 Output Power-802.11ac(20MHz)
,5180MHz,Ant1

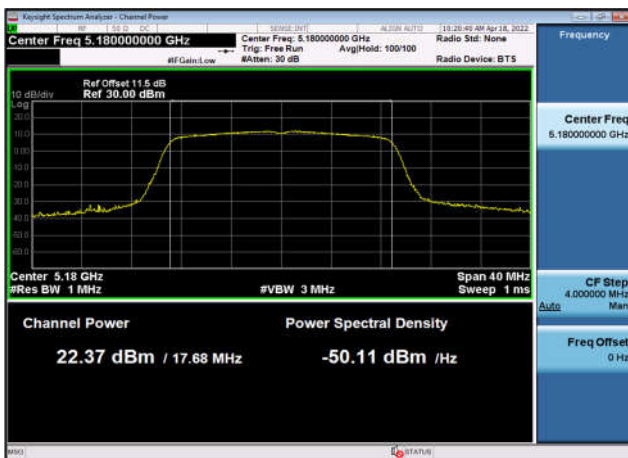


U-NII-1 Output Power-802.11ac(20MHz)
,5220MHz,Ant1

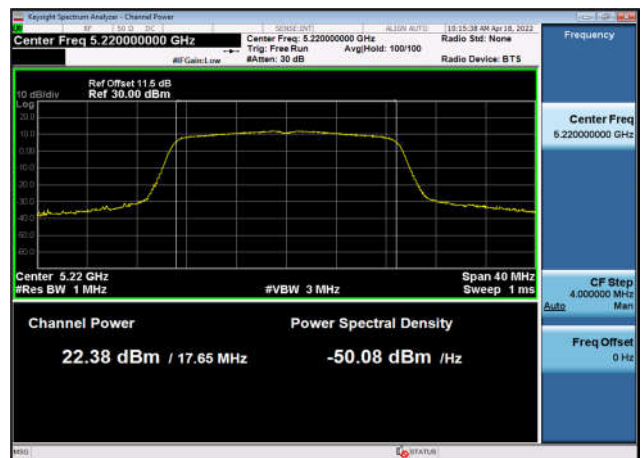


U-NII-1 Output Power-802.11ac(20MHz)
,5240MHz,Ant1

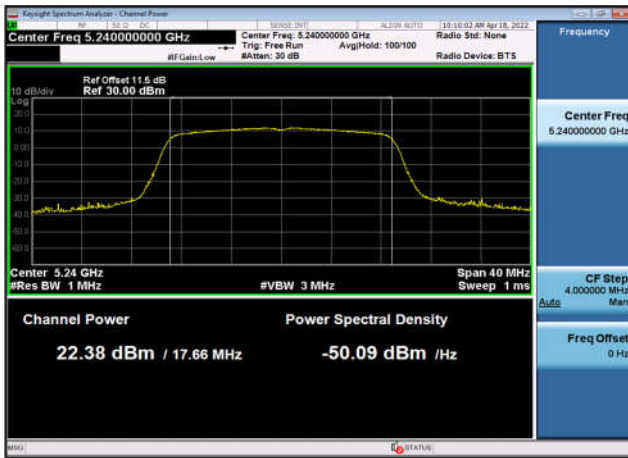

U-NII-1 Output Power-802.11ac(40MHz)
,5190MHz,Ant1

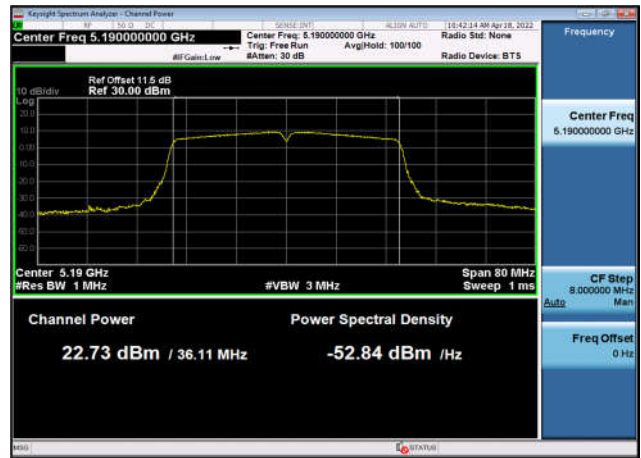


U-NII-1 Output Power-802.11ac(40MHz)
,5230MHz,Ant1

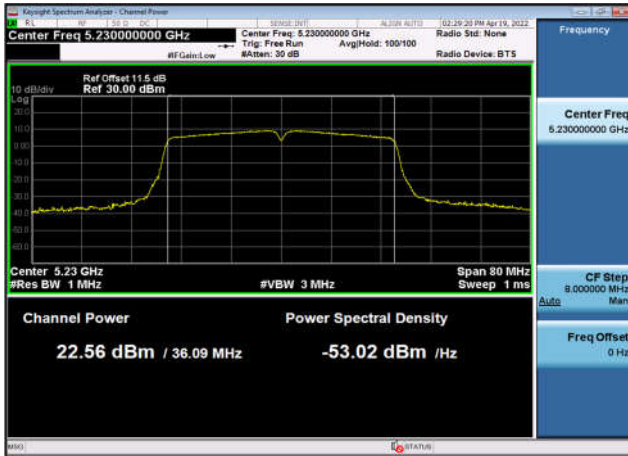


U-NII-1 Output Power-802.11ac(80MHz)
,5210MHz,Ant1




U-NII-1 Output Power-802.11ax(20MHz)
,5180MHz,Ant1

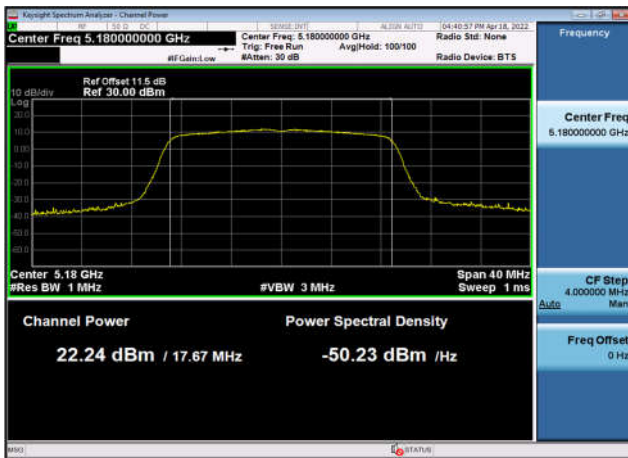


U-NII-1 Output Power-802.11ax(20MHz)
,5220MHz,Ant1

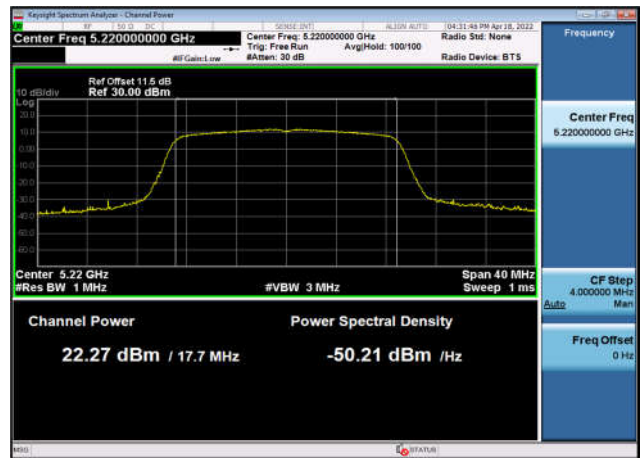


U-NII-1 Output Power-802.11ax(20MHz)
,5240MHz,Ant1

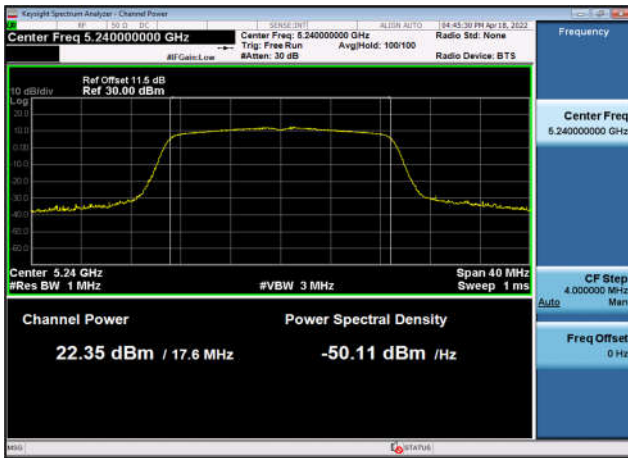

U-NII-1 Output Power-802.11ax(40MHz)
,5190MHz,Ant1

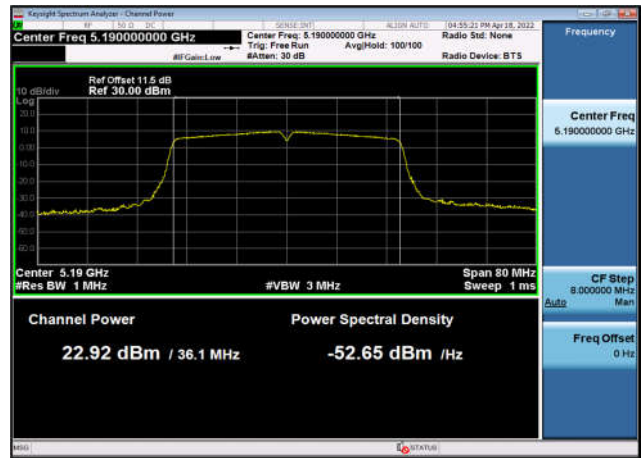


U-NII-1 Output Power-802.11ax(40MHz)
,5230MHz,Ant1

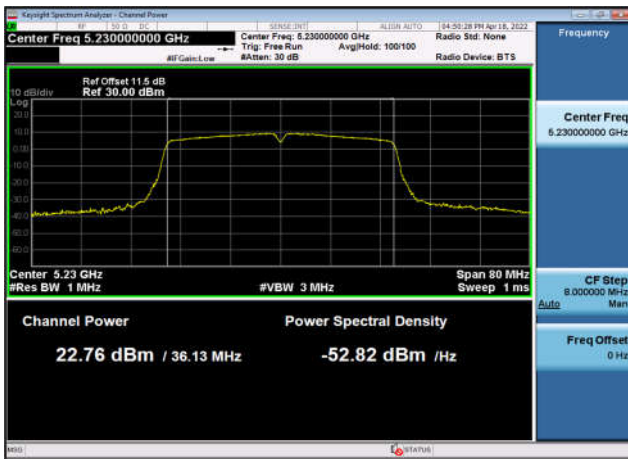


U-NII-1 Output Power-802.11ax(80MHz)
,5210MHz,Ant1




U-NII-1 Output Power-802.11n(20MHz)
,5180MHz,Ant2

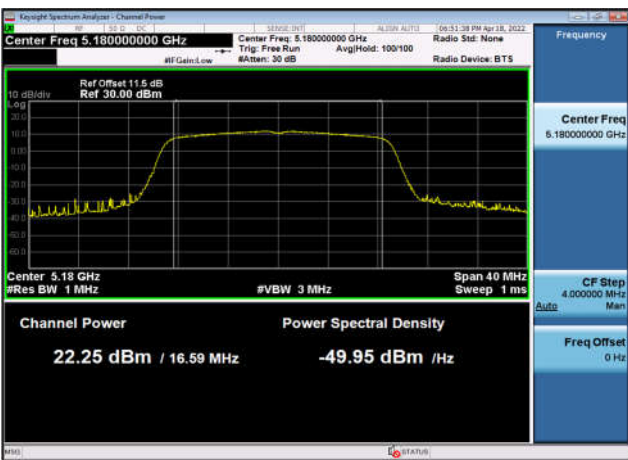


U-NII-1 Output Power-802.11n(20MHz)
,5220MHz,Ant2

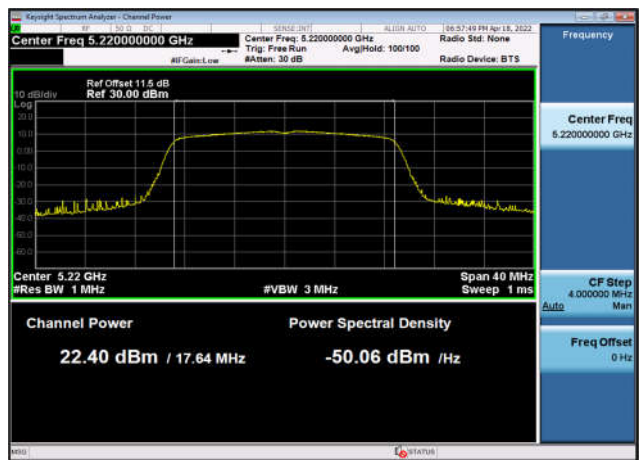


U-NII-1 Output Power-802.11n(20MHz)
,5240MHz,Ant2

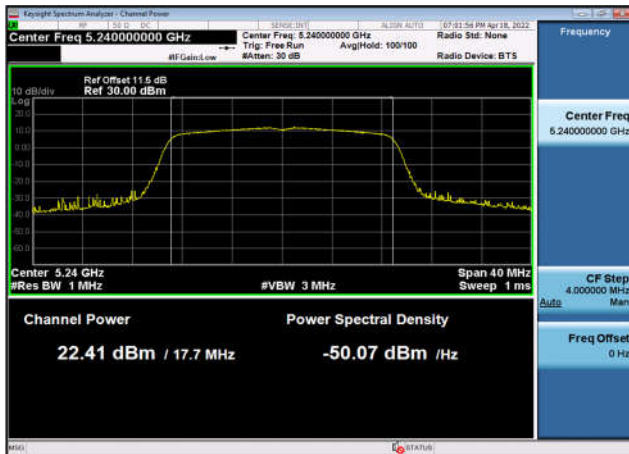


U-NII-1 Output Power-802.11n(40MHz)
,5190MHz,Ant2

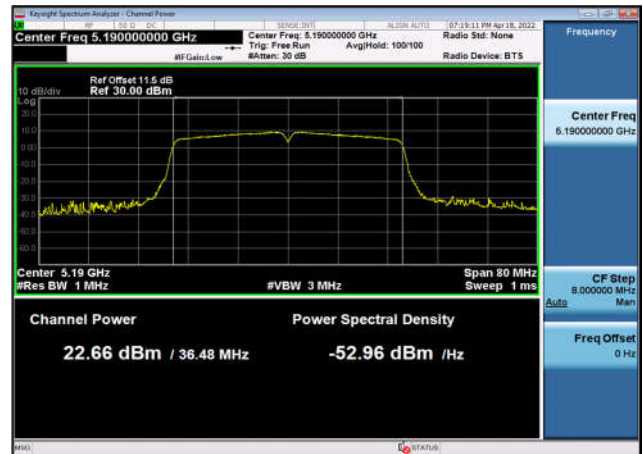


U-NII-1 Output Power-802.11n(40MHz)
,5230MHz,Ant2

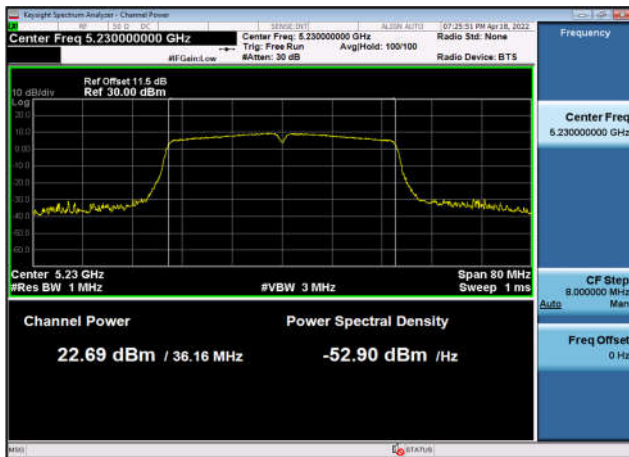


U-NII-1 Output Power-802.11a(20MHz)
,5180MHz,Ant2

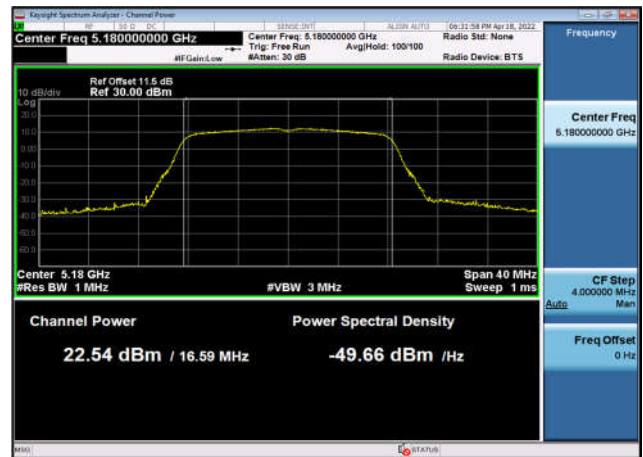


U-NII-1 Output Power-802.11a(20MHz)
,5220MHz,Ant2

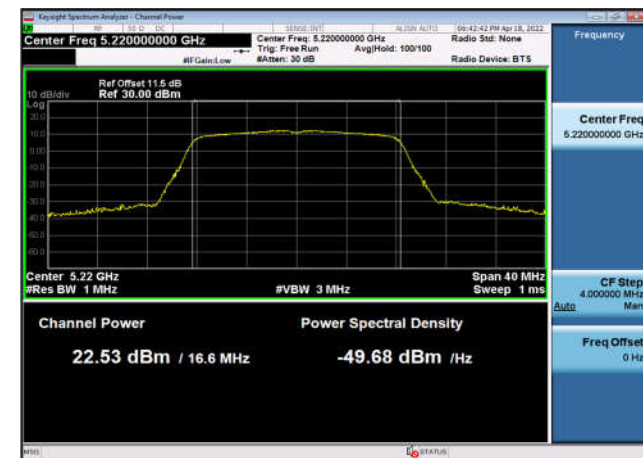


U-NII-1 Output Power-802.11a(20MHz)
,5240MHz,Ant2

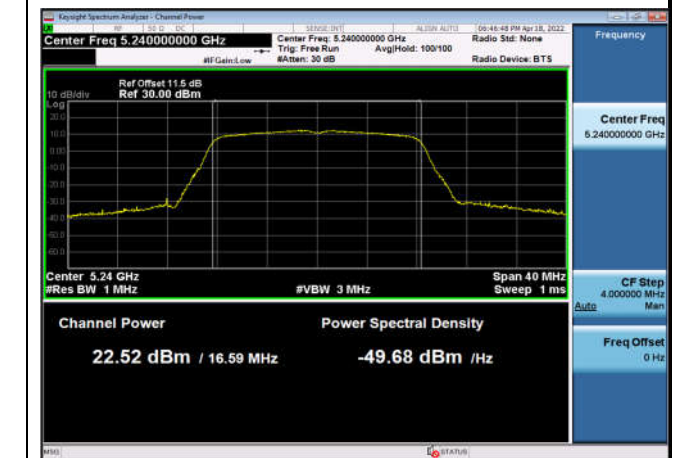


U-NII-1 Output Power-802.11ac(20MHz)
,5180MHz,Ant2

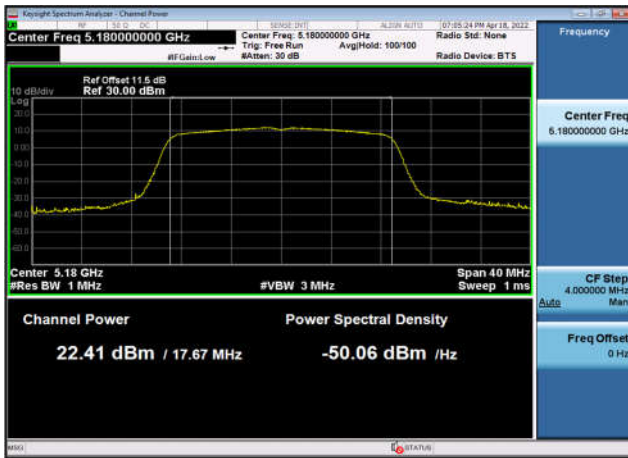


U-NII-1 Output Power-802.11ac(20MHz)
,5220MHz,Ant2

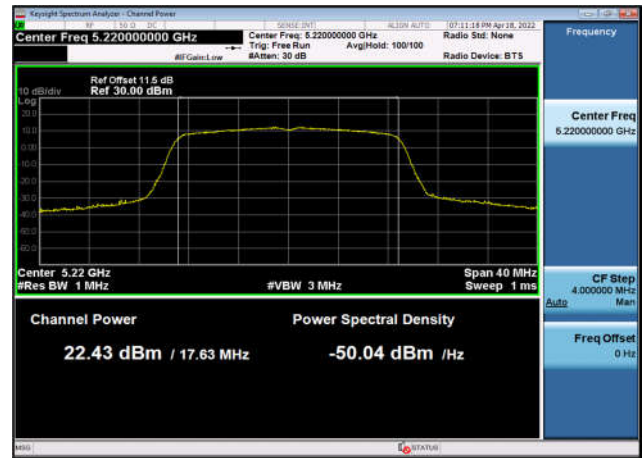

U-NII-1 Output Power-802.11ac(20MHz)
,5240MHz,Ant2

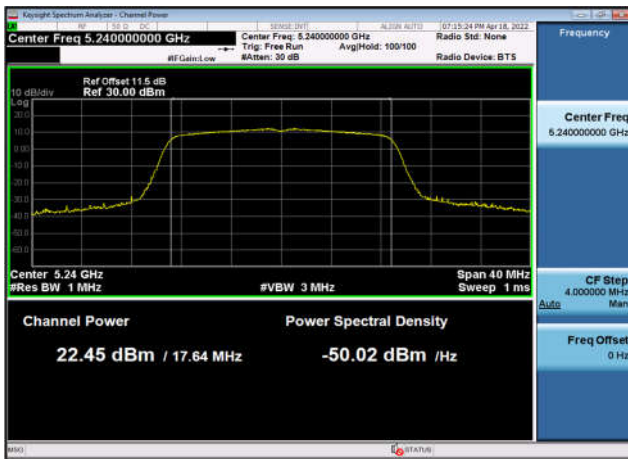


U-NII-1 Output Power-802.11ac(40MHz)
,5190MHz,Ant2

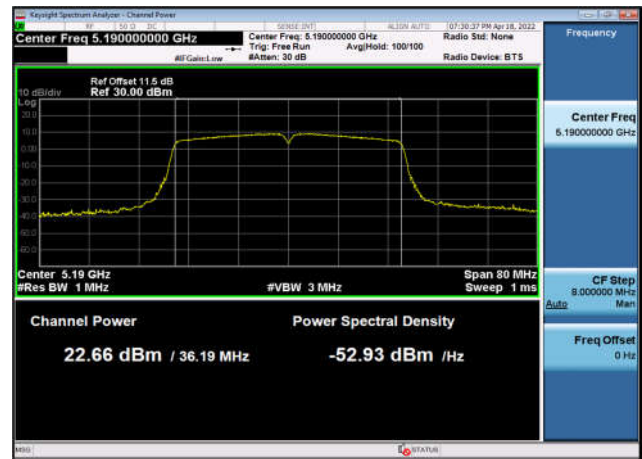


U-NII-1 Output Power-802.11ac(40MHz)
,5230MHz,Ant2




U-NII-1 Output Power-802.11ac(80MHz)
,5210MHz,Ant2

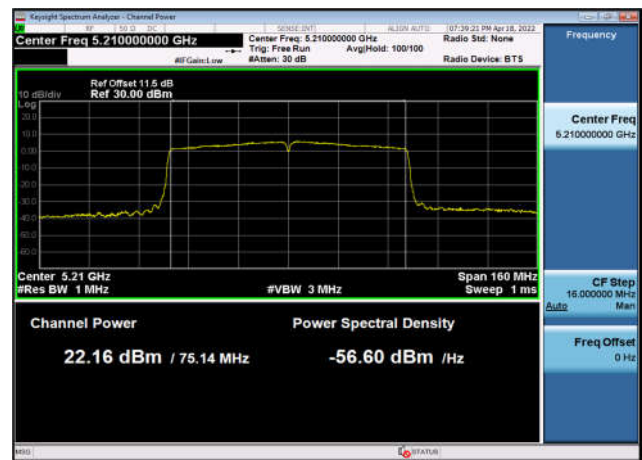


U-NII-1 Output Power-802.11ax(20MHz)
,5180MHz,Ant2

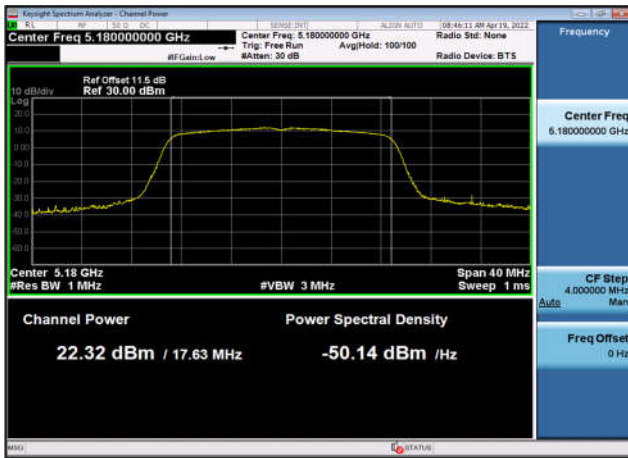


U-NII-1 Output Power-802.11ax(20MHz)
,5220MHz,Ant2

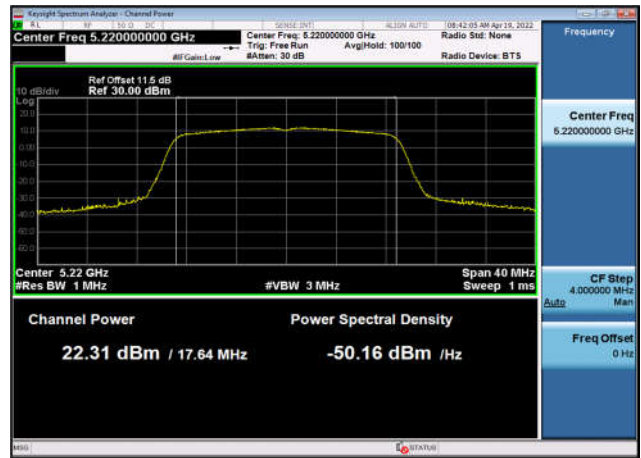

U-NII-1 Output Power-802.11ax(20MHz)
,5240MHz,Ant2

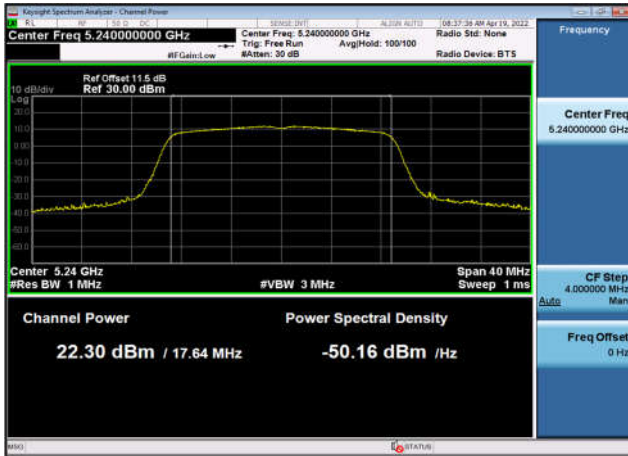


U-NII-1 Output Power-802.11ax(40MHz)
,5190MHz,Ant2

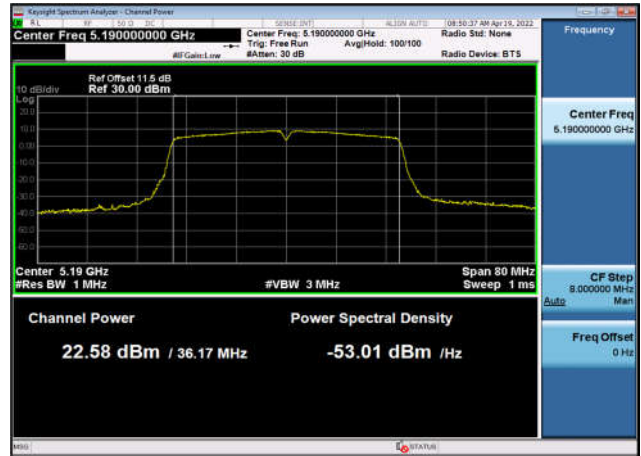


U-NII-1 Output Power-802.11ax(40MHz)
,5230MHz,Ant2




U-NII-1 Output Power-802.11ax(80MHz)
,5210MHz,Ant2

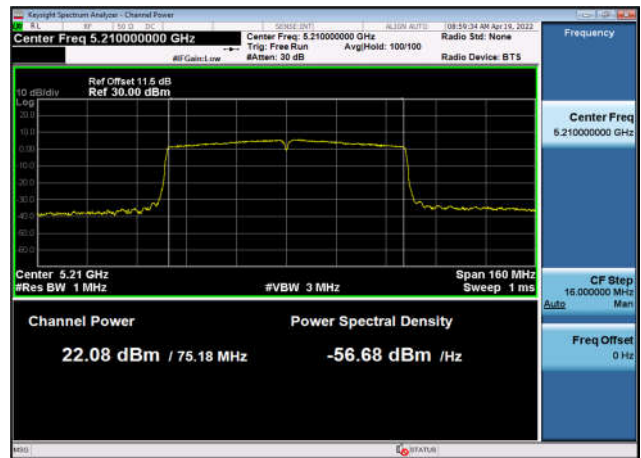


U-NII-1 Output Power-802.11n(20MHz)
,5180MHz,Ant3

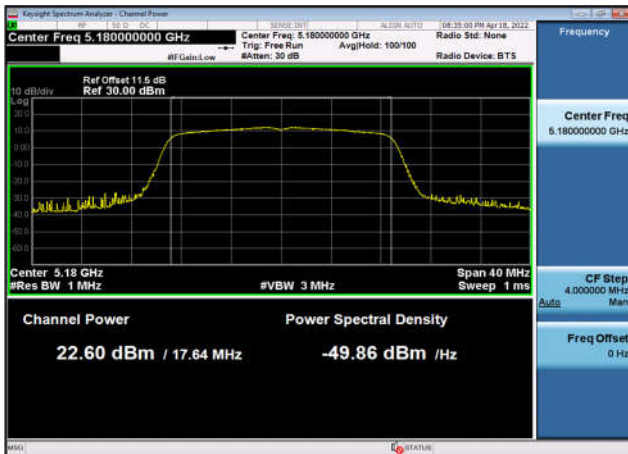


U-NII-1 Output Power-802.11n(20MHz)
,5220MHz,Ant3

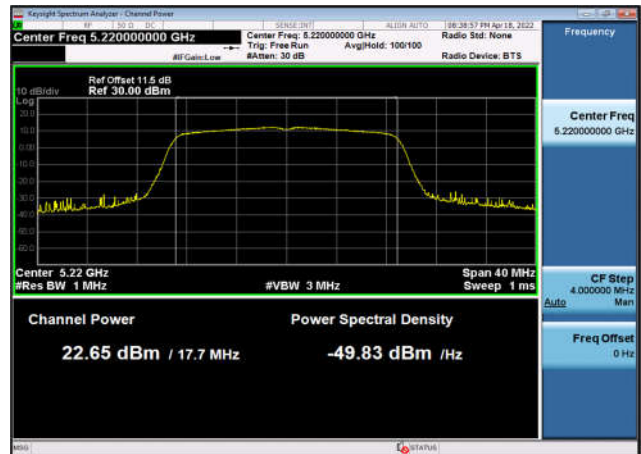


U-NII-1 Output Power-802.11n(20MHz)
,5240MHz,Ant3

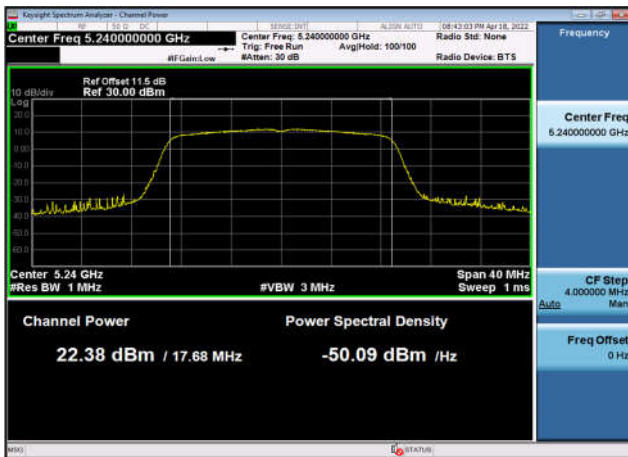


U-NII-1 Output Power-802.11n(40MHz)
,5190MHz,Ant3

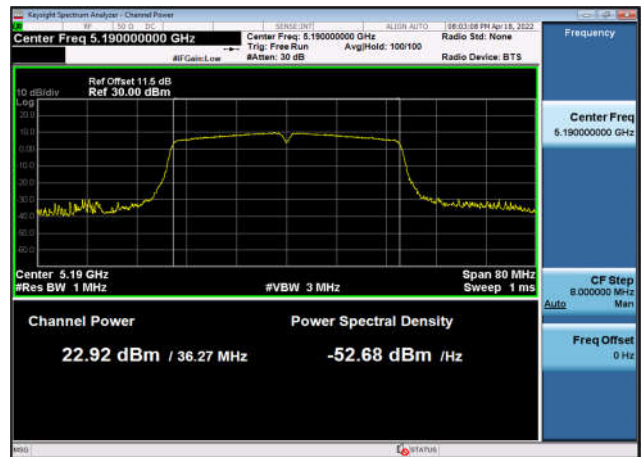


U-NII-1 Output Power-802.11n(40MHz)
,5230MHz,Ant3

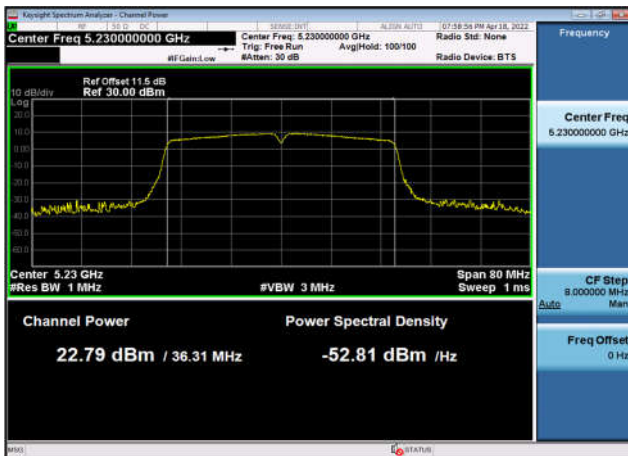


U-NII-1 Output Power-802.11a(20MHz)
,5180MHz,Ant3

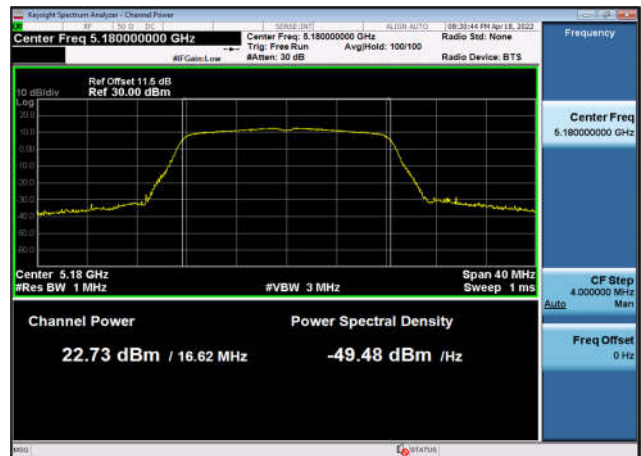


U-NII-1 Output Power-802.11a(20MHz)
,5220MHz,Ant3

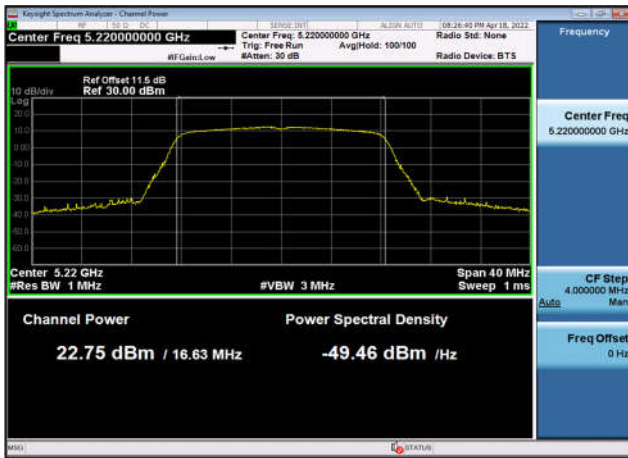


U-NII-1 Output Power-802.11a(20MHz)
,5240MHz,Ant3

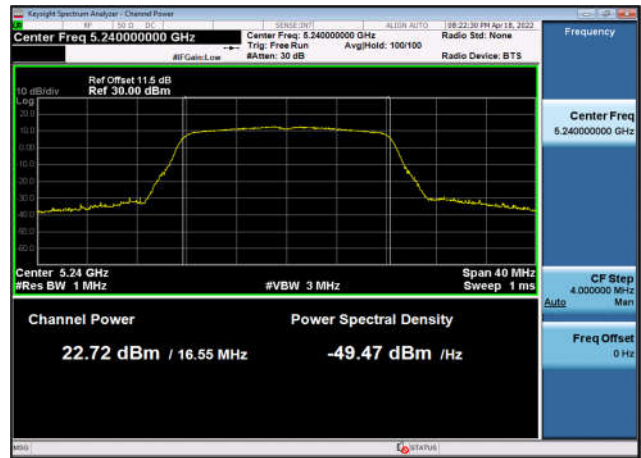


U-NII-1 Output Power-802.11ac(20MHz)
,5180MHz,Ant3

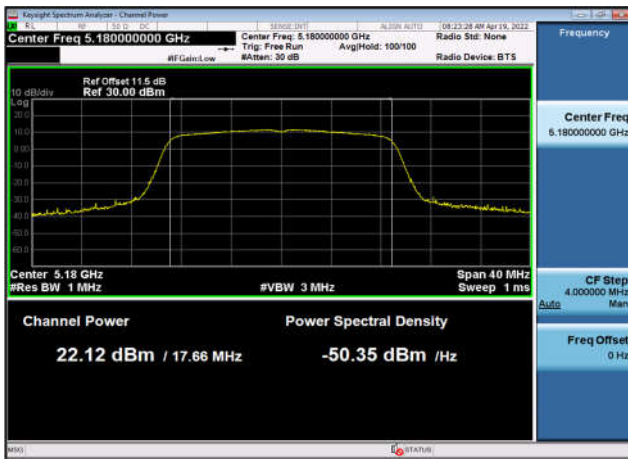


U-NII-1 Output Power-802.11ac(20MHz)
,5220MHz,Ant3

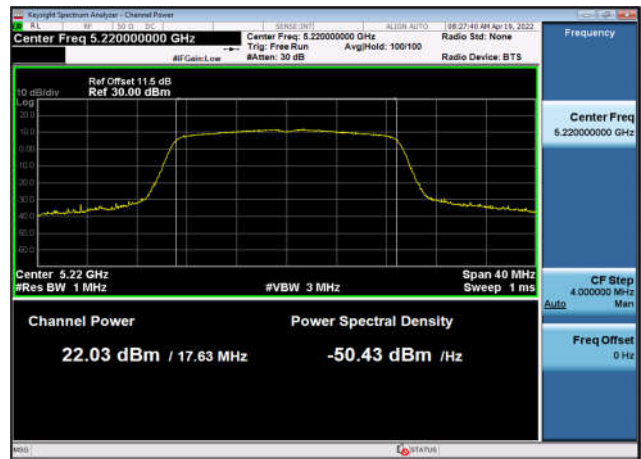


U-NII-1 Output Power-802.11ac(20MHz)
,5240MHz,Ant3

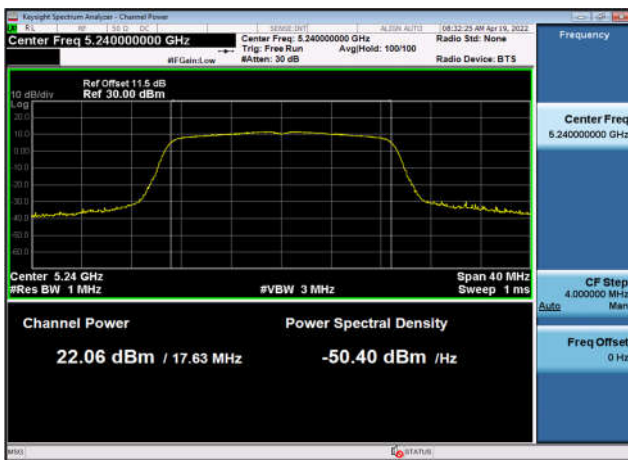


U-NII-1 Output Power-802.11ac(40MHz)
,5190MHz,Ant3

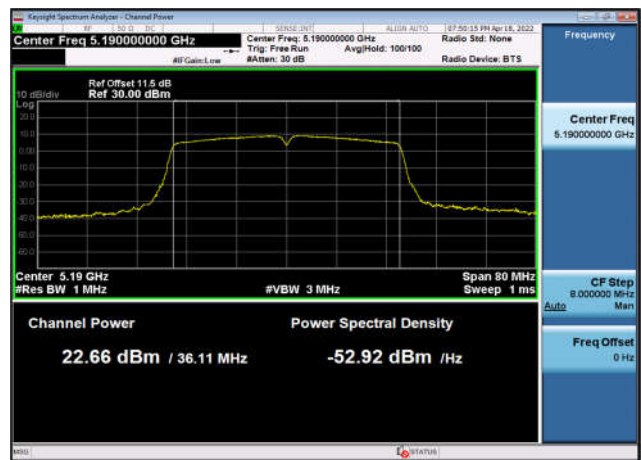

U-NII-1 Output Power-802.11ac(40MHz)
,5230MHz,Ant3

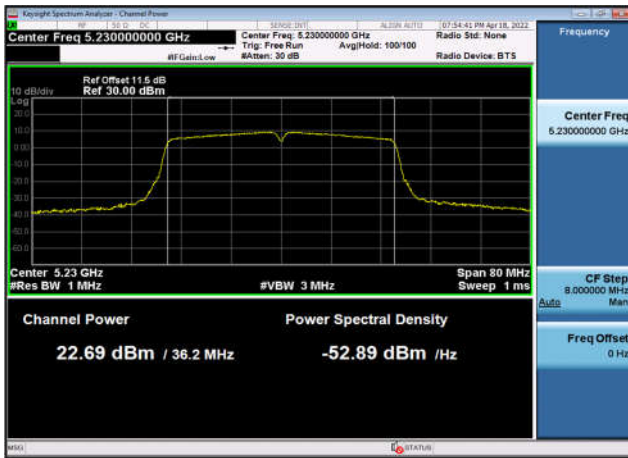


U-NII-1 Output Power-802.11ac(80MHz)
,5210MHz,Ant3

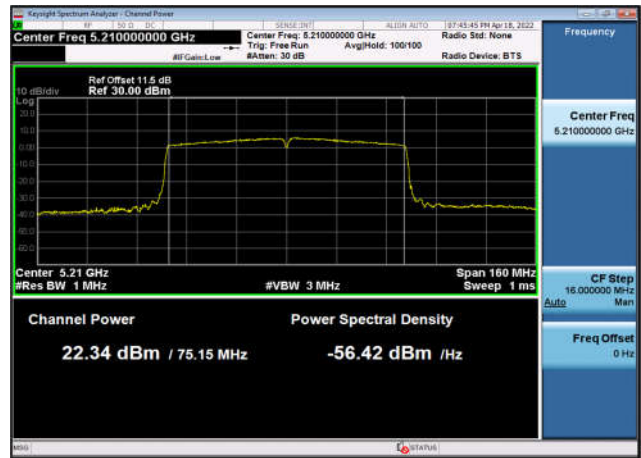


U-NII-1 Output Power-802.11ax(20MHz)
,5180MHz,Ant3




U-NII-1 Output Power-802.11ax(20MHz)
,5220MHz,Ant3

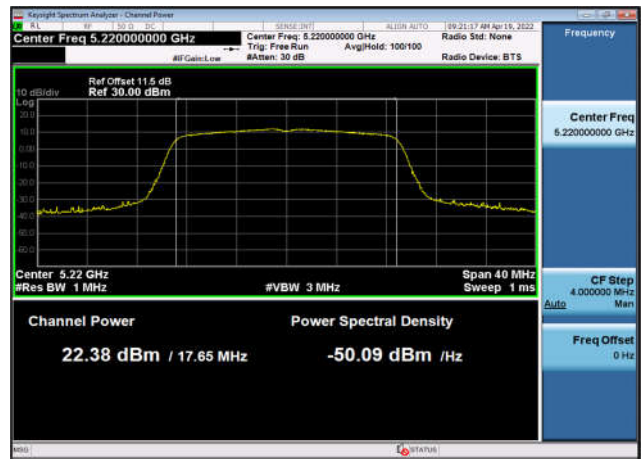


U-NII-1 Output Power-802.11ax(20MHz)
,5240MHz,Ant3

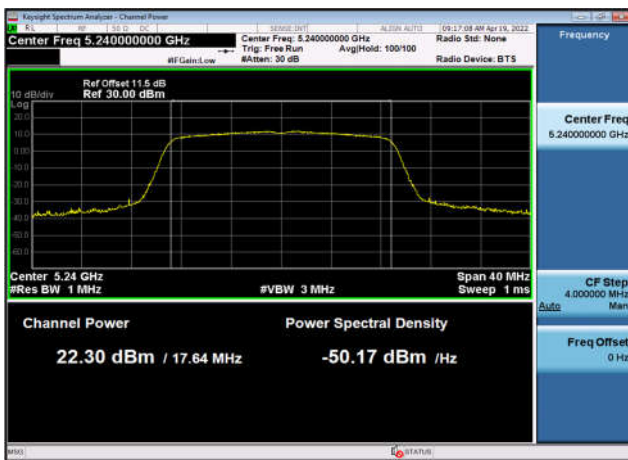

U-NII-1 Output Power-802.11ax(40MHz)
,5190MHz,Ant3

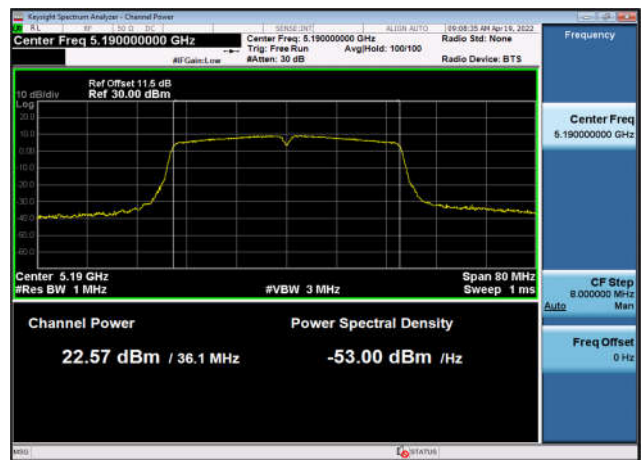


U-NII-1 Output Power-802.11ax(40MHz)
,5230MHz,Ant3

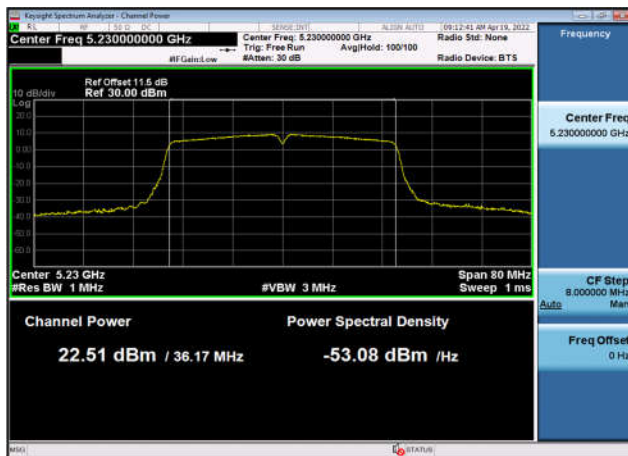


U-NII-1 Output Power-802.11ax(80MHz)
,5210MHz,Ant3




U-NII-1 Output Power-802.11n(20MHz)
,5180MHz,Ant4

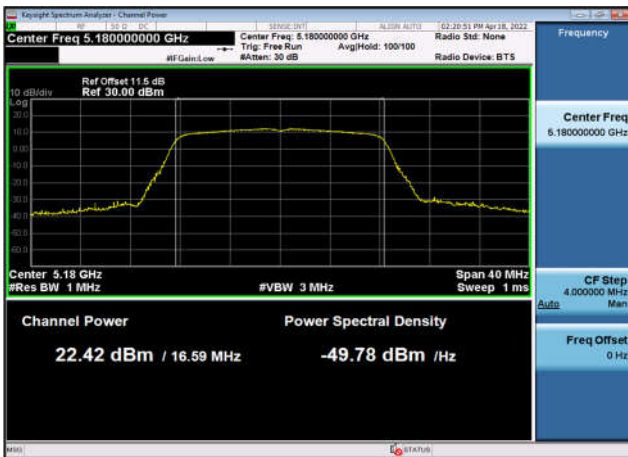


U-NII-1 Output Power-802.11n(20MHz)
,5220MHz,Ant4

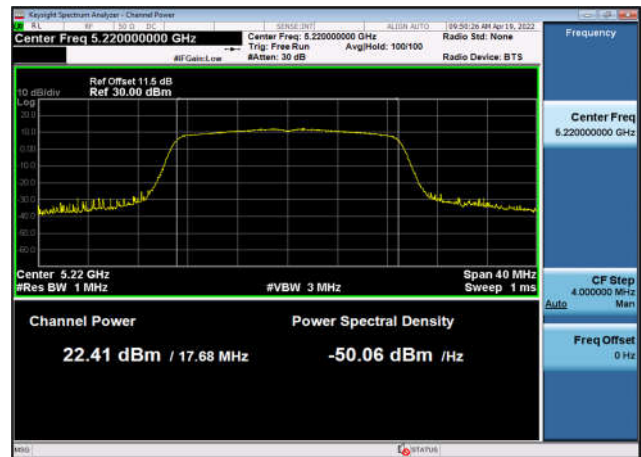


U-NII-1 Output Power-802.11n(20MHz)
,5240MHz,Ant4

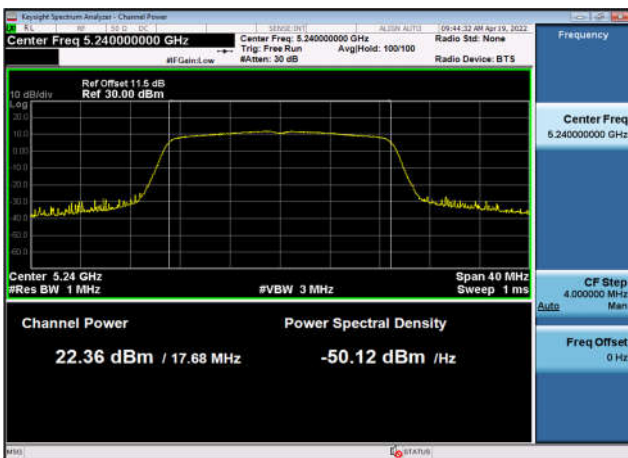


U-NII-1 Output Power-802.11n(40MHz)
,5190MHz,Ant4

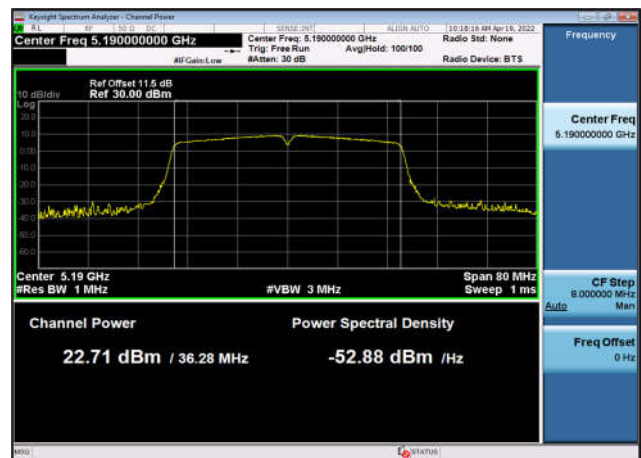


U-NII-1 Output Power-802.11n(40MHz)
,5230MHz,Ant4

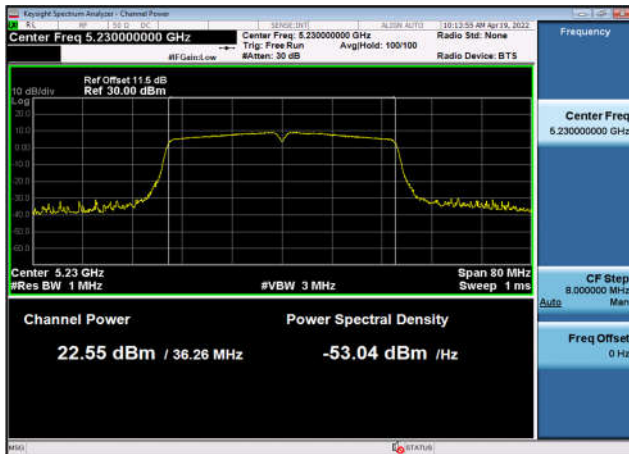


U-NII-1 Output Power-802.11a(20MHz)
,5180MHz,Ant4

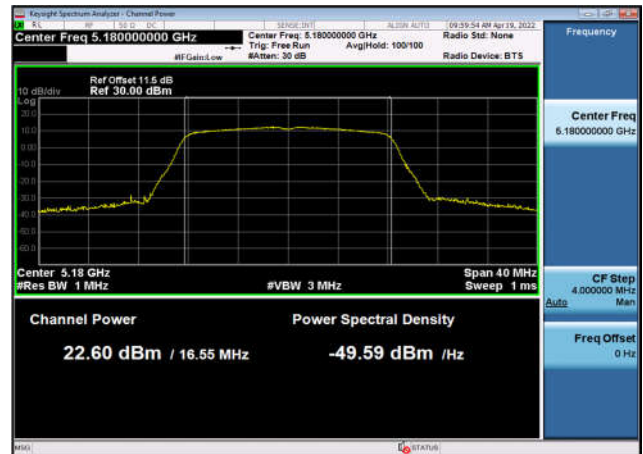


U-NII-1 Output Power-802.11a(20MHz)
,5220MHz,Ant4

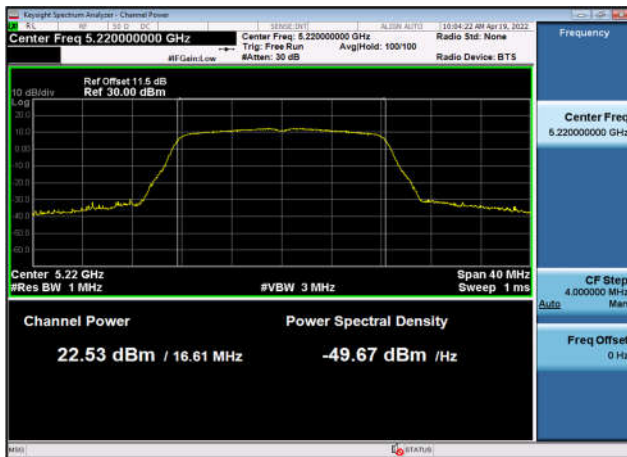


U-NII-1 Output Power-802.11a(20MHz)
,5240MHz,Ant4

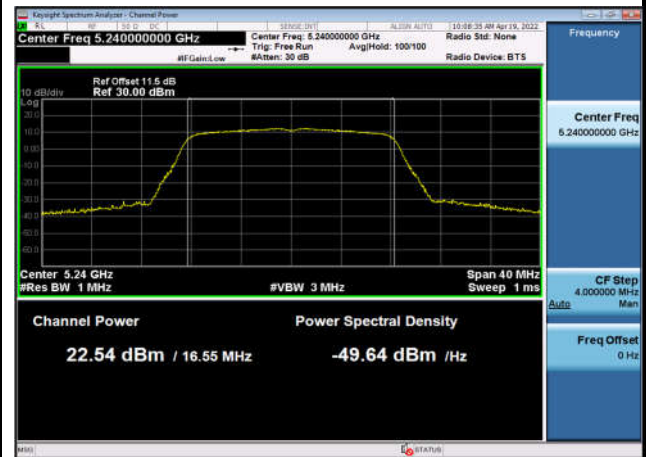


U-NII-1 Output Power-802.11ac(20MHz)
,5180MHz,Ant4

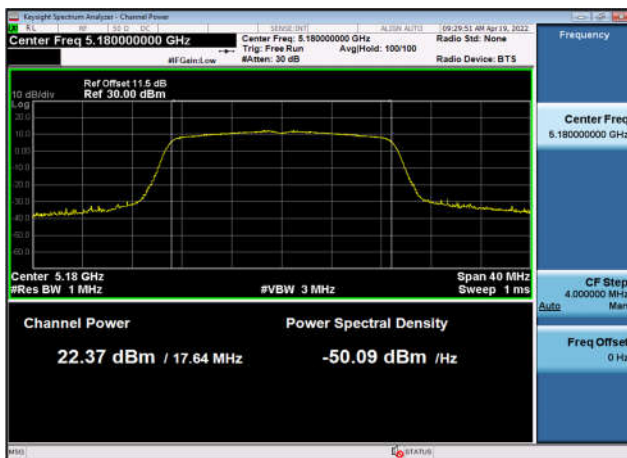


U-NII-1 Output Power-802.11ac(20MHz)
,5220MHz,Ant4

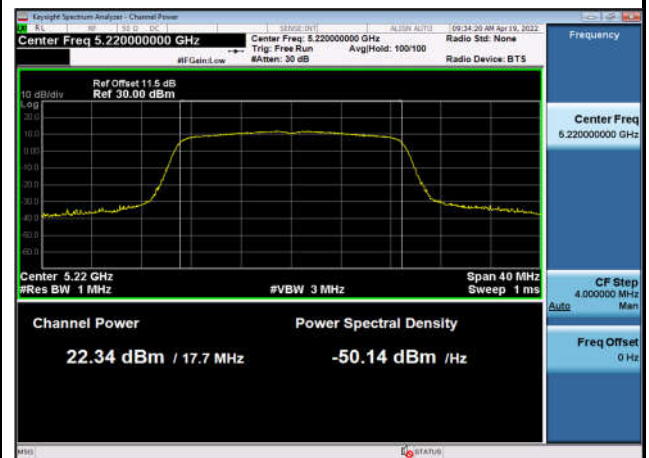

U-NII-1 Output Power-802.11ac(20MHz)
,5240MHz,Ant4

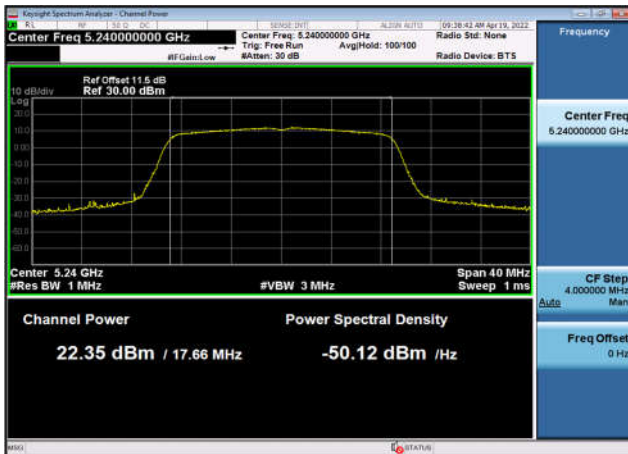


U-NII-1 Output Power-802.11ac(40MHz)
,5190MHz,Ant4

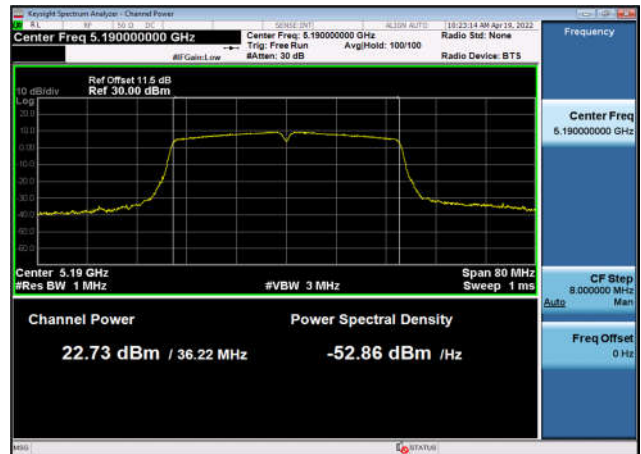


U-NII-1 Output Power-802.11ac(40MHz)
,5230MHz,Ant4



U-NII-1 Output Power-802.11ac(80MHz)
,5210MHz,Ant4

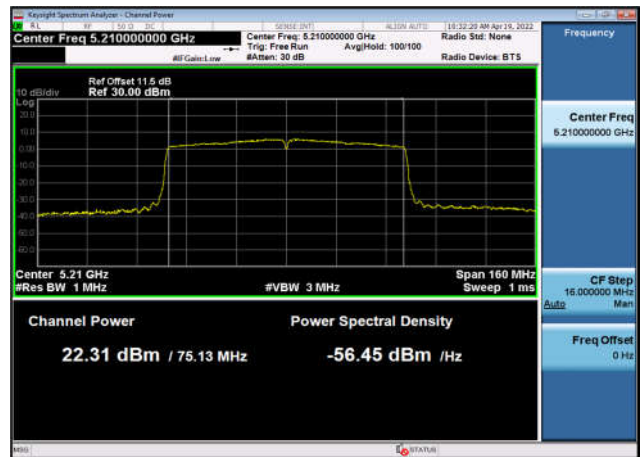

U-NII-1 Output Power-802.11ax(20MHz)
,5180MHz,Ant4

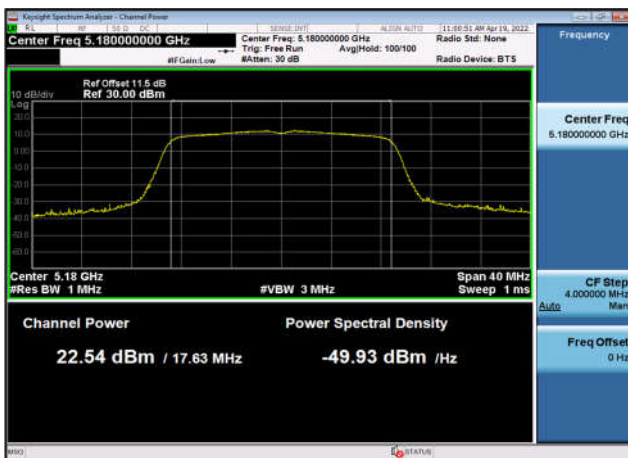

U-NII-1 Output Power-802.11ax(20MHz)
,5220MHz,Ant4

