

Test Report

FCC ID: 2AG3G-M618

Date of issue: Dec. 12, 2016

Sample Description: Set Top Box

Model(s): M618

Applicant: Value Platforms Limited

Room213-214, 2/F, Sino Industrial Plaza, 9 Kai Address:

Cheung Road, Kowloon Bay, Hong Kong

E-mail:mti@51mti.com

Date of Test: Nov. 26, 2016 to Dec. 12, 2016



This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.



- Page 2 of 23 -

Report No.: MTi161126E071

Table of Contents

Tabl	ole of Contents	
1 6	General description	5
1.1	Feature of equipment under test (EUT)	
1.2		
1.3		
1.4	EUT operation mode	6
1.5	Test conditions	6
1.6	Ancillary equipment list	6
1.7	Measurement uncertainty	6
2 T	Testing site	7
3 L	List of test equipment	8
4 T	Test Result	g
4.1	Conducted emission	g
4.2	Antenna requirement	12
4.3	Maximum peak output power	13
4.4	6dB emission bandwidth	15
4.5	Power spectral density	17
4.6	Band edge spurious emission	19
4.7	Radiated emission	21



- Page 3 of 23 - Report No.: MTi161126E071

Test Result Certification				
Applicant's name:	Value Platforms Limited			
Address:	Room213-214, 2/F, Sino Industrial Plaza, 9 Kai Cheung Road, Kowloon Bay, Hong Kong			
Manufacture's Name:	Huizhou Tena Electronics Co., Ltd.			
Address:	No. 105 East New Road Dongjiang High-tech Industrial Park in Dongxing District, Zhongkai high tech Zone, Huizhou, Guangdong, China			
Product name:	Set Top Box			
Trademark:	Picazzo			
Model name:	M618			
Standards:	FCC Part 15.247			
Test Procedure:	ANSI C63.10-2013 558074 D01 DTS Meas Guidance v03r05			

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Tested by:	David Chen		
	David Chen	Dec. 12, 2016	
Reviewed by:	(en chon		
	Leon Chen	Dec. 12, 2016	
Approved by:	Jun liu	,	
	Ares Liu	Dec. 12, 2016	



- Page 4 of 23 - Report No.: MTi161126E071

Summary of Test Result

Item	FCC Part No.	Description of Test	Result
1	15.203	Antenna requirement	Pass
2	15.207	AC power line conducted emission	Pass
3	15.247(b)(3)	Maximum peak output power	Pass
4	15.247(a)(2)	6dB emission bandwidth	Pass
5	15.247(e)	Power spectral density (PSD)	Pass
8	15.247(d)	Band edge spurious emission	Pass
9	15.247(d), 15.205, 15.209	Radiated emission	Pass



- Page 5 of 23 - Report No.: MTi161126E071

1 General description

1.1 Feature of equipment under test (EUT)

Product name:	Set Top Box
Model name:	M618
Tx/Rx frequency range:	Tx/Rx: 2402MHz~2480MHz
Bluetooth version:	V4.1
Modulation type:	GFSK
Power source:	DC 5V from adapter
Adapter information:	Model:SYS1531-1205-W2 Inout:AC100-240V, 1.0A MAX, 50-60Hz Output:5V-2.4A
Antenna designation:	Chip antenna (Antenna Gain: 2dBi)
Remark:	All the models above are identical in interior structure, electrical circuits and components; just model names and appearance are different for marking requirement.

1.2 Operation channel list

Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz
1	2404MHz	11	2424MHz	21	2444MHz
8	2418MHz	18	2438MHz	38	2478MHz
9	2420MHz	19	2440MHz	39	2480MHz

1.3 Test frequency channel

Low	2402MHz
Middle	2442MHz
High	2480MHz



- Page 6 of 23 - Report No.: MTi161126E071

1.4 EUT operation mode

During testing, RF test program provided by the manufacture to control the Tx operation followed the test requirement. The EUT is configured to transmit continuously (duty cycle > 98 %) at the maximum power control level.

1.5 Test conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 20°C~30°C - Humidity: 30%~70%

- Atmospheric pressure: 98kPa~101kPa

1.6 Ancillary equipment list

Equipment	Model Name	S/N	Manufacturer	Certificate type
/	/	/	/	/

1.7 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, U=2xUc(y)

RF frequency	1 x 10-7
RF power, conducted	± 1 dB
Conducted emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	±1 degree
Humidity	±5%



- Page 7 of 23 - Report No.: MTi161126E071

2 Testing site

Test Site	Shenzhen Toby Technology Co., Ltd.
Test Site Location	1 A/F., Bldg.6, Yusheng Industrial Zone The National Road No.107 Xixiang Section 467, Shenzhen, Guangdong, China
FCC Registration No.:	811562
CNAS Registration No.:	CNAS L5813



- Page 8 of 23 - Report No.: MTi161126E071

3 List of test equipment

For AC power line conducted emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
LISN	R&S	ENV216	101313	2017.12.06
LISN	SCHWARZBECK	NNLK 8129	8129245	2017.12.25
Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	2017.12.25
Test Cable	N/A	N/A	C01	2017.12.06
EMI Test Receiver	R&S	ESCI	101160	2017.12.06

For Radiated emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
Log-Bicon Antenna	MESS-ELEKTRO NIK	VULB 9160	3058	2017.12.11
Horn Antenna	Schwarzbeck	BBHA 9120D	631	2017.12.05
Horn Antenna	Schwarzbeck	BBHA 9170	373	2017.12.05
Test Cable	United Microwave	57793	1m	2017.12.05
Test Cable	United Microwave	A30A30-5006	10m	2017.12.05
Microwave Pre_amplifier	Agilent	8449B	3008A01714	2017.12.05
Pre-Amplifier	Anritsu	MH648A	M09961	2017.12.05
EMI Test Receiver	R&S	ESPI-7	101318	2017.12.05
Spctrum analyzer	Agient	E4470B	MY41441082	2017.06.01

For RF conducted emission:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
Spctrum analyzer	Agient	E4470B	MY41441082	2017.06.01

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



- Page 9 of 23 - Report No.: MTi161126E071

4 Test Result

4.1 Conducted emission

4.1.1 Limit

Frequency	Li	imit
(MHz)	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency from 0.15MHz to 0.5MHz.

4.1.2 Test method

- 1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.
- 2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- 3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 4. LISN at least 80 cm from nearest part of EUT chassis.
- 5. The resolution bandwidth of EMI test receiver is set at 9kHz.

4.1.3 Test Result



- Page 10 of 23 -

Report No.: MTi161126E071

Temp	erature:	2	25℃		I	Relativ	e Humi	dity:	55%	
Press	sure:	1	01kPa		I	Polarization:		L		
Test v	voltage:	P	AC 120V	/60Hz	-	Test m	ode:		Transmitting)
100.0	dBuV									
90 80 70 60 50 40 30	Mymm Many	mm			issamilasidandan Mykasomilyana	rypes/polling.co.y			Conduction(QP)	peak
10										
0.0 0.15	0	0.5	ō		(MHz)		5			30.000
No.	<u>'</u>	Reading Level	Correct Factor	Measure- ment	Limit	Over	_			
	* 0.1507	dBuV 55.99	-0.04	dBuV 55.95	dBuV 65.96	dB	Detector	Comment		
	0.1507	32.77	-0.04	32.73		-23.23	AVG			
3	0.5433	39.36	-0.03	39.33		-16.67	QP			
4	0.5433	35.30	-0.03	35.27		-10.73	AVG			
5	1.5193	32.40	-0.04	32.36		-23.64	QP			
6	1.5193	23.40	-0.04	23.36	46.00	-22.64	AVG			
7	2.7648	32.94	-0.04	32.90	56.00	-23.10	QP			
8	2.7648	22.96	-0.04	22.92	46.00	-23.08	AVG			
9	7.7278	37.26	-0.06	37.20	60.00	-22.80	QP			
10	7.7278	22.52	-0.06	22.46	50.00	-27.54	AVG			
				05.30	20.00	0400	- OD			
11	12.5152 12.5152	35.84	-0.14	35.70		-24.30 -25.80	QP			



- Page 11 of 23 -

Report No.: MTi161126E071

Temperature:	25℃	Relative Humidity:	55%	
Pressure:	101kPa	Polarization:	N	
Test voltage:	AC 120V/60Hz	Test mode:	Transmitting	
100.0 dBuV				
90 80 70 60 50 40 30 20		FCCPart15 ClassB A		
0.150	0.5 (MH	[z] 5	30.000	
No. Mk. Freq. MHz Readin Level dBuV 1 0.1640 52.52 2 0.1640 35.70 3 0.5292 38.56 4 * 0.5292 33.62 5 0.9735 30.84 6 0.9735 18.92 7 1.3884 31.36 8 1.3884 18.45 9 3.1730 29.25 10 3.1730 20.08	Factor ment Limi dB dBuV dBuV -0.03 52.49 65.2 -0.03 35.67 55.2 -0.03 38.53 56.0 -0.03 33.59 46.0 -0.04 30.80 56.0 -0.04 18.88 46.0 -0.04 31.32 56.0 -0.04 18.41 46.0 -0.04 29.21 56.0 -0.04 20.04 46.0	dB Detector Comment 5 -12.76 QP 5 -19.58 AVG 0 -17.47 QP 0 -12.41 AVG 0 -25.20 QP 0 -27.12 AVG 0 -24.68 QP 0 -27.59 AVG 0 -26.79 QP 0 -25.96 AVG		
11 7.7689 40.26 12 7.7689 26.78		0 -19.81 QP 0 -23.29 AVG		



- Page 12 of 23 - Report No.: MTi161126E071

4.2 Antenna requirement

4.2.1 Requirement defined in FCC 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.2.2 EUT antenna description

The antenna of EUT is a permanently attached chip antenna; the maximum gain of the antenna is 2dBi. So the antenna meets the requirement of this part.



- Page 13 of 23 - Report No.: MTi161126E071

4.3 Maximum peak output power

4.3.1 Limits

Conducted peak output power limit is 1W (30dBm).

4.3.2 Test Method

Use the following spectrum analyzer settings:

RBW = 1MHz (≥6dB bandwidth, see section 4.4)

VBW ≥ 3RBW

Detector = peak

Trace mode = max hold

Sweep time = auto couple

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.


4.3.3 Test Result

Frequency (MHz)	Peak output power (dBm)	Limit (dBm)
2402	2.632	30
2442	2.939	30
2480	2.26	30

Test plots as below:



- Page 14 of 23 - Report No.: MTi161126E071

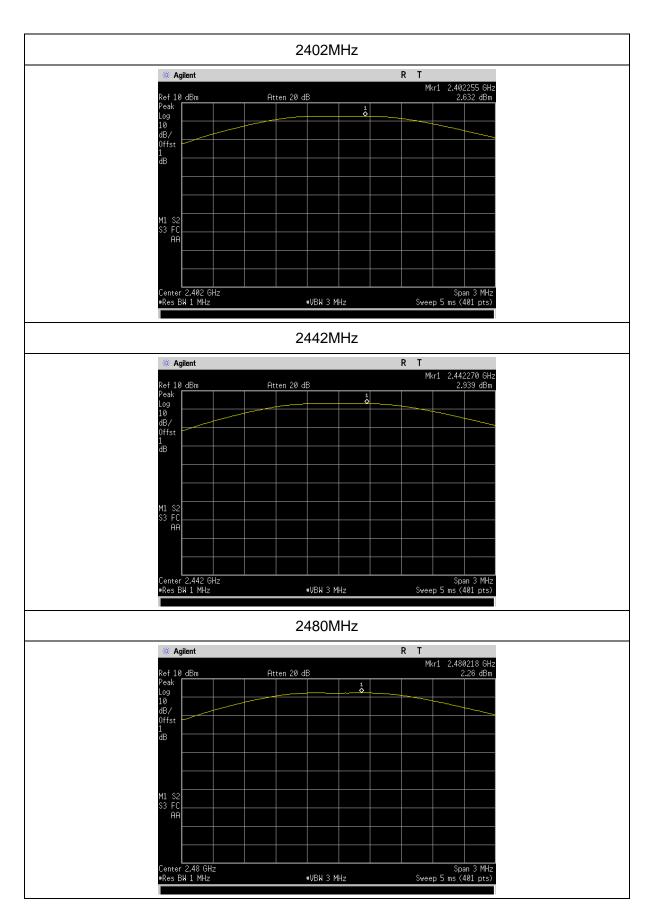



- Page 15 of 23 - Report No.: MTi161126E071

4.4 6dB emission bandwidth

4.4.1 Limits

The minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2 Test method

Use the following spectrum analyzer settings:

RBW = 100kHz VBW ≥ 3RBW Detector = peak Trace mode = max hold

Sweep time = auto couple

Allow the trace to stabilize measure the maxin

Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


4.4.3 Test result

Frequency (MHz)	6dB emission bandwidth (MHz)	Limit
2402	0.746	
2442	0.746	500kHz
2480	0.742	

Test plots as below:



- Page 16 of 23 - Report No.: MTi161126E071

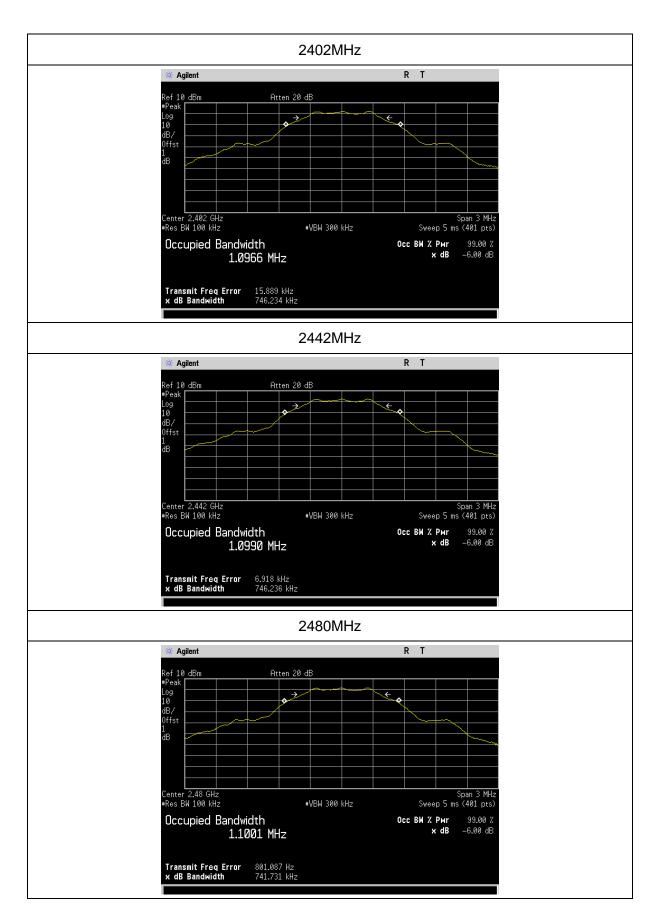



- Page 17 of 23 - Report No.: MTi161126E071

4.5 Power spectral density

4.5.1 **Limits**

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.5.2 Test method

Span = 1.5 times DTS bandwidth (6dB emission bandwidth, see section 4.4)

RBW = 3kHz to 100kHz

VBW ≥3RBW

Detector = peak

Sweep time = auto

Trace mode = max hold

Allow the trace to stabilize. Use the peak marker function to determine the maximum amplitude level within the RBW.


4.5.3 Test result

Frequency (MHz)	PSD (dBm/100kHz)	Limit (dBm/3kHz)
2402	1.884	
2442	2.235	8
2480	1.461	

Test plots as below:



- Page 18 of 23 - Report No.: MTi161126E071

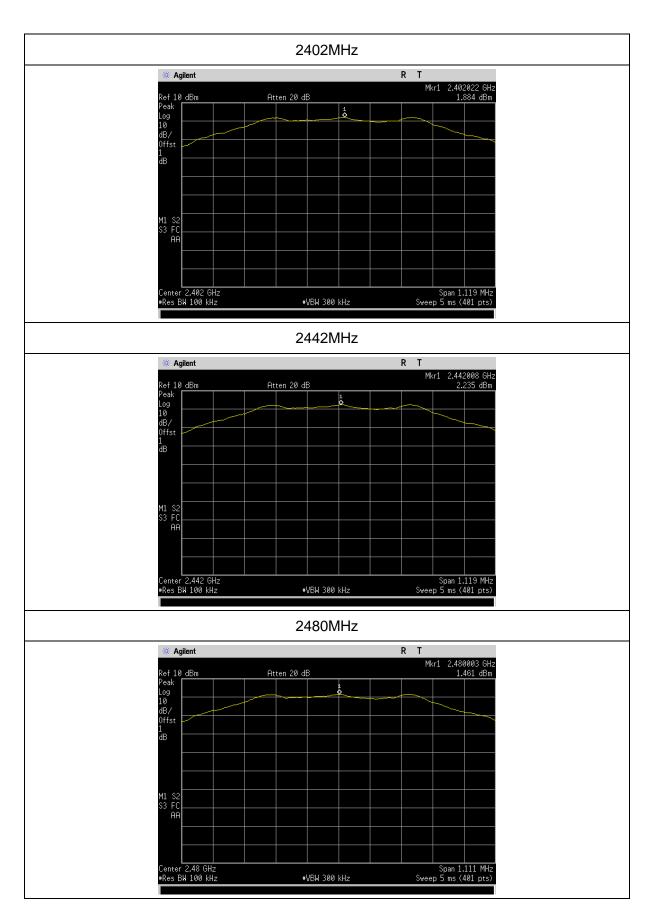



- Page 19 of 23 - Report No.: MTi161126E071

4.6 Band edge spurious emission

4.6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

4.6.2 Test method

Use the following spectrum analyser settings:

Set RBW=100 kHz. VBW ≥ 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.


4.6.3 Test Result

Test plots as below:



- Page 20 of 23 -Report No.: MTi161126E071

Band edge

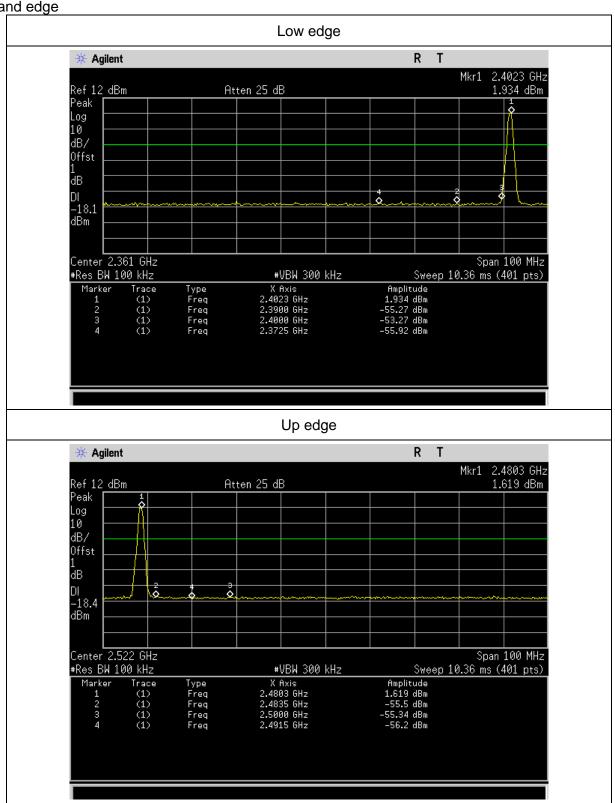

Tel:(86-755)88850135 Fax: (86-755) 88850136 E-mail:mti@51mti.com http://www.mtitest.com Address: No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China



- Page 21 of 23 - Report No.: MTi161126E071

4.7 Radiated emission

4.7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits defined in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits defined in §15.209(a).

Radiated emission limits defined in FCC 15.209:

Frequency (MHz)	Field strength µV/m	Field strength dBµV/m	Detector	Measurement distance
30-88	100	40	QP	
88-216	150	43.5	QP	
216-960	200	46	QP	3m
960-1000	500	46	QP	3111
Above 1000	500	54	AV	
Above 1000	5000	74	PK	

Restricted bands defined in FCC 15.205:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



- Page 22 of 23 - Report No.: MTi161126E071

4.7.2 Test method

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range blew 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- 2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 3. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured, RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz, VBW \ge RBW, Sweep = auto, Detector function = peak, Trace = max hold

- 4. Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5. The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 3MHz, Detector = RMS for AV value, while maintaining all of the other instrument settings.

4.7.3 Test Result

Remark: If the PK measured values lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.



- Page 23 of 23 - Report No.: MTi161126E071

Transmitter chann	el: 2402MHz				
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H/V	dBµV/m	dBµV/m		
151.06	V	30.5	43.5	QP	
151.06	Н	36.1	43.5	QP	
2390	V	45.31	74	PK	Pass
2390	Н	46.79	74	PK	Pass
4804	V	48.83	74	PK	
4804	Н	49.27	74	PK	
Transmitter chann	el: 2442MHz		•	•	
Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H/V	dBµV/m	dBµV/m		
151.06	V	29.8	43.5	QP	
151.06	Н	34.7	43.5	QP	Doos
4884	V	48.34	74	PK	Pass
4884	Н	49.86	74	PK	
Transmitter chann	el: 2480MHz				
Frequency	Ant. Polarization	Emission level	Limits	Detector	
(MHz)	H/V	dBµV/m	dBµV/m		
151.06	V	31.2	43.5	QP	
151.06	Н	35.8	43.5	QP	Result
2483.5	V	45.31	74	PK	
2483.5	Н	46.67	74	PK	
4960	V	49.28	74	PK	
4960	Н	51.67	74	PK	

----END OF REPORT----