

FCC Test Report

Report No.: AGC03716180501FE03

FCC ID : 2AG3PCQL1649-B

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Bluetooth Speaker

BRAND NAME

SHARPER IMAGE, POLAROID, LIMITED TOO,

* ART+SOUND, DARTA

MODEL NAME CQL1649-B, PBT534, PBT534BK, PBT534BL, PBT534GR,

PBT534PK

CLIENT: Conquer (China) Industry Co., Ltd

DATE OF ISSUE : Jun. 01, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249

REPORT VERSION V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spower this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 65

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	plience / © Mile	Jun. 01, 2018	Valid	Initial release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.

Attestation of Global Compliance



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5 5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM 5.2. EQUIPMENT USED IN EUT SYSTEM 5.3. SUMMARY OF TEST RESULTS	8 9
6. TEST FACILITY	10
7.TEST METHOD	11
8. TEST EQUIPMENT LIST	11
9. RADIATED EMISSION	12
9.1TEST LIMIT 9.2. MEASUREMENT PROCEDURE 9.3. TEST SETUP 9.4. TEST RESULT	12 13
10. BAND EDGE EMISSION	39
10.1. MEASUREMENT PROCEDURE 10.2 TEST SETUP 10.3 RADIATED TEST RESULT	39
11. 20DB BANDWIDTH	44
11.1. MEASUREMENT PROCEDURE	44 44
12. FCC LINE CONDUCTED EMISSION TEST	
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	52 52
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	56
APPENDIX B. PHOTOGRAPHS OF FUT	59



age 4 of 65

1. VERIFICATION OF CONFORMITY

Applicant	Conquer (China) Industry Co., Ltd		
Address	A-703, Building 2, Tianan Cyber Park , HuangGe North Road, LongGang District, Shenzhen 518172, P. R. China.		
Manufacturer	Conquer Industry Co., Ltd		
Address	A-703, Building 2, Tianan Cyber Park , HuangGe North Road, LongGang District, Shenzhen 518172, P. R. China.		
Product Designation	Bluetooth Speaker		
Brand Name	SHARPER IMAGE, POLAROID, LIMITED TOO, ART+SOUND, DARTA		
Test Model	CQL1649-B		
Series Model	PBT534, PBT534BK, PBT534BL, PBT534GR, PBT534PK		
Difference description	All the same except for the appearance color.		
Date of test	May 23, 2018 to May 30, 2018		
Deviation	None None		
Condition of Test Sample	Normal Manual Ma		
Report Template	AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

Tested By	Jorden Wand	
The All Compliance (S. 1884)	Jonhen Wang(Wang Yonghuan)	May 30, 2018
	and change	
Reviewed By		(S) We station of close
	Cool Cheng(Cheng Mengguo)	Jun. 01, 2018
Approved By	Forest ce	
All Sandre	Forrest Lei(Lei Yonggang) Authorized Officer	Jun. 01, 2018

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (GC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.

Attestation of Global Compliance



Page 5 of 65

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

	and the second s
Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.16dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.2
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK
Number of channels	79 for BR/EDR
Hardware Version	V1.2
Software Version	V4.2
Antenna Designation	PCB Antenna
Antenna Gain	0.85dBi
Power Supply	DC 3.7V by battery
Note: The USB port only	used for charging and can't be used to transfer data with PC.

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency
100	0	2402MHz
The fill of the fi	1	2403MHz
® Same and a cloud of Color of	AGC: NO	
CC CC	38	2440 MHz
2400~2483.5MHz	39	2441 MHz
TK Companie @ F Thomas of Cichal Co	40	2442 MHz
of Goding		
	77	2479 MHz
10000000000000000000000000000000000000	78	2480 MHz



Page 6 of 65

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB


4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
8 # 1 not coon 8 #	Low channel GFSK
2 60	Middle channel GFSK
3	High channel GFSK
4 报	Low channel π /4-DQPSK
® 5 nd cloud	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel 8DPSK
The state of the s	Middle channel 8DPSK
90	High channel 8DPSK
10	BT Link with charging
11th his rolling	BT Link
(f) 200c (at)	

Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.



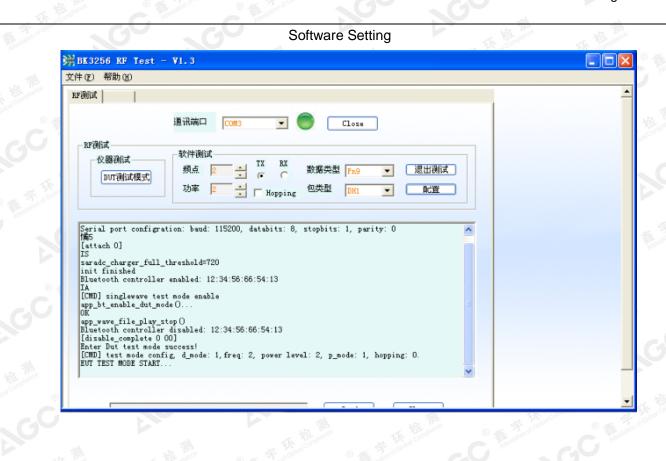

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.agc-gett.com.

Attestation of Global Compliance




Page 8 of 65

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Note: Owing to the EUT has own battery, testing may be performed while PC or adapter removed.

Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth Speaker	POLAROID	CQL1649-B	EUT
2	Battery	SURE	18650	Accessory
3	PC	APPLE	A1465	A.E
4	Control box	BEKEN	N/A	A.E
5	Adapter	IPRO	NTR-S01	A.E
6	USB Cable	N/A	0.6m unshielded	Accessory
7	USB Cable	N/A	1m unshielded	A.E
8	IPOD	APPLE	A1367	A.E



Page 9 of 65

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant



Page 10 of 65

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012		
NVLAP Lab Code	600153-0		
Designation Number	CN5028		
Test Firm Registration Number	682566		
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0		



age 11 of 65

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. TEST EQUIPMENT LIST

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.20, 2017	Jun.19, 2018
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Loop Antenna	A.H.Systems,Inc	SAS-562B	G	Mar. 01, 2018	Feb. 28, 2019
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018
Filter (2.4-2.483GHz)	Micro-tronics	087	- C	Jun.20, 2017	Jun.19, 2018



Page 12 of 65

9. RADIATED EMISSION

9.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field Str	engths Limit
(MHz)	Meters	μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	9
0.490 ~ 1.705	30	24000/F(kHz)	技訓
1.705 ~ 30	30	30	E Cobaco (Color of Color of Co
30 ~ 88	3 F 1000	100	40.0
88 ~ 216	3 - 6	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3. I	Other:74.0 dB(μV)/m (Average)	(Peak) 54.0 dB(μV)/m

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 13 of 65

9.2. MEASUREMENT PROCEDURE

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance



Page 14 of 65


The following table is the setting of spectrum analyzer and receiver.

	Spectrum Parameter	Setting
Nobal Come	Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
CC AND	Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
	Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
A STATE OF THE STA	Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
	Receiver Parameter	Setting
	Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
7M	Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Pogl Combine	Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP





9.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

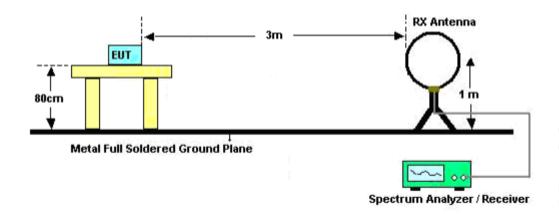


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

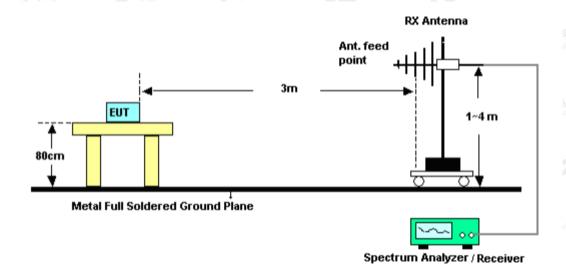





RADIATED EMISSION TEST SETUP ABOVE 1000MHz

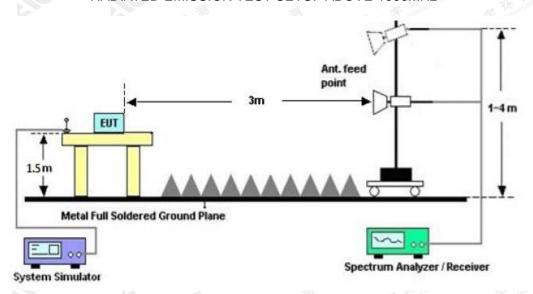

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at although the confirmed at although the confirmed at all the confirme



Page 17 of 65

9.4. TEST RESULT

FOR BR/EDR

(Worst modulation: GFSK)

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.agc. gent.com.

Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 18 of 65

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

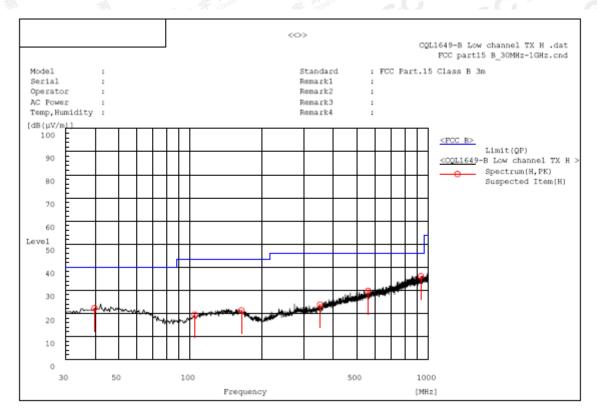


A. Suspected List:

	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(u√/m) PK	Limit dB(u∀/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
	39.700	H	4.9	17.4	22.3	40.0	17.7	Pass	150.0	70.7
	104.690	H	5.5	14.0	19.5	43.5	24.0	Pass	200.0	266.3
1	164.345	Н	4.9	16.4	21.3	43.5	22.2	Pass	150.0	212.8
	351.555	Н	4.8	19.0	23.8	46.0	22.2	Pass	200.0	266.3
	558.650	Н	5.7	24.1	29.8	46.0	16.2	Pass	100.0	289.0
	931.130	Н	5.6	30.5	36.1	46.0	9.9	Pass	100.0	72.0

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

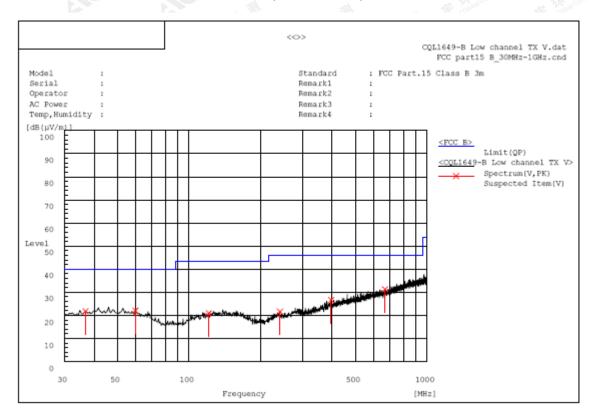

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
36.790	V	5.0	16.8	21.8	40.0	18.2	Pass	100.0	266.9
59.585	V	5.9	16.2	22.1	40.0	17.9	Pass	150.0	319.9
121.180	V	5.5	15.5	21.0	43.5	22.5	Pass	100.0	266.9
241.460	V	5.5	16.2	21.7	46.0	24.3	Pass	100.0	15.4
396.175	V	6.0	20.7	26.7	46.0	19.3	Pass	200.0	145.7
666.805	V	5.5	25.8	31.3	46.0	14.7	Pass	100.0	339.0

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.





RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

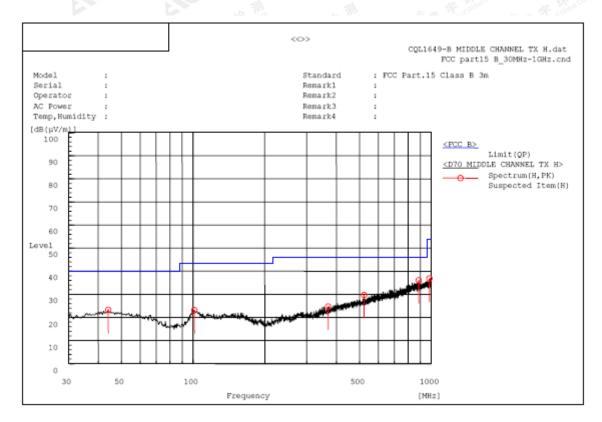


A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(u√/m) PK	Limit dB(u∀/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
44.065	Н	6.0	17.3	23.3	40.0	16.7	Pass	150.0	107.7
101.295	Н	9.5	13.6	23.1	43.5	20.4	Pass	150.0	71.1
369.015	Н	5.1	19.6	24.7	46.0	21.3	Pass	100.0	69.8
522.760	Н	6.4	23.3	29.7	46.0	16.3	Pass	100.0	33.2
886.025	Н	6.1	30.0	36.1	46.0	9.9	Pass	150.0	142.2
983.025	Н	5.9	31.0	36.9	54.0	17.1	Pass	100.0	322.6

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

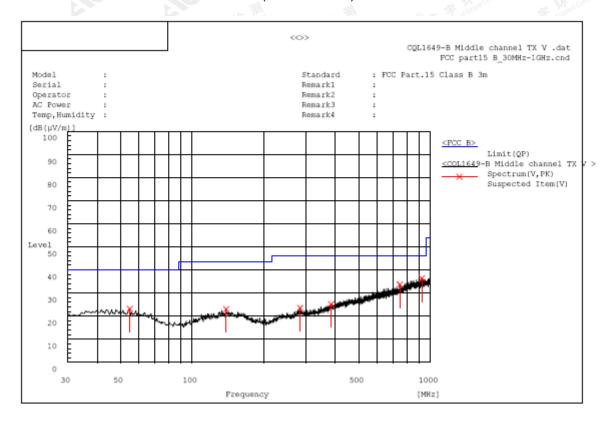

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
54.735	V	6.5	16.7	23.2	40.0	16.8	Pass	100.0	107.2
139.125	V	6.5	16.6	23.1	43.5	20.4	Pass	100.0	72.2
284.140	v	5.9	17.7	23.6	46.0	22.4	Pass	150.0	72.2
384.050	V	5.0	20.2	25.2	46.0	20.8	Pass	100.0	107.2
745.375	V	6.3	27.4	33.7	46.0	12.3	Pass	200.0	20.4
920.945	v	6.0	30.4	36.4	46.0	9.6	Pass	200.0	20.4

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.





RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

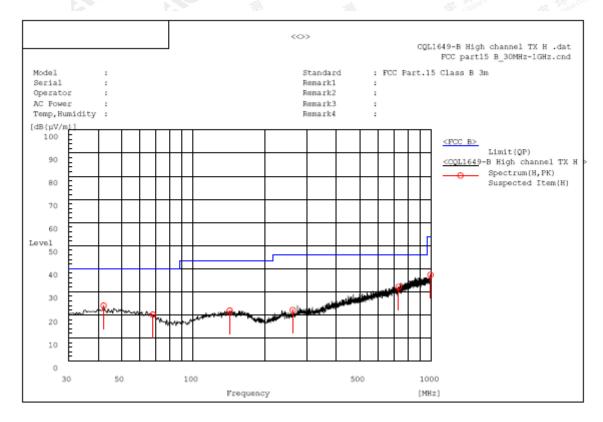

A. Suspected List:


	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
	42.125	H	6.6	17.4	24.0	40.0	16.0	Pass	200.0	266.3
	67.830	H	5.1	15.0	20.1	40.0	19.9	Pass	150.0	107.1
Γ	142.520	Н	5.3	16.6	21.9	43.5	21.6	Pass	200.0	303.4
	262.315	Н	6.1	16.0	22.1	46.0	23.9	Pass	100.0	216.9
	729.370	Н	5.1	27.0	32.1	46.0	13.9	Pass	200.0	266.3
	992.725	Н	6.3	31.0	37.3	54.0	16.7	Pass	200.0	266.3

RESULT: PASS



Page 23 of 65

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

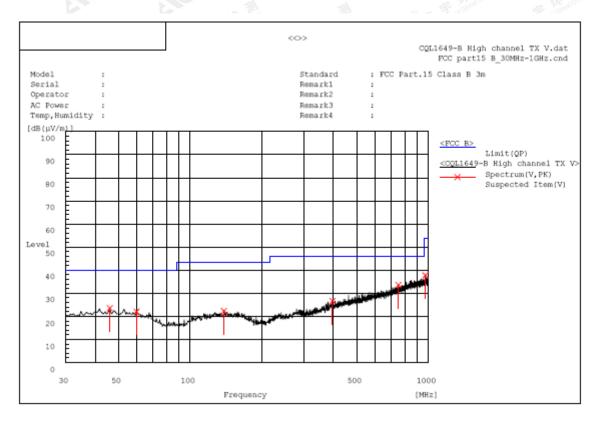

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
46.005	V	6.3	17.3	23.6	40.0	16.4	Pass	100.0	266.9
59.585	V	5.9	16.2	22.1	40.0	17.9	Pass	150.0	319.9
138.640	V	5.8	16.6	22.4	43.5	21.1	Pass	150.0	176.4
396.175	V	6.0	20.7	26.7	46.0	19.3	Pass	200.0	145.7
748.770	V	6.1	27.5	33.6	46.0	12.4	Pass	100.0	267.4
971.870	v	6.9	30.9	37.8	54.0	16.2	Pass	150.0	70.7

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.




Page 24 of 65

RADIATED EMISSION ABOVE 1GHz FOR BR/EDR

(Worst modulation: GFSK)

For Fundamental

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

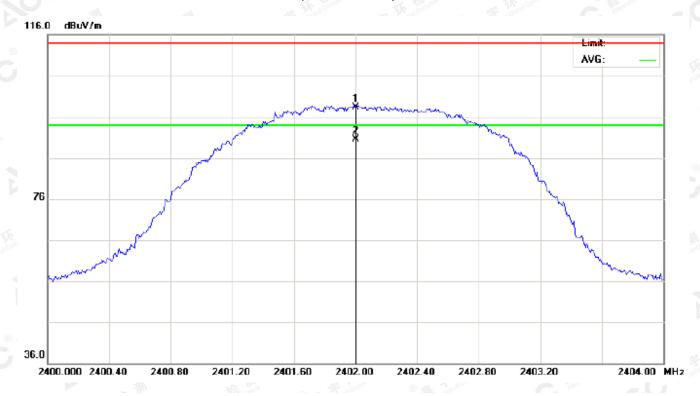


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2402.000	88.04	10.32	98.36	114.00	-15.64	peak			
2	*	2402.000	80.09	10.32	90.41	94.00	-3.59	AVG	100	247	

RESULT: PASS



Page 25 of 65

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

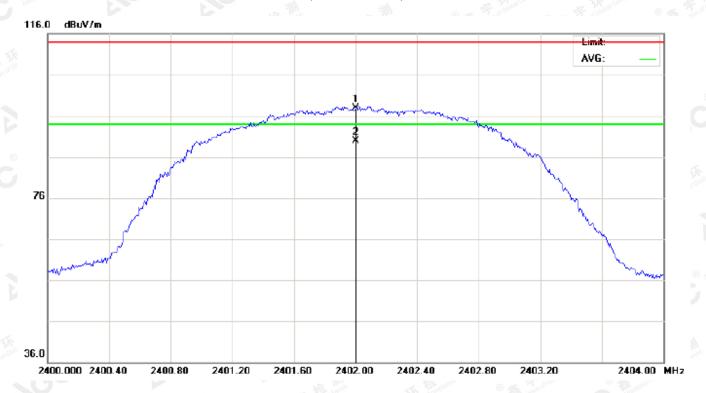


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2402.000	87.62	10.32	97.94	114.00	-16.06	peak			
2	*	2402.000	79.59	10.32	89.91	94.00	-4.09	AVG	100	257	

RESULT: PASS



Page 26 of 65

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

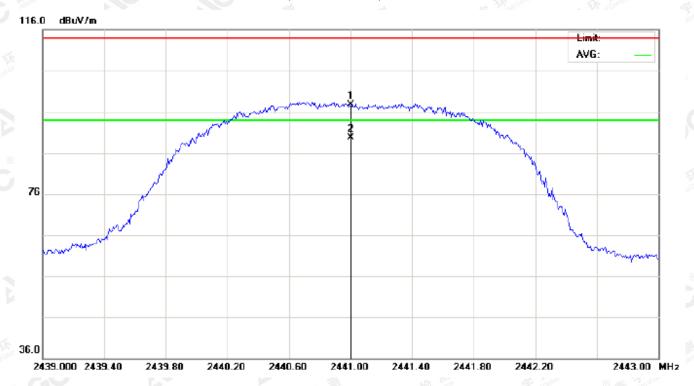


N	. M	lk F	req.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	· I	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		244	11.000	87.27	10.36	97.63	114.00	-16.37	peak			
2		244	11.000	79.36	10.36	89.72	94.00	-4.28	AVG	100	254	

RESULT: PASS



Page 27 of 65

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

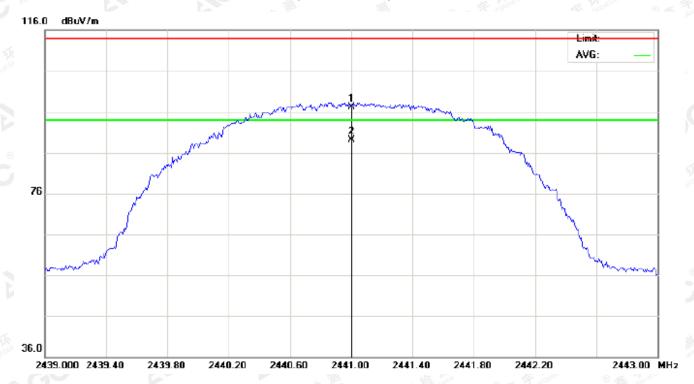


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	86.84	10.36	97.20	114.00	-16.80	peak			
2	*	2441.000	78.84	10.36	89.20	94.00	-4.80	AVG	100	123	

RESULT: PASS



Page 28 of 65

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

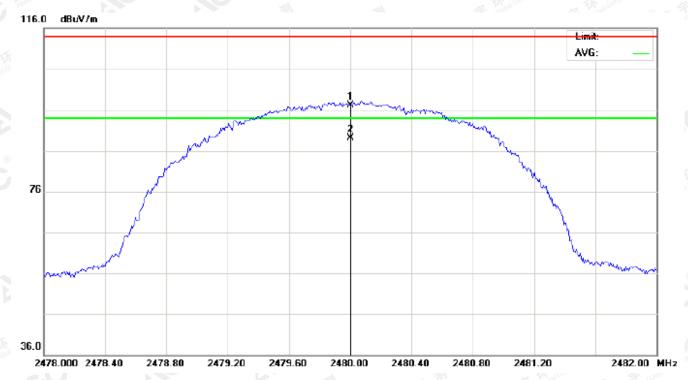


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	86.63	10.41	97.04	114.00	-16.96	peak			
2	*	2480.000	78.66	10.41	89.07	94.00	-4.93	AVG	100	358	

RESULT: PASS



Page 29 of 65

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

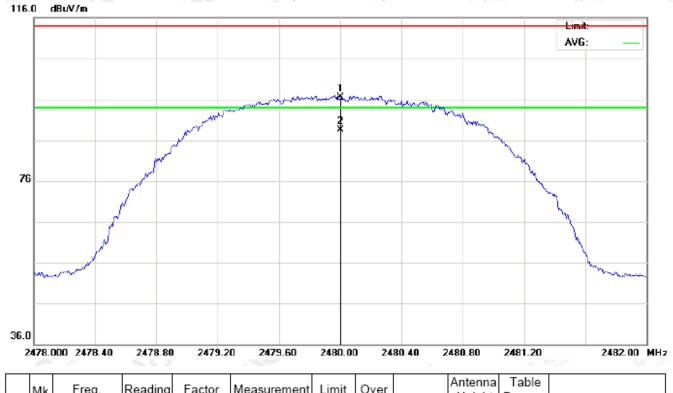

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	86.19	10.41	96.60	114.00	-17.40	peak			
2	*	2480.000	78.16	10.41	88.57	94.00	-5.43	AVG	100		

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Page 30 of 65

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	88.04	10.32	98.36	114	-15.64	Horizontal
2402	87.62	10.32	97.94	114	-16.06	Vertical
2441	87.27	10.36	97.63	114	-16.37	Horizontal
2441	86.84	10.36	97.20	114	-16.80	Vertical
2480	86.63	10.41	97.04	114	-16.96	Horizontal
2480	86.19	10.41	96.60	114	-17.40	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	80.09	10.32	90.41	94	-3.59	Horizontal	
2402	79.59	10.32	89.91	94	-4.09	Vertical	
2441	79.36	10.36	89.72	94	-4.28	Horizontal	
2441	78.84	10.36	89.20	94	-4.80	Vertical	
2480	78.66	10.41	89.07	94	-4.93	Horizontal	
2480	78.16	10.41	88.57	94	-5.43	Vertical	



Page 31 of 65

2Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	87.57	10.32	97.89	114	-16.11	Horizontal
2402	87.14	10.32	97.46	114	-16.54	Vertical
2441	86.85	10.36	97.21	114	-16.79	Horizontal
2441	86.41	10.36	96.77	114	-17.23	Vertical
2480	86.24	10.41	96.65	114	-17.35	Horizontal
2480	85.78	10.41	96.19	114	-17.81	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	79.62	10.32	89.94	94	-4.06	Horizontal
2402	79.10	10.32	89.42	94	-4.58	Vertical
2441	79.00	10.36	89.36	94	-4.64	Horizontal
2441	78.54	10.36	88.90	94	-5.10	Vertical
2480	78.29	10.41	88.70	94	-5.30	Horizontal
2480	77.72	10.41	88.13	94	-5.87	Vertical



Page 32 of 65

3Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	87.22	10.32	97.54	114	-16.46	Horizontal	
2402	86.79	10.32	97.11	114	-16.89	Vertical	
2441	86.50	10.36	96.86	114	-17.14	Horizontal	
2441	85.93	10.36	96.29	114	-17.71	Vertical	
2480	85.85	10.41	96.26	114	-17.74	Horizontal	
2480	85.40	10.41	95.81	114	-18.19	Vertical	

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	79.24	10.32	89.56	94	-4.44	Horizontal
2402	78.75	10.32	89.07	94	-4.93	Vertical
2441	78.64	10.36	89.00	94	-5.00	Horizontal
2441	78.23	10.36	88.59	94	-5.41	Vertical
2480	77.98	10.41	88.39	94	-5.61	Horizontal
2480	77.40	10.41	87.81	94	-6.19	Vertical




age 33 of 65

FOR BR/EDR

(Worst modulation: GFSK)

For Harmonics

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

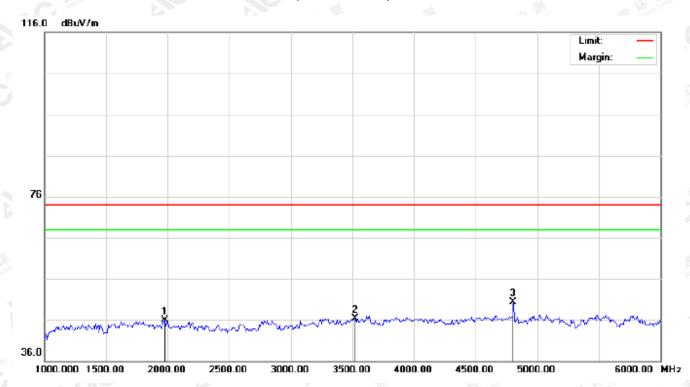


No.	- 1	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		1975.000	36.33	9.62	45.95	74.00	-28.05	peak			
2		3525.000	34.01	12.26	46.27	74.00	-27.73	peak			
3	*	4804.000	42.71	7.69	50.40	74.00	-23.60	peak			

RESULT: PASS



Page 34 of 65

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

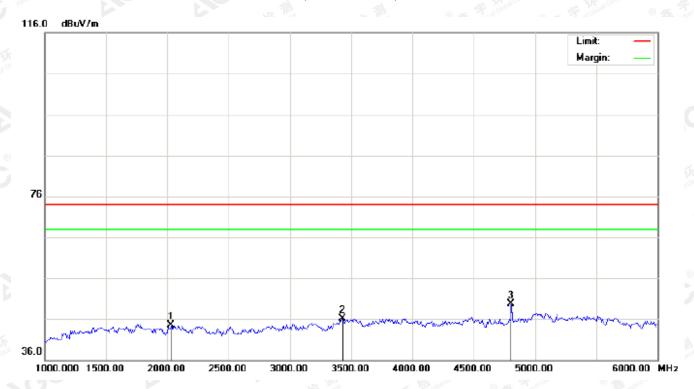


No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2033.333	34.59	9.92	44.51	74.00	-29.49	peak			
2		3433.333	34.04	12.05	46.09	74.00	-27.91	peak			
3	*	4804.000	42.05	7.69	49.74	74.00	-24.26	peak			

RESULT: PASS



Page 35 of 65

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

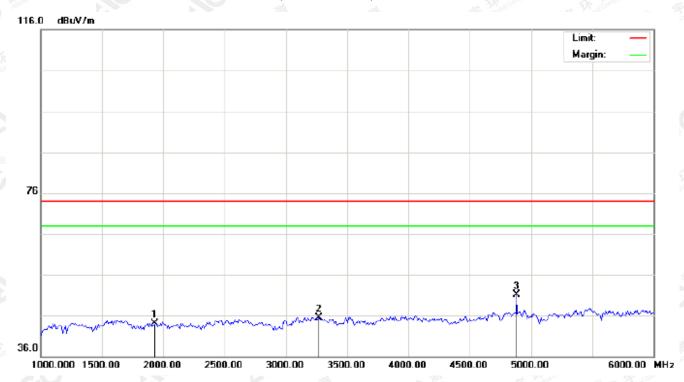


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1933.333	34.99	9.18	44.17	74.00	-29.83	peak			
2		3266.667	33.69	11.89	45.58	74.00	-28.42	peak			
3	*	4882.000	43.16	7.89	51.05	74.00	-22.95	peak			

RESULT: PASS



Page 36 of 65

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

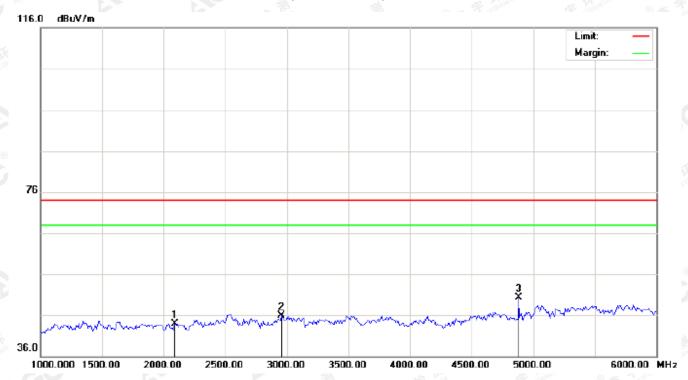

No.). M	k	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		20	91.667	33.91	9.98	43.89	74.00	-30.11	peak			
2		29	58.333	34.27	11.54	45.81	74.00	-28.19	peak			
3	*	48	82.000	42.39	7.89	50.28	74.00	-23.72	peak			

RESULT: PASS


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at alther. I www.agc. gett.com.

Attestation of Global Compliance



Page 37 of 65

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

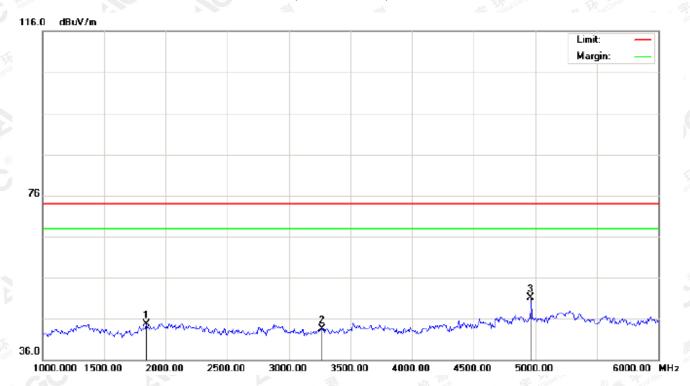

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1841.667	36.57	8.21	44.78	74.00	-29.22	peak			
2		3266.667	31.60	11.89	43.49	74.00	-30.51	peak			
3	*	4960.000	43.10	8.09	51.19	74.00	-22.81	peak			


DECLII T. DACC

The results spowfill this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a stop www.agc.goalt.com.



Page 38 of 65

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

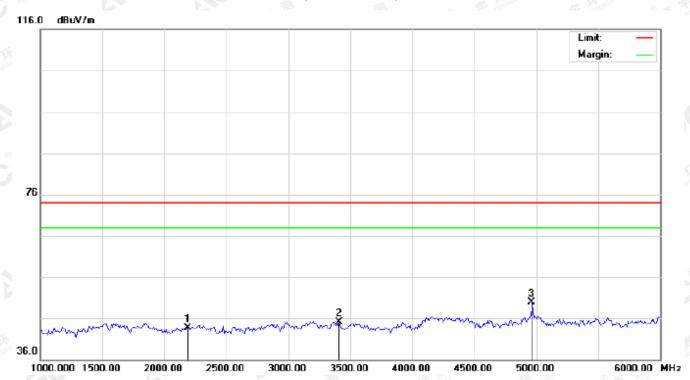

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector		Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2191.667	33.67	10.09	43.76	74.00	-30.24	peak			
2		3408.333	33.01	12.02	45.03	74.00	-28.97	peak			
3	*	4960.000	41.91	8.09	50.00	74.00	-24.00	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 39 of 65

10. BAND EDGE EMISSION


10.1. MEASUREMENT PROCEDURE

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

	Start frequenc	y(MHz)		Stop frequency(MHz)				
	2200	Kingliance	The Compilers	2405				
8 F.	2478	Global Co	attestation of Glob	-,0 "	2500			

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

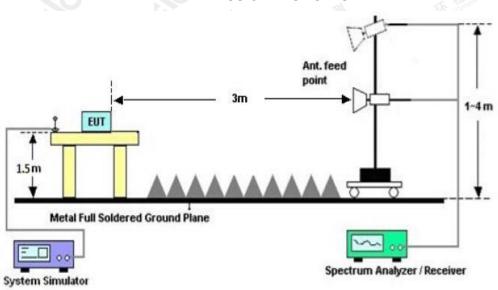

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



age 40 of 65

10.3 RADIATED TEST RESULT

FOR BR/EDR

(Worst modulation: GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2373.225	32.17	10.29	42.46	74.00	-31.54	peak			
2		2390.000	32.50	10.31	42.81	74.00	-31.19	peak			
3		2400.000	38.47	10.32	48.79	74.00	-25.21	peak			
4	*	2402.000	87.92	10.32	98.24	74.00	24.24	peak			
5	Х	2402.000	79.97	10.32	90.29	74.00	16.29	AVG	100	247	-

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.



Page 41 of 65

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

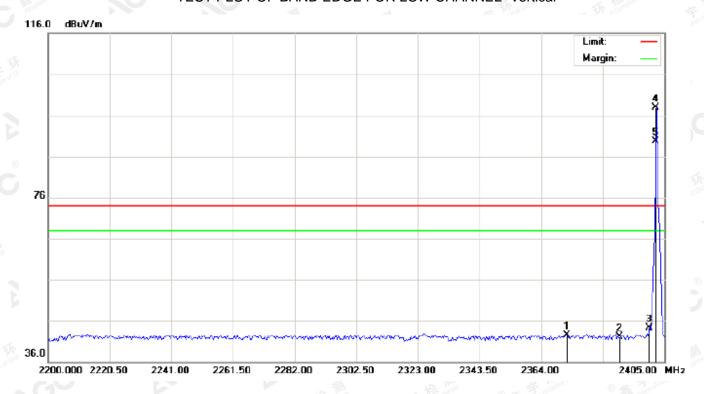


N	. M	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
,	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2372.542	32.28	10.29	42.57	74.00	-31.43	peak			
2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
3	,	2400.000	34.06	10.32	44.38	74.00	-29.62	peak			
4	*	2402.000	87.50	10.32	97.82	74.00	23.82	peak			
5	X	2402.000	79.47	10.32	89.79	74.00	15.79	AVG	100	157	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.cett.com.



Page 42 of 65

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

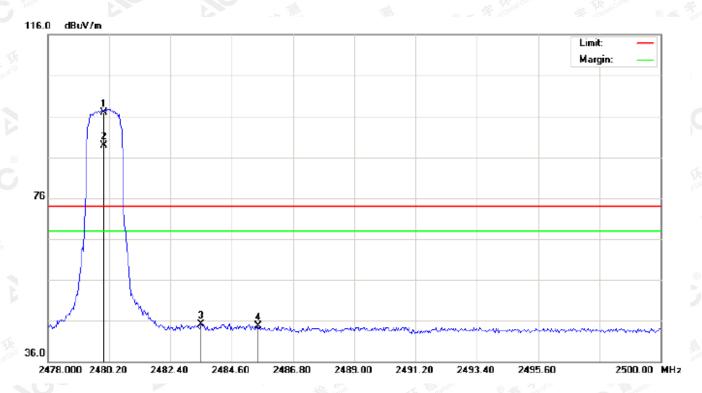


N	. M	k Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
4	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm (degree	
1	*	2480.000	86.51	10.41	96.92	74.00	22.92	peak			
2	X	2480.000	78.54	10.41	88.95	74.00	14.95	AVG	100	241	
3		2483.500	34.69	10.41	45.10	74.00	-28.90	peak			
4		2485.553	34.26	10.41	44.67	74.00	-29.33	peak			

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc gent.com.



Page 43 of 65

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

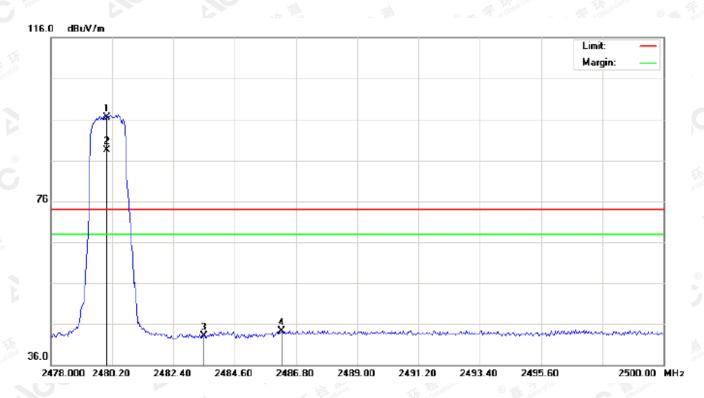

No	MI	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
4	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	86.07	10.41	96.48	74.00	22.48	peak			
2	Х	2480.000	78.04	10.41	88.45	74.00	14.45	AVG	100	134	
3		2483.500	32.76	10.41	43.17	74.00	-30.83	peak			
4		2486.287	33.92	10.41	44.33	74.00	-29.67	peak			

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Page 44 of 65

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ 3RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

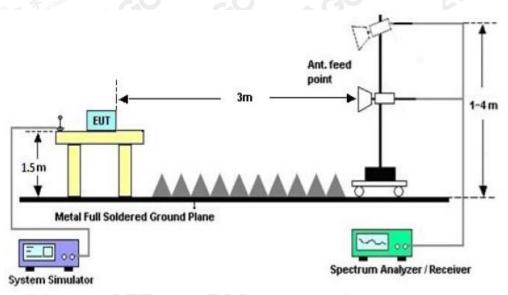

11.3. LIMITS AND MEASUREMENT RESULTS

FOR BR/EDR

BLUETO	BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT										
		Measurement Result									
Applicable Limits		Result									
		99%OBW (MHz)	-20dB BW(MHz)	Kesuit							
Count Committee	Low Channel	0.975	1.103	PASS							
N/A	Middle Channel	0.969	1.120	PASS							
	High Channel	0.979	1.110	PASS							


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.




TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

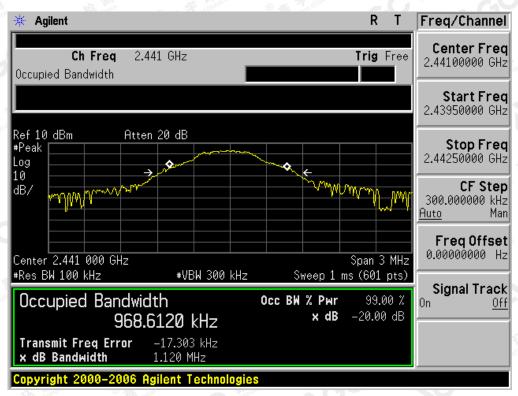


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.






TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

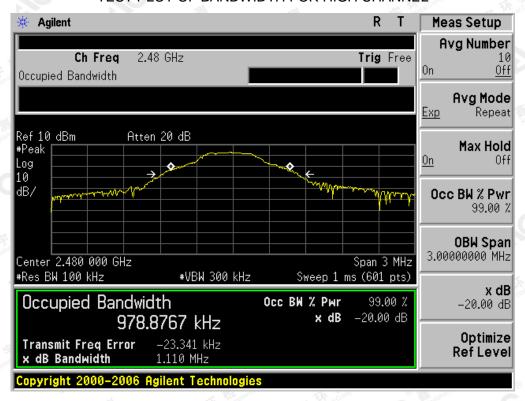


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





				. 201 . 00							
BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT											
		Measure	ement Result								
Applicable Limits		Decult									
		99%OBW (MHz)	-20dB BW(MHz)	Result							
下 整 测	Low Channel	1.236	1.405	PASS							
N/A	Middle Channel	1.236	1.399	PASS							
CO	High Channel	1.246	1.419	PASS							


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

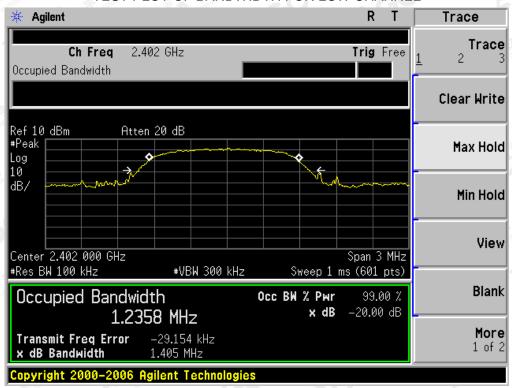


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

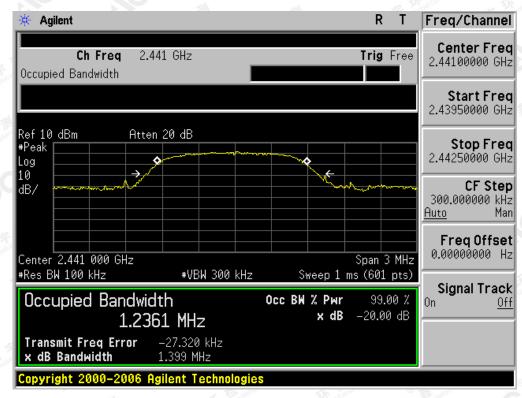

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

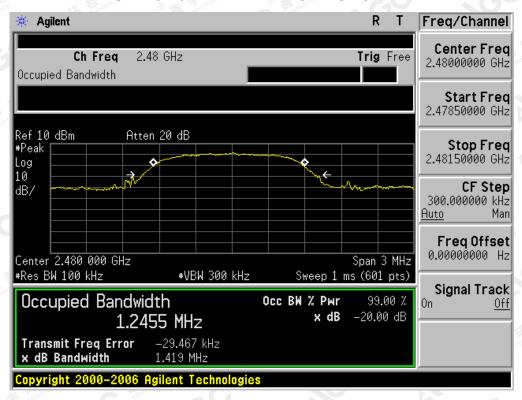


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





				*AA . Co
BLUETO	OOTH 3MBPS LIN	MITS AND MEASU	REMENT RESULT	
		Measure	ement Result	
Applicable Limits		Doorle		
		-20dB BW(MHz)	Result	
不整理 不整理	Low Channel	1.241	1.406	PASS
N/A	Middle Channel	1.242	1.414	PASS
LOC "	High Channel	1.254	1.422	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

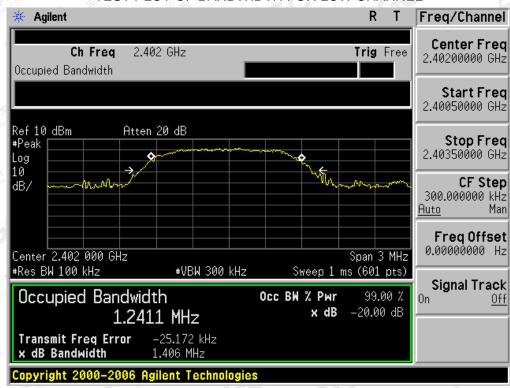


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

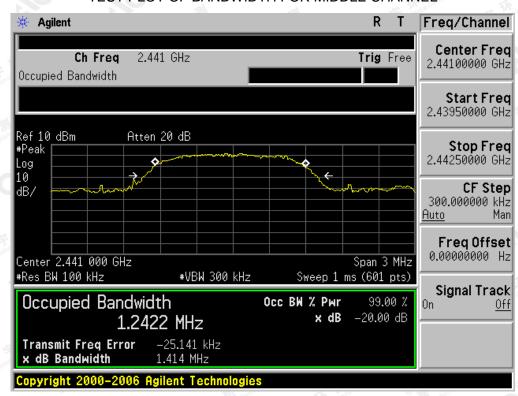

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

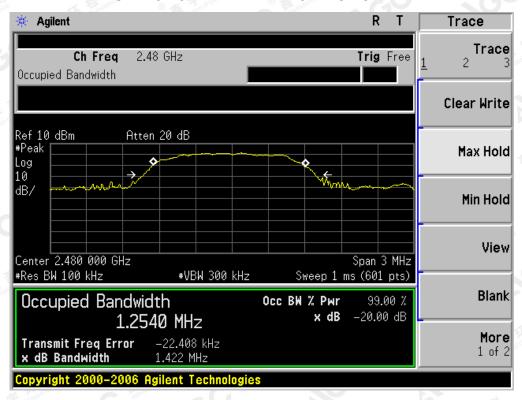

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



age 51 of 65

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)							
150kHz~500kHz	66-56	56-46							
500kHz~5MHz	56	46							
5MHz~30MHz	60	50							

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

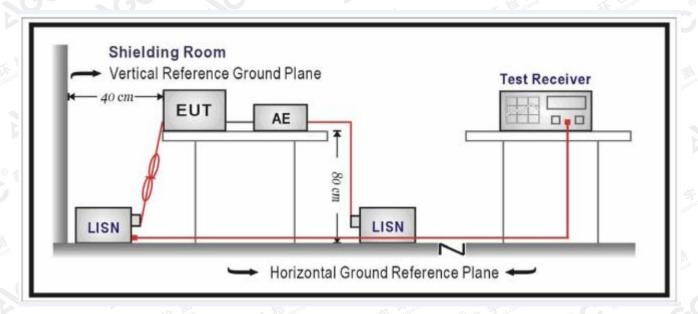

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 52 of 65

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a trp://www.ago.go.tt.com.



Page 53 of 65

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST


By adapter(worst case)

FOR BR/EDR

Line Conducted Emission Test Line 1-L

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



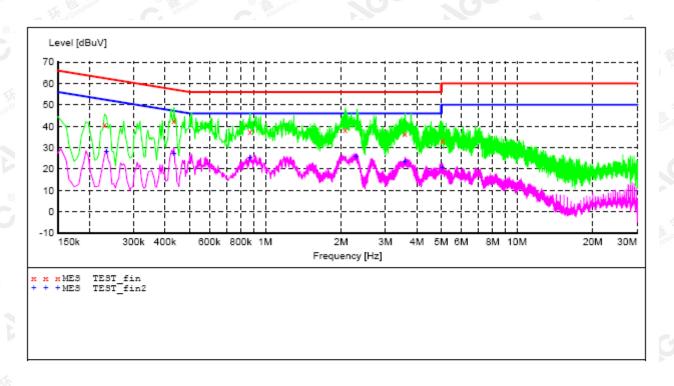

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.230000 0.434000 0.870000 2.078000 3.590000 5.062000	40.60 42.50 37.50 38.30 36.60 33.20	10.1 10.0 10.1 9.9 10.0 10.3	62 57 56 56 56	21.8 14.7 18.5 17.7 19.4 26.8	QP	L1 L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO

MEASUREMENT RESULT:


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.234000 0.434000 0.870000 2.298000 3.590000 5.046000	28.10 27.40 25.20 25.60 23.20 20.40	10.1 10.0 10.1 9.9 10.0 10.3	52 47 46 46 46 50	24.2 19.8 20.8 20.4 22.8 29.6	AV AV AV AV AV	L1 L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.





Line Conducted Emission Test Line 2-N

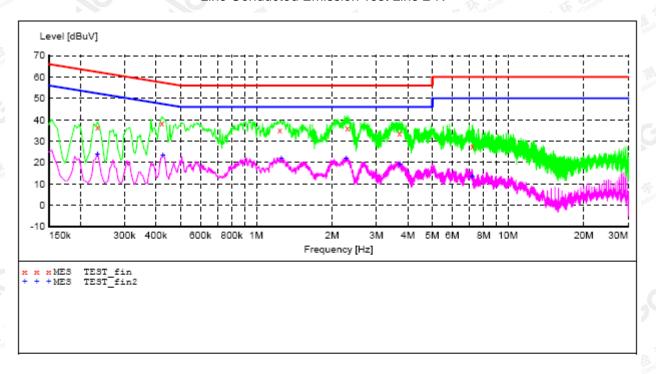


MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.234000 0.422000 1.242000 2.302000 3.706000 7.226000	36.60 38.60 35.20 35.90 33.90 27.60	10.1 10.0 10.1 9.9 10.1 9.8	62 57 56 56 56 60	25.7 18.8 20.8 20.1 22.1 32.4	QP QP QP QP QP QP	N N N N N	FLO FLO FLO FLO FLO

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.234000	23.70	10.1	52	28.6		N	FLO
0.426000	23.50	10.0	47	23.8	AV	N	FLO
1.258000	22.00	10.1	46	24.0	AV	N	FLO
2.274000	21.90	9.9	46	24.1	AV	N	FLO
3.710000	19.30	10.1	46	26.7	AV	N	FLO
7.190000	13.40	9.8	50	36.6	AV	N	FLO

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gett.com.





APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP




FCC RADIATED EMISSION TEST SETUP




The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China





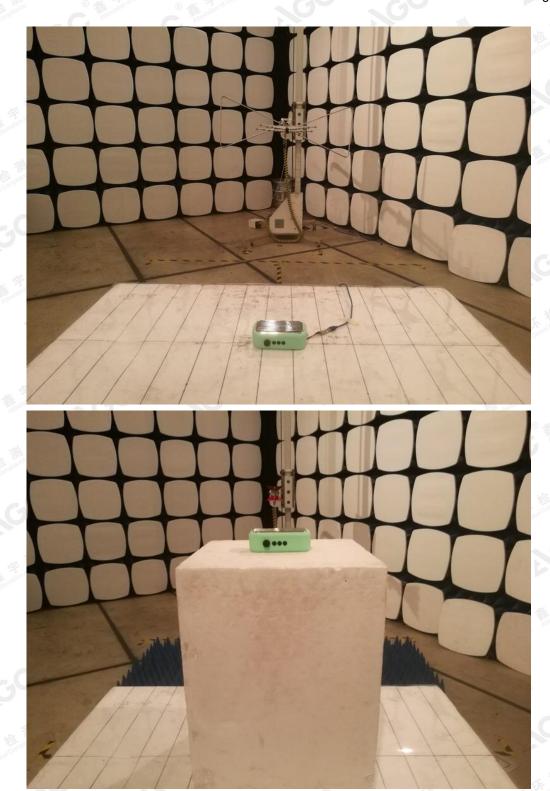

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a type and the confirmed at a type and type and type are the confirmed at a type and type and type are the confirmed at a type and type are type and type and type are type are type and type are type are type and type are type are type are type and type are type are type and type are type are type are type are type and type are t



Page 58 of 65



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (60°, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc-gent.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



BACK VIEW OF EUT



LEFT VIEW OF EUT

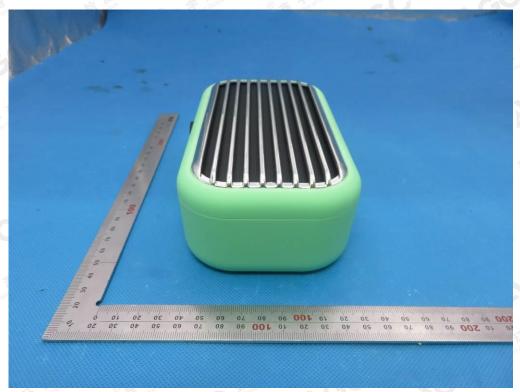

The results spowfor this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



RIGHT VIEW OF EUT



VIEW OF EUT (PORT)



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a type AGC.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



OPEN VIEW OF EUT



VIEW OF BATTERY




The results spowd this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gent.com.

Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



INTERNAL VIEW OF EUT-1

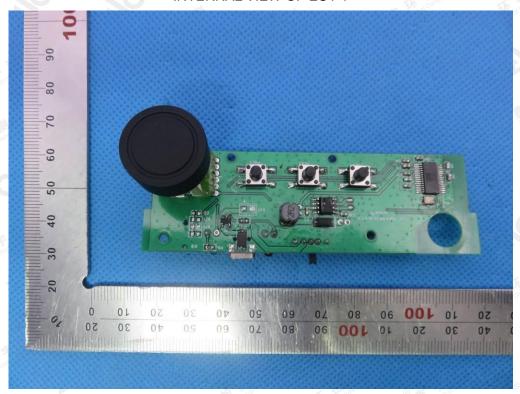

INTERNAL VIEW OF EUT-2

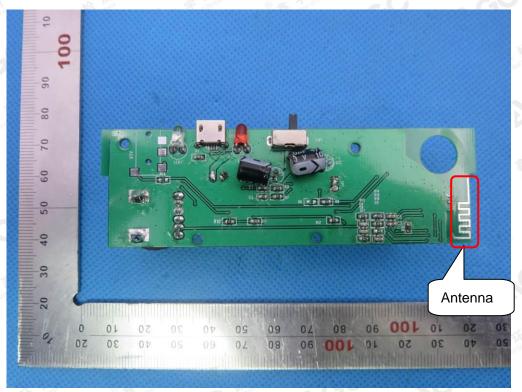


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



INTERNAL VIEW OF EUT-3

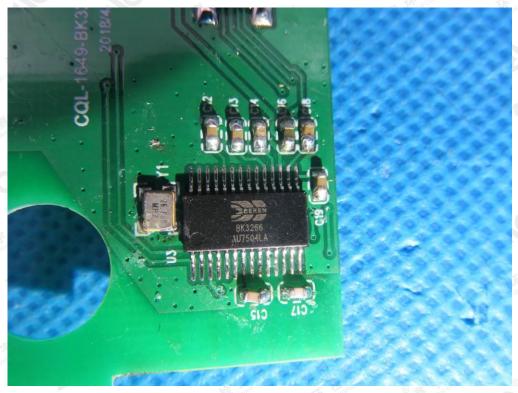

VIEW OF ADAPTER(AE)



The adapter was supplied by AGC

----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.cett.com.