RF TEST REPORT



Report No.: 15071251-FCC-R Supersede Report No.: N/A

Applicant	Shenzhen (Osunp Electronics Co.,LTD	
Product Name	Bluetooth H	lat	
Model No.	BE Link,G	Gen 3.0 , Gen 4.0	
Carial Na	E-201 , E-2	202 , E-203 , E-204 , E-205	, E-206 , E-207 , E-208 , E-
Serial No.	209		
Test Standard	FCC Part 1	5.247: 2014, ANSI C63.10: 2	013
Test Date	December 2	21 to December 30, 2015	
Issue Date	January 05,	, 2016	
Test Result	Pass	Fail	
Equipment compl	ied with the s	specification	
Equipment did no	t comply with	the specification	
Winnie. Z	Thung	David Huang	
Winnie Zh	ang	David Huang	
Test Engir	neer	Checked By	

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report	15071251-FCC-R
Page	2 of 57

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report	15071251-FCC-R
Page	3 of 57

This page has been left blank intentionally.



Test Report	15071251-FCC-R
Page	4 of 57

CONTENTS

1.	REPORT REVISION HISTORY	5
2.	CUSTOMER INFORMATION	5
3.	TEST SITE INFORMATION	
4.	EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5.	TEST SUMMARY	7
6.	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1	ANTENNA REQUIREMENT	8
6.2	CHANNEL SEPARATION	9
6.3	20DB BANDWIDTH	13
6.4	PEAK OUTPUT POWER	17
6.5	NUMBER OF HOPPING CHANNEL	21
6.6	TIME OF OCCUPANCY (DWELL TIME)	23
6.7	BAND EDGE	27
6.8	AC POWER LINE CONDUCTED EMISSIONS	35
6.9	RADIATED SPURIOUS EMISSIONS	41
INA	NEX A. TEST INSTRUMENT	46
ANI	NEX B. EUT AND TEST SETUP PHOTOGRAPHS	47
INA	NEX C. TEST SETUP AND SUPPORTING EQUIPMENT	52
INA	NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	56
INA	NEX E. DECLARATION OF SIMILARITY	57



Test Report	15071251-FCC-R
Page	5 of 57

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15071251-FCC-R	NONE	Original	December 30, 2015
15071251-FCC-R	V1	Change test set up block	January 05, 2016

2. Customer information

Applicant Name	Shenzhen Osunp Electronics Co.,LTD
Applicant Add	Room 611,Huiyi Wealth Center,Zhongxin Road,Long Hua New District,Shen
	Zhen,China
Manufacturer	Shenzhen Osunp Electronics Co.,LTD
Manufacturer Add	Building B,Liao Keng Industrial Area,Shi Yan Town, Baoan District,Shen
	Zhen,China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
Lab Address	South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China
	518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0



Test Report	15071251-FCC-R
Page	6 of 57

4. Equipment under Test (EUT) Information

|--|

Main Model: BE Link , Gen 3.0 , Gen 4.0

E-201 , E-202 , E-203 , E-204 , E-205 , E-206 , E-207 , E-208 , E-Serial Model:

209

Date EUT received: December 21, 2015

Test Date(s): December 21 to December 30, 2015

Equipment Category: DSS

Antenna Gain: Bluetooth: 1.58 dBi

Type of Modulation: Bluetooth: GFSK, π /4 DQPSK, 8DPSK

RF Operating Frequency (ies): Bluetooth: 2402-2480 MHz

Max. Output Power: 0.086dBm

Number of Channels: Bluetooth: 79CH

Port: USB Port

Input Power:

Spec: 3.7V , 180mAh

Trade Name: 3E

FCC ID: 2AG43BELINK



Test Report	15071251-FCC-R
Page	7 of 57

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions			
Test Item	Description	Uncertainty	
Band Edge and Radiated Spurious Emissions Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)		+5.6dB/-4.5dB	
-	-	-	



Test Report	15071251-FCC-R
Page	8 of 57

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antennas:

A permanently attached PCB antenna for Bluetooth, the gain is 1.58 dBi.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.



Test Report	15071251-FCC-R
Page	9 of 57

6.2 Channel Separation

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	December 25, 2015
Tested By :	Winnie Zhang

Requirement(s):			1		
Spec	Item Requirement A		Applicable		
0.45.047(.)(4)		Channel Separation < 20dB BW and 20dB BW <			
	-\	25KHz;Channel Separation Limit=25KHz	V		
§ 15.247(a)(1)	a)	Chanel Separation < 20dB BW and 20dB BW >			
		25kHz; Channel Separation Limit=2/3 20dB BW			
Test Setup		Spectrum Analyzer EUT			
	The to	est follows FCC Public Notice DA 00-705 Measurement	Guidelines.		
	Use the following spectrum analyzer settings:				
	- The EUT must have its hopping function enabled				
	- Span = wide enough to capture the peaks of two adjacent				
	channels				
	- Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span				
Test Procedure	- Video (or Average) Bandwidth (VBW) ≥ RBW				
rest i rocedure	- Sweep = auto				
	- Detector function = peak				
	- Trace = max hold				
	- Allow the trace to stabilize. Use the marker-delta function to				
	determine the separation between the peaks of the adjacent				
		channels. The limit is specified in one of the subparagraphs of this			
		Section. Submit this plot.			



Test Report	15071251-FCC-R
Page	10 of 57

Rema	rk				
Resu	lt	Pass	Fail		
Test Data	Yes	i	□ _{N/A}		
Test Plot	Ye	s (See below)	□ _{N/A}		

Channel Separation measurement result

Type/ Modulation	СН	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
	Low Channel	2402	1.002	0.942	Desc
	Adjacency Channel	2403	1.002	0.942	Pass
CH Separation	Mid Channel	2440	1 000	0.044	Desc
GFSK	Adjacency Channel	2441	1.002	0.944	Pass
	High Channel	2480	1 000	0.941	Desc
	Adjacency Channel	2479	1.002	0.941	Pass
	Low Channel	2402	1.002	0.853	Desc
	Adjacency Channel	2403	1.002	0.053	Pass
CH Separation	Mid Channel	2440	1.002	0.855	Door
π /4 DQPSK	Adjacency Channel	2441	1.002	0.055	Pass
	High Channel	2480	1.002	0.857	Door
	Adjacency Channel	2479	1.002	0.657	Pass
	Low Channel	2402	1.002	0.859	Door
	Adjacency Channel	2403	1.002	0.059	Pass
CH Separation	Mid Channel	2440	1 000	0.064	Desc
8DPSK	Adjacency Channel	2441	1.002	0.861	Pass
	High Channel	2480	1.002	0.859	Door
	Adjacency Channel	2479	1.002	0.059	Pass



Test Report	15071251-FCC-R
Page	11 of 57

Test Plots

Channel Separation measurement result





GFSK - Low Channel







GFSK - High Channel

 π /4 DPSK - Low Channel





 π /4 DQPSK - Middle Channel

 π /4 DQPSK - High Channel



Test Report	15071251-FCC-R
Page	12 of 57





8DPSK - Low Channel

8DPSK - Middle Channel



8DPSK - High Channel



Test Report	15071251-FCC-R
Page	13 of 57

6.3 20dB Bandwidth

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	December 25, 2015
Tested By :	Winnie Zhang

Requirement(s):			
Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	>
Test Setup		Spectrum Analyzer EUT	
Test Procedure		st follows FCC Public Notice DA 00-705 Measurement Gue following spectrum analyzer settings: Span = approximately 2 to 3 times the 20 dB bandwidth, a hopping channel RBW ≥ 1% of the 20 dB bandwidth VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold. The EUT should be transmitting at its maximum data rate trace to stabilize. Use the marker-to-peak function to set to the peak of the emission. Use the marker-delta function measure 20 dB down one side of the emission. Reset the delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the	e. Allow the the marker in to e marker-he



Test Report	15071251-FCC-R
Page	14 of 57

		marker level. The marker-delta reading at this point is the 20 dB		
		bandwid	Ith of the emission. If this value varies with different modes of	
		operatio	on (e.g., data rate, modulation format, etc.), repeat this test for	
		each va	riation. The limit is specified in one of the subparagraphs of	
		this Sec	tion. Submit this plot(s).	
Remark				
Result		Pass	Fail	
Test Data	Y	es	□ _{N/A}	
Test Plot	Y	es (See below)	□ _{N/A}	

Measurement result

Modulation	СН	CH Freq (MHz)	20dB Bandwidth	99% Occupied
Modulation	СП		(MHz)	Bandwidth (MHz)
	Low	2402	0.942	0.8516
GFSK	Mid	2441	0.944	0.8539
	High	2480	0.941	0.8534
	Low	2402	1.280	1.1663
π /4 DQPSK	Mid	2441	1.283	1.1669
	High	2480	1.285	1.1668
	Low	2402	1.288	1.1715
8-DPSK	Mid	2441	1.292	1.1789
	High	2480	1.288	1.1739




Test Report	15071251-FCC-R
Page	15 of 57

Test Plots

20dB Bandwidth measurement result






GFSK - Low Channel


GFSK - Middle Channel





GFSK - High Channel

π /4 DQPSK - Low Channel





π /4 DQPSK - Middle Channel

π /4 DQPSK - High Channel



Test Report	15071251-FCC-R
Page	16 of 57





8DPSK - Middle Channel

8DPSK - Low Channel



8DPSK - High Channel



Test Report	15071251-FCC-R
Page	17 of 57

6.4 Peak Output Power

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	December 25, 2015
Tested By :	Winnie Zhang

Spec	Item	Requirement	Applicable
	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	V
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	
§15.247(b)	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	\
(3)	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	
	e)	FHSS in 902-928MHz with ≥ 25 & <50 channels: ≤ 0.25 Watt	
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	
Test Setup	Spectrum Analyzer EUT		
	The test follows FCC Public Notice DA 00-705 Measurement Guidelines.		
	Use the following spectrum analyzer settings:		
	- Span = approximately 5 times the 20 dB bandwidth, centered on a		
	hopping channel		
Test	- RBW > the 20 dB bandwidth of the emission being measured		
Procedure	- VBW ≥ RBW		
	-	Sweep = auto	
	-	Detector function = peak	
	-	Trace = max hold	
	- Allow the trace to stabilize.		



Test Report	15071251-FCC-R
Page	18 of 57

		- Use the	marker-to-peak function to set the marker to the peak of the		
		emission. The indicated level is the peak output power (see the no			
		above r	egarding external attenuation and cable loss). The limit is		
		specifie	d in one of the subparagraphs of this Section. Submit this		
		plot. A p	beak responding power meter may be used instead of a		
		spectru	m analyzer.		
Remark					
Result		Pass	Fail		
Test Data	Y	es	□ _{N/A}		
Test Plot	Y	es (See below)	□ _{N/A}		

Peak Output Power measurement result

Туре	Modulation	СН	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
		Low	2402	-1.503	1000	Pass
	GFSK	Mid	2441	-0.565	1000	Pass
		High	2480	-0.809	1000	Pass
Outtout	π /4 DQPSK 8-DPSK	Low	2402	-1.216	125	Pass
Output power		Mid	2441	-0.431	125	Pass
		High	2480	-0.427	125	Pass
		Low	2402	-0.543	125	Pass
		Mid	2441	0.086	125	Pass
		High	2480	-0.177	125	Pass



Test Report	15071251-FCC-R
Page	19 of 57

Test Plots

Output Power measurement result






GFSK Output power - Low CH 2402



GFSK Output power - Mid CH 2441



GFSK Output power - High CH 2480



 π /4 DQPSK Output power - Low CH 2402




 π /4 DQPSK Output power - Mid CH 2441

 π /4 DQPSK Output power - High CH 2480



Test Report	15071251-FCC-R
Page	20 of 57





8DPSK Output power - Low CH 2402

8DPSK Output power - Mid CH 2441



8DPSK Output power - High CH 2480



Test Report	15071251-FCC-R
Page	21 of 57

6.5 Number of Hopping Channel

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	December 25, 2015
Tested By :	Winnie Zhang

Requirement(s):			
Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	>
Test Setup		Spectrum Analyzer EUT	
Test Procedure	Use the	st follows FCC Public Notice DA 00-705 Measurement Gue following spectrum analyzer settings: JT must have its hopping function enabled. Span = the frequency band of operation RBW ≥ 1% of the span VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow trace to fully stabilize. It may prove necessary to break the span up to sections, clearly show all of the hopping frequencies. The limit is spone of the subparagraphs of this Section. Submit this plot	in order to pecified in
Remark			
Result	Pas	ss Fail	
	Yes Yes (See	e below)	




Test Report	15071251-FCC-R
Page	22 of 57

Number of Hopping Channel measurement result

Туре	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of	GFSK	2400-2483.5	79	15
Number of Hopping Channel	π /4 DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots

Number of Hopping Channels measurement result

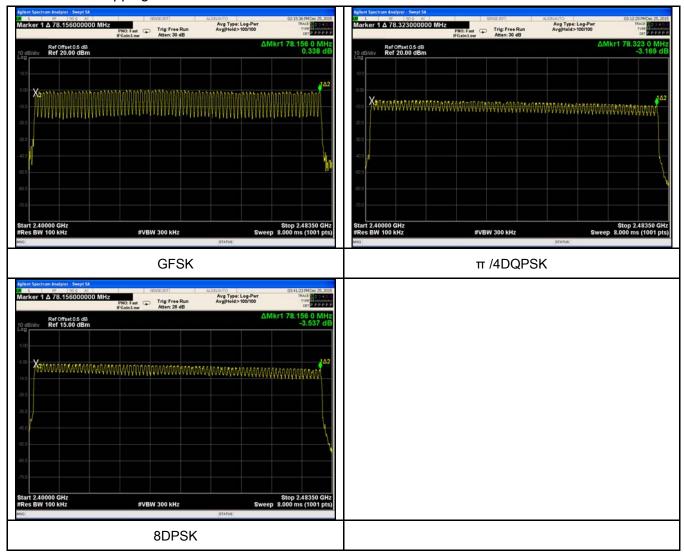



Test Report	15071251-FCC-R
Page	23 of 57

6.6 Time of Occupancy (Dwell Time)

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	December 25, 2015
Tested By :	Winnie Zhang

Spec	Item	Requirement	Applicable		
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	V		
Test Setup		Spectrum Analyzer EUT			
	The te	st follows FCC Public Notice DA 00-705 Measurement G	Guidelines.		
	Use the	e following spectrum analyzer			
	- Span = zero span, centered on a hopping channel				
	-	RBW = 1 MHz			
Test	 VBW ≥ RBW Sweep = as necessary to capture the entire dwell time per hopping 				
Procedure					
		channel			
	-	Detector function = peak			
	-	Trace = max hold			
	- use the marker-delta function to determine the dwell time				
Remark					
Result	Pas	s Fail			

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report	15071251-FCC-R
Page	24 of 57

Dwell Time measurement result

Modulation	СН	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
	Low	2.890	308.267	400	Pass
GFSK	Mid	2.890	308.267	400	Pass
	High	2.880	307.200	400	Pass
π /4 DQPSK	Low	2.880	307.200	400	Pass
	Mid	2.880	307.200	400	Pass
	High	2.890	308.267	400	Pass
8-DPSK	Low	2.880	307.200	400	Pass
	Mid	2.880	307.200	400	Pass
	High	2.870	306.133	400	Pass
	GFSK π /4 DQPSK	GFSK Mid High Low π /4 DQPSK Mid High Low S-DPSK Mid	Modulation CH (ms) Low 2.890 Mid 2.890 High 2.880 Low 2.880 High 2.880 High 2.890 Low 2.880 High 2.890 Low 2.880 Mid 2.880 Mid 2.880	Modulation CH (ms) (ms) GFSK Low 2.890 308.267 High 2.890 308.267 High 2.880 307.200 Low 2.880 307.200 High 2.880 307.200 High 2.890 308.267 Low 2.880 307.200 8-DPSK Mid 2.880 307.200	Modulation CH (ms) (ms) (ms) GFSK Low 2.890 308.267 400 High 2.890 308.267 400 High 2.880 307.200 400 Low 2.880 307.200 400 High 2.890 308.267 400 Low 2.880 307.200 400 8-DPSK Mid 2.880 307.200 400


Note: Dwell time=Pulse Time (ms) × (1600 \div 6 \div 79) ×31.6




Test Report	15071251-FCC-R
Page	25 of 57

Test Plots

Dwell Time measurement result





GFSK - Low CH 2402




Span 0 Hz Sweep 10.00 ms (1001 pts

GFSK - Mid CH 2441




GFDK - High CH 2480

#VBW 3.0 MHz



 π /4 DQPSK - Low CH 2402




 π /4 DQPSK - Mid CH 2441

 π /4 DQPSK - High CH 2480 $\,$




Test Report	15071251-FCC-R
Page	26 of 57





8DPSK - Low CH 2402

8DPSK - Mid CH 2441



8DPSK - High CH 2480



Test Report	15071251-FCC-R
Page	27 of 57

6.7 Band Edge

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	December 29, 2015
Tested By :	Winnie Zhang

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the	✓ V
Test Setup	Peak conducted power limits. Ant. Tower Support Units Ground Plane Test Receiver		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,		



Test Report	15071251-FCC-R
Page	28 of 57


	and make sure the instrument is operated in its linear range.
	- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a
	convenient frequency span including 100kHz bandwidth from band edge, check
	the emission of EUT, if pass then set Spectrum Analyzer as below:
	a. The resolution bandwidth and video bandwidth of test receiver/spectrum
	analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.
	b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and
	video bandwidth is 3MHz with Peak detection for Peak measurement at
	frequency above 1GHz.
	c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the
	video bandwidth is 10Hz with Peak detection for Average Measurement as
	below at frequency above 1GHz.
	- 4. Measure the highest amplitude appearing on spectral display and set it as a
	reference level. Plot the graph with marking the highest point and edge
	frequency.
	- 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	Pass Fail
	•
Test Data	Yes N/A
Test Plot	Yes (See below) N/A



Test Report	15071251-FCC-R
Page	29 of 57


Test Plots

GFSK Mode:

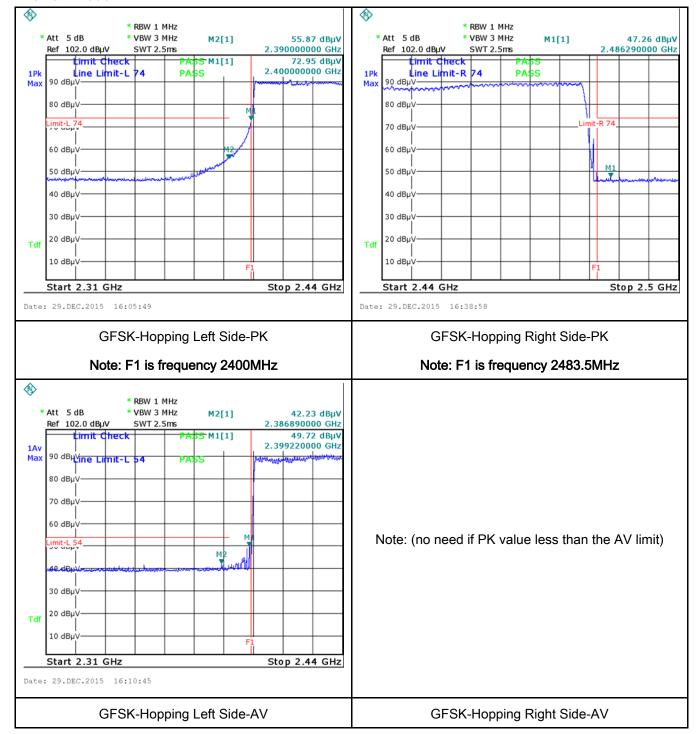




Test Report	15071251-FCC-R
Page	30 of 57

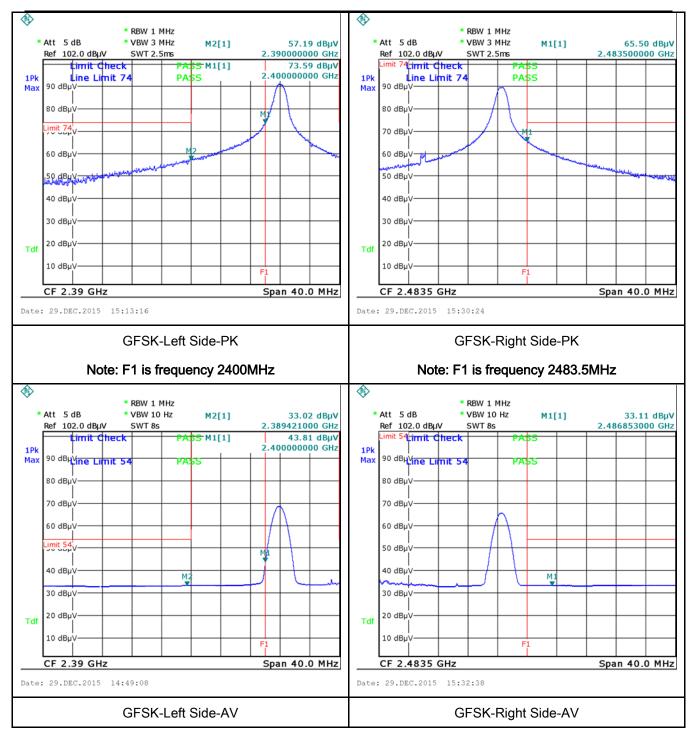




Test Report	15071251-FCC-R
Page	31 of 57

π /4 DQPSK Mode:

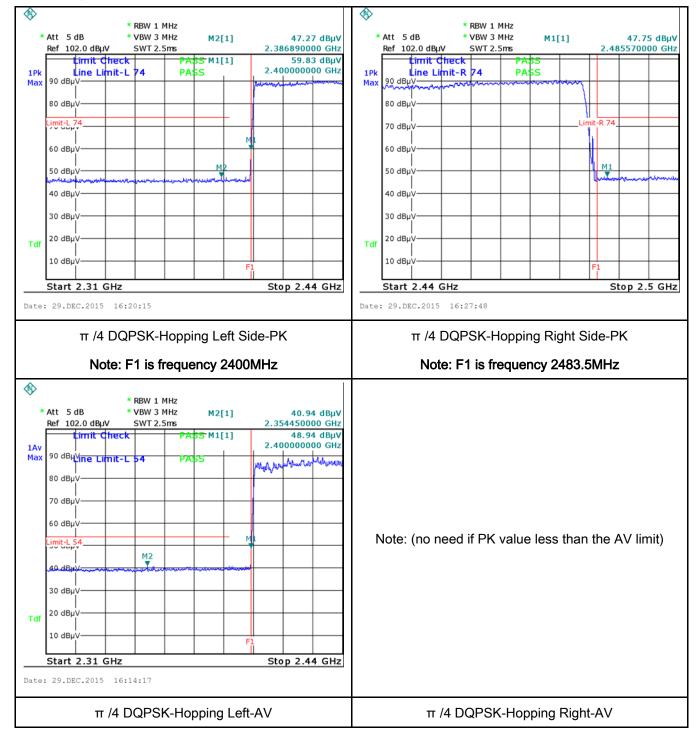




Test Report	15071251-FCC-R
Page	32 of 57

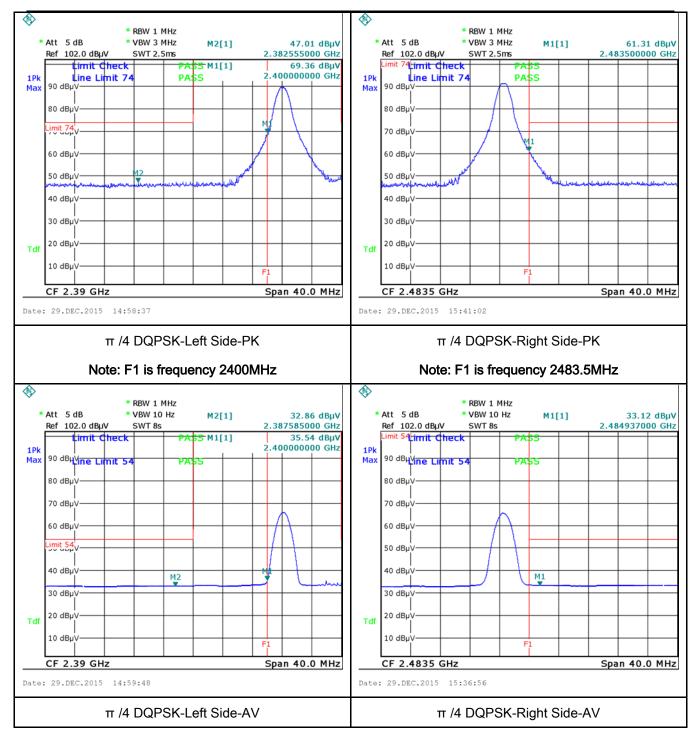




Test Report	15071251-FCC-R
Page	33 of 57

8-DPSK Mode:

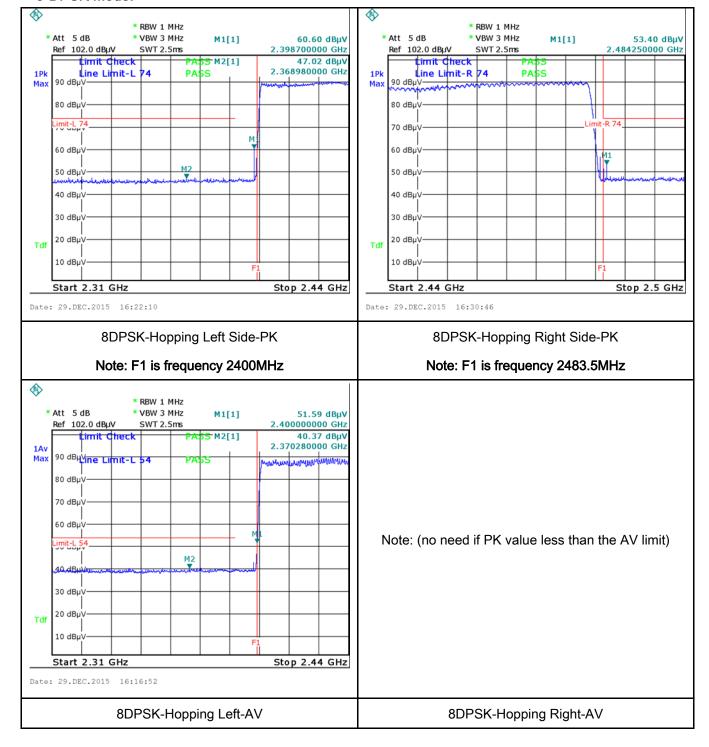



Test Report	15071251-FCC-R
Page	34 of 57

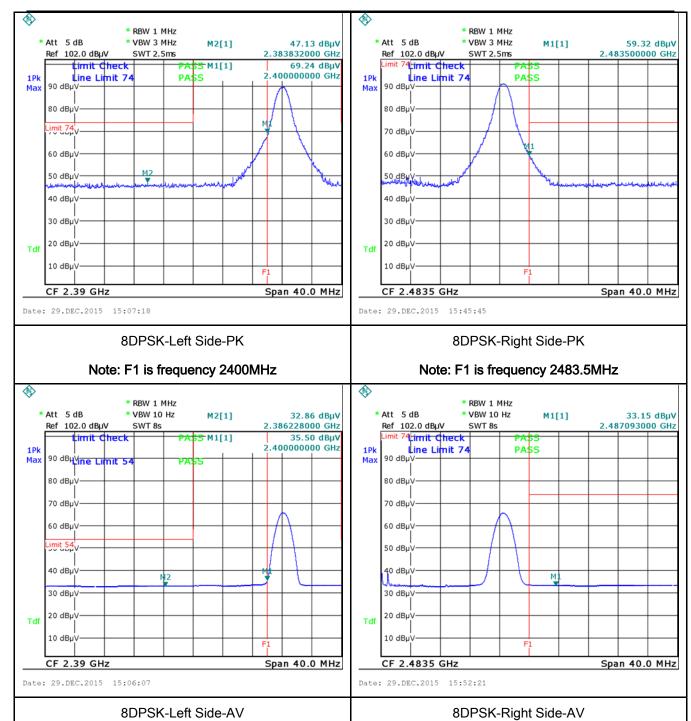



Test Report	15071251-FCC-R
Page	35 of 57

6.8 AC Power Line Conducted Emissions

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	December 29, 2015
Tested By :	Winnie Zhang

Spec	Item	Requirement			Applicable
47CFR§15. 207,	a)	For Low-power radio-freconnected to the public voltage that is conducted frequency or frequencies not exceed the limits in [mu]H/50 ohms line implower limit applies at the Frequency ranges (MHz) 0.15 ~ 0.5 0.5 ~ 5	e utility (AC) power line and back onto the AC poses, within the band 150 the following table, as pedance stabilization notes boundary between the	the radio frequency ower line on any kHz to 30 MHz, shall measured using a 50 etwork (LISN). The	\
		5 ~ 30	60	50	
Test Setup	Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.				
Procedure	 The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss 				



Test Plot

Test Report	15071251-FCC-R
Page	36 of 57


	coaxial cable.	
	4. All other supporting equipment were powered separately from another main supply.	
	5. The EUT was switched on and allowed to warm up to its normal operating condition.	
	6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power)	
	over the required frequency range using an EMI test receiver.	
	7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the	
	selected frequencies and the necessary measurements made with a receiver bandwidth	
	setting of 10 kHz.	
	8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).	
Remark		
Result	Pass Fail	
Test Data	Yes N/A	

Yes (See below)



Test Report	15071251-FCC-R
Page	37 of 57

Test Mode1: Bluetooth Mode

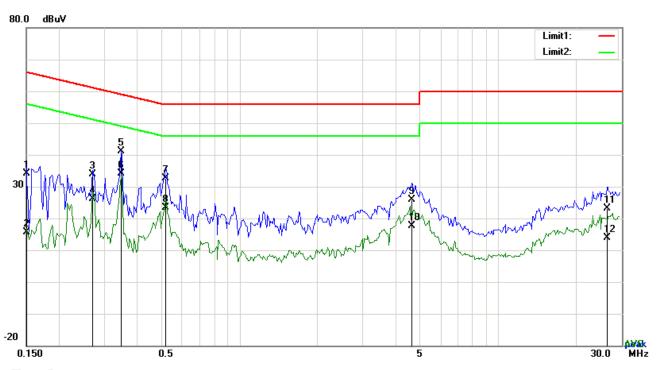

Test Data


Phase Line Plot at 120Vac, 60Hz

				oc Ellio i lot at				
No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.1500	24.05	QP	10.03	34.08	66.00	-31.92
2	L1	0.1500	5.54	AVG	10.03	15.57	56.00	-40.43
3	L1	0.2709	23.74	QP	10.03	33.77	61.09	-27.32
4	L1	0.2709	16.21	AVG	10.03	26.24	51.09	-24.85
5	L1	0.3489	31.16	QP	10.03	41.19	58.99	-17.80
6	L1	0.3489	24.22	AVG	10.03	34.25	48.99	-14.74
7	L1	0.5205	22.62	QP	10.03	32.65	56.00	-23.35
8	L1	0.5205	13.32	AVG	10.03	23.35	46.00	-22.65
9	L1	4.6380	15.81	QP	10.08	25.89	56.00	-30.11
10	L1	4.6380	7.57	AVG	10.08	17.65	46.00	-28.35
11	L1	26.3961	12.68	QP	10.42	23.10	60.00	-36.90
12	L1	26.3961	3.44	AVG	10.42	13.86	50.00	-36.14



Test Report	15071251-FCC-R
Page	38 of 57

Test Mode: Bluetooth Mode

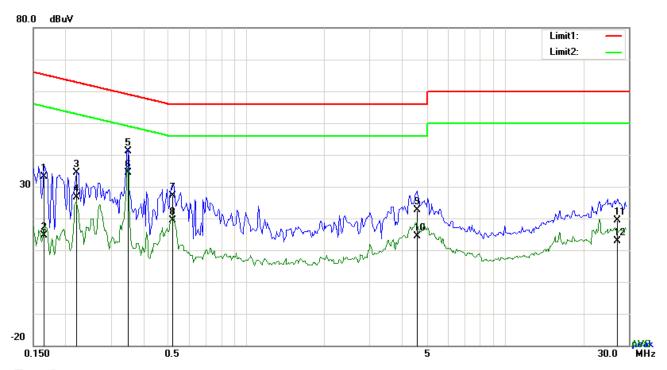

Test Data


Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.1656	23.06	QP	10.02	33.08	65.18	-32.10
2	N	0.1656	4.53	AVG	10.02	14.55	55.18	-40.63
3	N	0.2202	24.35	QP	10.02	34.37	62.81	-28.44
4	N	0.2202	16.73	AVG	10.02	26.75	52.81	-26.06
5	N	0.3489	31.19	QP	10.02	41.21	58.99	-17.78
6	N	0.3489	24.30	AVG	10.02	34.32	48.99	-14.67
7	N	0.5205	17.14	QP	10.02	27.16	56.00	-28.84
8	N	0.5205	9.46	AVG	10.02	19.48	46.00	-26.52
9	N	4.5600	12.48	QP	10.07	22.55	56.00	-33.45
10	N	4.5600	4.26	AVG	10.07	14.33	46.00	-31.67
11	N	27.1488	8.95	QP	10.37	19.32	60.00	-40.68
12	N	27.1488	2.60	AVG	10.37	12.97	50.00	-37.03



Test Report	15071251-FCC-R
Page	39 of 57

Test Mode 2: Bluetooth Mode

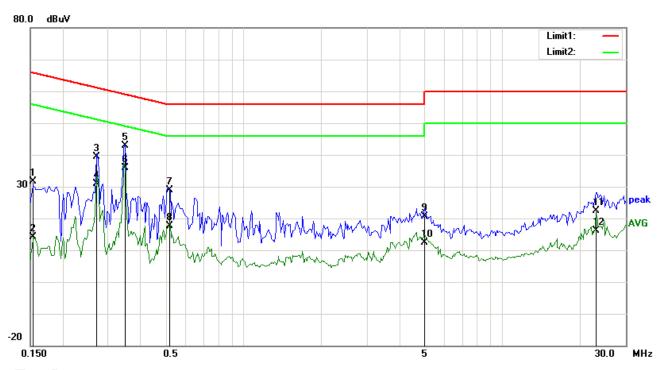

Test Data


Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.1539	21.69	QP	10.03	31.72	65.79	-34.07
2	L1	0.1539	4.11	AVG	10.03	14.14	55.79	-41.65
3	L1	0.2709	29.35	QP	10.03	39.38	61.09	-21.71
4	L1	0.2709	20.80	AVG	10.03	30.83	51.09	-20.26
5	L1	0.3489	32.89	QP	10.03	42.92	58.99	-16.07
6	L1	0.3489	25.96	AVG	10.03	35.99	48.99	-13.00
7	L1	0.5205	18.76	QP	10.03	28.79	56.00	-27.21
8	L1	0.5205	7.64	AVG	10.03	17.67	46.00	-28.33
9	L1	5.0046	10.61	QP	10.08	20.69	60.00	-39.31
10	L1	5.0046	2.42	AVG	10.08	12.50	50.00	-37.50
11	L1	23.1318	11.98	QP	10.36	22.34	60.00	-37.66
12	L1	23.1318	5.89	AVG	10.36	16.25	50.00	-33.75



Test Report	15071251-FCC-R
Page	40 of 57

Test Mode:

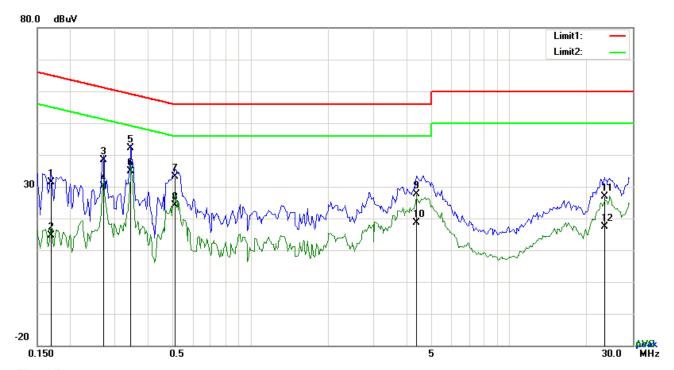

Test Data

Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.1695	21.35	QP	10.02	31.37	64.98	-33.61
2	N	0.1695	4.73	AVG	10.02	14.75	54.98	-40.23
3	N	0.2709	28.45	QP	10.02	38.47	61.09	-22.62
4	Ν	0.2709	20.21	AVG	10.02	30.23	51.09	-20.86
5	Z	0.3450	32.08	QP	10.02	42.10	59.08	-16.98
6	Ν	0.3450	24.91	AVG	10.02	34.93	49.08	-14.15
7	N	0.5127	23.07	QP	10.02	33.09	56.00	-22.91
8	Ν	0.5127	14.09	AVG	10.02	24.11	46.00	-21.89
9	N	4.3806	17.64	QP	10.06	27.70	56.00	-28.30
10	N	4.3806	8.49	AVG	10.06	18.55	46.00	-27.45
11	N	23.3034	16.66	QP	10.31	26.97	60.00	-33.03
12	N	23.3034	6.99	AVG	10.31	17.30	50.00	-32.70



Test Report	15071251-FCC-R
Page	41 of 57

6.9 Radiated Spurious Emissions

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	December 29, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement Applicable					
47CFR§15. 205, §15.209,	a)	Except higher limit as specified else emissions from the low-power radio-exceed the field strength levels specified the level of any unwanted emissions the fundamental emission. The tight edges	>				
§15.247(d)		Frequency range (MHz) 30 - 88	Field Strength (μV/m) 100				
3 - (-)		88 - 216	150				
		216 960	200				
		Above 960	500				
Test Setup			Ant. Tower 1-4m Variable	-			
Procedure	 The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: 						



Test Report	15071251-FCC-R
Page	42 of 57


		a.	Vertical or horizontal polarization (whichever gave the higher emission
			level over a full rotation of the EUT) was chosen.
		b.	The EUT was then rotated to the direction that gave the maximum
			emission.
		C.	Finally, the antenna height was adjusted to the height that gave the
			maximum emission.
	3.	The res	olution bandwidth and video bandwidth of test receiver/spectrum analyzer is
		120 kHz	z for Quasiy Peak detection at frequency below 1GHz.
	4.	The reso	olution bandwidth of test receiver/spectrum analyzer is 1MHz and video
		bandwid	th is 3MHz with Peak detection for Peak measurement at frequency above
		1GHz.	
		The res	olution bandwidth of test receiver/spectrum analyzer is 1MHz and the video
		bandwid	dth is 10Hz with Peak detection for Average Measurement as below at
		frequen	cy above 1GHz.
	5.	Steps 2	2 and 3 were repeated for the next frequency point, until all selected
		frequen	ncy points were measured.
Remark			
Result	☑ Pa	ISS	Fail
Test Data	Yes		□ _{N/A}
Test Plot	Yes (S	See belov	w) N/A



Test Report	15071251-FCC-R
Page	43 of 57

Test Mode: Bluetooth Mode

Below 1GHz

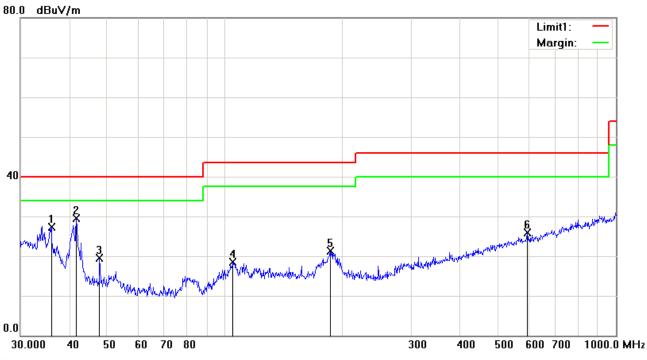

Test Data


Horizontal Polarity Plot @3m

	Trenzentan Feransy Free Gen.										
No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree	
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	Н	36.0007	31.98	peak	-4.67	27.31	40.00	-12.69	100	216	
2	Н	41.7130	38.24	peak	-8.73	29.51	40.00	-10.49	100	0	
3	Н	47.8260	31.63	peak	-12.20	19.43	40.00	-20.57	100	201	
4	Н	104.9033	28.37	peak	-9.93	18.44	43.50	-25.06	100	141	
5	Н	185.7882	30.75	peak	-9.51	21.24	43.50	-22.26	100	216	
6	Н	593.0497	26.06	peak	-0.11	25.95	46.00	-20.05	100	126	



Test Report	15071251-FCC-R
Page	44 of 57

Below 1GHz

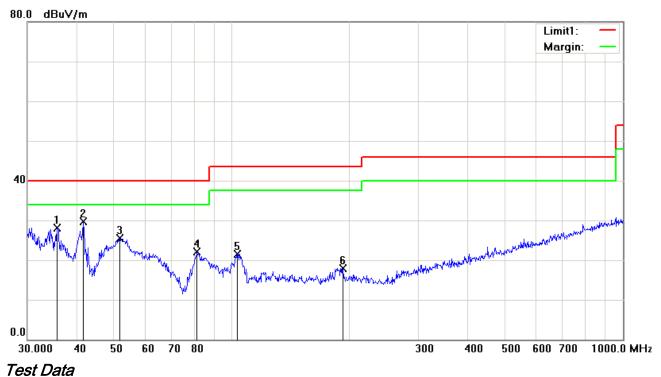

Vertical Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	>	35.7491	32.61	peak	-4.49	28.12	40.00	-11.88	100	358
2	٧	41.7130	38.50	peak	-8.73	29.77	40.00	-10.23	100	237
3	٧	51.6616	38.88	peak	-13.37	25.51	40.00	-14.49	100	282
4	٧	81.4970	35.85	peak	-13.69	22.16	40.00	-17.84	100	128
5	V	103.0800	31.73	peak	-10.25	21.48	43.50	-22.02	100	237
6	V	192.4186	27.11	peak	-9.11	18.00	43.50	-25.50	100	199



Test Report	15071251-FCC-R
Page	45 of 57

Above 1GHz

Test Mode: Transmitting Mode

Mode: GFSK (Worst Case)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4804	38.91	AV	V	33.83	6.86	31.72	47.88	54	-6.12
4804	38.58	AV	Н	33.83	6.86	31.72	47.55	54	-6.45
4804	46.93	PK	V	33.83	6.86	31.72	55.9	74	-18.10
4804	46.84	PK	Н	33.83	6.86	31.72	55.81	74	-18.19

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4882	38.86	AV	V	33.86	6.82	31.82	47.72	54	-6.28
4882	38.62	AV	Н	33.86	6.82	31.82	47.48	54	-6.52
4882	46.97	PK	V	33.86	6.82	31.82	55.83	74	-18.17
4882	46.88	PK	Н	33.86	6.82	31.82	55.74	74	-18.26

High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4960	38.84	AV	V	33.9	6.76	31.92	47.58	54	-6.42
4960	38.73	AV	Н	33.9	6.76	31.92	47.47	54	-6.53
4960	46.91	PK	V	33.9	6.76	31.92	55.65	74	-18.35
4960	46.85	PK	Н	33.9	6.76	31.92	55.59	74	-18.41

Note:

- 1, The testing has been conformed to 10*2480MHz=24,800MHz
- 2, All other emissions more than 30 dB below the limit



Test Report	15071251-FCC-R
Page	46 of 57

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<u><</u>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<u><</u>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<u><</u>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	N
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	V
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<u><</u>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<u> </u>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<u><</u>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	~
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	~
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	V
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	V
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	V
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	K
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	V



Test Report	15071251-FCC-R	
Page	47 of 57	

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo





Test Report	15071251-FCC-R	
Page	48 of 57	





EUT - Bottom View

EUT - Left View




EUT - Right View



Test Report	15071251-FCC-R	
Page	49 of 57	

Annex B.ii. Photograph: EUT Internal Photo

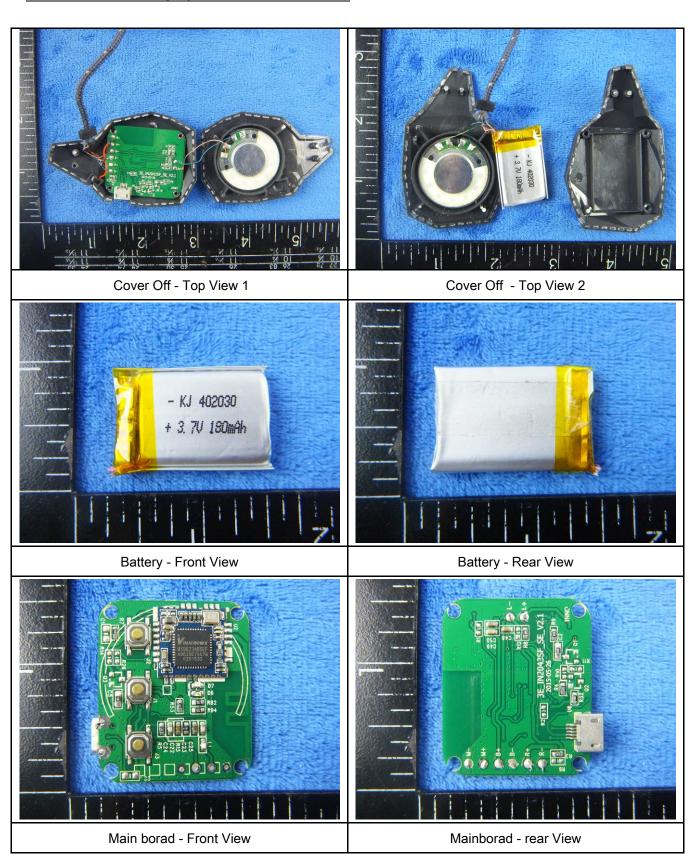



Test Report	15071251-FCC-R	
Page	50 of 57	

BT - Antenna View	



Test Report	15071251-FCC-R	
Page	51 of 57	


Annex B.iii. Photograph: Test Setup Photo



Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View



Radiated Spurious Emissions Test Setup Below 1GHz



Radiated Spurious Emissions Test Setup Above 1GHz




Test Report	15071251-FCC-R	
Page	52 of 57	

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

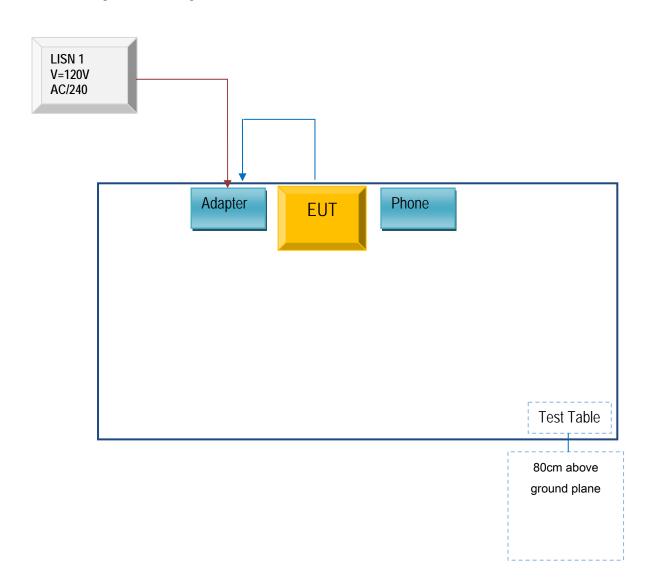



Test Report	15071251-FCC-R	
Page	53 of 57	


Block Configuration Diagram for Radiated Emissions (Below 1GHz).

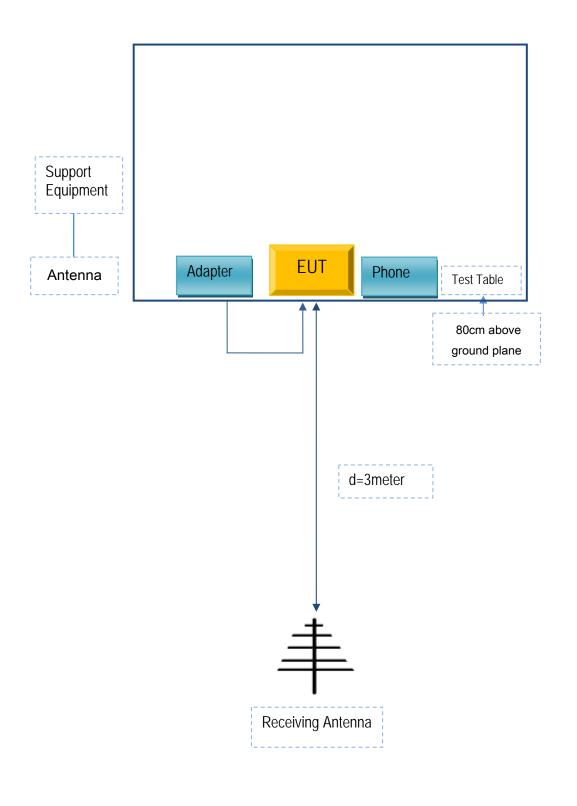



Test Report	15071251-FCC-R	
Page	54 of 57	

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

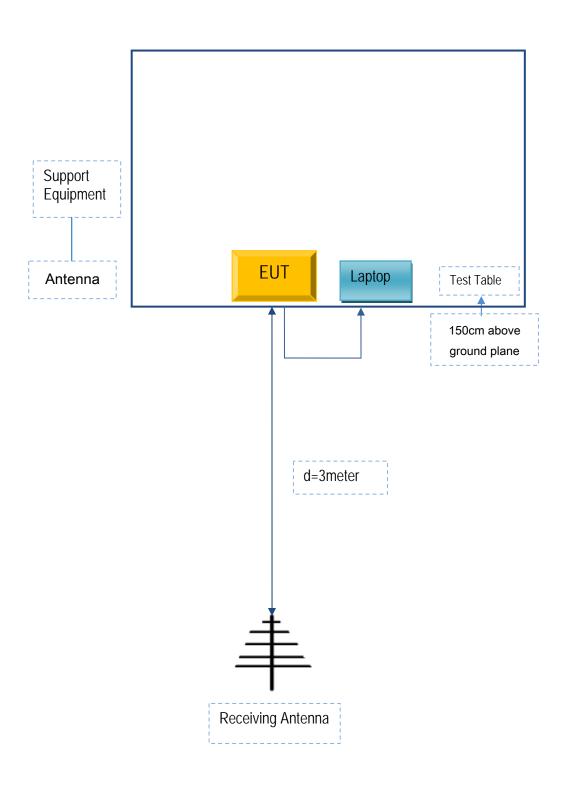



Test Report	15071251-FCC-R	
Page	55 of 57	

Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Computer	E40	LS120015871
HTC	Adapter	ST15001	CN013302452

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	CN013302452



Test Report	15071251-FCC-R
Page	56 of 57

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment



Test Report	15071251-FCC-R
Page	57 of 57

Annex E. DECLARATION OF SIMILARITY

Shenzhen Osunp Electronics Co.,LTD

To: SIEMIC ,775 Montague Expressway, Milpitas, CA 95035, USA

Declaration Letter

Dear Sir,

For our business issue and marketing requirement, we would like to list 12 model numbers on the FCC ID certificates and reports, as following:

Model No.: BE Link, Gen 3.0, Gen 4.0, E-201, E-202, E-203, E-204, E-205, E-206, E-207, E-208, E-209

We declare that, all the model PCB ,Antenna and Appearance shape , accessories are the same . The difference of these is listed as below:

Main Model No	Serial Model No	Difference
BE Link, Gen 3.0, Gen 4.0,	E-201, E-202, E-203, E-204, E-205, E-206, E-207, E-208, E-209	Different model name

Thank you!

Signature: Steven Wu

Printed name/title:

Address: Room 611, Huiyi Wealth Center, Zhongxin Road, Long Hua New District, Shen Zhen, China