

SAR EVALUATION REPORT

For

CLC HONG KONG LIMITED

1011A, 10/F., Harbour Centre Tower 1, No.1 Hok Cheung St., Hung Hom, Kowloon, Hong Kong

FCC ID: 2AG4WZ517

Report Type: Product Type: Compass LTE Original Report **Report Number:** RDG171228009-20 **Report Date:** 2018-02-11 pucky xiao Rocky Xiao Reviewed By: RF Engineer Prepared By: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Attestation of Test Results							
	EUT Description	Compass LTE					
	Tested Model	Z517					
EUT Information	FCC ID	2AG4WZ517					
Information	Serial Number	17122800920					
	Test Date	2018-02-04 ~ 2018-02-09					
MOI		Max. SAR Level(s) Reported(W/kg)	Limit (W/kg)				
GG3.5.0.50	1g Head SAR	0.31	(3)				
GSM 850	1g Body SAR	0.70					
DCC 1000	1g Head SAR	0.22					
PCS 1900	1g Body SAR	0.91					
WCDMA Band 2	1g Head SAR	0.20					
WCDMA Band 2	1g Body SAR	1.32					
WCDMA Band 5	1g Head SAR	0.16					
WCDMA Ballu 5	1g Body SAR	0.21					
LTE Band 2	1g Head SAR	0.25					
LIE Danu 2	1g Body SAR	0.79					
LTE Band 4	1g Head SAR	0.36	1.6				
LTE Danu 4	1g Body SAR	1.23					
LTE Band 5	1g Head SAR	0.15					
LTE Band 7	1g Body SAR	0.23					
	1g Head SAR	0.30					
	1g Body SAR	1.22					
LTE Band 17	1g Head SAR	0.24					
ETE band 17	1g Body SAR	0.29					
	1g Head SAR	0.73					
Simultaneous	1g Body SAR	1.51					
	1g Body SAR	1.51 (Hotspot)					
	FCC 47 CFR part 2 Radiofrequency radia	.1093 ution exposure evaluation: portable devices					
		Practice for Determining the Peak Spatial-Average SR) in the Human Head from Wireless Communicatio ques					
Applicable Standards	communication device to determine the spec	adio frequency fields from hand-held and body-mour ces-Human models, instrumentation, and procedures- ific absorption rate (SAR) for wireless communication to human body (frequency range of 30 MHz to 6 GHz	Part 2: Procedure on devices used in				
close proximity to the human body (frequency range of 30 MHz to 6 GHz) KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 648474 D04 Handset SAR v01r03 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 941225 D06 Hotspot Mode v02r01							

Report No.: RDG171228009-20

SAR Evaluation Report 2 of 75

Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

Report No.: RDG171228009-20

The results and statements contained in this report pertain only to the device(s) evaluated.

SAR Evaluation Report 3 of 75

TABLE OF CONTENTS

Report No.: RDG171228009-20

DOCUMENT REVISION HISTORY	5
EUT DESCRIPTION	6
TECHNICAL SPECIFICATION	6
REFERENCE, STANDARDS, AND GUIDELINES	7
SAR LIMITS	8
FACILITIES	9
DESCRIPTION OF TEST SYSTEM	10
EQUIPMENT LIST AND CALIBRATION	15
EQUIPMENTS LIST & CALIBRATION INFORMATION	15
SAR MEASUREMENT SYSTEM VERIFICATION	16
LIQUID VERIFICATION	
SYSTEM ACCURACY VERIFICATIONSAR SYSTEM VALIDATION DATA	
EUT TEST STRATEGY AND METHODOLOGY	
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR	
CHEEK/TOUCH POSITION	
EAR/TILT POSITION	30
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	
TEST DISTANCE FOR SAR EVALUATION SAR EVALUATION PROCEDURE	
CONDUCTED OUTPUT POWER MEASUREMENT	
PROVISION APPLICABLE	
TEST PROCEDURE	
RADIO CONFIGURATION	33
MAXIMUM TARGET OUTPUT POWER	
TEST RESULTS:	
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	
ANTENNA DISTANCE TO EDGE	53 54
SAR MEASUREMENT RESULTS	
SAR TEST DATA	
SAR MEASUREMENT VARIABILITY	66
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	67
SAR PLOTS	71
APPENDIX A MEASUREMENT UNCERTAINTY	72
APPENDIX B EUT TEST POSITION PHOTOS	74
ADDENDING CALIDDATION CERTIFICATES	7.5

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision	
1.0	RDG171228009-20	Original Report	2018-02-11	

Report No.: RDG171228009-20

SAR Evaluation Report 5 of 75

EUT DESCRIPTION

This report has been prepared on behalf of *CLC HONG KONG LIMITED* and their product *Compass LTE*, Model: **Z517**, FCC ID: **2**AG4WZ517 or the EUT (Equipment under Test) as referred to in the rest of this report.

Report No.: RDG171228009-20

*All measurement and test data in this report was gathered from production sample serial number: 17122800920 (Assigned by BACL, Dongguan). The EUT supplied by the applicant was received on 2018-01-30.

Technical Specification

Device Type:	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
DTM Type:	Class B
Multi-slot Class:	GPRS(Class 12); EGPRS(Class 12)
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Operation Mode :	GSM Voice, GPRS/EDGE Data, WCDMA(R99 (Voice+Data), HSDPA/HSUPA/HSPA+/DC-HSDPA) FDD-LTE, WLAN, Bluetooth
Frequency Band:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 4: 1710-1755 MHz(TX); 2110-2155 MHz(RX) LTE Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX); 2620-2690 MHz(RX) LTE Band 17: 704-716 MHz(TX); 734-746 MHz(RX) WLAN: 2412 -2462 MHz /2422 -2452 MHz Bluetooth: 2402 MHz-2480 MHz
Conducted RF Power:	GSM 850 : 32.14 dBm PCS 1900: 29.53 dBm WCDMA Band 2: 22.66 dBm WCDMA Band 5: 22.67 dBm LTE Band 2: 22.16 dBm LTE Band 4: 22.84 dBm LTE Band 5: 22.8 dBm LTE Band 7: 22.36 dBm LTE Band 17: 23.1 dBm WLAN: 9.39 dBm Bluetooth(BDR/EDR): 3.53 dBm BLE: 4.01 dBm
Dimensions (L*W*H):	14.5 cm (L) * 7.1 cm (W) * 0.9 cm (H)
Power Source:	3.8 VDC Rechargeable Battery
Normal Operation:	Head and Body-worn

SAR Evaluation Report 6 of 75

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

Report No.: RDG171228009-20

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Evaluation Report 7 of 75

SAR Limits

FCC Limit

Report No.: RDG171228009-20

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

CE Limit

	SAR (W/kg)				
	(General Population /	(Occupational /			
EXPOSURE LIMITS	Uncontrolled Exposure	Controlled Exposure			
	Environment)	Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 10 g of tissue)	2.0	10			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

SAR Evaluation Report 8 of 75

FACILITIES

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

Report No.: RDG171228009-20

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 897218,the FCC Designation No.: CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

The test sites and measurement facilities used to collect data are located at:

SAR Lab 1	⊠ SAR Lab 2
-----------	-------------

SAR Evaluation Report 9 of 75

DESCRIPTION OF TEST SYSTEM


These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

Report No.: RDG171228009-20



DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

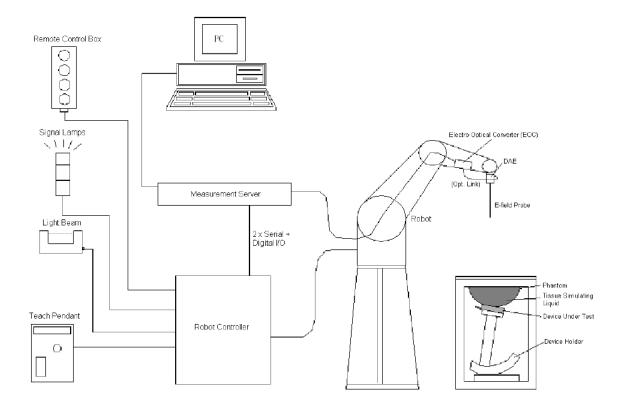

SAR Evaluation Report 10 of 75

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY5 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical



Report No.: RDG171228009-20

processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

SAR Evaluation Report 11 of 75

ES3DV2 E-Field Probes

Frequency	10 MHz to > 4 GHz Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	\pm 0.2 dB in TSL (rotation around probe axis) \pm 0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g Linearity: \pm 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 10 mm) Tip diameter: 4 mm (Body: 10 mm) Typical distance from probe tip to dipole centers: 4.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness

- increases to 6 mm). The phantom has three measurement areas: _ Left Head
- _ Right Head
- Flat phantom

The phantom table for the DASY systems based on the robots have the size of 100 x 50 x 85 cm (L x W x H). For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the

standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.



Report No.: RDG171228009-20

SAR Evaluation Report 12 of 75


Triple Flat Phantom

The SAM twin phantom is a fiberglass shell phantom with $2mm(\pm~0.2~mm)$ shell thickness . The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).

The phantom table have the size of $100 \times 75 \times 91 \text{ cm}$ (L x W x H).

For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)



Report No.: RDG171228009-20

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

Robots

The DASY5 system uses the high precision industrial robot. The robot offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

SAR Evaluation Report 13 of 75

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

Report No.: RDG171228009-20

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Recommended Tissue Dielectric Parameters for Head and Body

Frequency	Head '	Гissue	Body Tissue		
(MHz)	εr	O'(S/m)	εr	O'(S/m)	
150	52.3	0.76	61.9	0.80	
300	45.3	0.87	58.2	0.92	
450	43.5	0.87	56.7	0.94	
835	41.5	0.90	55.2	0.97	
900	41.5	0.97	55.0	1.05	
915	41.5	0.98	55.0	1.06	
1450	40.5	1.20	54.0	1.30	
1610	40.3	1.29	53.8	1.40	
1800-2000	40.0	1.40	53.3	1.52	
2450	39.2	1.80	52.7	1.95	
3000	38.5	2.40	52.0	2.73	
5800	35.3	5.27	48.2	6.00	

SAR Evaluation Report 14 of 75

EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information


Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52.8	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 4.5.12	1567	NCR	NCR
Data Acquisition Electronics	DAE4	772	2017/10/9	2018/10/8
E-Field Probe	ES3DV2	3019	2017/10/30	2018/10/29
Mounting Device	MD4HHTV5	BJPCTC0152	NCR	NCR
Twin SAM	Twin SAM V5.0	1412	NCR	NCR
Triple Flat Phantom 5.1C	QD 000 P51 CA	1130	NCR	NCR
Dipole, 750 MHz	D750V3	1167	2016/11/8	2019/11/7
Dipole, 1750 MHz	D1750V2	1141	2015/7/9	2018/7/9
Dipole, 1900 MHz	D1900V2	543	2016/10/25	2019/10/24
Dipole,2450 MHz	D2450V2	971	2015/7/8	2018/7/8
Dipole, 2600 MHz	D2600V2	1132	2016/11/10	2019/11/9
Simulated Tissue 750 MHz Head	TS-750-H	1710075001	Each Time	/
Simulated Tissue 750 MHz Body	TS-750-B	1710075002	Each Time	/
Simulated Tissue 1750 MHz Head	TS-1750-H	1709175001	Each Time	/
Simulated Tissue 1750 MHz Body	TS-1750-B	1709175002	Each Time	/
Simulated Tissue 1900 MHz Head	TS-1900-H	1709190001	Each Time	/
Simulated Tissue 1900 MHz Body	TS-1900-B	1709190002	Each Time	/
Simulated Tissue 2450 MHz Head	TS-2450-H	1709245001	Each Time	/
Simulated Tissue 2450 MHz Body	TS-2450-B	1709245002	Each Time	/
Simulated Tissue 2600 MHz Head	TS-2600-H	1710260001	Each Time	/
Simulated Tissue 2600 MHz Body	TS-2600-B	1710260002	Each Time	/
Network Analyzer	8753C	3033A02857	2017/8/31	2018/8/31
Dielectric assessment kit	1253	SM DAK 040 CA	N/A	N/A
Signal Generator	N5182B	MY51350142	2017/5/4	2018/5/4
Power Meter	EPM-441A	GB37481494	2017/12/11	2018/12/11
Power Amplifier	ZVA-183-S+	5969001149	NCR	NCR
Directional Coupler	488Z	N/A	NCR	NCR
Attenuator	20dB, 100W	N/A	NCR	NCR
Attenuator	3dB, 150W	N/A	NCR	NCR
R&S, universal Radio Communication Tester	CMU200	109 038	2017/7/21	2018/7/21
Wideband Radio Communication Tester	CMW500	1201.0002K50	2017/8/31	2018/8/31
Wireless communication tester	E5515C	MY48367501	2017/12/11	2018/12/11

Report No.: RDG171228009-20

SAR Evaluation Report 15 of 75

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

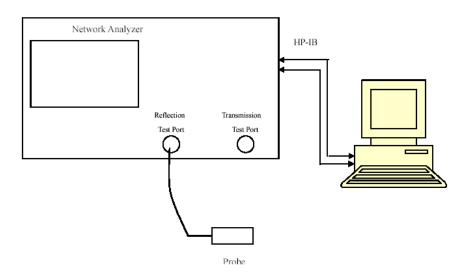

Report No.: RDG171228009-20

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz) Liquid Type	ε _r	O' (S/m)	ε _r	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)	
709	Simulated Tissue 750 MHz Head	43.079	0.883	42.15	0.89	2.2	-0.79	±5
710	Simulated Tissue 750 MHz Head	43.025	0.886	42.15	0.89	2.08	-0.45	±5
711	Simulated Tissue 750 MHz Head	42.013	0.884	42.14	0.89	-0.3	-0.67	±5
750	Simulated Tissue 750 MHz Head	41.381	0.898	41.94	0.89	-1.33	0.9	±5
824.2	Simulated Tissue 750 MHz Head	42.495	0.864	41.56	0.9	2.25	-4	±5
826.4	Simulated Tissue 750 MHz Head	42.451	0.866	41.54	0.9	2.19	-3.78	±5
829	Simulated Tissue 750 MHz Head	42.336	0.875	41.53	0.9	1.94	-2.78	±5
836.5	Simulated Tissue 750 MHz Head	42.313	0.875	41.5	0.9	1.96	-2.78	±5
836.6	Simulated Tissue 750 MHz Head	42.318	0.876	41.5	0.9	1.97	-2.67	±5
844	Simulated Tissue 750 MHz Head	42.252	0.881	41.5	0.91	1.81	-3.19	±5
846.6	Simulated Tissue 750 MHz Head	42.09	0.881	41.5	0.91	1.42	-3.19	±5
848.8	Simulated Tissue 750 MHz Head	42.072	0.885	41.5	0.91	1.38	-2.75	±5

^{*}Liquid Verification above was performed on 2018/02/09.

SAR Evaluation Report 16 of 75

Report No.: RDG171228009-20

^{*}Liquid Verification above was performed on 2018/02/08.

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)			Q		O	A o	ΔO	(%)
		ε _r	(S/m)	E _r	(S/m)	$\Delta \varepsilon_{ m r}$	(S/m)	
1720	Simulated Tissue 1750 MHz Head	41.244	1.327	40.13	1.35	2.78	-1.7	±5
1732.5	Simulated Tissue 1750 MHz Head	41.19	1.343	40.11	1.36	2.69	-1.25	±5
1745	Simulated Tissue 1750 MHz Head	41.087	1.348	40.09	1.37	2.49	-1.61	±5
1750	Simulated Tissue 1750 MHz Head	41.082	1.365	40.08	1.37	2.5	-0.36	±5

^{*}Liquid Verification above was performed on 2018/02/04.

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance	
(MHz)	Liquid Type	ε _r	Q	ε _r	Q	$\Delta arepsilon_{ m r}$	ΔO	(%)	
		•	(S/m)	•	(S/m)	•	(S/m)		
1720	Simulated Tissue 1750 MHz Body	52.822	1.517	53.51	1.47	-1.29	3.2	±5	
1732.5	Simulated Tissue 1750 MHz Body	52.736	1.531	53.48	1.48	-1.39	3.45	±5	
1745	Simulated Tissue 1750 MHz Body	52.695	1.537	53.44	1.49	-1.39	3.15	±5	
1750	Simulated Tissue 1750 MHz Body	52.611	1.55	53.43	1.49	-1.53	4.03	±5	

^{*}Liquid Verification above was performed on 2018/02/05.

SAR Evaluation Report 17 of 75

Frequency	Liquid Tymo	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquid Type	ε _r	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
1850.2	Simulated Tissue 1900 MHz Head	40.727	1.338	40	1.4	1.82	-4.43	±5
1852.4	Simulated Tissue 1900 MHz Head	40.673	1.348	40	1.4	1.68	-3.71	±5
1860	Simulated Tissue 1900 MHz Head	40.588	1.349	40	1.4	1.47	-3.64	±5
1880	Simulated Tissue 1900 MHz Head	40.414	1.373	40	1.4	1.04	-1.93	±5
1900	Simulated Tissue 1900 MHz Head	40.362	1.391	40	1.4	0.91	-0.64	±5
1907.6	Simulated Tissue 1900 MHz Head	40.361	1.393	40	1.4	0.9	-0.5	±5
1909.8	Simulated Tissue 1900 MHz Head	40.34	1.398	40	1.4	0.85	-0.14	±5

Report No.: RDG171228009-20

^{*}Liquid Verification above was performed on 2018/02/05.

Frequency	Liquid Tuno	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquid Type	$\epsilon_{ m r}$	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
1850.2	Simulated Tissue 1900 MHz Body	54.605	1.458	53.3	1.52	2.45	-4.08	±5
1852.4	Simulated Tissue 1900 MHz Body	54.563	1.47	53.3	1.52	2.37	-3.29	±5
1860	Simulated Tissue 1900 MHz Body	54.443	1.465	53.3	1.52	2.14	-3.62	±5
1880	Simulated Tissue 1900 MHz Body	54.144	1.486	53.3	1.52	1.58	-2.24	±5
1900	Simulated Tissue 1900 MHz Body	54.098	1.521	53.3	1.52	1.5	0.07	±5
1907.6	Simulated Tissue 1900 MHz Body	54.092	1.518	53.3	1.52	1.49	-0.13	±5
1909.8	Simulated Tissue 1900 MHz Body	54.045	1.517	53.3	1.52	1.4	-0.2	±5

^{*}Liquid Verification above was performed on 2018/02/05.

Frequency	L:: J T	Liquid Parameter		Target Value		Delta (%)		Tolerance	
(MHz)	Liquid Type	ε _r	O' (S/m)	ε _r	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)	
2450	Simulated Tissue 2450 MHz Head	40.113	1.764	39.2	1.8	2.33	-2	±5	
2510	Simulated Tissue 2450 MHz Head	40.076	1.819	39.12	1.87	2.44	-2.73	±5	
2535	Simulated Tissue 2450 MHz Head	39.012	1.904	39.09	1.89	-0.2	0.74	±5	
2560	Simulated Tissue 2600 MHz Head	38.859	1.925	39.06	1.92	-0.51	0.26	±5	
2600	Simulated Tissue 2600 MHz Head	37.967	1.954	39.01	1.96	-2.67	-0.31	±5	

^{*}Liquid Verification above was performed on 2018/02/07.

Frequency	I :: d T	Liquid Parameter		Target Value		Delta (%)		Tolerance
(MHz)	Liquid Type	ε _r	O' (S/m)	$\epsilon_{ m r}$	O' (S/m)	$\Delta \epsilon_{ m r}$	ΔΟ΄ (S/m)	(%)
2450	Simulated Tissue 2450 MHz Body	54.25	1.937	52.7	1.95	2.94	-0.67	±5
2510	Simulated Tissue 2450 MHz Body	54.241	1.967	52.62	2.04	3.08	-3.58	±5
2535	Simulated Tissue 2450 MHz Body	52.675	2.108	52.59	2.07	0.16	1.84	±5
2560	Simulated Tissue 2600 MHz Body	51.312	2.141	52.56	2.11	-2.37	1.47	±5
2600	Simulated Tissue 2600 MHz Body	52.494	2.128	52.51	2.16	-0.03	-1.48	±5

^{*}Liquid Verification above was performed on 2018/02/07.

SAR Evaluation Report 18 of 75

System Accuracy Verification


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

Report No.: RDG171228009-20

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- a) $s = 15 \text{ mm} \pm 0.2 \text{ mm for } 300 \text{ MHz} \le f \le 1000 \text{ MHz};$
- b) $s = 10 \text{ mm} \pm 0.2 \text{ mm for } 1000 \text{ MHz} < f \le 3000 \text{ MHz};$
- c) $s = 10 \text{ mm} \pm 0.2 \text{ mm}$ for 3 000 MHz $< f \le 6$ 000 MHz.

System Verification Setup Block Diagram

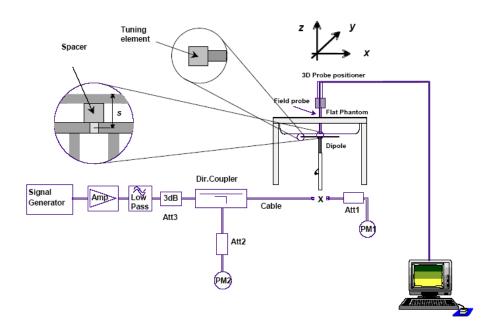

System Accuracy Check Results

Date	Frequenc y Band	Liquid Type	Input Power (mW)	S	asured SAR V/kg)	Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2018/02/09	750 MHz	750MHz Head	100	1g	0.865	8.65	8.23	5.1	±10
2018/02/08	750 MHz	750MHz Body	100	1g	0.883	8.83	8.58	2.91	±10
2018/02/04	1750 MHz	1750MHz Head	100	1g	3.85	38.5	36.8	4.62	±10
2018/02/05	1750 MHz	1750MHz Body	100	1g	3.93	39.3	37.4	5.08	±10
2018/02/05	1900 MHz	1900MHz Head	100	1g	4.24	42.4	40.3	5.21	±10
2018/02/04	1900 MHz	1900MHz Body	100	1g	4.19	41.9	41.1	1.95	±10
2018/02/07	2450 MHz	2450MHz Head	100	1g	5.29	52.9	53.3	-0.75	±10
2018/02/07	2450 MHz	2450MHz Body	100	1g	5.32	53.2	50.6	5.14	±10
2018/02/07	2600 MHz	2600MHz Body	100	1g	5.69	56.9	53.9	5.57	±10

^{*}The SAR values above are normalized to 1 Watt forward power.

SAR Evaluation Report 19 of 75

SAR SYSTEM VALIDATION DATA

System Performance 750 MHz Head

DUT: D750V3; Type: 750 MHz; Serial: 1167

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 750 MHz; $\sigma = 0.898 \text{ S/m}$; $\varepsilon_r = 41.381$; $\rho = 1000 \text{ kg/m}^3$

Report No.: RDG171228009-20

Phantom section: Flat Section

DASY5 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn772; Calibrated: 2017/10/9

Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.33 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.96 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.563 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

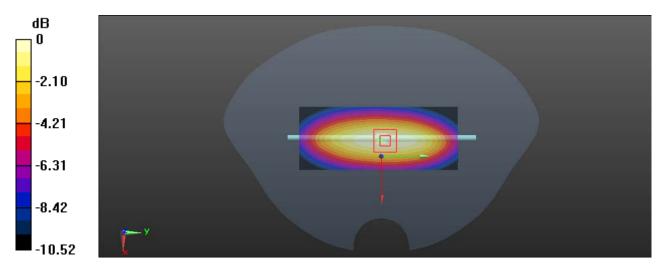

0 dB = 1.37 W/kg = 1.37 dBW/kg

SAR Evaluation Report 20 of 75

System Performance 750 MHz Body

DUT: D750V3; Type: 750 MHz; Serial: 1167

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 750 MHz; $\sigma = 0.968$ S/m; $\varepsilon_r = 53.106$; $\rho = 1000$ kg/m³

Report No.: RDG171228009-20

Phantom section: Right Section

DASY5 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn772; Calibrated: 2017/10/9

Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.96 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.883 W/kg; SAR(10 g) = 0.576 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

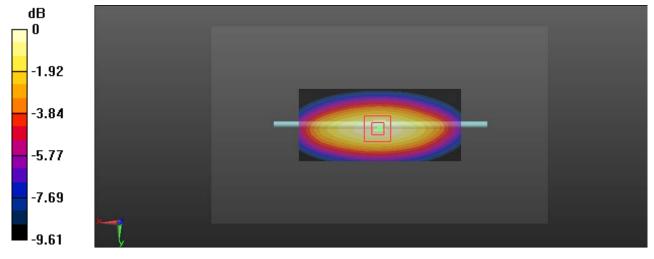

0 dB = 1.27 W/kg = 1.04 dBW/kg

SAR Evaluation Report 21 of 75

System Performance 1750 MHz Head

DUT: D1750V2; Type: 1750 MHz; Serial: 1141

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1750 MHz; $\sigma = 1.365 \text{ S/m}$; $\varepsilon_r = 41.082$; $\rho = 1000 \text{ kg/m}^3$

Report No.: RDG171228009-20

Phantom section: Flat Section

DASY5 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn772; Calibrated: 2017/10/9

• Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 6.11 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.97 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.85 W/kg

SAR(1 g) = 3.85 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 5.76 W/kg

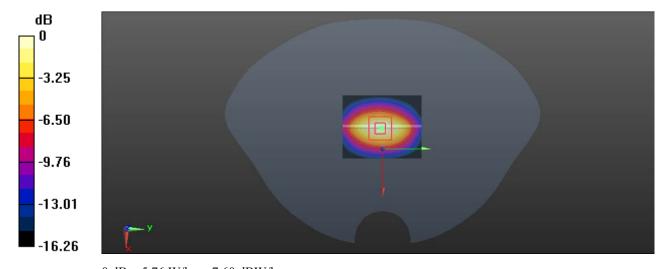

0 dB = 5.76 W/kg = 7.60 dBW/kg

SAR Evaluation Report 22 of 75

System Performance 1750 MHz Body

DUT: D1750V2; Type: 1750 MHz; Serial: 1141

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1750 MHz; $\sigma = 1.55$ S/m; $\varepsilon_r = 52.611$; $\rho = 1000$ kg/m³

Report No.: RDG171228009-20

Phantom section: Left Section

DASY5 Configuration:

Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn772; Calibrated: 2017/10/9

Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 6.57 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.21 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 7.45 W/kg

SAR(1 g) = 3.93 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 6.13 W/kg

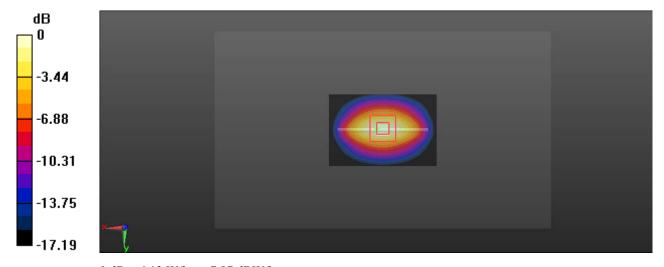

0 dB = 6.13 W/kg = 7.87 dBW/kg

SAR Evaluation Report 23 of 75

System Performance 1900 MHz Head

DUT: D1900V2; Type: 1900 MHz; Serial: 543

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz; $\sigma = 1.391$ S/m; $\varepsilon_r = 40.362$; $\rho = 1000$ kg/m³

Report No.: RDG171228009-20

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn772; Calibrated: 2017/10/9

• Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 6.98 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.85 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 7.86 W/kg

SAR(1 g) = 4.24 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 6.42 W/kg

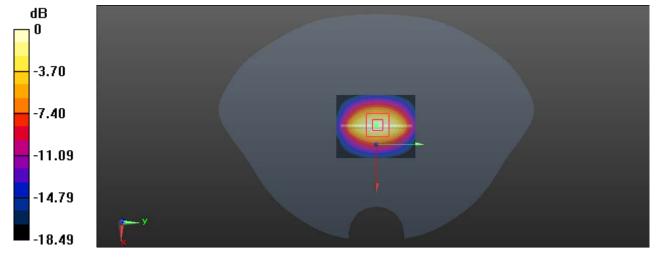

0 dB = 6.42 W/kg = 8.08 dBW/kg

SAR Evaluation Report 24 of 75

System Performance 1900 MHz Body

DUT: D1900V2; Type: 1900 MHz; Serial: 543

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz; $\sigma = 1.521 \text{ S/m}$; $\varepsilon_r = 54.098$; $\rho = 1000 \text{ kg/m}^3$

Report No.: RDG171228009-20

Phantom section: Left Section

DASY5 Configuration:

Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn772; Calibrated: 2017/10/9

Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.24 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.83 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 8.17 W/kg

SAR(1 g) = 4.19 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 7.05 W/kg

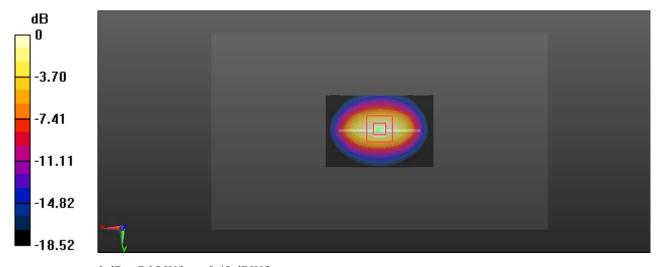

0 dB = 7.05 W/kg = 8.48 dBW/kg

SAR Evaluation Report 25 of 75

System Performance 2450MHz Head

DUT: D2450V2; Type: 2450 MHz; Serial: 971

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.764 \text{ S/m}$; $\varepsilon_r = 40.113$; $\rho = 1000 \text{ kg/m}^3$

Report No.: RDG171228009-20

Phantom section: Flat Section

D ASY5 Configuration:

Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn772; Calibrated: 2017/10/9

Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (51x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.59 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.47 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 5.29 W/kg; SAR(10 g) = 2.46 W/kg

Maximum value of SAR (measured) = 8.63 W/kg

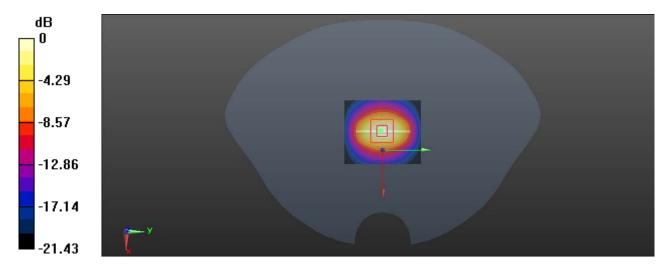

0 dB = 8.63 W/kg = 9.36 dBW/kg

SAR Evaluation Report 26 of 75

System Performance 2450MHz Body

DUT: D2450V2; Type: 2450 MHz; Serial: 971

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.937 \text{ S/m}$; $\varepsilon_r = 54.25$; $\rho = 1000 \text{ kg/m}^3$

Report No.: RDG171228009-20

Phantom section: Center Section

D ASY5 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn772; Calibrated: 2017/10/9

• Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.54 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 55.62 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.32 W/kg; SAR(10 g) = 2.39 W/kg

Maximum value of SAR (measured) = 9.22 W/kg

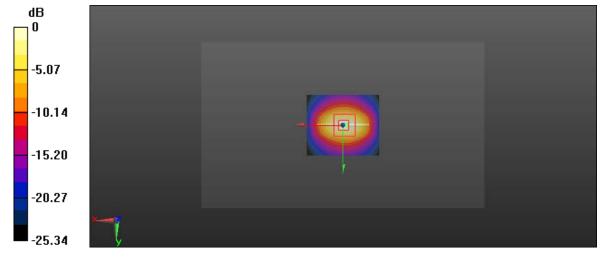

0 dB = 9.22 W/kg = 9.65 dBW/kg

SAR Evaluation Report 27 of 75

System Performance 2600 MHz Body

DUT: D2600V2; Type: 2600 MHz; Serial: 1132

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2600 MHz; $\sigma = 2.128 \text{ S/m}$; $\varepsilon_r = 52.494$; $\rho = 1000 \text{ kg/m}^3$

Report No.: RDG171228009-20

Phantom section: Center Section

DASY5 Configuration:

Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;

• Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn772; Calibrated: 2017/10/9

Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130

• Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.4 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.12 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 13.2 W/kg

SAR(1 g) = 5.69 W/kg; SAR(10 g) = 2.56 W/kg

Maximum value of SAR (measured) = 9.82 W/kg

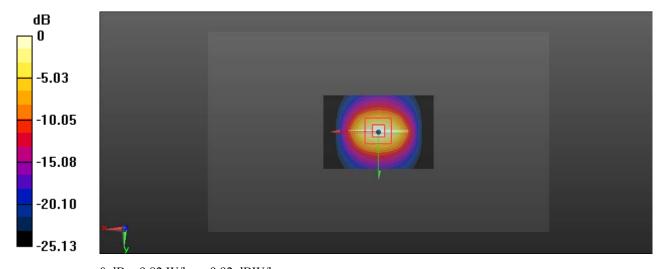

0 dB = 9.82 W/kg = 9.92 dBW/kg


SAR Evaluation Report 28 of 75


EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

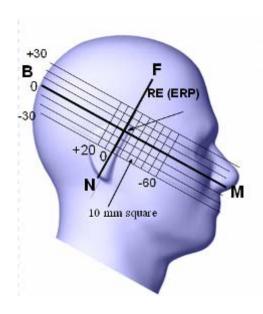

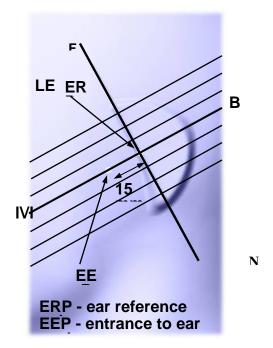

Report No.: RDG171228009-20

SAR Evaluation Report 29 of 75

Cheek/Touch Position

The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line for the SCC-34/SC-2 head phantom.

This test position is established:


When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

Report No.: RDG171228009-20

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek / Touch Position

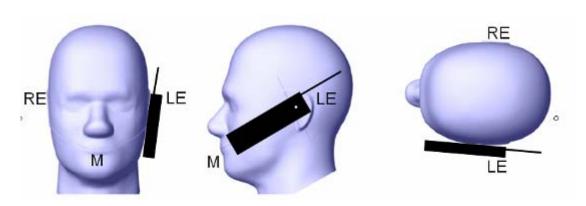

Ear/Tilt Position

With the handset aligned in the "Cheek/Touch Position":


- 1) If the earpiece of the handset is not in full contact with the phantom's ear spacer (in the "Cheek/Touch position") and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- 2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both "ear reference points" (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the "test device reference point" until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the "Cheek/Touch" and "Ear/Tilt" positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

SAR Evaluation Report 30 of 75

Ear /Tilt 15° Position

Report No.: RDG171228009-20

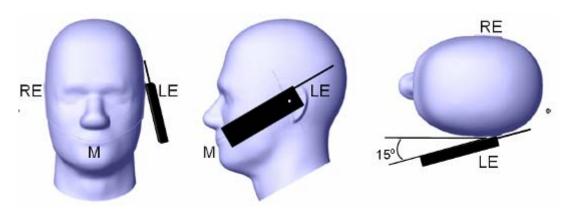

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

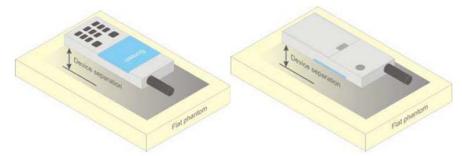


Figure 5 - Test positions for body-worn devices

Test Distance for SAR Evaluation

For this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

SAR Evaluation Report 31 of 75

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Report No.: RDG171228009-20

- Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.
- Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
 - 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

SAR Evaluation Report 32 of 75

CONDUCTED OUTPUT POWER MEASUREMENT


Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through Combiner.

Report No.: RDG171228009-20

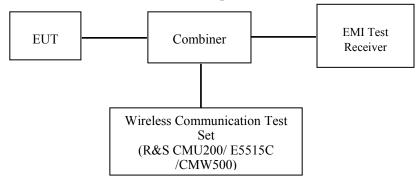

GSM/WCDMA/LTE

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

- > Slot configuration > Uplink/Gamma
- > 33 dBm for GPRS 850
- > 30 dBm for GPRS 1900
- > 27 dBm for EGPRS 850
- > 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stabe)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

SAR Evaluation Report 33 of 75

Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

Report No.: RDG171228009-20

	Loopback Mode	Test Mode 1				
WCDMA	Rel99 RMC	12.2kbps RMC				
General Settings	Power Control Algorithm	Algorithm2				
	β_c/β_d	8/15				

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA				
	Subset	1	2	3	4				
	Loopback Mode			Test Mode	1				
	Rel99 RMC			12.2kbps RM	IC				
	HSDPA FRC			H-Set1					
WCDMA	Power Control Algorithm		Algorithm2						
General	$\beta_{\rm c}$	2/15	12/15	15/15	15/15				
Settings	β_{d}	15/15	15/15	8/15	4/15				
	$\beta_d(SF)$	64							
	β_c/β_d	2/15	12/15	15/8	15/4				
	$eta_{ m hs}$	4/15	24/15	30/15	30/15				
	MPR(dB)	0	0	0.5	0.5				
	DACK			8					
	DNAK			8					
HSDPA	DCQI			8					
Specific	Ack-Nack repetition factor			3					
Settings	CQI Feedback			4ms					
	CQI Repetition Factor			2					
	Ahs=βhs/ βc			30/15					

SAR Evaluation Report 34 of 75

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

Report No.: RDG171228009-20

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA				
	Subset	1	2	3	4	5				
	Loopback Mode		1	Test Mode 1						
	Rel99 RMC		1.	2.2kbps RM	C					
	HSDPA FRC			H-Set1						
	HSUPA Test	HSUPA Loopback								
	Power Control			Algorithm2						
WCDMA	Algorithm	11/15	C/15		2/15	15/15				
General	β_{c}	11/15 15/15	6/15 15/15	15/15 9/15	2/15 15/15	15/15				
Settings	β_d					0				
	$\beta_{\rm ec}$	209/225	12/15	30/15	2/15	5/15				
	$\beta_{\rm c}/\beta_{\rm d}$	11/15	6/15	15/9	2/15	- 5/15				
	β_{hs}	22/15	12/15	30/15	4/15	5/15				
	CM(dB)	1.0	3.0	2.0	3.0	1.0				
	MPR(dB)	0	2	8	2	0				
	DACK DNAK			8						
				8						
HSDPA	DCQI Ack-Nack			8						
Specific	repetition factor			3						
Settings	CQI Feedback			4ms						
Settings	CQI recuback CQI Repetition									
	Factor			2						
	Ahs= β_{hs}/β_{c}			30/15						
	DE-DPCCH	6	8	8	5	7				
	DHARQ	0	0	0	0	0				
	AG Index	20	12	15	17	21				
	ETFCI	75	67	92	71	81				
	Associated Max			402.0						
	UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9				
HSUPA Specific Settings	Reference E_FCls	E-TFC E-TFC E-TFC E-TFC E-TFC E-TFC E-TFC	I PO 4 CI 67 I PO 18 CI 71 I PO23 CI 75 I PO26 CI 81	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFC E-TFC E-TFC E-TFC E-TFC E-TFC E-TFC	II PO23 CI 75 II PO26				

SAR Evaluation Report 35 of 75

HSPA+

Sub- test	β _c (Note3)	β _d	β _{HS} (Note1)	β _{ec}	β _{ed} (2xSF2) (Note 4)	β _{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β _{ed} 1: 30/15 β _{ed} 2: 30/15	β _{ed} 3: 24/15 β _{ed} 4: 24/15	3.5	2.5	14	105	105

Report No.: RDG171228009-20

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{he} = 30/15 * \beta_{e}$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces	6
	ses	0
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK

Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical

parameters as listed in the table.

Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

SAR Evaluation Report 36 of 75

LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Report No.: RDG171228009-20

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Cha	Channel bandwidth / Transmission bandwidth (N _{RB})							
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz			
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1		
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1		
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2		

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
			3	>5	≤ 1
		2 4 40 22 25	5	>6	≤1
NS_03	6.6.2.2.1	2, 4,10, 23, 25, 35, 36	10	>6	≤1
		33, 30	15	>8	≤1
			20	>10	≤1
NS_04	6.6.2.2.2	41	5	>6	≤1
_		7	10, 15, 20		6.2.4-4
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤3
NS_09	6.6.3.3.4	21	10, 15	> 40 > 55	≤1 ≤2
NS_10		20	15, 20	Table	6.2.4-3
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table	6.2.4-5
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table	6.2.4-6
NS_13	6.6.3.3.6	26	5	Table	6.2.4-7
NS_14	6.6.3.3.7	26	10, 15	Table	6.2.4-8
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	I	6.2.4-9 6.2.4-10
NS_16	6.6.3.3.9	27	3, 5, 10		Table 6.2.4-12, 6.2.4-13
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5 10, 15, 20	≥2 ≥1	≤ 1 ≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table	6.2.4-14
NS_20	6.2.2 6.6.2.2.1 6.6.3.2	23	5, 10, 15, 20		6.2.4-15
NS_32	-	-	-	-	-

SAR Evaluation Report 37 of 75

Maximum Target Output Power

Max Target Power(dBm)							
14 1 /5		Channel					
Mode/Band	Low	Middle	High				
GSM 850	32.2	32.2	32.2				
GPRS 1 TX Slot	32.2	32.2	32.2				
GPRS 2 TX Slot	31.3	31.3	31.3				
GPRS 3 TX Slot	29.7	29.7	29.7				
GPRS 4 TX Slot	28.5	28.5	28.5				
EDGE 1 TX Slot	26.5	26.5	26.5				
EDGE 2 TX Slot	25.7	25.7	25.7				
EDGE 3 TX Slot	23.7	23.7	23.7				
EDGE 4 TX Slot	23.1	23.1	23.1				
PCS 1900	29.4	29.4	29.4				
GPRS 1 TX Slot	29.6	29.6	29.6				
GPRS 2 TX Slot	28.9	28.9	28.9				
GPRS 3 TX Slot	27.2	27.2	27.2				
GPRS 4 TX Slot	26.1	26.1	26.1				
EDGE 1 TX Slot	26.3	26.3	26.3				
EDGE 2 TX Slot	25.2	25.2	25.2				
EDGE 3 TX Slot	22.9	22.9	22.9				
EDGE 4 TX Slot	21.6	21.6	21.6				
WCDMA Band 2	22.8	22.8	22.8				
HSDPA	21.7	21.7	21.7				
HSUPA	21.7	21.7	21.7				
DC-HSDPA	21.8	21.8	21.8				
HSPA+	21.8	21.8	21.8				
WCDMA Band 5	22.8	22.8	22.8				
HSDPA	21.8	21.8	21.8				
HSUPA	22	22	22				
DC-HSDPA	21.9	21.9	21.9				
HSPA+	21.7	21.7	21.7				
LTE Band 2	22.3	22.3	22.3				
LTE Band 4	22.9	22.9	22.9				
LTE Band 5	23	23	23				
LTE Band 7	22.5	22.5	22.5				
LTE Band 17	23.2	23.2	23.2				
WLAN(802.11b)	9.5	9.5	9.5				
WLAN(802.11g)	9.5	9.5	9.5				
WLAN(802.11n HT20)	9.5	9.5	9.5				
WLAN(802.11n HT40)	9.5	9.5	9.5				
Bluetooth BDR/EDR	4.1	4.1	4.1				
Bluetooth LE	4.1	4.1	4.1				

Report No.: RDG171228009-20

SAR Evaluation Report 38 of 75

Test Results:

GSM:

Band	Channel No.	Frequency	RF Output Power
Danu	Channel No.	(MHz)	(dBm)
	128	824.2	32.06
GSM 850	190	836.6	31.91
	251	848.8	31.70
	512	1850.2	29.29
PCS 1900	661	1880	29.15
	810	1909.8	28.86

Report No.: RDG171228009-20

GPRS:

Band	Channel Frequency		RF Output Power (dBm)				
Danu	No.	(MHz)	1 slot	2 slots	3 slots	4 slots	
	128	824.2	32.14	31.20	29.61	28.43	
GSM 850	190	836.6	31.93	31.05	29.26	28.07	
	251	848.8	31.84	30.92	29.13	28.04	
	512	1850.2	29.53	28.79	27.10	26.03	
PCS 1900	661	1880	29.36	28.53	26.90	25.83	
	810	1909.8	29.03	28.29	26.47	25.56	

EDGE:

Band	Channel Frequency		RF Output Power (dBm)				
Danu	No.	(MHz)	1 slot	2 slots	3 slots	4 slots	
	128	824.2	26.37	25.62	23.63	22.96	
GSM 850	190	836.6	26.09	25.30	23.26	22.45	
	251	848.8	25.56	24.73	23.08	22.08	
	512	1850.2	25.55	24.32	22.08	20.92	
PCS 1900	661	1880	26.15	24.79	22.69	21.35	
	810	1909.8	26.24	25.07	22.78	21.52	

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

SAR Evaluation Report 39 of 75

The time based average power for GPRS

Report No.: RDG171228009-20

Dand	Channel Frequency		Time based average Power (dBm)				
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots	
	128	824.2	23.14	25.2	25.36	25.43	
GSM 850	190	836.6	22.93	25.05	25.01	25.07	
	251	848.8	22.84	24.92	24.88	25.04	
	512	1850.2	20.53	22.79	22.85	23.03	
PCS 1900	661	1880	20.36	22.53	22.65	22.83	
	810	1909.8	20.03	22.29	22.22	22.56	

The time based average power for EDGE

D I	Channel	Channel Frequency		Time based average Power (dBm)				
Band	No.	(MHz)	1 slot	2 slot	3 slots	4 slots		
	128	824.2	17.37	19.62	19.38	19.96		
GSM 850	190	836.6	17.09	19.3	19.01	19.45		
	251	848.8	16.56	18.73	18.83	19.08		
	512	1850.2	16.55	18.32	17.83	17.92		
PCS 1900	661	1880	17.15	18.79	18.44	18.35		
	810	1909.8	17.24	19.07	18.53	18.52		

Note:

- 1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
- 2 .For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
- 3 .For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
- 4. According to KDB941225D01-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode.

SAR Evaluation Report 40 of 75

WCDMA:

Results (12.2kbps RMC)

Band	Frequency (MHz)	RF Output Power (dBm)
WCDMA Band 2	1852.4	22.66
	1880	22.57
	1907.6	22.65
	826.4	22.67
WCDMA Band 5	836.6	22.61
	846.6	22.50

Report No.: RDG171228009-20

Results (HSDPA)

Dand	Frequency				
Band	(MHz)	Subset 1	Subset 2	Subset 3	Subset 4
WCDMA Band 2	1852.4	21.59	21.32	21.64	21.51
	1880	21.43	21.34	21.55	21.29
	1907.6	21.40	21.46	21.32	21.35
	826.4	21.74	21.62	21.68	21.58
WCDMA Band 5	836.6	21.50	21.65	21.38	21.32
	846.6	21.52	21.38	21.52	21.42

Results (HSUPA)

Dand	Frequency		RF Output Power (dBm)				
Band	(MHz)	Subset 1	Subset 2	Subset 3	Subset 4	Subset 5	
WCDMA Band 2	1852.4	21.39	21.48	21.58	21.59	21.22	
	1880	21.41	21.32	21.40	21.26	21.57	
	1907.6	21.39	21.32	21.34	21.57	21.49	
	826.4	21.65	21.62	21.49	21.88	21.67	
WCDMA Band 5	836.6	21.57	21.68	21.65	21.57	21.49	
	846.6	21.48	21.56	21.55	21.42	21.49	

SAR Evaluation Report 41 of 75

Results (DC-HSDPA):

n i	Frequency	RF Output Power (dBm)					
Band	(MHz)	Subset 1	Subset 2	Subset 3	Subset 4		
	1852.4	21.51	21.46	21.61	21.60		
WCDMA Band 2	1880	21.67	21.44	21.50	21.41		
	1907.6	21.45	21.27	21.19	21.32		
	826.4	21.77	21.53	21.72	21.56		
WCDMA Band 5	836.6	21.41	21.50	21.51	21.53		
	846.6	21.66	21.60	21.49	21.52		

Report No.: RDG171228009-20

Results (HSPA+)

Band	Frequency (MHz)	RF Output Power (dBm)
WCDMA Band 2	1852.4	21.41
	1880	21.68
	1907.6	21.33
	826.4	21.54
WCDMA Band 5	836.6	21.50
	846.6	21.55

Note:

- 1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
- 2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+/DC-HSDPA when the maximum average output of each RF channel is less than $\frac{1}{4}$ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

SAR Evaluation Report 42 of 75

LTE Band 2:

		Resource			Low	Middle	High
Test	Test	Block &	Target	Meas	Channel	Channel	Channel
Bandwidth	Modulation	RB offset	MPR	MPR	(dBm)	(dBm)	(dBm)
		1#0	0	0	21.85	22.03	21.49
		1#3	0	0	22.01	22.03	21.49
		1#5	0	0	22.16	21.99	21.17
	QPSK	3#0	1	1	22.05	22.05	21.17
		3#3	1	1	22.06	22.08	21.13
		6#0	1	1	21.21	20.97	20.3
1.4M		1#0	1	1	21.14	21.18	20.42
		1#3	1	1	21.12	21.15	20.35
		1#5	1	1	21.12	21.13	20.56
	16-QAM	3#0	2	2	21.03	20.85	20.38
		3#3	2	2	21.03	20.98	20.27
		6#0	2	2	20.26	20.36	19.26
		1#0	0	0	21.65	21.39	21.46
		1#7	0	0	21.53	21.26	21.12
		1#14	0	0	21.65	21.29	20.82
	QPSK	8#0	1	1	20.58	20.23	20.06
		8#7	1	1	20.58	20.25	20.03
		15#0	1	1	20.62	20.27	20.11
3M		1#0	1	1	20.81	20.19	20.53
		1#7	1	1	20.74	20.23	20.25
		1#14	1	1	20.81	20.16	19.97
	16-QAM	8#0	2	2	19.73	19.24	19.25
		8#7	2	2	19.89	19.3	19.19
		15#0	2	2	19.71	19.4	19.23
		1#0	0	0	21.96	21.47	21.75
		1#12	0	0	21.47	21.11	20.83
	0.0011	1#24	0	0	21.91	21.32	20.9
	QPSK	12#0	1	1	20.83	20.16	20.26
		12#11	1	1	20.91	20.03	19.23
		25#0	1	1	21.11	20.06	20.13
5M		1#0	1	1	21.16	20.61	20.67
		1#12	1	1	20.66	20.13	19.91
	16.0435	1#24	1	1	21.06	20.48	19.82
	16-QAM	12#0	2	2	19.61	19.16	19.09
		12#11	2	2	19.57	19.12	18.79
		25#0	2	2	19.67	19.14	19.11

Report No.: RDG171228009-20

SAR Evaluation Report 43 of 75

_	_	Resource			Low	Middle	High
Test	Test	Block &	Target	Meas	Channel	Channel	Channel
Bandwidth	Modulation	RB offset	MPR	MPR	(dBm)	(dBm)	(dBm)
		1#0	0	0	21.18	20.62	20.85
		1#24	0	0	21.3	20.79	21.12
	0.0011	1#49	0	0	20.92	20.48	20.12
	QPSK	25#0	1	1	20.37	19.98	20.17
		25#24	1	1	20.36	19.74	19.8
1014		50#0	1	1	20.46	19.93	20.21
10M		1#0	1	1	20.34	19.56	20.04
		1#24	1	1	20.5	19.75	20.16
	160436	1#49	1	1	20.15	19.52	19.38
	16-QAM	25#0	2	2	19.41	18.94	19.11
		25#24	2	2	19.25	19.04	18.78
		50#0	2	2	19.45	19.04	19.04
		1#0	0	0	21.37	21.03	20.77
		1#37	0	0	21.15	20.78	20.93
	OPGH	1#74	0	0	21.28	20.72	20.36
	QPSK	36#0	1	1	20.63	19.95	20.01
		36#35	1	1	20.32	19.64	19.9
1514		75#0	1	1	20.63	19.78	19.87
15M		1#0	1	1	20.5	19.88	19.97
		1#37	1	1	20.3	19.74	20.21
	16 OAM	1#74	1	1	20.33	19.65	19.68
	16-QAM	36#0	2	2	19.4	18.9	18.99
		36#35	2	2	19.4	18.76	18.83
		75#0	2	2	19.44	19.01	18.98
		1#0	0	0	21.94	21.71	21.63
		1#49	0	0	21.1	20.71	20.4
	QPSK	1#99	0	0	20.64	20.43	20.79
	QPSK	50#0	1	1	21.05	21.36	20.97
		50#49	1	1	20.17	19.6	19.93
20M		100#0	1	1	20.2	19.62	19.94
ZUIVI		1#0	1	1	20.56	20.05	19.97
		1#49	1	1	20.46	19.7	19.73
	16 OAM	1#99	1	1	19.87	19.63	19.38
	16-QAM	50#0	2	2	19.27	18.99	18.67
		50#49	2	2	19.09	18.75	18.79
		100#0	2	2	19.23	18.81	18.73

SAR Evaluation Report 44 of 75

LTE Band 4:

		Resource			Low	Middle	High
Test	Test	Block &	Target MPR	Meas MPR	Channel	Channel	Channel
Bandwidth	Modulation	RB offset	MIFK	MIFK	(dBm)	(dBm)	(dBm)
		1#0	0	0	22.21	22.49	22.23
		1#3	0	0	22.74	22.56	22.28
	ODGIZ	1#5	0	0	22.84	22.59	22.62
	QPSK	3#0	1	1	22.62	22.76	22.51
		3#3	1	1	22.79	22.64	22.52
1 43 4		6#0	1	1	21.71	21.94	21.62
1.4M		1#0	1	1	21.59	22.33	21.64
		1#3	1	1	21.69	22.11	21.54
	16 OAM	1#5	1	1	21.77	22.17	21.8
	16-QAM	3#0	2	2	21.64	21.87	21.49
		3#3	2	2	21.7	21.87	21.5
		6#0	2	2	20.92	20.98	20.58
		1#0	0	0	22.39	22.1	22.26
		1#7	0	0	22.48	21.83	22.34
	ODGIZ	1#14	0	0	22.51	21.69	22.38
	QPSK	8#0	1	1	21.75	21.27	21.53
		8#7	1	1	21.68	20.87	21.52
3M		15#0	1	1	21.86	21.13	21.51
3M		1#0	1	1	22.3	21.56	21.65
		1#7	1	1	22.03	21.16	21.67
	16 OAM	1#14	1	1	22.03	21.04	21.68
	16-QAM	8#0	2	2	21	20.36	20.64
		8#7	2	2	20.96	20.27	20.71
		15#0	2	2	20.97	20.27	20.72
		1#0	0	0	22.49	22.24	22.37
		1#12	0	0	22.11	21.47	22.05
	QPSK	1#24	0	0	22.5	21.96	22.34
	QPSK	12#0	1	1	21.16	20.8	20.99
		12#11	1	1	21.08	20.42	21.14
51.1		25#0	1	1	21.13	20.39	20.98
5M		1#0	1	1	21.72	21.25	21.75
		1#12	1	1	21.21	20.53	21.61
	16 OAM	1#24	1	1	21.77	20.91	21.33
	16-QAM	12#0	2	2	20.34	19.87	20.39
		12#11	2	2	20.3	19.59	20.35
		25#0	2	2	20.35	19.95	20.47

Report No.: RDG171228009-20

SAR Evaluation Report 45 of 75

		Resource			Low	Middle	High
Test	Test	Block &	Target	Meas	Channel	Channel	Channel
Bandwidth	Modulation	RB offset	MPR	MPR	(dBm)	(dBm)	(dBm)
		1#0	0	0	22.17	21.83	21.3
		1#24	0	0	22.36	21.63	21.61
	ODGIZ	1#49	0	0	22.12	21.32	21.47
	QPSK	25#0	1	1	21.56	20.88	20.62
		25#24	1	1	21.46	20.6	20.84
1014		50#0	1	1	21.7	20.69	20.96
10M		1#0	1	1	21.23	20.8	20.61
		1#24	1	1	21.41	20.45	20.9
	16 0 4 3 4	1#49	1	1	21.23	20.22	20.69
	16-QAM	25#0	2	2	20.48	19.78	19.86
		25#24	2	2	20.35	19.61	19.8
		50#0	2	2	20.46	19.44	19.79
		1#0	0	0	22.2	22.19	21.5
		1#37	0	0	22.27	21.21	21.62
	ODGIZ	1#74	0	0	21.66	21.38	21.91
	QPSK	36#0	1	1	21.51	20.78	20.71
		36#35	1	1	21.19	20.36	20.89
1514		75#0	1	1	21.45	20.64	20.85
15M		1#0	1	1	21.55	21.25	20.83
		1#37	1	1	21.77	20.39	21.12
	16 OAM	1#74	1	1	21.12	20.48	21.53
	16-QAM	36#0	2	2	20.75	20.1	20.17
		36#35	2	2	20.33	19.58	20.28
		75#0	2	2	20.75	20.08	20.12
		1#0	0	0	22.59	22.4	21.62
		1#49	0	0	22.73	22.58	22.76
	ODCK	1#99	0	0	21.95	21.47	21.98
	QPSK	50#0	1	1	21.74	22.02	21.88
		50#49	1	1	21.94	21.04	20.97
2014		100#0	1	1	21.62	22.03	20.8
20M		1#0	1	1	21.91	21.75	20.91
		1#49	1	1	21.89	20.57	20.96
	16 OAM	1#99	1	1	20.97	20.6	21.12
	16-QAM	50#0	2	2	21.21	20.32	19.75
		50#49	2	2	20.44	19.96	19.85
		100#0	2	2	20.89	20.26	19.91

SAR Evaluation Report 46 of 75

LTE Band 5:

		Resource			Low	Middle	High
Test	Test	Block &	Target	Meas	Channel	Channel	Channel
Bandwidth	Modulation	RB offset	MPR	MPR	(dBm)	(dBm)	(dBm)
		1#0	0	0	22.39	22.37	22.41
		1#3	0	0	22.47	22.44	22.52
		1#5	0	0	22.4	22.3	22.32
	QPSK	3#0	1	1	22.5	22.8	22.33
		3#3	1	1	22.43	22.52	22.33
		6#0	1	1	21.31	21.42	21.42
1.4M		1#0	1	1	21.3	21.55	21.33
		1#3	1	1	21.33	21.57	21.46
	160435	1#5	1	1	21.33	21.41	21.36
	16-QAM	3#0	2	2	21.18	21.37	21.33
		3#3	2	2	21.16	21.37	21.34
		6#0	2	2	20.36	20.53	20.26
		1#0	0	0	22.38	22.43	22.38
		1#7	0	0	22.46	22.48	22.37
	ODGIZ	1#14	0	0	22.4	22.35	22.25
	QPSK	8#0	1	1	21.3	21.44	21.36
		8#7	1	1	21.47	21.51	21.43
23.4		15#0	1	1	21.44	21.37	21.39
3M		1#0	1	1	21.52	21.17	21.39
		1#7	1	1	21.38	21.34	21.34
	16 OAM	1#14	1	1	21.37	21.28	21.37
	16-QAM	8#0	2	2	20.49	20.42	20.51
		8#7	2	2	20.42	20.31	20.43
		15#0	2	2	20.38	20.34	20.32
		1#0	0	0	22.53	22.45	22.37
		1#12	0	0	22.44	22.54	22.43
	ODCK	1#24	0	0	22.44	22.41	22.32
	QPSK	12#0	1	1	21.48	21.31	21.39
		12#11	1	1	21.44	21.29	21.44
514		25#0	1	1	21.38	21.26	21.39
5M		1#0	1	1	21.45	21.48	21.69
		1#12	1	1	21.34	21.48	21.58
	16 OAM	1#24	1	1	21.34	21.35	21.45
	16-QAM	12#0	2	2	20.26	20.46	20.42
		12#11	2	2	20.38	20.28	20.35
		25#0	2	2	20.39	20.34	20.41

SAR Evaluation Report 47 of 75

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		1#0	0	0	22.51	22.39	22.46
	1#24	0	0	22.37	22.33	22.35	
	QPSK	1#49	0	0	22.54	22.51	22.44
	QPSK	25#0	1	1	21.95	22.13	21.83
		25#24	1	1	21.42	21.89	21.37
1014		50#0	1	1	21.4	21.35	21.36
10M		1#0	1	1	21.49	21.2	21.54
		1#24	1	1	21.64	21.23	21.46
	16 OAM	1#49	1	1	21.67	21.26	21.49
16	16-QAM	25#0	2	2	20.55	20.51	20.4
		25#24	2	2	20.41	20.41	20.39
		50#0	2	2	20.52	20.48	20.45

SAR Evaluation Report 48 of 75

LTE Band 7:

		Resource			Low	Middle	High
Test	Test	Block &	Target	Meas	Channel	Channel	Channel
Bandwidth	Modulation	RB offset	MPR	MPR	(dBm)	(dBm)	(dBm)
		1#0	0	0	22.32	22.19	22.06
		1#12	0	0	22.23	22.12	21.99
	ODGIZ	1#24	0	0	22.15	22.04	22.03
	QPSK	12#0	1	1	21.22	21.23	20.87
		12#11	1	1	21.08	21.13	20.98
73.4		25#0	1	1	21.09	21.17	21.01
5M		1#0	1	1	21.09	21.08	21.09
		1#12	1	1	21.16	21.06	21.21
	16 0 4 3 4	1#24	1	1	21.17	20.96	21.2
	16-QAM	12#0	2	2	20.11	19.94	19.84
		12#11	2	2	20.11	19.91	19.95
		25#0	2	2	20.11	20.09	19.86
		1#0	0	0	22.19	21.86	21.85
		1#24	0	0	22.16	21.94	21.95
	ODGIZ	1#49	0	0	22.18	22.12	21.94
	QPSK	25#0	1	1	21.22	21.22	20.97
		25#24	1	1	21.12	21.14	21.06
1014		50#0	1	1	21.1	21.07	20.87
10M		1#0	1	1	21.25	21	21.19
		1#24	1	1	21.38	21.14	21.2
	16 0 4 34	1#49	1	1	21.34	20.9	21.1
	16-QAM	25#0	2	2	20.11	20.23	19.8
		25#24	2	2	20.08	20.08	19.97
		50#0	2	2	20.18	20.18	19.89
		1#0	0	0	22.15	21.88	21.9
		1#37	0	0	22.06	21.99	21.75
	ODCK	1#74	0	0	21.8	22.21	21.94
	QPSK	36#0	1	1	21.32	20.9	21.05
		36#35	1	1	21.19	21.16	21.13
1514		75#0	1	1	21.24	21.1	21
15M		1#0	1	1	21.34	20.94	21.18
		1#37	1	1	21.26	20.99	21.04
	16 OAM	1#74	1	1	21.06	20.86	21.2
	16-QAM	36#0	2	2	20.15	20.2	20.01
		36#35	2	2	20.2	20.14	20.09
		75#0	2	2	20.25	20.11	19.97

SAR Evaluation Report 49 of 75

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		1#0	0	0	22.16	22.25	22.36
	1#49	0	0	22.15	21.71	21.74	
	QPSK	1#99	0	0	21.02	22.05	22.09
	QPSK	50#0	1	1	21.21	20.7	21.04
		50#49	1	1	21.98	21.99	21.76
20M		100#0	1	1	21.07	21.9	21.01
20W		1#0	1	1	21.39	20.65	21.14
		1#49	1	1	21.44	20.97	20.93
	16 OAM	1#99	1	1	20.34	21.06	21.22
	16-QAM	50#0	2	2	20.28	20.16	20.01
		50#49	2	2	20.06	20.05	20.02
		100#0	2	2	20.2	20.06	20.1

SAR Evaluation Report 50 of 75

LTE Band 17:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
		1#0	0	0	22.98	23.1	23.05
		1#12	0	0	22.59	22.37	22.88
	ODGIZ	1#24	0	0	22.69	22.64	23.02
	QPSK	12#0	1	1	21.7	21.63	21.87
		12#11	1	1	21.53	21.49	21.98
73.4		25#0	1	1	21.73	21.72	21.92
5M		1#0	1	1	22.15	21.99	22.23
		1#12	1	1	21.97	21.52	22.21
	16 OAM	1#24	1	1	22.06	21.68	21.92
	16-QAM	12#0	2	2	20.89	20.7	21.03
		12#11	2	2	20.67	20.44	21.09
		25#0	2	2	20.72	20.76	21.02
		1#0	0	0	22.97	22.93	22.95
		1#24	0	0	22.57	22.85	22.9
	ODCK	1#49	0	0	22.58	22.84	22.79
	QPSK	25#0	1	1	22.19	22.61	22.23
		25#24	1	1	21.93	21.87	22.06
10M		50#0	1	1	22.02	21.96	21.98
TUIVI		1#0	1	1	22.19	21.82	22.05
		1#24	1	1	21.91	21.88	22.12
	16 OAM	1#49	1	1	21.96	21.95	21.94
	16-QAM	25#0	2	2	20.88	20.94	21.01
		25#24	2	2	20.69	20.93	21.02
		50#0	2	2	21.02	21.04	20.94

Report No.: RDG171228009-20

Note:

- 1. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
- 2. The CMW500 Wideband Radio Communication tester is used for LTE output power measurements and SAR testing. Closed loop power control is used to keep the radio transmitters the max output power during the test.
- 3. KDB941225D05v02- SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg

SAR Evaluation Report 51 of 75

WLAN:

Mode	Channel	Data Rate	RF Output
Mode	frequency	Data Rate	Power
	2412		9.32
802.11b	2437	1Mbps	9.13
	2462		9.11
	2412		9.21
802.11g	2437	6Mbps	9.18
	2462		9.39
000 11	2412		9.11
802.11n HT20	2437	MCS0	9.21
11120	2462		9.24
000 11	2422		9.20
802.11n HT40	2437	MCS0	9.06
11170	2452		9.24

Report No.: RDG171228009-20

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
	2402	2.68
BDR(GFSK)	2441	3.48
	2480	3.53
	2402	1.84
$EDR(\pi/4-DQPSK)$	2441	2.65
	2480	2.73
	2402	2.25
EDR(8-DPSK)	2441	2.79
	2480	2.90
	2402	1.16
Bluetooth LE	2440	3.26
	2480	4.01

SAR Evaluation Report 52 of 75

Standalone SAR test exclusion considerations

Antennas Location:



Report No.: RDG171228009-20

Antenna Distance To Edge

Antenna Distance To Edge(mm)									
Antenna Back Left Right Top Botton									
WWAN(GSM/WCDMA/LTE)	< 5	< 5	33	134	< 5				
WLAN/BT Antenna	< 5	< 5	65	< 5	125				

Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
WLAN	2462	9.5	8.91	0	2.8	3	YES
Bluetooth	2480	4.1	2.57	0	0.8	3	YES

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] ·

 $[\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

SAR Evaluation Report 53 of 75

Standalone SAR estimation:

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Estimated 1-g (W/kg)
WLAN Head	2462	9.5	8.91	0	0.37
WLAN Body	2462	9.5	8.91	10	0.19
BT Head	2480	4.1	2.57	0	0.11
BT Body	2480	4.1	2.57	10	0.06

Report No.: RDG171228009-20

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

[(max. power of channel, including tune-up tolerance , mW)/(min. test separation distance,mm)] $\cdot [\sqrt{f(GHz)/x}]$

W/kg for test separation distances ≤50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

SAR test exclusion for the EUT edge considerations Result

Antenna Distance To Edge(mm)										
Mode	Back	Left	Right	Тор	Bottom					
BT	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*					
WLAN	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*					
WWAN(GSM/WCDMA/LTE)	Required	Required	Exclusion	Exclusion	Required					

Note:

Required: The distance to Edge is less than 25mm, testing is required. **Exclusion*:** SAR test exclusion evaluation has been done above. **Exclusion:** The distance to Edge is more than 25 mm, testing is not required.

SAR Evaluation Report 54 of 75

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	22.5-23.7 °C	22.2-23.5 ℃	22.4-23.6 ℃	22.1-23.4 ℃	22.5-23.3 ℃
Relative Humidity:	41 %	33 %	33 %	39 %	40 %
ATM Pressure:	101.3 kPa	101.3 kPa	102 kPa	101.5 kPa	101.4 kPa
Test Date:	2018/02/04	2018/02/05	2018/02/07	2018/02/08	2018/02/09

Report No.: RDG171228009-20

Testing was performed by Ken Zhu, Sam Liang, William Ye.

SAR Evaluation Report 55 of 75

GSM 850:

DUC	E	Test	Max.	Max. Rated		1g SAR	(W/kg)	
EUT Position	Frequency (MHz)	Mode	Meas. Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	824.2	GSM	/	/	/	/	/	/
Head Left Cheek	836.6	GSM	31.91	32.2	1.069	0.293	0.31	1#
	848.8	GSM	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/
Head Left Tilt	836.6	GSM	31.91	32.2	1.069	0.203	0.22	2#
	848.8	GSM	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/
Head Right Cheek	836.6	GSM	31.91	32.2	1.069	0.259	0.28	3#
	848.8	GSM	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/
Head Right Tilt	836.6	GSM	31.91	32.2	1.069	0.175	0.19	4#
	848.8	GSM	/	/	/	/	/	/
	824.2	GSM	/	/	/	/	/	/
Body Worn Back (10mm)	836.6	GSM	31.91	32.2	1.069	0.415	0.44	5#
(10mm)	848.8	GSM	/	/	/	/	/	/
	824.2	GPRS	/	/	/	/	/	/
Body Back (10mm)	836.6	GPRS	28.07	28.5	1.104	0.630	0.70	6#
(Tollill)	848.8	GPRS	/	/	/	/	/	/
	824.2	GPRS	/	/	/	/	/	/
Body Left (10mm)	836.6	GPRS	28.07	28.5	1.104	0.615	0.68	7#
(1011111)	848.8	GPRS	/	/	/	/	/	/
	824.2	GPRS	/	/	/	/	/	/
Body Bottom (10mm)	836.6	GPRS	28.07	28.5	1.104	0.252	0.28	8#
(1011111)	848.8	GPRS	/	/	/	/	/	/

Report No.: RDG171228009-20

Note:

- 1. When the 1-g SAR is \leq 0.8W/kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
- 4. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.

SAR Evaluation Report 56 of 75

GSM 1900:

EUT	Frequency	Test	Max. Meas.	Max. Rated		1g SAR	(W/kg)	
Position	(MHz)	Mode	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1850.2	GSM	/	/	/	/	/	/
Head Left Cheek	1880	GSM	29.15	29.4	1.059	0.203	0.22	9#
	1909.8	GSM	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/
Head Left Tilt	1880	GSM	29.15	29.4	1.059	0.078	0.08	10#
	1909.8	GSM	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/
Head Right Cheek	1880	GSM	29.15	29.4	1.059	0.160	0.17	11#
	1909.8	GSM	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/
Head Right Tilt	1880	GSM	29.15	29.4	1.059	0.029	0.03	12#
	1909.8	GSM	/	/	/	/	/	/
	1850.2	GSM	/	/	/	/	/	/
Body Worn Back (10mm)	1880	GSM	29.15	29.4	1.059	0.656	0.69	13#
(10mm)	1909.8	GSM	/	/	/	/	/	/
	1850.2	GPRS	/	/	/	/	/	/
Body Back (10mm)	1880	GPRS	25.83	26.1	1.064	0.656	0.70	14#
(1011111)	1909.8	GPRS	/	/	/	/	/	/
	1850.2	GPRS	/	/	/	/	/	/
Body Left (10mm)	1880	GPRS	25.83	26.1	1.064	0.102	0.11	15#
(1011111)	1909.8	GPRS	/	/	/	/	/	/
	1850.2	GPRS	26.03	26.1	1.016	0.732	0.74	16#
Body Bottom (10mm)	1880	GPRS	25.83	26.1	1.064	0.816	0.87	17#
(10)	1909.8	GPRS	25.56	26.1	1.132	0.804	0.91	18#

Report No.: RDG171228009-20

Note:

- 1. When the 1-g SAR is \leq 0.8W/kg, testing for other channels are optional. 2. The EUT transmit and receive through the same GSM antenna while testing SAR.
- 3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
- 4. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.

SAR Evaluation Report 57 of 75

WCDMA Band 2:

DITE	E	Tank	Max.	Max.		1g SAR	(W/kg)	
EUT Position	Frequency (MHz)	Test Mode	Meas. Power (dBm)	Rated Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1852.4	RMC	/	/	/	/	/	/
Head Left Cheek	1880	RMC	22.57	22.8	1.054	0.157	0.17	19#
	1907.6	RMC	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/
Head Left Tilt	1880	RMC	22.57	22.8	1.054	0.084	0.09	20#
	1907.6	RMC	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/
Head Right Cheek	1880	RMC	22.57	22.8	1.054	0.191	0.20	21#
	1907.6	RMC	/	/	/	/	/	/
	1852.4	RMC	/	/	/	/	/	/
Head Right Tilt	1880	RMC	22.57	22.8	1.054	0.052	0.05	22#
	1907.6	RMC	/	/	/	/	/	/
	1852.4	RMC	22.66	22.8	1.033	1.15	1.19	23#
Body Back (10mm)	1880	RMC	22.57	22.8	1.054	1.05	1.11	24#
	1907.6	RMC	22.65	22.8	1.035	0.925	0.96	25#
	1852.4	RMC	/	/	/	/	/	/
Body Left (10mm)	1880	RMC	22.57	22.8	1.054	0.105	0.11	26#
(1011111)	1907.6	RMC	/	/	/	/	/	/
	1852.4	RMC	22.66	22.8	1.033	1.28	1.32	27#
Body Bottom (10mm)	1880	RMC	22.57	22.8	1.054	1.24	1.31	28#
(1011111)	1907.6	RMC	22.65	22.8	1.035	1.09	1.13	29#

Report No.: RDG171228009-20

SAR Evaluation Report 58 of 75

WCDMA Band 5:

EUT	Frequency	Test	Max. Meas.	Max. Rated		1g SAR	(W/kg)	
Position	(MHz)	Mode	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	826.4	RMC	/	/	/	/	/	/
Head Left Cheek	836.6	RMC	22.61	22.8	1.045	0.155	0.16	30#
	846.6	RMC	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/
Head Left Tilt	836.6	RMC	22.61	22.8	1.045	0.091	0.10	31#
	846.6	RMC	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/
Head Right Cheek	836.6	RMC	22.61	22.8	1.045	0.128	0.13	32#
	846.6	RMC	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/
Head Right Tilt	836.6	RMC	22.61	22.8	1.045	0.090	0.09	33#
	846.6	RMC	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/
Body Back (10mm)	836.6	RMC	22.61	22.8	1.045	0.181	0.19	34#
(10mm)	846.6	RMC	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/
Body Left (10mm)	836.6	RMC	22.61	22.8	1.045	0.204	0.21	35#
(1011111)	846.6	RMC	/	/	/	/	/	/
	826.4	RMC	/	/	/	/	/	/
Body Bottom (10mm)	836.6	RMC	22.61	22.8	1.045	0.091	0.10	36#
(1011111)	846.6	RMC	/	/	/	/	/	/

Report No.: RDG171228009-20

Note:

- 1. When the 1-g SAR is ≤ 0.8 W/kg, testing for other channels are optional.
- 2. The EUT transmit and receive through the same antenna while testing SAR.
- 3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
- 4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+/DC-HSDPA when the maximum average output of each RF channel is less than ½ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
- 5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 59 of 75

LTE Band 2:

EHIE	T.	D 1 144	TE 4	Max.	Max.		1g SAI	R (W/kg)	
EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Meas. Power (dBm)	Rated Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1860	20	1RB	/	/	/	/	/	/
Head Left Cheek	1880	20	1RB	21.71	22.3	1.146	0.183	0.21	37#
nead Left Cheek	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	21.36	22.3	1.242	0.138	0.17	38#
	1860	20	1RB	/	/	/	/	/	/
Head Left Tilt	1880	20	1RB	21.71	22.3	1.146	0.084	0.10	39#
Head Left Till	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	21.36	22.3	1.242	0.067	0.08	40#
H. ID: L. Cl. I	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	21.71	22.3	1.146	0.218	0.25	41#
Head Right Cheek	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	21.36	22.3	1.242	0.166	0.21	42#
	1860	20	1RB	/	/	/	/	/	/
H 1D: 1/T:h	1880	20	1RB	21.71	22.3	1.146	0.051	0.06	43#
Head Right Tilt	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	21.36	22.3	1.242	0.039	0.05	44#
	1860	20	1RB	/	/	/	/	/	/
Body Back	1880	20	1RB	21.71	22.3	1.146	0.691	0.79	45#
(10mm)	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	21.36	22.3	1.242	0.582	0.72	46#
	1860	20	1RB	/	/	/	/	/	/
Body Left	1880	20	1RB	21.71	22.3	1.146	0.103	0.12	47#
(10mm)	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	21.36	22.3	1.242	0.084	0.10	48#
	1860	20	1RB	/	/	/	/	/	/
Body Bottom	1880	20	1RB	21.71	22.3	1.146	0.683	0.78	49#
(10mm)	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	21.36	22.3	1.242	0.535	0.66	50#

Report No.: RDG171228009-20

SAR Evaluation Report 60 of 75

LTE Band 4:

EV.	Б	D 1 114	T	Max.	Max.		1g SAI	R (W/kg)	
EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Meas. Power (dBm)	Rated Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	1720	20	1RB	/	/	/	/	/	/
11 11 0 01 1	1732.5	20	1RB	22.58	22.9	1.076	0.282	0.30	51#
Head Left Cheek	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	22.02	22.9	1.225	0.196	0.24	52#
	1720	20	1RB	/	/	/	/	/	/
11110.734	1732.5	20	1RB	22.58	22.9	1.076	0.138	0.15	53#
Head Left Tilt	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	22.02	22.9	1.225	0.099	0.12	54#
	1720	20	1RB	/	/	/	/	/	/
H ID: 14 CL 1	1732.5	20	1RB	22.58	22.9	1.076	0.330	0.36	55#
Head Right Cheek	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	22.02	22.9	1.225	0.248	0.30	56#
	1720	20	1RB	/	/	/	/	/	/
H 1D: 14 TH	1732.5	20	1RB	22.58	22.9	1.076	0.079	0.09	57#
Head Right Tilt	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	22.02	22.9	1.225	0.062	0.08	58#
	1720	20	1RB	/	/	/	/	/	/
Body Back	1732.5	20	1RB	22.58	22.9	1.076	0.669	0.72	59#
(10mm)	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	22.02	22.9	1.225	0.477	0.58	60#
	1720	20	1RB	/	/	/	/	/	/
Body Left	1732.5	20	1RB	22.58	22.9	1.076	0.205	0.22	61#
(10mm)	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	22.02	22.9	1.225	0.159	0.19	62#
	1720	20	1RB	22.73	22.9	1.04	1.13	1.18	63#
	1732.5	20	1RB	22.58	22.9	1.076	1.14	1.23	64#
	1745	20	1RB	22.76	22.9	1.033	1.03	1.06	65#
Body Bottom (10mm)	1720	20	50%RB	21.74	22.9	1.306	0.749	0.98	66#
(======)	1732.5	20	50%RB	22.02	22.9	1.225	0.831	1.02	67#
	1745	20	50%RB	21.88	22.9	1.265	0.702	0.89	68#
	1732.5	20	100%RB	22.03	22.9	1.222	0.647	0.79	69#

Report No.: RDG171228009-20

SAR Evaluation Report 61 of 75

LTE Band 5:

EHE	T.	B 1 144	TE 4	Max.	Max.		1g SAI	R (W/kg)	
EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Meas. Power (dBm)	Rated Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	22.51	23	1.119	0.135	0.15	70#
Head Left Cheek	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	22.13	23	1.222	0.110	0.13	71#
	829	10	1RB	/	/	/	/	/	/
Head Left Tilt	836.5	10	1RB	22.51	23	1.119	0.094	0.11	72#
Head Left Till	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	22.13	23	1.222	0.081	0.10	73#
	829	10	1RB	/	/	/	/	/	/
Haad Dialet Chaale	836.5	10	1RB	22.51	23	1.119	0.130	0.15	74#
Head Right Cheek	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	22.13	23	1.222	0.100	0.12	75#
	829	10	1RB	/	/	/	/	/	/
Hand Dight Tilt	836.5	10	1RB	22.51	23	1.119	0.088	0.10	76#
Head Right Tilt	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	22.13	23	1.222	0.069	0.08	77#
	829	10	1RB	/	/	/	/	/	/
Body Back	836.5	10	1RB	22.51	23	1.119	0.206	0.23	78#
(10mm)	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	22.13	23	1.222	0.160	0.20	79#
	829	10	1RB	/	/	/	/	/	/
Body Left	836.5	10	1RB	22.51	23	1.119	0.205	0.23	80#
(10mm)	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	22.13	23	1.222	0.162	0.20	81#
	829	10	1RB	/	/	/	/	/	/
Body Bottom	836.5	10	1RB	22.51	23	1.119	0.073	0.08	82#
(10mm)	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	22.13	23	1.222	/ 0.100 (0 / 0.088 (0 / 0.069 (0 / 0.206 (0 / 0.205 (0 / 0.162 (0 / 0.073 (0	0.07	83#

Report No.: RDG171228009-20

SAR Evaluation Report 62 of 75

LTE Band 7:

ELIC	F	D 1 144	TE 4	Max.	Max.		1g SAF	R (W/kg)	
EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Meas. Power (dBm)	Rated Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	2510	20	1RB	/	/	/	/	/	/
Head Left Cheek	2535	20	1RB	22.25	22.5	1.059	0.284	0.30	84#
Head Left Cheek	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.99	22.5	1.125	0.225	0.25	85#
	2510	20	1RB	/	/	/	/	/	/
Head Left Tilt	2535	20	1RB	22.25	22.5	1.059	0.111	0.12	86#
Head Left Till	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.99	22.5	1.125	0.088	0.10	87#
	2510	20	1RB	/	/	/	/	/	/
Head Dials Charle	2535	20	1RB	22.25	22.5	1.059	0.160	0.17	88#
Head Right Cheek	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.99	22.5	1.125	0.123	0.14	89#
	2510	20	1RB	/	/	/	/	/	/
H 1D: 1, Til.	2535	20	1RB	22.25	22.5	1.059	0.180	0.19	90#
Head Right Tilt	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.99	22.5	1.125	0.142	0.16	91#
	2510	20	1RB	22.16	22.5	1.081	0.945	1.02	92#
	2535	20	1RB	22.25	22.5	1.059	1.13	1.20	93#
	2560	20	1RB	22.36	22.5	1.033	1.18	1.22	94#
Body Back (10mm)	2510	20	50%RB	21.98	22.5	1.127	0.750	0.85	95#
(10mm)	2535	20	50%RB	21.99	22.5	1.125	0.970	1.09	96#
	2560	20	50%RB	21.76	22.5	1.186	1	1.19	97#
	2535	20	100%RB	21.9	22.5	1.148	0.987	1.13	98#
	2510	20	1RB	/	/	/	/	/	/
Body Left	2535	20	1RB	22.25	22.5	1.059	0.168	0.18	99#
(10mm)	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.99	22.5	1.125	0.137	0.15	100#
	2510	20	1RB	22.16	22.5	1.081	1.11	1.20	101#
	2535	20	1RB	22.25	22.5	1.059	1.02	1.08	102#
	2560	20	1RB	22.36	22.5	1.033	1.17	1.21	103#
Body Bottom (10mm)	2510	20	50%RB	21.98	22.5	1.127	0.913	1.03	104#
(1011111)	2535	20	50%RB	21.99	22.5	1.125	0.901	1.01	105#
	2560	20	50%RB	21.76	22.5	1.186	0.887	1.05	106#
	2535	20	100%RB	21.9	22.5	1.148	0.853	0.98	107#

Report No.: RDG171228009-20

SAR Evaluation Report 63 of 75

LTE Band 17:

DUT	E	Dand: 14h	T 2 2 4	Max.	Max.		1g SAI	R (W/kg)	
EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Meas. Power (dBm)	Rated Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR	Plot
	709	10	1RB	/	/	/	/	/	/
II 1 I - 0 Cl 1	710	10	1RB	22.93	23.2	1.064	0.229	0.24	108#
Head Left Cheek	711	10	1RB	/	/	/	/	/	/
	710	10	50%RB	22.61	23.2	1.146	0.182	0.21	109#
	709	10	1RB	/	/	/	/	/	/
II II . 6 Til	710	10	1RB	22.93	23.2	1.064	0.122	0.13	110#
Head Left Tilt	711	10	1RB	/	/	/	/	/	/
	710	10	50%RB	22.61	23.2	1.146	Meas. SAR / 0.229 / 0.182 / 0.122	0.11	111#
	709	10	1RB	/	/	/	/	/	/
H 1D: 14 Cl 1	710	10	1RB	22.93	23.2	1.064	0.207	0.22	112#
Head Right Cheek	711	10	1RB	/	/	/	/	/	/
	710	10	50%RB	22.61	23.2	1.146	0.173	0.20	113#
	709	10	1RB	/	/	/	/	/	/
II 1D: 14 T:14	710	10	1RB	22.93	23.2	1.064	0.122	0.13	114#
Head Right Tilt	711	10	1RB	/	/	/	/	/	/
Head Right Tilt	710	10	50%RB	22.61	23.2	1.146	0.099	0.11	115#
	709	10	1RB	/	/	/	/	/	/
Body Back	710	10	1RB	22.93	23.2	1.064	0.271	0.29	116#
(10mm)	711	10	1RB	/	/	/	/	/	/
	710	10	50%RB	22.61	23.2	1.146	0.205	0.23	117#
	709	10	1RB	/	/	/	/	/	/
Body Left	710	10	1RB	22.93	23.2	1.064	0.259	0.28	118#
(10mm)	711	10	1RB	/	/	/	/	/	/
	710	10	50%RB	22.61	23.2	1.146	0.197	0.23	119#
	709	10	1RB	/	/	/	/	/	/
Body Bottom	710	10	1RB	22.93	23.2	1.064	0.066	0.07	120#
(10mm)	711	10	1RB	/	/	/	/	/	/
	710	10	50%RB	22.61	23.2	1.146	0.049	0.06	121#

Report No.: RDG171228009-20

SAR Evaluation Report 64 of 75

Note:

1. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.

Report No.: RDG171228009-20

- 2. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
- 3. When the 1-g SAR is \leq 0.8W/kg, testing for other channels are optional.
- 4. Worst case SAR for 50% RB allocation is selected to be tested.
- 5.KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
- 6. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is <1.45 W/kg, tests for the remaining required test channels are optional.
- 7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.
- 8. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg
- 9. KDB 648474 D04-When the peak SAR located in regions that probe is unable to access, a flat phantom is used for SAR measurement.

SAR Evaluation Report 65 of 75

SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

Report No.: RDG171228009-20

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurement is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The Highest Measured SAR Configuration in Each Frequency Band

Head

Engagement Dan d	and Frag (MHz) FIIT Position		Meas. SA	Largest to	
Frequency Band	Freq.(MHz)	EUT Position	Original	Repeated	Smallest SAR Ratio
/	/	/	/	/	/

Body

Eraguanay Dand	Erog (MHz)	ELIT Dogition	Meas. SA	Largest to Smallest SAR	
Frequency Band	, ,		Original	Repeated	Ratio
(1850-2000 MHz) WCDMA Band 2	1852.4	Body Bottom	1.28	1.23	1.04
(1650-1850 MHz) WCDMA Band 4	1732.5	Body Bottom	1.14	1.08	1.06
(2550-2700 MHz) WCDMA Band 7	2560	Body Back	1.18	1.12	1.05

Note:

- 1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.
- 2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
- 3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements..

SAR Evaluation Report 66 of 75

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simulta	Description of Simultaneous Transmit Capabilities							
Transmitter Combination	Simultaneous?	Hotspot?						
GSM + WCDMA	×	×						
GSM+LTE	×	×						
GSM + Bluetooth	√	×						
GSM + WLAN	√	√						
WCDMA+LTE	×	×						
WCDMA + Bluetooth	√	×						
WCDMA + WLAN	√	√						
LTE + Bluetooth	√	×						
LTE + WLAN	√	√						

Simultaneous and Hotspot SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported S	SAR(W/kg)	ΣSAR <
Mouc(SART SAR2)	1 Osition	SAR1	SAR2	1.6W/kg
	Head Left Cheek	0.31	0.11	0.42
	Head Left Tilt	0.22	0.11	0.33
GSM 850+Bluetooth	Head Right Cheek	0.28	0.11	0.39
OSM 830+Diuetootii	Head Right Tilt	0.19	0.11	0.3
	Body Worn Back	0.44	0.06	0.5
	Body Back	0.7	0.06	0.76
	Head Left Cheek	0.22	0.11	0.33
	Head Left Tilt	0.08	0.11	0.19
PCS1900 +Bluetooth	Head Right Cheek	0.17	0.11	0.28
PCS1900 +Diuetootii	Head Right Tilt	0.03	0.11	0.14
	Body Worn Back	0.69	0.06	0.75
	Body Back	0.7	0.06	0.76
	Head Left Cheek	0.17	0.11	0.28
WGDM D	Head Left Tilt	0.09	0.11	0.2
WCDMA Band 2+Bluetooth	Head Right Cheek	0.2	0.11	0.31
2 · Diuctoom	Head Right Tilt	0.05	0.11	0.16
	Body Back	1.19	0.06	1.25
	Head Left Cheek	0.16	0.11	0.27
WCDMA D. 1	Head Left Tilt	0.1	0.11	0.21
WCDMA Band 5+Bluetooth	Head Right Cheek	0.13	0.11	0.24
3 · Diuctoun	Head Right Tilt	0.09	0.11	0.2
	Body Back	0.19	0.06	0.25

SAR Evaluation Report 67 of 75

Mode(SAR1+SAR2)	Position	Reported S	Reported SAR(W/kg)			
Mode(SAKI+SAK2)	1 osition	SAR1	SAR2	1.6W/kg		
	Head Left Cheek	0.21	0.11	0.32		
	Head Left Tilt	0.1	0.11	0.21		
LTE Band 2+Bluetooth	Head Right Cheek	0.25	0.11	0.36		
	Head Right Tilt	0.06	0.11	0.17		
	Body Back	0.79	0.06	0.85		
	Head Left Cheek	0.3	0.11	0.41		
	Head Left Tilt	0.15	0.11	0.26		
LTE Band 4+Bluetooth	Head Right Cheek	0.36	0.11	0.47		
	Head Right Tilt	0.09	0.11	0.2		
	Body Back	0.72	0.06	0.78		
	Head Left Cheek	0.15	0.11	0.26		
	Head Left Tilt	0.11	0.11	0.22		
LTE Band 5+Bluetooth	Head Right Cheek	0.15	0.11	0.26		
	Head Right Tilt	0.1	0.11	0.21		
	Body Back	0.23	0.06	0.29		
	Head Left Cheek	0.3	0.11	0.41		
	Head Left Tilt	0.12	0.11	0.23		
LTE Band 7+Bluetooth	Head Right Cheek	0.17	0.11	0.28		
	Head Right Tilt	0.19	0.11	0.3		
	Body Back	1.22	0.06	1.28		
	Head Left Cheek	0.24	0.11	0.35		
	Head Left Tilt	0.13	0.11	0.24		
LTE Band 17+Bluetooth	Head Right Cheek	0.22	0.11	0.33		
	Head Right Tilt	0.13	0.11	0.24		
	Body Back	0.29	0.06	0.35		

SAR Evaluation Report 68 of 75

Mode(SAR1+SAR2)	Position	Reported	Reported SAR(W/kg)		
,		SAR1	SAR2	1.6W/kg	
	Head Left Cheek	0.31	0.37	0.68	
	Head Left Tilt	0.22	0.37	0.59	
GSM 850+ WLAN	Head Right Cheek	0.28	0.37	0.65	
	Head Right Tilt	0.19	0.37	0.56	
	Body Worn Back	0.44	0.19	0.63	
	Body Back	0.7	0.19	0.89	
GPRS 850 + WLAN (Hotspot)	Body Left	0.68	0.19	0.87	
(Hotspot)	Body Bottom	0.28	0.19	0.47	
	Head Left Cheek	0.22	0.37	0.59	
	Head Left Tilt	0.08	0.37	0.45	
PCS1900 + WLAN	Head Right Cheek	0.17	0.37	0.54	
	Head Right Tilt	0.03	0.37	0.4	
	Body Worn Back	0.69	0.19	0.88	
	Body Back	0.7	0.19	0.89	
GPRS 1900 + WLAN	Body Left	0.11	0.19	0.3	
(Hotspot)	Body Bottom	0.91	0.19	1.1	
	Head Left Cheek	0.17	0.37	0.54	
WCDMA Dan 12 I WI AN	Head Left Tilt	0.09	0.37	0.46	
WCDMA Band 2+ WLAN	Head Right Cheek	0.2	0.37	0.57	
	Head Right Tilt	0.05	0.37	0.42	
	Body Back	1.19	0.19	1.38	
WCDMA Band 2+ WLAN (Hotspot)	Body Left	0.11	0.19	0.3	
(Hotspot)	Body Bottom	1.32	0.19	1.51	
	Head Left Cheek	0.16	0.37	0.53	
WCDMA Dond 5 L WILANI	Head Left Tilt	0.1	0.37	0.47	
WCDMA Band 5+ WLAN	Head Right Cheek	0.13	0.37	0.5	
	Head Right Tilt	0.09	0.37	0.46	
	Body Back	0.19	0.19	0.38	
WCDMA Band 5+ WLAN (Hotspot)	Body Left	0.21	0.19	0.4	
(Hotspot)	Body Bottom	0.1	0.19	0.29	
	Head Left Cheek	0.21	0.37	0.58	
I TE Dond 2 - WI AN	Head Left Tilt	0.1	0.37	0.47	
LTE Band 2+ WLAN	Head Right Cheek	0.25	0.37	0.62	
	Head Right Tilt	0.06	0.37	0.43	
1.000 D 1.0 000 135	Body Back	0.79	0.19	0.98	
LTE Band 2+ WLAN (Hotspot)	Body Left	0.12	0.19	0.31	
(110ι3μοι)	Body Bottom	0.78	0.19	0.97	

SAR Evaluation Report 69 of 75

Mode(SAR1+SAR2)	Position	Reported S	Reported SAR(W/kg)		
Mouc(SART+SAR2)	1 Osition	SAR1	SAR2	1.6W/kg	
	Head Left Cheek	0.3	0.37	0.67	
LTE Band 4+ WLAN	Head Left Tilt	0.15	0.37	0.52	
	Head Right Cheek	0.36	0.37	0.73	
	Head Right Tilt	0.09	0.37	0.46	
	Body Back	0.72	0.19	0.91	
LTE Band 4+ WLAN (Hotspot)	Body Left	0.22	0.19	0.41	
(Hotspot)	Body Bottom	1.23	0.19	1.42	
	Head Left Cheek	0.15	0.37	0.52	
LTED 15 LWI AND	Head Left Tilt	0.11	0.37	0.48	
LTE Band 5+ WLAN	Head Right Cheek	0.15	0.37	0.52	
	Head Right Tilt	0.1	0.37	0.47	
	Body Back	0.23	0.19	0.42	
LTE Band 5+ WLAN (Hotspot)	Body Left	0.23	0.19	0.42	
(Hotspot)	Body Bottom	0.08	0.19	0.27	
	Head Left Cheek	0.3	0.37	0.67	
LTE Band 7+ WLAN	Head Left Tilt	0.12	0.37	0.49	
LIE Dang / WLAN	Head Right Cheek	0.17	0.37	0.54	
	Head Right Tilt	0.19	0.37	0.56	
LEED 17 MILAN	Body Back	1.22	0.19	1.41	
LTE Band 7+ WLAN (Hotspot)	Body Left	0.18	0.19	0.37	
(Hotspot)	Body Bottom	1.21	0.19	1.4	
	Head Left Cheek	0.24	0.37	0.61	
LTE Band 17+ WLAN	Head Left Tilt	0.13	0.37	0.5	
LIE Danu I/T WLAN	Head Right Cheek	0.22	0.37	0.59	
	Head Right Tilt	0.13	0.37	0.5	
LTED 117, WILLS	Body Back	0.29	0.19	0.48	
LTE Band 17+ WLAN (Hotspot)	Body Left	0.28	0.19	0.47	
(Howpor)	Body Bottom	0.07	0.19	0.26	

Note:

Conclusion:

Sum of SAR: $\Sigma SAR \le 1.6$ W/kg therefore simultaneous transmission SAR with Volume Scans is **not** required.

SAR Evaluation Report 70 of 75

^{1.} Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode.

2. Hotspot Mode is not feasible during voice calls.

Bay Area Compliance Laboratories Corp. (Dongguan)	Report No.: RDG171228009-20
SAR Plots	
Please Refer to the Attachment.	

SAR Evaluation Report 71 of 75

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Report No.: RDG171228009-20

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)			
Measurement system										
Probe calibration	6.55	N	1	1	1	6.6	6.6			
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7			
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0			
Boundary effect	1.0	R	√3	1	1	0.6	0.6			
Linearity	4.7	R	√3	1	1	2.7	2.7			
Detection limits	1.0	R	√3	1	1	0.6	0.6			
Readout electronics	0.3	N	1	1	1	0.3	0.3			
Response time	0.0	R	√3	1	1	0.0	0.0			
Integration time	0.0	R	√3	1	1	0.0	0.0			
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6			
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6			
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5			
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9			
Post-processing	2.0	R	√3	1	1	1.2	1.2			
		Test sample	erelated							
Test sample positioning	2.8	N	1	1	1	2.8	2.8			
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3			
Drift of output power	5.0	R	√3	1	1	2.9	2.9			
		Phantom an	d set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3			
Liquid conductivity target)	5.0	R	√3	0.64	0.43	1.8	1.2			
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1			
Liquid permittivity target)	5.0	R	√3	0.6	0.49	1.7	1.4			
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2			
Combined standard uncertainty		RSS				12.2	12.0			
Expanded uncertainty 95 % confidence interval)						24.3	23.9			

SAR Evaluation Report 72 of 75

Measurement uncertainty evaluation for IEC62209-2 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0
Linearity	4.7	R	√3	1	1	2.7	2.7
Modulation Response	0.0	R	√3	1	1	0.0	0.0
Detection limits	1.0	R	√3	1	1	0.6	0.6
Boundary effect	1.0	R	√3	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	√3	1	1	0.0	0.0
Integration time	0.0	R	√3	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	√3	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9
Post-processing	2.0	R	√3	1	1	1.2	1.2
Test sample related							
Device holder Uncertainty	6.3	N	1	1	1	6.3	6.3
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Power scaling	4.5	R	√3	1	1	2.6	2.6
Drift of output power	5.0	R	√3	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.1	0.9
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Temp. unc Conductivity	1.7	R	√3	0.78	0.71	0.8	0.7
Temp. unc Permittivity	0.3	R	√3	0.23	0.26	0.0	0.0
Combined standard uncertainty		RSS				12.2	12.1
Expanded uncertainty 95 % confidence interval)						24.5	24.2

SAR Evaluation Report 73 of 75

SAR Evaluation Report 74 of 75

APPENDIX C CALIBRATION CERTIFICATES

Please Refer to the Attachment.

***** END OF REPORT *****

Report No.: RDG171228009-20

SAR Evaluation Report 75 of 75