#### FCC PART 22/24 TEST REPORT

#### FCC Part 22 /Part 24/Part 27

Report Reference No.....: LCS1512211983E-02 FCC ID.....: : 2AG5L-FTU152D

Date of Issue. .....: : January 29, 2016

Testing Laboratory Name ...... Shenzhen LCS Compliance Testing Laboratory Ltd.

Applicant's name...... Plus One Marketing Ltd.

Address...... Sumitomofudosan Hibiya building 2F, 2-8-6 Shinbashi, Minatoku, Tokyo, Japan

Test specification .....:

**FCC Part 22: PUBLIC MOBILE SERVICES** 

Standard ..... FCC Part 24: PERSONAL COMMUNICATIONS SERVICES

FCC Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS

**SERVICES** 

Test Report Form No ...... LCSEMC-1.0

Master TRF.....: Dated 2011-03

## Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description ...... Smart phone

Trade Mark ...... FREETEL

Model/Type reference..... FTU152D

Listed Models ...... N/A

Ratings..... DC 3.80V

Modulation ..... QPSK

Hardware version ..... FTU152D

Software version ...... Y991\_MB\_V3.1

Frequency...... UMTS Band II/UMTS Band IV/UMTS Band V

Result..... PASS

Compiled by:

Supervised by:

Approved by:

Kyle Yin/ File administrators

Glin Lu/ Technique principal

Gavin Liang/ Manager

## TEST REPORT

Test Report No. :	LCS1512211983E-02	January 29, 2016	
	LC31312211903L-02	Date of issue	

Equipment under Test : Smart phone

Model /Type : FTU152D

Listed Models : Y991\_MB\_V3.1

Applicant : Plus One Marketing Ltd.

Address : Sumitomofudosan Hibiya building 2F, 2-8-6 Shinbashi,

Minatoku, Tokyo, Japan

Manufacturer : Toro-tech Company Limited

Address : A802, Block2, Tianan Cyberpark, Longgang, Shenzhen,

China

Factory : Toro-tech Company Limited

Address : A802, Block2, Tianan Cyberpark, Longgang, Shenzhen,

China

Test Result: PASS
-------------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

# **Revison History**

Revision	Issue Date	Revisions	Revised By
00	2016-01-29	Initial Issue	Gavin Liang

## **Contents**

IESI SIANDARDS	5
O U M M A D V	
SUMMARY	<u> 6</u>
General Remarks	6
	6
Equipment under Test	7
Short description of the Equipment under Test (EUT)	7
	8
•	8
	8
	8
	8
General Test Conditions/Configurations	8
TEST ENVIRONMENT	10
<u>. = 0 . = </u>	
Address of the test laboratory	10
Test Facility	10
Environmental conditions	10
Test Description	10
Equipments Used during the Test	12
Measurement uncertainty	12
TEST CONDITIONS AND DESILITS	1 4
TEST CONDITIONS AND RESULTS	
Output Power	14
	18
	22
Band Edge Compliance	25
Spurious Emssion on Antenna Port	27
	32
Peak-to-Average Ratio (PAR)	34
TEST SETUP PHOTOS OF THE FUT	3.6
1E31 SETUP PHOTOS OF THE EUT	
EXTERNAL PHOTOS OF THE EUT	36
INTERNAL PHOTOS OF THE EUT	36
	Product Description Equipment under Test Short description of the Equipment under Test (EUT) Internal Identification of AE used during the test Normal Accessory setting EUT configuration Related Submittal(s) / Grant (s) Modifications General Test Conditions/Configurations  TEST ENVIRONMENT

## 1 TEST STANDARDS

The tests were performed according to following standards:

FCC Part 22 (10-1-16 Edition): PRIVATE LAND MOBILE RADIO SERVICES.

FCC Part 24(10-1-16 Edition): PUBLIC MOBILE SERVICES

FCC Part 27(10-1-16 Edition): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

TIA/EIA 603 D June 2010: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators

FCC Part 2: FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

ANSI C63.4:2014: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

FCCKDB971168D01 Power Meas License Digital Systems

## 2 SUMMARY

## 2.1 General Remarks

Date of receipt of test sample	:	Dec. 21, 2015
Testing commenced on	:	Jan. 04, 2016
Testing concluded on	:	Jan. 29, 2016

## 2.2 Product Description

The **Plus One Marketing Ltd.**'s Model: FTU152D or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Smart Phone
Model Number	FTU152D
	GMSK for GSM/GPRS, 8-PSK for EDGE,QPSK for UMTS, QPSK,
Modilation Type	16QAM for LTE
Antenna Type	PIFA Antenna
	-1.63dBi(max.) For GSM 850; -3.86dBi(max.) For GSM 900;
	-2.12dBi(max.) For DCS 1800;-2.24dBi(max.) For PCS 1900;
	-2.14dBi(max.) For WCDMA Band II
	-2.13dBi(max.) For WCDMA Band IV
Antenna Gain	-1.65dBi(max.) For WCDMA Band V
Antenna Gain	-2.15dBi(max.) For LTE FDD Band 2;
	-2.14dBi(max.) For LTE FDD Band 4;
	-2.46dBi(max.) For LTE FDD Band 7;
	-3.16dBi(max.) For LTE FDD Band 12;
	-3.12dBi(max.) For LTE FDD Band 17
UMTS Operation Frequency Band	Device supported UMTS FDD Band II/IV/V
	IEEE 802.11a: 5180-5240MHz/5745-5825MHz
	IEEE 802.11b:2412-2462MHz
WLAN FCC Operation frequency	IEEE 802.11g:2412-2462MHz
True application in equality	IEEE 802.11n HT20:2412-2462MHz/5180-5240MHz/5745-5825MHz
	IEEE 802.11n HT40:2422-2452MHz/5190-5210MHz/5755-5795MHz
	IEEE 802.11ac:5775-5775MHz/5210-5210MHz
BT FCC Operation frequency	2402MHz-2480MHz
HSDPA Release Version	Release 10
HSUPA Release Version	Release 6
DC-HSUPA Release Version	Not Supported
WCDMA Release Version	R99
LTE Release Version	R8
UMTS Operation Frequency Band	Device supported FDD band 2, FDD band 4, FDD band 7, FDD band
	12, FDD band 17
	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK,BPSK)
	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
WLAN FCC Modulation Type	IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)
,	IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK)
	IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
DT Marshalation True	IEEE 802.11ac: OFDM (64QAM, 16QAM, QPSK,BPSK)
BT Modulation Type	GFSK,8DPSK,π/4DQPSK(BT 3.0+EDR)
Hardware version	Y991_MB_V3.1
Software version	Freetel_FTU152D_20151208
Android version	Android 4.4.2
GPS function	Supported and only RX
NFC Function	Supported, Operate 13.56MHz
WLAN	Supported 802.11b/802.11g/802.11n/802.11ac/802.11a

Bluetooth	Supported BT 4.0/BT 3.0+EDR
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
LTE/UMTS Power Class	Level 3
GSM/EDGE/GPRS Operation	GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz
Frequency	GSIVIO30 .024.2IVITIZ-040.0IVITIZ/PGS 1900.1030.2IVITIZ-1909.0IVITIZ
GSM/EDGE/GPRS Operation	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900
Frequency Band	G3181030/1 C31300/G1 1\3030/G1 1\31300/EDGE030/EDGE1900
GSM Release Version	R99
GPRS/EDGE Multislot Class	GPRS/EDGE: Multi-slot Class 12
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.80VDC)
GPRS operation mode	Class B

## 2.3 Equipment under Test

#### Power supply system utilised

Power supply voltage	:	0	120V / 60 Hz	0	115V / 60Hz
		0	12 V DC	0	24 V DC
		•	Other (specified in blank below)		)

## DC 3.80V

#### **Test frequency list**

			RF Channel		
Test Mode	TX/RX	Low(L)	Middle (M)	High (H)	
	TV	Channel 4132	Channel 4183	Channel 4233	
MCDMA Dand V	TX	826.4 MHz	836.6 MHz	846.6 MHz	
WCDMA Band V	RX	Channel 4357	Channel 4407	Channel 4458	
	KA	871.4 MHz	881.4 MHz	891.6 MHz	
Toot Mada	TV/DV		RF Channel		
Test Mode	TX/RX	Low(L)	Middle (M)	High (H)	
WCDMA Band II —	TX	Channel 9262	Channel 9400	Channel 9538	
		1852.4 MHz	1880.0 MHz	1907.6 MHz	
	RX	Channel 9662	Channel 9800	Channel 9938	
		1932.4 MHz	1960.0 MHz	1987.6 MHz	
Test Mode	TV/DV	RF Channel			
rest wode	TX/RX	Low(L)	Middle (M)	High (H)	
	TX	Channel1312	Channel1413	Channel1513	
WCDMA Band IV		1712.4MHz	1732.6MHz	1752.6MHz	
WODINA BANGIN	DV	Channel1537	Channel1638	Channel1738	
	RX	2112.4MHz	2132.6MHz	2152.6MHz	

## 2.4 Short description of the Equipment under Test (EUT)

## 2.4.1 General Description

FTU152D is subscriber equipment in the WCDMA/GSM /LTE system. The HSPA/UMTS frequency band is Band I/II/V/VIII, LTE frequency band is band 2, band 4, band 7, band 12 and band 17; The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and Band V and GSM850 and PCS1900 bands test data included in this report. The Smart Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS ,LTE and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

## 2.5 Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger

AE1

Model: LX15026R

INPUT: AC100-240V 50/60Hz 150mA

OUTPUT: DC 5.0V 1.5A

\*AE ID: is used to identify the test sample in the lab internally.

## 2.6 Normal Accessory setting

Fully charged battery was used during the test.

## 2.7 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- O supplied by the lab

0	Power Cable	Length (m):	1
		Shield :	1
		Detachable :	1
0	Multimeter	Manufacturer:	1
		Model No.:	1

## 2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AG5L-FTU152D** filing to comply with FCC Part 22, Part 24 and Part 27Rules.

#### 2.9 Modifications

No modifications were implemented to meet testing criteria.

## 2.10 General Test Conditions/Configurations

## 2.10.1 Test Modes

NOTE: The test mode(s) are selected according to relevant radio technology specifications.

Test Mode Test Modes Description	
UMTS/TM1	WCDMA system, QPSK modulation
UMTS/TM2	HSDPA system, QPSK modulation
UMTS/TM3	HSUPA system, QPSK modulation

#### Note:

- 1. This EUT owns two SIM cards, after we perform the pretest for these two SIM cards; we found the SIM 1 is the worst case, so its result is recorded in this report.
- 2. As WCDMA, HSDPA and HSUPA with the same emission designator, test result recorded in this report at the worst case UMTS/TM1 only after exploratory scan.

## 2.10.2 Test Environment

Environment Parameter	Selected Values During Tests			
Relative Humidity	Ambient			
Temperature	TN Ambient			
	VL	3.4V		
Voltage	VN	3.7V		
	VH	4.2V		

NOTE: VL=lower extreme test voltage VN=nominal voltage VH=upper extreme test voltage TN=normal temperature

## 3 TEST ENVIRONMENT

## 3.1 Address of the test laboratory

#### **Shenzhen LCS Compliance Testing Laboratory Ltd**

1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.4 (2014) and CISPR Publication 22.

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS Registration Number. is L4595. FCC Registration Number. is 899208. Industry Canada Registration Number. is 9642A-1. VCCI Registration Number. is C-4260 and R-3804. ESMD Registration Number. is ARCB0108. UL Registration Number. is 100571-492. TUV SUD Registration Number. is SCN1081. TUV RH Registration Number. is UA 50296516-001

#### 3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C			
Humidity:	30-60 %			
Atmospheric pressure:	950-1050mbar			

<sup>(1)</sup> expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

## 3.4 Test Description

## 3.4.1 Cellular Band (824-849MHz paired with 869-894MHz)

FCC Rule No.	Requirements	Verdict
§2.1046, §22.913	FCC: ERP ≤ 7W.	Pass
§2.1047	Digital modulation	N/A
§2.1049	OBW: No limit. EBW: No limit.	Pass
§2.1051, §22.917	≤-13dBm/1%*EBW, in 1MHz bands immediately outside and adjacent to  The frequency block.	Pass
§2.1051, §22.917	FCC: ≤ -13dBm/100kHz, from 9kHz to 10th harmonics but outside authorized operating frequency ranges.	Pass
§2.1053, §22.917	FCC: ≤ -13dBm/100kHz.	Pass
§2.1055, §22.355	≤ ±2.5ppm.	Pass
	\$2.1046, §22.913 §2.1047 §2.1049 §2.1051, §22.917 §2.1051, §22.917 §2.1053, §22.917 §2.1055,	No.       §2.1046, §22.913       FCC: ERP ≤ 7W.         §2.1047       Digital modulation         §2.1049       OBW: No limit. EBW: No limit.         §2.1051, §22.917       ≤-13dBm/1%*EBW, in 1MHz bands immediately outside and adjacent to The frequency block.         §2.1051, §22.917       FCC: ≤ -13dBm/100kHz, from 9kHz to 10th harmonics but outside authorized operating frequency ranges.         §2.1053, §22.917       FCC: ≤ -13dBm/100kHz.         §2.1055,       < +2.5ppm

## 3.4.2 PCS Band (1850-1915MHz paired with 1930-1995MHz)

Test Item	FCC Rule No.	Requirements	Verdict				
Effective(Isotropic) Radiated Output Power	§2.1046, §24.232	EIRP ≤ 2W	Pass				
Peak-Average Ratio	§2.1046, §24.232	FCC:Limit≤13dB	Pass				
Modulation Characteristics	§2.1047	Digital modulation	N/A				
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass				
Band Edges Compliance	§2.1051, §24.238	≤ -13dBm/1%*EBW, In 1MHz bands immediately outside and adjacent to The frequency block.	Pass				
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤-13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	Pass				
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13dBm/1MHz.	Pass				
Frequency Stability	§2.1055, §24.235	FCC: within authorized frequency block.	Pass				
NOTE 1: For the verdict, t	NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" de notes "not tested".						

## 3.4.3 AWS Band (1710-1755MHz pairedwith 2110-2155MHz)

•		•	
Test Item	FCC RuleNo.	Requirements	Verdict
Effective(Isotropic)Radiate dPowerOutputData	§2.1046, §27.50(d)	EIRP ≤ 1W;	Pass
Peak-AverageRatio	§2.1046, §27.50(d)	Limit≤13dB	Pass
ModulationCharacteristics	§2.1047	Digitalmodulation	N/A
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	Pass
BandEdgesCompliance	§2.1051, §27.53(h)	≤ -13dBm/1%*EBW,in1 MHzbandsimmediately outsideandadjacent to thefrequency block.	Pass
SpuriousEmissionatAnten naTerminals	§2.1051, §27.53(h)	≤ -13dBm/1MHz, from9kHzto10thharmonicsbutoutsideauthorized operatingfrequency ranges.	Pass
Frequency Stability	§2.1055, §27.54	Withinauthorizedbands of operation/frequency block.	Pass
Radiatedspurious emission	§2.1053, §27.53(h)	≤ -13dBm/1MHz.	Pass
NOTE 1: For the verdict, the	e "N/A" denotes	"not applicable", the "N/T" de notes "not tested"	

Remark:

1. The measurement uncertainty is not included in the test result.

## 3.5 Equipments Used during the Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz June 18,2015		June 17,2016
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16,2015	July 15,2016
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18,2015	June 17,2016
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18,2015	June 17,2016
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18,2015	June 17,2016
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18,2015	June 17,2016
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18,2015	June 17,2016
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHzz	June 18,2015	June 17,2016
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16,2015	July 15,2016
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16,2015	July 15,2016
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	July 16,2015	July 15,2016
MAX Signal Analyzer	Agilent	N9020A	MY50510140	20Hz~26.5GHz	Oct. 27, 2015	Oct. 26, 2016
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18,2015	June 17,2016
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10,2015	June 09,2016
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10,2015	June 09,2016
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10,2015	June 09,2016
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18,2015	June 17,2016
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18,2015	June 17,2016
Spectrum Meter	R&S	FSP 30	100023	9kHz-30GHz	July 16,2015	July 15,2016
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18,2015	June 17,2016
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18,2015	June 17,2016
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18,2015	June 17,2016
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18,2015	June 17,2016
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	June 18,2015	June 17,2016
Vector signal Generator	R&S	SMU200A	102098	100kHz~6GHz	June 18,2015	June 17,2016
Signal Generator	R&S	SMR40	10016	10MHz~40GHz	July 16,2015	July 15,2016
Universal Radio Communication Tester	R&S	CMU200	112012	N/A	July 18,2015	July 17,2016
DC power Source	GW	GPC-6030D	C671845	1	June 18,2015	June 17,2016
Temperature & Humidity Chamber	Wuhuan	HTP205	1	1	June 18,2015	June 17,2016
Note: All equipment through GRGT EST calibration						

#### 3.6 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to ETSI TR 100 028 " Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics" and is documented in the Shenzhen LCS Compliance Testing Laboratory Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen LCS Compliance Testing Laboratory Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	3.10 dB	(1)
Radiated Emission	1~18GHz	3.80 dB	(1)
Radiated Emission	18-40GHz	3.90 dB	(1)
Conducted Disturbance	0.15~30MHz	1.63 dB	(1)
Conducted Power	9KHz~18GHz	0.61 dB	(1)
Spurious RF Conducted Emission	9KHz~40GHz	1.22 dB	(1)
Band Edge Compliance of RF Emission	9KHz~40GHz	1.22 dB	(1)
Occuiped Bandwidth	9KHz~40GHz	-	(1)

<sup>(1)</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

## 4 TEST CONDITIONS AND RESULTS


## 4.1 Output Power

## **TEST APPLICABLE**

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMU200) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

## 4.1.1. Conducted Output Power

#### **TEST CONFIGURATION**

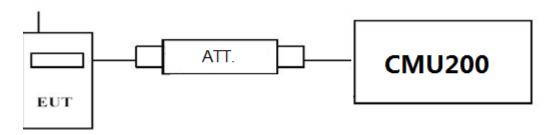

#### **TEST PROCEDURE**

#### **Conducted Power Measurement:**

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a CMU200 by an Att.
- c) EUT Communicate with CMU200 then selects a channel for testing.
- d) Add a correction factor to the display CMU200, and then test.

## **TEST RESULTS**

See next page

Took Mode	Toot Channal	Burst Average Conducted power (dBm)				
Test Mode	Test Channel	UMTS Band V	UMTS Band IV	UMTS Band II		
	LCH	23.65	23.08	23.63		
UMTS/TM1	MCH	23.71	23.28	23.72		
	HCH	23.62	23.21	23.62		
	LCH_SubTest-1	23.38	22.90	23.30		
	LCH_SubTest-2	22.52	22.07	22.45		
	LCH_SubTest-3	21.98	21.52	21.92		
	LCH_SubTest-4	21.50	21.02	21.49		
	MCH_SubTest-1	23.43	23.03	23.44		
UMTS/TM2	MCH_SubTest-2	22.69	22.23	22.67		
UIVITS/TIVIZ	MCH_SubTest-3	22.08	21.69	22.03		
	MCH_SubTest-4	21.65	21.19	21.66		
	HCH_SubTest-1	23.48	22.89	23.49		
	HCH_SubTest-2	22.50	22.19	22.54		
	HCH_SubTest-3	22.00	21.53	21.96		
	HCH_SubTest-4	21.58	21.18	21.65		
	LCH_SubTest-1	22.59	22.17	22.66		
	LCH_SubTest-2	21.39	20.86	21.38		
	LCH_SubTest-3	22.06	21.58	22.04		
	LCH_SubTest-4	20.85	20.50	20.91		
	LCH_SubTest-5	21.37	20.97	21.40		
	MCH_SubTest-1	22.79	22.29	22.69		
	MCH_SubTest-2	21.37	20.96	21.41		
UMTS/TM3	MCH_SubTest-3	22.05	21.54	22.09		
	MCH_SubTest-4	21.08	20.51	21.05		
	MCH_SubTest-5	21.47	21.06	21.39		
	HCH_SubTest-1	22.65	22.18	22.59		
	HCH_SubTest-2	21.39	20.93	21.32		
	HCH_SubTest-3	22.03	21.67	22.01		
	HCH_SubTest-4	20.98	20.51	21.05		
	HCH_SubTest-5	21.38	20.96	21.36		

## 4.1.1 Radiated Output Power


#### **TEST DESCRIPTION**

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(e) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Per Part 27.50(d) (4) specifies, Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755MHz band are limited to 1W EIRP. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in this band must employ a means for limiting power to the minimum necessary for successful communications.

#### **TEST CONFIGURATION**

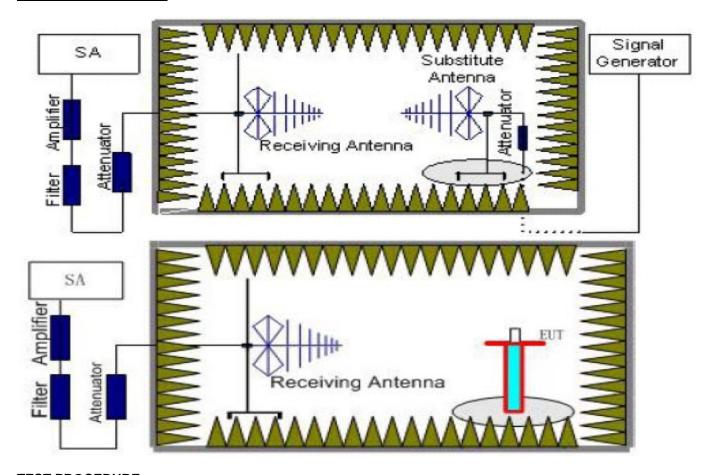

## **TEST PROCEDURE**

- 1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=10MHz,VBW=10MHz, And the maximum value of the receiver should be recorded as (P<sub>r</sub>).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed

to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P<sub>cl</sub>) ,the Substitution Antenna Gain (G<sub>a</sub>) and the Amplifier Gain (P<sub>Aq</sub>) should be recorded after test.
  - The measurement results are obtained as described below:
  - Power(EIRP)= $P_{Mea}$   $P_{Ag}$   $P_{cl}$  +  $G_a$
- 6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

#### **TEST LIMIT**

According to 22.913(a), 24.232(c) and 27.50(d) (4), the ERP(EIRP) should be not exceeding following table limits:

	Burst Average EIRP
UMTS Band II	33dBm (2W)
	Burst Average EIRP

	Burst Average EIRP
UMTS Band IV	30dBm (1W)

	Burst Average ERP
UMTS Band V	38.45dBm (7W)

#### **TEST RESULTS**

#### Remark:

- 1. We were tested all Configuration refer 3GPP TS134 121.
- 2.  $EIRP=P_{Mea}(dBm)-P_{cl}(dB)+P_{Aq}(dB)+G_a(dBi)$
- 3. ERP = EIRP 2.15dBi as EIRP by subtracting the gain of the dipole.
- 4. Margin = Emission Level Limit
- 5. We test the H direction and V direction recorded worst case.

#### UMTS/TM1/UMTS Band II

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Pcl (dB)	Ga Antenna Gain(dB)	PAg (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.4	-21.56	4.03	8.38	35.51	18.30	33.01	-14.71	V
1880.0	-20.38	4.08	8.33	35.56	19.43	33.01	-13.58	V
1907.6	-21.10	4.14	8.26	35.63	18.65	33.01	-14.36	V

#### UMTS/TM1/UMTS Band IV

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.4	-21.88	3.93	9.05	34.96	18.20	30.00	-11.80	V
1732.6	-20.59	3.93	8.89	35.01	19.38	30.00	-10.62	V
1752.6	-21.18	3.94	8.76	35.08	18.72	30.00	-11.28	V

#### UMTS/TM1/UMTS Band V


• · · · · • , · · · · · · · · · · · · ·									
Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dB)	P <sub>Ag</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.40	-17.39	3.45	8.45	2.15	33.79	19.25	38.45	-19.20	V
836.60	-15.97	3.49	8.45	2.15	33.85	20.69	38.45	-17.76	V
844.60	-18.76	3.55	8.36	2.15	33.88	17.78	38.45	-20.67	V

## 4.2 Radiated Spurious Emssion

#### **TEST APPLICABLE**

According to the TIA/EIA 603D:2010 test method, The Receiver or Spectrum was scanned from 9 KHz to the 10<sup>th</sup> harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz The resolution bandwidth is set as outlined in Part 24.238, Part 22.917 and Part 27.54. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II WCDMA Band IV and WCDMA Band V.

#### **TEST CONFIGURATION**

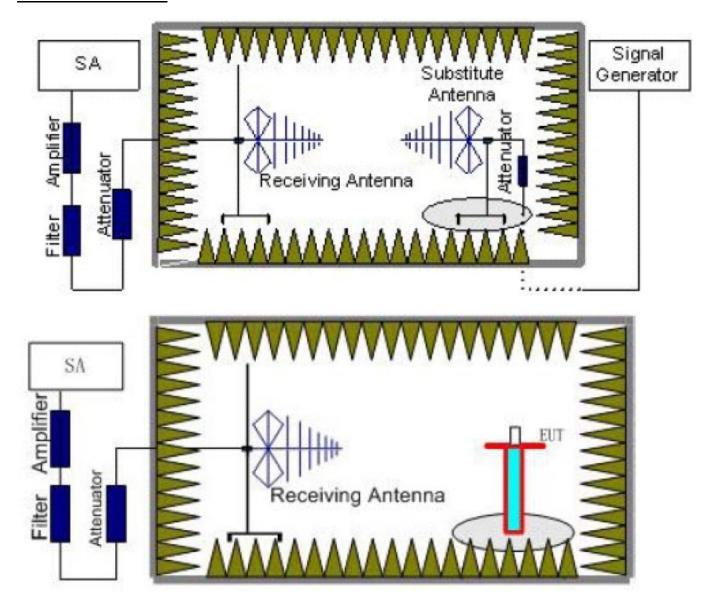

#### **TEST PROCEDURE**

- 1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz, And the maximum value of the receiver should be recorded as (P<sub>r</sub>).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P<sub>Mea</sub>) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P<sub>r</sub>). The power of signal source (P<sub>Mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P<sub>cl</sub>) ,the Substitution Antenna Gain (G<sub>a</sub>) and the Amplifier Gain (P<sub>Ag</sub>) should be recorded after test. The measurement results are obtained as described below: Power(EIRP)=P<sub>Mea</sub>- P<sub>Ag</sub> P<sub>cl</sub> + G<sub>a</sub>
- 6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.
- 8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
UMTS/TM1/	0.03~1	100KHz	300KHz	10
WCDMA Band V	1~2	1 MHz	3 MHz	2
VVCDIVIA Ballu V	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
UMTS/TM1/	2~5	1 MHz	3 MHz	3
WCDMA Band II	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
UMTS/TM1/	1~2	1 MHz	3 MHz	2
WCDMA Band IV	2~5	1 MHz	3 MHz	3
VVCDIVIA DAITU IV	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3

#### **TEST LIMITS**

According to 24.238, 22.917 and 27.54 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
UMTS/TM1/ WCDMA	Low	9KHz-10GHz	PASS
Band V	Middle	9KHz -10GHz	PASS
Ballu V	High	9KHz -10GHz	PASS
UMTS/TM1/ WCDMA	Low	9KHz -20GHz	PASS
Band II	Middle	9KHz -20GHz	PASS
Ballu II	High	9KHz -20GHz	PASS
UMTS/TM1/ WCDMA	Low	9KHz -18GHz	PASS
Band IV	Middle	9KHz -18GHz	PASS
Dailu IV	High	9KHz -18GHz	PASS

## **TEST RESULTS**

#### Remark:

- 1. We were tested all Configuration refer 3GPP TS134 121.
- 2.  $EIRP=P_{Mea}(dBm)-P_{cl}(dB)+P_{Ag}(dB)+G_a(dBi)$
- 3. ERP = EIRP 2.15dBi as EIRP by subtracting the gain of the dipole.
- 4. Margin = EIRP Limit

## UMTS/TM1/ WCDMA Band II \_ Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3704.8	-39.73	5.26	3.00	9.88	-35.11	-13.00	-22.11	Н
5557.2	-44.92	6.11	3.00	11.36	-39.67	-13.00	-26.67	Н
3704.8	-44.41	5.26	3.00	9.88	-39.79	-13.00	-26.79	V
5557.2	-48.57	6.11	3.00	11.36	-43.32	-13.00	-30.32	V

#### UMTS/TM1/ WCDMA Band II Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-38.07	5.32	3.00	10.03	-33.36	-13.00	-20.36	Н
5640.0	-43.69	6.19	3.00	11.41	-38.47	-13.00	-25.47	Н
3760.0	-43.52	5.32	3.00	10.03	-38.81	-13.00	-25.81	V
5640.0	-47.94	6.19	3.00	11.41	-42.72	-13.00	-29.72	V

## UMTS/TM1/ WCDMA Band II \_ High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815.2	-43.45	5.36	3.00	9.62	-39.19	-13.00	-26.19	Н
5722.8	-51.48	6.24	3.00	11.46	-46.26	-13.00	-33.26	Н
3815.2	-46.50	5.36	3.00	9.62	-42.24	-13.00	-29.24	V
5722.8	-53.70	6.24	3.00	11.46	-48.48	-13.00	-35.48	V

#### UMTS/TM1/ WCDMA Band V Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1652.8	-48.06	3.86	3.00	8.56	-43.36	-13.00	-30.36	Н
2479.2	-49.33	4.29	3.00	6.98	-46.64	-13.00	-33.64	Н
1652.8	-44.49	3.86	3.00	8.56	-39.79	-13.00	-26.79	V
2479.2	-44.79	4.29	3.00	6.98	-42.10	-13.00	-29.10	V

#### UMTS/TM1/ WCDMA Band V Middle Channel

Olvil O, Tivil)	VV CDIVIT CD	<u> </u>	aic Onamici					
Frequency (MHz)	P <sub>Mea</sub> (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1672.8	-49.45	3.90	3.00	8.58	-44.77	-13.00	-31.77	Н
2509.2	-51.33	4.32	3.00	6.80	-48.85	-13.00	-35.85	Н
1672.8	-45.29	3.90	3.00	8.58	-40.61	-13.00	-27.61	V
2509.2	-45.30	4.32	3.00	6.80	-42.82	-13.00	-29.82	V

UMTS/TM1/ WCDMA Band V High Channel

CIVIT O/ TIVIT/	VV ODIVIT O	<u>ana v _ mg</u>	Onamici					
Frequency (MHz)	P <sub>Mea</sub> (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1693.2	-52.28	3.91	3.00	9.06	-47.13	-13.00	-34.13	Н
2539.8	-54.72	4.32	3.00	6.65	-52.39	-13.00	-39.39	Н
1693.2	-49.59	3.91	3.00	9.06	-44.44	-13.00	-31.44	V
2539.8	-51.38	4.32	3.00	6.65	-49.05	-13.00	-36.05	V

## UMTS/TM1/ WCDMA Band IV \_ Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3424.8	-45.35	4.62	3.00	9.81	-40.16	-13.00	-27.16	Н
5137.2	-49.46	5.94	3.00	10.86	-44.54	-13.00	-31.54	Н
3424.8	-48.58	4.62	3.00	9.81	-43.39	-13.00	-30.39	V
5137.2	-53.10	5.94	3.00	10.86	-48.18	-13.00	-35.18	V

## UMTS/TM1/ WCDMA Band IV \_ Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.2	-40.89	4.63	3.00	9.84	-35.68	-13.00	-22.68	Н
5197.8	-46.19	5.94	3.00	10.86	-41.27	-13.00	-28.27	Н
3465.2	-44.12	4.63	3.00	9.84	-38.91	-13.00	-25.91	V
5197.8	-49.38	5.94	3.00	10.86	-44.46	-13.00	-31.46	V

UMTS/TM1/ WCDMA Band II \_ High Channel


Frequency (MHz)	P <sub>Mea</sub> (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3505.2	-48.04	4.65	3.00	9.90	-42.79	-13.00	-29.79	Н
5257.8	-51.12	5.95	3.00	10.91	-46.16	-13.00	-33.16	Н
3505.2	-50.32	4.65	3.00	9.90	-45.07	-13.00	-32.07	V
5257.8	-53.74	5.95	3.00	10.91	-48.78	-13.00	-35.78	V

## 4.3 Occupied Bandwidth and Emission Bandwith

#### **TEST APPLICABLE**

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. The table below lists the measured 99% Bandwidth and -26dBc Bandwidth.

## **TEST CONFIGURATION**

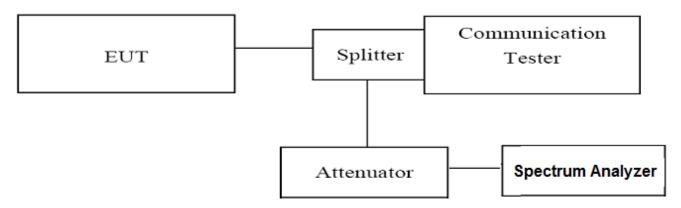

## **TEST PROCEDURE**


- 1. The EUT was set up for the max output power with pseudo random data modulation;
- 2. The Occupied bandwidth and Emission Bandwidth were measured with Aglient Spectrum Analyzer N9020A (peak);
- 3. Set RBW=100KHz, VBW=300KHz, Span=10MHz, SWT=1ms;
- 4. Set SPA Max hold and View, Set 99% Occupied Bandwidth/ Set -26dBc Occupied Bandwidth
- 5. These measurements were done at 3 frequencies for WCDMA band II/IV/V. (low, middle and high of operational frequency range).


## **TEST RESULTS**

Test Mode	Channel	Frequency (MHz)	Occupied Bandwidth (99% BW) ( kHz)	Emission Bandwidth (-26 dBc BW) ( kHz)	Verdict
UMTS/TM1/	4132	826.40	4204.70	4859.00	PASS
WCDMA Band	4183	836.60	4215.30	4869.00	PASS
V	4233	846.60	4213.20	4873.00	PASS
UMTS/TM1/	1312	1712.40	4213.40	4902.00	PASS
WCDMA Band	1413	1732.60	4249.70	4947.00	PASS
IV	1513	1752.60	4217.20	4922.00	PASS
UMTS/TM1/	9262	1852.40	4142.10	4699.00	PASS
WCDMA Band	9400	1880.00	4153.20	4668.00	PASS
II	9538	1907.60	4152.80	4664.00	PASS

#### Remark:

- 1. Test results including cable loss;
- 2. please refer to following plots;

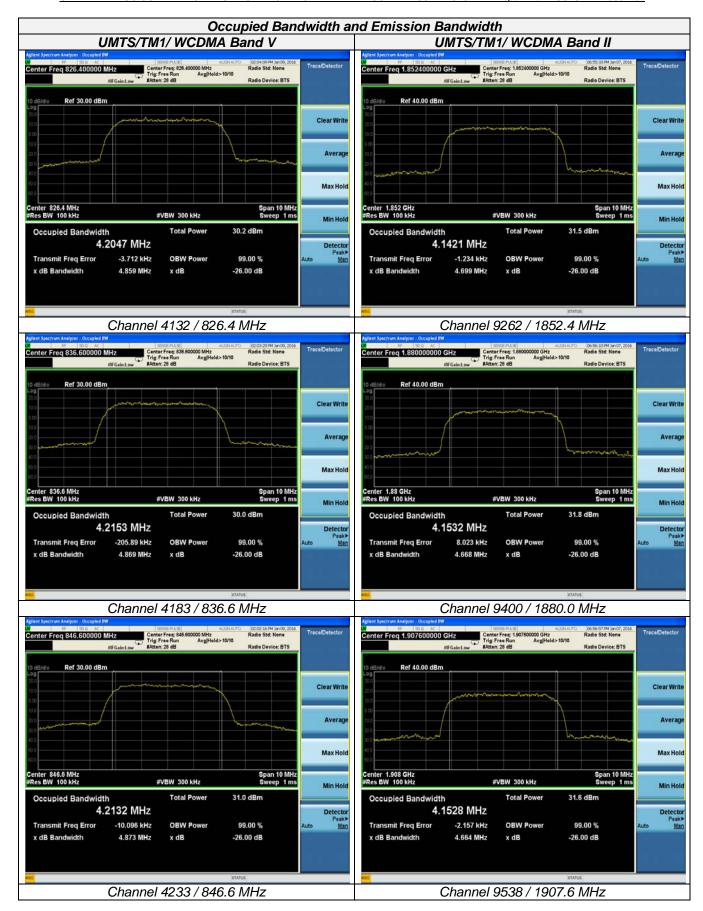

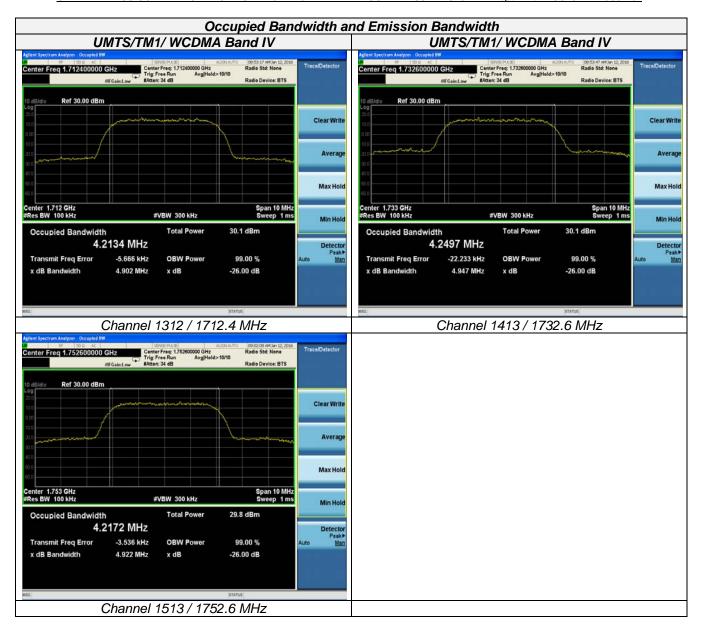


## 4.4 Band Edge Compliance

## **TEST APPLICABLE**

During the process of testing, the EUT was controlled via Digital Radio Communication tester (CMU200) to ensure max power transmission and proper modulation.

## **TEST CONFIGURATION**

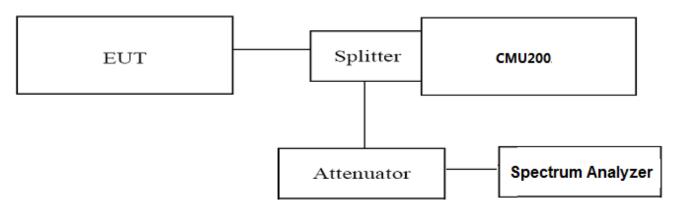

#### **TEST PROCEDURE**

- 1. The EUT was set up for the max output power with pseudo random data modulation;
- 2. The power was measured with Spectrum Analyzer N9020A;
- 3. Set RBW=100KHz,VBW=300KHz,Span=10MHz,SWT=1.267ms,Dector: Peak;


These measurements were done at 2 frequencies for WCDMA Band II/V/IV. (low and high of operational frequency range).

#### **TEST RESULTS**

UMTS/TM1/WCDMA Band V						
Test Mode	Channel	Frequency Band Edg Compliance (MHz) (dBm)		Limits (dBm)	Verdict	
UMTS/TM1/WCDMA	4132	826.40 <-13dBm -13dBm		-13dBm	PASS	
Band V	4233	846.60	<-13dBm	-13dBm	PASS	
UMTS/TM1/WCDMA Band II						
Test Mode	Channel	Frequency (MHz)	Band Edg Compliance (dBm)	Limits (dBm)	Verdict	
UMTS/TM1/WCDMA	9262	1852.40	<-13dBm	-13dBm	PASS	
Band II	d II 9538 1907.60		<-13dBm	-13dBm	PASS	
UMTS/TM1/WCDMA Band IV						
Test Mode	Channel	Frequency (MHz)	Band Edg Compliance (dBm)	Limits (dBm)	Verdict	
UMTS/TM1/WCDMA	1312	1712.40	<-13dBm	-13dBm	PASS	
Band V	1513	1752.60	<-13dBm	-13dBm		

#### Remark:

- 1. Test results including cable loss;
- 2. please refer to following plots;

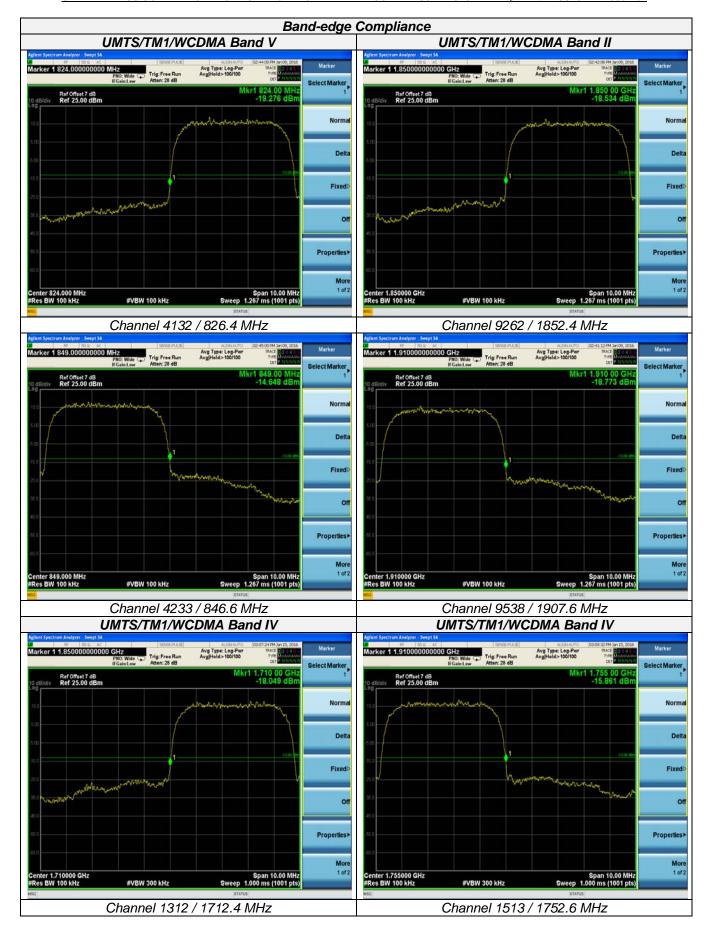


#### 4.5 Spurious Emssion on Antenna Port

#### **TEST APPLICABLE**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA band II/IV, this equates to a frequency range of 9 KHz to 20GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band V. data taken from 30 MHz to 10 GHz.
- 2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; if the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give an optimal sweep time according the selected span and RBW.
- The procedure to get the conducted spurious emission is as follows:
   The trace mode is set to MaxHold to get the highest signal at each frequency;
   Wait 25 seconds;
   Get the result.
- 4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### **TEST CONFIGURATION**

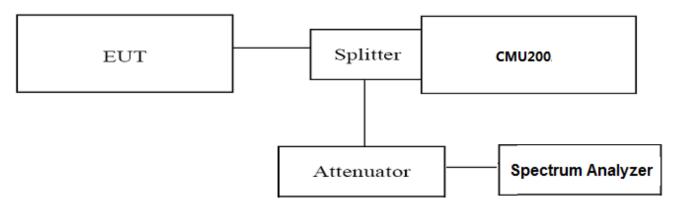

## **TEST PROCEDURE**

- 1. The EUT was set up for the max output power with pseudo random data modulation;
- 2. The power was measured with Spectrum Analyzer N9020A;
- 3. These measurements were done at 3 frequencies for WCDMA band II/IV/V. (low, middle and high of operational frequency range).

#### **TEST LIMIT**

Part 24.238, Part 22.917 and Part 27.54 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


#### **TEST RESULTS**


Test Mode	Channel	Frequency (MHz)	Spurious RF Conducted Emission (dBm)	Limits (dBm)	Verdict
UMTS/TM1/WCDMA	4132	826.40	<-13dBm	-13dBm	
Band V	4183	836.60	<-13dBm	-13dBm	PASS
Dallu V	4233	846.60	<-13dBm	-13dBm	
UMTS/TM1/WCDMA Band II	9262	1852.40	<-13dBm	-13dBm	
	9400	1880.00	<-13dBm	-13dBm	PASS
	9538	1907.60	<-13dBm	-13dBm	
UMTS/TM1/WCDMA	1312	1712.40	<-13dBm	-13dBm	
Band IV	1413	1732.60	<-13dBm	-13dBm	PASS
Dailu IV	1513	1752.60	<-13dBm	-13dBm	

## Remark:

- Test results including cable loss;
   please refer to following plots;

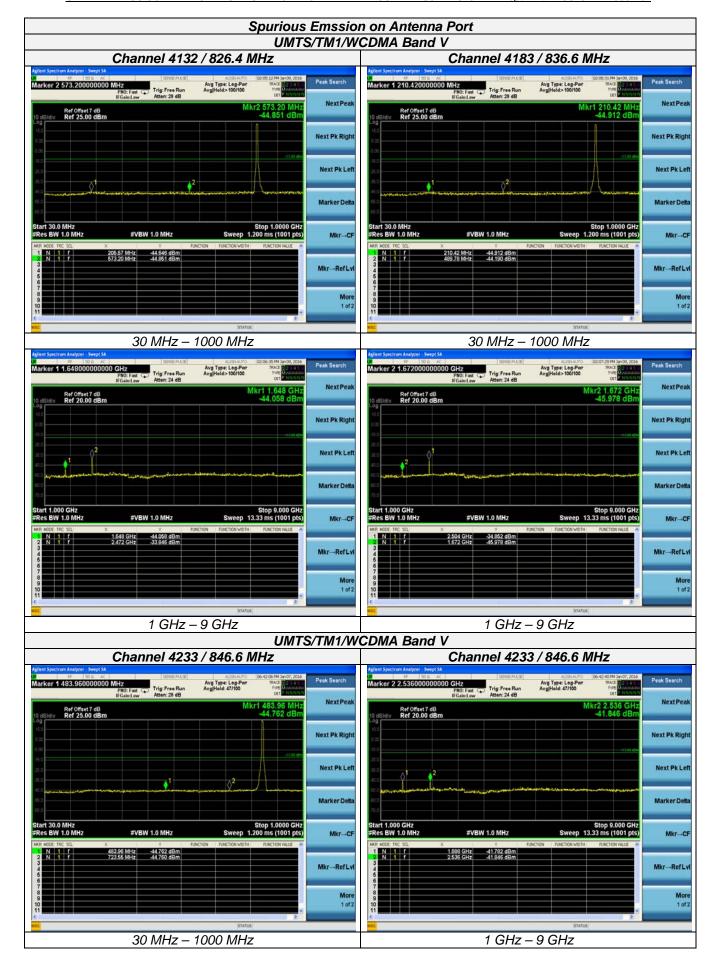

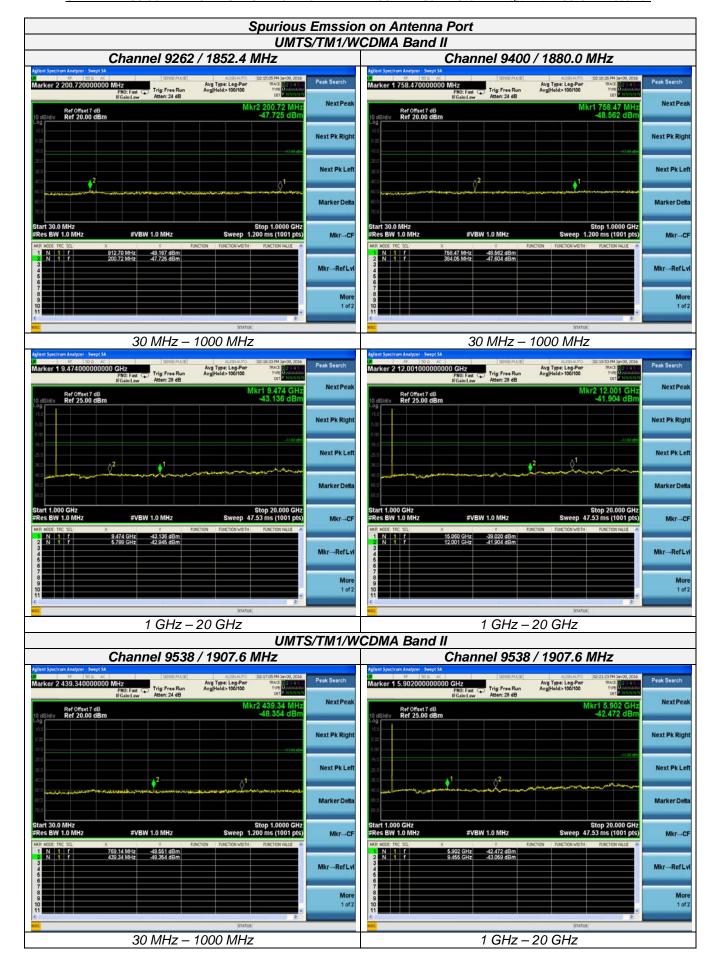

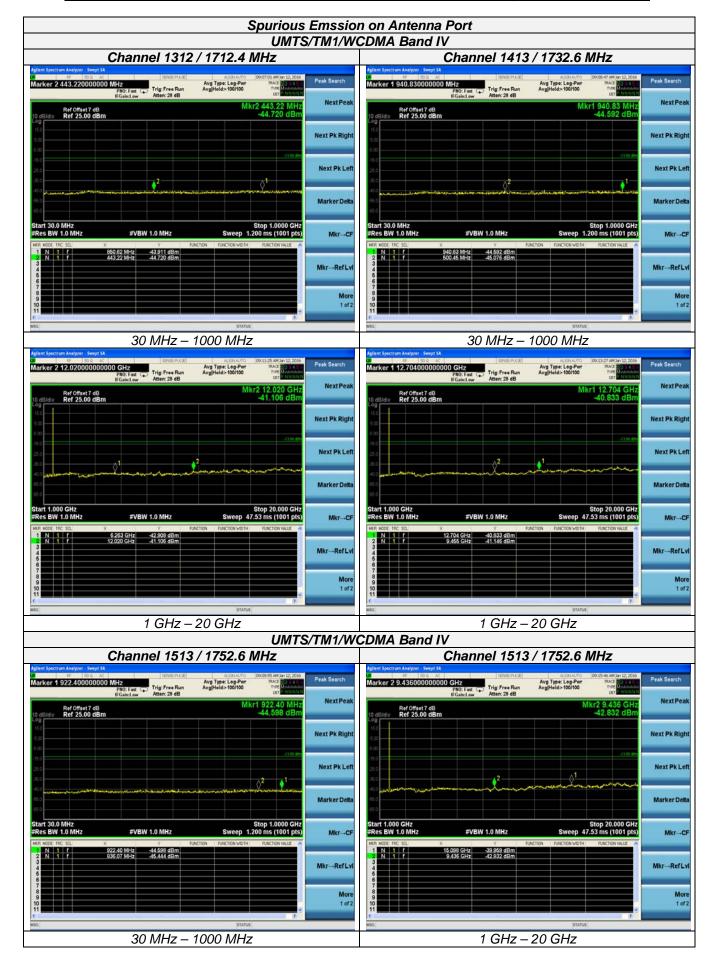

## 4.6 Frequency Stability Test

#### **TEST APPLICABLE**


- 1. According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30℃ to +50℃ centigrade.
- 2. According to FCC Part 2 Section 2.1055 (E) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- 3. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried voltage equipment and the end voltage point was 3.40V.

#### **TEST PROCEDURE**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature;
- Subject the EUT to overnight soak at -30°C;
- 3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on middle channel of WCDMA Band II/IV/V, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
- 4. Repeat the above measurements at 10℃ increments from -30℃ to +50℃. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
- 5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 0.5 hours unpowered, to allow any self-heating to stabilize, before continuing;
- 6. Subject the EUT to overnight soak at +50°C;
- 7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
- 8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
- 9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure;

## **TEST CONFIGURATION**

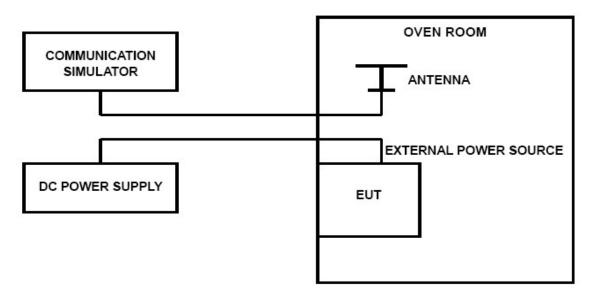

#### **TEST LIMITS**

#### For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the

manufacturer. This transceiver is specified to operate with an input voltage of between 3.40VDC and 4.20VDC, with a nominal voltage of 3.70DC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

#### For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

#### **TEST RESULTS**

	UMTS/TM1/WCDMA Band II					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict	
3.40	20	17	0.01	2.50	PASS	
3.80	20	14	0.01	2.50	PASS	
4.20	20	11	0.01	2.50	PASS	
3.80	-30	17	0.01	2.50	PASS	
3.80	-20	16	0.01	2.50	PASS	
3.80	-10	13	0.01	2.50	PASS	
3.80	0	11	0.01	2.50	PASS	
3.80	10	11	0.01	2.50	PASS	
3.80	20	14	0.01	2.50	PASS	
3.80	30	15	0.01	2.50	PASS	
3.80	40	14	0.01	2.50	PASS	
3.80	50	17	0.01	2.50	PASS	

	UMTS/TM1/WCDMA Band V					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict	
3.40	20	16	0.02	2.50	PASS	
3.80	20	10	0.01	2.50	PASS	
4.20	20	12	0.01	2.50	PASS	
3.80	-30	14	0.02	2.50	PASS	
3.80	-20	13	0.02	2.50	PASS	
3.80	-10	9	0.01	2.50	PASS	
3.80	0	5	0.01	2.50	PASS	
3.80	10	11	0.01	2.50	PASS	
3.80	20	10	0.01	2.50	PASS	
3.80	30	14	0.02	2.50	PASS	
3.80	40	18	0.02	2.50	PASS	
3.80	50	13	0.02	2.50	PASS	


UMTS/TM1/WCDMA Band IV					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
3.40	20	22	0.01	2.50	PASS
3.80	20	16	0.01	2.50	PASS
4.20	20	17	0.01	2.50	PASS
3.80	-30	25	0.01	2.50	PASS
3.80	-20	24	0.01	2.50	PASS
3.80	-10	22	0.01	2.50	PASS
3.80	0	15	0.01	2.50	PASS
3.80	10	16	0.01	2.50	PASS
3.80	20	16	0.01	2.50	PASS
3.80	30	18	0.01	2.50	PASS
3.80	40	19	0.01	2.50	PASS
3.80	50	21	0.01	2.50	PASS

## 4.7 Peak-to-Average Ratio (PAR)

#### **LIMIT**

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

#### **TEST CONFIGURATION**

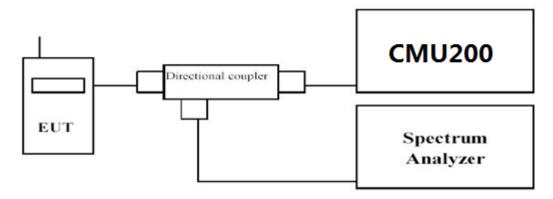

## **TEST PROCEDURE**


- 1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF
- Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
   Set the number of counts to a value that stabilizes the measured CCDF curve;
- 4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms,
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- 5. Record the maximum PAPR level associated with a probability of 0.1%.

#### **TEST RESULTS**

Test Mode	Channel	Frequency (MHz)	PAPR Value (dB)	Limits (dB)	Verdict
UMTS/TM1/	9262	1852.40	3.28	13.0	PASS
WCDMA Band	9400	1880.00	3.27	13.0	PASS
II	9538	1907.60	3.31	13.0	PASS
UMTS/TM1/	1312	1712.40	3.10	13.0	PASS
WCDMA Band	1413	1732.60	3.15	13.0	PASS
IV	1513	1752.60	3.16	13.0	PASS

#### Remark:

- 1. Test results including cable loss;
- 2. please refer to following plots;

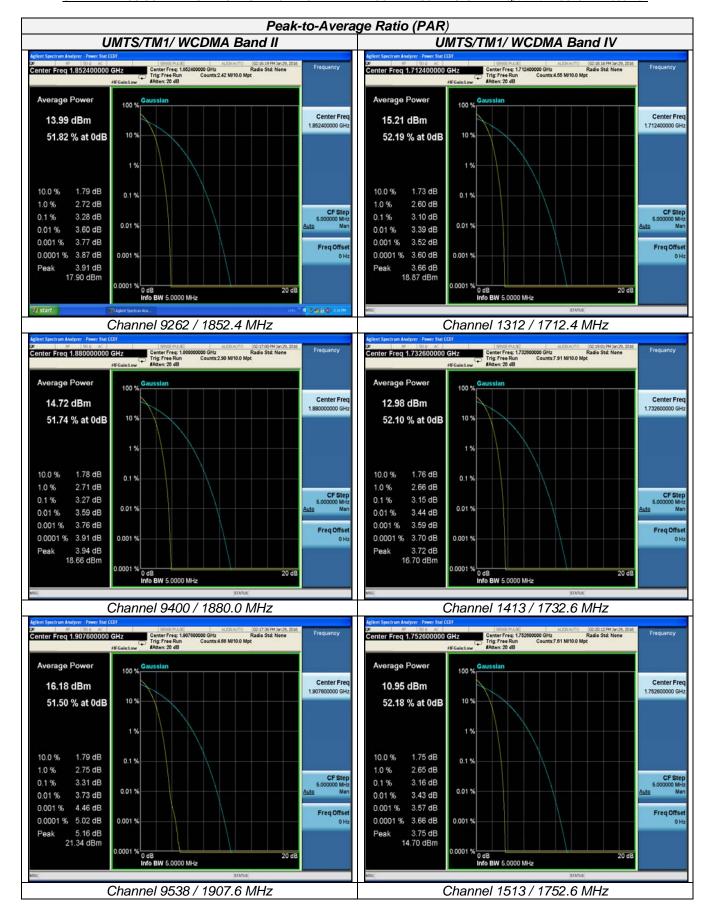

## 5 Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

## 6 External Photos of the EUT

Please refer to separated files for External Photos of the EUT.

## 7 Internal Photos of the EUT

Please refer to separated files for Internal Photos of the EUT.

End	of	Report
-----	----	--------