





# RADIO TEST REPORT

Report No:STS1901080W02

Issued for

PB Inc

1269 120th Ave NE Bellevue Washington 98005 United States

Product Name:	BlackCard
Brand Name:	Pebblebee
Model Name:	PB-601-B
Series Model:	N/A
FCC ID:	2AG5OPB-601-B
Test Standard:	FCC Part 15.247

В

Any reproduction of this document must be done in full. No single part of this document may be reproduced we permission from STS, All Test Data Presented in this report is only applicable to presented Test sample VAL





# TEST RESULT CERTIFICATION

Applicant's name ...... PB Inc

Address ...... 1269 120th Ave NE Bellevue Washington 98005 United States

Manufacture's Name.....: SHENZHEN XINFEIJIA ELECTRONIC CO., LTD

Address ...... Floor 3, Building D, JiaLe Technology park, #3 of ChuangWei road,

HeShuiKou community, MaTian Street, GuangMing new district,

Shenzhen city

**Product description** 

Product Name .....: BlackCard

Brand Name .....: Pebblebee

Model Name ...... PB-601-B

Series Model .....: N/A

Test Standards...... FCC Part15.247

Test procedure ...... ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test .....:

Date (s) of performance of tests...... 16 Jan. 2019 ~ 23 Jan. 2019

Date of Issue...... 23 Jan. 2019

Test Result..... Pass

Testing Engineer :

Chris chen

Technical Manager

Authorized Signatory:

(Sunday Hu)

(Vita Li)



## **Table of Contents**

1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 TEST PROCEDURE	15
3.3 TEST SETUP	15
3.4 EUT OPERATING CONDITIONS	15
3.5 TEST RESULTS	16
4. RADIATED EMISSION MEASUREMENT	18
4.1 RADIATED EMISSION LIMITS	18
4.2 TEST PROCEDURE	19
4.3 TEST SETUP	20
4.4 EUT OPERATING CONDITIONS	20
4.5 FIELD STRENGTH CALCULATION	21
4.6 TEST RESULTS	22
5. CONDUCTED SPURIOUS & BAND EDGE EMISSION	30
5.1 LIMIT	30
5.2 TEST PROCEDURE	30
5.3 TEST SETUP	30
5.4 EUT OPERATION CONDITIONS	30
5.5 TEST RESULTS	31
6. POWER SPECTRAL DENSITY TEST	34
6.1 LIMIT	34
6.2 TEST PROCEDURE	34
6.3 TEST SETUP	34
6.4 EUT OPERATION CONDITIONS	34







## **Table of Contents**

6.5 TEST RESULTS	35
7. BANDWIDTH TEST	37
7.1 LIMIT	37
7.2 TEST PROCEDURE	37
7.3 TEST SETUP	37
7.4 EUT OPERATION CONDITIONS	37
7.5 TEST RESULTS	38
8. PEAK OUTPUT POWER TEST	40
8.1 LIMIT	40
8.2 TEST PROCEDURE	40
8.3 TEST SETUP	40
8.4 EUT OPERATION CONDITIONS	40
8.5 TEST RESULTS	41
9. ANTENNA REQUIREMENT	42
9.1 STANDARD REQUIREMENT	42
9.2 EUT ANTENNA	42
10. EUT TEST PHOTO	43



Page 5 of 43 Report No.: STS1901080W02

# **Revision History**

Rev.	Rev. Issue Date Report NO.		Issue Date Report NO. Effect Page Conte		
00	00 23 Jan. 2019 STS1901080W02		ALL	Initial Issue	





# 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards: KDB 558074 D01 DTS Meas Guidance v05

FCC Part 15.247,Subpart C					
Standard Section	Test Item	Judgment	Remark		
15.207	Conducted Emission	PASS			
15.247 (a)(2)	6dB Bandwidth	PASS			
15.247 (b)(3)	Output Power	PASS			
15.247 (c)	Radiated Spurious Emission	PASS			
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS			
15.247 (e)	Power Spectral Density	PASS			
15.205	Restricted Band Edge Emission	PASS			
Part 15.247(d)/part 15.209(a)	Band Edge Emission	PASS			
15.203	Antenna Requirement	PASS			

# NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013





### 1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add.: 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,

Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

FCC Registration No.: 625569

IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $\mathbf{y} \pm \mathbf{U}$  where expended uncertainty  $\mathbf{U}$  is based on a standard uncertainty multiplied by a coverage factor of  $\mathbf{k=2}$  providing a level of confidence of approximately 95 %  $^{\circ}$ 

No.	Item	Uncertainly
1	RF output power,conducted	±0.71dB
2	Unwanted Emissions,conducted	±0.63dB
3	All emissions,radiated 30-200MHz	±3.43dB
4	All emissions,radiated 200MHz-1GHz	±3.57dB
5	All emissions,radiated>1G	±4.13dB
6	Conducted Emission(9KHz-150KHz)	±3.18dB
7	Conducted Emission(150KHz-30MHz)	±2.70dB



# 2. GENERAL INFORMATION

## 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	BlackCard			
Trade Name	Pebblebee			
Model Name	PB-601-B			
Series Model	N/A			
Model Difference	N/A			
	The EUT is a Black(	Card		
	Operation Frequency:	2402~2480 MHz		
	Modulation Type:	GFSK		
Product Description	Radio Technology	BLE		
	Number Of Channe	1 40		
	Antenna Designation:	Please see Note 3.		
	Antenna Gain (dBi)	2 dBi		
Channel List	Please refer to the Note 2.			
Adapter	Input: 5V Output: 4.2V			
Battery	Rated Voltage: DC 3 Charge Limit: DC 4.2 Capacity: 52mAh			
Hardware version number	V1.0			
Software version number	V1.0			
Radio Hardware version	MPLY.LR9.W1444,MD.LWTG.MP.V79.P4			
Radio Software version	SC6531_W13.04.05_Release			
Test Software	3.18.19			
RF Power Setting TEST				
Software (power class)	(1)2.4 GHz:GFSK(1Mbps):-6.5			
Contraro (porror olaco)	Please refer to the User's Manual			

## Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2

	Channel List						
Channel	nannel Frequency (MHz) Channel Frequency (MHz) Channel (MHz) Channel				Channel	Frequenc y (MHz)	
37	2402	09	2422	18	2442	28	2462
00	2404	10	2424	19	2444	29	2464
01	2406	38	2426	20	2446	30	2466
02	2408	11	2428	21	2448	31	2468
03	2410	12	2430	22	2450	32	2470
04	2412	13	2432	23	2452	33	2472
05	2414	14	2434	24	2454	34	2474
06	2416	15	2436	25	2456	35	2476
07	2418	16	2438	26	2458	36	2478
80	2420	17	2440	27	2460	39	2480

3.

# Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	Pebblebee	PB-601-B	PCB Antenna	N/A	2	BLE ANT.



### 2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively..

Worst Mode	Description	Data/Modulation
Mode 1	TX CH37(2402MHz)	1 MHz/GFSK
Mode 2 TX CH17(2440MHz)		1 MHz/GFSK
Mode 3	TX CH39(2480MHz)	1 MHz/GFSK

### Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report
- (3) Controlled using a bespoke application on the laptop PC supplied by the customer. The application was used to enable a continuous transmission mode and to select the test channels, data rates and modulation schemes as required.

### For AC Conducted Emission

	Test Case
AC Conducted Emission	Mode 4 : Keeping BT TX




# 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

E-1 EUT

# **Conducted Emission Test**





## 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Adapter	Pebblebee	PB-601-B	N/A	N/A
C-1	DC Cable	N/A	110cm	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
N/A	N/A	N/A	N/A	N/A	N/A

### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <sup>®</sup> Length <sup>a</sup> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



Report No.: STS1901080W02

# 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

# Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
Signal Analyzer	Agilent	N9020A	MY51110105	2018.03.08	2019.03.07
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.1
Horn Antenna	SCHWARZBEC K	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (15G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2019.03.10
Pre-mplifier(0.1M-3GHz)	EM	EM330	060665	2018.10.13	2019.10.12
PreAmplifier (1G-18GHz)	SKET	LNPA-01018G-4 5	SK2018080901	2018.10.13	2019.10.12
Temperature & Humitidy	HH660	Mieo	N/A	2018.10.11	2019.10.10
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A

# Conduction Test equipment

Kind of Favinas and	Manufactura	Tura Na	Carial Na	Last	Calibrated
Kind of Equipment	Manufacturer	Type No.	Serial No.	calibration	until
Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
LISN	R&S	ENV216	101242	2018.10.11	2019.10.10
LISN	EMCO	3810/2NM	23625	2018.10.11	2019.10.10
Temperature & Humitidy	HH660	Mieo	N/A	2018.10.11	2019.10.10

# **RF Connected Test**

Kind of Equipment	Manufacturer	Туре No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15l00041SNO0 3	2018.10.13	2019.10.12
Signal Analyzer	Agilent	N9020A	MY49100060	2018.10.13	2019.10.12
Temperature & Humitidy	HH660	Mieo	N/A	2018.10.11	2019.10.10



## 3. EMC EMISSION TEST

## 3.1 CONDUCTED EMISSION MEASUREMENT

## 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

EDECLIENCY (MLL-)	Conducted Emission limit (dBuV)		
FREQUENCY (MHz)	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	
0.50 -5.0	56.00	46.00	
5.0 -30.0	60.00	50.00	

### Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

# The following table is the setting of the receiver


Receiver Parameters	Setting	
Attenuation	10 dB	
Start Frequency	0.15 MHz	
Stop Frequency	30 MHz	
IF Bandwidth	9 kHz	



### 3.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

### 3.3 TEST SETUP

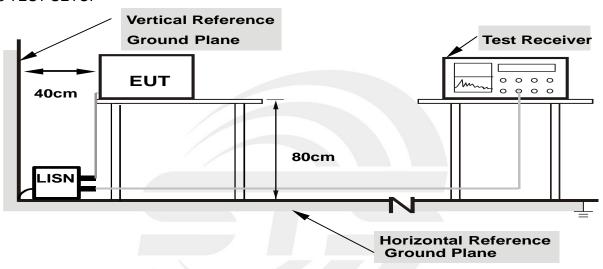

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




# 3.5 TEST RESULTS

Temperature:	21.6 ℃	Relative Humidity:	65%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

Frequency	Reading	Correct	Result	Limit	Margin	Domork
(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	Remark
0.1677	27.60	20.23	47.83	65.07	-17.24	QP
0.1677	15.59	20.23	35.82	55.07	-19.25	AVG
0.2744	26.63	20.59	47.22	60.98	-13.76	QP
0.2744	13.96	20.59	34.55	50.98	-16.43	AVG
0.6060	20.71	20.36	41.07	56.00	-14.93	QP
0.6060	2.93	20.36	23.29	46.00	-22.71	AVG
0.8460	15.37	20.21	35.58	56.00	-20.42	QP
0.8460	-1.41	20.21	18.80	46.00	-27.20	AVG
7.6100	10.28	19.95	30.23	60.00	-29.77	QP
7.6100	-1.86	19.95	18.09	50.00	-31.91	AVG
17.3620	9.60	19.96	29.56	60.00	-30.44	QP
17.3620	-2.58	19.96	17.38	50.00	-32.62	AVG

# Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Margin = Result (Result = Reading + Factor )—Limit

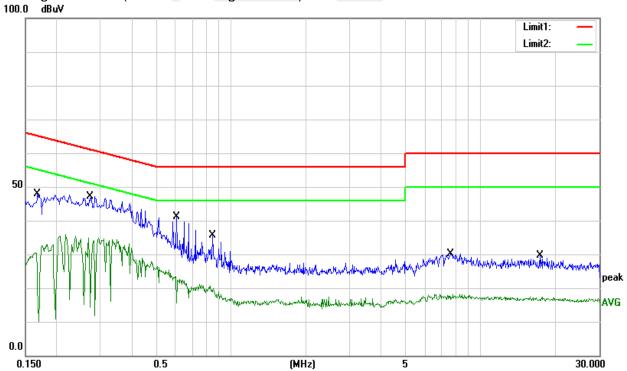




Page 17 of 43 Report No.: STS1901080W02

Temperature:	21.6 ℃	Relative Humidity:	65%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	Remark
0.3140	25.73	20.73	46.46	59.86	-13.40	QP
0.3140	15.74	20.73	36.47	49.86	-13.39	AVG
0.3832	25.23	20.57	45.80	58.21	-12.41	QP
0.3832	13.91	20.57	34.48	48.21	-13.73	AVG
0.5980	22.61	20.35	42.96	56.00	-13.04	QP
0.5980	6.76	20.35	27.11	46.00	-18.89	AVG
0.7060	21.80	20.28	42.08	56.00	-13.92	QP
0.7060	-0.03	20.28	20.25	46.00	-25.75	AVG
7.9940	9.66	19.88	29.54	60.00	-30.46	QP
7.9940	-3.52	19.88	16.36	50.00	-33.64	AVG
20.7140	8.73	19.89	28.62	60.00	-31.38	QP
20.7140	-3.99	19.89	15.90	50.00	-34.10	AVG

# Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Margin = Result (Result = Reading + Factor )-Limit 100.0 dBuV

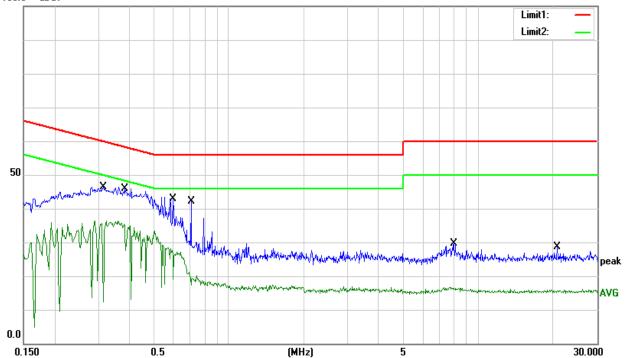



### 4. RADIATED EMISSION MEASUREMENT

### 4.1 RADIATED EMISSION LIMITS

in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

# LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

	(dBuV/	(dBuV/m) (at 3M)		
FREQUENCY (MHz)	PEAK	AVERAGE		
Above 1000	74	54		

### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

## For Radiated Emission

Spectrum Parameter	Setting		
Attenuation	Auto		
Detector	Peak		
Start Frequency	1000 MHz(Peak/AV)		
Stop Frequency	10th carrier hamonic(Peak/AV)		
RB / VB (emission in restricted	1 MHz / 3 MHz		
band)	i ivinz / 3 ivinz		

# For Band edge

Spectrum Parameter	Setting		
Detector	Peak		
Start/Stop Frequency	Lower Band Edge: 2300 to 2403 MHz		
	Upper Band Edge: 2479 to 2500 MHz		
RB / VB (emission in restricted band)	1 MHz / 3 MHz		





Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~150kHz / RB 200Hz for PK & AV
	150kHz~490kHz / RB 9kHz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### **4.2 TEST PROCEDURE**


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos. Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.




### 4.3 TEST SETUP


# (A) Radiated Emission Test-Up Frequency Below 30MHz

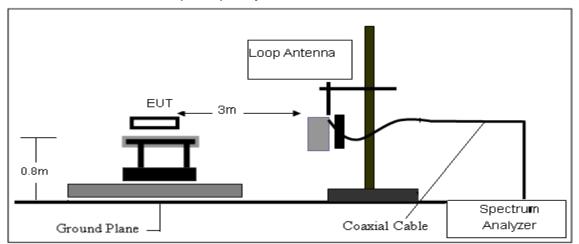

# (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

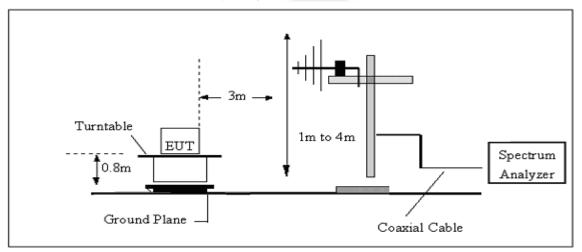

## (C) Radiated Emission Test-Up Frequency Above 1GHz

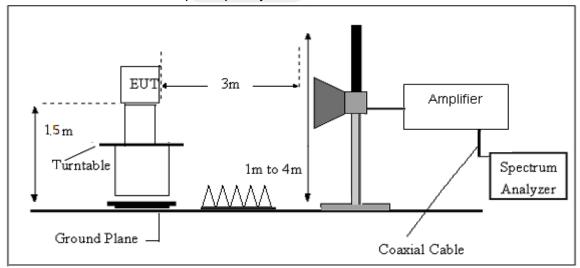

### 4.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



# 4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

Factor=AF+CL-AG





# 4.6 TEST RESULTS

(Between 9KHz - 30 MHz)

Temperature:	<b>24.7</b> ℃	Relative Humidtity:	58%
Test Voltage:	DC 3.7V	Polarization:	
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				PASS
				PASS

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.




# (30MHz -1000MHz)

Temperature:	<b>24.7</b> ℃	Relative Humidtity:	58%			
Test Voltage:	DC 3.7V	Phase:	Horizontal			
Test Mode:	Mode1/2/3(Mode 3-1M worst mode)					

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
66.2660	47.86	-24.19	23.67	40.00	-16.33	QP
161.4740	39.33	-18.62	20.71	43.50	-22.79	QP
233.3487	35.72	-18.24	17.48	46.00	-28.52	QP
550.9480	28.97	-6.76	22.21	46.00	-23.79	QP
857.0247	29.13	-2.70	26.43	46.00	-19.57	QP
979.1802	30.99	-0.16	30.83	54.00	-23.17	QP

### Remark:

1. Margin = Result (Result = Reading + Factor )-Limit

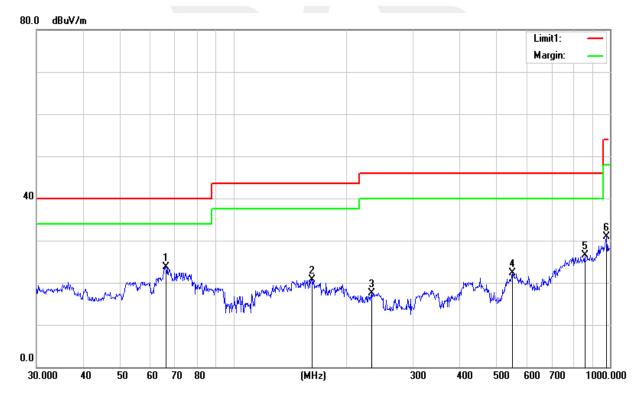




Page 24 of 43 Report No.: STS1901080W02

Temperature:	24.7 ℃	Relative Humidtity:	58%				
Test Voltage:	DC 3.7V	Phase:	Vertical				
Test Mode:	Mode1/2/3(Mode 3-1M worst mode)						

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
107.5100	41.95	-18.55	23.40	43.50	-20.10	QP
216.7828	40.33	-19.32	21.01	46.00	-24.99	QP
616.3718	31.76	-6.59	25.17	46.00	-20.83	QP
968.9338	28.91	-0.13	28.78	54.00	-25.22	QP
40.2757	39.64	-16.47	23.17	40.00	-16.83	QP
34.0363	37.50	-13.26	24.24	40.00	-15.76	QP

### Remark:

1. Margin = Result (Result = Reading + Factor )-Limit

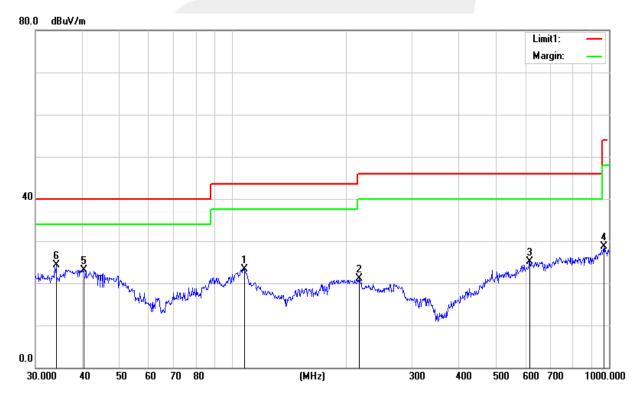





# (1GHz-25GHz)Restricted band and Spurious emission Requirements

# Low Channel

				Antenna	Corrected	Emission				
Frequency	Reading	Amplifier	Loss	Factor	Factor	Level	Limits	Margin	Detector	
(MHz)	(dBµV)	(dB)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	Comment
				Low	Channel (2402 I	MHz)				
3264.63	61.32	44.70	6.70	28.20	-9.80	51.52	74.00	-22.48	PK	Vertical
3264.63	50.44	44.70	6.70	28.20	-9.80	40.64	54.00	-13.36	AV	Vertical
3264.66	61.17	44.70	6.70	28.20	-9.80	51.37	74.00	-22.63	PK	Horizontal
3264.66	49.85	44.70	6.70	28.20	-9.80	40.05	54.00	-13.95	AV	Horizontal
4804.33	58.51	44.20	9.04	31.60	-3.56	54.95	74.00	-19.05	PK	Vertical
4804.33	49.46	44.20	9.04	31.60	-3.56	45.90	54.00	-8.10	AV	Vertical
4804.46	59.52	44.20	9.04	31.60	-3.56	55.96	74.00	-18.04	PK	Horizontal
4804.46	50.07	44.20	9.04	31.60	-3.56	46.51	54.00	-7.49	AV	Horizontal
5359.73	48.84	44.20	9.86	32.00	-2.34	46.50	74.00	-27.50	PK	Vertical
5359.73	39.40	44.20	9.86	32.00	-2.34	37.06	54.00	-16.94	AV	Vertical
5359.84	48.46	44.20	9.86	32.00	-2.34	46.12	74.00	-27.88	PK	Horizontal
5359.84	38.49	44.20	9.86	32.00	-2.34	36.15	54.00	-17.85	AV	Horizontal
7205.85	53.94	43.50	11.40	35.50	3.40	57.34	74.00	-16.66	PK	Vertical
7205.85	43.55	43.50	11.40	35.50	3.40	46.95	54.00	-7.05	AV	Vertical
7205.90	54.87	43.50	11.40	35.50	3.40	58.27	74.00	-15.73	PK	Horizontal
7205.90	43.91	43.50	11.40	35.50	3.40	47.31	54.00	-6.69	AV	Horizontal





# Mid Channel

				Antenna	Corrected	Emission				
Frequency	Reading	Amplifier	Loss	Factor	Factor	Level	Limits	Margin	Detector	
(MHz)	(dBµV)	(dB)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	Comment
				Mid	Channel (2440 M	MHz)				
3264.78	62.16	44.70	6.70	28.20	-9.80	52.36	74.00	-21.64	PK	Vertical
3264.78	50.71	44.70	6.70	28.20	-9.80	40.91	54.00	-13.09	AV	Vertical
3264.77	61.13	44.70	6.70	28.20	-9.80	51.33	74.00	-22.67	PK	Horizontal
3264.77	50.36	44.70	6.70	28.20	-9.80	40.56	54.00	-13.44	AV	Horizontal
4880.53	59.57	44.20	9.04	31.60	-3.56	56.01	74.00	-17.99	PK	Vertical
4880.53	49.26	44.20	9.04	31.60	-3.56	45.70	54.00	-8.30	AV	Vertical
4880.46	59.25	44.20	9.04	31.60	-3.56	55.69	74.00	-18.31	PK	Horizontal
4880.46	49.12	44.20	9.04	31.60	-3.56	45.56	54.00	-8.44	AV	Horizontal
5359.89	48.56	44.20	9.86	32.00	-2.34	46.22	74.00	-27.78	PK	Vertical
5359.89	39.60	44.20	9.86	32.00	-2.34	37.26	54.00	-16.74	AV	Vertical
5359.75	48.53	44.20	9.86	32.00	-2.34	46.19	74.00	-27.81	PK	Horizontal
5359.75	38.21	44.20	9.86	32.00	-2.34	35.87	54.00	-18.13	AV	Horizontal
7320.95	54.04	43.50	11.40	35.50	3.40	57.44	74.00	-16.56	PK	Vertical
7320.95	44.77	43.50	11.40	35.50	3.40	48.17	54.00	-5.83	AV	Vertical
7320.78	54.47	43.50	11.40	35.50	3.40	57.87	74.00	-16.13	PK	Horizontal
7320.78	43.56	43.50	11.40	35.50	3.40	46.96	54.00	-7.04	AV	Horizontal





# High Channel

				Antenna	Corrected	Emission				
Frequency	Reading	Amplifier	Loss	Factor	Factor	Level	Limits	Margin	Detector	
(MHz)	(dBµV)	(dB)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	Comment
				High	Channel (2480	MHz)				
3264.89	61.55	44.70	6.70	28.20	-9.80	51.75	74.00	-22.25	PK	Vertical
3264.89	49.94	44.70	6.70	28.20	-9.80	40.14	54.00	-13.86	AV	Vertical
3264.57	62.17	44.70	6.70	28.20	-9.80	52.37	74.00	-21.63	PK	Horizontal
3264.57	49.85	44.70	6.70	28.20	-9.80	40.05	54.00	-13.95	AV	Horizontal
4960.43	59.03	44.20	9.04	31.60	-3.56	55.47	74.00	-18.53	PK	Vertical
4960.43	50.03	44.20	9.04	31.60	-3.56	46.47	54.00	-7.53	AV	Vertical
4960.55	58.42	44.20	9.04	31.60	-3.56	54.86	74.00	-19.14	PK	Horizontal
4960.55	49.30	44.20	9.04	31.60	-3.56	45.74	54.00	-8.26	AV	Horizontal
5359.77	49.42	44.20	9.86	32.00	-2.34	47.08	74.00	-26.92	PK	Vertical
5359.77	39.81	44.20	9.86	32.00	-2.34	37.47	54.00	-16.53	AV	Vertical
5359.70	47.99	44.20	9.86	32.00	-2.34	45.65	74.00	-28.35	PK	Horizontal
5359.70	38.68	44.20	9.86	32.00	-2.34	36.34	54.00	-17.66	AV	Horizontal
7439.86	54.77	43.50	11.40	35.50	3.40	58.17	74.00	-15.83	PK	Vertical
7439.86	44.53	43.50	11.40	35.50	3.40	47.93	54.00	-6.07	AV	Vertical
7439.95	54.44	43.50	11.40	35.50	3.40	57.84	74.00	-16.16	PK	Horizontal
7439.95	43.63	43.50	11.40	35.50	3.40	47.03	54.00	-6.97	AV	Horizontal

### Note:

The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.


Factor = Antenna Factor + Cable Loss - Pre-amplifier.
 Emission Level = Reading + Factor






# 4.6 TEST RESULTS (Restricted Bands Requirements)

# **GFSK-Low** Horizontal

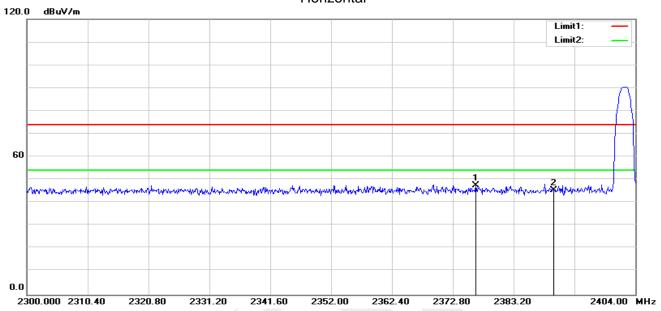

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2376.752	58.19	-10.56	47.63	74.00	-26.37	peak
2	2390.000	55.99	-10.48	45.51	74.00	-28.49	peak


## Vertical

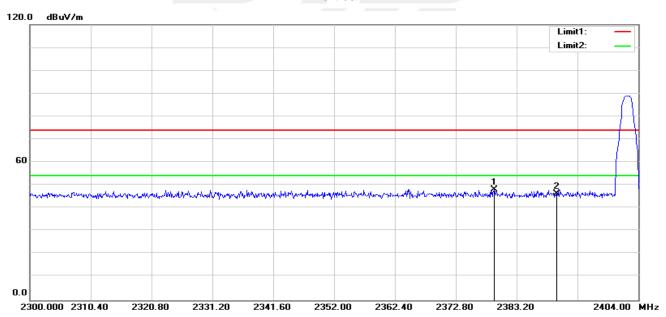

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2379.352	58.65	-10.54	48.11	74.00	-25.89	peak
2	2390.000	56.88	-10.48	46.40	74.00	-27.60	peak


Page 29 of 43 Report No.: STS1901080W02

# **GFSK-High** Horizontal

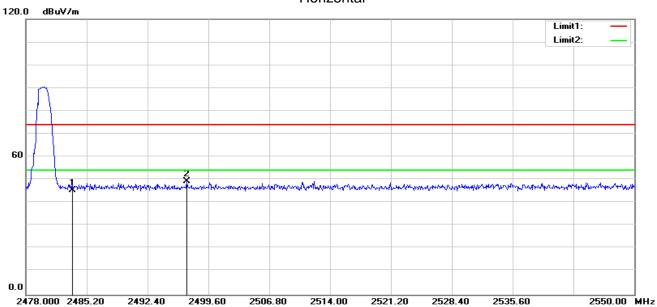

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	55.38	-9.99	45.39	74.00	-28.61	peak
2	2497.008	59.33	-9.92	49.41	74.00	-24.59	peak

## Vertical

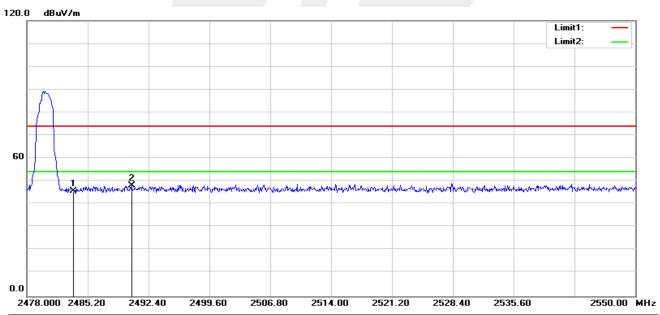

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	55.89	-9.99	45.90	74.00	-28.10	peak
2	2490.384	58.07	-9.95	48.12	74.00	-25.88	peak



### 5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

### 5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


### **5.2 TEST PROCEDURE**

Spectrum Parameter	Setting		
Detector	Peak		
Start/Stop Frequency	30 MHz to 10th carrier harmonic		
RB / VB (emission in restricted band)	100 KHz/300 KHz		
Trace-Mode:	Max hold		

# For Band edge

Spectrum Parameter	Setting		
Detector	Peak		
Start/Stan Fraguenay	Lower Band Edge: 2300 – 2403 MHz		
Start/Stop Frequency	Upper Band Edge: 2479 – 2500 MHz		
RB / VB (emission in restricted band)	100 KHz/300 KHz		
Trace-Mode:	Max hold		

### 5.3 TEST SETUP



The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 5.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.






# 5.5 TEST RESULTS


Temperature:	25 ℃	Relative Humidity:	50%
Test Voltage:	DC 3.7V	LIEST MUNCE.	TX Mode /CH37, CH17, CH39

## CH 37

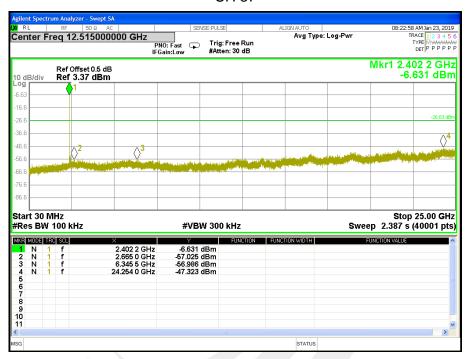




### **CH 17**

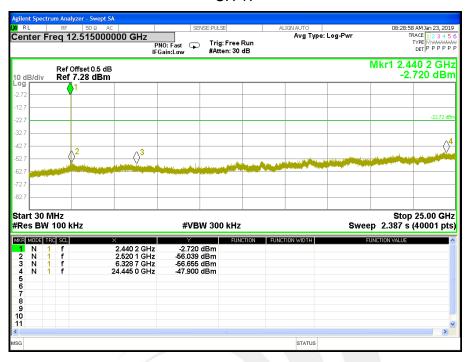


### **CH 39**

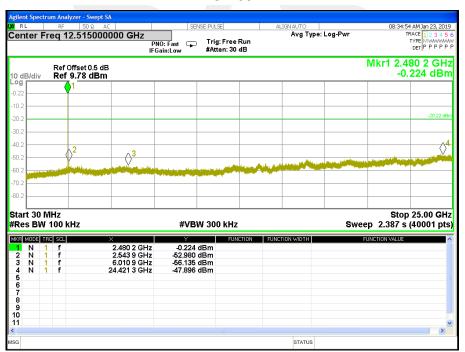




## **CH 37**

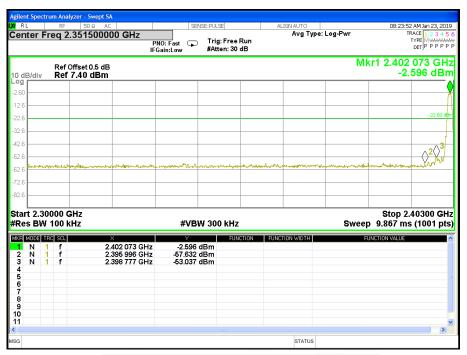

## **CH 39**

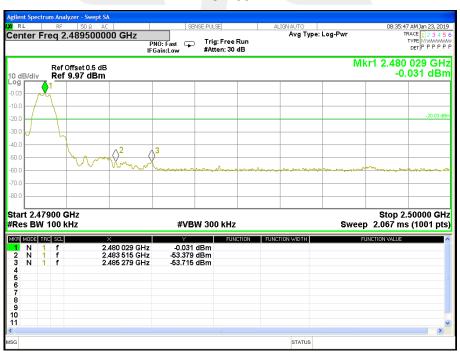



### 6. POWER SPECTRAL DENSITY TEST

### 6.1 LIMIT

FCC Part 15.247,Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247(e)	Power Spectral Density	≤8 dBm (RBW≥3KHz)	2400-2483.5	PASS	

### **6.2 TEST PROCEDURE**

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS channel bandwidth.
- 3. Set the RBW to:  $100 \text{ kHz} \ge \text{RBW} \ge 3 \text{ kHz}$ .
- 4. Set the VBW  $\geq$  3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

### **6.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.






# 6.5 TEST RESULTS

Temperature:	25 ℃	Relative Humidity:	60%
Test Voltage:	DC 3.7V	LIEST MINUAE.	TX Mode /CH37, CH17, CH39

Frequency	Power Density (dBm/3kHz)	Limit (dBm/3KHz)	Result
2402 MHz	-18.145	≤8	PASS
2440 MHz	-16.589	≤8	PASS
2480 MHz	-15.519	≤8	PASS

## **TX CH37**

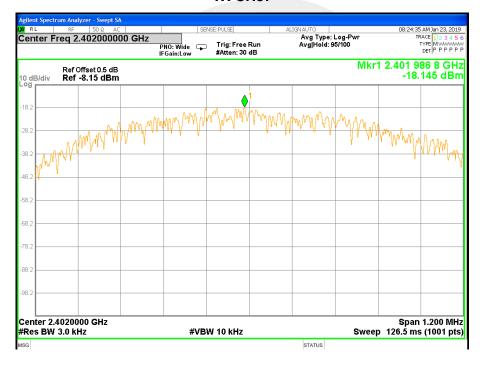




## **TX CH17**



### **TX CH39**

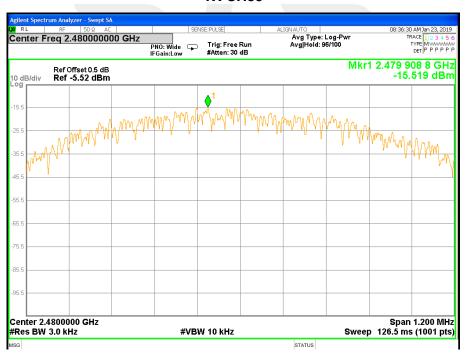



### 7. BANDWIDTH TEST

### **7.1 LIMIT**

FCC Part 15.247,Subpart C				
Section	Test Item	Limit Frequency Range (MHz) Result		
15.247(a)(2)	6dB Bandwidth	>= 500KHz	2400-2483.5	PASS

### 7.2 TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test	
Detector	Peak	
RBW	For 6 dB Bandwidth :100KHz	
VBW	For 6dB Bandwidth : ≥3 × RBW	
Trace	Max hold	
Sweep	Auto	

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

# 7.3 TEST SETUP

EUT	SPECTRUM
	ANALYZER

## 7.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.





# 7.5 TEST RESULTS

Temperature:	25 ℃	Relative Humidity:	60%
Test Voltage:	DC 3.7V	LIEST MINUAE.	TX Mode /CH37, CH17, CH39


Frequency	6dB Bandwidth (MHz)	Channel Separation (MHz)	Result
2402 MHz	0.683	>=500KHz	PASS
2440 MHz	0.674	>=500KHz	PASS
2480 MHz	0.696	>=500KHz	PASS

## 6dB Bandwidth TX CH 37





### 6dB Bandwidth TX CH 17

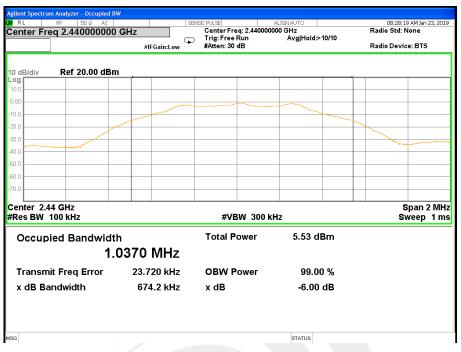

### 6dB Bandwidth TX CH 39





# 8. PEAK OUTPUT POWER TEST

### 8.1 LIMIT

FCC Part 15.247,Subpart C				
Section Test Item Limit Frequency Range (MHz) Result				Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

### **8.2 TEST PROCEDURE**

a. The EUT was directly connected to the Power Sensor&PC

# 8.3 TEST SETUP



## 8.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



Report No.: STS1901080W02



8.5 TEST RESULTS

Temperature:	25 ℃	Relative Humidity:	60%
Test Voltage:	DC 3.7V	LIEST MINUAE.	TX Mode /CH37, CH17, CH39

TX Mode					
Test Channel	Frequency	Conducted Output Power		LIMIT	
Test Charmer	(MHz)	Peak (dBm)	AVG (dBm)	dBm	
CH37	2402	-1.52	-4.20	30	
CH17	2440	-0.13	-2.78	30	
CH39	2480	0.51	-2.08	30	



# 9. ANTENNA REQUIREMENT

## 9.1 STANDARD REQUIREMENT

15.203 and RSS-GenIssue 5 requirement: For intentional device, according to 15.203 and RSS-GenIssue 5: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

## 9.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.





# 10. EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\* \* \* \* END OF THE REPORT \* \* \* \*

