

# EMC TEST REPORT



Report No.: 16020056-FCC-E

Supersede Report No.: N/A

Applicant	WHISPER USA INC	
Product Name	DIGITAL PRIME	
Main Model	WSDIGR(Receiver)	
Serial Model No	WSDIGR000000U	
Test Standard	FCC Part 15 Subpart B Class B:2015, ANSI C63.4: 2014	
Test Date	January 19, 2016	
Issue Date	January 25, 2016	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Deon Dai	Herve Idoko	
Deon Dai Test Engineer	Herve Idoko Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and  
Technology Development Park, Nanjing, China

Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: China@siemic.com.cn

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	16020056-FCC-E
Page	3 of 30

---

This page has been left blank intentionally.

## CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	8
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	8
6.2 RADIATED EMISSIONS.....	14
ANNEX A. TEST INSTRUMENT .....	18
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS .....	19
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	27
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....	29
ANNEX E. DECLARATION OF SIMILARITY .....	30

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
16020056-FCC-E	NONE	Original	January 25, 2016

## 2. Customer information

Applicant Name	WHISPER USA INC
Applicant Add	7700 N KENDALL DR STE 405 MIAMI, FL 33156
Manufacturer	JINGHUITONG TECHNOLOGY LIMITED
Manufacturer Add	307, 3/F, Block A, Chinto Technology, Minzhi Street, LongHua, ShenZhen, Guangdong , P.R. China

## 3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	Labview of SIEMIC version 1.0

#### 4. Equipment under Test (EUT) Information

Description of EUT: DIGITAL PRIME

Main Model: WSDIGR(Receiver)

Serial Model: WSDIGR000000U

Frequency Range: 910-920MHz

Date EUT received: January 18 to February 23, 2016

Test Date(s): January 19, 2016

Input Power: Battery:4.2V,3000mAh

Trade Name : WHISPER®

## 5. Test Summary

The product was tested in accordance with the following specifications.  
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

### Measurement Uncertainty


Test Item	Description	Uncertainty
Radiated Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	3.952dB

## 6. Measurements, Examination And Derived Results

### 6.1 AC Power Line Conducted Emissions

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	February 23, 2016
Tested By :	Deon Dai

#### Requirement(s):

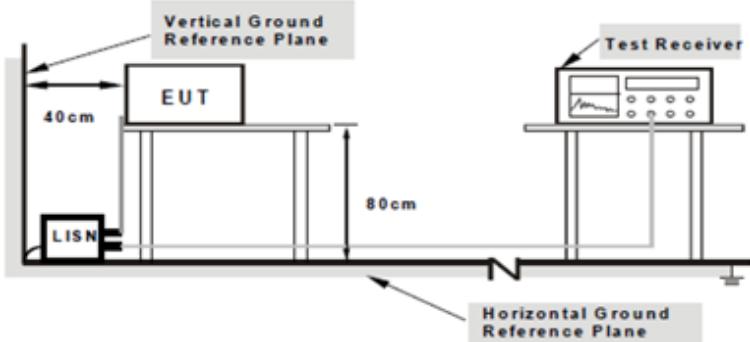Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	<p>1. For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [<math>\mu</math>H]/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 ~ 56</td> <td>56 ~ 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB $\mu$ V)		QP	Average	0.15 ~ 0.5	66 ~ 56	56 ~ 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB $\mu$ V)																
	QP	Average															
0.15 ~ 0.5	66 ~ 56	56 ~ 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p><b>Note:</b> 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																
Procedure	<p>2. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</p> <p>3. The power supply for the EUT was fed through a 50 [<math>\mu</math>H]/50 EUT LISN, connected to filtered mains.</p> <p>4. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</p> <p>5. All other supporting equipment were powered separately from another main supply.</p> <p>6. The EUT was switched on and allowed to warm up to its normal operating condition.</p> <p>7. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</p> <p>8. High peaks, relative to the limit line, were then selected. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz.</p> <p>9. Steps 6-7 were repeated for the LIVE line (for AC mains) or DC line (for DC power).</p>																

Remark		
Result	<input checked="" type="checkbox"/> N/A	<input type="checkbox"/> Fail
Test Data	<input checked="" type="checkbox"/> N/A	<input type="checkbox"/> Fail
Test Plot	<input checked="" type="checkbox"/> N/A	<input type="checkbox"/> Fail

### Data sample

Frequency (MHz)	Quasi-Peak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Factors (dB)
xxx	56.21	66.00	-9.79	39.20	56.00	-16.80	12.22

Frequency (MHz) = Emission frequency in MHz

Quasi-Peak/Average (dB $\mu$ V)=Receiver Reading(dB $\mu$ V)+ Factor(dB)

Limit(dB $\mu$ V)=Limit stated in standard


Factor (dB)= cable loss+ Insertion loss of LISN+ Insertion loss of transient limiter (The transient limiter included 10dB attenuation)

### Calculation Formula:

Margin (dB)=Quasi Peak / Average (dB $\mu$ V) – limit (dB $\mu$ V)

Test Mode :	Normal Working Mode
-------------	---------------------

Peak Detector		Quasi Peak Limit	
Average Detector		Average Limit	

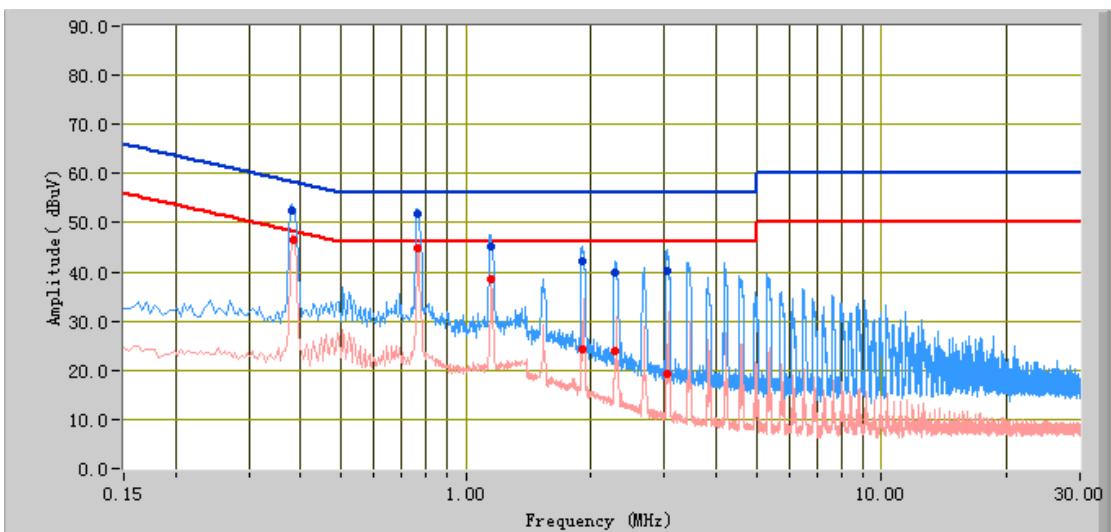


### Test Data

Phase Line Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Factors (dB)
0.76	51.79	56.00	-4.21	44.85	46.00	-1.15	10.88
0.38	52.35	58.24	-5.88	46.96	48.24	-1.28	11.26
1.15	45.29	56.00	-10.71	38.59	46.00	-7.41	10.71
1.90	42.09	56.00	-13.91	24.09	46.00	-21.91	10.86
3.03	40.30	56.00	-15.70	19.38	46.00	-26.62	10.88
2.28	39.79	56.00	-16.21	23.98	46.00	-22.02	10.88

Test Mode : Normal Working Mode

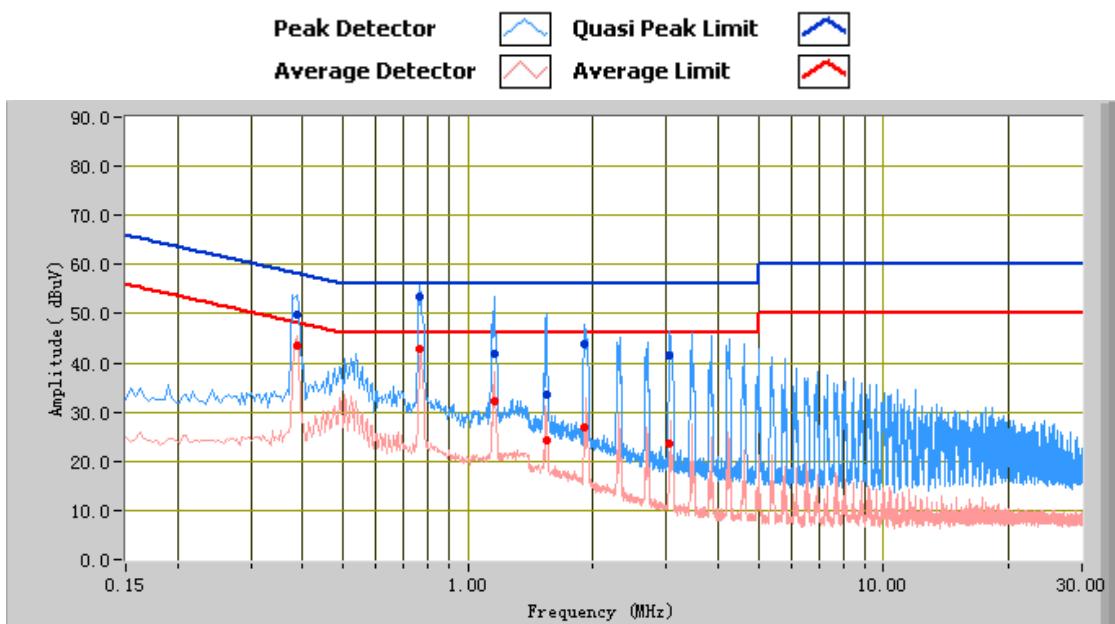


### Test Data

Phase Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Factors (dB)
0.76	53.32	56.00	-2.68	42.84	46.00	-3.16	10.87
1.15	41.95	56.00	-14.05	32.30	46.00	-13.70	10.73
0.39	49.70	58.15	-8.45	43.40	48.15	-4.74	11.24
1.54	33.70	56.00	-22.30	24.31	46.00	-21.69	10.82
1.90	43.69	56.00	-12.31	27.01	46.00	-18.99	10.90
3.05	41.49	56.00	-14.51	23.67	46.00	-22.33	10.93

Test Mode : Normal Working Mode

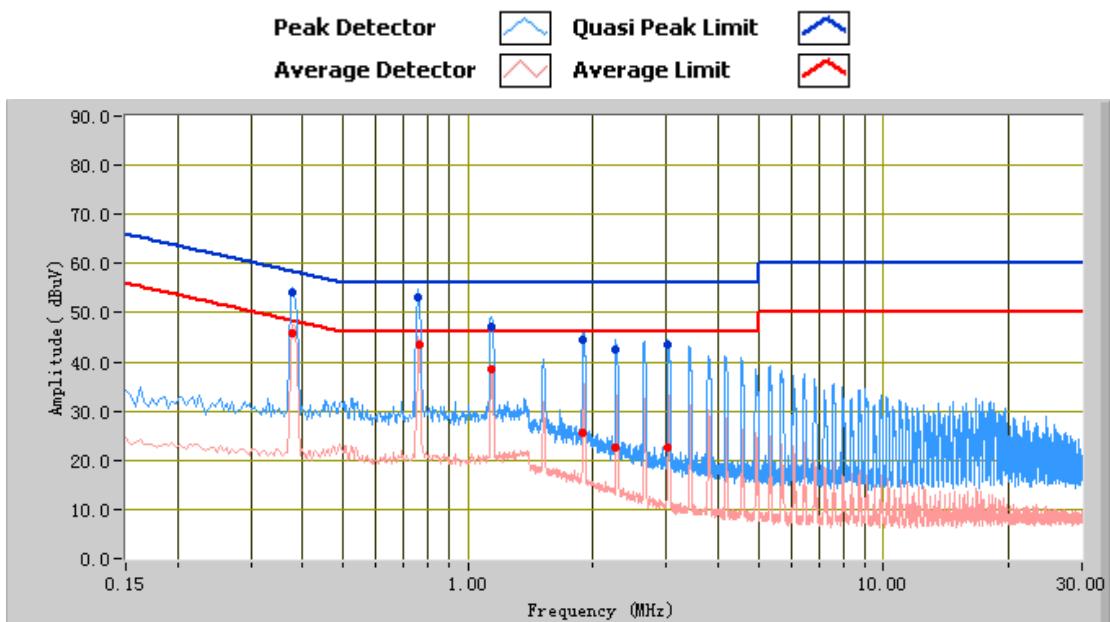


### Test Data

Phase Line Plot at 240Vac, 50Hz

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Factors (dB)
0.76	53.27	56.00	-2.73	43.56	46.00	-2.44	10.88
0.38	54.19	58.32	-4.13	46.28	48.32	-2.04	11.27
1.14	47.09	56.00	-8.91	38.51	46.00	-7.49	10.71
1.89	44.47	56.00	-11.53	25.55	46.00	-20.45	10.86
3.02	43.39	56.00	-12.61	22.48	46.00	-23.52	10.88
2.26	42.50	56.00	-13.50	22.62	46.00	-23.38	10.88

Test Mode : Normal Working Mode

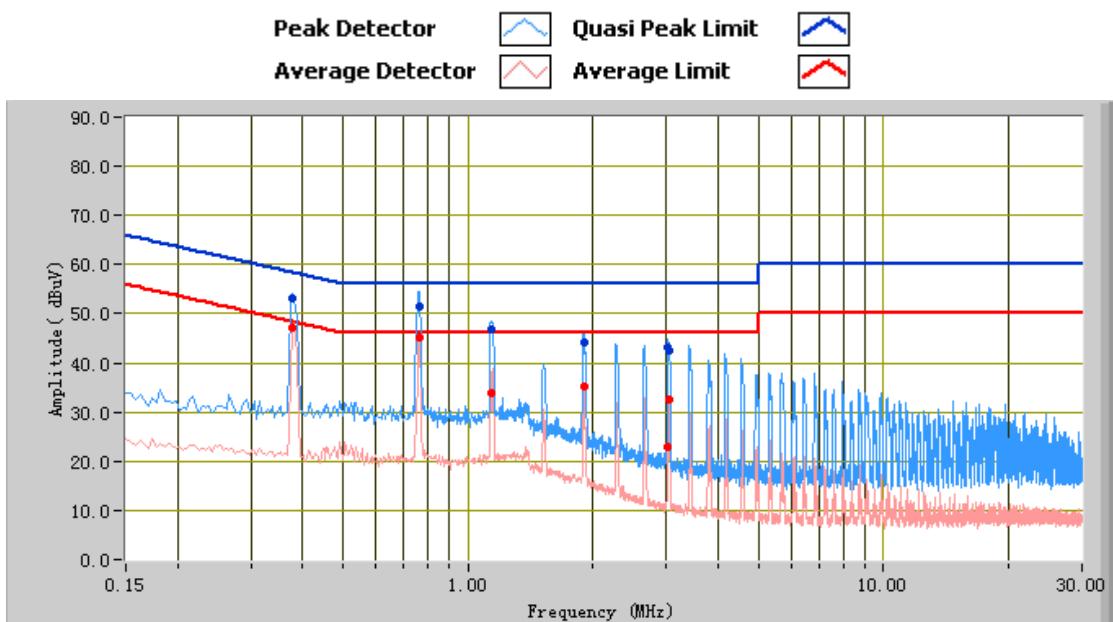

### Test Data


Phase Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Factors (dB)
0.76	51.51	56.00	-4.49	45.24	46.00	-0.76	10.87
0.38	53.09	58.32	-5.24	47.24	48.32	-1.08	11.25
1.13	46.73	56.00	-9.27	33.73	46.00	-12.27	10.73
1.90	44.02	56.00	-11.98	35.12	46.00	-10.88	10.90
3.02	43.20	56.00	-12.80	22.78	46.00	-23.22	10.93
3.04	42.65	56.00	-13.35	32.60	46.00	-13.40	10.93

## 6.2 Radiated Emissions

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	January 19, 2016
Tested By :	Deon Dai

### Requirement(s):

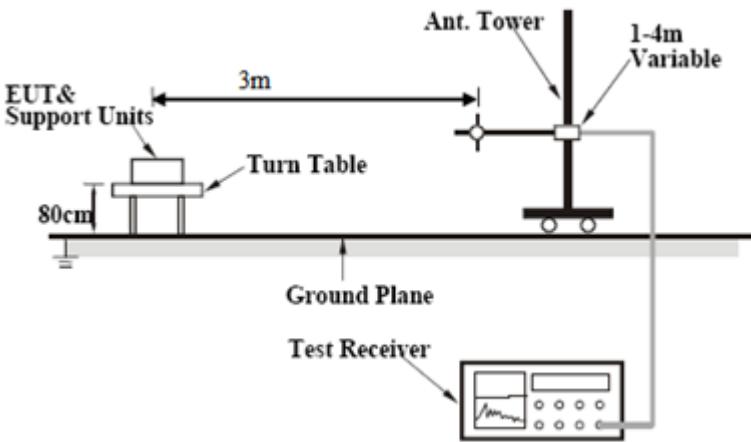Spec	Item	Requirement	Applicable										
47CFR§15.10 7(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu</math>V/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ( $\mu$ V/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength ( $\mu$ V/m)												
30 – 88	100												
88 – 216	150												
216 – 960	200												
Above 960	500												
Test Setup													
Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:           <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>For emission frequencies measured below and above 1GHz, set the spectrum analyzer on a 100kHz and 1MHz resolution bandwidth respectively for each frequency measured.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>												
Remark													
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail											
Test Data	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A											
Test Plot	<input checked="" type="checkbox"/> Yes (See below)	<input type="checkbox"/> N/A											

### Data sample

Frequency (MHz)	Quasi Peak (dB $\mu$ V/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dB $\mu$ V/m)	Margin (dB)
XXX	32.23	181.00	H	350.00	-38.23	40.00	-7.77

Frequency (MHz) = Emission frequency in MHz

Quasi-Peak (dB $\mu$ V/m) = Receiver Reading(dB $\mu$ V/m) + Factor(dB)

Azimuth=Position of turn table

Polarity=Polarity of Receiver antenna

Height(cm)= Height of Receiver antenna

Factor (dB)=Antenna factor + cable loss- antenna gain

Limit (dB $\mu$ V/m)=Limit stated in standard


### Calculation Formula:

Margin (dB)=Quasi Peak (dB $\mu$ V/m) – limit (dB $\mu$ V/m)

Test Mode:	Receiving Mode
------------	----------------

(Below 1GHz)

Peak Detector   
 Quasi Peak Limit 

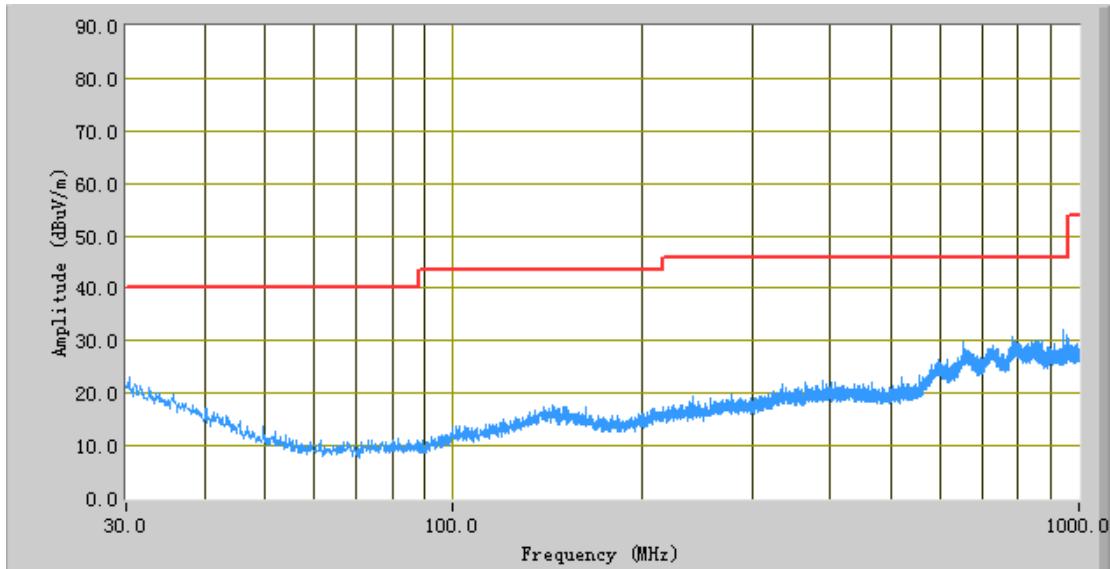

## Test Data

Vertical Polarity Plot @3m


Frequency (MHz)	Peak (dBuV/m)	Azimuth	Polarity(H/V)	Height (cm)	Factors (dB)	Limit (dBuV/m)	Margin (dB)
945.32	32.08	16.90	V	100.00	-18.12	46.00	-13.92
953.56	31.02	274.30	V	200.00	-18.14	46.00	-14.98
783.21	30.86	42.80	V	200.00	-17.96	46.00	-15.14
854.99	30.10	276.20	V	200.00	-17.91	46.00	-15.90
870.87	30.09	150.20	V	100.00	-18.22	46.00	-15.91
850.01	29.92	174.60	V	100.00	-17.82	46.00	-16.08

Note: Fast QP measurement performed, more than 20dB below limit so QP test data was not presented.  
 The data above 1 GHz which below 20 dB to the limit was not recorded.

Test Mode:	Receiving Mode
------------	----------------

(Below 1GHz)

Peak Detector   
 Quasi Peak Limit 

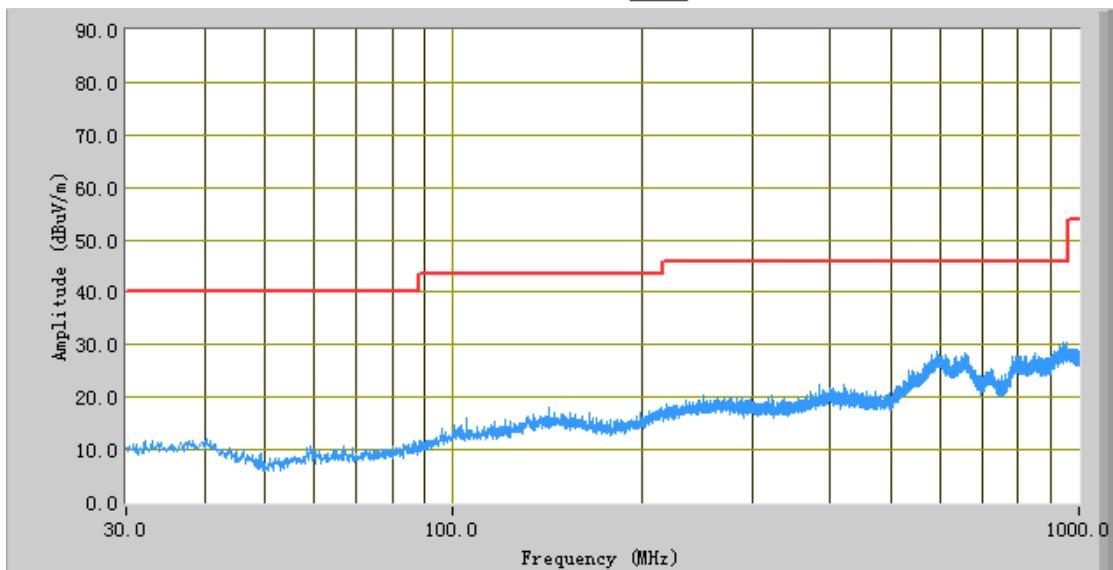

## Test Data

Horizontal Polarity Plot @3m

Frequency (MHz)	Peak (dBuV/m)	Azimuth	Polarity(H/V)	Height (cm)	Factors (dB)	Limit (dBuV/m)	Margin (dB)
956.84	30.56	270.50	H	400.00	-17.18	46.00	-15.44
945.20	30.46	290.20	H	400.00	-16.92	46.00	-15.54
929.55	29.94	160.40	H	400.00	-17.47	46.00	-16.06
937.43	29.42	114.70	H	300.00	-16.96	46.00	-16.58
911.73	28.82	0.80	H	400.00	-18.62	46.00	-17.18
914.15	28.75	320.80	H	300.00	-18.46	46.00	-17.25

Note: Fast QP measurement performed, more than 20dB below limit so QP test data was not presented.  
 The data above 1 GHz which below 20 dB to the limit was not recorded.

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
R&S EMI Test Receiver	ESPI3	101216	11/04/2015	11/03/2016	N/A
R&S LISN(9k-30MHz)	ESH3-Z5	838979/005	11/04/2015	11/03/2016	N/A
SIEMIC Labview Conducted Emissions software	V1.0	N/A	N/A	N/A	N/A
<b>Radiated Emissions</b>					
Spectrum Analyzer	N9010A	MY47191130	10/09/2015	10/08/2016	N/A
R&S EMI Receiver	ESPI3	101216	10/09/2015	10/08/2016	<input checked="" type="checkbox"/>
Antenna (30MHz~6GHz)	JB6	A121411	04/15/2015	04/14/2016	<input checked="" type="checkbox"/>
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	11/15/2015	11/14/2016	<input checked="" type="checkbox"/>
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2015	10/08/2016	<input checked="" type="checkbox"/>
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2015	04/21/2016	N/A
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/29/2015	05/28/2016	N/A
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2015	10/26/2016	<input checked="" type="checkbox"/>
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	LPA-6-30	1451709	06/25/2015	06/24/2016	<input checked="" type="checkbox"/>
SIEMIC Labview Radiated Emissions software	V1.0	N/A	N/A	N/A	<input checked="" type="checkbox"/>

## Annex B. EUT And Test Setup Photographs


### Annex B.i. Photograph EUT External Photo



Front View of EUT



Rear View of EUT

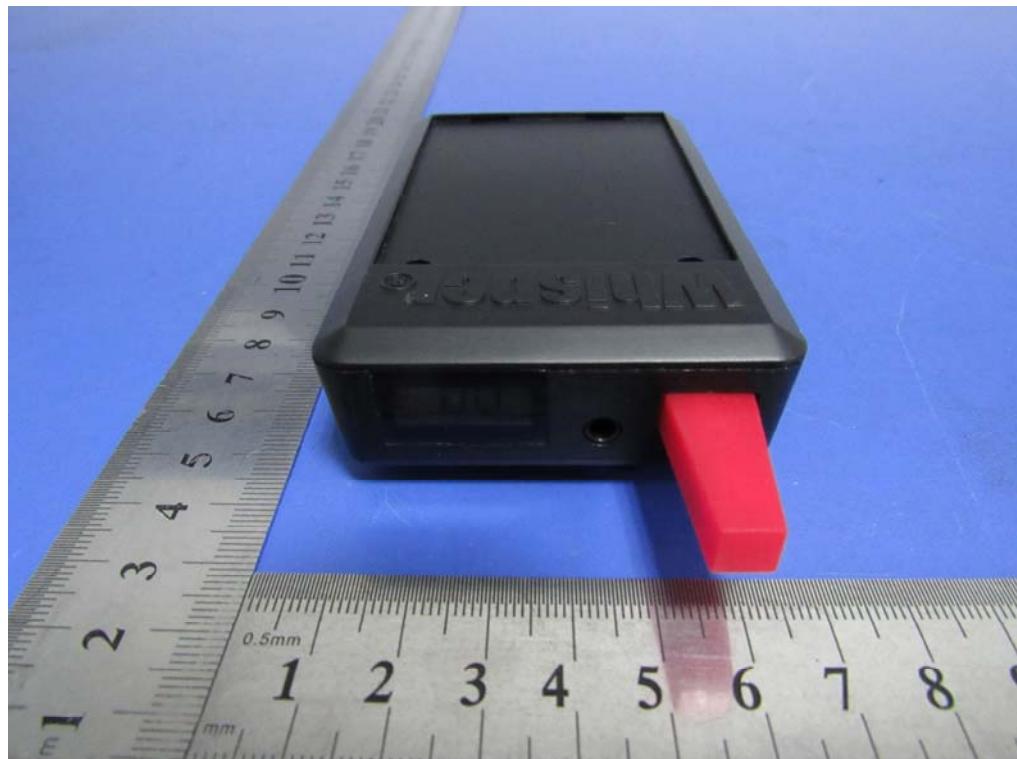

Top View of EUT



Bottom View of EUT



Left View of EUT



Right View of EUT

Test Report No.	16020056-FCC-E
Page	22 of 30

### Annex B.ii. Photograph EUT Internal Photo




Whole Package – Top View




EUT Battery – Front View



Uncover- Front View

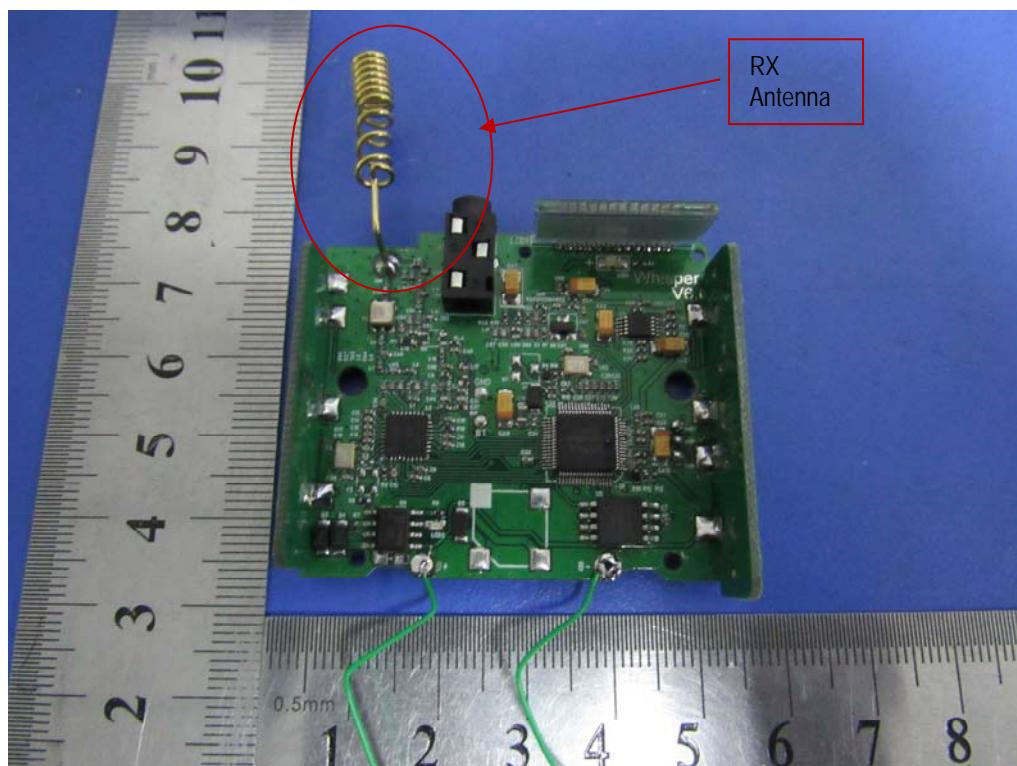

EUT PCB – Front View

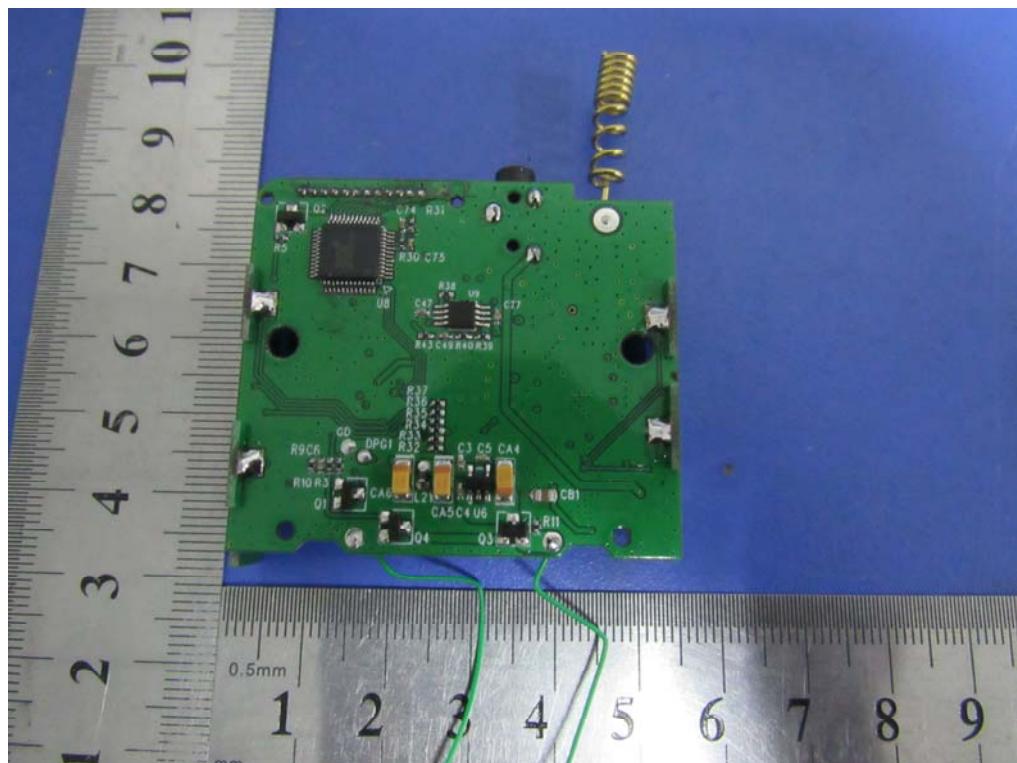

EUT PCB- Rear View

**Annex B.iii. Photograph: Test Setup Photo**



Conducted Emissions Setup Front View



Conducted Emissions Setup Side View




Radiated Emissions Setup Below 1GHz Front View



Radiated Emissions Setup Above 1GHz Front View

## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Block Configuration Diagram for Radiated Emissions

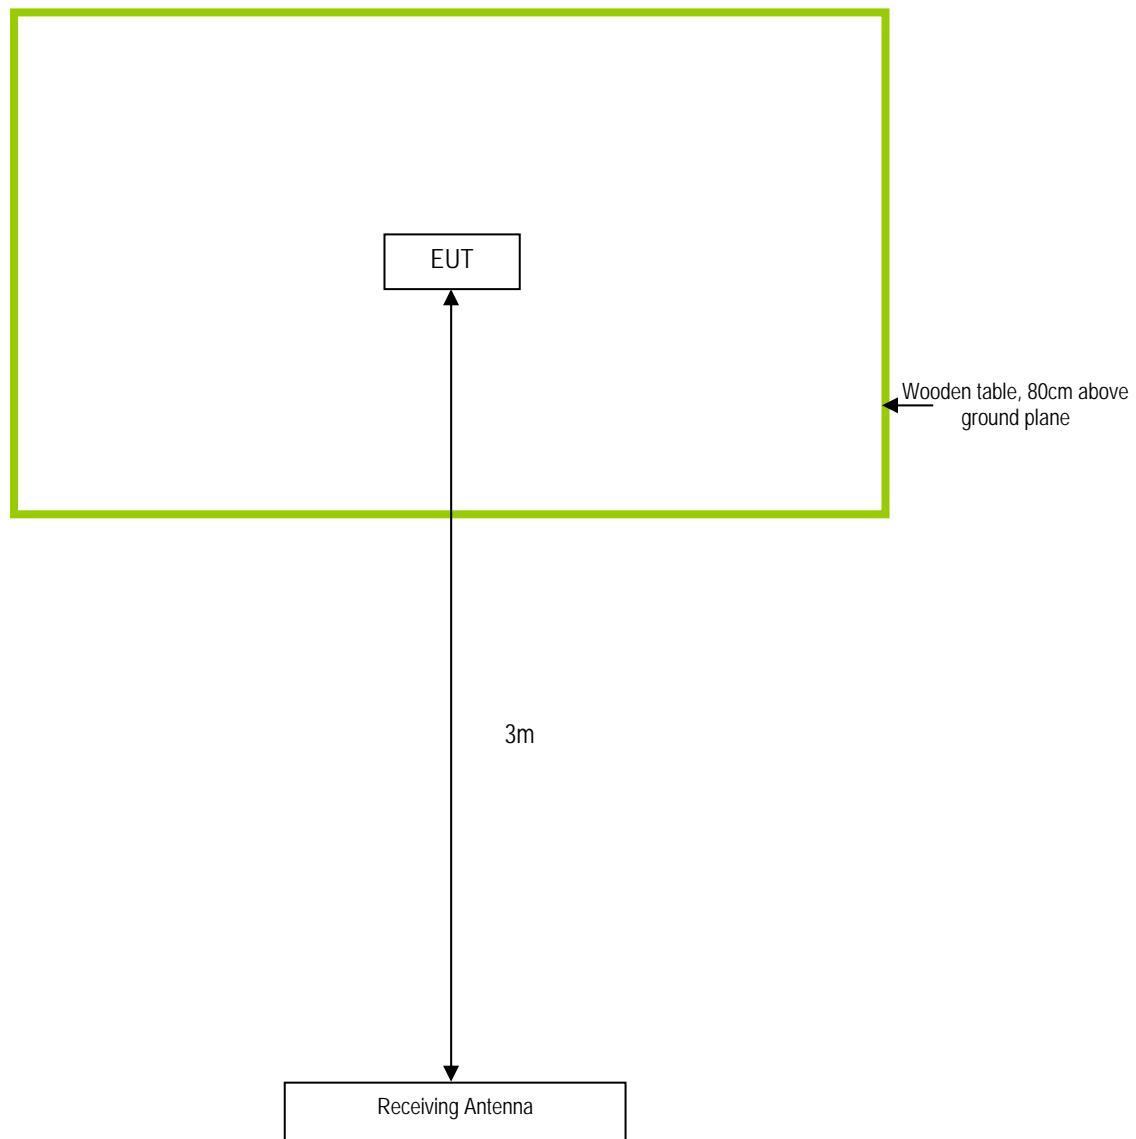

---

### Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date
N/A	N/A	N/A	N/A

Test Report No.	16020056-FCC-E
Page	29 of 30

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see Attachment

## Annex E. DECLARATION OF SIMILARITY

WHISPER USA INC  
7700 N KENDALL DR STE 405 MIAMI, FL 33156

### Statement

We, WHISPER USA INC

Product: DIGITAL PRIME

FCC ID: 2AG63WSDIGUSR

Model: WSDIGR(Receiver), WSDIGR000000U

All models are all identical in interior structure, electrical circuits and components, and just model names and color are different for the marketing requirement.

Your assistance on this matter is highly appreciated.

Yours sincerely,

Client's signature: *Massimiliano Bisceglia*

Client's name / title: Massimiliano Bisceglia/CEO

Contact information / address: 7700 N KENDALL DR STE 405 MIAMI, FL 33156