

FCC Report

Applicant: ACME TECH. (SHENZHEN) CO., LTD.

Address of Applicant: 2nd floor, Bldg. L, JingTie Ind. District, No. 49th, Changjiangpu Rd., Longgang, Shenzhen, China

Equipment Under Test (EUT)

Product Name: 2.4G Transmitter and Receiver

Model No.: B1186

Trade mark: ACME RACING

FCC ID: 2AG6H-B1186

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2014

Date of sample receipt: December 22, 2015

Date of Test: December 23, 2015

Date of report issued: December 30, 2015

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	December 30, 2015	Original

Prepared By:

Sam. Gao

Date:

December 30, 2015

Project Engineer

Check By:

Hank. yan

Date:

December 30, 2015

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	8
5.4 TEST FACILITY	8
5.5 TEST LOCATION	8
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
5.7 DESCRIPTION OF SUPPORT UNITS	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED PEAK OUTPUT POWER	11
7.3 20DB EMISSION BANDWIDTH	13
7.4 CARRIER FREQUENCIES SEPARATION	15
7.5 HOPPING CHANNEL NUMBER	17
7.6 DWELL TIME	18
7.7 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	22
7.8 BAND EDGE	23
7.8.1 <i>Conducted Emission Method</i>	23
7.8.2 <i>Radiated Emission Method</i>	25
7.9 SPURIOUS EMISSION	27
7.9.1 <i>Conducted Emission Method</i>	27
7.9.2 <i>Radiated Emission Method</i>	29
8 TEST SETUP PHOTO	35
9 EUT CONSTRUCTIONAL DETAILS	36

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	N/A
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 Client Information

Applicant:	ACME TECH. (SHENZHEN) CO., LTD.
Address of Applicant:	2nd floor, Bldg. L, JingTie Ind. District, No. 49th, Changjiangpu Rd., Longgang, Shenzhen, China
Manufacturer:	ACME TECH. (SHENZHEN) CO., LTD.
Address of Manufacturer:	2nd floor, Bldg. L, JingTie Ind. District, No. 49th, Changjiangpu Rd., Longgang, Shenzhen, China

5.2 General Description of EUT

Product Name:	2.4G Transmitter and Receiver
Model No.:	B1186
Operation Frequency:	2405.5MHz~2475.0MHz
Channel numbers:	140
Modulation technology:	GFSK
Antenna Type:	Integral Antenna
Antenna gain:	2dBi
Power supply:	DC 6.0V(4*1.5V "AA" Battery)

Remark: The system works in the frequency range of 2405.5MHz to 2475MHz. This band has been divided to 140 independent channels. Each radio system uses 32 different channels, the minimum channel separation is ≥ 1 MHz. By using various switch-on times, hopping scheme and channel frequencies, the system can guarantee a jamming free radio transmission. The channel list is below.

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405.50	36	2423.00	71	2440.50	106	2458.00
2	2406.00	37	2423.50	72	2441.00	107	2458.50
3	2406.50	38	2424.00	73	2441.50	108	2459.00
4	2407.00	39	2424.50	74	2442.00	109	2459.50
5	2407.50	40	2425.00	75	2442.50	110	2460.00
6	2408.00	41	2425.50	76	2443.00	111	2460.50
7	2408.50	42	2426.00	77	2443.50	112	2461.00
8	2409.00	43	2426.50	78	2444.00	113	2461.50
9	2409.50	44	2427.00	79	2444.50	114	2462.00
10	2410.00	45	2427.50	80	2445.00	115	2462.50
11	2410.50	46	2428.00	81	2445.50	116	2463.00
12	2411.00	47	2428.50	82	2446.00	117	2463.50
13	2411.50	48	2429.00	83	2446.50	118	2464.00
14	2412.00	49	2429.50	84	2447.00	119	2464.50
15	2412.50	50	2430.00	85	2447.50	120	2465.00
16	2413.00	51	2430.50	86	2448.00	121	2465.50
17	2413.50	52	2431.00	87	2448.50	122	2466.00
18	2414.00	53	2431.50	88	2449.00	123	2466.50
19	2414.50	54	2432.00	89	2449.50	124	2467.00
20	2415.00	55	2432.50	90	2450.00	125	2467.50
21	2415.50	56	2433.00	91	2450.50	126	2468.00
22	2416.00	57	2433.50	92	2451.00	127	2468.50
23	2416.50	58	2434.00	93	2451.50	128	2469.00
24	2417.00	59	2434.50	94	2452.00	129	2469.50
25	2417.50	60	2435.00	95	2452.50	130	2470.00
26	2418.00	61	2435.50	96	2453.00	131	2470.50
27	2418.50	62	2436.00	97	2453.50	132	2471.00
28	2419.00	63	2436.50	98	2454.00	133	2471.50
29	2419.50	64	2437.00	99	2454.50	134	2472.00
30	2420.00	65	2437.50	100	2455.00	135	2472.50
31	2420.50	66	2438.00	101	2455.50	136	2473.00
32	2421.00	67	2438.50	102	2456.00	137	2473.50
33	2421.50	68	2439.00	103	2456.50	138	2474.00
34	2422.00	69	2439.50	104	2457.00	139	2474.50
35	2422.50	70	2440.00	105	2457.50	140	2475.00

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405.5MHz
The middle channel	2440.0MHz
The Highest channel	2475.0MHz

5.3 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
<i>Remark: During the test, the new battery was used.</i>	

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.

5.7 Description of Support Units

None.

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Jun. 30 2015	Jun. 29 2016
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jun. 30 2015	Jun. 29 2016
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Jun. 30 2015	Jun. 29 2016
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	Jun. 26 2015	Jun. 25 2016
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 27 2015	Mar. 26 2016
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 28 2015	Mar. 27 2016
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 28 2015	Mar. 27 2016
11	Coaxial cable	GTS	N/A	GTS210	Mar. 28 2015	Mar. 27 2016
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 28 2015	Mar. 27 2016
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jun. 30 2015	Jun. 29 2016
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jun. 30 2015	Jun. 29 2016
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Jun. 26 2015	Jun. 25 2016
16	Band filter	Amindeon	82346	GTS219	Mar. 28 2015	Mar. 27 2016

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Jun. 30 2015	Jun. 29 2016
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jun. 30 2015	Jun. 29 2016
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jun. 30 2015	Jun. 29 2016
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jun. 30 2015	Jun. 29 2016
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jun. 30 2015	Jun. 29 2016
6	Coaxial Cable	GTS	N/A	GTS227	Jun. 30 2015	Jun. 29 2016
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 07 2015	July 06 2016

7 Test results and Measurement Data

7.1 Antenna requirement

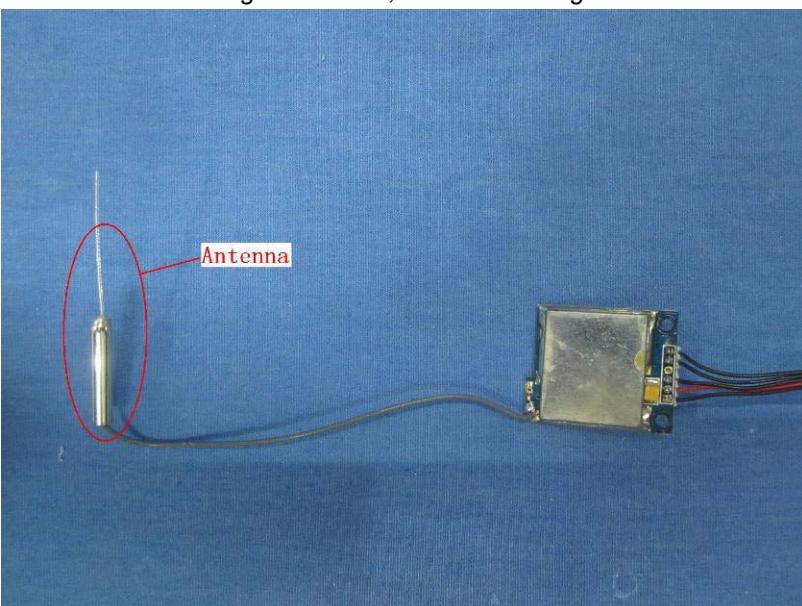
Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement:</p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<p>E.U.T Antenna:</p> <p><i>The antenna is Integral antenna, the best case gain of the antenna is 2dBi</i></p> 	

7.2 Conducted Peak Output Power

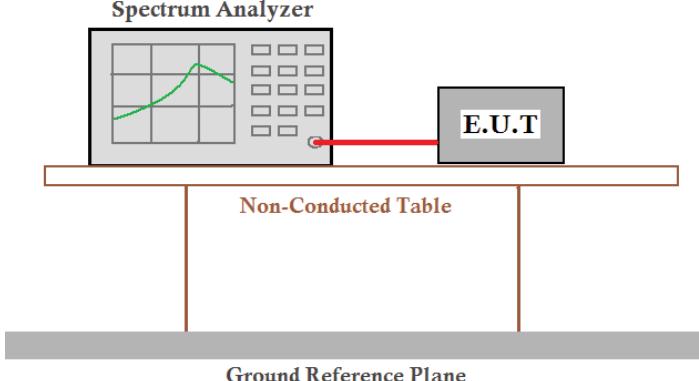
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2014
Limit:	20.97dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	17.57	20.97	Pass
	Middle	17.25		
	Highest	17.01		

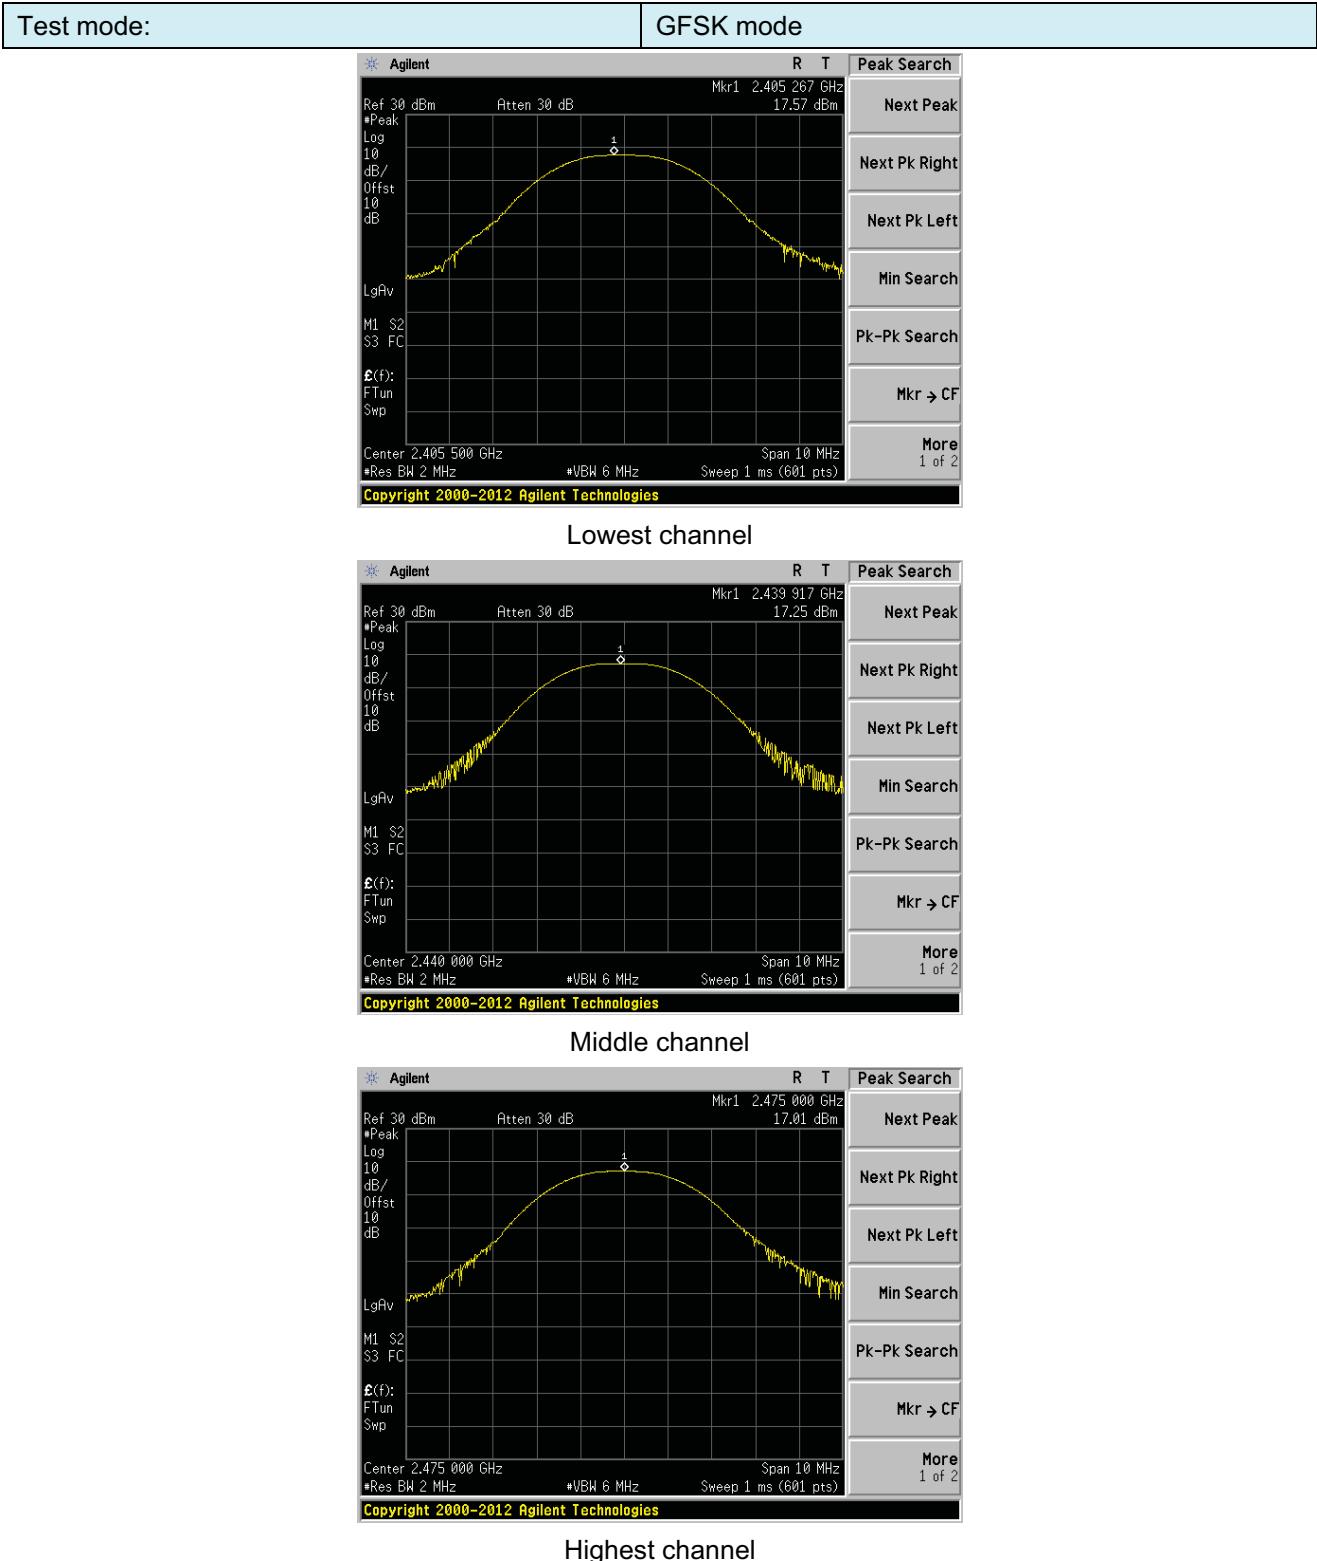
Test plot as follows:


7.3 20dB Emission Bandwidth

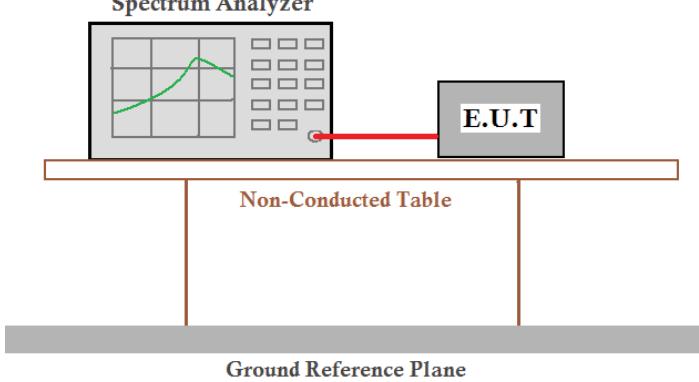
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2014
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	1.053	Pass
	Middle	1.048	
	Highest	1.048	

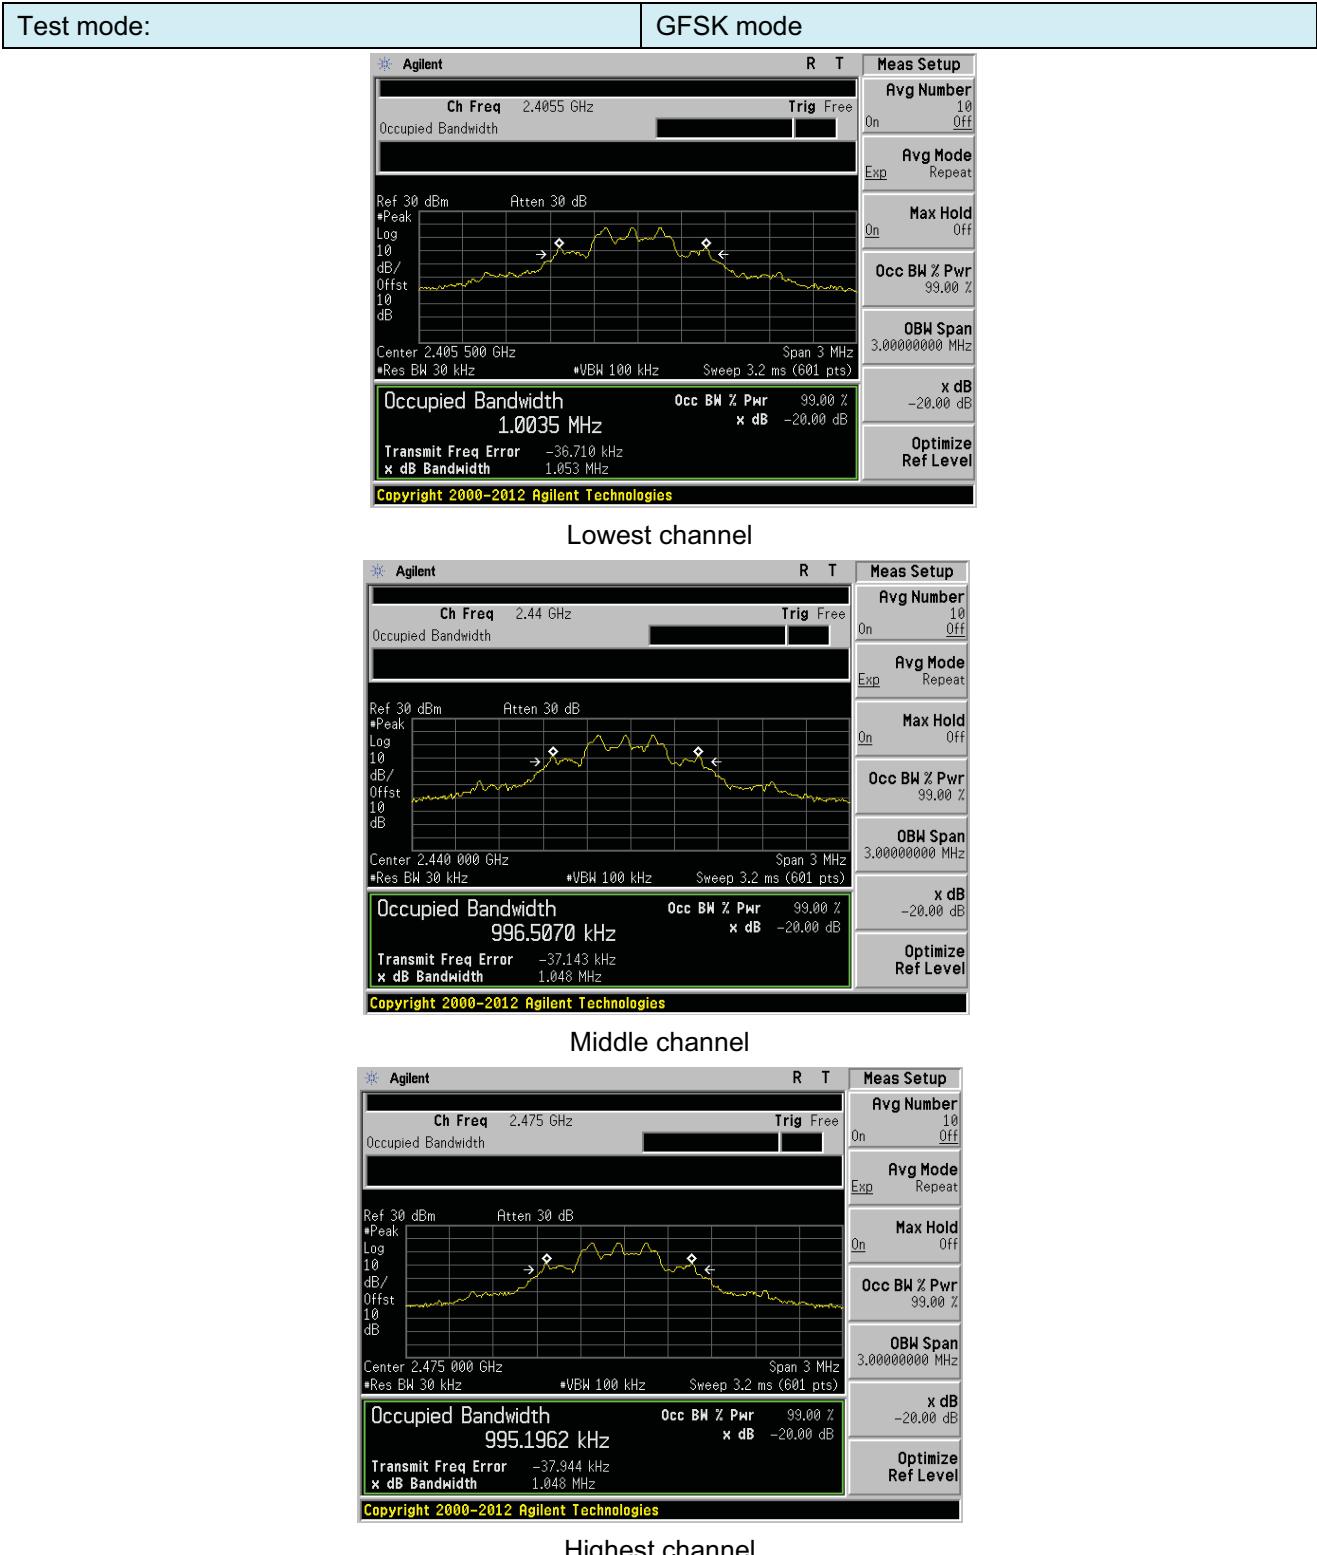Test plot as follows:


7.4 Carrier Frequencies Separation

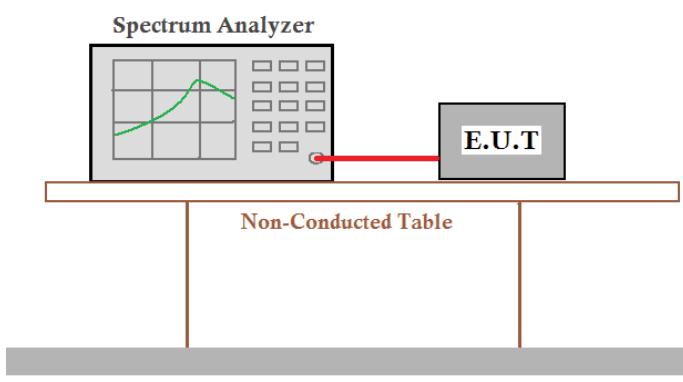Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2014
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK	Lowest	3000	702	Pass
	Middle	1515	702	Pass
	Highest	1015	702	Pass

Note: According to section 7.3


Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1000 *	702

*: Refer to page 17 Hopping channel numbers plots


Test plot as follows:

Modulation mode:


GFSK

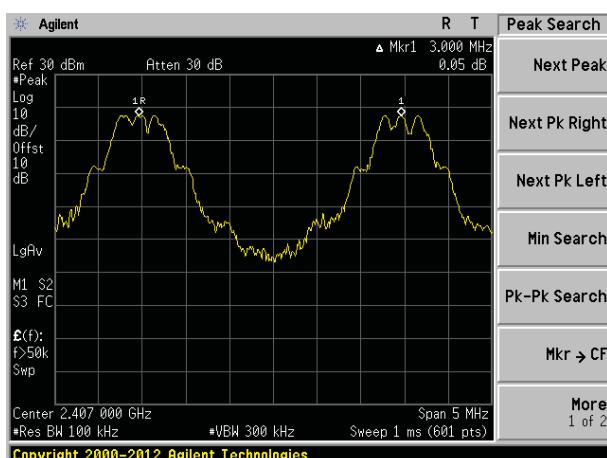

Lowest channel

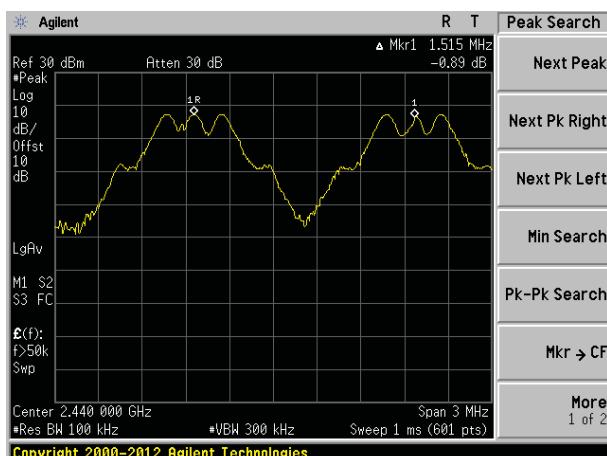


Middle channel

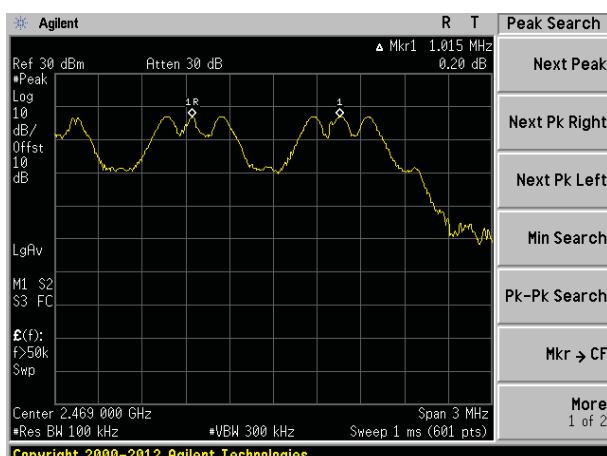


Highest channel

7.5 Hopping Channel Number

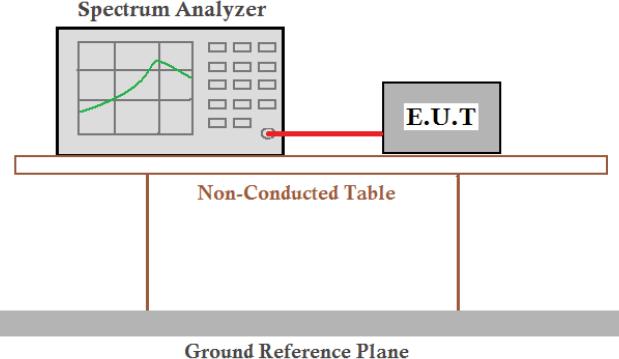
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2014
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data:

Hopping channel numbers	Limit	Result
32	15	Pass

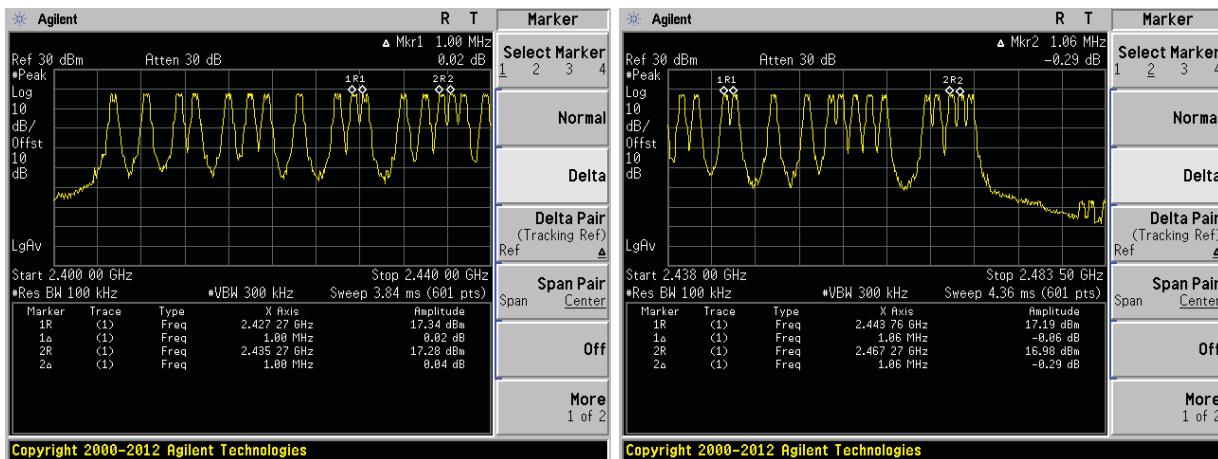

7.6 Dwell Time

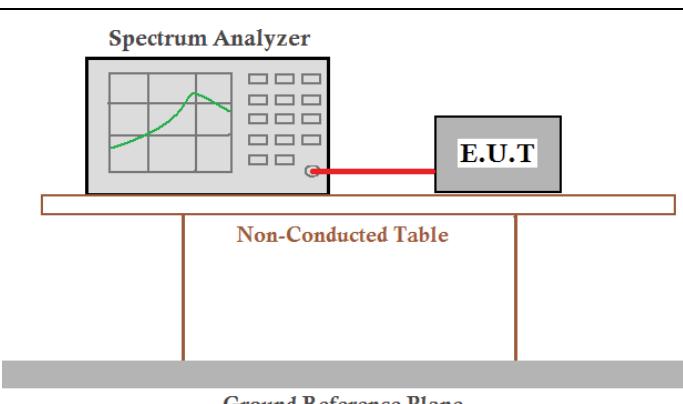Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2014
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Frequency	Ton (ms)	Dwell time(ms)	Limit(ms)	Result
2.4055GHz	1.308	133.94	400	Pass
2.440GHz	1.317	134.86	400	Pass
2.475GHz	1.317	134.86	400	Pass

The formula as below:


2405.5MHz: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=1.308ms*8*0.4*32=133.94ms

2440MHz: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=1.317ms*8*0.4*32=134.86ms


2475MHz: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=1.317ms*8*0.4*32=134.86ms

Test plot as follows:

Frequency:	2405.5MHz
------------	-----------

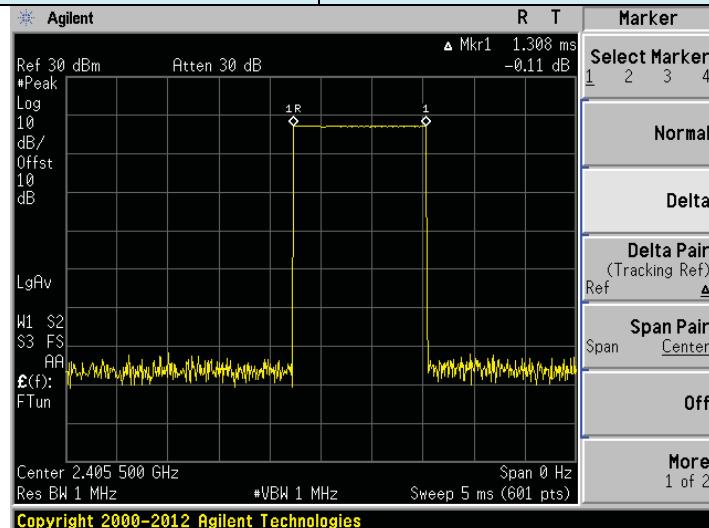


Ton

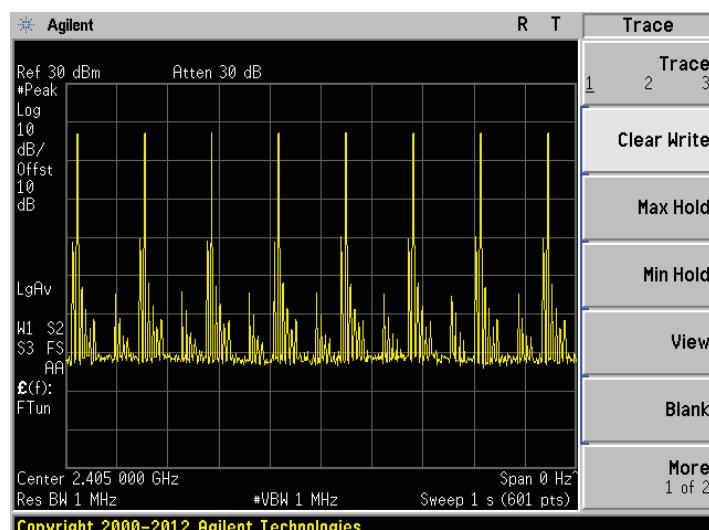


Ton times in 1s

Frequency: 2440MHz

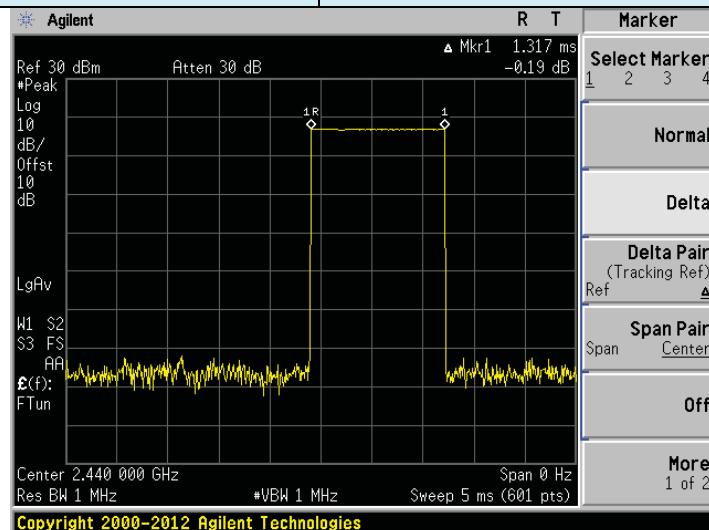


Ton

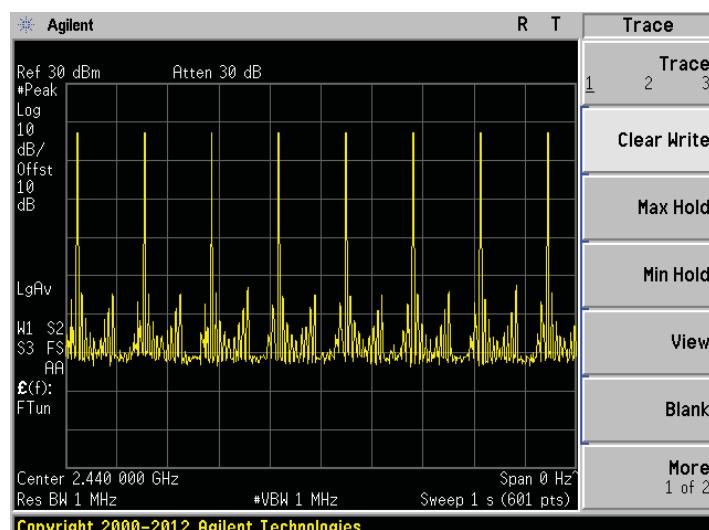


Ton times in 1s

Frequency:	2475MHz
------------	---------

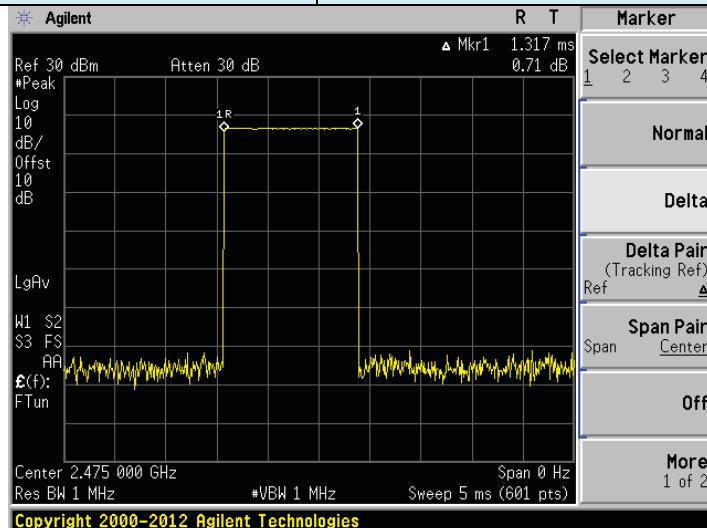


Ton

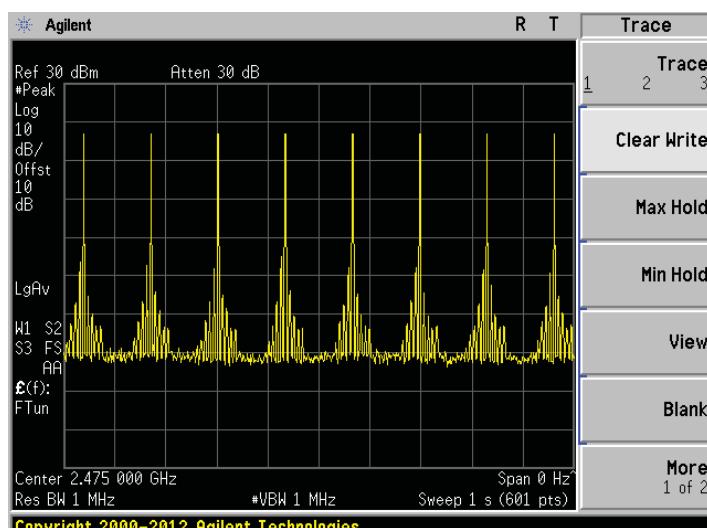


Ton times in 1s

7.7 Pseudorandom Frequency Hopping Sequence

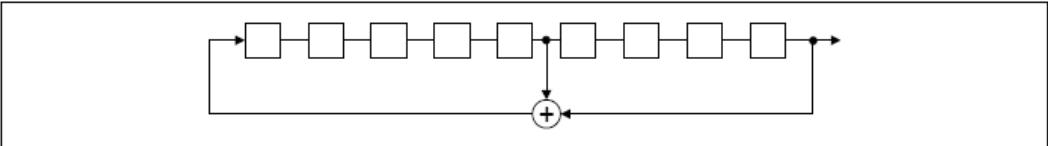
Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:																						
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>																						
EUT Pseudorandom Frequency Hopping Sequence																							
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> Number of shift register stages: 9 Length of pseudo-random sequence: $2^9 - 1 = 511$ bits Longest sequence of zeros: 8 (non-inverted signal)  <p>Linear Feedback Shift Register for Generation of the PRBS sequence</p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table border="1"> <tr> <td>0</td><td>2</td><td>4</td><td>6</td><td>62</td><td>64</td><td>78</td><td>1</td><td>73</td><td>75</td><td>77</td> </tr> <tr> <td> </td><td> </td> </tr> </table> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>		0	2	4	6	62	64	78	1	73	75	77											
0	2	4	6	62	64	78	1	73	75	77													

7.8 Band Edge

7.8.1 Conducted Emission Method

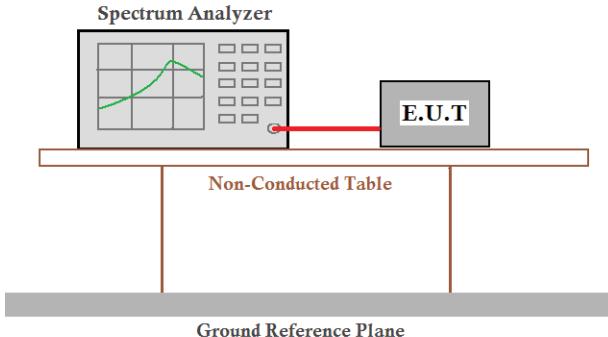
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2014
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Test plot as follows:

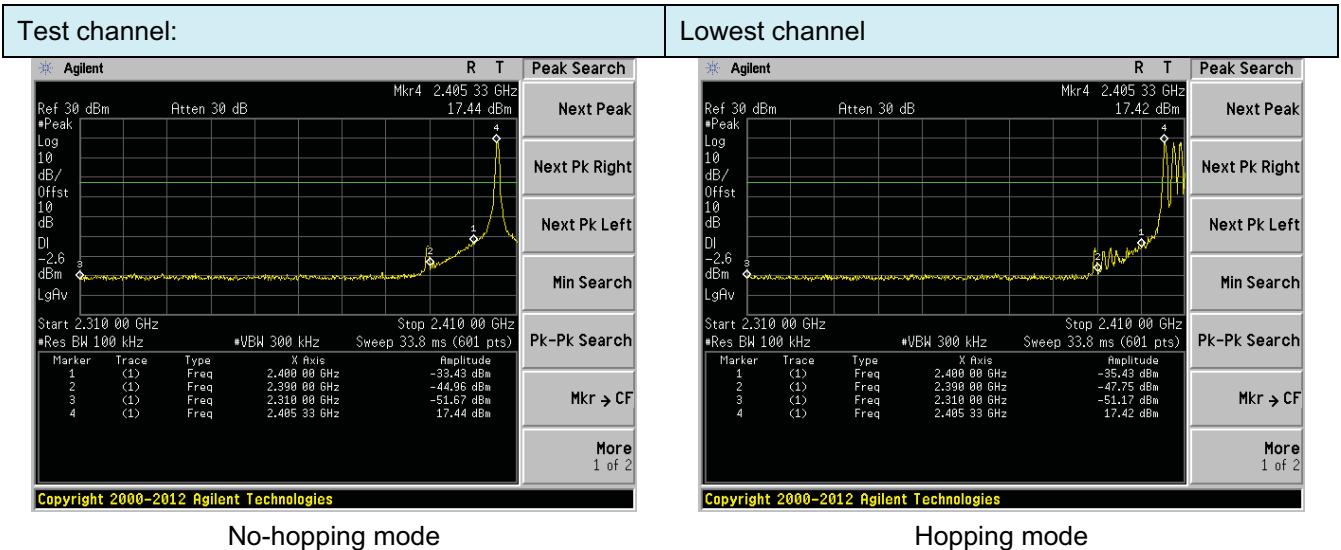GFSK Mode:


No-hopping mode

Hopping mode

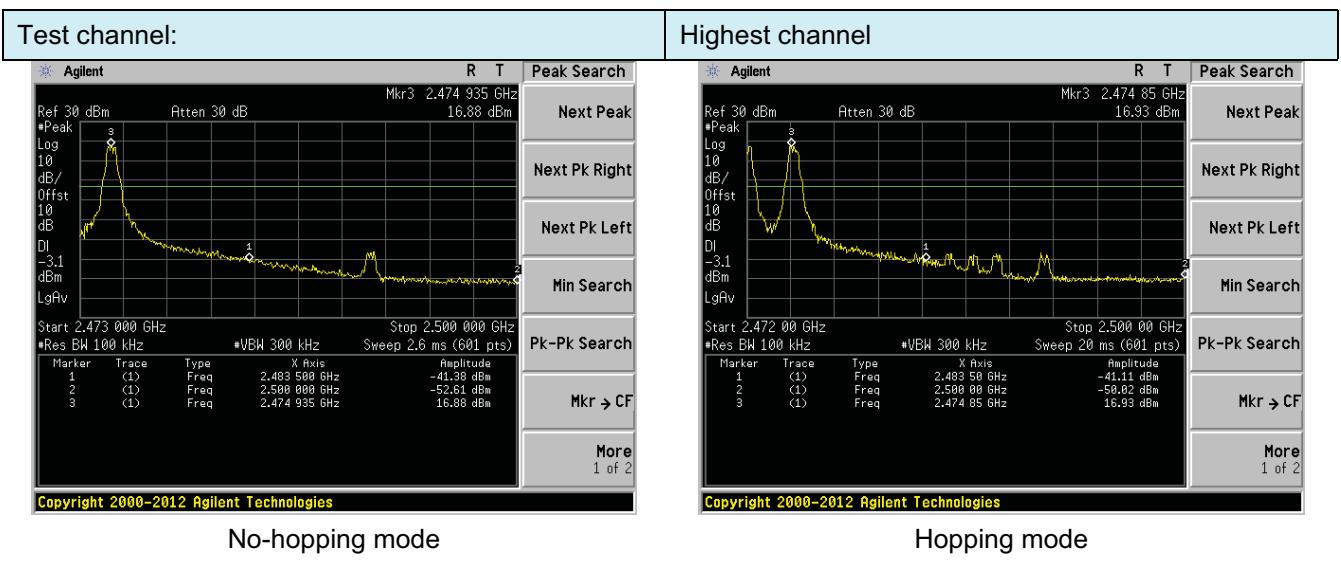

No-hopping mode

Hopping mode

7.8.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.4:2014								
Test Frequency Range:	All restriction band have been tested, and 2.3GHz to 2.5GHz band is the worse case								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		Peak	1MHz	10Hz	Average Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
	Above 1GHz	54.00		Average Value					
		74.00		Peak Value					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 								
Test Instruments:	Refer to section 6.0 for details								
Test mode:	Refer to section 5.3 for details								
Test results:	Pass								

Remark:

1. During the test, pre-scan the GFSK modulation, and found the GFSK modulation which it is worse case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Test channel:	Lowest channel							
---------------	----------------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	59.36	27.59	5.38	30.18	62.15	74.00	-11.85	Horizontal
2400.00	64.52	27.58	5.39	30.18	67.31	74.00	-6.69	Horizontal
2390.00	53.10	27.59	5.38	30.18	55.89	74.00	-18.11	Vertical
2400.00	59.28	27.58	5.39	30.18	62.07	74.00	-11.93	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	43.80	27.59	5.38	30.18	46.59	54.00	-7.41	Horizontal
2400.00	44.26	27.58	5.39	30.18	47.05	54.00	-6.95	Horizontal
2390.00	40.15	27.59	5.38	30.18	42.94	54.00	-11.06	Vertical
2400.00	44.13	27.58	5.39	30.18	46.92	54.00	-7.08	Vertical

Test channel:	Highest channel							
---------------	-----------------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	59.30	27.53	5.47	29.93	62.37	74.00	-11.63	Horizontal
2500.00	50.00	27.55	5.49	29.93	53.11	74.00	-20.89	Horizontal
2483.50	56.14	27.53	5.47	29.93	59.21	74.00	-14.79	Vertical
2500.00	49.26	27.55	5.49	29.93	52.37	74.00	-21.63	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	42.68	27.53	5.47	29.93	45.75	54.00	-8.25	Horizontal
2500.00	37.92	27.55	5.49	29.93	41.03	54.00	-12.97	Horizontal
2483.50	41.97	27.53	5.47	29.93	45.04	54.00	-8.96	Vertical
2500.00	36.61	27.55	5.49	29.93	39.72	54.00	-14.28	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9 Spurious Emission

7.9.1 Conducted Emission Method


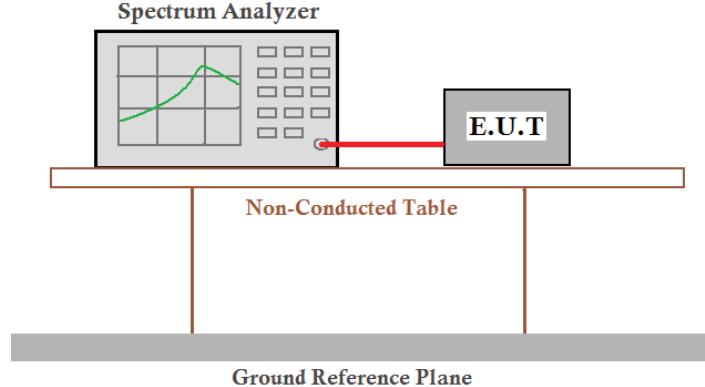
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2014 and KDB558074 D01 Meas Guidance
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

During the test, pre-scan the GFSK modulation, and found the GFSK modulation which is worse case.



7.9.2 Radiated Emission Method

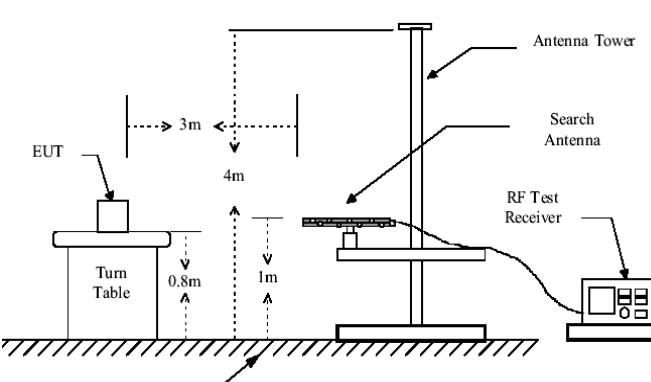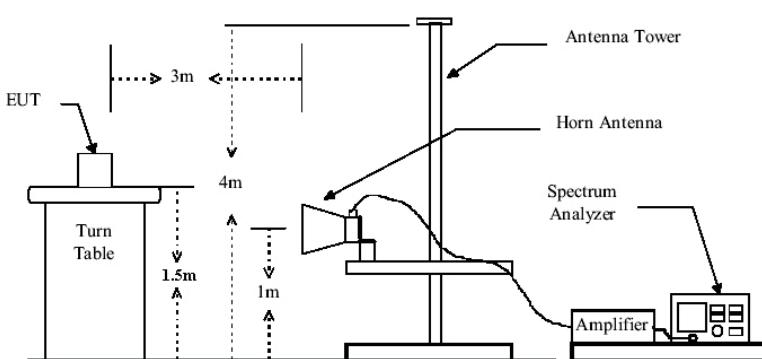Test Requirement:	FCC Part15 C Section 15.209												
Test Method:	ANSI C63.4:2014												
Test Frequency Range:	30MHz to 25GHz												
Test site:	Measurement Distance: 3m												
Receiver setup:	Frequency	Detector	RBW	VBW	Remark								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value								
	Above 1GHz	Peak	1MHz	3MHz	Peak Value								
Limit:	Peak	1MHz	10Hz	Average Value									
	Frequency	Limit (dBuV/m @3m)			Remark								
	30MHz-88MHz	40.0			Quasi-peak Value								
	88MHz-216MHz	43.5			Quasi-peak Value								
	216MHz-960MHz	46.0			Quasi-peak Value								
	960MHz-1GHz	54.0			Quasi-peak Value								
Test setup:	Above 1GHz												
	54.0												
Test setup:	74.0												
	Peak Value												
Below 1GHz													
													
Above 1GHz													
													

Test Procedure:	<ol style="list-style-type: none">1. The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

1. During the test, pre-scan the GFSK modulation, and found the GFSK modulation which it is worse case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement data:

■ **Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
33.45	24.32	14.31	0.59	30.08	9.14	40.00	-30.86	Vertical
50.94	24.46	15.21	0.78	29.99	10.46	40.00	-29.54	Vertical
102.36	24.96	14.92	1.21	29.68	11.41	43.50	-32.09	Vertical
163.18	23.82	10.77	1.65	29.34	6.90	43.50	-36.60	Vertical
393.47	23.43	16.92	2.82	29.53	13.64	46.00	-32.36	Vertical
704.23	23.87	20.86	4.10	29.20	19.63	46.00	-26.37	Vertical
33.33	24.39	14.31	0.59	30.08	9.21	40.00	-30.79	Horizontal
56.00	24.38	14.95	0.83	29.95	10.21	40.00	-29.79	Horizontal
127.22	24.19	11.32	1.41	29.53	7.39	43.50	-36.11	Horizontal
225.31	23.93	13.41	1.99	29.44	9.89	46.00	-36.11	Horizontal
408.95	25.80	17.26	2.90	29.48	16.48	46.00	-29.52	Horizontal
691.99	24.40	20.78	4.06	29.21	20.03	46.00	-25.97	Horizontal

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4811.00	40.44	31.78	8.60	32.09	48.73	74.00	-25.27	Vertical
7216.50	36.00	36.15	11.66	31.99	51.82	74.00	-22.18	Vertical
9622.00	31.83	38.01	14.14	31.60	52.38	74.00	-21.62	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4811.00	41.97	31.78	8.60	32.09	50.26	74.00	-23.74	Horizontal
7216.50	35.01	36.15	11.66	31.99	50.83	74.00	-23.17	Horizontal
9622.00	31.96	38.01	14.14	31.60	52.51	74.00	-21.49	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880.00	40.40	31.85	8.66	32.12	48.79	74.00	-25.21	Vertical
7320.00	35.43	36.37	11.72	31.89	51.63	74.00	-22.37	Vertical
9760.00	31.25	38.35	14.25	31.59	52.26	74.00	-21.74	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4880.00	41.91	31.91	8.71	32.16	50.37	74.00	-23.63	Horizontal
7320.00	34.16	36.56	11.79	31.80	50.71	74.00	-23.29	Horizontal
9760.00	31.32	38.35	14.25	31.59	52.33	74.00	-21.67	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- **, means this data is the too weak instrument of signal is unable to test.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4950.00	39.65	31.91	8.71	32.16	48.11	74.00	-25.89	Vertical
7425.00	34.18	36.56	11.79	31.80	50.73	74.00	-23.27	Vertical
9900.00	31.18	38.81	14.35	31.85	52.49	74.00	-21.51	Vertical
12210.00	*					74.00		Vertical
14652.00	*					74.00		Vertical
4950.00	41.29	31.85	8.66	32.12	49.68	74.00	-24.32	Horizontal
7425.00	34.61	36.37	11.72	31.89	50.81	74.00	-23.19	Horizontal
9760.00	32.30	38.81	14.35	31.85	53.61	74.00	-20.39	Horizontal
12210.00	*					74.00		Horizontal
14652.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4811.00	30.30	31.78	8.60	32.09	38.59	54.00	-15.41	Vertical
7216.50	26.22	36.15	11.66	31.99	42.04	54.00	-11.96	Vertical
9622.00	22.29	38.01	14.14	31.60	42.84	54.00	-11.16	Vertical
12210.00	*					54.00		Vertical
14652.00	*					54.00		Vertical
4811.00	31.98	31.78	8.60	32.09	40.27	54.00	-13.73	Horizontal
7216.50	25.53	36.15	11.66	31.99	41.35	54.00	-12.65	Horizontal
9622.00	22.37	38.01	14.14	31.60	42.92	54.00	-11.08	Horizontal
12210.00	*					54.00		Horizontal
14652.00	*					54.00		Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- **, means this data is the too weak instrument of signal is unable to test.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest							
---------------	---------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880.00	30.65	31.85	8.66	32.12	39.04	54.00	-14.96	Vertical
7320.00	25.54	36.37	11.72	31.89	41.74	54.00	-12.26	Vertical
9760.00	21.43	38.35	14.25	31.59	42.44	54.00	-11.56	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4880.00	31.56	31.85	8.66	32.12	39.95	54.00	-14.05	Horizontal
7320.00	24.58	36.37	11.72	31.89	40.78	54.00	-13.22	Horizontal
9760.00	21.21	38.35	14.25	31.59	42.22	54.00	-11.78	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4950.00	29.72	31.91	8.71	32.16	38.18	54.00	-15.82	Vertical
7425.00	24.32	36.56	11.79	31.80	40.87	54.00	-13.13	Vertical
9900.00	21.47	38.81	14.35	31.85	42.78	54.00	-11.22	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4950.00	32.04	31.91	8.71	32.16	40.50	54.00	-13.50	Horizontal
7425.00	24.51	36.56	11.79	31.80	41.06	54.00	-12.94	Horizontal
9900.00	22.57	38.81	14.35	31.85	43.88	54.00	-10.12	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

8 Test Setup Photo

Radiated Emission

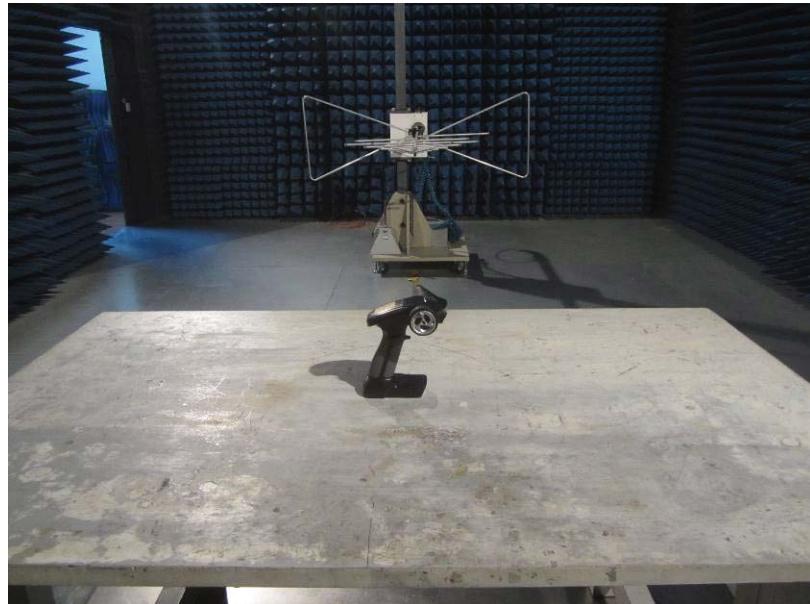




9 EUT Constructional Details








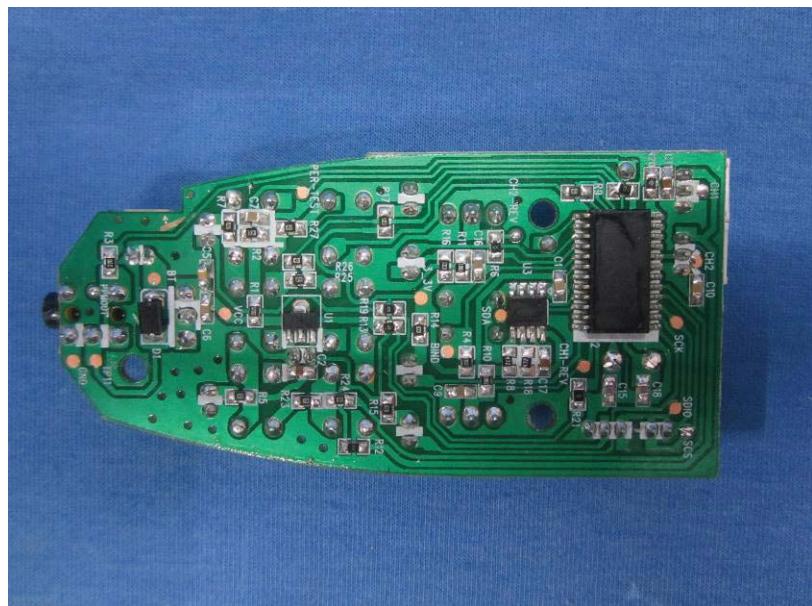

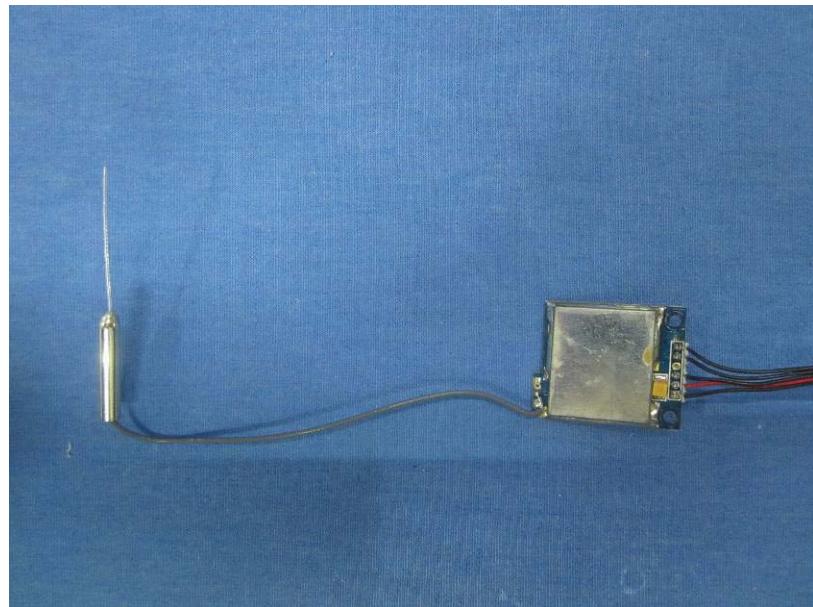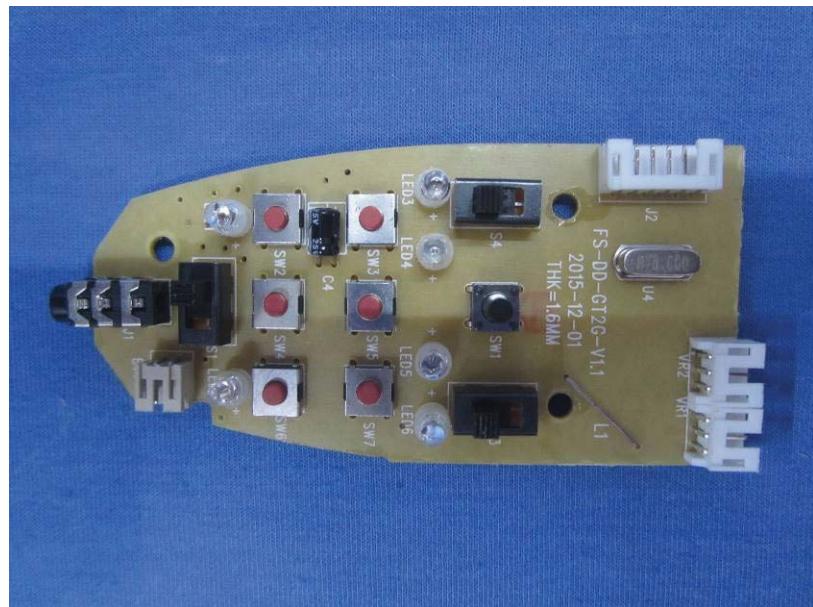

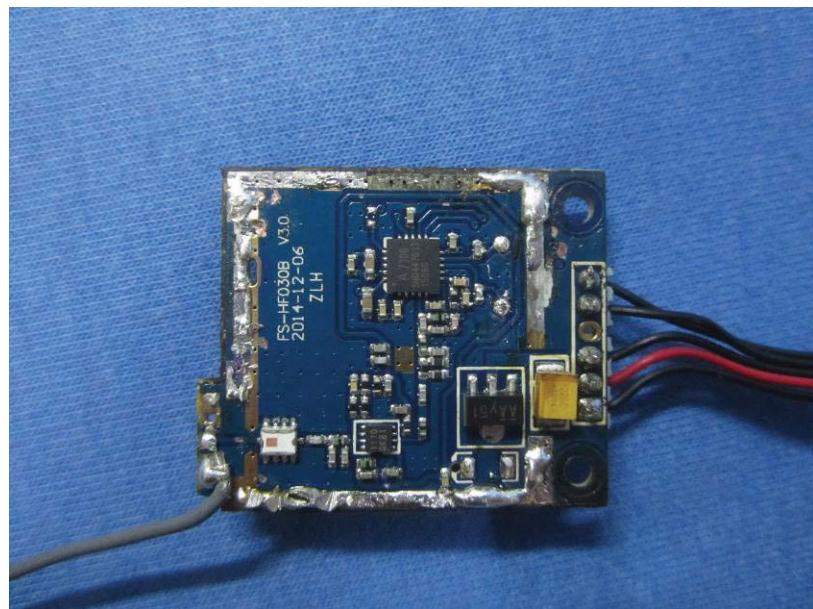



-----End-----