

TEST REPORT

Applicant: Fujian LANDI Commercial Equipment Co.,Ltd.

Address: Building 17, Section A, Software Park, No. 89 Software Road,
Gulou District, Fuzhou Municipality, Fujian Province, China

Product Name: Mobile Terminal

FCC ID: 2AG6N-M20

Standard(s): 47 CFR Part 2, 47 CFR Part 22, Subpart H
47 CFR Part 24, Subpart E
47 CFR Part 27
47 CFR Part 90
ANSI C63.26-2015

Report Number: 2402Z105148E-RF-00EA1

Report Date: 2025/2/25

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Pedro Yun

Reviewed By: Pedro Yun

Title: Project Engineer

Gavin Xu

Approved By: Gavin Xu

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

CONTENTS

DOCUMENT REVISION HISTORY	3
1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 ACCESSORY INFORMATION.....	4
1.3 OPERATION VOLTAGE(V_{DC})▲:	5
1.4 TRANSMISSION ANTENNA INFORMATION▲	5
1.5 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 EUT OPERATION CONDITION:	7
3.2 SUPPORT EQUIPMENT LIST AND DETAILS	13
3.3 SUPPORT CABLE LIST AND DETAILS	13
3.4 BLOCK DIAGRAM OF TEST SETUP	13
3.5 TEST FACILITY.....	15
3.6 MEASUREMENT UNCERTAINTY	15
4. REQUIREMENTS AND TEST PROCEDURES	16
4.1 APPLICABLE STANDARD FOR PART 22 SUBPART H:	16
4.2 APPLICABLE STANDARD FOR PART 24 SUBPART E:	17
4.3 APPLICABLE STANDARD FOR PART 27:	18
4.4 APPLICABLE STANDARD FOR PART 90:	21
4.5 TEST METHOD:	22
5. Test DATA AND RESULTS.....	25
5.1 SPOT CHECK WITH MAXIMUM CONDUCTED OUTPUT POWER:	25
5.2 RADIATED SPURIOUS EMISSIONS.....	62
EXHIBIT A - EUT PHOTOGRAPHS.....	88
EXHIBIT B - TEST SETUP PHOTOGRAPHS	89

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	XMDN240206-08120E-RF-00E	Original Report	2024/6/14
2.0	2402Z105148E-RF-00EA1	Class II Permissive Change Report	2025/2/25

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Mobile Terminal
EUT Model:	M20SE
Operation Bands and modes:	GPRS/EDGE: 850/1900 WCDMA: Band 2/4/5 LTE: Band 2/4/5/7/12/13/17/25/26/41/66/71
Modulation Type:	GMSK, 8PSK, BPSK, QPSK, 16QAM
Rated Input Voltage:	5Vdc from Adapter or 7.7Vdc from battery
Serial Number:	2UEW-24 (For RF Conducted Test: Configuration 3#) 2UEW-22 (For RF Conducted Test: Configuration 4#) 2UEW-21 (For RF Conducted Test: Configuration 5#) 2UEW-36 (For Radiated spurious emission and AC line conducted emission tests: Configuration 3#) 2UEW-35 (For Radiated spurious emission and AC line conducted emission tests: Configuration 4#) 2UEW-7 (For Radiated spurious emission and AC line conducted emission tests: Configuration 5#)
EUT Received Date:	2024/11/19
EUT Received Status:	Good
Note : The multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

1.2 Accessory Information

Configuration Information:

Configuration	HVIN	Scanning camera (LD47)	Scanning camera (N5703) (old)
3#	M20SES1	×	√
4#	M20SES0	×	×
5#	M20SES2	√	×

Battery Information:

Battery No.	Manufacturer	Model	Parameters
1#	HuiZhou Ganfeng LiEnergy Battery Technology Co.,LTD.	526265-2S (2ICP6/62/65)	DC 7.7V 3550mAh/27.34Wh
2#	SCUD(Fujian)Electronics Co.,LTD	526266-2S (2ICP6/62/66)	DC 7.7V 3620mAh/27.874Wh

Adapter Information:

Adapter No.	Manufacturer	Model	Parameters
1#	Something High Electric (Xiamen) Company Inc.	P12GUSB050200	Input: 100-240Vac~50/60Hz 0.3A Output: 5.0Vdc,2.0A
2#	SHENZHEN KEYU POWER SUPPLY TECHNOLOGY CO., LTD	KA1602-0502000DEU	Input: 100-240Vac~50/60Hz 0.35A Output: 5.0Vdc 2.0A,10W

1.3 Operation Voltage(V_{DC}) ▲ :

Lowest:	6.8	Normal:	7.7	Highest:	8.8
---------	-----	---------	-----	----------	-----

1.4 Transmission Antenna Information ▲

Antenna	Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain (G _r) (dBi)	L _c (dB)
Main	FPC	GSM850	824-849	-1.94	0
		PCS1900	1850-1910	-1.72	0
		WCDMA B2	1850-1910	-1.72	0
		WCDMA B4	1710-1755	0.93	0
		WCDMA B5	824-849	-1.94	0
		LTE B2	1850-1910	-1.72	0
		LTE B4	1710-1755	0.93	0
		LTE B5	824-849	-1.94	0
		LTE B7	2500-2570	1.85	0
		LTE B12	699-716	-1.83	0
		LTE B13	777-787	-1.98	0
		LTE B17	704-716	-1.83	0
		LTE B25	1850-1915	-1.72	0
		LTE B26	814-849	-1.94	0
		LTE B41	2496-2690	1.85	0
		LTE B66	1710-1780	0.93	0
		LTE B71	663-698	-1.83	0
Note: 1. Lc= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.					

1.5 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913;§ 24.232; §27.50; §90.635	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905, §22.917; § 24.238; §27.53; §90.209	Occupied Bandwidth	Compliant*
FCC§ 2.1051;§ 22.917; § 24.238; §27.53;§90.691	Spurious Emissions at Antenna Terminal	Compliant*
FCC§ 22.917; § 24.238; §27.53; §90.691	Out of band emission, Band Edge	Compliant*
FCC§ 2.1055;§ 22.355; § 24.235; §27.54;§90.213	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant*
FCC§ 2.1053§ 22.917; § 24.238; §27.53; §90.691	Radiated Spurious Emission	Compliant

Purpose:

This is Class II permissive change application based on the original device, model: M20,M20SE, FCC ID: 2AG6N-M20, please refer to report No.: XMDN240206-08120E-RF-00E, issued on 2024/6/14. Differences between the previous device and the current one are stated and guaranteed by the manufacturer, as following:

1. Model M20SE added a scanning camera (model: LD47).
2. Model M20SE Changed BT/WIFI/GPS and WWAN Main Antenna.

The Bay Area Compliance Laboratories Corp.(Dongguan) is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report.

Note 1:

Compliant*: The change of the EUT does not affect the test result, the test result please refer to original report NO.: XMDN240206-08120E-RF-00E.

3. DESCRIPTION OF TEST CONFIGURATION

3.1 EUT Operation Condition:

The EUT was configured for testing according to ANSI C63.26-2015.

The test items were performed with the EUT operating at testing mode. The device operates on GSM Band 850/1900MHz, WCDMA Band 2/4/5, and LTE band 2/4/5/7/12/13/25/26/38/41/66, test was performed with channels as below table:

Frequency Bands	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
GSM 850	0.25	824.2	836.6	848.8
GSM 1900	0.25	1850.2	1880	1909.8
WCDMA Band 2	4.2	1852.4	1880	1907.6
WCDMA Band 4	4.2	1712.4	1732.6	1752.6
WCDMA Band 5	4.2	826.4	836.6	846.6
LTE Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855	1880	1905
	15	1857.5	1880	1902.5
	20	1860	1880	1900
LTE Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715	1732.5	1750
	15	1717.5	1732.5	1747.5
	20	1720	1732.5	1745
LTE Band 5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829	836.5	844
LTE Band 7	5	2502.5	2535	2567.5
	10	2505	2535	2565
	15	2507.5	2535	2562.5
	20	2510	2535	2560
LTE Band 12	1.4	699.7	707.5	715.3
	3	700.5	707.5	714.5
	5	701.5	707.5	713.5
	10	704	707.5	711
LTE Band 13	5	779.5	/	784.5
	10	/	782	/
LTE Band 17	5	706.5	710	713.5
	10	709	710	711
LTE Band 25	1.4	1850.7	1882.5	1914.3
	3	1851.5	1882.5	1913.5
	5	1852.5	1882.5	1912.5
	10	1855	1882.5	1910
	15	1857.5	1882.5	1907.5
	20	1860	1882.5	1905

LTE Band 26 (Part 22H) (B26_2)	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829	836.5	844
	15	831.5	836.5	841.5
LTE Band 41	5	2502.5	2595	2687.5
	10	2505	2595	2685
	15	2507.5	2595	2682.5
	20	2510	2595	2680
LTE Band 66	1.4	1710.7	1745	1779.3
	3	1711.5	1745	1778.5
	5	1712.5	1745	1777.5
	10	1715	1745	1775
	15	1717.5	1745	1772.5
	20	1720	1745	1770
LTE Band 71	5	665.5	680.5	695.5
	10	668	680.5	693
	15	670.5	680.5	690.5
	20	673	680.5	688

Frequency Bands	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
LTE Band 26 (Part 90) (B26_1)	1.4	814.7	/	823.3
	3	815.5	/	822.5
	5	816.5	/	821.5
	10	819	/	/
	15	821.5	/	/
LTE Band 26 (Part 90 and Cross 22H) (B26_3)	1.4	/	824	/
	3	/	824	/
	5	/	824	/
	10	/	824	/
	15	/	824	/

The maximum power was configured per 3GPP Standard for each operation modes as below setting:

GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9 / 15	1 / 5	0
	β_{ec}	20 / 225	12/15	30 / 15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30 / 15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	PR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6		8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	482.8	205.8	308.9
	Referenc E_F 1	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE(TDD):

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink		UpPTS		Extended cyclic prefix in downlink	
	DwPTS	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	DwPTS	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \# \text{ of S} + \# \text{ of U}$

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

3.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
unknown	Antenna	unknown	unknown
R&S	Wideband Radio Communication Tester	CMW500	110479

3.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1	Adapter	EUT
Signal Cable	No	No	3	Antenna	Wideband Radio Communication Tester

3.4 Block Diagram of Test Setup

Radiated Spurious Emission:
Below 1G:

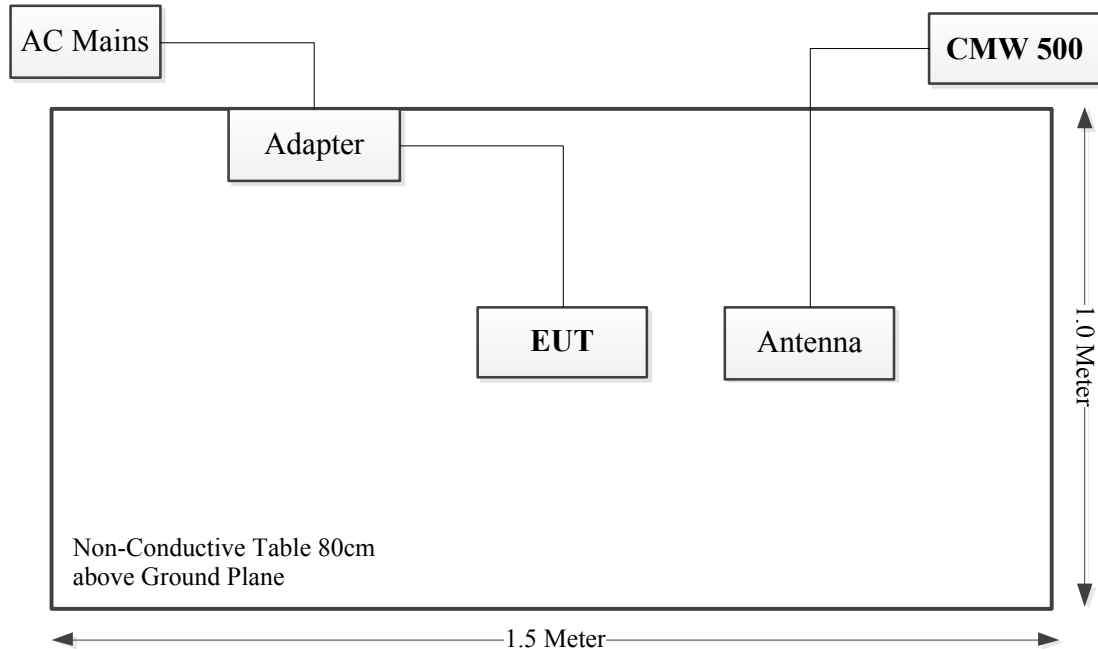

Above 1G:

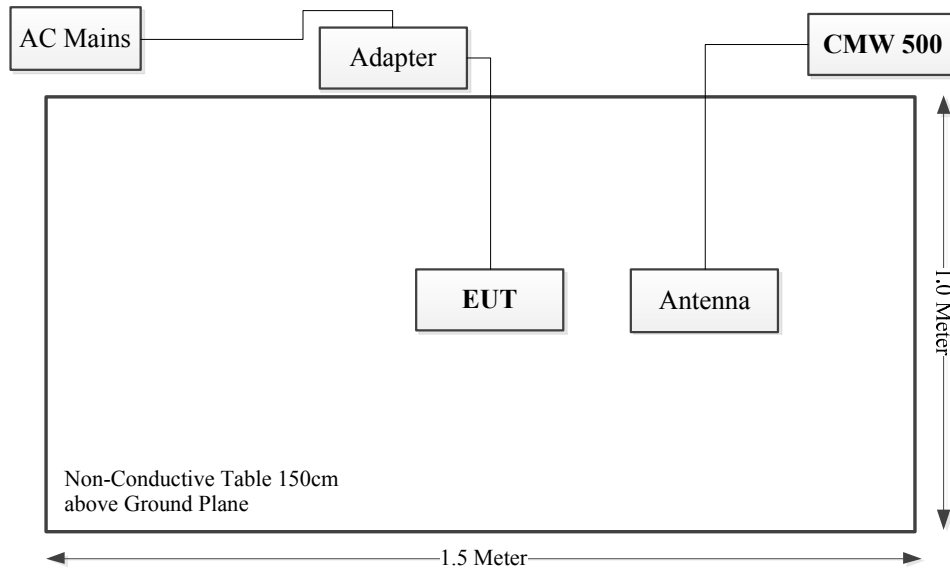

3.5 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.6 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶

4. REQUIREMENTS AND TEST PROCEDURES

4.1 Applicable Standard For Part 22 Subpart H:

4.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (see FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

4.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

4.2 Applicable Standard For Part 24 Subpart E:

4.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

4.3 Applicable Standard For Part 27:

4.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

4.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to – 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and – 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

4.4 Applicable Standard For Part 90:

4.4.1 RF Output Power

FCC §90.635

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

4.4.2 Spurious Emissions

FCC §90.691

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

4.5 Test Method:

4.5.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:



Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

4.5.2 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

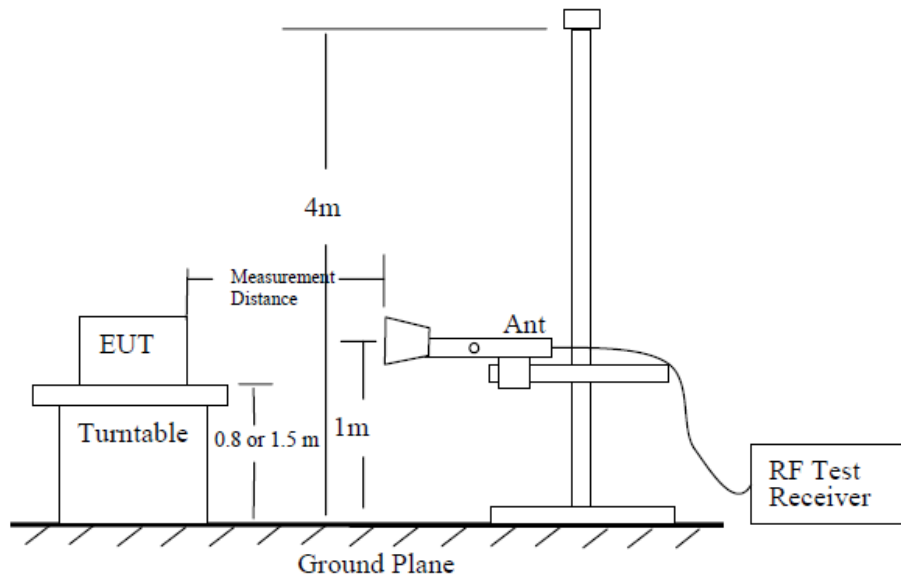


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

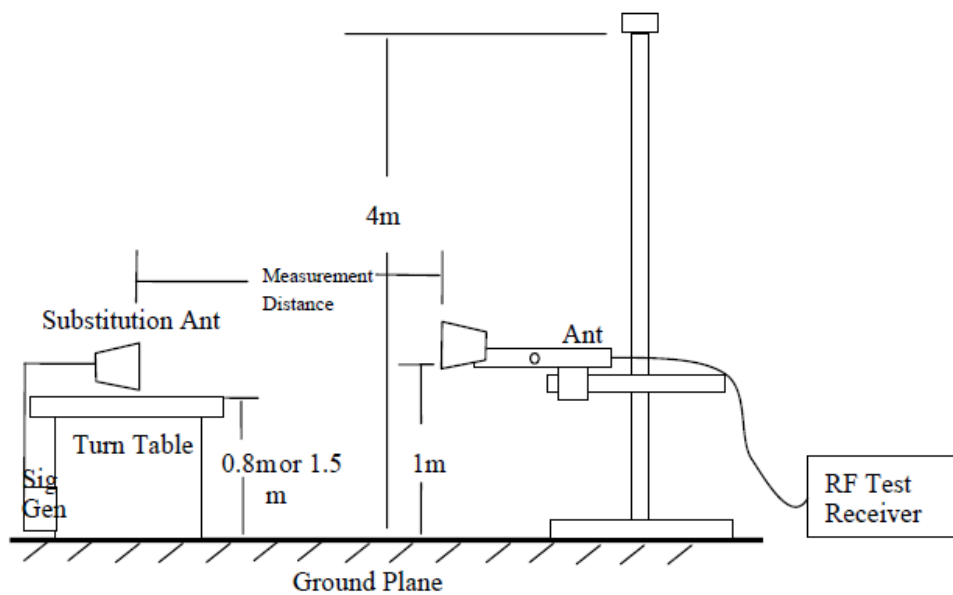


Figure 7—Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where

P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

5. Test DATA AND RESULTS

5.1 Spot Check With Maximum Conducted Output Power:

Serial Number:	2UEW-21, 2UEW-22, 2UEW-24	Test Date:	2024/11/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Karl Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.1	Relative Humidity: (%)	54	ATM Pressure: (kPa)	102.1
----------------------	------	------------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Wideband Radio Communication Tester	CMW500	149216	2024/9/5	2025/9/4

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data: Configuration5#: GSM850:

Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GPRS 1 Slot	33.76	34	33.6	29.91	38.45
GPRS 2 Slots	32.86	32.74	32.58	28.77	38.45
GPRS 3 Slots	31.93	31.63	31.48	27.84	38.45
GPRS 4 Slots	29.87	29.63	29.08	25.78	38.45
EDGE 1 Slot	29.69	28.99	29.06	25.6	38.45
EDGE 2 Slots	28.61	27.8	28.19	24.52	38.45
EDGE 3 Slots	27.47	27	26.9	23.38	38.45
EDGE 4 Slots	25.27	24.86	25.09	21.18	38.45

Note:

$ERP = \text{Conducted Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBd})$

$G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15$

Result:**Pass**

WCDMA Band 5:

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.77	23.53	23.57	19.68	38.45
HSDPA Subtest 1	21.23	20.67	20.96	17.14	38.45
HSDPA Subtest 2	21.02	20.86	21.25	17.16	38.45
HSDPA Subtest 3	20.82	21.41	20.81	17.32	38.45
HSDPA Subtest 4	20.76	21.01	21.5	17.41	38.45
HSUPA Subtest 1	21.52	21.43	21.15	17.43	38.45
HSUPA Subtest 2	21.73	21.6	21.88	17.79	38.45
HSUPA Subtest 3	21.51	22.23	21.93	18.14	38.45
HSUPA Subtest 4	21.33	21.62	22.06	17.97	38.45
HSUPA Subtest 5	21.19	21.24	21.63	17.54	38.45
DC-HSDPA Subtest 1	23.49	23.77	23.82	19.73	38.45
DC-HSDPA Subtest 2	23.67	23.49	23.87	19.78	38.45
DC-HSDPA Subtest 3	23.29	23.55	23.83	19.74	38.45
DC-HSDPA Subtest 4	23.35	23.51	23.55	19.46	38.45
HSPA+ Subtest 1	23.46	23.64	23.45	19.55	38.45
Note: ERP= Conducted Power(dBm) - Lc(dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15					
				Result:	Pass

LTE Band 26:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)						Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel For 90S	Highest Channel For 90S	Cross Channel	Lowest Frequency For 22H	Middle Frequency For 22H	Highest Frequency For 22H		
1.4MHz QPSK	RB1#0	22.56	23.28	23.5	21.8	22.6	22.58	19.71	38.45
	RB1#3	22.67	23.22	23.78	22.24	22.76	23.1		
	RB1#5	22.52	23.41	23.67	21.97	22.49	22.64		
	RB3#0	22.49	23.57	23.59	21.95	22.64	22.65		
	RB3#3	22.77	23.8	23.58	21.72	22.37	22.31		
	RB6#0	21.57	22.41	22.36	20.94	21.59	21.81		
1.4MHz 16QAM	RB1#0	21.67	22.83	22.66	20.87	21.73	21.8	19.17	38.45
	RB1#3	21.59	23.15	23.26	21.01	21.53	21.78		
	RB1#5	21.56	23.13	22.67	20.84	21.46	21.4		
	RB3#0	21.66	22.45	22.55	21.05	21.63	21.81		
	RB3#3	21.83	22.69	22.55	20.96	21.7	21.74		
	RB6#0	20.83	21.78	21.35	19.81	20.65	20.7		
3MHz QPSK	RB1#0	22.5	23.3	23.55	22.16	22.67	22.57	19.82	38.45
	RB1#8	22.64	23.91	23.55	21.75	22.76	22.37		
	RB1#14	22.84	23.57	23.29	21.88	22.8	22.66		
	RB6#0	21.3	22.6	22.7	20.89	21.62	21.52		
	RB6#9	21.66	22.65	22.58	20.97	21.45	21.46		
	RB15#0	21.52	22.4	22.49	20.93	21.68	21.77		
3MHz 16QAM	RB1#0	21.85	22.98	22.54	21.27	21.98	22.16	18.89	38.45
	RB1#8	21.48	22.91	22.17	21	22.16	21.86		
	RB1#14	21.45	22.79	22.35	21.06	21.8	21.88		
	RB6#0	20.36	21.57	21.6	20.08	20.99	20.73		
	RB6#9	20.59	21.58	21.57	19.96	20.69	20.96		
	RB15#0	20.43	21.5	21.33	20.32	20.8	21.12		
5MHz QPSK	RB1#0	22.61	23.16	23.35	21.51	22.87	22.54	19.45	38.45
	RB1#13	22.54	23.27	23.54	21.71	22.56	22.7		
	RB1#24	22.39	23.22	23.12	21.69	22.31	22.56		
	RB15#0	21.64	22.61	22.53	21.04	21.83	21.7		
	RB15#10	21.75	22.67	22.46	21.17	21.49	21.54		
	RB25#0	21.68	22.45	22.69	20.85	21.51	21.61		
5MHz 16QAM	RB1#0	22.06	21.62	22.5	21.29	21.28	21.29	18.57	38.45
	RB1#13	22.01	22.66	22.44	21.71	21.24	21.84		
	RB1#24	22.12	21.94	21.98	21.36	20.57	20.87		
	RB15#0	20.53	21.33	21.75	20.12	20.81	20.56		
	RB15#10	20.56	21.41	21.67	19.95	20.56	20.67		
	RB25#0	20.76	21.64	21.43	19.98	20.69	20.85		
10MHz QPSK	RB1#0	22.52	/	23.68	22.77	23.16	22.79	20.01	38.45
	RB1#25	22.82	/	24.1	23.19	23.33	22.92		
	RB1#49	23.18	/	23.52	22.92	22.57	22.79		
	RB25#0	21.93	/	22.69	22.01	22.01	21.51		
	RB25#25	21.85	/	22.66	22.04	21.59	21.74		
	RB50#0	22	/	22.59	21.8	21.7	21.86		

10MHz 16QAM	RB1#0	22.09	/	22.67	22.76	22.11	22.24	19.36	38.45
	RB1#25	22.26	/	23.45	23.25	22.2	22.6		
	RB1#49	22.6	/	22.66	22.44	21.45	21.53		
	RB25#0	21	/	21.77	21.31	21.29	21.06		
	RB25#25	21.12	/	21.59	20.66	20.79	21.03		
	RB50#0	20.9	/	21.71	20.96	20.78	20.61		
15MHz QPSK	RB1#0	22.52	/	23.01	22.73	22.42	22.53	19.03	38.45
	RB1#38	23.04	/	23.12	22.68	22.73	22.88		
	RB1#74	22.99	/	22.73	22.6	22.67	22.63		
	RB36#0	21.7	/	22.05	21.68	21.84	21.89		
	RB36#39	21.73	/	21.9	21.88	21.85	21.76		
	RB75#0	21.89	/	21.91	21.79	21.94	21.84		
15MHz 16QAM	RB1#0	22.39	/	22.06	21.74	22.01	21.93	19.12	38.45
	RB1#38	22.18	/	23.21	21.94	22.25	22.95		
	RB1#74	22.1	/	22.51	21.03	21.64	21.98		
	RB36#0	20.93	/	21.05	20.94	20.66	20.68		
	RB36#39	21.09	/	20.99	20.65	20.58	20.73		
	RB75#0	20.74	/	21	20.52	20.89	20.83		
Note: ERP= Conducted Power(dBm) - L _C (dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15									
								Result:	Pass

Configuration4#:**GSM850:****RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GPRS 1 Slot	33.98	33.95	33.64	29.89	38.45
GPRS 2 Slots	32.67	32.4	32.59	28.58	38.45
GPRS 3 Slots	31.6	31.35	31.39	27.51	38.45
GPRS 4 Slots	29.68	29.62	29.34	25.59	38.45
EDGE 1 Slot	29.41	29.09	29.42	25.33	38.45
EDGE 2 Slots	28.38	27.73	28.27	24.29	38.45
EDGE 3 Slots	27.54	26.73	26.98	23.45	38.45
EDGE 4 Slots	25.49	24.73	25.14	21.4	38.45

Note:

ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)

Gr(dBd)=Gr(dBi)-2.15

Result:**Pass****WCDMA B5:****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.64	23.59	23.65	19.56	38.45
HSDPA Subtest 1	21.24	20.82	20.68	17.15	38.45
HSDPA Subtest 2	20.85	21.14	21.11	17.05	38.45
HSDPA Subtest 3	20.83	21.42	20.97	17.33	38.45
HSDPA Subtest 4	21.04	21.29	21.49	17.4	38.45
HSUPA Subtest 1	21.81	21.36	21.27	17.72	38.45
HSUPA Subtest 2	21.59	21.78	21.87	17.78	38.45
HSUPA Subtest 3	21.56	22.22	21.85	18.13	38.45
HSUPA Subtest 4	21.29	21.97	21.92	17.88	38.45
HSUPA Subtest 5	21.17	21.4	21.6	17.51	38.45
DC-HSDPA Subtest 1	23.72	23.78	23.78	19.69	38.45
DC-HSDPA Subtest 2	23.68	23.85	23.92	19.83	38.45
DC-HSDPA Subtest 3	23.57	23.63	23.66	19.57	38.45
DC-HSDPA Subtest 4	23.31	23.44	23.67	19.58	38.45
HSPA+ Subtest 1	23.2	23.75	23.62	19.66	38.45

Note:

ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)

Gr(dBd)=Gr(dBi)-2.15

Result:**Pass**

LTE Band 26:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)						Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel For 90S	Highest Channel For 90S	Cross Channel	Lowest Frequency For 22H	Middle Frequency For 22H	Highest Frequency For 22H		
1.4MHz QPSK	RB1#0	22.67	23.59	23.66	22.15	22.46	22.57	19.75	38.45
	RB1#3	22.87	23.44	23.61	22.35	22.67	22.82		
	RB1#5	22.75	23.51	23.48	22.14	22.73	22.85		
	RB3#0	22.82	23.33	23.84	21.77	22.47	22.72		
	RB3#3	22.55	23.75	23.84	21.63	22.47	22.65		
	RB6#0	21.49	22.38	22.53	21.26	21.55	21.95		
1.4MHz 16QAM	RB1#0	21.59	23.11	23.02	20.94	22.02	21.74	19.13	38.45
	RB1#3	21.64	23.22	23.14	21.15	21.67	21.58		
	RB1#5	21.72	23.17	22.79	21.11	21.39	21.37		
	RB3#0	21.66	22.36	22.63	21.23	21.89	21.83		
	RB3#3	21.94	22.64	22.59	20.88	21.79	22.01		
	RB6#0	20.75	21.69	21.53	19.87	20.66	20.89		
3MHz QPSK	RB1#0	22.8	23.51	23.36	22.05	22.96	22.57	19.72	38.45
	RB1#8	22.67	23.81	23.61	21.66	22.97	22.62		
	RB1#14	22.86	23.46	23.71	21.64	22.53	22.38		
	RB6#0	21.45	22.58	22.69	21.08	21.67	21.68		
	RB6#9	21.65	22.46	22.65	20.83	21.57	21.87		
	RB15#0	21.77	22.61	22.38	21.16	21.82	21.63		
3MHz 16QAM	RB1#0	22.19	23.02	22.34	21.45	22.22	22.07	19.04	38.45
	RB1#8	21.64	22.87	22.46	21.33	22.12	22.21		
	RB1#14	21.35	23.13	22.55	21.45	22.09	21.82		
	RB6#0	20.56	21.79	21.38	20.25	20.93	20.74		
	RB6#9	20.54	21.77	21.41	20.14	20.89	20.76		
	RB15#0	20.85	21.45	21.66	20.33	20.55	20.37		
5MHz QPSK	RB1#0	22.78	23.42	23.58	21.67	22.86	22.77	19.56	38.45
	RB1#13	22.37	23.65	23.61	22.16	22.88	22.52		
	RB1#24	22.51	23.42	22.61	22.04	22.43	22.38		
	RB15#0	21.81	22.65	22.39	21.08	21.42	21.62		
	RB15#10	21.49	22.63	22.55	21.13	21.48	21.56		
	RB25#0	21.37	22.56	22.45	21.06	21.54	21.51		
5MHz 16QAM	RB1#0	22.39	21.33	22.46	21.37	21.49	21.61	18.85	38.45
	RB1#13	22.14	22.94	22.89	21.81	21.63	22.12		
	RB1#24	22.32	22.12	22.31	21.51	20.59	21.37		
	RB15#0	20.56	21.5	21.68	20.14	21	20.69		
	RB15#10	20.93	21.72	21.74	20.3	20.81	20.7		
	RB25#0	20.8	21.63	21.4	20	20.75	21.02		
10MHz QPSK	RB1#0	22.68	/	23.56	23.42	23.1	22.9	20.04	38.45
	RB1#25	22.87	/	24.13	23.22	23.11	22.72		
	RB1#49	22.91	/	23.67	23.03	22.85	22.49		
	RB25#0	21.83	/	22.8	21.78	21.58	21.61		
	RB25#25	21.76	/	22.62	21.93	21.74	21.65		
	RB50#0	21.99	/	22.7	21.76	21.66	21.89		

10MHz 16QAM	RB1#0	22.49	/	22.74	22.39	22.13	22.34	19.47	38.45
	RB1#25	22.34	/	23.45	23.56	22.76	22.79		
	RB1#49	22.52	/	22.87	22.68	21.17	21.96		
	RB25#0	20.91	/	21.49	21.39	21.44	21.08		
	RB25#25	20.84	/	21.65	20.94	20.55	20.88		
	RB50#0	20.95	/	21.83	20.84	20.69	20.76		
15MHz QPSK	RB1#0	22.38	/	23.16	22.45	22.6	22.67	19.07	38.45
	RB1#38	22.66	/	23.1	22.75	22.73	22.62		
	RB1#74	22.91	/	22.67	22.74	22.93	22.83		
	RB36#0	21.47	/	22.09	21.68	21.85	21.76		
	RB36#39	21.85	/	21.82	21.83	21.7	21.95		
	RB75#0	21.88	/	21.88	21.61	21.55	21.88		
15MHz 16QAM	RB1#0	22.19	/	22.09	21.74	22	22.01	19.25	38.45
	RB1#38	21.84	/	23.34	21.95	22.17	22.48		
	RB1#74	22.12	/	22.19	21.01	21.69	21.77		
	RB36#0	21.06	/	21.16	21.07	20.95	20.82		
	RB36#39	20.49	/	21.25	20.89	20.74	20.71		
	RB75#0	20.58	/	20.58	20.47	20.92	20.69		
Note: ERP= Conducted Power(dBm) - L _C (dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15									
								Result:	Pass

Configuration3#:
GSM850:

RF Output Power					
Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GPRS 1 Slot	33.81	33.74	33.62	29.72	38.45
GPRS 2 Slots	32.77	32.51	32.37	28.68	38.45
GPRS 3 Slots	31.85	31.53	31.3	27.76	38.45
GPRS 4 Slots	29.53	29.29	29.2	25.44	38.45
EDGE 1 Slot	29.53	29.11	29.09	25.44	38.45
EDGE 2 Slots	28.4	27.92	28.07	24.31	38.45
EDGE 3 Slots	27.43	26.83	26.93	23.34	38.45
EDGE 4 Slots	25.35	24.69	25.02	21.26	38.45
Note: ERP= Conducted Power(dBm) - L _c (dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15					
				Result:	Pass

WCDMA B5:

RF Output Power:					
Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.83	23.7	23.57	19.74	38.45
HSDPA Subtest 1	21.22	21.04	20.89	17.13	38.45
HSDPA Subtest 2	21.04	21.07	21.04	16.98	38.45
HSDPA Subtest 3	20.95	21.15	20.97	17.06	38.45
HSDPA Subtest 4	21.04	21.05	21.59	17.5	38.45
HSUPA Subtest 1	21.61	21.25	21.04	17.52	38.45
HSUPA Subtest 2	21.52	21.86	22.02	17.93	38.45
HSUPA Subtest 3	21.49	22.21	21.79	18.12	38.45
HSUPA Subtest 4	21.27	21.95	21.84	17.86	38.45
HSUPA Subtest 5	21.42	21.39	21.32	17.33	38.45
DC-HSDPA Subtest 1	23.57	23.74	24.16	20.07	38.45
DC-HSDPA Subtest 2	23.44	23.49	23.95	19.86	38.45
DC-HSDPA Subtest 3	23.41	23.52	23.71	19.62	38.45
DC-HSDPA Subtest 4	23.25	23.75	23.58	19.66	38.45
HSPA+ Subtest 1	23.47	23.78	23.39	19.69	38.45
Note: $ERP = \text{Conducted Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBd})$ $G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15$					
				Result:	Pass

LTE Band 26:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)						Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel For 90S	Highest Channel For 90S	Cross Channel	Lowest Frequency For 22H	Middle Frequency For 22H	Highest Frequency For 22H		
1.4MHz QPSK	RB1#0	22.61	23.57	23.75	21.47	22.67	22.68	19.8	38.45
	RB1#3	22.65	23.51	23.85	22.35	22.58	23.1		
	RB1#5	22.6	23.67	23.84	21.88	22.87	22.8		
	RB3#0	22.64	23.62	23.89	21.72	22.38	22.48		
	RB3#3	22.78	23.29	23.58	21.61	22.77	22.18		
	RB6#0	21.56	22.47	22.67	21.34	21.54	22.3		
1.4MHz 16QAM	RB1#0	21.95	23.11	22.87	21.25	22	21.49	19.39	38.45
	RB1#3	21.83	23.48	23.45	21.33	21.66	21.51		
	RB1#5	21.54	23.36	22.94	20.89	21.83	21.65		
	RB3#0	21.69	22.62	22.59	21.34	20.95	22.11		
	RB3#3	21.87	22.64	22.49	21.22	21.69	22.19		
	RB6#0	20.72	21.85	21.54	20.21	20.51	20.85		
3MHz QPSK	RB1#0	22.66	23.75	23.68	22.13	23.05	22.64	19.92	38.45
	RB1#8	22.83	24.01	23.56	21.92	22.76	22.76		
	RB1#14	22.68	22.57	22.59	22.35	22.46	22.78		
	RB6#0	21.62	22.8	22.63	20.79	21.83	21.39		
	RB6#9	21.66	22.88	22.67	21.06	21.55	21.34		
	RB15#0	21.59	22.38	22.73	21.33	21.69	21.84		
3MHz 16QAM	RB1#0	22.13	23.04	22.56	21.46	22.24	22.23	19	38.45
	RB1#8	21.72	22.78	22.26	21.41	22.34	22.43		
	RB1#14	21.45	23.09	22.45	21.24	22.12	22.42		
	RB6#0	20.91	21.53	21.68	20.13	21.32	20.6		
	RB6#9	20.59	21.69	21.51	20.22	20.67	21.21		
	RB15#0	20.46	21.53	21.47	20.54	20.7	21.02		
5MHz QPSK	RB1#0	22.38	22.47	23.67	22.1	23.11	22.48	19.67	38.45
	RB1#13	22.48	23.74	23.76	22.4	23.2	22.78		
	RB1#24	22.39	23.15	23.31	22.23	22.47	22.65		
	RB15#0	21.8	22.71	22.6	21.1	21.67	21.69		
	RB15#10	21.9	22.58	22.43	21.4	21.85	21.62		
	RB25#0	21.68	22.82	22.74	20.81	21.86	21.77		
5MHz 16QAM	RB1#0	22.03	21.66	22.43	21.41	22.68	22.62	18.72	38.45
	RB1#13	22.03	22.81	22.64	21.5	21.38	22.09		
	RB1#24	22.26	22.01	22.43	21.55	20.5	21.02		
	RB15#0	20.48	21.8	21.85	20.12	21.06	20.94		
	RB15#10	20.95	21.6	22.04	20.16	20.85	20.81		
	RB25#0	20.66	21.74	21.33	20.38	21.26	20.62		
10MHz QPSK	RB1#0	22.45	/	23.32	22.84	22.88	22.69	20.03	38.45
	RB1#25	23.06	/	24.12	23.11	23.12	22.89		
	RB1#49	23.15	/	23.88	23.05	22.96	22.91		
	RB25#0	21.69	/	22.77	22.18	22.11	21.79		
	RB25#25	22.05	/	22.68	22.01	21.85	21.59		
	RB50#0	22.03	/	22.65	21.85	21.81	21.92		

10MHz 16QAM	RB1#0	22.24	/	22.86	22.72	22.01	22.63	19.35	38.45
	RB1#25	22.38	/	23.15	23.44	22.63	22.49		
	RB1#49	22.84	/	22.45	22.8	21.52	21.66		
	RB25#0	21.15	/	21.65	21.35	21.3	21.03		
	RB25#25	21.23	/	21.75	20.99	20.95	21.01		
	RB50#0	21.23	/	21.51	20.91	20.77	20.67		
15MHz QPSK	RB1#0	22.55	/	23.27	22.74	22.76	22.81	19.18	38.45
	RB1#38	23.13	/	23.17	22.6	22.62	22.85		
	RB1#74	22.8	/	22.54	22.47	22.62	22.75		
	RB36#0	21.83	/	22.11	21.79	21.83	21.56		
	RB36#39	21.67	/	22.02	21.88	21.87	21.6		
	RB75#0	21.92	/	21.85	21.58	21.99	21.88		
15MHz 16QAM	RB1#0	22.3	/	22.23	21.83	21.88	22.11	18.99	38.45
	RB1#38	21.96	/	23.08	21.8	22.04	22.85		
	RB1#74	22.24	/	22.27	20.85	21.53	21.79		
	RB36#0	20.99	/	20.89	20.99	20.87	20.73		
	RB36#39	20.95	/	21.01	20.81	20.93	20.75		
	RB75#0	20.82	/	20.84	20.62	20.6	20.76		
Note: ERP= Conducted Power(dBm) - L _C (dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15									
								Result:	Pass

Note:

The Spot Check data were similar to the original data.

Per-spot check, the conducted output power is consistent with the original report, so the EIRP/ERP was re-calculated.

GSM 850 band:

Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GPRS 1 Slot	34.24	34.14	33.97	30.15	38.45
GPRS 2 Slots	33.16	32.88	32.8	29.07	38.45
GPRS 3 Slots	32.04	31.81	31.66	27.95	38.45
GPRS 4 Slots	29.97	29.77	29.56	25.88	38.45
EDGE 1 Slot	29.87	29.38	29.54	25.78	38.45
EDGE 2 Slots	28.71	28.17	28.39	24.62	38.45
EDGE 3 Slots	27.7	27.1	27.38	23.61	38.45
EDGE 4 Slots	25.73	25.15	25.37	21.64	38.45
Note: $ERP = \text{Conducted Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBd})$ $G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15$ The result was calculated with the maximum combination of $G_T - L_c$					
				Result:	Pass

GSM 1900 band:

Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GPRS 1 Slot	31.59	31.67	31.34	29.95	33
GPRS 2 Slots	30.58	30.67	30.06	28.95	33
GPRS 3 Slots	29.39	29.53	28.88	27.81	33
GPRS 4 Slots	27.36	27.49	26.79	25.77	33
EDGE 1 Slot	27.74	27.61	27.87	26.15	33
EDGE 2 Slots	26.69	26.37	26.73	25.01	33
EDGE 3 Slots	25.67	25.32	25.71	23.99	33
EDGE 4 Slots	23.68	23.26	23.77	22.05	33

Note:

EIRP=Conducted Power(dBm) - L_c(dB) + G_T(dBi)The result was calculated with the maximum result of G_T - L_c**Result:****Pass**

WCDMA Band 2:

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.41	23.9	23.88	22.18	33
HSDPA Subtest 1	22.16	20.88	21.59	20.44	33
HSDPA Subtest 2	22	22.54	22.29	20.82	33
HSDPA Subtest 3	21.89	22.26	22	20.54	33
HSDPA Subtest 4	21.83	21.91	22.03	20.31	33
HSUPA Subtest 1	21.01	21.26	21.83	20.11	33
HSUPA Subtest 2	20.99	21.02	21.13	19.41	33
HSUPA Subtest 3	20.86	20.95	21.41	19.69	33
HSUPA Subtest 4	20.68	21.21	21.19	19.49	33
HSUPA Subtest 5	20.61	20.64	20.85	19.13	33
DC-HSDPA Subtest 1	23.27	23.43	23.63	21.91	33
DC-HSDPA Subtest 2	23.13	23.35	23.25	21.63	33
DC-HSDPA Subtest 3	22.99	22.98	23.35	21.63	33
DC-HSDPA Subtest 4	22.97	23.42	23.07	21.7	33
HSPA+ Subtest 1	22.88	22.92	23.12	21.4	33

Note:

EIRP=Conducted Power(dBm) - Lc(dB) + G_T(dBi)The result was calculated with the maximum combination of G_T - Lc**Result:****Pass**

WCDMA Band 4:

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.8	23.89	23.81	24.82	30
HSDPA Subtest 1	21.27	21.37	21.79	22.72	30
HSDPA Subtest 2	21.08	21.42	21.64	22.57	30
HSDPA Subtest 3	20.88	21.09	21.36	22.29	30
HSDPA Subtest 4	20.77	20.87	21.13	22.06	30
HSUPA Subtest 1	21.35	21.32	21.33	22.28	30
HSUPA Subtest 2	21.32	21.6	21.72	22.65	30
HSUPA Subtest 3	21.19	21.7	21.4	22.63	30
HSUPA Subtest 4	21.05	21.56	21.32	22.49	30
HSUPA Subtest 5	20.98	21.37	21.39	22.32	30
DC-HSDPA Subtest 1	23.65	23.64	23.67	24.6	30
DC-HSDPA Subtest 2	23.57	23.58	23.6	24.53	30
DC-HSDPA Subtest 3	23.53	23.55	23.57	24.5	30
DC-HSDPA Subtest 4	23.47	23.46	23.46	24.4	30
HSPA+ Subtest 1	23.4	23.41	23.43	24.36	30
Note: $EIRP = \text{Conducted Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBi})$ The result was calculated with the maximum combination of $G_T - L_c$					
				Result:	Pass

WCDMA Band 5:

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.97	23.99	24.03	19.94	38.45
HSDPA Subtest 1	21.41	21.15	21.11	17.32	38.45
HSDPA Subtest 2	21.22	21.26	21.44	17.35	38.45
HSDPA Subtest 3	21.18	21.63	21.23	17.54	38.45
HSDPA Subtest 4	21.14	21.5	21.73	17.64	38.45
HSUPA Subtest 1	21.91	21.64	21.53	17.82	38.45
HSUPA Subtest 2	21.89	22.08	22.28	18.19	38.45
HSUPA Subtest 3	21.86	22.34	22.08	18.25	38.45
HSUPA Subtest 4	21.77	22.1	22.16	18.07	38.45
HSUPA Subtest 5	21.6	21.7	21.77	17.68	38.45
DC-HSDPA Subtest 1	23.88	24.16	24.28	20.19	38.45
DC-HSDPA Subtest 2	23.78	23.98	24.17	20.08	38.45
DC-HSDPA Subtest 3	23.77	24.02	23.94	19.93	38.45
DC-HSDPA Subtest 4	23.74	23.91	23.87	19.82	38.45
HSPA+ Subtest 1	23.66	23.88	23.73	19.79	38.45
Note: $ERP = \text{Conducted Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBd})$ $G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15$ The result was calculated with the maximum combination of $G_T - L_c$					
				Result:	Pass

LTE Band 2:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.37	23.49	23.51	21.98	33
	RB1#3	23.55	23.52	23.7		
	RB1#5	23.42	23.45	23.62		
	RB3#0	23.27	23.41	23.42		
	RB3#3	23.33	23.28	23.48		
	RB6#0	22.41	22.37	22.58		
1.4MHz 16QAM	RB1#0	22.51	22.42	22.64	20.93	33
	RB1#3	22.54	22.65	22.58		
	RB1#5	22.44	22.5	22.5		
	RB3#0	22.51	22.4	22.54		
	RB3#3	22.46	22.52	22.59		
	RB6#0	21.42	21.52	21.49		
3MHz QPSK	RB1#0	22.79	23.31	23.56	22.2	33
	RB1#8	22.79	23.41	23.92		
	RB1#14	22.74	23.4	23.84		
	RB6#0	21.96	22.35	22.57		
	RB6#9	21.98	22.37	22.52		
	RB15#0	21.97	22.38	22.63		
3MHz 16QAM	RB1#0	22.29	22.25	22.77	21.13	33
	RB1#8	22.28	22.6	22.78		
	RB1#14	22.22	22.15	22.85		
	RB6#0	21.29	21.2	21.61		
	RB6#9	21.36	21.13	21.73		
	RB15#0	21.28	21.44	21.65		
5MHz QPSK	RB1#0	23.41	23.13	23.48	21.88	33
	RB1#13	23.37	23.22	23.47		
	RB1#24	23.09	23.02	23.6		
	RB15#0	22.47	22.43	22.61		
	RB15#10	22.48	22.38	22.6		
	RB25#0	22.41	22.4	22.53		
5MHz 16QAM	RB1#0	22.08	22	22.74	21.53	33
	RB1#13	22.55	22.08	23.25		
	RB1#24	22.19	21.63	22.99		
	RB15#0	21.5	21.31	21.36		
	RB15#10	21.3	21.27	21.42		
	RB25#0	21.38	21.31	21.39		
10MHz QPSK	RB1#0	23.37	23.34	23.44	22.03	33
	RB1#25	23.75	23.43	23.66		
	RB1#49	23.45	23.26	23.59		
	RB25#0	22.43	22.42	22.69		
	RB25#25	22.37	22.37	22.64		
	RB50#0	22.44	22.4	22.61		

10MHz 16QAM	RB1#0	22.43	22.97	22.75	21.78	33
	RB1#25	22.44	23.5	23.02		
	RB1#49	22.23	22.71	23.31		
	RB25#0	21.68	21.49	21.67		
	RB25#25	21.64	21.45	21.71		
	RB50#0	21.38	21.24	21.58		
15MHz QPSK	RB1#0	23.41	23.33	23.53	21.88	33
	RB1#38	23.45	23.25	23.6		
	RB1#74	23.33	23.23	23.4		
	RB36#0	22.4	22.44	22.4		
	RB36#39	22.41	22.39	22.62		
	RB75#0	22.41	22.36	22.52		
15MHz 16QAM	RB1#0	22.59	22.94	23.1	21.48	33
	RB1#38	22.74	22.89	23.2		
	RB1#74	21.54	22.66	23.2		
	RB36#0	21.48	21.48	21.2		
	RB36#39	21.42	21.43	21.41		
	RB75#0	21.43	21.33	21.41		
20MHz QPSK	RB1#0	23.33	23.43	23.42	21.95	33
	RB1#50	23.53	23.54	23.67		
	RB1#99	23.15	23.09	23.55		
	RB50#0	22.41	22.45	22.31		
	RB50#50	22.37	22.35	22.57		
	RB100#0	22.31	22.4	22.45		
20MHz 16QAM	RB1#0	23.15	22.6	22.59	21.95	33
	RB1#50	23.67	23.19	22.5		
	RB1#99	23.08	22.68	22.5		
	RB50#0	21.24	21.53	21.46		
	RB50#50	21.22	21.37	21.54		
	RB100#0	21.29	21.44	21.43		
Note: EIRP=Conducted Power(dBm) - Lc(dB) + G _T (dBi) The result was calculated with the maximum combination of G _T – Lc					Result:	Pass

LTE Band 4:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.85	23.43	23.17	24.83	30
	RB1#3	23.9	23.38	23.3		
	RB1#5	23.65	23.34	23.23		
	RB3#0	23.51	23.3	23.2		
	RB3#3	23.5	23.28	23.3		
	RB6#0	22.8	22.37	22.44		
1.4MHz 16QAM	RB1#0	22.85	22.38	22.98	23.97	30
	RB1#3	22.7	22.67	23.04		
	RB1#5	22.57	22.43	22.99		
	RB3#0	22.92	22.26	22.67		
	RB3#3	22.88	22.5	22.74		
	RB6#0	21.71	21.39	21.57		
3MHz QPSK	RB1#0	24.08	23.43	22.97	25.01	30
	RB1#8	23.99	23.42	23.07		
	RB1#14	24.06	23.57	23.18		
	RB6#0	22.6	22.49	22.35		
	RB6#9	22.67	22.55	22.31		
	RB15#0	22.66	22.6	22.24		
3MHz 16QAM	RB1#0	22.78	22.87	22.53	23.96	30
	RB1#8	22.81	22.73	22.42		
	RB1#14	22.82	22.71	23.03		
	RB6#0	21.46	21.53	21.4		
	RB6#9	21.44	21.52	21.11		
	RB15#0	21.82	21.47	20.98		
5MHz QPSK	RB1#0	23.53	23.28	22.88	24.52	30
	RB1#13	23.59	23.41	23.44		
	RB1#24	23.54	23.35	23.19		
	RB15#0	22.61	22.56	22.37		
	RB15#10	22.64	22.53	22.45		
	RB25#0	22.66	22.49	22.32		
5MHz 16QAM	RB1#0	22.34	23.04	21.94	23.97	30
	RB1#13	22.92	22.99	22.18		
	RB1#24	22.29	23.02	22.31		
	RB15#0	21.92	21.32	21.19		
	RB15#10	21.84	21.41	21.37		
	RB25#0	21.62	21.31	21.33		
10MHz QPSK	RB1#0	23.59	23.48	23.12	24.79	30
	RB1#25	23.86	23.75	23.3		
	RB1#49	23.54	23.4	23.35		
	RB25#0	22.66	22.43	22.21		
	RB25#25	22.63	22.43	22.29		
	RB50#0	22.74	22.45	22.13		

10MHz 16QAM	RB1#0	23.04	22.39	22.61	24.65	30
	RB1#25	23.72	23.32	23.23		
	RB1#49	23.14	22.58	22.82		
	RB25#0	21.67	21.56	21.32		
	RB25#25	21.63	21.67	21.4		
	RB50#0	21.55	21.44	21.12		
15MHz QPSK	RB1#0	23.57	23.48	23.19	24.71	30
	RB1#38	23.73	23.2	23.18		
	RB1#74	23.78	23.13	23.24		
	RB36#0	22.69	22.51	22.41		
	RB36#39	22.69	22.39	22.34		
	RB75#0	22.72	22.46	22.19		
15MHz 16QAM	RB1#0	23.3	22.69	22.69	24.76	30
	RB1#38	23.83	22.66	22.56		
	RB1#74	23.27	22.27	22.78		
	RB36#0	21.57	21.38	21.31		
	RB36#39	21.42	21.39	21.32		
	RB75#0	21.58	21.47	21.31		
20MHz QPSK	RB1#0	23.62	23.44	23.36	24.82	30
	RB1#50	23.89	23.24	23.22		
	RB1#99	23.53	23.24	23.16		
	RB50#0	22.62	22.4	22.51		
	RB50#50	22.64	22.35	22.23		
	RB100#0	22.66	22.4	22.32		
20MHz 16QAM	RB1#0	22.68	23.3	22.63	24.62	30
	RB1#50	22.63	23.69	22.98		
	RB1#99	22.42	22.85	23.01		
	RB50#0	21.8	21.45	21.66		
	RB50#50	21.6	21.37	21.35		
	RB100#0	21.72	21.38	21.43		
Note: EIRP=Conducted Power(dBm) - Lc(dB) + G _T (dBi) The result was calculated with the maximum combination of G _T – Lc					Result:	Pass

LTE Band 5:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.93	23.67	23.82	19.84	38.45
	RB1#3	23.92	23.79	23.79		
	RB1#5	23.71	23.66	23.89		
	RB3#0	23.89	23.56	23.68		
	RB3#3	23.9	23.61	23.67		
	RB6#0	22.87	22.75	22.65		
1.4MHz 16QAM	RB1#0	23.08	22.61	22.86	19	38.45
	RB1#3	23.09	22.73	23.07		
	RB1#5	22.89	22.64	22.81		
	RB3#0	23.08	22.86	22.64		
	RB3#3	22.87	22.8	22.53		
	RB6#0	21.52	21.45	21.54		
3MHz QPSK	RB1#0	24.08	23.67	23.51	19.99	38.45
	RB1#8	23.93	23.63	23.44		
	RB1#14	23.85	23.56	23.57		
	RB6#0	22.9	22.73	22.61		
	RB6#9	22.79	22.68	22.72		
	RB15#0	22.86	22.79	22.68		
3MHz 16QAM	RB1#0	22.87	23.14	23.03	19.14	38.45
	RB1#8	22.69	23.02	23.23		
	RB1#14	22.65	22.97	23		
	RB6#0	21.98	21.73	21.77		
	RB6#9	21.95	21.67	21.49		
	RB15#0	21.84	21.69	21.46		
5MHz QPSK	RB1#0	23.57	23.44	23.52	19.58	38.45
	RB1#13	23.67	23.67	23.59		
	RB1#24	23.56	23.61	23.6		
	RB15#0	22.87	22.78	22.68		
	RB15#10	22.87	22.73	22.72		
	RB25#0	22.83	22.76	22.62		
5MHz 16QAM	RB1#0	23.2	22.38	22.35	19.44	38.45
	RB1#13	23.53	22.61	22.39		
	RB1#24	23.33	21.54	21.93		
	RB15#0	22	21.67	21.68		
	RB15#10	22.08	21.68	21.5		
	RB25#0	21.85	21.64	21.63		
10MHz QPSK	RB1#0	23.89	23.56	23.75	19.8	38.45
	RB1#25	23.74	23.85	23.85		
	RB1#49	23.63	23.71	23.61		
	RB25#0	22.85	22.82	22.73		
	RB25#25	22.77	22.83	22.65		
	RB50#0	22.86	22.82	22.76		

10MHz 16QAM	RB1#0	23.69	22.65	23.3	19.6	38.45
	RB1#25	23.15	22.9	23.23		
	RB1#49	23.18	22.48	22.57		
	RB25#0	22.11	21.95	21.82		
	RB25#25	21.92	21.96	21.76		
	RB50#0	21.91	21.71	21.73		
Note: ERP= Conducted Power(dBm) - Lc(dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15 The result was calculated with the maximum combination of G _T – Lc						
					Result:	Pass

LTE Band 7:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	22.48	21.98	22.13	24.52	33
	RB1#13	22.67	22.54	22.07		
	RB1#24	22.5	22.27	22.12		
	RB15#0	21.82	21.35	21.17		
	RB15#10	21.76	21.39	21.28		
	RB25#0	21.64	21.35	21.17		
5MHz 16QAM	RB1#0	22.08	21.2	20.7	24.08	33
	RB1#13	22.23	21.29	20.78		
	RB1#24	21.76	20.85	21.23		
	RB15#0	20.47	20.43	19.51		
	RB15#10	20.43	20.41	19.51		
	RB25#0	20.44	20.39	20.15		
10MHz QPSK	RB1#0	22.84	21.77	22.22	24.82	33
	RB1#25	22.9	22.53	22.22		
	RB1#49	22.97	22.32	21.97		
	RB25#0	21.76	21.35	21.08		
	RB25#25	21.85	21.29	21.15		
	RB50#0	21.77	21.23	21.1		
10MHz 16QAM	RB1#0	22.22	21.33	21.56	24.47	33
	RB1#25	22.62	21.1	22.14		
	RB1#49	22.17	21.21	21.35		
	RB25#0	20.44	20.4	20.17		
	RB25#25	20.55	20.33	19.83		
	RB50#0	20.48	20.22	20.09		
15MHz QPSK	RB1#0	22.82	21.77	22.19	24.84	33
	RB1#38	22.99	22.45	22		
	RB1#74	22.82	22.27	21.86		
	RB36#0	21.61	21.17	21.04		
	RB36#39	21.68	21.19	21.04		
	RB75#0	21.59	21.2	21		
15MHz 16QAM	RB1#0	21.98	21.57	21.22	24.42	33
	RB1#38	22.57	22.08	21.28		
	RB1#74	21.95	21.63	20.37		
	RB36#0	20.33	19.86	19.89		
	RB36#39	20.39	19.99	19.84		
	RB75#0	20.24	20.05	19.88		
20MHz QPSK	RB1#0	20.89	19.85	20.92	24.73	33
	RB1#50	22.88	21.06	21.96		
	RB1#99	21.68	21.15	20.41		
	RB50#0	21.9	21.36	21.02		
	RB50#50	21.66	21.16	21.01		
	RB100#0	21.7	21.2	20.98		

20MHz 16QAM	RB1#0	21.25	20.4	21.62	24.29	33
	RB1#50	21.58	22.44	21.76		
	RB1#99	21.02	22.04	21.19		
	RB50#0	20.44	19.97	20		
	RB50#50	20.4	20.04	19.93		
	RB100#0	20.4	19.93	19.96		
Note: EIRP=Conducted Power(dBm) - Lc(dB) + G _T (dBi) The result was calculated with the maximum combination of G _T – L _C						
					Result:	Pass

LTE Band 12:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.47	23.86	23.52	19.98	34.77
	RB1#3	23.61	23.96	23.7		
	RB1#5	23.47	23.89	23.52		
	RB3#0	23.25	23.7	23.47		
	RB3#3	23.29	23.57	23.4		
	RB6#0	22.7	22.73	22.57		
1.4MHz 16QAM	RB1#0	22.68	22.98	22.72	19.14	34.77
	RB1#3	22.73	23.12	22.77		
	RB1#5	22.64	22.89	22.71		
	RB3#0	22.71	22.84	22.75		
	RB3#3	22.66	22.84	22.75		
	RB6#0	21.39	21.66	21.93		
3MHz QPSK	RB1#0	23.36	23.47	23.68	19.7	34.77
	RB1#8	23.23	23.51	23.6		
	RB1#14	23.41	23.42	23.3		
	RB6#0	22.58	22.75	22.69		
	RB6#9	22.55	22.69	22.68		
	RB15#0	22.62	22.78	22.69		
3MHz 16QAM	RB1#0	22.43	23.02	23.38	19.4	34.77
	RB1#8	22.87	22.97	23		
	RB1#14	22.97	22.85	23.22		
	RB6#0	21.5	21.73	21.73		
	RB6#9	21.49	21.65	21.85		
	RB15#0	21.66	21.85	21.91		
5MHz QPSK	RB1#0	23.13	23.57	23.26	19.63	34.77
	RB1#13	23.41	23.61	23.51		
	RB1#24	23.25	23.18	23.4		
	RB15#0	22.55	22.72	22.68		
	RB15#10	22.58	22.71	22.68		
	RB25#0	22.57	22.7	22.57		
5MHz 16QAM	RB1#0	22.75	22.27	22.24	19.41	34.77
	RB1#13	23.39	22.39	22.32		
	RB1#24	22.79	22.28	21.92		
	RB15#0	21.43	21.62	21.63		
	RB15#10	21.57	21.65	21.58		
	RB25#0	21.48	21.76	21.66		
10MHz QPSK	RB1#0	23.2	23.19	23.58	20.02	34.77
	RB1#25	23.66	24	23.76		
	RB1#49	23.48	23.36	23.35		
	RB25#0	22.5	22.69	22.73		
	RB25#25	22.71	22.58	22.64		
	RB50#0	22.6	22.65	22.64		

10MHz 16QAM	RB1#0	22.91	22.43	23.13	19.38	34.77
	RB1#25	23.01	22.6	23.14		
	RB1#49	23.36	22.39	22.44		
	RB25#0	21.81	21.99	21.78		
	RB25#25	22.02	21.87	21.71		
	RB50#0	21.8	21.68	21.64		
Note: ERP= Conducted Power(dBm) - Lc(dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15 The result was calculated with the maximum combination of G _T – L _C						
					Result:	Pass

LTE Band 13:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	23.61	/	23.69	19.63	34.77
	RB1#13	23.75	/	23.76		
	RB1#24	23.51	/	23.72		
	RB15#0	22.94	/	22.83		
	RB15#10	22.9	/	22.81		
	RB25#0	22.86	/	22.8		
5MHz 16QAM	RB1#0	22.59	/	22.75	18.82	34.77
	RB1#13	22.5	/	22.95		
	RB1#24	22.13	/	22.57		
	RB15#0	21.79	/	21.78		
	RB15#10	21.75	/	21.76		
	RB25#0	21.95	/	21.86		
10MHz QPSK	RB1#0	/	23.69	/	19.65	34.77
	RB1#25	/	23.78	/		
	RB1#49	/	23.68	/		
	RB25#0	/	22.88	/		
	RB25#25	/	22.81	/		
	RB50#0	/	22.94	/		
10MHz 16QAM	RB1#0	/	23.31	/	19.18	34.77
	RB1#25	/	23.23	/		
	RB1#49	/	23.11	/		
	RB25#0	/	21.9	/		
	RB25#25	/	21.81	/		
	RB50#0	/	21.77	/		
Note: ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd) Gr(dBd)=Gr(dBi)-2.15 The result was calculated with the maximum combination of Gr – Lc						
					Result:	Pass

LTE Band 17:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	23.47	23.52	23.49	19.8	34.77
	RB1#13	23.71	23.63	23.37		
	RB1#24	23.46	23.78	23.48		
	RB15#0	22.85	22.65	22.71		
	RB15#10	22.84	22.61	22.7		
	RB25#0	22.84	22.64	22.6		
5MHz 16QAM	RB1#0	22.88	22.52	22.28	19.43	34.77
	RB1#13	23.41	22.82	22.33		
	RB1#24	22.92	22.27	21.93		
	RB15#0	21.63	21.68	21.75		
	RB15#10	21.7	21.68	21.56		
	RB25#0	21.55	21.74	21.78		
10MHz QPSK	RB1#0	23.04	23.94	23.85	20.11	34.77
	RB1#25	24.09	24.05	24.01		
	RB1#49	23.8	23.71	23.55		
	RB25#0	22.86	22.79	22.79		
	RB25#25	22.79	22.61	22.72		
	RB50#0	22.81	22.83	22.78		
10MHz 16QAM	RB1#0	22.93	23.18	23.1	19.91	34.77
	RB1#25	23.61	23.89	23.2		
	RB1#49	22.49	22.95	23.33		
	RB25#0	22.07	21.92	21.83		
	RB25#25	21.94	21.74	21.55		
	RB50#0	21.82	21.75	21.79		
Note: ERP= Conducted Power(dBm) - Lc(dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15 The result was calculated with the maximum combination of G _T – Lc						
					Result:	Pass

LTE Band 25:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.13	22.7	23.31	21.59	33
	RB1#3	23.16	22.61	23.09		
	RB1#5	23.09	22.72	22.97		
	RB3#0	23.05	22.68	22.81		
	RB3#3	23.04	22.64	22.87		
	RB6#0	22.11	21.91	21.92		
1.4MHz 16QAM	RB1#0	22.74	21.55	22.54	21.12	33
	RB1#3	22.84	21.65	22.27		
	RB1#5	22.7	21.38	22.02		
	RB3#0	22.42	21.81	21.87		
	RB3#3	22.37	21.66	21.83		
	RB6#0	20.87	20.53	21.05		
3MHz QPSK	RB1#0	23.34	22.97	23.15	21.68	33
	RB1#8	23.35	23.06	22.86		
	RB1#14	23.4	22.8	22.73		
	RB6#0	22.17	21.95	22		
	RB6#9	22.15	21.94	22.06		
	RB15#0	22.24	22.02	22.12		
3MHz 16QAM	RB1#0	22.1	22.33	22.58	20.86	33
	RB1#8	21.9	22.06	22.47		
	RB1#14	21.9	22.07	22.28		
	RB6#0	20.91	20.95	21.18		
	RB6#9	20.88	20.85	20.8		
	RB15#0	21.14	21.01	21.2		
5MHz QPSK	RB1#0	22.99	23	23.23	21.51	33
	RB1#13	22.99	22.68	23.18		
	RB1#24	22.9	22.83	23.11		
	RB15#0	22.03	22.11	22.29		
	RB15#10	21.97	22.02	22.33		
	RB25#0	22.11	22.1	22.39		
5MHz 16QAM	RB1#0	21.88	21.61	22.35	21.08	33
	RB1#13	22.23	21.79	22.8		
	RB1#24	21.9	21.58	22.55		
	RB15#0	21.19	20.98	21.42		
	RB15#10	21.2	20.87	21.26		
	RB25#0	21.26	21.01	21.3		
10MHz QPSK	RB1#0	23.03	22.82	22.41	21.49	33
	RB1#25	23.21	22.38	22.79		
	RB1#49	22.87	22.48	22.55		
	RB25#0	22.01	21.58	21.6		
	RB25#25	22.02	21.51	21.59		
	RB50#0	21.96	21.61	21.68		

10MHz 16QAM	RB1#0	22.4	21.34	21.94	20.73	33
	RB1#25	22.17	21.31	22.45		
	RB1#49	22.44	21.26	21.52		
	RB25#0	21.02	20.7	20.53		
	RB25#25	20.94	20.64	20.55		
	RB50#0	20.79	20.49	20.67		
15MHz QPSK	RB1#0	22.62	22.28	22.12	21.08	33
	RB1#38	22.8	22.18	22.33		
	RB1#74	22.78	22.18	22.37		
	RB36#0	21.59	21.39	21.36		
	RB36#39	21.59	21.4	21.46		
	RB75#0	21.47	21.35	21.33		
15MHz 16QAM	RB1#0	22.14	21.49	21.51	20.42	33
	RB1#38	22.09	21.48	21.72		
	RB1#74	22.03	21.3	21.27		
	RB36#0	20.46	20.29	20.26		
	RB36#39	20.51	20.18	20.51		
	RB75#0	20.54	20.22	20.43		
20MHz QPSK	RB1#0	23.1	23.12	22.85	21.74	33
	RB1#50	23.46	23.25	23.22		
	RB1#99	23.29	22.81	23.08		
	RB50#0	22.17	22.18	21.98		
	RB50#50	22.2	22.14	22.12		
	RB100#0	22.21	22.06	21.93		
20MHz 16QAM	RB1#0	22.43	22.75	21.96	21.26	33
	RB1#50	22.31	22.98	22.68		
	RB1#99	22.42	22.72	22.09		
	RB50#0	21.22	21.09	20.91		
	RB50#50	21.27	20.99	21.02		
	RB100#0	21.22	20.98	20.91		
Note: EIRP=Conducted Power(dBm) - Lc(dB) + G _T (dBi) The result was calculated with the maximum combination of G _T – Lc					Result:	Pass

LTE Band 26:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Frequency	Middle Frequency	Highest Frequency		
1.4MHz QPSK	RB1#0	22.29	22.89	22.91	19.21	38.45
	RB1#3	22.53	23.05	23.3		
	RB1#5	22.33	22.91	23		
	RB3#0	22.16	22.87	22.84		
	RB3#3	22.16	22.87	22.81		
	RB6#0	21.43	21.85	22.03		
1.4MHz 16QAM	RB1#0	21.3	22.11	21.94	18.08	38.45
	RB1#3	21.36	21.89	21.89		
	RB1#5	21.28	21.81	21.56		
	RB3#0	21.36	22.07	22.16		
	RB3#3	21.33	21.96	22.17		
	RB6#0	20.14	20.94	20.98		
3MHz QPSK	RB1#0	22.28	23.15	22.91	19.06	38.45
	RB1#8	22.15	23.12	22.79		
	RB1#14	22.22	22.94	22.87		
	RB6#0	21.31	21.92	21.98		
	RB6#9	21.16	21.91	21.92		
	RB15#0	21.29	22.08	22.04		
3MHz 16QAM	RB1#0	21.64	22.42	22.32	18.33	38.45
	RB1#8	21.48	22.36	22.34		
	RB1#14	21.42	22.21	22.24		
	RB6#0	20.31	21.13	21.04		
	RB6#9	20.24	21	21.12		
	RB15#0	20.55	21.06	21.24		
5MHz QPSK	RB1#0	22.01	23.01	22.83	18.93	38.45
	RB1#13	22.14	23.02	22.87		
	RB1#24	22.12	22.64	22.86		
	RB15#0	21.22	21.95	21.96		
	RB15#10	21.33	21.97	21.99		
	RB25#0	21.18	21.98	21.99		
5MHz 16QAM	RB1#0	21.47	21.76	21.69	18.07	38.45
	RB1#13	21.88	21.66	22.16		
	RB1#24	21.77	20.75	21.2		
	RB15#0	20.31	21.1	21.04		
	RB15#10	20.26	21.03	21.05		
	RB25#0	20.37	21.15	21.1		

10MHz QPSK	RB1#0	23.25	23.29	23.01	19.38	38.45
	RB1#25	23.47	23.45	23.17		
	RB1#49	23.11	23.03	22.96		
	RB25#0	22.27	22.18	22		
	RB25#25	22.15	22.07	21.95		
	RB50#0	22.29	22.09	22.05		
10MHz 16QAM	RB1#0	22.93	22.31	22.43	19.45	38.45
	RB1#25	23.54	22.67	22.97		
	RB1#49	22.87	21.71	21.89		
	RB25#0	21.47	21.41	21.17		
	RB25#25	21.09	21.1	21.15		
	RB50#0	21.29	20.97	21.01		
15MHz QPSK	RB1#0	22.9	22.9	22.92	19.17	38.45
	RB1#38	23.01	23.01	23.26		
	RB1#74	22.92	22.95	22.97		
	RB36#0	22.07	22.14	22.04		
	RB36#39	22.05	22.16	22.06		
	RB75#0	22.02	22.09	22.09		
15MHz 16QAM	RB1#0	22.12	22.29	22.39	19.03	38.45
	RB1#38	22.23	22.43	23.12		
	RB1#74	21.23	21.76	22.13		
	RB36#0	21.19	21.09	21.1		
	RB36#39	21	21.03	21.02		
	RB75#0	20.97	21.08	20.96		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + G_T(dBd)G_T(dBd)=G_T(dBi)-2.15The result was calculated with the maximum combination of G_T – Lc

Result:	Pass
----------------	-------------

LTE Band 41:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	22.41	22.83	22.9	24.88	33
	RB1#13	22.5	23.03	22.88		
	RB1#24	22.45	22.86	22.76		
	RB15#0	21.58	22.08	22.07		
	RB15#10	21.64	22.03	22.1		
	RB25#0	21.54	21.96	22.02		
5MHz 16QAM	RB1#0	21.67	22.34	21.82	24.4	33
	RB1#13	21.76	22.55	21.84		
	RB1#24	22.19	22.28	21.58		
	RB15#0	20.42	20.95	20.92		
	RB15#10	20.54	20.89	20.89		
	RB25#0	20.46	20.75	20.97		
10MHz QPSK	RB1#0	22.64	22.94	23.25	25.1	33
	RB1#25	22.65	23.07	23.21		
	RB1#49	22.63	23.04	23.08		
	RB25#0	21.71	22.12	22.09		
	RB25#25	21.71	22.04	22.14		
	RB50#0	21.72	22.12	22.13		
10MHz 16QAM	RB1#0	21.66	22.06	22.74	25.03	33
	RB1#25	21.56	21.82	23.18		
	RB1#49	21.45	21.83	22.63		
	RB25#0	20.45	20.89	21.19		
	RB25#25	20.46	20.8	21.17		
	RB50#0	20.57	21.09	21.03		
15MHz QPSK	RB1#0	22.54	22.99	23.26	25.11	33
	RB1#38	22.6	23.08	23.2		
	RB1#74	22.49	23.14	23.2		
	RB36#0	21.69	22.33	22.24		
	RB36#39	21.74	22.21	22.04		
	RB75#0	21.73	22.32	22.11		
15MHz 16QAM	RB1#0	21.73	22.06	22.43	24.42	33
	RB1#38	21.79	21.43	22.57		
	RB1#74	21.61	21.79	22.51		
	RB36#0	20.58	20.96	21.26		
	RB36#39	20.66	20.93	21.13		
	RB75#0	20.68	20.94	21.07		
20MHz QPSK	RB1#0	22.26	22.96	23.32	25.38	33
	RB1#50	22.82	23.53	23.36		
	RB1#99	22.35	23.07	23.17		
	RB50#0	21.69	22.07	22.18		
	RB50#50	21.69	22.11	22.11		
	RB100#0	21.73	22.06	22.1		

20MHz 16QAM	RB1#0	21.94	21.75	22.66	24.94	33
	RB1#50	22.48	21.91	23.09		
	RB1#99	21.91	21.85	22.61		
	RB50#0	20.99	21.11	21.02		
	RB50#50	20.9	21.09	21.22		
	RB100#0	20.78	21.01	21.11		
Note: EIRP=Conducted Power(dBm) - Lc(dB) + G _T (dBi)						
					Result:	Pass

LTE Band 66:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	23.49	23.23	23.23	24.44	30
	RB1#3	23.51	23.13	23.3		
	RB1#5	23.26	22.93	23.12		
	RB3#0	23.4	22.74	22.99		
	RB3#3	23.21	22.77	22.93		
	RB6#0	22.4	21.72	22.12		
1.4MHz 16QAM	RB1#0	22.45	21.76	21.87	23.43	30
	RB1#3	22.5	21.84	21.98		
	RB1#5	22.41	21.7	22.04		
	RB3#0	22.43	21.59	22.14		
	RB3#3	22.33	21.49	22.07		
	RB6#0	21.42	20.69	21.23		
3MHz QPSK	RB1#0	23.31	22.82	22.85	24.24	30
	RB1#8	23.29	22.82	22.96		
	RB1#14	23.14	22.68	22.78		
	RB6#0	22.32	21.83	22.02		
	RB6#9	22.28	21.79	21.92		
	RB15#0	22.38	21.87	21.96		
3MHz 16QAM	RB1#0	22.18	22.22	22.08	23.25	30
	RB1#8	22.16	22.11	22.32		
	RB1#14	22.01	22.09	22.3		
	RB6#0	21.21	20.97	21.34		
	RB6#9	21.11	21.01	21.34		
	RB15#0	21.27	20.85	21.31		
5MHz QPSK	RB1#0	23.22	22.81	22.79	24.15	30
	RB1#13	23	22.7	22.87		
	RB1#24	23.05	22.44	22.63		
	RB15#0	22.3	21.78	22.02		
	RB15#10	22.23	21.81	21.99		
	RB25#0	22.23	21.74	21.96		
5MHz 16QAM	RB1#0	22.04	22.02	21.8	23.41	30
	RB1#13	22.06	22.48	22.06		
	RB1#24	21.33	21.98	21.76		
	RB15#0	21.12	20.73	20.99		
	RB15#10	20.96	20.79	20.96		
	RB25#0	21.12	20.83	20.96		
10MHz QPSK	RB1#0	23.39	23.26	22.98	24.49	30
	RB1#25	23.56	23.35	23.28		
	RB1#49	23.43	23.17	23		
	RB25#0	22.62	22.3	22.21		
	RB25#25	22.68	22.14	22.22		
	RB50#0	22.6	22.11	22.23		

10MHz 16QAM	RB1#0	23.07	22.27	22.57	24.08	30
	RB1#25	23.09	23	22.72		
	RB1#49	23.15	21.99	22.05		
	RB25#0	21.55	21.31	21.18		
	RB25#25	21.65	21.26	21.3		
	RB50#0	21.57	21.02	21.16		
15MHz QPSK	RB1#0	23.46	22.95	22.72	24.58	30
	RB1#38	23.65	22.86	22.88		
	RB1#74	23.44	22.8	22.93		
	RB36#0	22.54	22.1	21.91		
	RB36#39	22.53	21.89	21.98		
	RB75#0	22.37	21.97	22		
15MHz 16QAM	RB1#0	23.2	22.35	22.41	24.13	30
	RB1#38	23.09	21.82	23.14		
	RB1#74	23.12	21.13	21.77		
	RB36#0	21.5	20.9	20.95		
	RB36#39	21.26	20.87	20.95		
	RB75#0	21.4	21.01	20.94		
20MHz QPSK	RB1#0	23.12	23.13	23.06	24.3	30
	RB1#50	23.37	23.12	23.07		
	RB1#99	22.98	22.95	22.9		
	RB50#0	22.36	22.06	21.87		
	RB50#50	22.28	21.78	21.98		
	RB100#0	22.32	21.91	21.8		
20MHz 16QAM	RB1#0	22.4	22.09	22.52	24.13	30
	RB1#50	22.92	21.91	23.2		
	RB1#99	21.97	21.45	22.68		
	RB50#0	21.34	21.19	20.85		
	RB50#50	21.23	20.96	20.83		
	RB100#0	21.27	20.94	21.3		
Note: EIRP=Conducted Power(dBm) - Lc(dB) + G _T (dBi) The result was calculated with the maximum combination of G _T – Lc						
					Result:	Pass

LTE Band 71:

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	23.35	22.98	23.35	19.38	34.77
	RB1#13	23.36	23.28	23.36		
	RB1#24	23.35	23.02	23.27		
	RB15#0	22.32	22.36	22.17		
	RB15#10	22.34	22.37	22.5		
	RB25#0	22.35	22.34	22.42		
5MHz 16QAM	RB1#0	22.65	21.99	22.19	18.67	34.77
	RB1#13	22.11	21.96	22.14		
	RB1#24	22.12	21.94	22.3		
	RB15#0	21.48	21.45	21.45		
	RB15#10	21.42	21.37	21.37		
	RB25#0	21.47	21.46	21.52		
10MHz QPSK	RB1#0	23.39	23.13	23.37	19.8	34.77
	RB1#25	23.78	23.63	23.69		
	RB1#49	23.52	23.36	23.5		
	RB25#0	22.43	22.4	22.36		
	RB25#25	22.49	22.46	22.49		
	RB50#0	22.44	22.45	22.5		
10MHz 16QAM	RB1#0	22.43	22.43	22.23	19.35	34.77
	RB1#25	23.33	23.3	22.4		
	RB1#49	22.64	22.69	22.31		
	RB25#0	21.6	21.56	21.51		
	RB25#25	21.68	21.63	21.49		
	RB50#0	21.3	21.47	21.32		
15MHz QPSK	RB1#0	23.29	23.1	23.03	19.66	34.77
	RB1#38	23.56	23.18	23.06		
	RB1#74	23.64	23.3	23.35		
	RB36#0	22.34	22.36	22.43		
	RB36#39	22.42	22.26	22.5		
	RB75#0	22.33	22.28	22.5		
15MHz 16QAM	RB1#0	22.48	22.94	22.97	19.26	34.77
	RB1#38	23.17	22.98	22.82		
	RB1#74	23.24	23.15	23.16		
	RB36#0	21.45	21.19	21.29		
	RB36#39	21.44	21.43	21.23		
	RB75#0	21.31	21.48	21.43		
20MHz QPSK	RB1#0	23.22	22.96	22.82	19.87	34.77
	RB1#50	23.85	23.53	23.25		
	RB1#99	23.13	23.72	23.33		
	RB50#0	22.32	22.37	22.34		
	RB50#50	22.48	22.5	22.57		
	RB100#0	22.4	22.32	22.43		

20MHz 16QAM	RB1#0	22.66	22.96	23.01	19.76	34.77
	RB1#50	23.74	23.44	23.46		
	RB1#99	23.14	23.11	23.23		
	RB50#0	21.23	21.4	21.25		
	RB50#50	21.39	21.3	21.4		
	RB100#0	21.34	21.31	21.43		
Note: ERP= Conducted Power(dBm) - Lc(dB) + GT(dBd) GT(dBd)=GT(dBi)-2.15 The result was calculated with the maximum combination of GT – LC						
					Result:	Pass

5.2 Radiated Spurious Emissions

Serial Number:	2UEW-7, 2UEW-35, 2UEW-36	Test Date:	Below 1GHz: 2024/12/11 Above 1GHz: 2024/12/11
Test Site:	Chamber 10m, Chamber B	Test Mode:	Transmitting
Tester:	Leesin Xiang, Nat Zhou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.5~23.8	Relative Humidity: (%)	54~55	ATM Pressure: (kPa)	101.8
----------------------	-----------	---------------------------	-------	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
30MHz~1000MHz					
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Micro-Coax	Coaxial Cable	UFA210B	99G1448	2024/9/5	2025/9/4
Agilent	Signal Generator	E8247C	MY43321350	2024/9/5	2025/9/4
Sinoscite	Band Rejection Filter	BSF824-862MS	1438001	2024/6/7	2025/6/6

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
AH	Horn Antenna	SAS-571	1177	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-03 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-02 1302	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
Micro-Coax	Coaxial Cable	UFA210B	99G1448	2024/9/5	2025/9/4
Agilent	Signal Generator	E8247C	MY43321350	2024/9/5	2025/9/4
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/15
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

Configuration 5#**Cellular Band (30MHz-10GHz)**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GPRS 850 Frequency:824.2MHz								
543.29	H	35.62	-73.16	0.00	0.25	-73.41	-13.00	60.41
584.96	V	34.42	-76.69	0.00	0.23	-76.92	-13.00	63.92
1648.40	H	60.07	-65.06	10.44	0.71	-55.33	-13.00	42.33
1648.40	V	54.98	-70.75	10.44	0.71	-61.02	-13.00	48.02
2472.60	H	59.36	-63.42	12.88	1.25	-51.79	-13.00	38.79
2472.60	V	56.68	-66.15	12.88	1.25	-54.52	-13.00	41.52
3296.80	H	48.25	-71.14	13.60	1.59	-59.13	-13.00	46.13
3296.80	V	48.02	-71.37	13.60	1.59	-59.36	-13.00	46.36
GPRS 850 Frequency:836.6MHz								
536.61	H	35.70	-73.22	0.00	0.25	-73.47	-13.00	60.47
575.16	V	36.25	-75.05	0.00	0.24	-75.29	-13.00	62.29
1673.20	H	55.23	-69.52	10.61	0.73	-59.64	-13.00	46.64
1673.20	V	54.36	-70.99	10.61	0.73	-61.11	-13.00	48.11
2509.80	H	60.33	-62.55	13.11	1.25	-50.69	-13.00	37.69
2509.80	V	59.21	-63.69	13.11	1.25	-51.83	-13.00	38.83
3346.40	H	49.46	-69.75	13.83	1.61	-57.53	-13.00	44.53
3346.40	V	48.87	-70.39	13.83	1.61	-58.17	-13.00	45.17
GPRS 850 Frequency:848.8MHz								
523.13	H	35.31	-73.90	0.00	0.25	-74.15	-13.00	61.15
526.84	V	34.78	-77.44	0.00	0.25	-77.69	-13.00	64.69
1697.60	H	52.12	-72.25	10.78	0.75	-62.22	-13.00	49.22
1697.60	V	53.36	-71.61	10.78	0.75	-61.58	-13.00	48.58
2546.40	H	55.56	-67.31	13.15	1.27	-55.43	-13.00	42.43
2546.40	V	58.52	-64.49	13.15	1.27	-52.61	-13.00	39.61
3395.20	H	48.52	-70.47	14.08	1.64	-58.03	-13.00	45.03
3395.20	V	48.33	-70.76	14.08	1.64	-58.32	-13.00	45.32

PCS Band (30MHz-20GHz)

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GPRS 1900 Frequency:1850.2MHz								
239.22	H	60.45	-55.29	0.00	0.19	-55.48	-13.00	42.48
80.23	V	54.68	-69.04	0.00	0.10	-69.14	-13.00	56.14
3700.40	H	49.34	-69.23	14.00	1.83	-57.06	-13.00	44.06
3700.40	V	49.60	-68.95	14.00	1.83	-56.78	-13.00	43.78
5550.60	H	48.28	-65.83	13.95	1.27	-53.15	-13.00	40.15
5550.60	V	48.61	-65.35	13.95	1.27	-52.67	-13.00	39.67
GPRS 1900 Frequency:1880MHz								
222.15	H	59.71	-55.77	0.00	0.18	-55.95	-13.00	42.95
69.25	V	54.26	-64.79	-5.40	0.11	-70.30	-13.00	57.30
3760.00	H	47.58	-70.26	13.76	1.63	-58.13	-13.00	45.13
3760.00	V	48.20	-69.51	13.76	1.63	-57.38	-13.00	44.38
5640.00	H	48.61	-65.11	14.02	1.31	-52.40	-13.00	39.40
5640.00	V	48.39	-65.22	14.02	1.31	-52.51	-13.00	39.51
GPRS 1900 Frequency:1909.8MHz								
235.44	H	57.37	-58.31	0.00	0.19	-58.50	-13.00	45.50
70.53	V	52.57	-67.19	-4.74	0.11	-72.04	-13.00	59.04
3819.60	H	48.20	-69.07	13.56	1.50	-57.01	-13.00	44.01
3819.60	V	48.18	-68.90	13.56	1.50	-56.84	-13.00	43.84
5729.40	H	48.25	-65.77	13.96	1.31	-53.12	-13.00	40.12
5729.40	V	48.26	-65.73	13.96	1.31	-53.08	-13.00	40.08

WCDMA Band 2(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 2 Frequency:1852.4 MHz								
239.71	H	58.45	-57.30	0.00	0.19	-57.49	-13.00	44.49
85.49	V	55.93	-65.20	0.00	0.10	-65.30	-13.00	52.30
3704.80	H	48.73	-69.79	13.98	1.81	-57.62	-13.00	44.62
3704.80	V	49.39	-69.10	13.98	1.81	-56.93	-13.00	43.93
5557.20	H	48.27	-65.78	13.97	1.27	-53.08	-13.00	40.08
5557.20	V	48.75	-65.15	13.97	1.27	-52.45	-13.00	39.45
WCDMA Band 2 Frequency:1880MHz								
239.46	H	59.32	-56.43	0.00	0.19	-56.62	-13.00	43.62
70.27	V	52.28	-67.37	-4.87	0.11	-72.35	-13.00	59.35
3760.00	H	48.21	-69.63	13.76	1.63	-57.50	-13.00	44.50
3760.00	V	47.90	-69.81	13.76	1.63	-57.68	-13.00	44.68
5640.00	H	48.29	-65.43	14.02	1.31	-52.72	-13.00	39.72
5640.00	V	48.15	-65.46	14.02	1.31	-52.75	-13.00	39.75
WCDMA Band 2 Frequency:1907.6MHz								
239.23	H	59.88	-55.86	0.00	0.19	-56.05	-13.00	43.05
80.52	V	53.58	-69.99	0.00	0.10	-70.09	-13.00	57.09
3815.20	H	47.86	-69.43	13.57	1.50	-57.36	-13.00	44.36
3815.20	V	48.02	-69.08	13.57	1.50	-57.01	-13.00	44.01
5722.80	H	48.36	-65.63	13.95	1.32	-53.00	-13.00	40.00
5722.80	V	48.59	-65.35	13.95	1.32	-52.72	-13.00	39.72

WCDMA Band 4(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 4 Frequency:1712.4 MHz								
235.25	H	59.71	-55.97	0.00	0.19	-56.16	-13.00	43.16
86.74	V	54.26	-66.25	0.00	0.10	-66.35	-13.00	53.35
3424.80	H	51.85	-67.05	14.03	1.63	-54.65	-13.00	41.65
3424.80	V	53.11	-65.86	14.03	1.63	-53.46	-13.00	40.46
5137.20	H	48.15	-68.35	13.94	1.39	-55.80	-13.00	42.80
5137.20	V	48.36	-68.06	13.94	1.39	-55.51	-13.00	42.51
WCDMA Band 4 Frequency:1732.6MHz								
239.15	H	58.71	-57.03	0.00	0.19	-57.22	-13.00	44.22
80.25	V	52.26	-71.45	0.00	0.10	-71.55	-13.00	58.55
3465.20	H	51.85	-66.93	13.90	1.62	-54.65	-13.00	41.65
3465.20	V	53.11	-65.70	13.90	1.62	-53.42	-13.00	40.42
5197.80	H	48.15	-68.22	14.00	1.52	-55.74	-13.00	42.74
5197.80	V	48.36	-68.08	14.00	1.52	-55.60	-13.00	42.60
WCDMA Band 4 Frequency:1752.6MHz								
244.30	H	58.71	-57.11	0.00	0.19	-57.30	-13.00	44.30
83.65	V	53.20	-68.83	0.00	0.10	-68.93	-13.00	55.93
3505.20	H	49.41	-69.29	13.82	1.60	-57.07	-13.00	44.07
3505.20	V	50.68	-68.02	13.82	1.60	-55.80	-13.00	42.80
5257.80	H	48.62	-68.11	14.17	1.31	-55.25	-13.00	42.25
5257.80	V	48.20	-68.61	14.17	1.31	-55.75	-13.00	42.75

WCDMA Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 5 Frequency:826.4 MHz								
443.31	H	35.40	-74.96	0.00	0.22	-75.18	-13.00	62.18
584.47	V	35.38	-75.74	0.00	0.23	-75.97	-13.00	62.97
1652.80	H	52.69	-72.37	10.47	0.72	-62.62	-13.00	49.62
1652.80	V	54.56	-71.10	10.47	0.72	-61.35	-13.00	48.35
2479.20	H	49.23	-73.57	12.93	1.25	-61.89	-13.00	48.89
2479.20	V	50.86	-71.98	12.93	1.25	-60.30	-13.00	47.30
3305.60	H	49.14	-70.25	13.63	1.59	-58.21	-13.00	45.21
3305.60	V	49.69	-69.71	13.63	1.59	-57.67	-13.00	44.67
WCDMA Band 5 Frequency:836.6MHz								
543.36	H	34.76	-74.02	0.00	0.25	-74.27	-13.00	61.27
654.43	V	35.27	-74.84	0.00	0.27	-75.11	-13.00	62.11
1673.20	H	53.11	-71.64	10.61	0.73	-61.76	-13.00	48.76
1673.20	V	54.04	-71.31	10.61	0.73	-61.43	-13.00	48.43
2509.80	H	47.96	-74.92	13.11	1.25	-63.06	-13.00	50.06
2509.80	V	49.21	-73.69	13.11	1.25	-61.83	-13.00	48.83
3346.40	H	47.75	-71.46	13.83	1.61	-59.24	-13.00	46.24
3346.40	V	48.28	-70.98	13.83	1.61	-58.76	-13.00	45.76
WCDMA Band 5 Frequency:846.6MHz								
343.58	H	35.65	-77.78	0.00	0.20	-77.98	-13.00	64.98
464.41	V	34.72	-78.55	0.00	0.24	-78.79	-13.00	65.79
1693.20	H	54.27	-70.17	10.75	0.75	-60.17	-13.00	47.17
1693.20	V	55.56	-69.48	10.75	0.75	-59.48	-13.00	46.48
2539.80	H	49.47	-73.40	13.14	1.27	-61.53	-13.00	48.53
2539.80	V	50.65	-72.34	13.14	1.27	-60.47	-13.00	47.47
3386.40	H	47.78	-71.25	14.03	1.63	-58.85	-13.00	45.85
3386.40	V	48.10	-71.02	14.03	1.63	-58.62	-13.00	45.62

LTE Bands:

(The Worst modulation and bandwidth was below)

LTE Band 2(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz, QPSK,Frequency:1850.7 MHz								
221.60	H	57.71	-57.76	0.00	0.18	-57.94	-13.00	44.94
72.25	V	50.21	-70.29	-3.88	0.11	-74.28	-13.00	61.28
3701.40	H	48.58	-69.98	13.99	1.83	-57.82	-13.00	44.82
3701.40	V	49.20	-69.34	13.99	1.83	-57.18	-13.00	44.18
5552.10	H	49.33	-64.77	13.96	1.27	-52.08	-13.00	39.08
5552.10	V	49.47	-64.48	13.96	1.27	-51.79	-13.00	38.79
1RB, 1.4MHz, QPSK,Frequency:1880 MHz								
238.44	H	58.56	-57.17	0.00	0.19	-57.36	-13.00	44.36
81.62	V	52.71	-70.32	0.00	0.10	-70.42	-13.00	57.42
3760.00	H	48.52	-69.32	13.76	1.63	-57.19	-13.00	44.19
3760.00	V	48.58	-69.13	13.76	1.63	-57.00	-13.00	44.00
5640.00	H	49.36	-64.36	14.02	1.31	-51.65	-13.00	38.65
5640.00	V	49.95	-63.66	14.02	1.31	-50.95	-13.00	37.95
1RB, 1.4MHz, QPSK,Frequency:1909.3 MHz								
240.36	H	59.31	-56.45	0.00	0.19	-56.64	-13.00	43.64
80.43	V	52.70	-70.92	0.00	0.10	-71.02	-13.00	58.02
3818.60	H	47.96	-69.31	13.56	1.50	-57.25	-13.00	44.25
3818.60	V	48.74	-68.35	13.56	1.50	-56.29	-13.00	43.29
5727.90	H	48.85	-65.16	13.96	1.31	-52.51	-13.00	39.51
5727.90	V	49.69	-64.29	13.96	1.31	-51.64	-13.00	38.64

LTE Band 4(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz, QPSK,Frequency:1710.7 MHz								
263.10	H	48.52	-67.26	0.00	0.19	-67.45	-13.00	54.45
80.25	V	45.36	-78.35	0.00	0.10	-78.45	-13.00	65.45
3421.40	H	52.64	-66.27	14.04	1.63	-53.86	-13.00	40.86
3421.40	V	55.82	-63.16	14.04	1.63	-50.75	-13.00	37.75
5132.10	H	48.71	-67.80	13.93	1.37	-55.24	-13.00	42.24
5132.10	V	48.47	-67.95	13.93	1.37	-55.39	-13.00	42.39
1RB, 1.4MHz, QPSK,Frequency:1732.5 MHz								
240.63	H	47.53	-68.23	0.00	0.19	-68.42	-13.00	55.42
77.52	V	45.78	-76.98	-1.24	0.10	-78.32	-13.00	65.32
3465.00	H	48.58	-70.20	13.91	1.62	-57.91	-13.00	44.91
3465.00	V	48.58	-70.23	13.91	1.62	-57.94	-13.00	44.94
5197.50	H	48.96	-67.41	14.00	1.52	-54.93	-13.00	41.93
5197.50	V	48.28	-68.16	14.00	1.52	-55.68	-13.00	42.68
1RB, 1.4MHz, QPSK,Frequency:1754.3MHz								
233.52	H	47.36	-68.29	0.00	0.19	-68.48	-13.00	55.48
75.35	V	41.75	-80.08	-2.33	0.10	-82.51	-13.00	69.51
3508.60	H	51.41	-67.30	13.83	1.60	-55.07	-13.00	42.07
3508.60	V	52.74	-65.97	13.83	1.60	-53.74	-13.00	40.74
5262.90	H	48.56	-68.21	14.19	1.29	-55.31	-13.00	42.31
5262.90	V	48.72	-68.13	14.19	1.29	-55.23	-13.00	42.23

LTE Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz, QPSK, Frequency: 824.7 MHz								
653.47	H	35.46	-71.82	0.00	0.27	-72.09	-13.00	59.09
474.38	V	35.54	-77.58	0.00	0.24	-77.82	-13.00	64.82
1649.40	H	55.19	-69.92	10.45	0.71	-60.18	-13.00	47.18
1649.40	V	59.48	-66.23	10.45	0.71	-56.49	-13.00	43.49
2474.10	H	53.33	-69.45	12.89	1.25	-57.81	-13.00	44.81
2474.10	V	56.65	-66.18	12.89	1.25	-54.54	-13.00	41.54
3298.80	H	47.73	-71.68	13.60	1.59	-59.67	-13.00	46.67
3298.80	V	48.20	-71.21	13.60	1.59	-59.20	-13.00	46.20
1RB, 1.4MHz, QPSK, Frequency: 836.5 MHz								
523.15	H	35.15	-74.06	0.00	0.25	-74.31	-13.00	61.31
494.56	V	34.80	-78.02	0.00	0.26	-78.28	-13.00	65.28
1673.00	H	55.15	-69.60	10.61	0.73	-59.72	-13.00	46.72
1673.00	V	58.95	-66.40	10.61	0.73	-56.52	-13.00	43.52
2509.50	H	55.63	-67.25	13.11	1.25	-55.39	-13.00	42.39
2509.50	V	57.55	-65.35	13.11	1.25	-53.49	-13.00	40.49
3346.00	H	47.58	-71.63	13.83	1.61	-59.41	-13.00	46.41
3346.00	V	47.47	-71.79	13.83	1.61	-59.57	-13.00	46.57
1RB, 1.4MHz, QPSK, Frequency: 848.3 MHz								
533.54	H	36.17	-72.82	0.00	0.25	-73.07	-13.00	60.07
414.46	V	35.58	-78.43	0.00	0.20	-78.63	-13.00	65.63
1696.60	H	56.10	-68.28	10.78	0.75	-58.25	-13.00	45.25
1696.60	V	59.32	-65.66	10.78	0.75	-55.63	-13.00	42.63
2544.90	H	55.35	-67.52	13.14	1.27	-55.65	-13.00	42.65
2544.90	V	57.69	-65.32	13.14	1.27	-53.45	-13.00	40.45
3393.20	H	48.10	-70.90	14.07	1.64	-58.47	-13.00	45.47
3393.20	V	48.28	-70.81	14.07	1.64	-58.38	-13.00	45.38

LTE Band 7(30MHz-26GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 5MHz, QPSK, Frequency: 2502.5 MHz								
321.50	H	54.53	-59.91	0.00	0.20	-60.11	-25.00	35.11
78.65	V	46.41	-76.84	-0.67	0.10	-77.61	-25.00	52.61
5005.00	H	47.78	-69.87	14.00	1.43	-57.30	-25.00	32.30
5005.00	V	48.20	-69.21	14.00	1.43	-56.64	-25.00	31.64
7507.50	H	47.64	-61.49	13.20	1.33	-49.62	-25.00	24.62
7507.50	V	47.83	-61.78	13.20	1.33	-49.91	-25.00	24.91
1RB, 5MHz, QPSK, Frequency: 2535 MHz								
239.15	H	55.63	-60.11	0.00	0.19	-60.30	-25.00	35.30
80.25	V	45.31	-78.40	0.00	0.10	-78.50	-25.00	53.50
5070.00	H	47.86	-69.05	13.93	1.34	-56.46	-25.00	31.46
5070.00	V	47.64	-69.08	13.93	1.34	-56.49	-25.00	31.49
7605.00	H	48.58	-60.83	13.21	1.40	-49.02	-25.00	24.02
7605.00	V	48.60	-61.21	13.21	1.40	-49.40	-25.00	24.40
1RB, 5MHz, QPSK, Frequency: 2567.5 MHz								
33.56	H	55.44	-34.06	-24.66	0.05	-58.77	-25.00	33.77
83.64	V	45.49	-76.55	0.00	0.10	-76.65	-25.00	51.65
5135.00	H	48.82	-67.68	13.94	1.38	-55.12	-25.00	30.12
5135.00	V	48.48	-67.94	13.94	1.38	-55.38	-25.00	30.38
7702.50	H	48.62	-61.07	13.40	1.47	-49.14	-25.00	24.14
7702.50	V	48.71	-61.30	13.40	1.47	-49.37	-25.00	24.37

LTE Band 12(30MHz-10GHz):

1RB, 1.4MHz, QPSK, Frequency: 699.7 MHz								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
555.64	H	35.62	-72.89	0.00	0.24	-73.13	-13.00	60.13
462.13	V	35.49	-77.81	0.00	0.23	-78.04	-13.00	65.04
1399.40	H	49.30	-74.90	9.00	1.20	-67.10	-13.00	54.10
1399.40	V	49.32	-75.48	9.00	1.20	-67.68	-13.00	54.68
2099.10	H	57.20	-66.28	11.41	1.10	-55.97	-13.00	42.97
2099.10	V	59.36	-64.12	11.41	1.10	-53.81	-13.00	40.81
2798.80	H	47.47	-74.63	13.10	1.36	-62.89	-13.00	49.89
2798.80	V	48.20	-74.10	13.10	1.36	-62.36	-13.00	49.36
1RB, 1.4MHz,QPSK, Frequency:707.5 MHz								
476.50	H	35.81	-74.17	0.00	0.24	-74.41	-13.00	61.41
511.41	V	35.24	-77.28	0.00	0.26	-77.54	-13.00	64.54
1415.00	H	50.10	-74.39	9.08	1.22	-66.53	-13.00	53.53
1415.00	V	50.68	-74.33	9.08	1.22	-66.47	-13.00	53.47
2122.50	H	54.29	-69.15	11.27	1.11	-58.99	-13.00	45.99
2122.50	V	55.67	-67.75	11.27	1.11	-57.59	-13.00	44.59
2830.00	H	47.56	-74.11	13.34	1.36	-62.13	-13.00	49.13
2830.00	V	47.31	-74.59	13.34	1.36	-62.61	-13.00	49.61
1RB, 1.4MHz,QPSK, Frequency: 715.3 MHz								
498.30	H	35.45	-74.28	0.00	0.26	-74.54	-13.00	61.54
521.58	V	34.48	-77.85	0.00	0.25	-78.10	-13.00	65.10
1430.60	H	50.33	-74.46	9.15	1.25	-66.56	-13.00	53.56
1430.60	V	51.12	-74.11	9.15	1.25	-66.21	-13.00	53.21
2145.90	H	55.89	-67.52	11.12	1.12	-57.52	-13.00	44.52
2145.90	V	58.54	-64.83	11.12	1.12	-54.83	-13.00	41.83
2861.20	H	48.10	-73.13	13.59	1.35	-60.89	-13.00	47.89
2861.20	V	48.25	-73.24	13.59	1.35	-61.00	-13.00	48.00

LTE Band 13 (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 5MHz,QPSK, Frequency: 779.5 MHz								
465.30	H	34.69	-75.42	0.00	0.24	-75.66	-13.00	62.66
488.70	V	35.37	-77.54	0.00	0.25	-77.79	-13.00	64.79
1559.00	H	54.25	-71.73	9.85	0.95	-62.83	-40.00	22.83
1559.00	V	56.21	-70.17	9.85	0.95	-61.27	-40.00	21.27
2338.50	H	50.14	-72.24	11.62	1.25	-61.87	-13.00	48.87
2338.50	V	51.45	-70.95	11.62	1.25	-60.58	-13.00	47.58
3118.00	H	47.54	-72.18	13.27	1.78	-60.69	-13.00	47.69
3118.00	V	47.67	-72.07	13.27	1.78	-60.58	-13.00	47.58
1RB, 5MHz,QPSK, Frequency:784.5 MHz								
542.84	H	35.30	-73.49	0.00	0.25	-73.74	-13.00	60.74
583.64	V	34.77	-76.36	0.00	0.23	-76.59	-13.00	63.59
1569.00	H	53.32	-72.64	9.91	0.89	-63.62	-40.00	23.62
1569.00	V	55.53	-70.87	9.91	0.89	-61.85	-40.00	21.85
2353.50	H	51.10	-71.31	11.79	1.26	-60.78	-13.00	47.78
2353.50	V	52.46	-70.01	11.79	1.26	-59.48	-13.00	46.48
3138.00	H	47.58	-71.87	13.35	1.73	-60.25	-13.00	47.25
3138.00	V	47.79	-71.68	13.35	1.73	-60.06	-13.00	47.06

LTE Band 17(30MHz-10GHz):

Table Data 1 (Continued From Table 1)								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 5MHz,QPSK, Frequency: 706.5 MHz								
524.70	H	35.69	-73.49	0.00	0.25	-73.74	-13.00	60.74
496.00	V	35.39	-77.41	0.00	0.26	-77.67	-13.00	64.67
1413.00	H	48.17	-76.28	9.07	1.22	-68.43	-13.00	55.43
1413.00	V	48.25	-76.73	9.07	1.22	-68.88	-13.00	55.88
2119.50	H	50.44	-73.00	11.28	1.11	-62.83	-13.00	49.83
2119.50	V	51.63	-71.79	11.28	1.11	-61.62	-13.00	48.62
2826.00	H	47.49	-74.24	13.31	1.36	-62.29	-13.00	49.29
2826.00	V	47.54	-74.42	13.31	1.36	-62.47	-13.00	49.47
1RB, 5MHz,QPSK, Frequency:710 MHz								
522.60	H	36.22	-73.00	0.00	0.25	-73.25	-13.00	60.25
478.20	V	35.21	-77.85	0.00	0.24	-78.09	-13.00	65.09
1420.00	H	49.77	-74.81	9.10	1.23	-66.94	-13.00	53.94
1420.00	V	51.69	-73.39	9.10	1.23	-65.52	-13.00	52.52
2130.00	H	50.21	-73.22	11.22	1.11	-63.11	-13.00	50.11
2130.00	V	51.52	-71.88	11.22	1.11	-61.77	-13.00	48.77
2840.00	H	48.02	-73.51	13.42	1.36	-61.45	-13.00	48.45
2840.00	V	48.18	-73.59	13.42	1.36	-61.53	-13.00	48.53
1RB, 5MHz,QPSK, Frequency: 713.5 MHz								
496.40	H	36.65	-73.10	0.00	0.26	-73.36	-13.00	60.36
472.50	V	35.45	-77.70	0.00	0.24	-77.94	-13.00	64.94
1427.00	H	49.43	-75.29	9.14	1.24	-67.39	-13.00	54.39
1427.00	V	50.90	-74.28	9.14	1.24	-66.38	-13.00	53.38
2140.50	H	50.96	-72.46	11.16	1.12	-62.42	-13.00	49.42
2140.50	V	52.36	-71.02	11.16	1.12	-60.98	-13.00	47.98
2854.00	H	47.54	-73.79	13.53	1.35	-61.61	-13.00	48.61
2854.00	V	47.87	-73.72	13.53	1.35	-61.54	-13.00	48.54

LTE Band 25(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1..4MHz,QPSK, Frequency: 1850.4 MHz								
241.30	H	54.74	-61.03	0.00	0.19	-61.22	-13.00	48.22
78.68	V	47.69	-75.57	-0.66	0.10	-76.33	-13.00	63.33
3700.80	H	47.44	-71.13	14.00	1.83	-58.96	-13.00	45.96
3700.80	V	48.12	-70.43	14.00	1.83	-58.26	-13.00	45.26
5551.20	H	47.86	-66.25	13.95	1.27	-53.57	-13.00	40.57
5551.20	V	47.84	-66.12	13.95	1.27	-53.44	-13.00	40.44
1RB, 1.4MHz,QPSK, Frequency:1822.5 MHz								
265.70	H	55.83	-59.93	0.00	0.19	-60.12	-13.00	47.12
88.62	V	48.11	-71.48	0.00	0.10	-71.58	-13.00	58.58
3645.00	H	48.72	-70.14	14.06	1.65	-57.73	-13.00	44.73
3645.00	V	48.28	-70.57	14.06	1.65	-58.16	-13.00	45.16
5467.50	H	48.30	-66.06	13.90	1.31	-53.47	-13.00	40.47
5467.50	V	48.49	-65.76	13.90	1.31	-53.17	-13.00	40.17
1RB, 1.4MHz,QPSK, Frequency: 1914.3 MHz								
245.30	H	56.71	-59.13	0.00	0.19	-59.32	-13.00	46.32
79.60	V	48.26	-75.40	-0.20	0.10	-75.70	-13.00	62.70
3828.60	H	47.25	-69.98	13.54	1.51	-57.95	-13.00	44.95
3828.60	V	48.20	-68.86	13.54	1.51	-56.83	-13.00	43.83
5742.90	H	48.56	-65.53	13.99	1.30	-52.84	-13.00	39.84
5742.90	V	48.39	-65.68	13.99	1.30	-52.99	-13.00	39.99

**LTE Band 26(30MHz-10GHz):
814-824MHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz,QPSK, Frequency: 814.7 MHz								
465.00	H	36.11	-74.00	0.00	0.24	-74.24	-13.00	61.24
452.30	V	35.26	-78.19	0.00	0.23	-78.42	-13.00	65.42
1629.40	H	54.58	-70.85	10.31	0.70	-61.24	-13.00	48.24
1629.40	V	55.86	-70.17	10.31	0.70	-60.56	-13.00	47.56
2444.10	H	50.12	-72.55	12.65	1.27	-61.17	-13.00	48.17
2444.10	V	51.63	-71.15	12.65	1.27	-59.77	-13.00	46.77
3258.80	H	47.47	-71.60	13.60	1.58	-59.58	-13.00	46.58
3258.80	V	47.65	-71.45	13.60	1.58	-59.43	-13.00	46.43
1RB, 1.4MHz,QPSK, Frequency:823.3 MHz								
542.84	H	36.74	-72.05	0.00	0.25	-72.30	-13.00	59.30
583.93	V	36.31	-74.82	0.00	0.23	-75.05	-13.00	62.05
1646.60	H	53.89	-71.27	10.43	0.71	-61.55	-13.00	48.55
1646.60	V	54.20	-71.56	10.43	0.71	-61.84	-13.00	48.84
2469.90	H	49.78	-72.99	12.86	1.26	-61.39	-13.00	48.39
2469.90	V	51.78	-71.05	12.86	1.26	-59.45	-13.00	46.45
3293.20	H	48.28	-71.08	13.60	1.59	-59.07	-13.00	46.07
3293.20	V	48.12	-71.25	13.60	1.59	-59.24	-13.00	46.24

824-849MHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz,QPSK, Frequency: 824.7 MHz								
453.10	H	36.24	-74.01	0.00	0.23	-74.24	-13.00	61.24
475.60	V	35.72	-77.38	0.00	0.24	-77.62	-13.00	64.62
1649.40	H	55.34	-69.77	10.45	0.71	-60.03	-13.00	47.03
1649.40	V	53.32	-72.39	10.45	0.71	-62.65	-13.00	49.65
2474.10	H	52.75	-70.03	12.89	1.25	-58.39	-13.00	45.39
2474.10	V	53.59	-69.24	12.89	1.25	-57.60	-13.00	44.60
3298.80	H	48.77	-70.64	13.60	1.59	-58.63	-13.00	45.63
3298.80	V	48.65	-70.76	13.60	1.59	-58.75	-13.00	45.75
1RB, 1.4MHz,QPSK, Frequency:836.5 MHz								
528.40	H	34.59	-74.51	0.00	0.25	-74.76	-13.00	61.76
513.60	V	36.54	-75.94	0.00	0.26	-76.20	-13.00	63.20
1673.00	H	56.78	-67.97	10.61	0.73	-58.09	-13.00	45.09
1673.00	V	55.67	-69.68	10.61	0.73	-59.80	-13.00	46.80
2509.50	H	54.80	-68.08	13.11	1.25	-56.22	-13.00	43.22
2509.50	V	55.62	-67.28	13.11	1.25	-55.42	-13.00	42.42
3346.00	H	48.63	-70.58	13.83	1.61	-58.36	-13.00	45.36
3346.00	V	49.58	-69.68	13.83	1.61	-57.46	-13.00	44.46
1RB, 1.4MHz,QPSK, Frequency: 848.3 MHz								
547.90	H	36.56	-72.12	0.00	0.25	-72.37	-13.00	59.37
545.30	V	36.49	-75.38	0.00	0.25	-75.63	-13.00	62.63
1696.60	H	55.34	-69.04	10.78	0.75	-59.01	-13.00	46.01
1696.60	V	55.66	-69.32	10.78	0.75	-59.29	-13.00	46.29
2544.90	H	53.20	-69.67	13.14	1.27	-57.80	-13.00	44.80
2544.90	V	54.28	-68.73	13.14	1.27	-56.86	-13.00	43.86
3393.20	H	49.88	-69.12	14.07	1.64	-56.69	-13.00	43.69
3393.20	V	48.86	-70.23	14.07	1.64	-57.80	-13.00	44.80

LTE Band 41(30MHz-27GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 5MHz,QPSK, Frequency: 2498.5 MHz								
82.50	H	52.70	-67.64	0.00	0.10	-67.74	-25.00	42.74
257.30	V	53.47	-65.48	0.00	0.19	-65.67	-25.00	40.67
4997.00	H	48.32	-69.35	14.00	1.44	-56.79	-25.00	31.79
4997.00	V	48.23	-69.18	14.00	1.44	-56.62	-25.00	31.62
7495.50	H	47.78	-61.34	13.20	1.32	-49.46	-25.00	24.46
7495.50	V	48.10	-61.51	13.20	1.32	-49.63	-25.00	24.63
1RB, 5MHz,QPSK, Frequency:2593 MHz								
84.60	H	53.62	-65.66	0.00	0.10	-65.76	-25.00	40.76
266.10	V	54.61	-63.89	0.00	0.19	-64.08	-25.00	39.08
5186.00	H	47.86	-68.53	13.99	1.50	-56.04	-25.00	31.04
5186.00	V	47.68	-68.76	13.99	1.50	-56.27	-25.00	31.27
7779.00	H	48.28	-61.63	13.32	1.53	-49.84	-25.00	24.84
7779.00	V	48.76	-61.41	13.32	1.53	-49.62	-25.00	24.62
1RB, 5MHz,QPSK, Frequency: 2687.5 MHz								
75.36	H	55.64	-64.66	-2.32	0.10	-67.08	-25.00	42.08
243.80	V	57.86	-61.18	0.00	0.19	-61.37	-25.00	36.37
5375.00	H	49.33	-65.30	14.15	1.38	-52.53	-25.00	27.53
5375.00	V	49.07	-65.55	14.15	1.38	-52.78	-25.00	27.78
8062.50	H	48.51	-61.80	13.34	1.72	-50.18	-25.00	25.18
8062.50	V	48.67	-61.71	13.34	1.72	-50.09	-25.00	25.09

LTE Band 66(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz,QPSK, Frequency: 1710.7 MHz								
68.70	H	53.45	-64.58	-5.69	0.11	-70.38	-13.00	57.38
254.30	V	56.27	-62.84	0.00	0.19	-63.03	-13.00	50.03
3421.40	H	52.54	-66.37	14.04	1.63	-53.96	-13.00	40.96
3421.40	V	54.25	-64.73	14.04	1.63	-52.32	-13.00	39.32
5132.10	H	47.53	-68.98	13.93	1.37	-56.42	-13.00	43.42
5132.10	V	47.78	-68.64	13.93	1.37	-56.08	-13.00	43.08
1RB, 1.4MHz,QPSK, Frequency:1745 MHz								
80.25	H	52.60	-68.88	0.00	0.10	-68.98	-13.00	55.98
242.50	V	53.75	-65.22	0.00	0.19	-65.41	-13.00	52.41
3490.00	H	51.64	-67.06	13.83	1.61	-54.84	-13.00	41.84
3490.00	V	52.67	-66.04	13.83	1.61	-53.82	-13.00	40.82
5235.00	H	48.55	-68.04	14.11	1.40	-55.33	-13.00	42.33
5235.00	V	48.63	-68.04	14.11	1.40	-55.33	-13.00	42.33
1RB, 1.5MHz,QPSK, Frequency: 1779.3 MHz								
73.86	H	52.77	-67.10	-3.07	0.11	-70.28	-13.00	57.28
217.80	V	54.60	-63.20	0.00	0.18	-63.38	-13.00	50.38
3558.60	H	51.50	-67.41	13.98	1.55	-54.98	-13.00	41.98
3558.60	V	53.64	-65.27	13.98	1.55	-52.84	-13.00	39.84
5337.90	H	48.20	-67.61	14.22	1.26	-54.65	-13.00	41.65
5337.90	V	48.16	-67.68	14.22	1.26	-54.72	-13.00	41.72

LTE Band 71(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 5MHz,QPSK, Frequency: 665.5 MHz								
460.10	H	36.10	-74.07	0.00	0.23	-74.30	-13.00	61.30
527.60	V	35.49	-76.72	0.00	0.25	-76.97	-13.00	63.97
1331.00	H	50.52	-73.98	8.52	1.19	-66.65	-13.00	53.65
1331.00	V	49.85	-75.46	8.52	1.19	-68.13	-13.00	55.13
1996.50	H	50.74	-74.71	11.99	1.13	-63.85	-13.00	50.85
1996.50	V	50.20	-75.64	11.99	1.13	-64.78	-13.00	51.78
2662.00	H	49.41	-73.01	13.14	1.27	-61.14	-13.00	48.14
2662.00	V	48.71	-73.89	13.14	1.27	-62.02	-13.00	49.02
1RB, 5MHz,QPSK, Frequency: 680.5 MHz								
496.30	H	35.72	-74.03	0.00	0.26	-74.29	-13.00	61.29
573.80	V	35.26	-76.06	0.00	0.24	-76.30	-13.00	63.30
1361.00	H	51.20	-73.17	8.73	1.20	-65.64	-13.00	52.64
1361.00	V	50.88	-74.21	8.73	1.20	-66.68	-13.00	53.68
2041.50	H	50.65	-74.02	11.75	1.12	-63.39	-13.00	50.39
2041.50	V	50.41	-74.49	11.75	1.12	-63.86	-13.00	50.86
2722.00	H	48.82	-73.31	13.10	1.27	-61.48	-13.00	48.48
2722.00	V	49.66	-72.59	13.10	1.27	-60.76	-13.00	47.76
1RB, 5MHz,QPSK, Frequency: 695.5MHz								
428.70	H	36.50	-74.03	0.00	0.21	-74.24	-13.00	61.24
448.90	V	34.75	-78.75	0.00	0.22	-78.97	-13.00	65.97
1391.00	H	50.84	-73.40	8.94	1.20	-65.66	-13.00	52.66
1391.00	V	50.88	-73.98	8.94	1.20	-66.24	-13.00	53.24
2086.50	H	48.88	-74.86	11.48	1.10	-64.48	-13.00	51.48
2086.50	V	49.30	-74.49	11.48	1.10	-64.11	-13.00	51.11
2782.00	H	48.57	-73.54	13.10	1.34	-61.78	-13.00	48.78
2782.00	V	48.71	-73.58	13.10	1.34	-61.82	-13.00	48.82

Spot check:**Configuration 4#****Cellular Band (30MHz-10GHz)**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GPRS 850 Frequency:824.2MHz								
543.15	H	35.86	-68.26	0.00	0.35	-68.61	-13.00	55.61
584.35	V	34.71	-65.72	0.00	0.36	-66.08	-13.00	53.08
1648.40	H	59.96	-65.17	10.44	0.71	-55.44	-13.00	42.44
1648.40	V	55.23	-70.50	10.44	0.71	-60.77	-13.00	47.77
2472.60	H	59.63	-63.15	12.88	1.25	-51.52	-13.00	38.52
2472.60	V	56.02	-66.81	12.88	1.25	-55.18	-13.00	42.18
3296.80	H	49.36	-70.03	13.60	1.59	-58.02	-13.00	45.02
3296.80	V	48.89	-70.50	13.60	1.59	-58.49	-13.00	45.49
GPRS 850 Frequency:836.6MHz								
543.51	H	35.76	-68.35	0.00	0.35	-68.70	-13.00	55.70
583.56	V	34.25	-66.21	0.00	0.36	-66.57	-13.00	53.57
1673.20	H	56.58	-68.17	10.61	0.73	-58.29	-13.00	45.29
1673.20	V	55.20	-70.15	10.61	0.73	-60.27	-13.00	47.27
2509.80	H	60.67	-62.21	13.11	1.25	-50.35	-13.00	37.35
2509.80	V	59.20	-63.70	13.11	1.25	-51.84	-13.00	38.84
3346.40	H	49.30	-69.91	13.83	1.61	-57.69	-13.00	44.69
3346.40	V	49.44	-69.82	13.83	1.61	-57.60	-13.00	44.60
GPRS 850 Frequency:848.8MHz								
544.18	H	35.48	-68.61	0.00	0.35	-68.96	-13.00	55.96
583.16	V	34.15	-66.32	0.00	0.36	-66.68	-13.00	53.68
1697.60	H	54.11	-70.26	10.78	0.75	-60.23	-13.00	47.23
1697.60	V	53.32	-71.65	10.78	0.75	-61.62	-13.00	48.62
2546.40	H	56.63	-66.24	13.15	1.27	-54.36	-13.00	41.36
2546.40	V	57.25	-65.76	13.15	1.27	-53.88	-13.00	40.88
3395.20	H	49.41	-69.58	14.08	1.64	-57.14	-13.00	44.14
3395.20	V	48.70	-70.39	14.08	1.64	-57.95	-13.00	44.95

WCDMA Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 5 Frequency:826.4 MHz								
544.13	H	35.69	-68.40	0.00	0.35	-68.75	-13.00	55.75
583.21	V	34.84	-65.63	0.00	0.36	-65.99	-13.00	52.99
1652.80	H	53.10	-71.96	10.47	0.72	-62.21	-13.00	49.21
1652.80	V	54.52	-71.14	10.47	0.72	-61.39	-13.00	48.39
2479.20	H	50.41	-72.39	12.93	1.25	-60.71	-13.00	47.71
2479.20	V	50.11	-72.73	12.93	1.25	-61.05	-13.00	48.05
3305.60	H	48.78	-70.61	13.63	1.59	-58.57	-13.00	45.57
3305.60	V	49.39	-70.01	13.63	1.59	-57.97	-13.00	44.97
WCDMA Band 5 Frequency:836.6MHz								
544.54	H	35.52	-68.56	0.00	0.35	-68.91	-13.00	55.91
583.62	V	34.37	-66.08	0.00	0.36	-66.44	-13.00	53.44
1673.20	H	54.11	-70.64	10.61	0.73	-60.76	-13.00	47.76
1673.20	V	54.32	-71.03	10.61	0.73	-61.15	-13.00	48.15
2509.80	H	48.37	-74.51	13.11	1.25	-62.65	-13.00	49.65
2509.80	V	48.25	-74.65	13.11	1.25	-62.79	-13.00	49.79
3346.40	H	48.68	-70.53	13.83	1.61	-58.31	-13.00	45.31
3346.40	V	48.20	-71.06	13.83	1.61	-58.84	-13.00	45.84
WCDMA Band 5 Frequency:846.6MHz								
544.35	H	35.56	-68.53	0.00	0.35	-68.88	-13.00	55.88
583.81	V	34.21	-66.24	0.00	0.36	-66.60	-13.00	53.60
1693.20	H	55.52	-68.92	10.75	0.75	-58.92	-13.00	45.92
1693.20	V	56.78	-68.26	10.75	0.75	-58.26	-13.00	45.26
2539.80	H	49.58	-73.29	13.14	1.27	-61.42	-13.00	48.42
2539.80	V	49.77	-73.22	13.14	1.27	-61.35	-13.00	48.35
3386.40	H	48.69	-70.34	14.03	1.63	-57.94	-13.00	44.94
3386.40	V	48.32	-70.80	14.03	1.63	-58.40	-13.00	45.40

LTE Bands:
(The Worst modulation and bandwidth was below)

LTE Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz, QPSK, Frequency: 824.7 MHz								
544.51	H	35.69	-68.39	0.00	0.35	-68.74	-13.00	55.74
583.63	V	34.54	-65.91	0.00	0.36	-66.27	-13.00	53.27
1649.40	H	54.55	-70.56	10.45	0.71	-60.82	-13.00	47.82
1649.40	V	58.58	-67.13	10.45	0.71	-57.39	-13.00	44.39
2474.10	H	54.52	-68.26	12.89	1.25	-56.62	-13.00	43.62
2474.10	V	56.28	-66.55	12.89	1.25	-54.91	-13.00	41.91
3298.80	H	48.64	-70.77	13.60	1.59	-58.76	-13.00	45.76
3298.80	V	48.71	-70.70	13.60	1.59	-58.69	-13.00	45.69
1RB, 1.4MHz, QPSK, Frequency: 836.5 MHz								
544.48	H	35.77	-68.31	0.00	0.35	-68.66	-13.00	55.66
583.76	V	34.65	-65.80	0.00	0.36	-66.16	-13.00	53.16
1673.00	H	56.32	-68.43	10.61	0.73	-58.55	-13.00	45.55
1673.00	V	58.23	-67.12	10.61	0.73	-57.24	-13.00	44.24
2509.50	H	55.20	-67.68	13.11	1.25	-55.82	-13.00	42.82
2509.50	V	58.39	-64.51	13.11	1.25	-52.65	-13.00	39.65
3346.00	H	48.56	-70.65	13.83	1.61	-58.43	-13.00	45.43
3346.00	V	48.39	-70.87	13.83	1.61	-58.65	-13.00	45.65
1RB, 1.4MHz, QPSK, Frequency: 848.3 MHz								
544.74	H	35.76	-68.32	0.00	0.35	-68.67	-13.00	55.67
583.62	V	34.63	-65.82	0.00	0.36	-66.18	-13.00	53.18
1696.60	H	55.56	-68.82	10.78	0.75	-58.79	-13.00	45.79
1696.60	V	58.69	-66.29	10.78	0.75	-56.26	-13.00	43.26
2544.90	H	55.25	-67.62	13.14	1.27	-55.75	-13.00	42.75
2544.90	V	58.02	-64.99	13.14	1.27	-53.12	-13.00	40.12
3393.20	H	48.28	-70.72	14.07	1.64	-58.29	-13.00	45.29
3393.20	V	48.30	-70.79	14.07	1.64	-58.36	-13.00	45.36

Configuration 3#**Cellular Band (30MHz-10GHz)**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GPRS 850 Frequency:824.2MHz								
546.34	H	36.01	-68.02	0.00	0.35	-68.37	-13.00	55.37
581.46	V	35.12	-65.39	0.00	0.36	-65.75	-13.00	52.75
1648.40	H	60.33	-64.80	10.44	0.71	-55.07	-13.00	42.07
1648.40	V	56.32	-69.41	10.44	0.71	-59.68	-13.00	46.68
2472.60	H	60.11	-62.67	12.88	1.25	-51.04	-13.00	38.04
2472.60	V	55.89	-66.94	12.88	1.25	-55.31	-13.00	42.31
3296.80	H	49.88	-69.51	13.60	1.59	-57.50	-13.00	44.50
3296.80	V	49.01	-70.38	13.60	1.59	-58.37	-13.00	45.37
GPRS 850 Frequency:836.6MHz								
540.34	H	36.88	-67.33	0.00	0.35	-67.68	-13.00	54.68
579.67	V	35.24	-65.32	0.00	0.36	-65.68	-13.00	52.68
1673.20	H	59.33	-65.42	10.61	0.73	-55.54	-13.00	42.54
1673.20	V	55.97	-69.38	10.61	0.73	-59.50	-13.00	46.50
2509.80	H	60.45	-62.43	13.11	1.25	-50.57	-13.00	37.57
2509.80	V	58.99	-63.91	13.11	1.25	-52.05	-13.00	39.05
3346.40	H	49.76	-69.45	13.83	1.61	-57.23	-13.00	44.23
3346.40	V	49.57	-69.69	13.83	1.61	-57.47	-13.00	44.47
GPRS 850 Frequency:848.8MHz								
542.56	H	37.31	-66.83	0.00	0.35	-67.18	-13.00	54.18
579.63	V	35.54	-65.02	0.00	0.36	-65.38	-13.00	52.38
1697.60	H	55.21	-69.16	10.78	0.75	-59.13	-13.00	46.13
1697.60	V	53.78	-71.19	10.78	0.75	-61.16	-13.00	48.16
2546.40	H	56.13	-66.74	13.15	1.27	-54.86	-13.00	41.86
2546.40	V	55.22	-67.79	13.15	1.27	-55.91	-13.00	42.91
3395.20	H	49.78	-69.21	14.08	1.64	-56.77	-13.00	43.77
3395.20	V	48.83	-70.26	14.08	1.64	-57.82	-13.00	44.82

WCDMA Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 5 Frequency:826.4 MHz								
545.35	H	36.84	-67.22	0.00	0.35	-67.57	-13.00	54.57
581.06	V	35.04	-65.48	0.00	0.36	-65.84	-13.00	52.84
1652.80	H	55.24	-69.82	10.47	0.72	-60.07	-13.00	47.07
1652.80	V	54.13	-71.53	10.47	0.72	-61.78	-13.00	48.78
2479.20	H	51.24	-71.56	12.93	1.25	-59.88	-13.00	46.88
2479.20	V	50.76	-72.08	12.93	1.25	-60.40	-13.00	47.40
3305.60	H	49.01	-70.38	13.63	1.59	-58.34	-13.00	45.34
3305.60	V	48.67	-70.73	13.63	1.59	-58.69	-13.00	45.69
WCDMA Band 5 Frequency:836.6MHz								
530.56	H	36.87	-67.63	0.00	0.35	-67.98	-13.00	54.98
571.67	V	35.67	-65.11	0.00	0.36	-65.47	-13.00	52.47
1673.20	H	56.32	-68.43	10.61	0.73	-58.55	-13.00	45.55
1673.20	V	55.31	-70.04	10.61	0.73	-60.16	-13.00	47.16
2509.80	H	49.52	-73.36	13.11	1.25	-61.50	-13.00	48.50
2509.80	V	48.97	-73.93	13.11	1.25	-62.07	-13.00	49.07
3346.40	H	48.76	-70.45	13.83	1.61	-58.23	-13.00	45.23
3346.40	V	48.65	-70.61	13.83	1.61	-58.39	-13.00	45.39
WCDMA Band 5 Frequency:846.6MHz								
542.67	H	36.96	-67.18	0.00	0.35	-67.53	-13.00	54.53
582.45	V	35.21	-65.28	0.00	0.36	-65.64	-13.00	52.64
1693.20	H	55.93	-68.51	10.75	0.75	-58.51	-13.00	45.51
1693.20	V	56.23	-68.81	10.75	0.75	-58.81	-13.00	45.81
2539.80	H	49.77	-73.10	13.14	1.27	-61.23	-13.00	48.23
2539.80	V	48.24	-74.75	13.14	1.27	-62.88	-13.00	49.88
3386.40	H	48.45	-70.58	14.03	1.63	-58.18	-13.00	45.18
3386.40	V	48.32	-70.80	14.03	1.63	-58.40	-13.00	45.40

LTE Bands:
(The Worst modulation and bandwidth was below)

LTE Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz, QPSK, Frequency: 824.7 MHz								
546.73	H	37.78	-66.24	0.00	0.35	-66.59	-13.00	53.59
590.35	V	35.62	-64.65	0.00	0.36	-65.01	-13.00	52.01
1649.40	H	57.42	-67.69	10.45	0.71	-57.95	-13.00	44.95
1649.40	V	58.12	-67.59	10.45	0.71	-57.85	-13.00	44.85
2474.10	H	55.56	-67.22	12.89	1.25	-55.58	-13.00	42.58
2474.10	V	56.42	-66.41	12.89	1.25	-54.77	-13.00	41.77
3298.80	H	49.21	-70.20	13.60	1.59	-58.19	-13.00	45.19
3298.80	V	48.96	-70.45	13.60	1.59	-58.44	-13.00	45.44
1RB, 1.4MHz, QPSK, Frequency: 836.5 MHz								
545.90	H	36.78	-67.26	0.00	0.35	-67.61	-13.00	54.61
579.73	V	35.67	-64.89	0.00	0.36	-65.25	-13.00	52.25
1673.00	H	57.67	-67.08	10.61	0.73	-57.20	-13.00	44.20
1673.00	V	59.12	-66.23	10.61	0.73	-56.35	-13.00	43.35
2509.50	H	56.04	-66.84	13.11	1.25	-54.98	-13.00	41.98
2509.50	V	57.42	-65.48	13.11	1.25	-53.62	-13.00	40.62
3346.00	H	48.87	-70.34	13.83	1.61	-58.12	-13.00	45.12
3346.00	V	48.34	-70.92	13.83	1.61	-58.70	-13.00	45.70
1RB, 1.4MHz, QPSK, Frequency: 848.3 MHz								
540.65	H	36.45	-67.75	0.00	0.35	-68.10	-13.00	55.10
580.75	V	35.02	-65.51	0.00	0.36	-65.87	-13.00	52.87
1696.60	H	56.46	-67.92	10.78	0.75	-57.89	-13.00	44.89
1696.60	V	57.32	-67.66	10.78	0.75	-57.63	-13.00	44.63
2544.90	H	56.22	-66.65	13.14	1.27	-54.78	-13.00	41.78
2544.90	V	57.85	-65.16	13.14	1.27	-53.29	-13.00	40.29
3393.20	H	49.21	-69.79	14.07	1.64	-57.36	-13.00	44.36
3393.20	V	48.76	-70.33	14.07	1.64	-57.90	-13.00	44.90

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2402Z105148EA1-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2402Z105148EA1-RF-INP EUT INTERNAL PHOTOGRAPHS

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2402Z105148E-RF-00EA1-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******