



Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 7005 MHz		
Remark:			

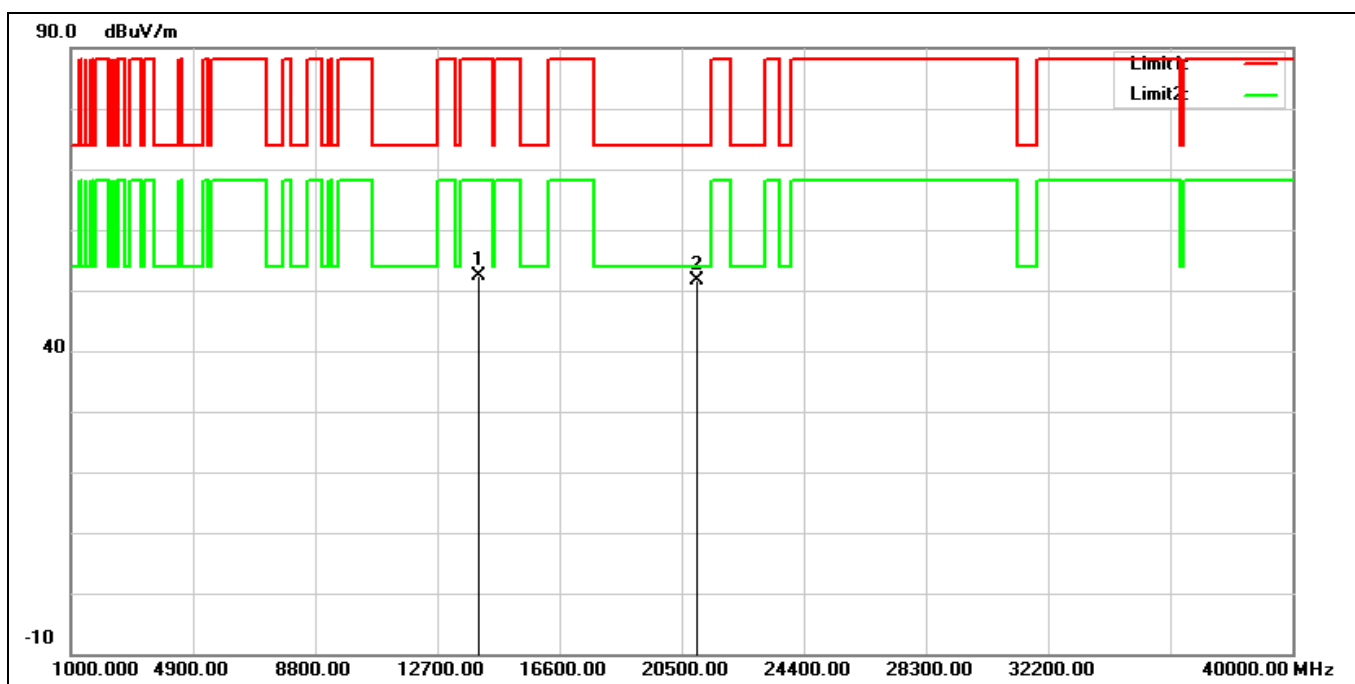


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14010.000	34.37	18.11	52.48	88.20	-35.72	peak
2*	21015.000	30.64	20.95	51.59	74.00	-22.41	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 7005 MHz		
Remark:			

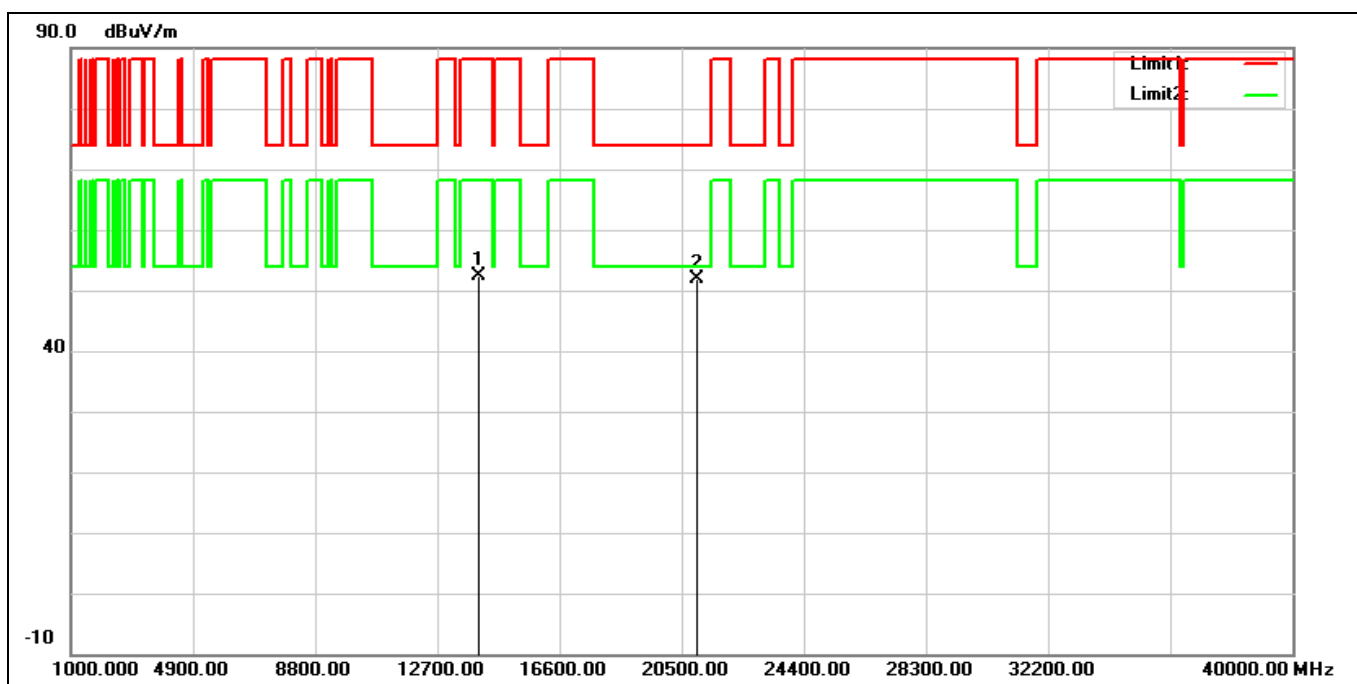


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14010.000	34.35	18.11	52.46	88.20	-35.74	peak
2*	21015.000	30.96	20.95	51.91	74.00	-22.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

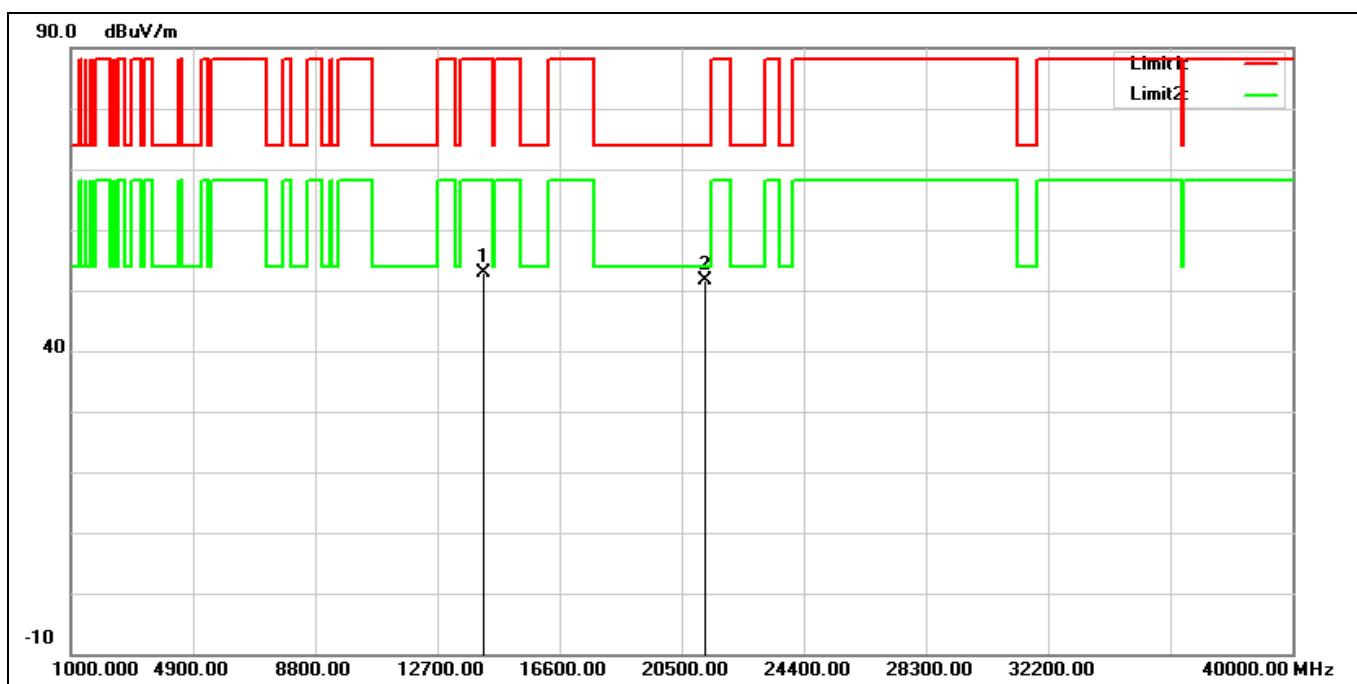


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14170.000	34.23	18.56	52.79	88.20	-35.41	peak
2*	21255.000	31.07	20.45	51.52	74.00	-22.48	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

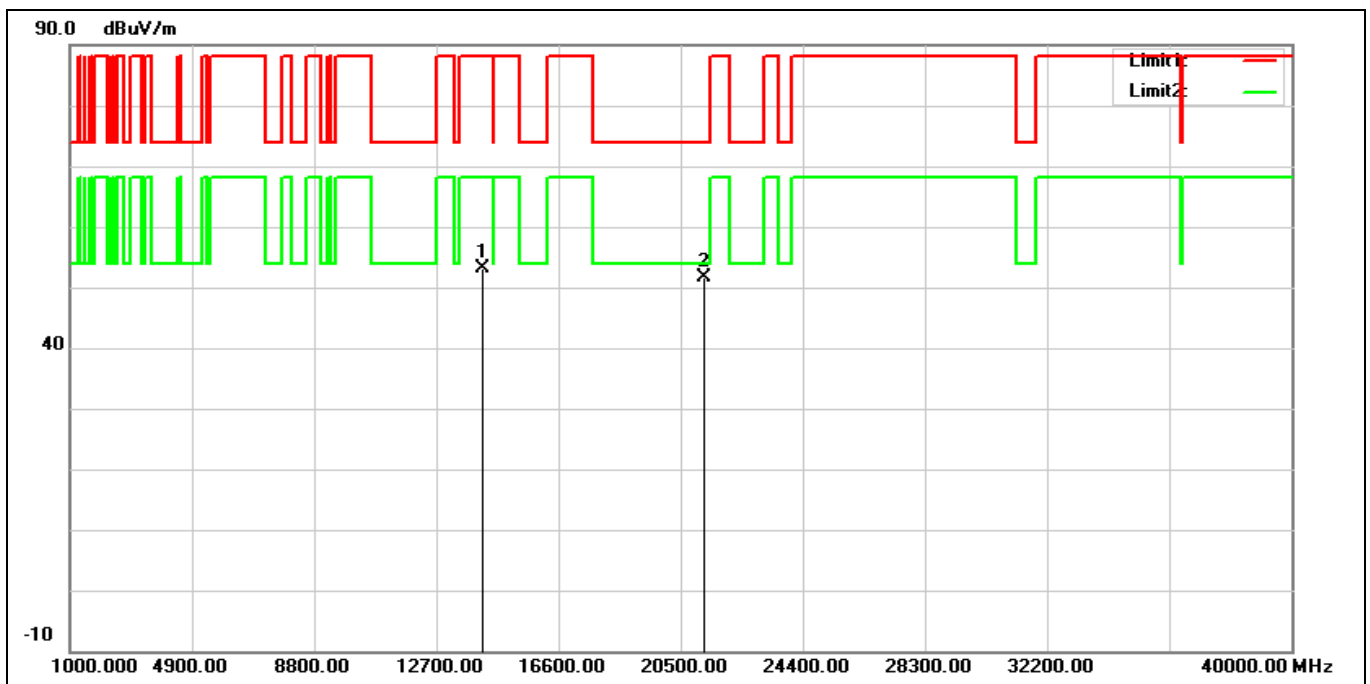


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14170.000	34.63	18.56	53.19	88.20	-35.01	peak
2*	21255.000	31.07	20.45	51.52	74.00	-22.48	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

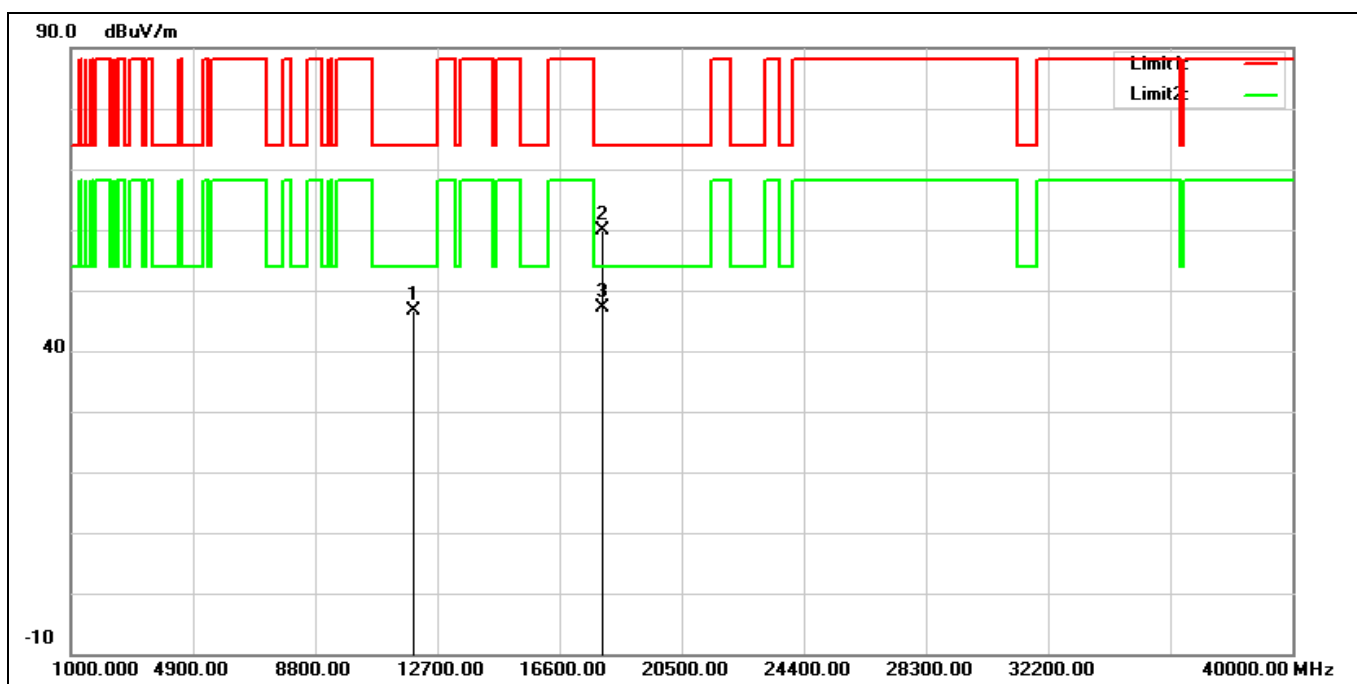


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11970.000	32.62	14.10	46.72	74.00	-27.28	peak
2	17955.000	30.72	29.16	59.88	74.00	-14.12	peak
3*	17955.000	17.90	29.16	47.06	54.00	-6.94	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

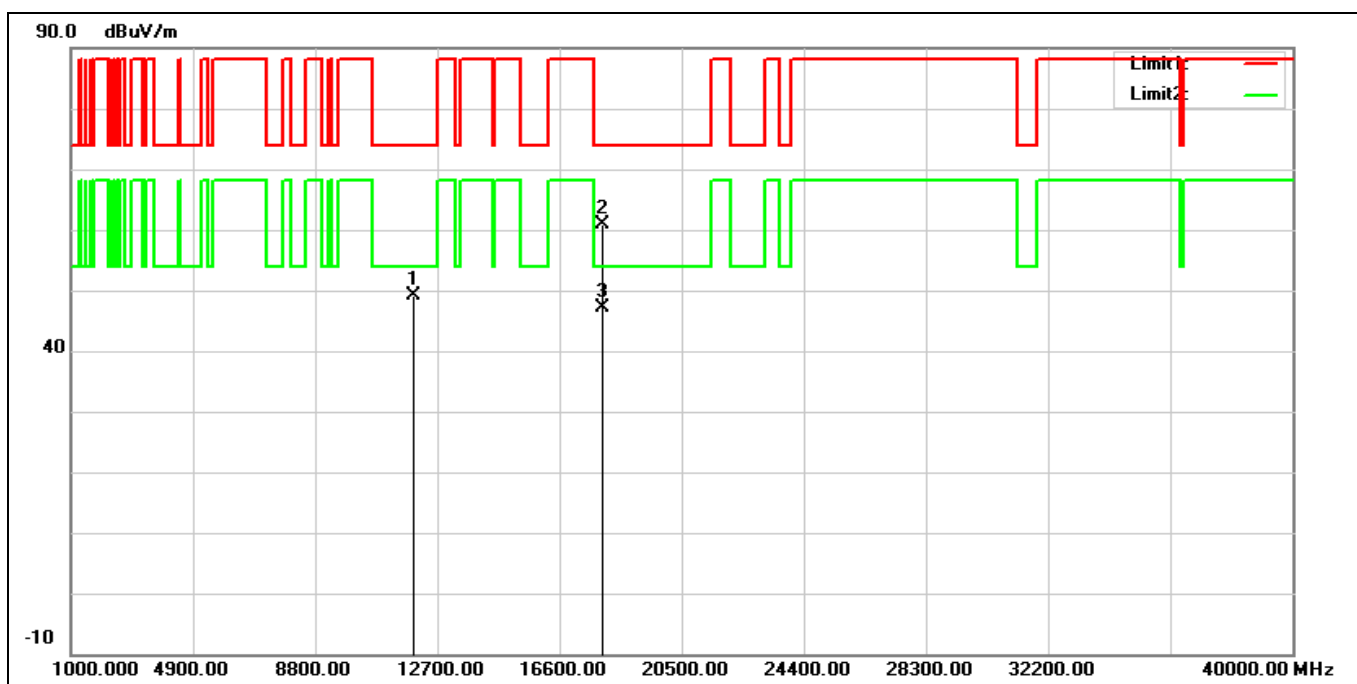


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11970.000	34.91	14.10	49.01	74.00	-24.99	peak
2	17955.000	31.83	29.16	60.99	74.00	-13.01	peak
3*	17955.000	17.96	29.16	47.12	54.00	-6.88	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6145 MHz		
Remark:			

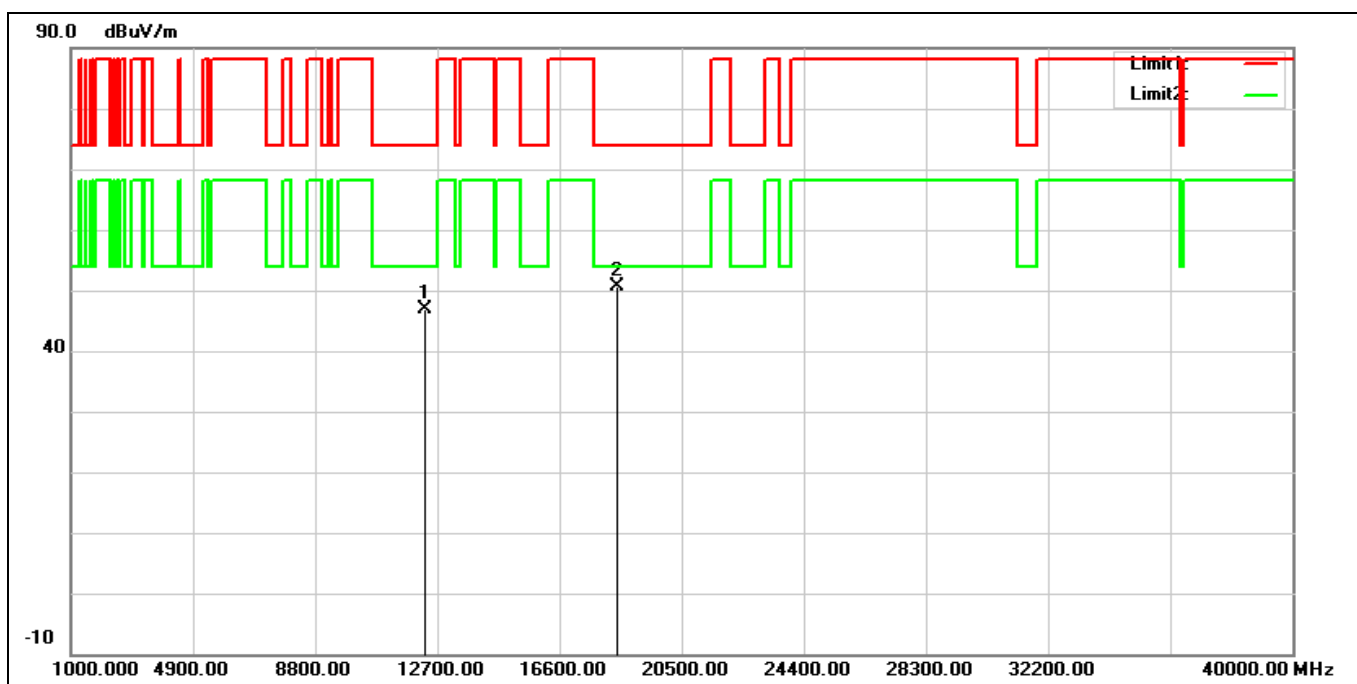


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12290.000	32.49	14.40	46.89	74.00	-27.11	peak
2*	18435.000	31.99	18.55	50.54	74.00	-23.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6145 MHz		
Remark:			

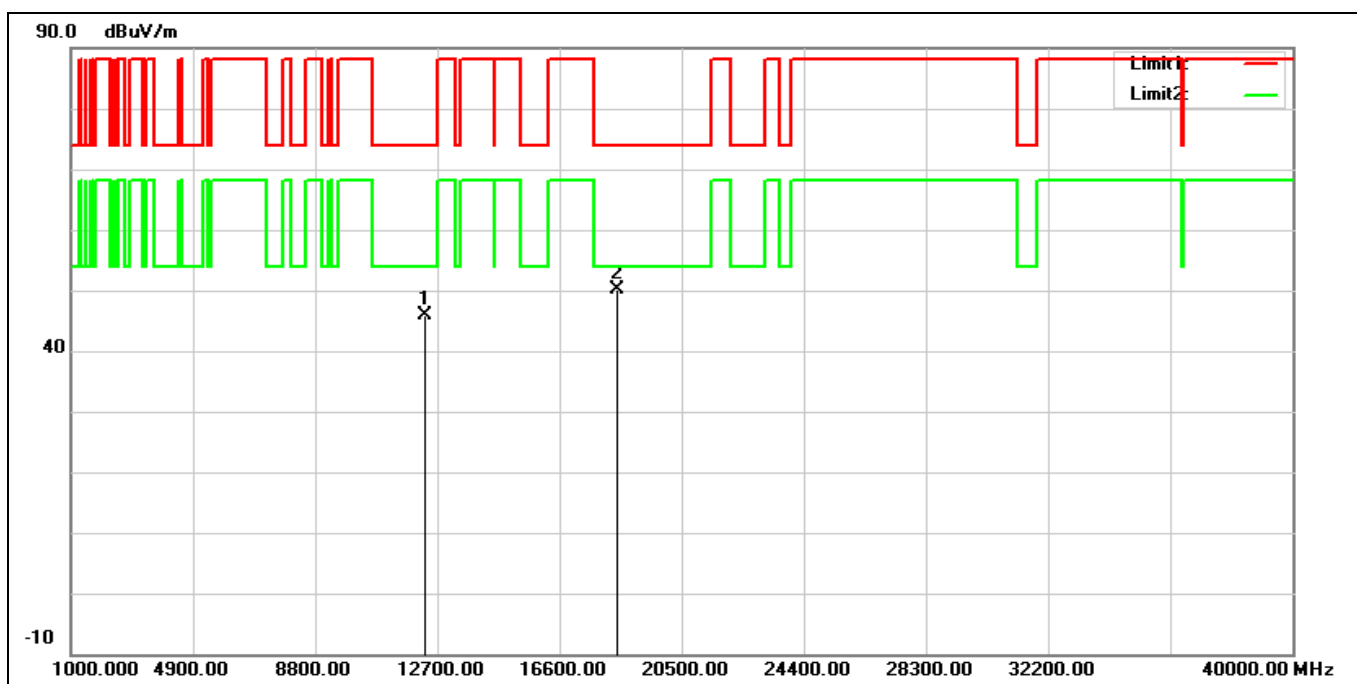


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12290.000	31.40	14.40	45.80	74.00	-28.20	peak
2*	18435.000	31.60	18.55	50.15	74.00	-23.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6385 MHz		
Remark:			

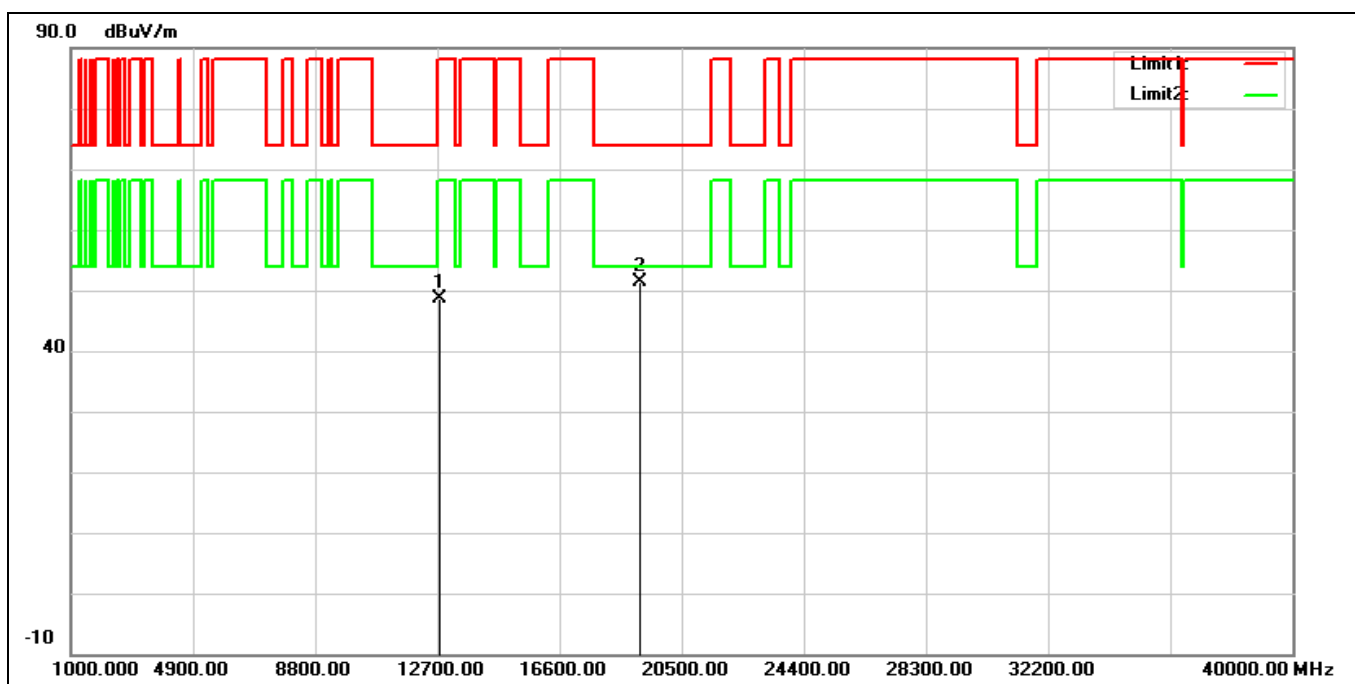


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12770.000	32.83	15.70	48.53	88.20	-39.67	peak
2*	19155.000	31.53	19.92	51.45	74.00	-22.55	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6385 MHz		
Remark:			

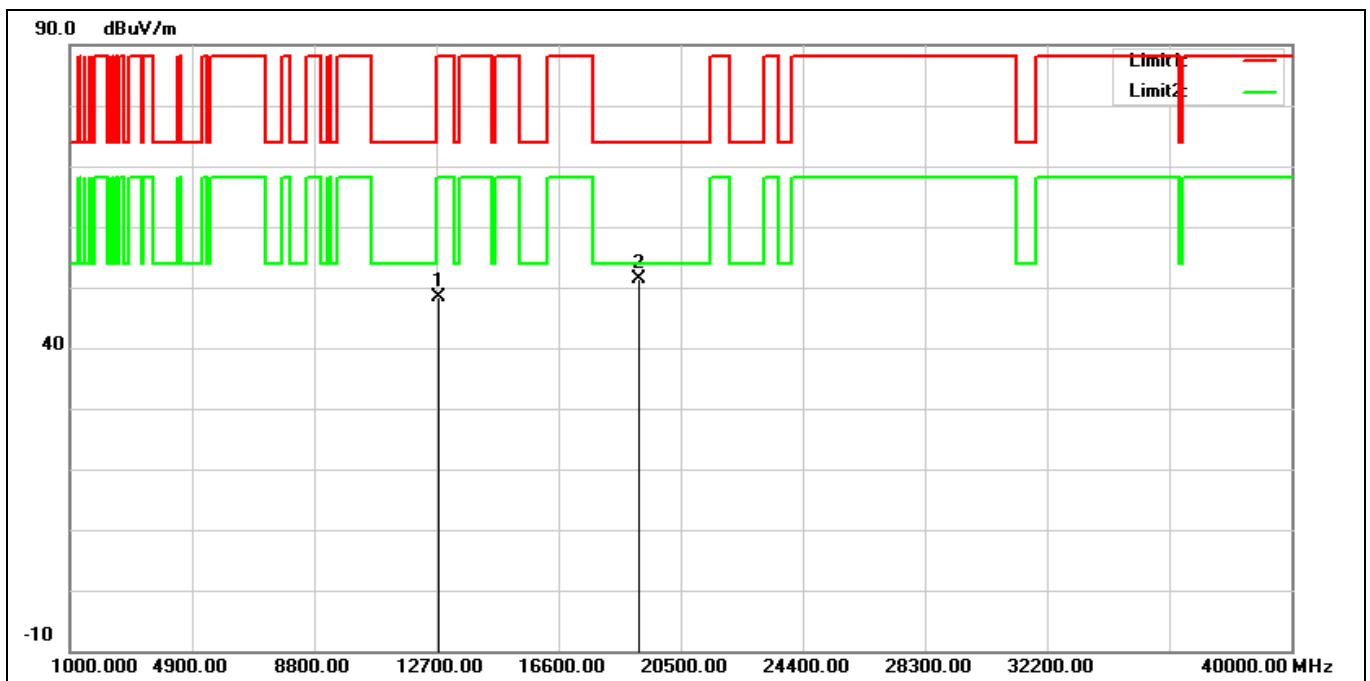


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12770.000	32.77	15.70	48.47	88.20	-39.73	peak
2*	19155.000	31.57	19.92	51.49	74.00	-22.51	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6465 MHz		
Remark:			

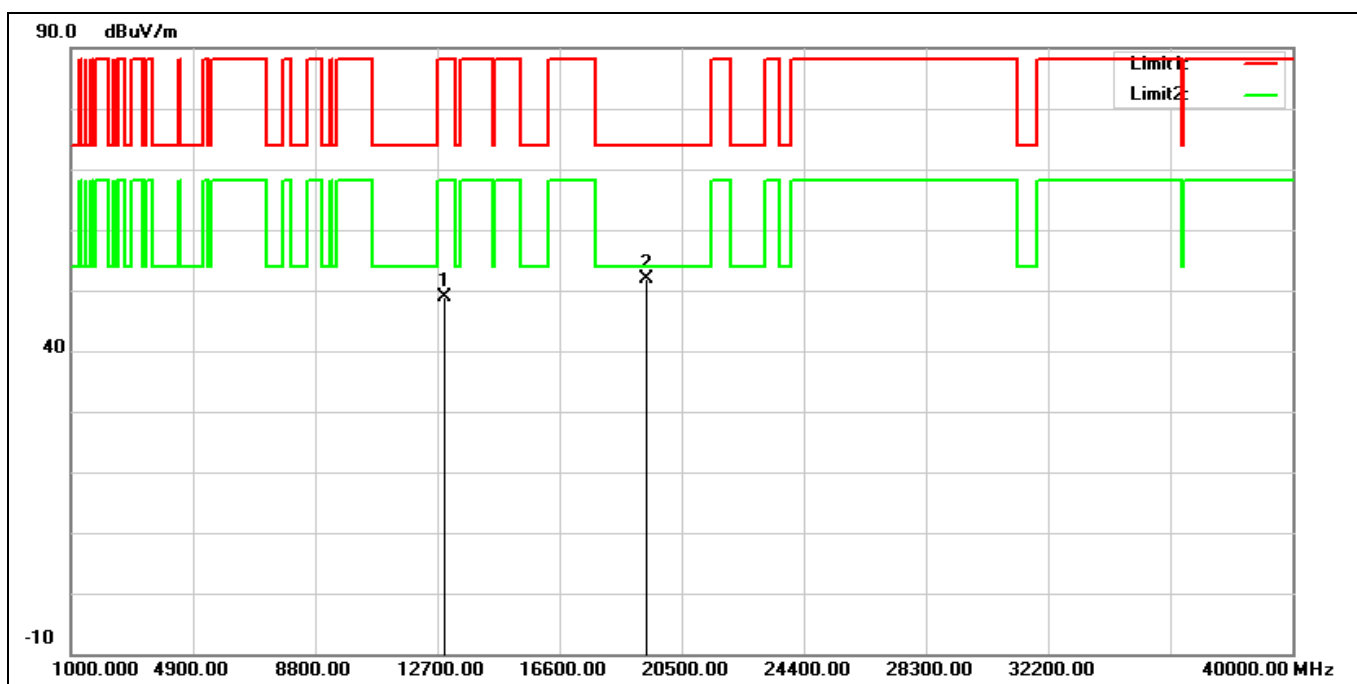


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12930.000	32.52	16.24	48.76	88.20	-39.44	peak
2*	19395.000	31.38	20.49	51.87	74.00	-22.13	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6465 MHz		
Remark:			

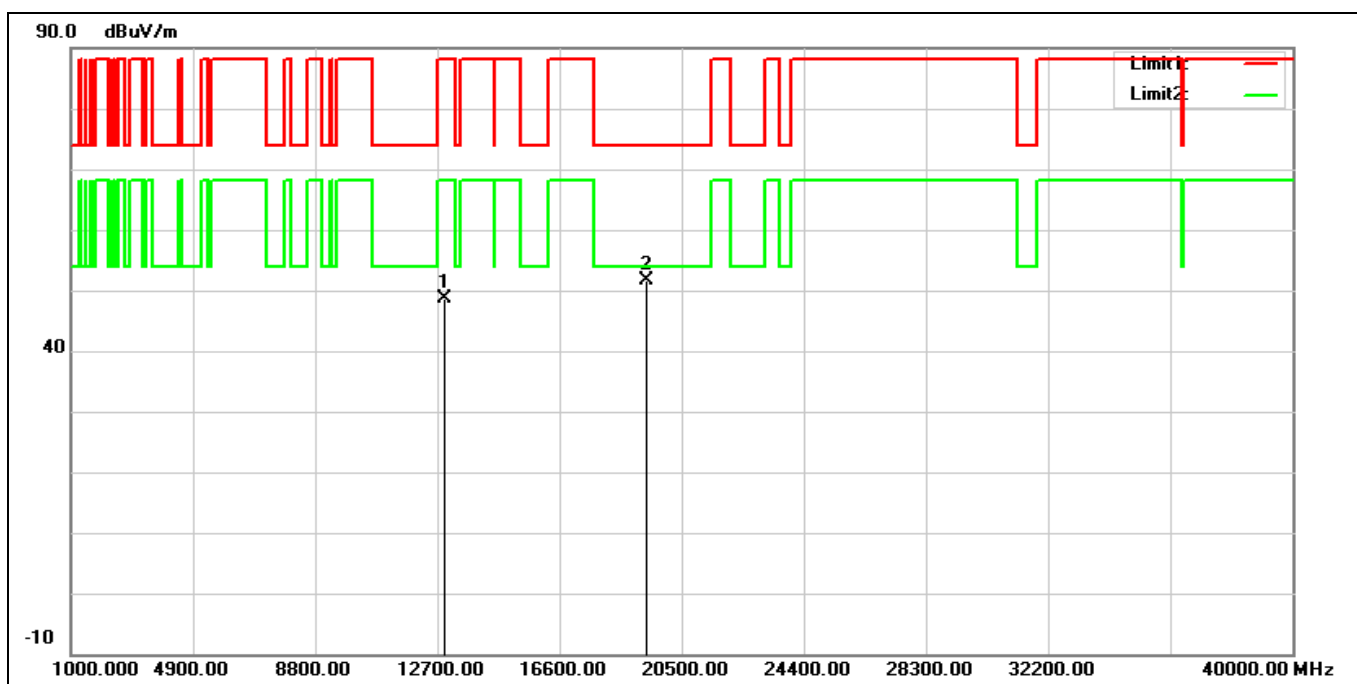


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12930.000	32.46	16.24	48.70	88.20	-39.50	peak
2*	19395.000	31.20	20.49	51.69	74.00	-22.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6545 MHz		
Remark:			

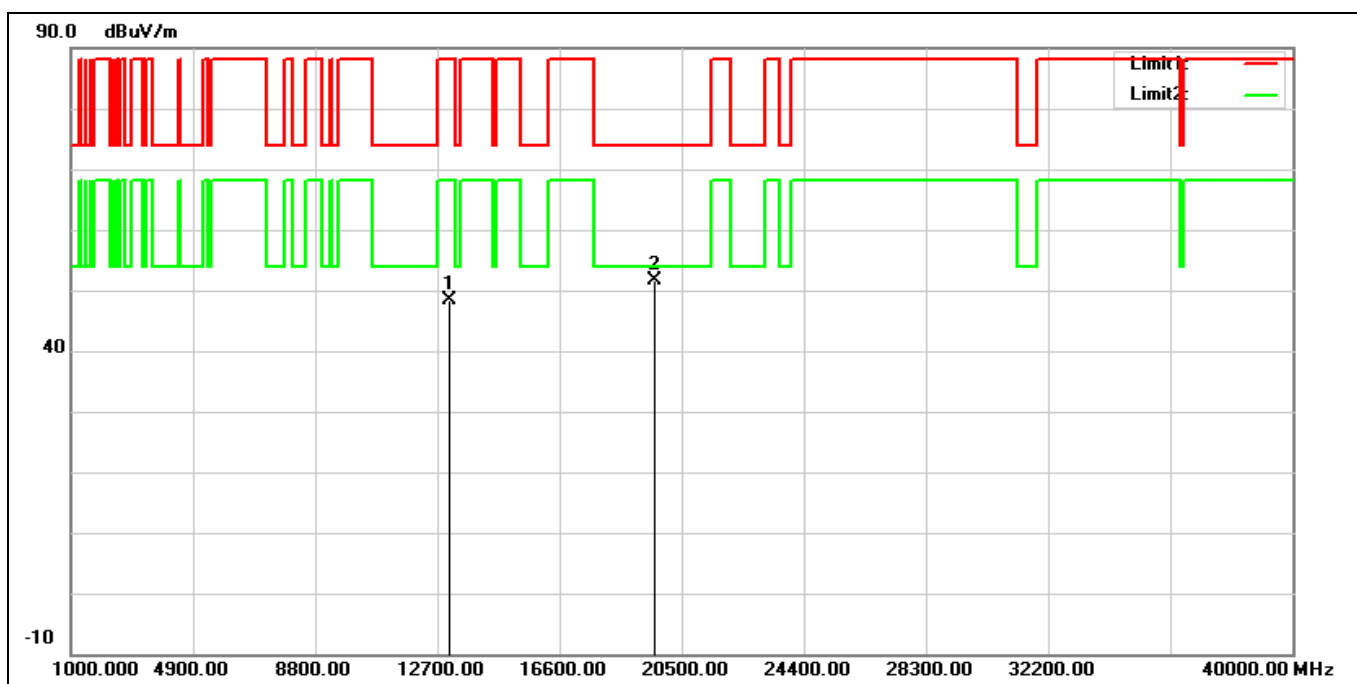


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13090.000	32.68	15.78	48.46	88.20	-39.74	peak
2*	19635.000	30.70	20.85	51.55	74.00	-22.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6545 MHz		
Remark:			

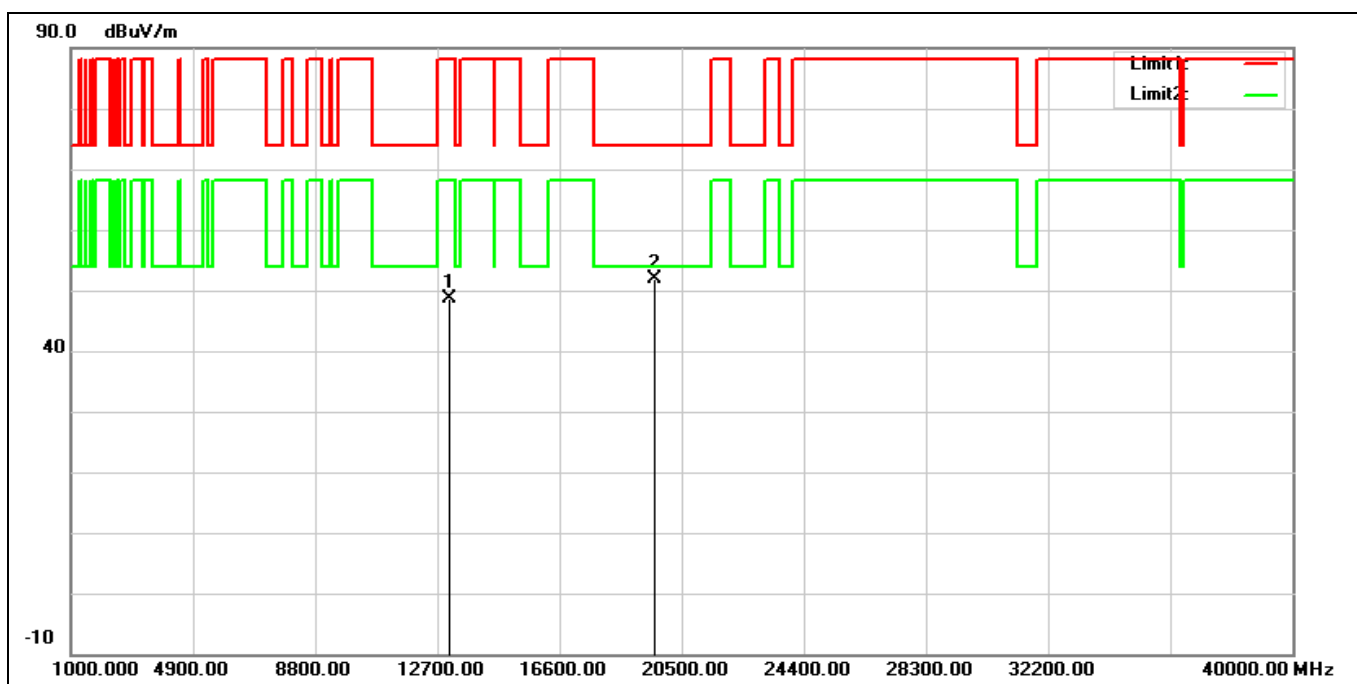


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13090.000	32.88	15.78	48.66	88.20	-39.54	peak
2*	19635.000	30.98	20.85	51.83	74.00	-22.17	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT80 6625 MHz
Remark:

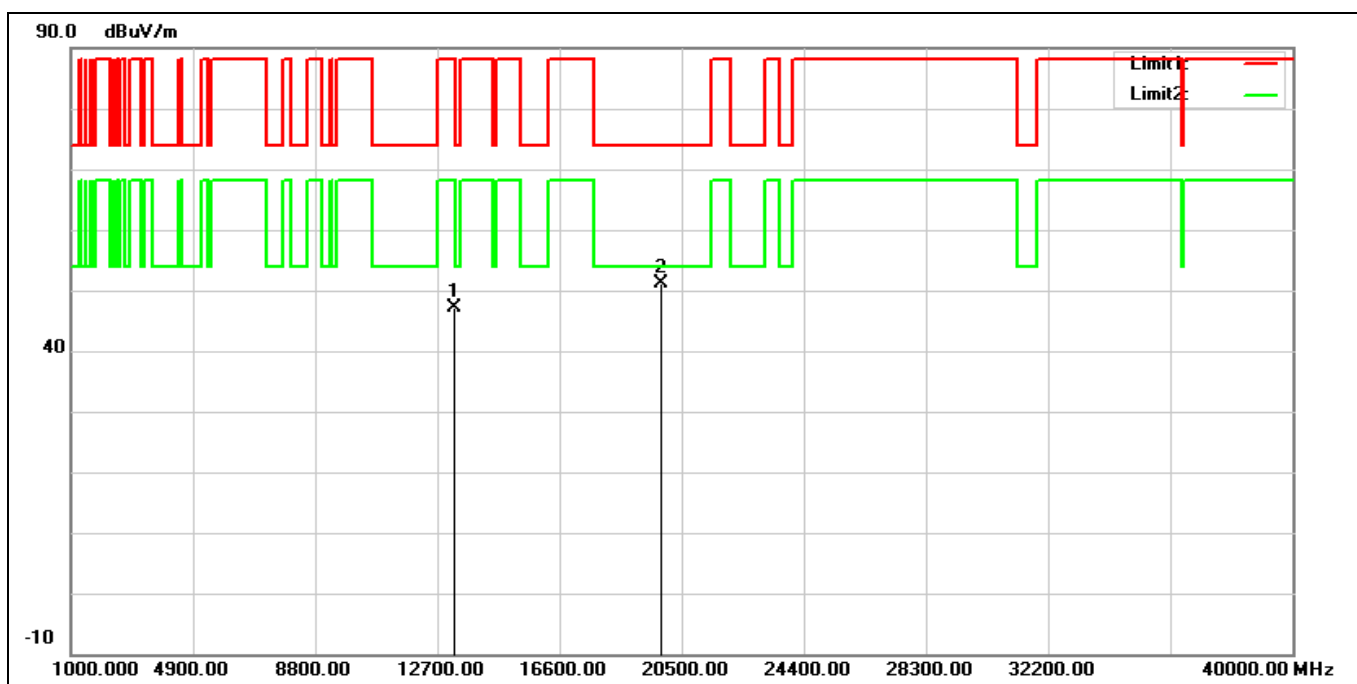


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13250.000	32.07	15.01	47.08	74.00	-26.92	peak
2*	19875.000	30.06	21.05	51.11	74.00	-22.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6625 MHz		
Remark:			

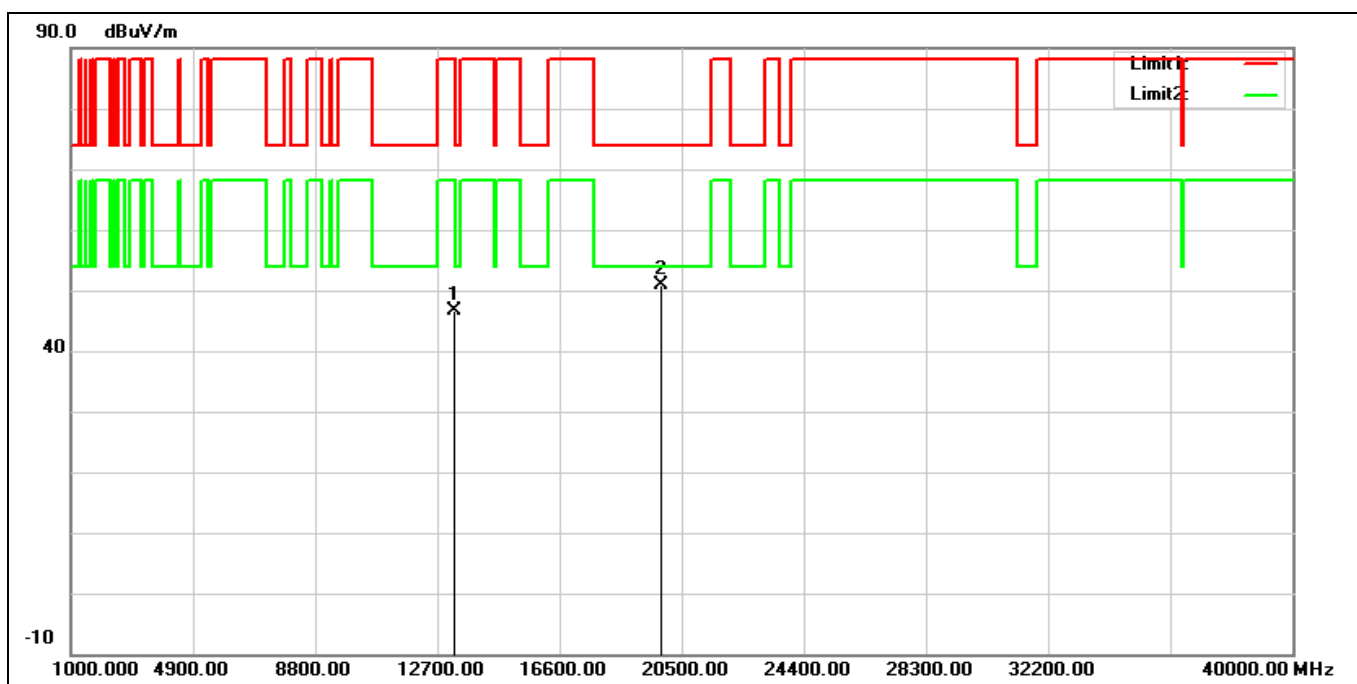


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13250.000	31.51	15.01	46.52	74.00	-27.48	peak
2*	19875.000	29.83	21.05	50.88	74.00	-23.12	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6705 MHz		
Remark:			

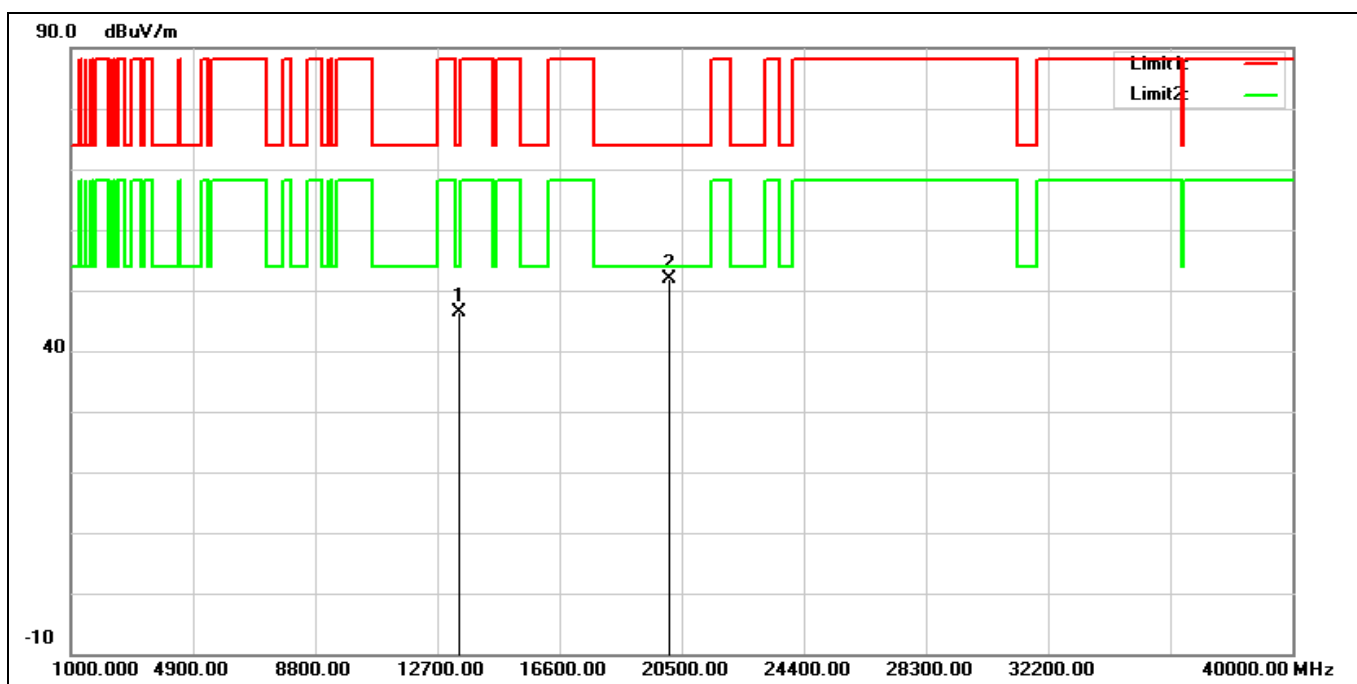


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13410.000	31.83	14.61	46.44	88.20	-41.76	peak
2*	20115.000	30.97	20.84	51.81	74.00	-22.19	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6705 MHz		
Remark:			

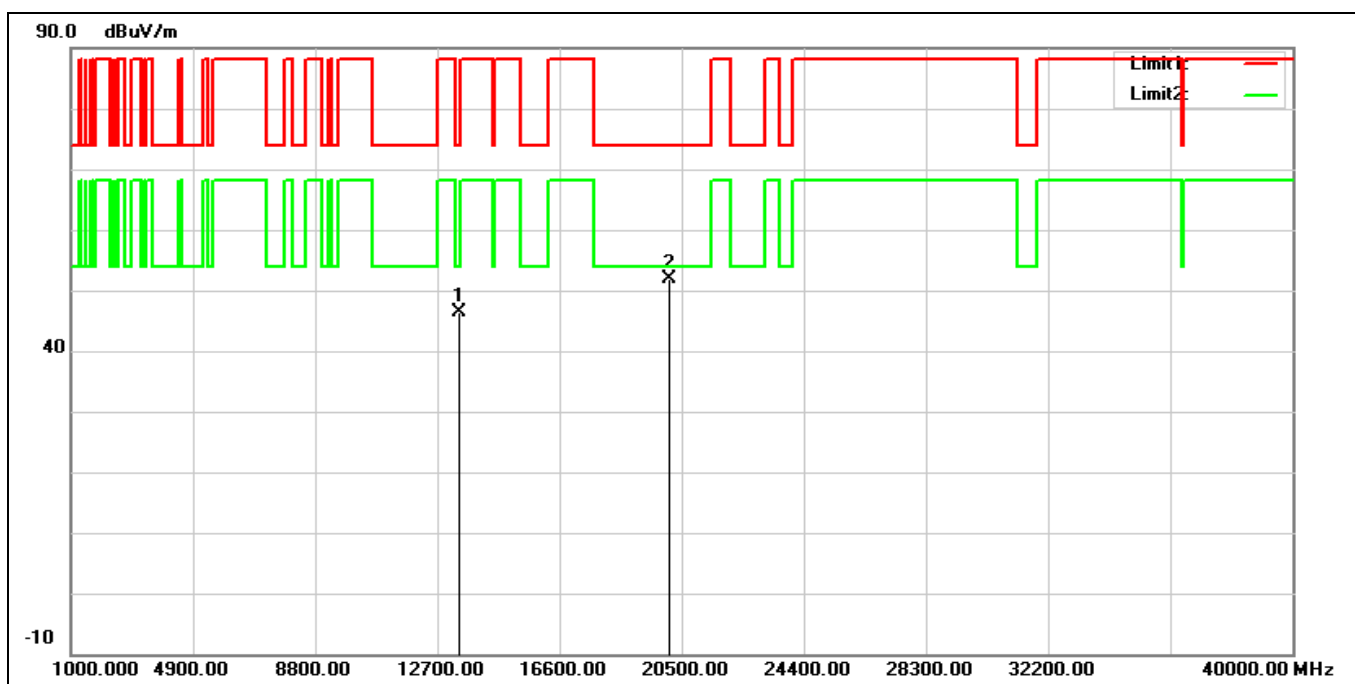


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13410.000	31.74	14.61	46.35	88.20	-41.85	peak
2*	20115.000	30.92	20.84	51.76	74.00	-22.24	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT80 6785 MHz
Remark:

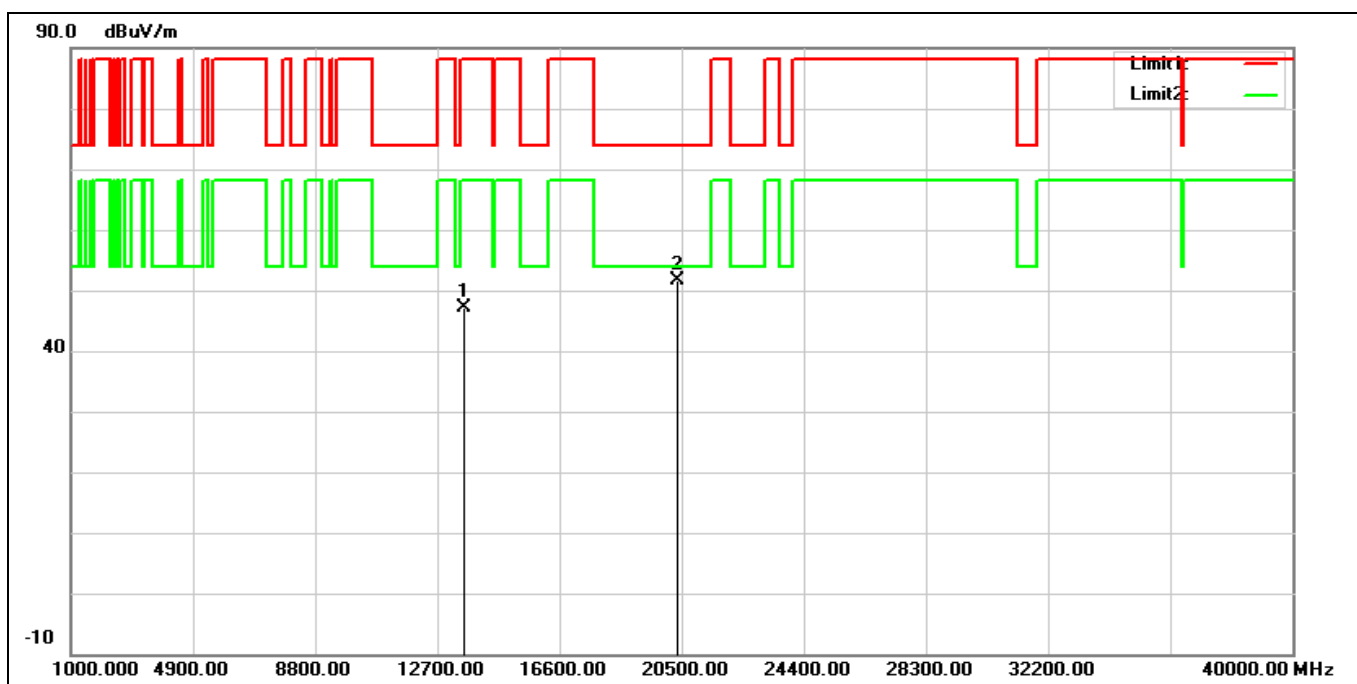


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13570.000	32.19	14.95	47.14	88.20	-41.06	peak
2*	20355.000	31.43	20.19	51.62	74.00	-22.38	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6785 MHz		
Remark:			

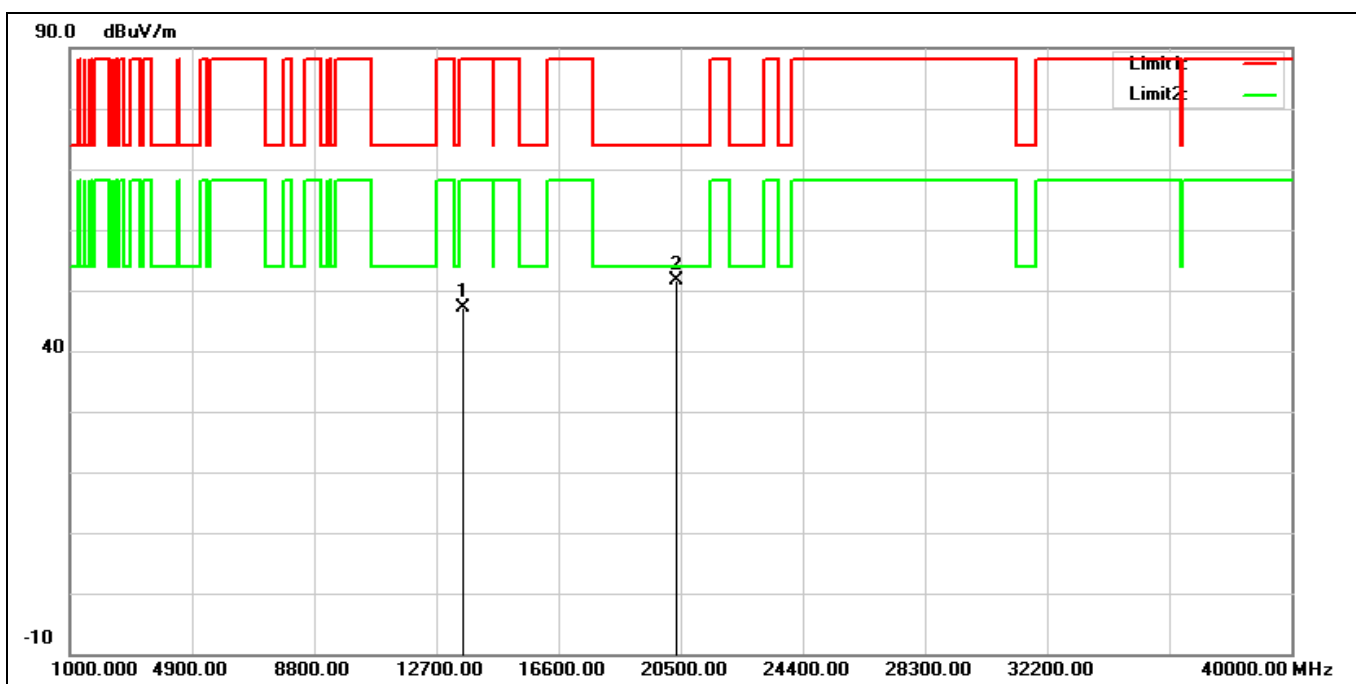


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13570.000	32.15	14.95	47.10	88.20	-41.10	peak
2*	20355.000	31.43	20.19	51.62	74.00	-22.38	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6865 MHz		
Remark:			

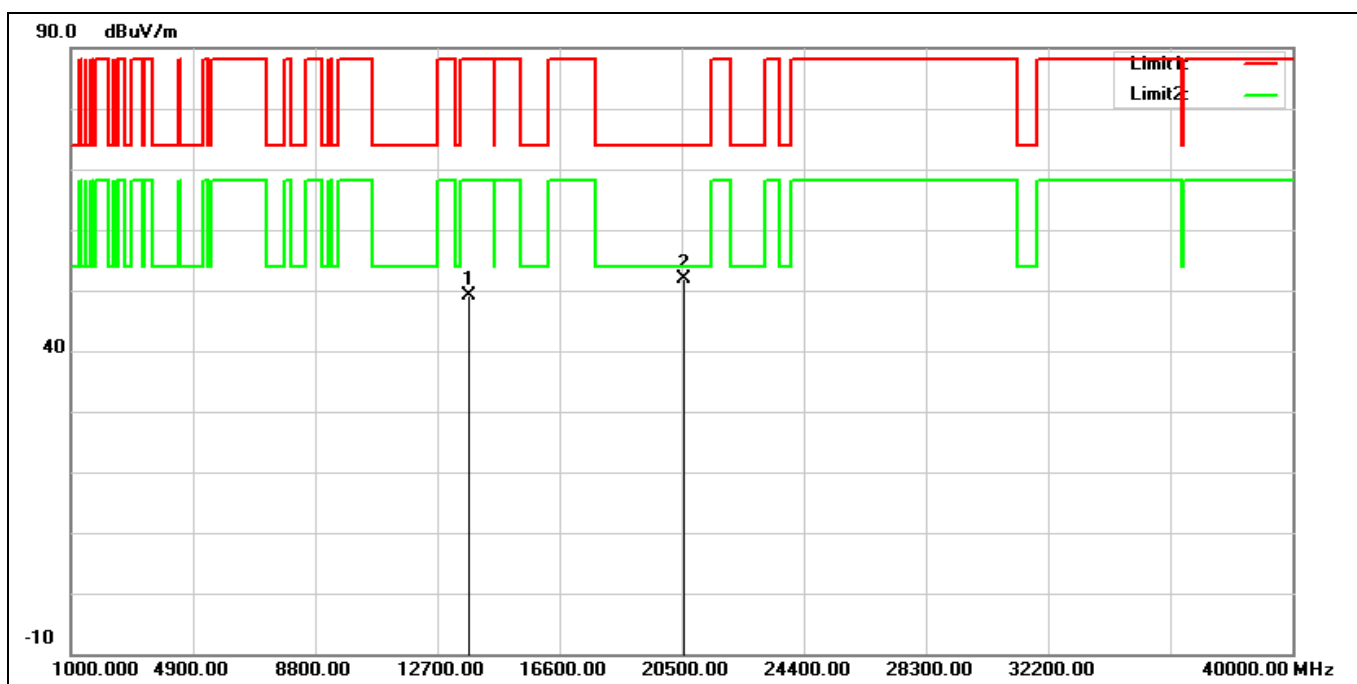


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13730.000	33.20	16.05	49.25	88.20	-38.95	peak
2*	20595.000	31.73	20.03	51.76	74.00	-22.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6865 MHz		
Remark:			

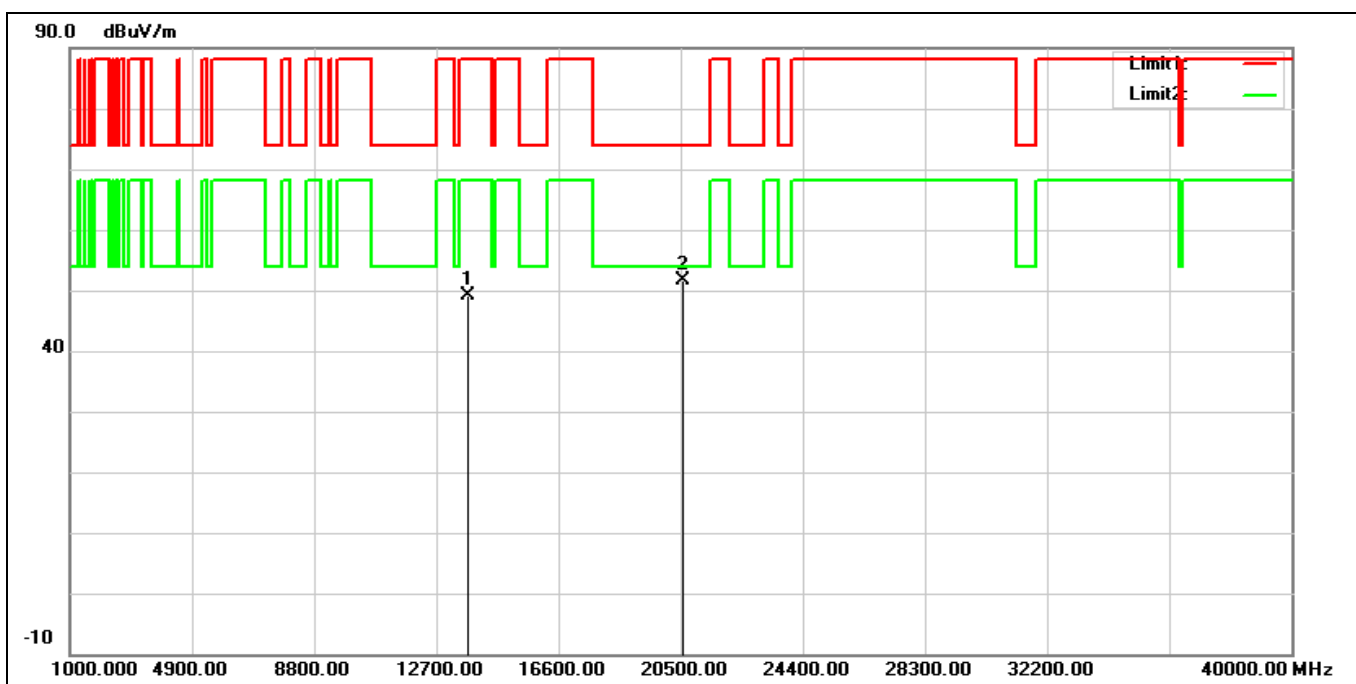


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13730.000	33.01	16.05	49.06	88.20	-39.14	peak
2*	20595.000	31.66	20.03	51.69	74.00	-22.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6945 MHz		
Remark:			

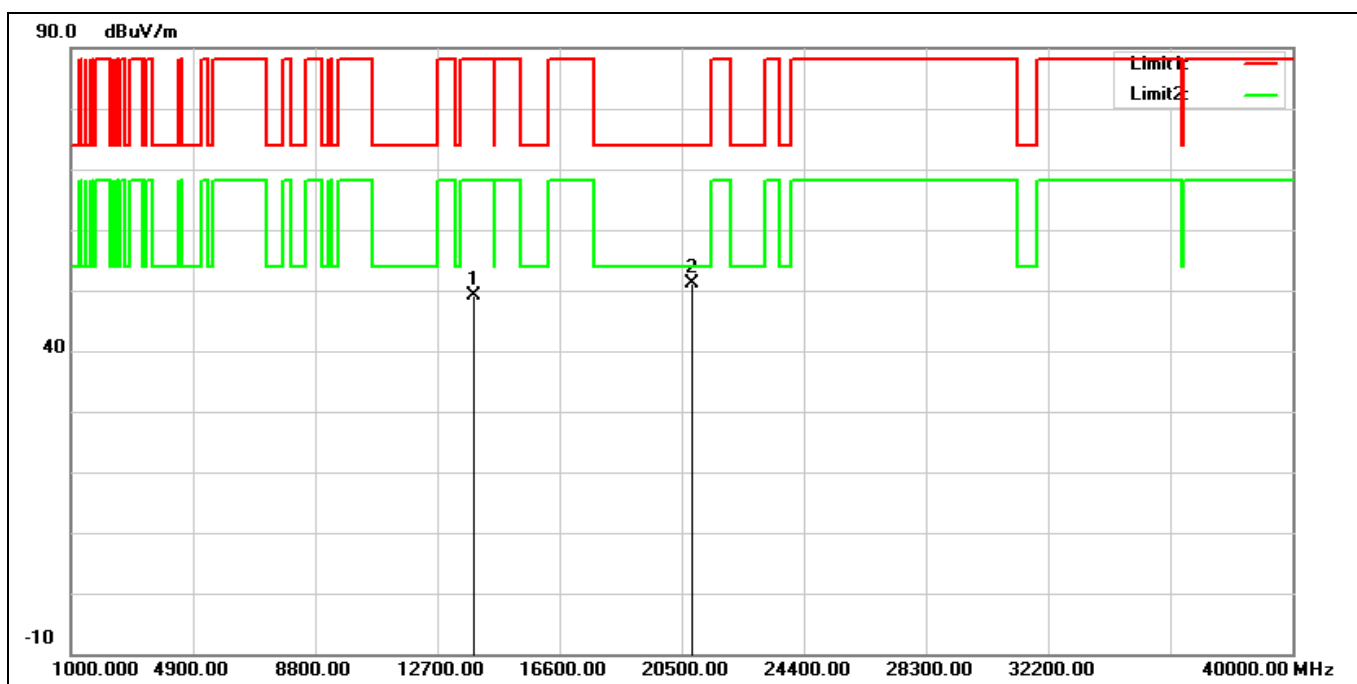


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13890.000	31.81	17.33	49.14	88.20	-39.06	peak
2*	20835.000	30.47	20.60	51.07	74.00	-22.93	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6945 MHz		
Remark:			

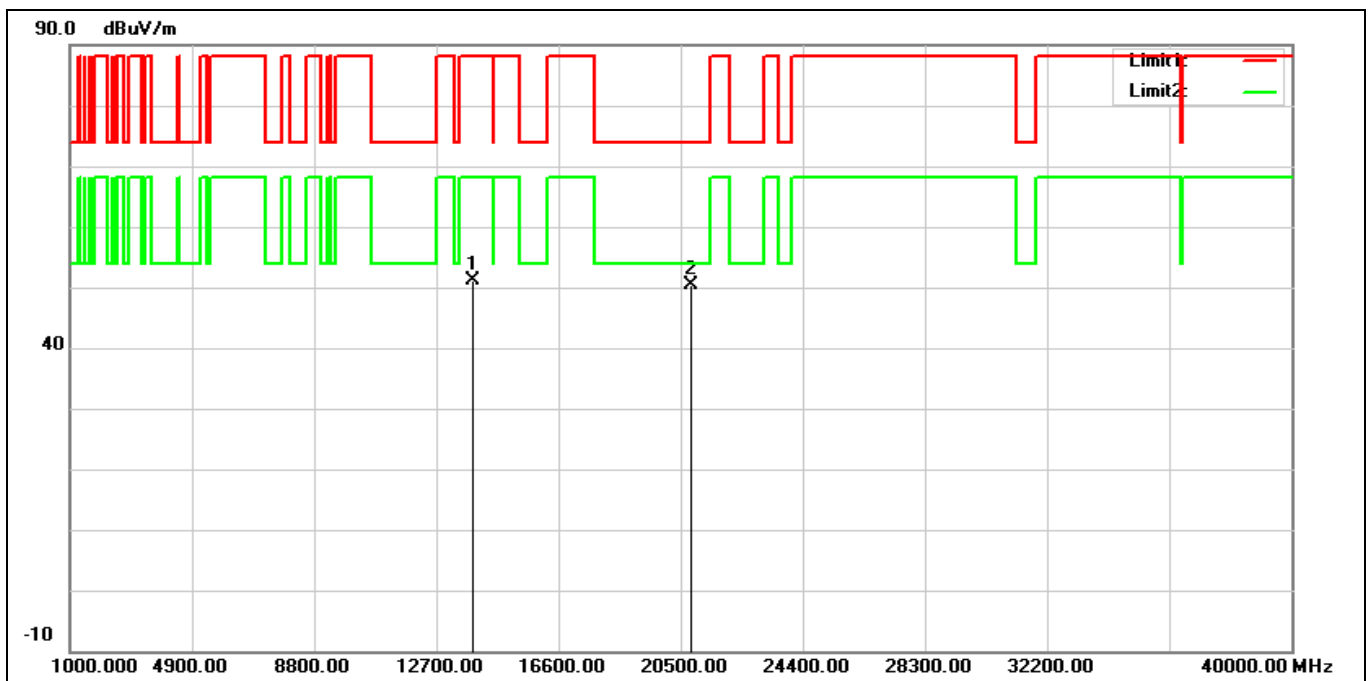


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13890.000	33.89	17.33	51.22	88.20	-36.98	peak
2*	20835.000	29.89	20.60	50.49	74.00	-23.51	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

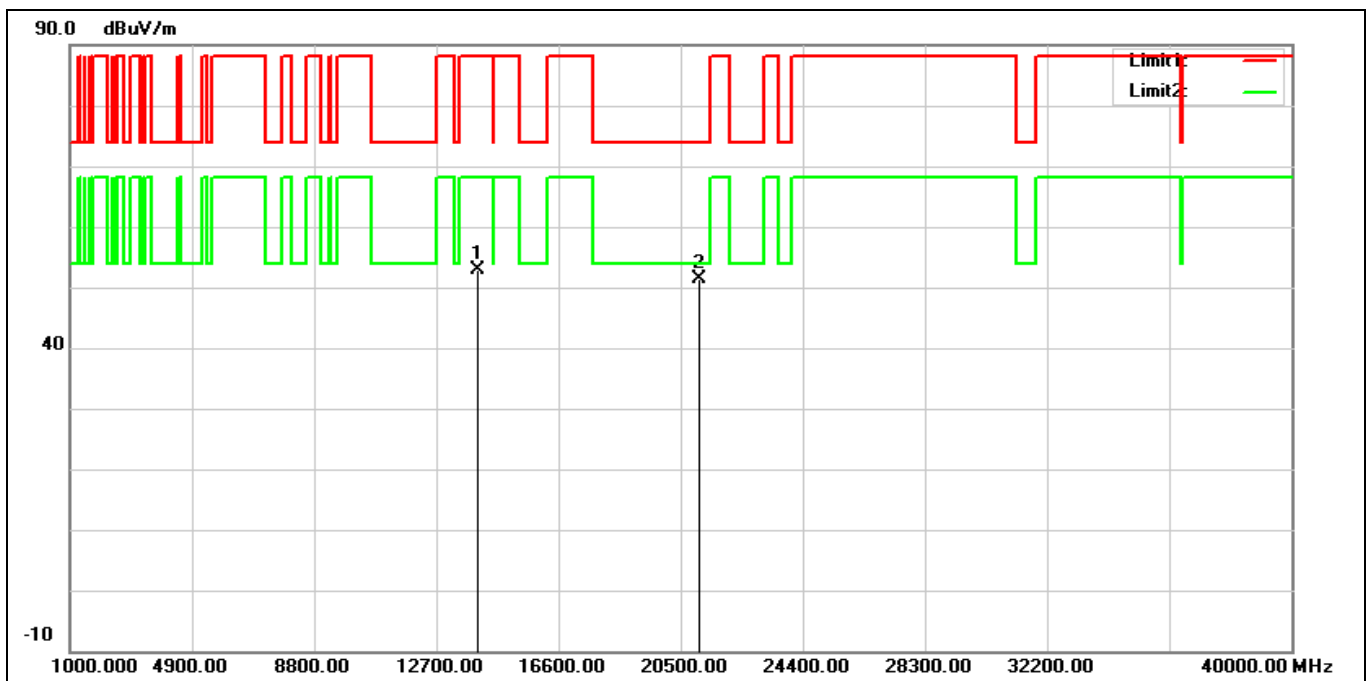


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14050.000	34.47	18.36	52.83	88.20	-35.37	peak
2*	21075.000	30.66	20.82	51.48	74.00	-22.52	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

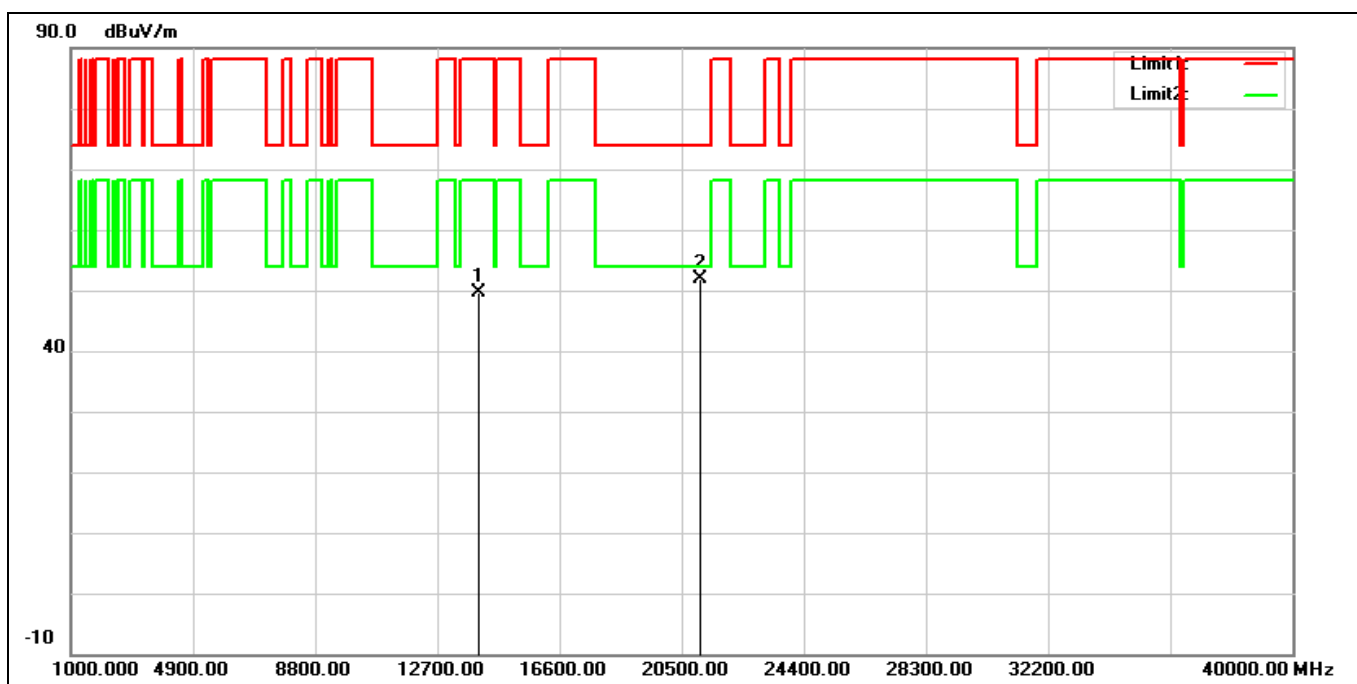


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14050.000	31.30	18.36	49.66	88.20	-38.54	peak
2*	21075.000	31.07	20.82	51.89	74.00	-22.11	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

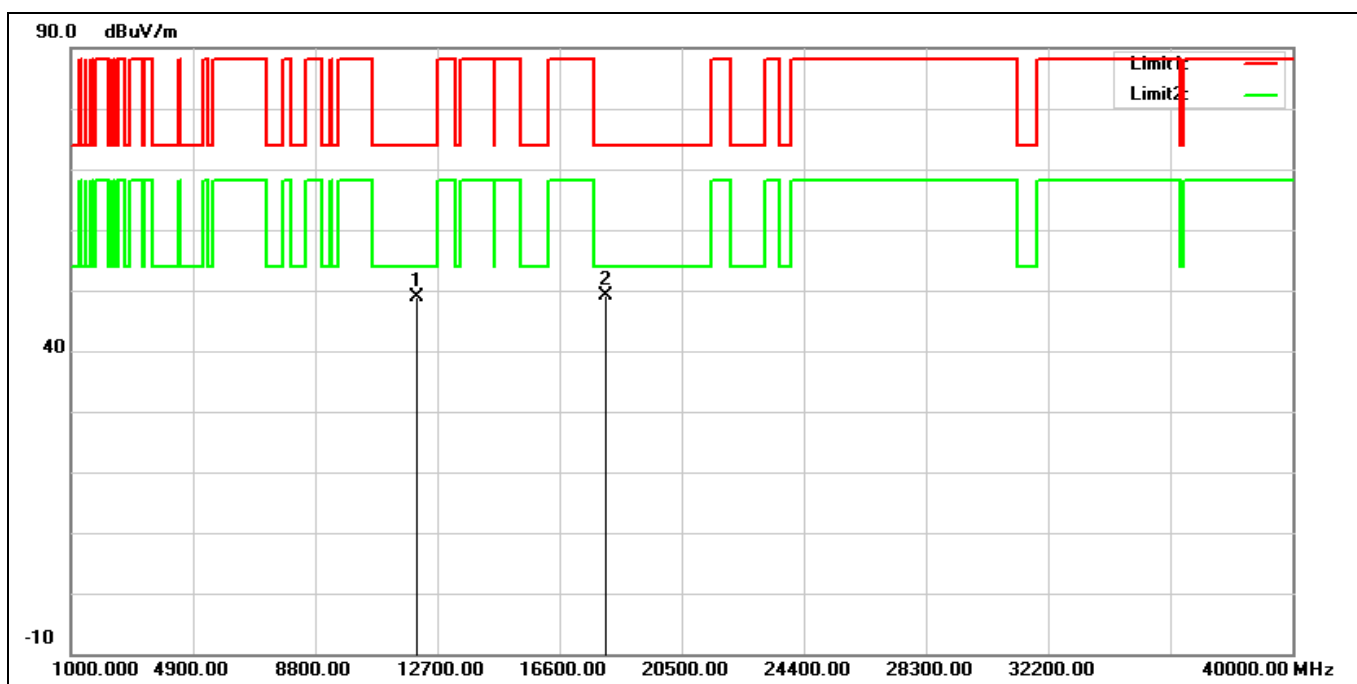


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12050.000	34.72	14.23	48.95	74.00	-25.05	peak
2*	18075.000	30.76	18.29	49.05	74.00	-24.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

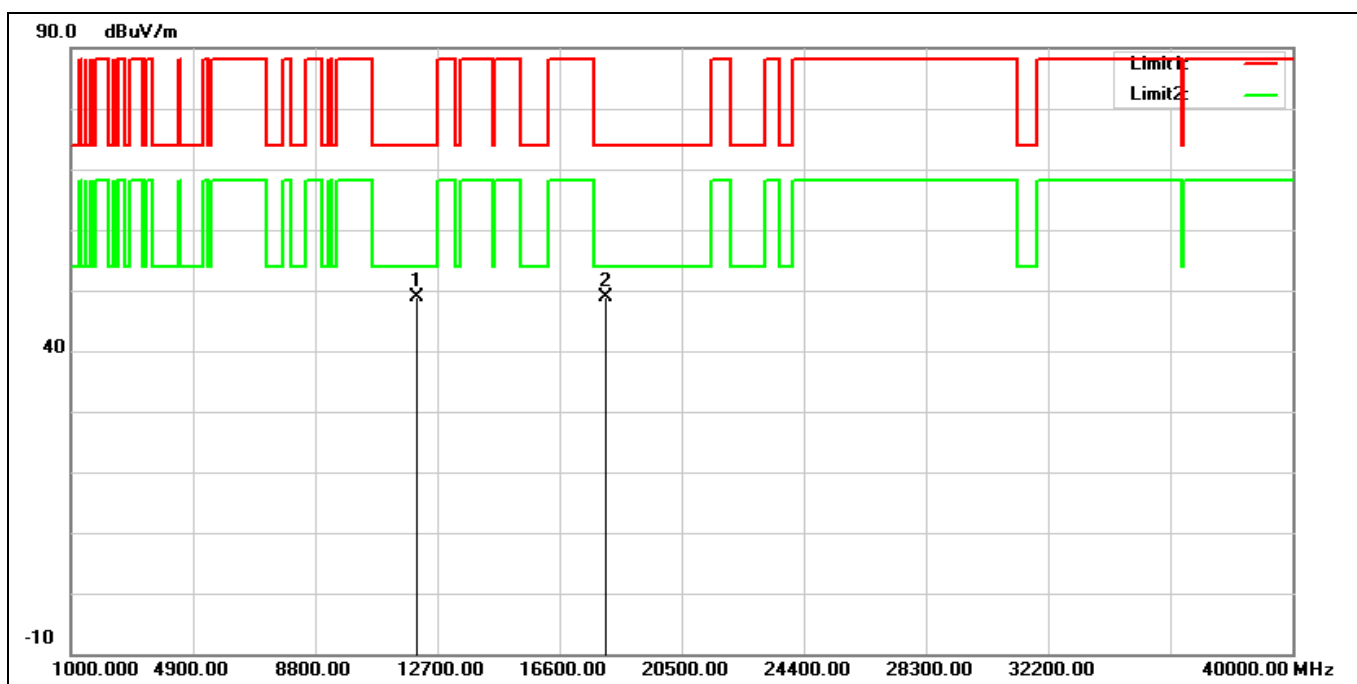


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12050.000	34.56	14.23	48.79	74.00	-25.21	peak
2*	18075.000	30.59	18.29	48.88	74.00	-25.12	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT160 6185 MHz
Remark:

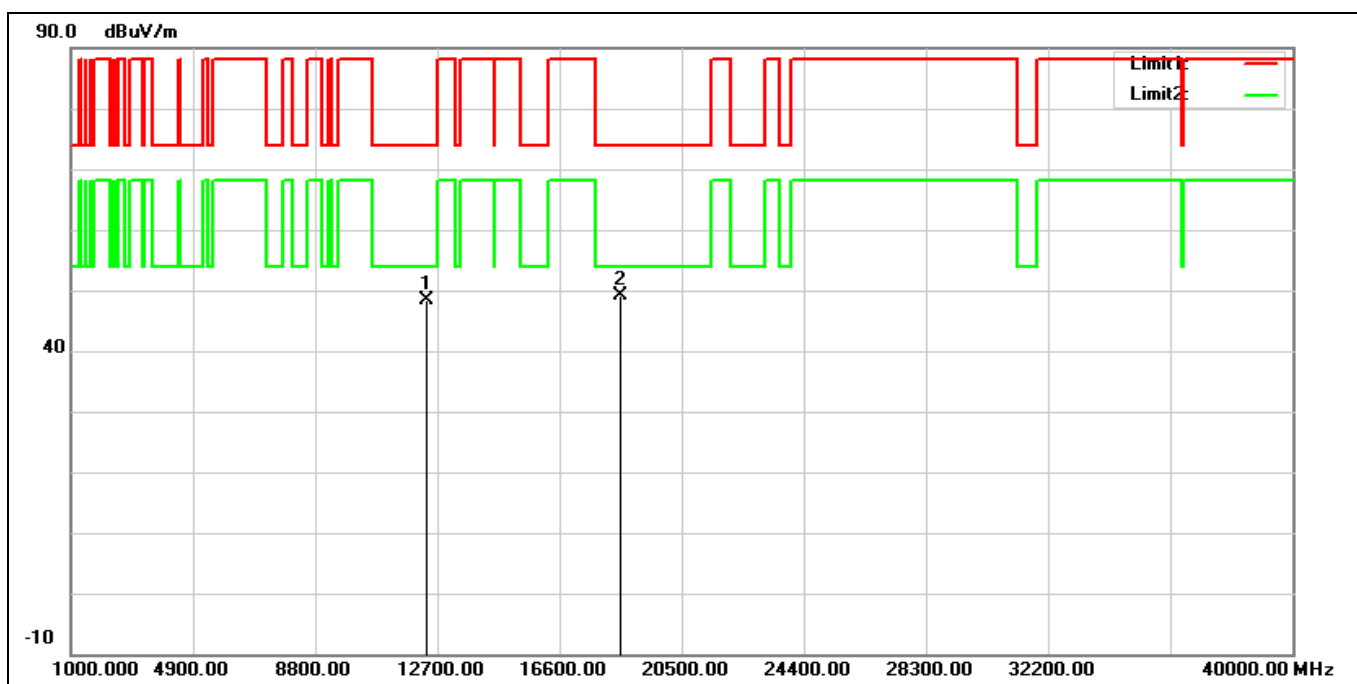


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12370.000	34.06	14.28	48.34	74.00	-25.66	peak
2*	18555.000	30.38	18.71	49.09	74.00	-24.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6185 MHz		
Remark:			

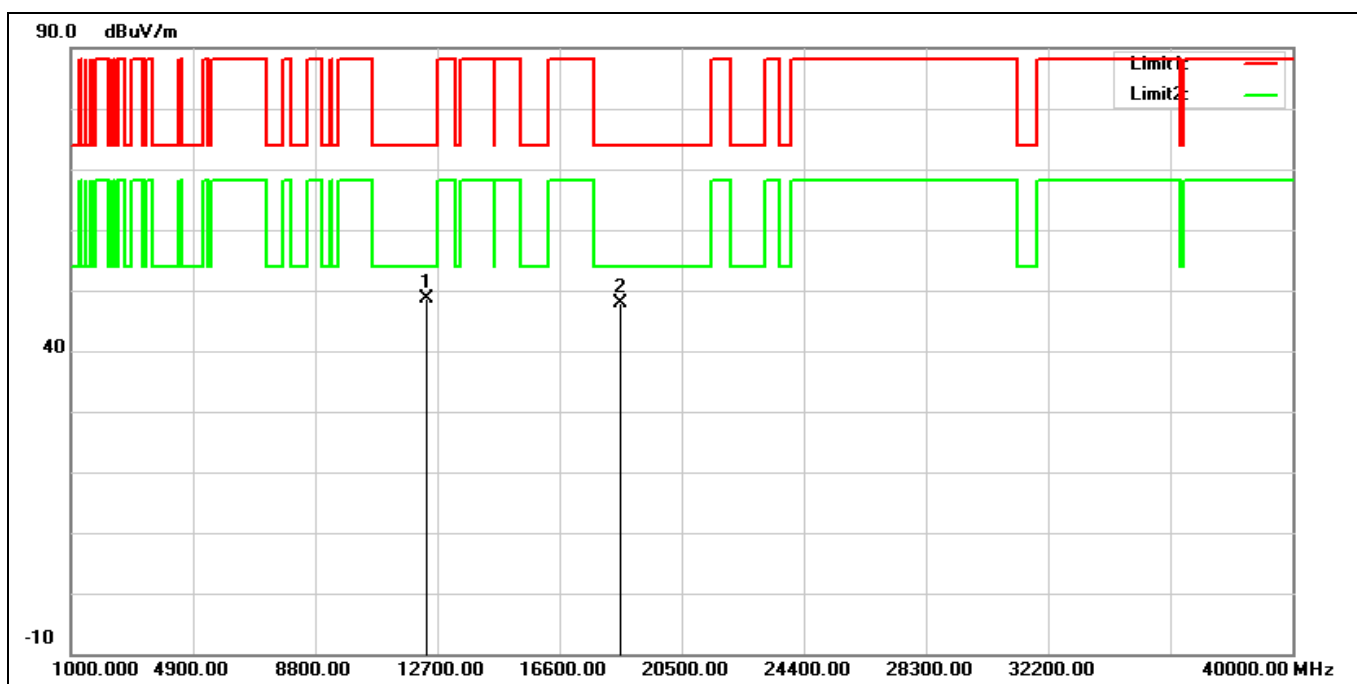


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12370.000	34.40	14.28	48.68	74.00	-25.32	peak
2	18555.000	29.12	18.71	47.83	74.00	-26.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6345 MHz		
Remark:			

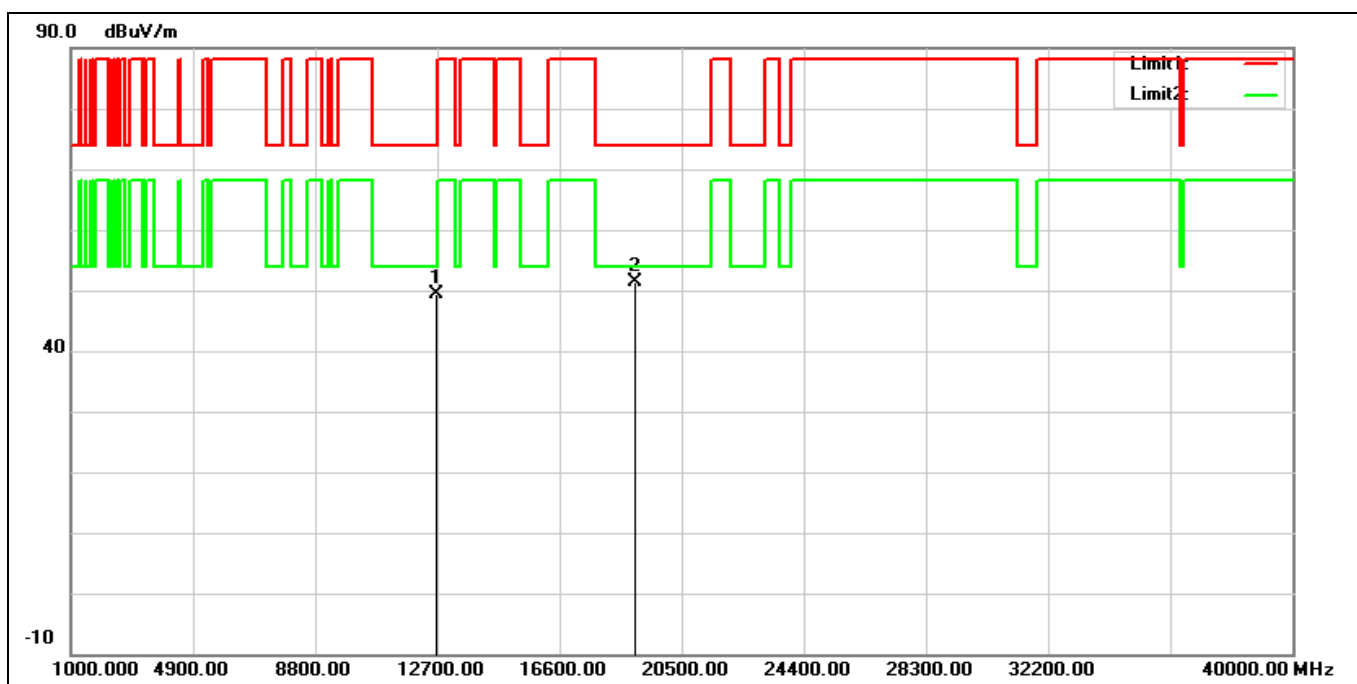


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12690.000	34.08	15.19	49.27	74.00	-24.73	peak
2*	19035.000	31.79	19.65	51.44	74.00	-22.56	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6345 MHz		
Remark:			

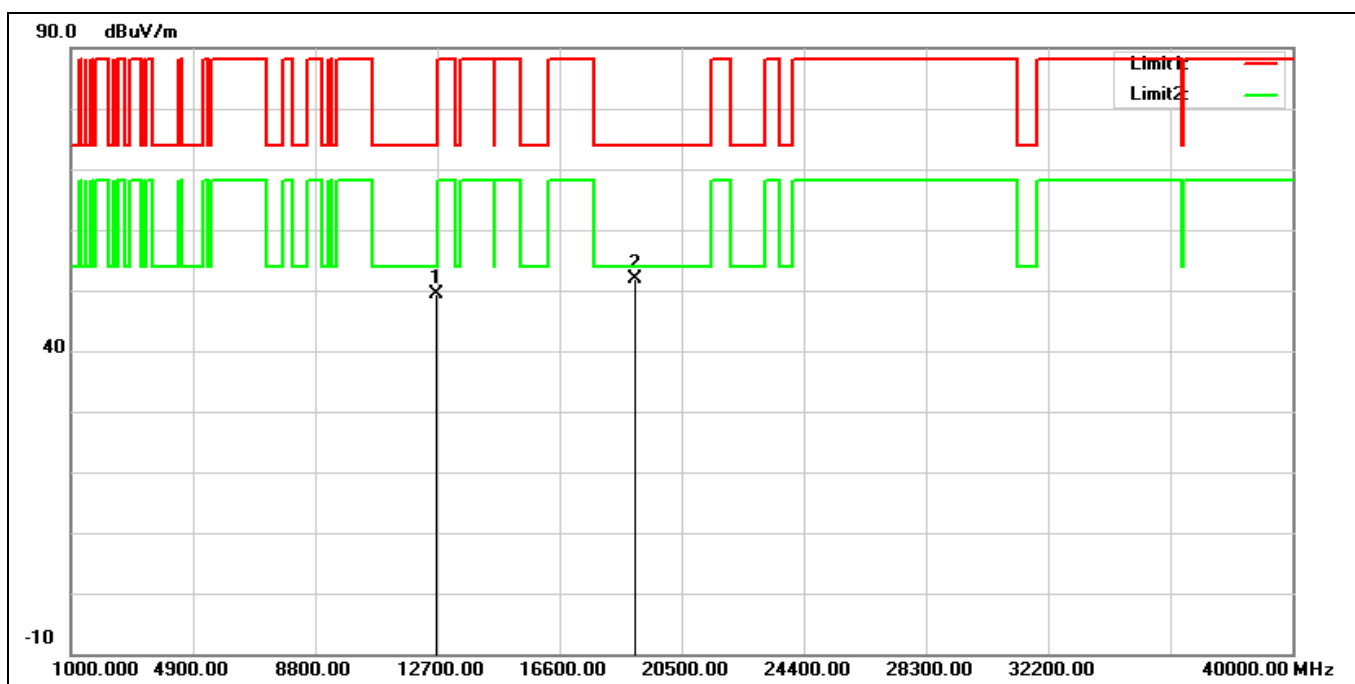


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12690.000	34.23	15.19	49.42	74.00	-24.58	peak
2*	19035.000	32.14	19.65	51.79	74.00	-22.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6505 MHz		
Remark:			

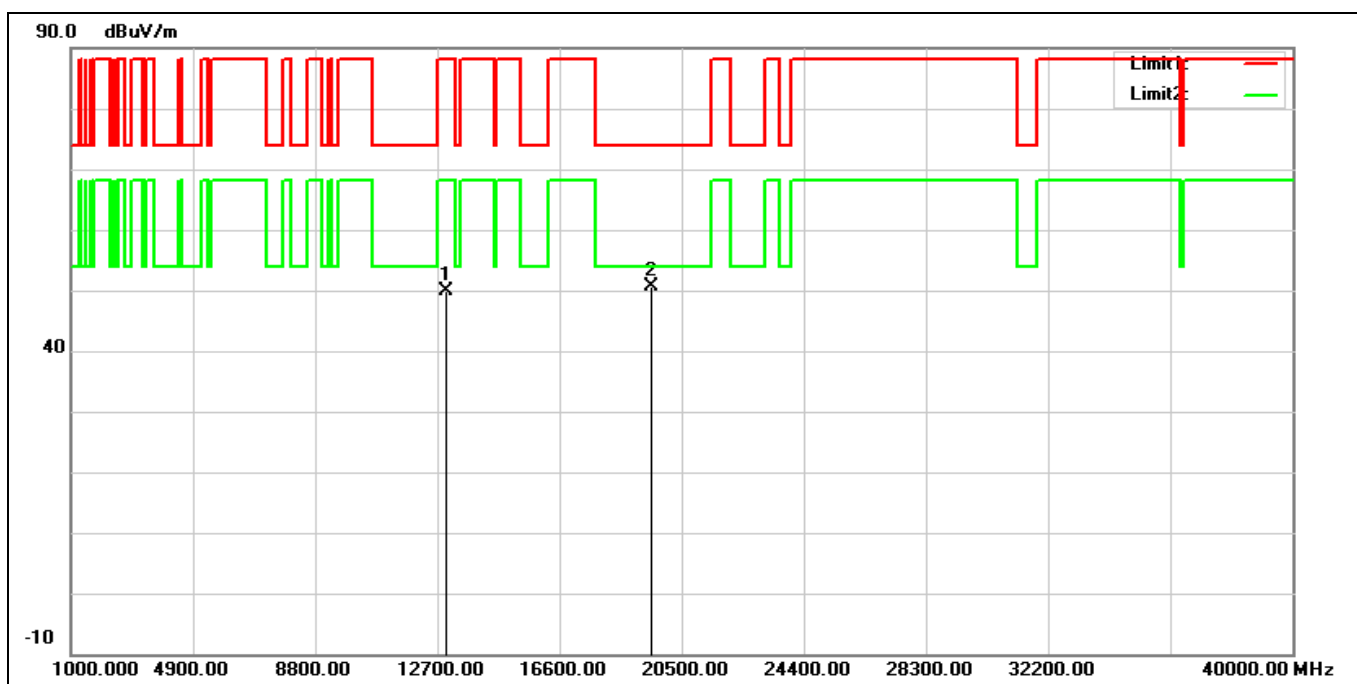


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13010.000	33.47	16.39	49.86	88.20	-38.34	peak
2*	19515.000	29.88	20.76	50.64	74.00	-23.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6505 MHz		
Remark:			

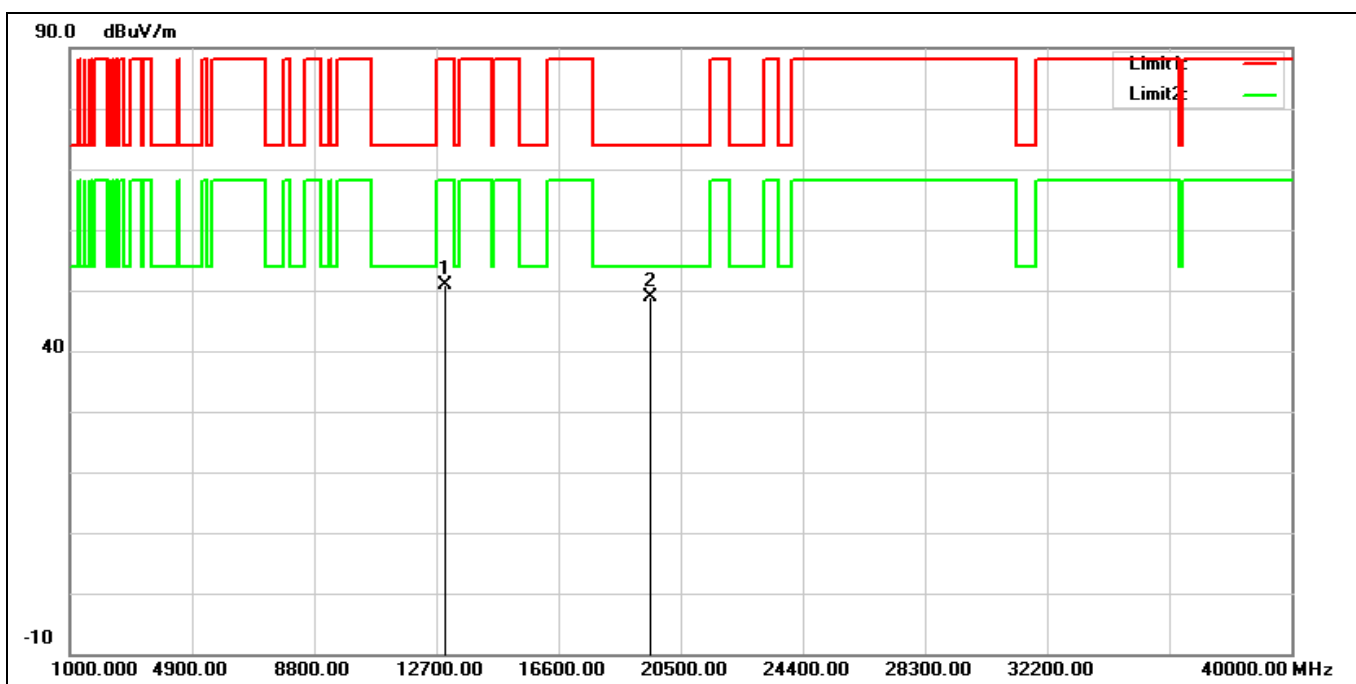


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13010.000	34.43	16.39	50.82	88.20	-37.38	peak
2*	19515.000	28.16	20.76	48.92	74.00	-25.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6665 MHz		
Remark:			

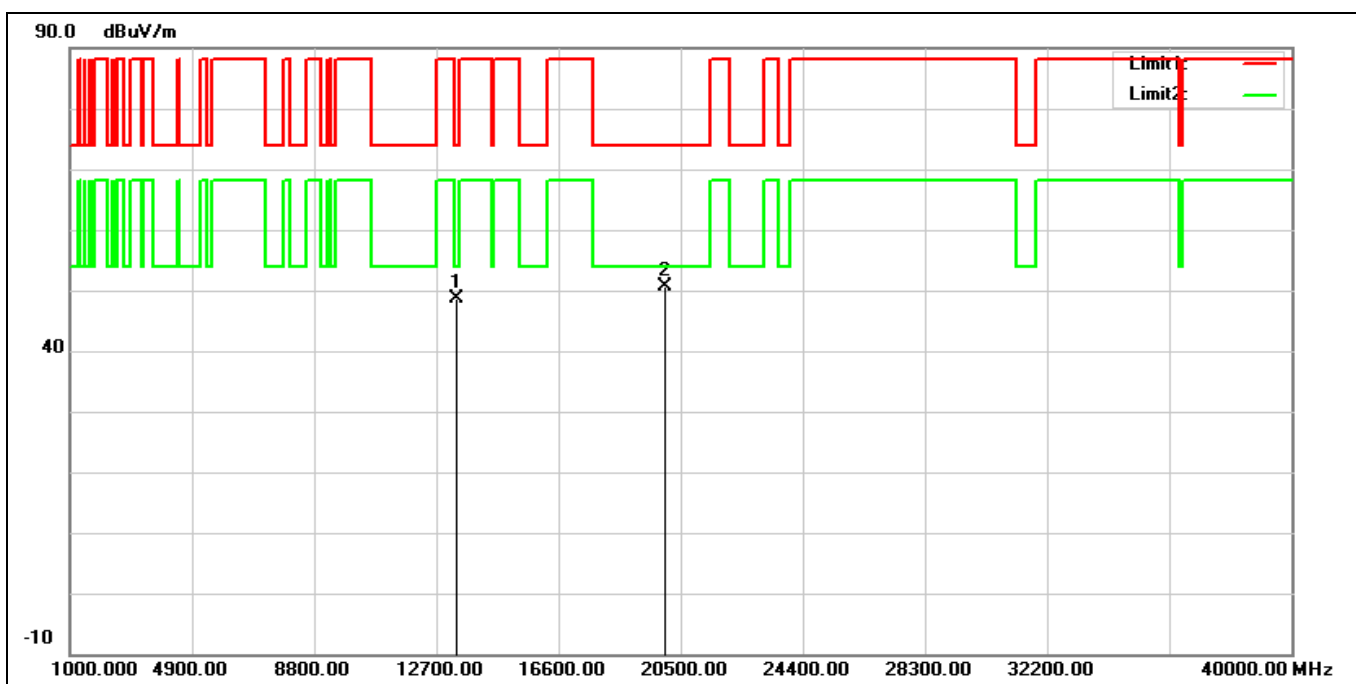


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13330.000	33.80	14.74	48.54	74.00	-25.46	peak
2*	19995.000	29.35	21.16	50.51	74.00	-23.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6665 MHz		
Remark:			

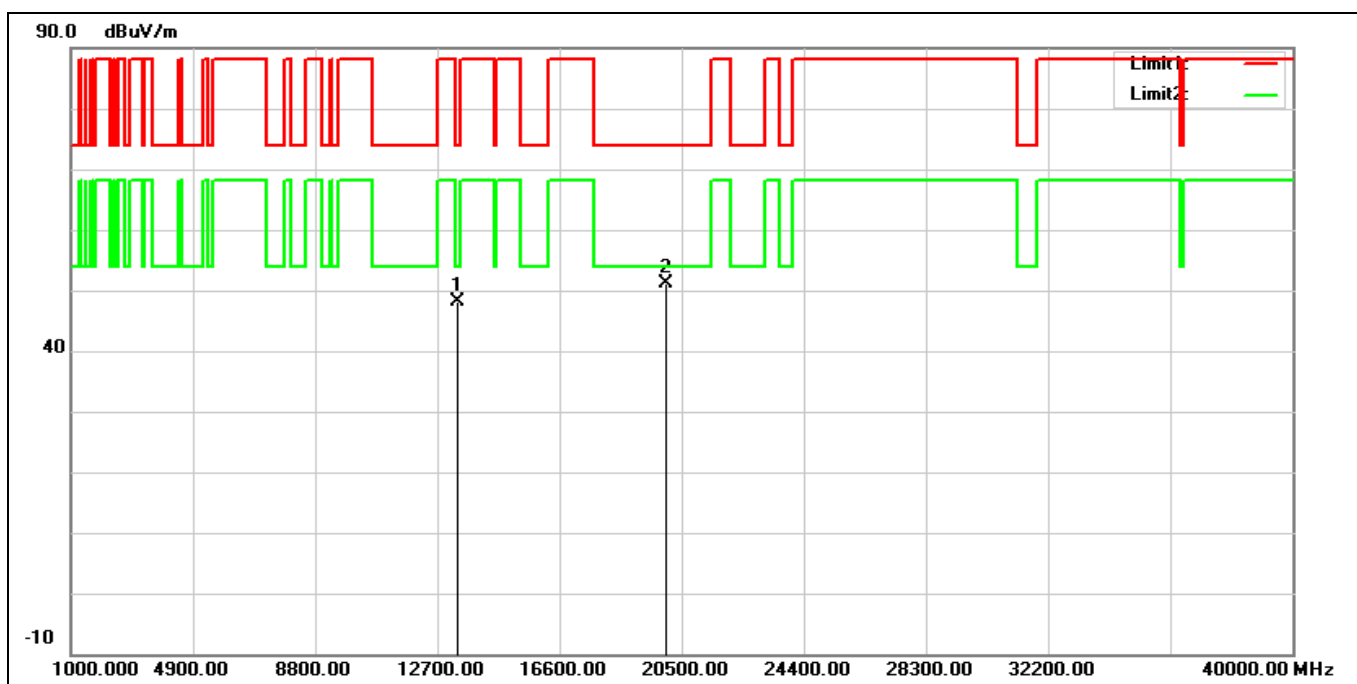


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13330.000	33.40	14.74	48.14	74.00	-25.86	peak
2*	19995.000	30.01	21.16	51.17	74.00	-22.83	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6825 MHz		
Remark:			

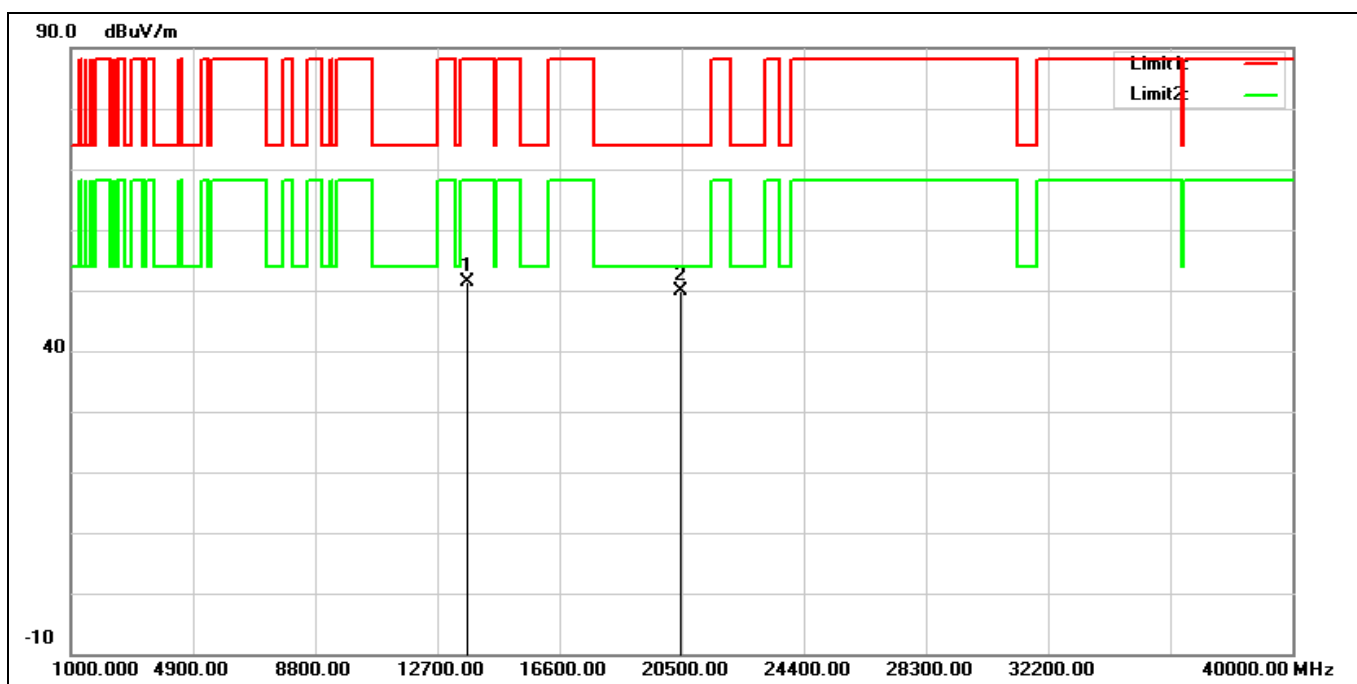


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13650.000	35.94	15.56	51.50	88.20	-36.70	peak
2*	20475.000	29.96	19.87	49.83	74.00	-24.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6825 MHz		
Remark:			

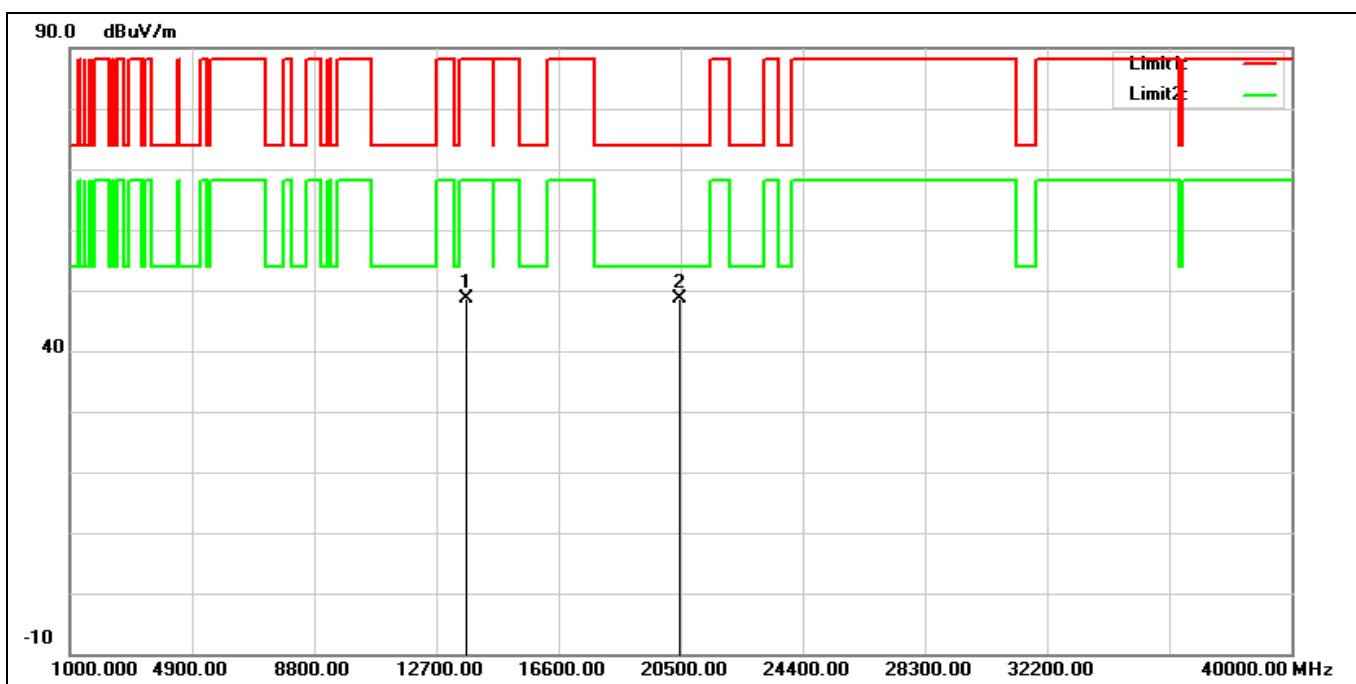


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13650.000	33.15	15.56	48.71	88.20	-39.49	peak
2*	20475.000	28.67	19.87	48.54	74.00	-25.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

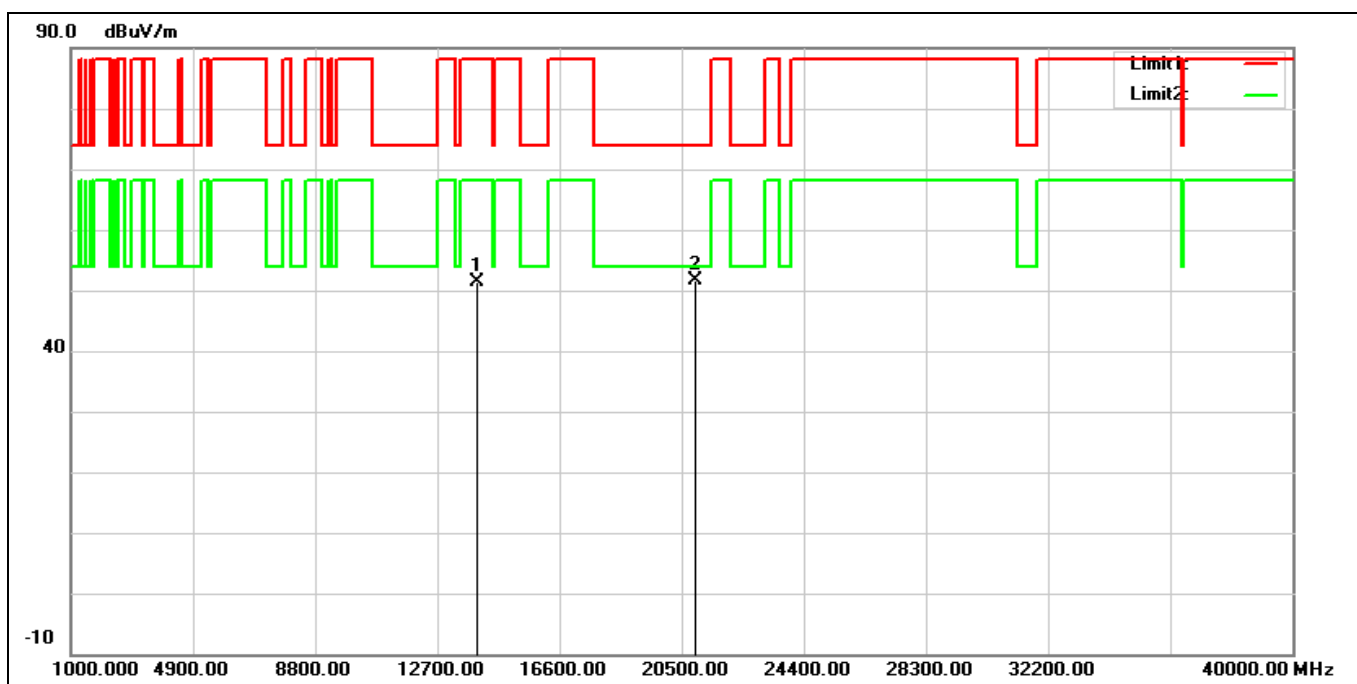


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13970.000	33.47	17.87	51.34	88.20	-36.86	peak
2*	20955.000	30.76	20.87	51.63	74.00	-22.37	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

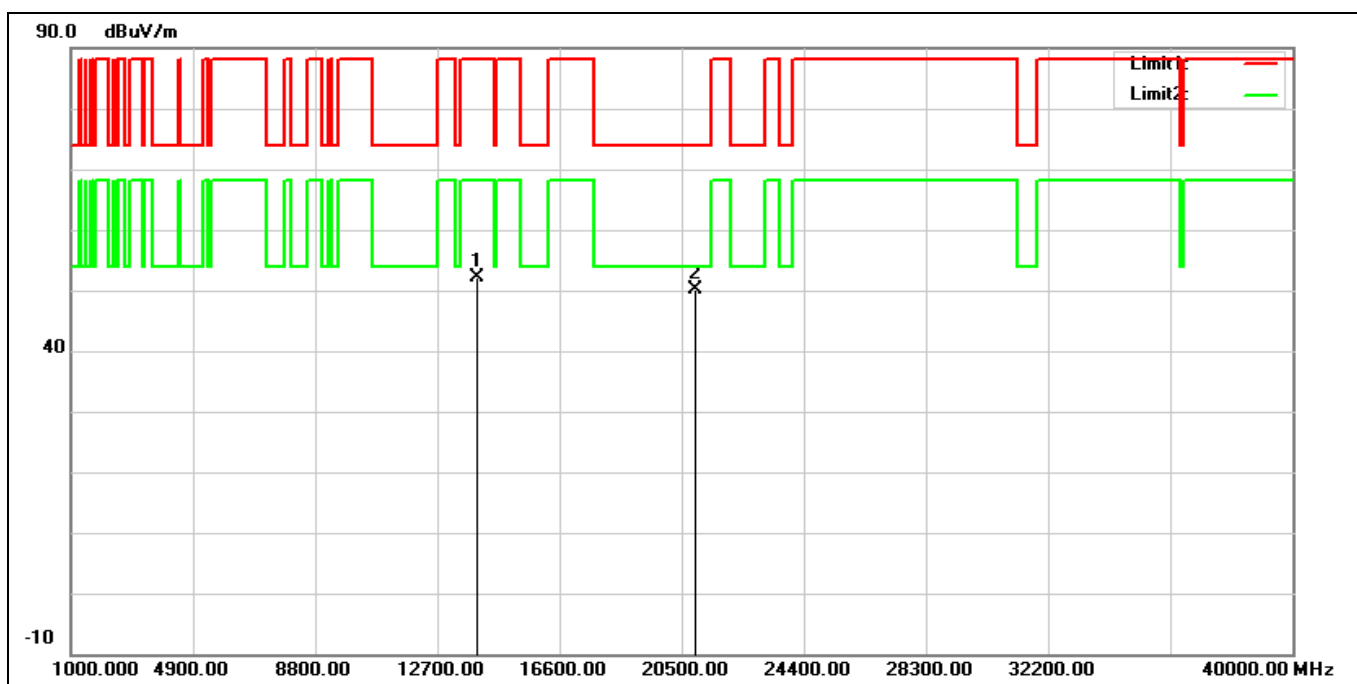


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13970.000	34.30	17.87	52.17	88.20	-36.03	peak
2*	20955.000	29.22	20.87	50.09	74.00	-23.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

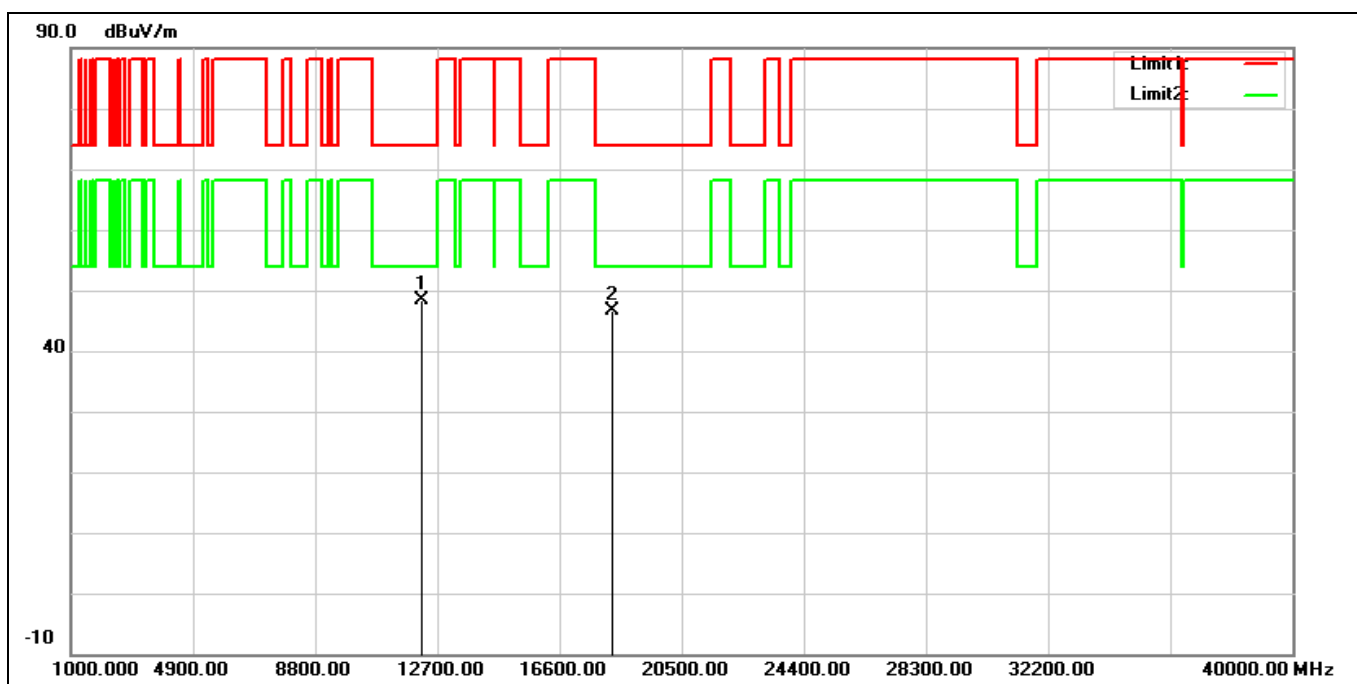


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12210.000	33.89	14.43	48.32	74.00	-25.68	peak
2	18315.000	28.27	18.47	46.74	74.00	-27.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

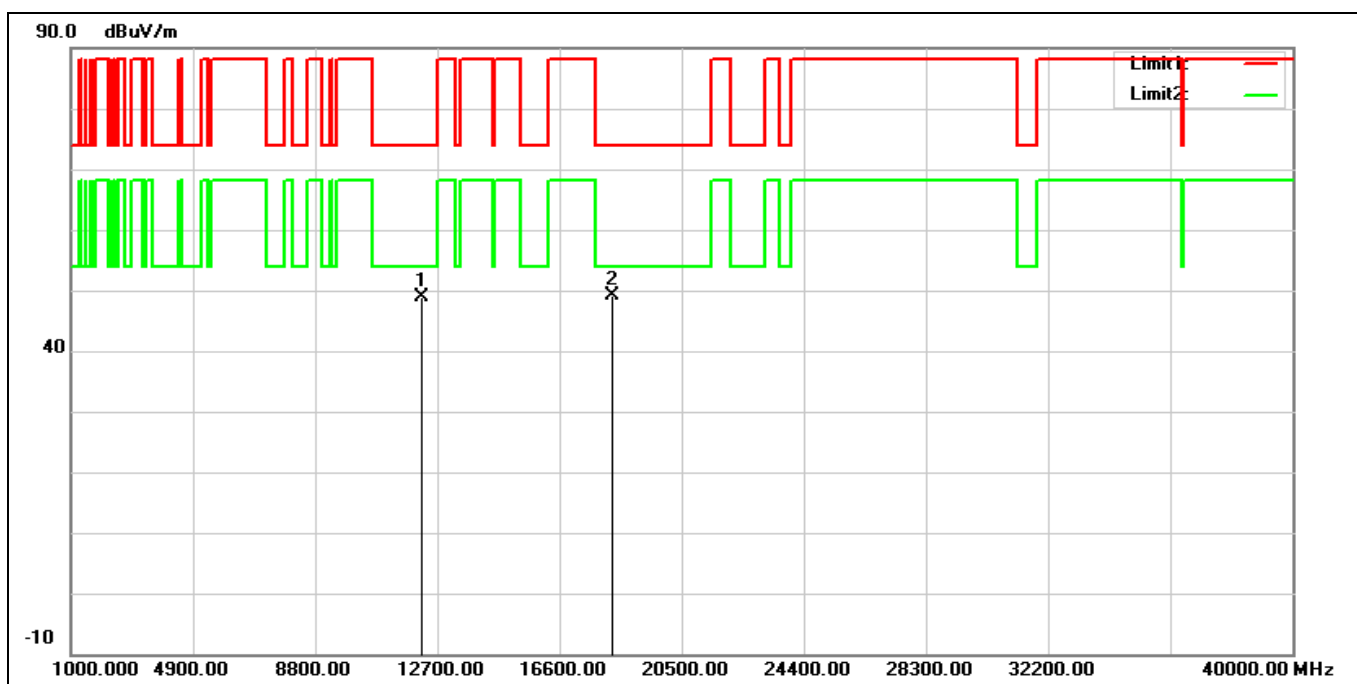


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12210.000	34.56	14.43	48.99	74.00	-25.01	peak
2*	18315.000	30.55	18.47	49.02	74.00	-24.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6265 MHz		
Remark:			

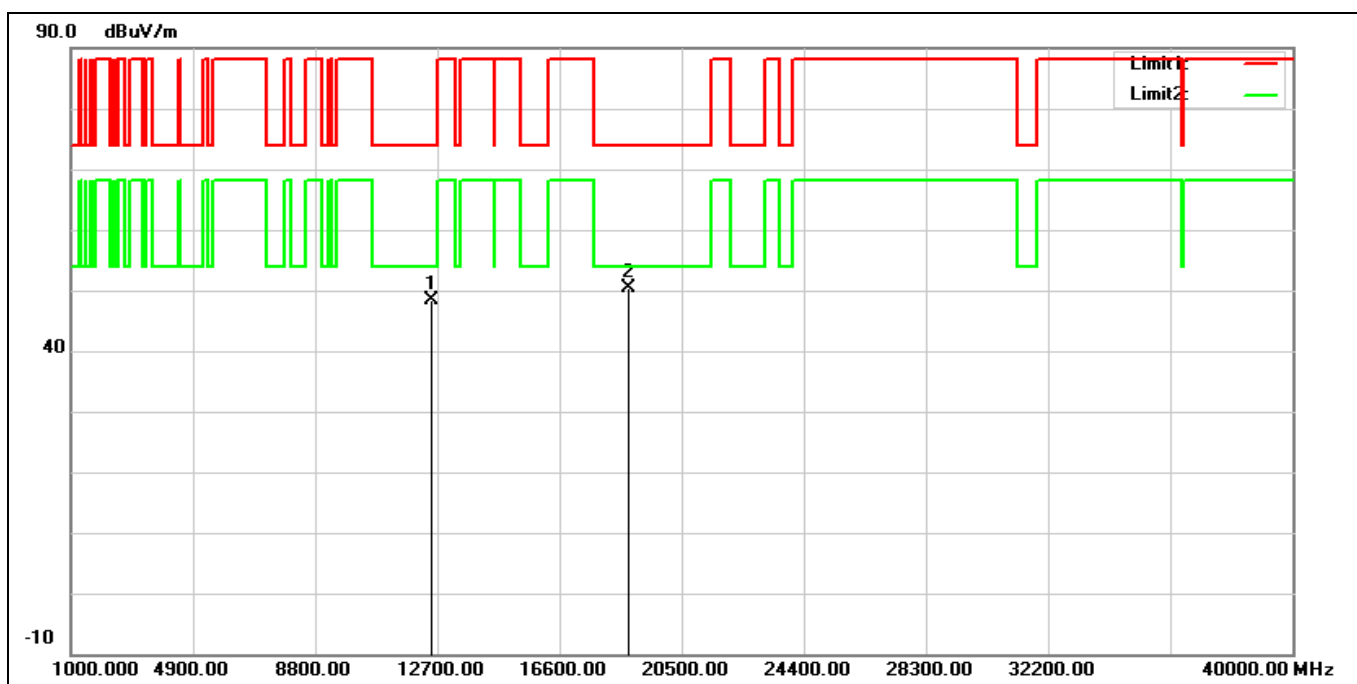


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12530.000	33.99	14.40	48.39	74.00	-25.61	peak
2*	18795.000	31.11	19.16	50.27	74.00	-23.73	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT320 6265 MHz
Remark:

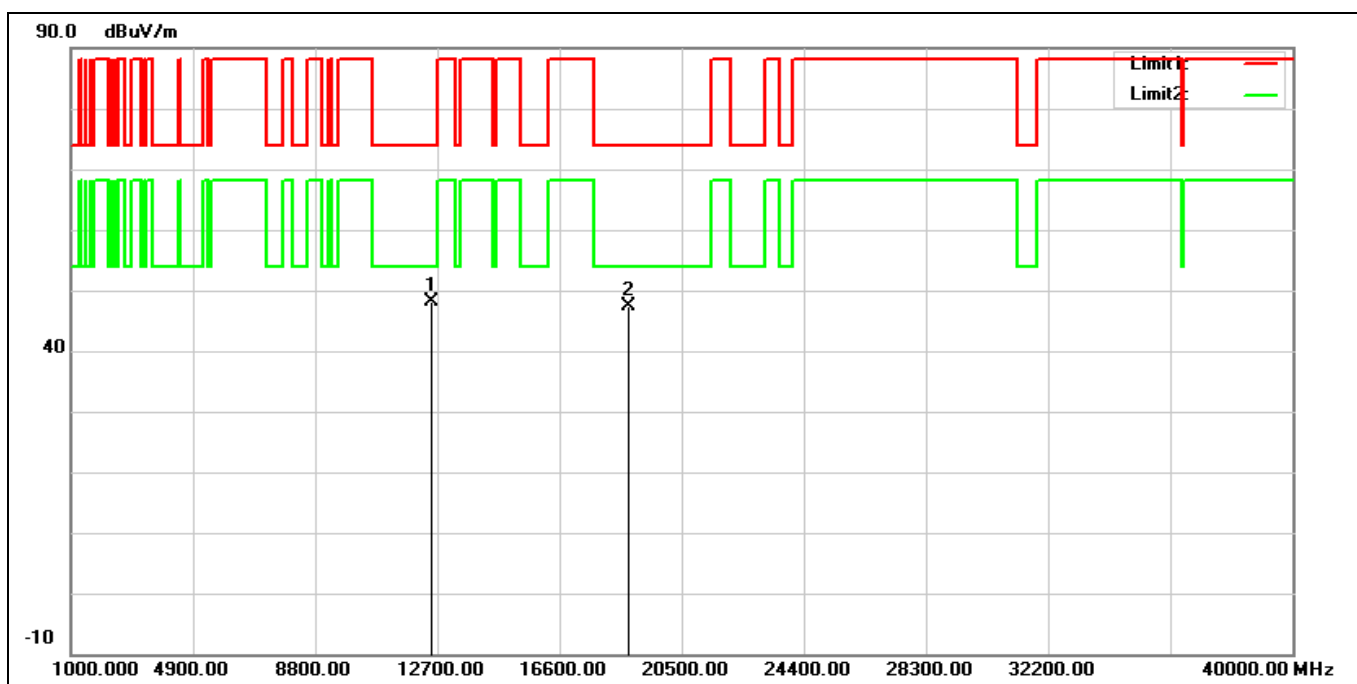


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12530.000	33.75	14.40	48.15	74.00	-25.85	peak
2	18795.000	28.29	19.16	47.45	74.00	-26.55	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT320 6425 MHz
Remark:

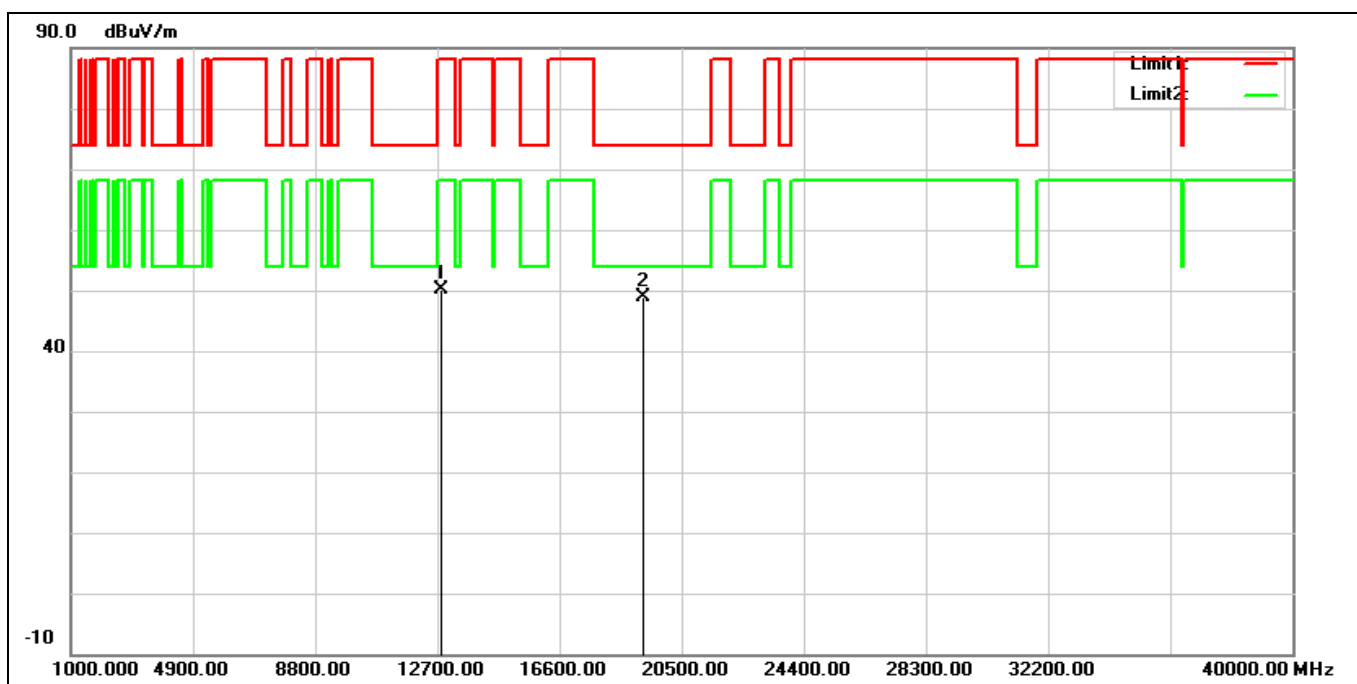


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12850.000	34.11	16.01	50.12	88.20	-38.08	peak
2*	19275.000	28.62	20.21	48.83	74.00	-25.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6425 MHz		
Remark:			

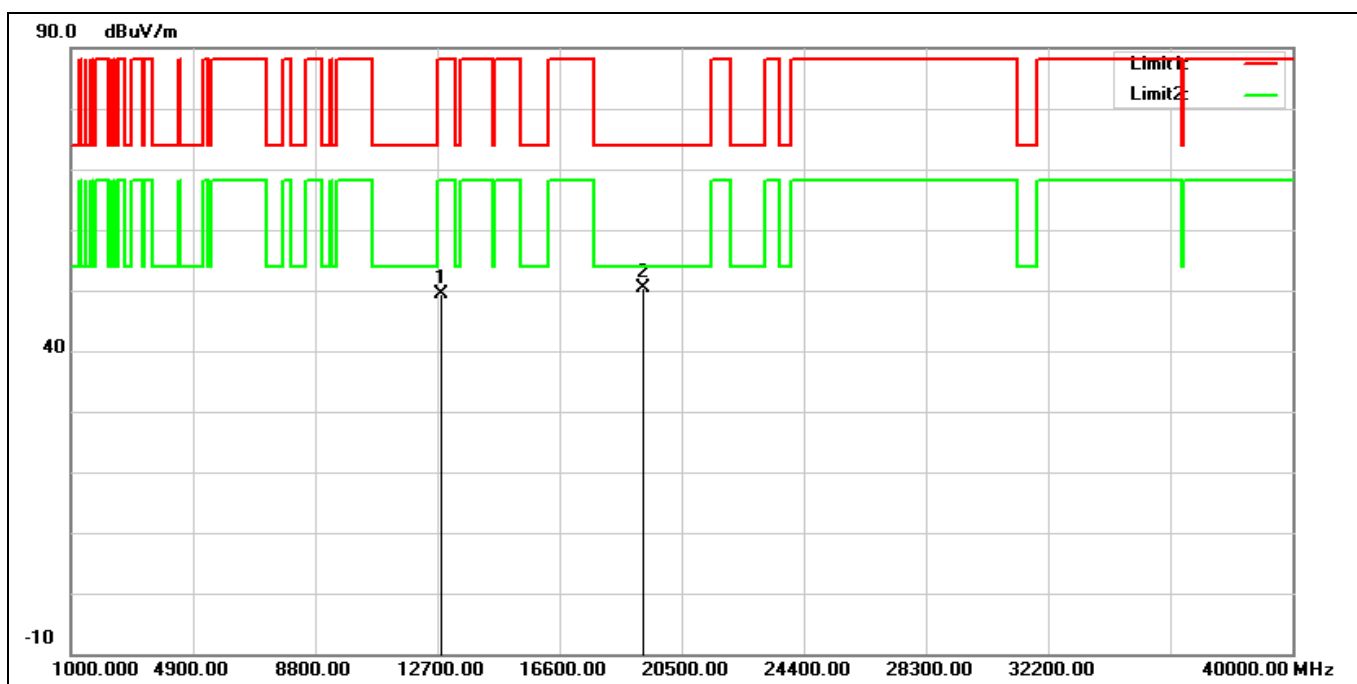


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12850.000	33.34	16.01	49.35	88.20	-38.85	peak
2*	19275.000	30.19	20.21	50.40	74.00	-23.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6585 MHz		
Remark:			

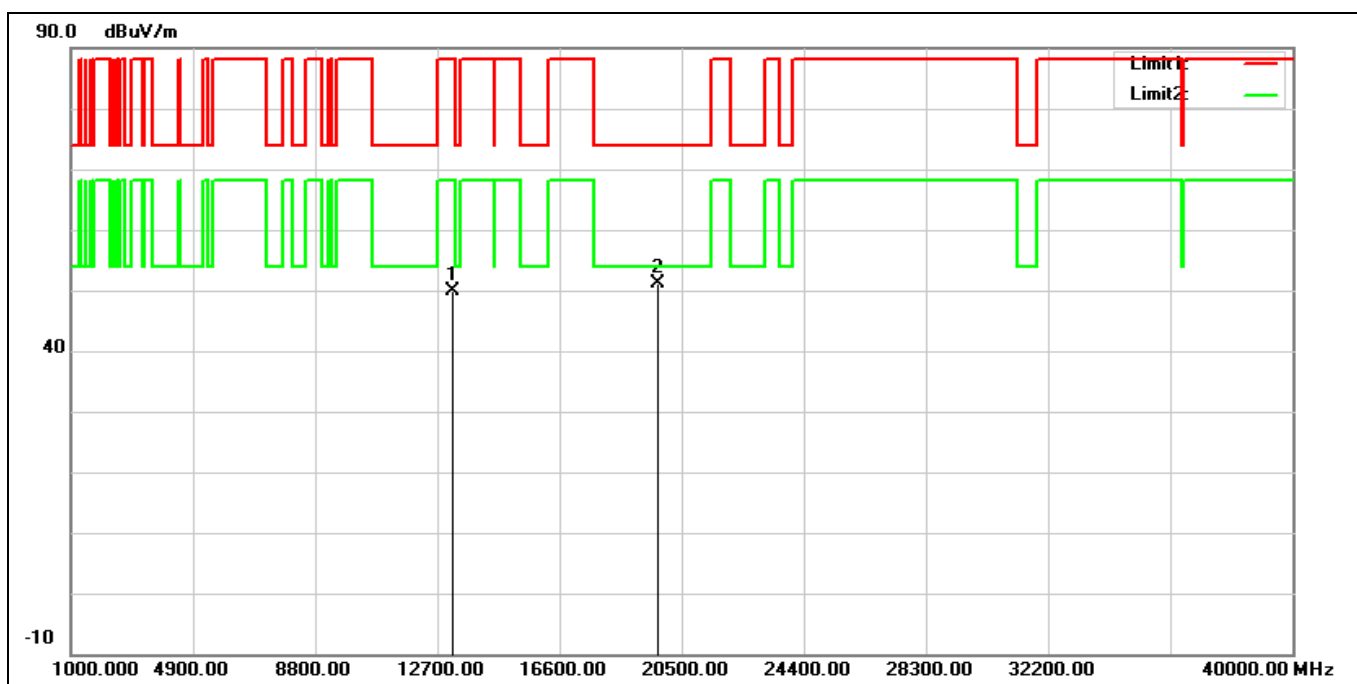


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13170.000	34.56	15.38	49.94	88.20	-38.26	peak
2*	19755.000	30.05	20.96	51.01	74.00	-22.99	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6585 MHz		
Remark:			

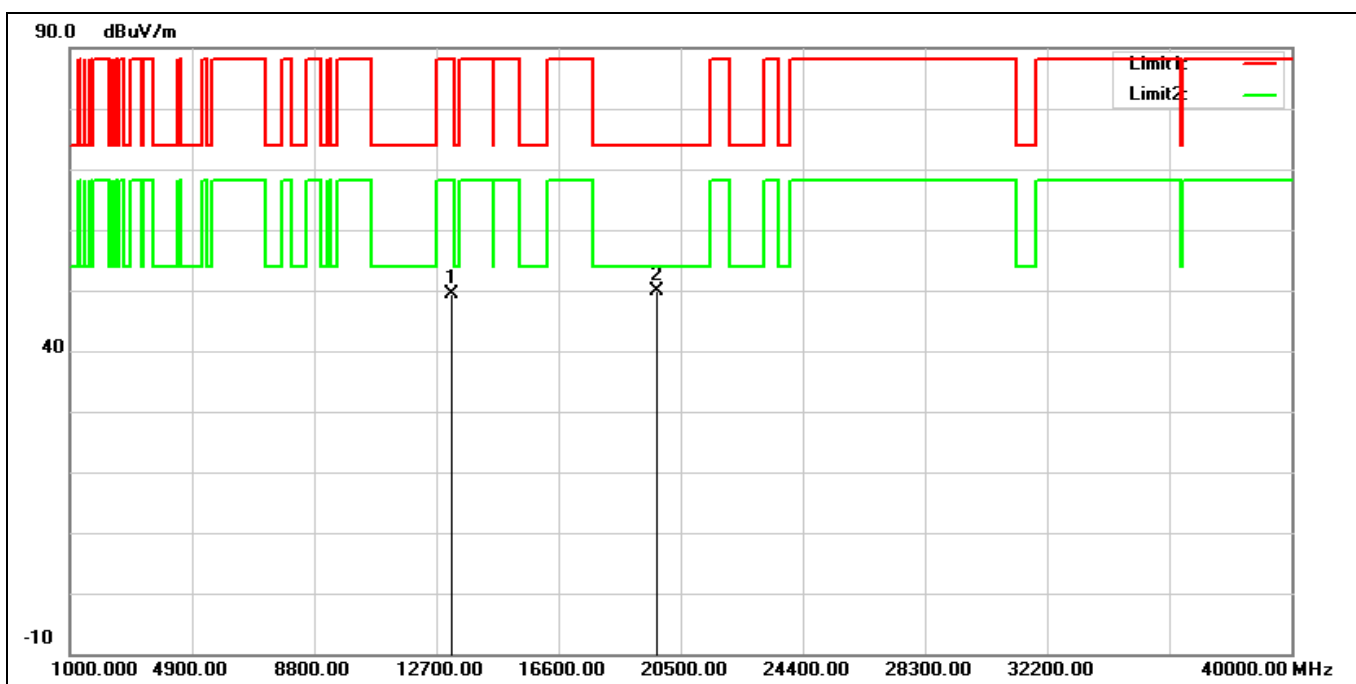


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13170.000	34.03	15.38	49.41	88.20	-38.79	peak
2*	19755.000	28.98	20.96	49.94	74.00	-24.06	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT320 6745 MHz
Remark:

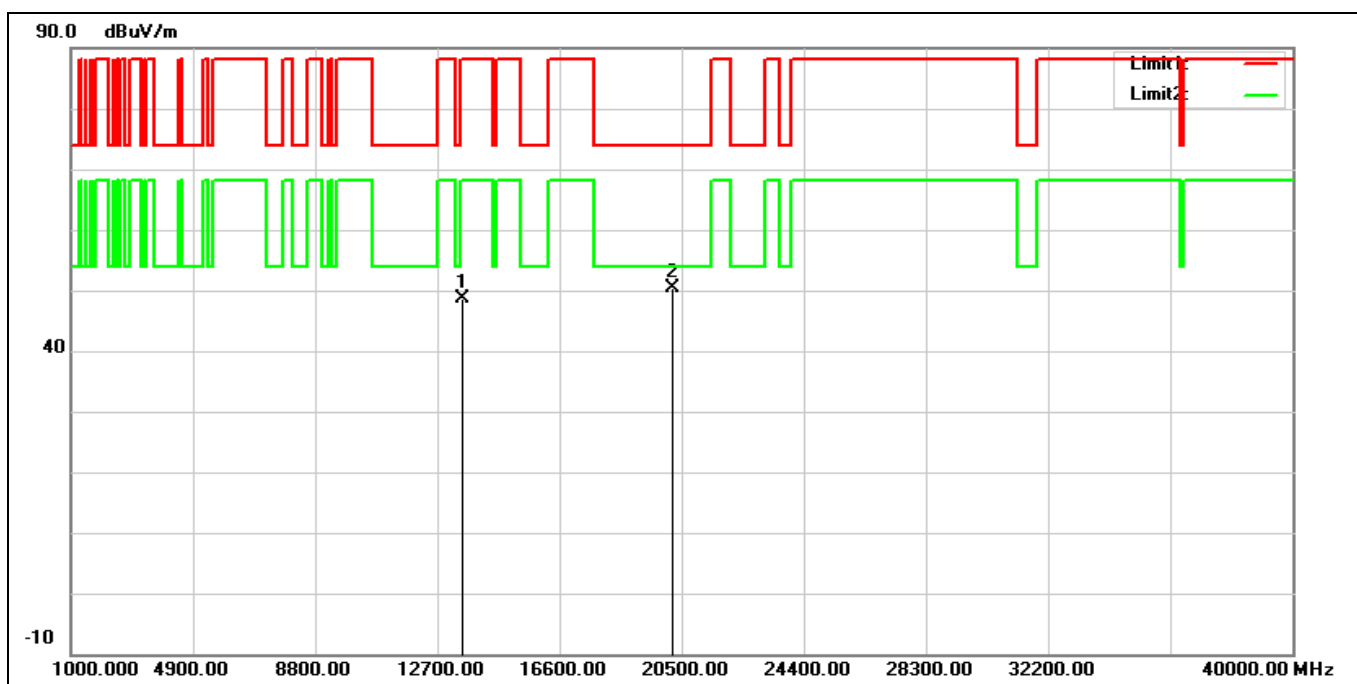


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13490.000	34.11	14.48	48.59	88.20	-39.61	peak
2*	20235.000	29.81	20.52	50.33	74.00	-23.67	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6745 MHz		
Remark:			

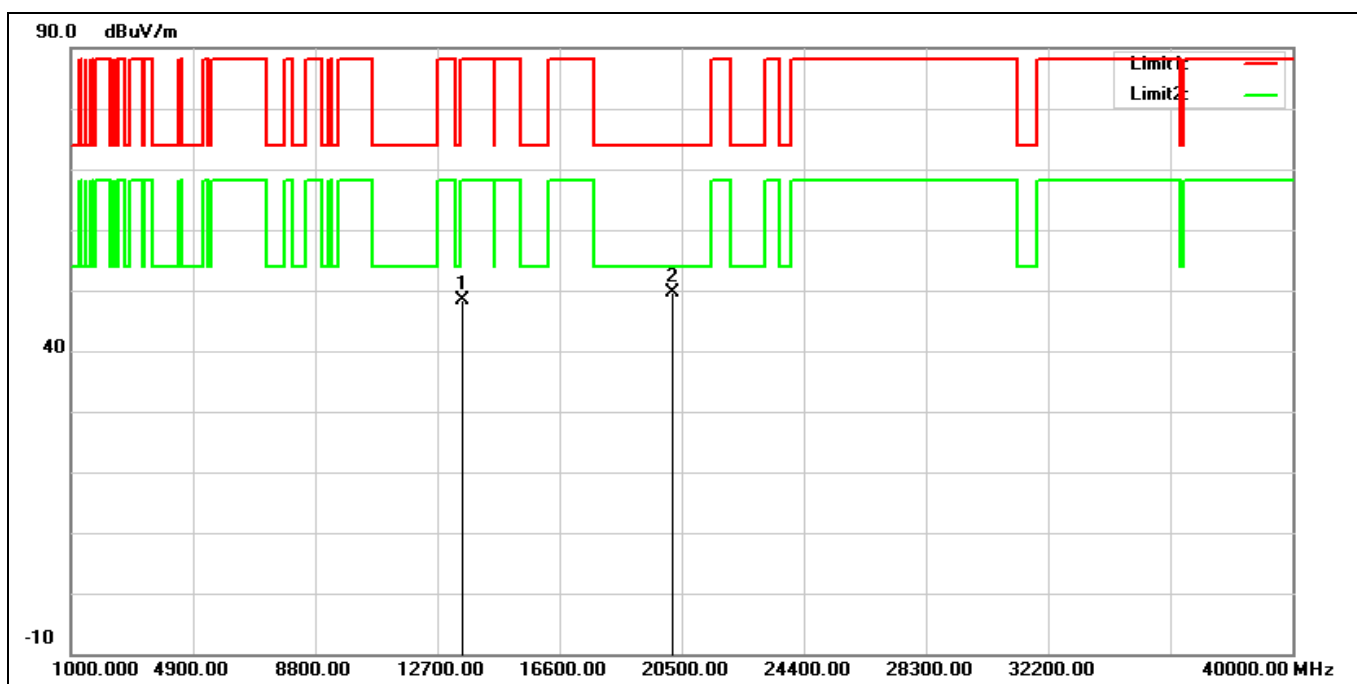


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13490.000	33.83	14.48	48.31	88.20	-39.89	peak
2*	20235.000	29.12	20.52	49.64	74.00	-24.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

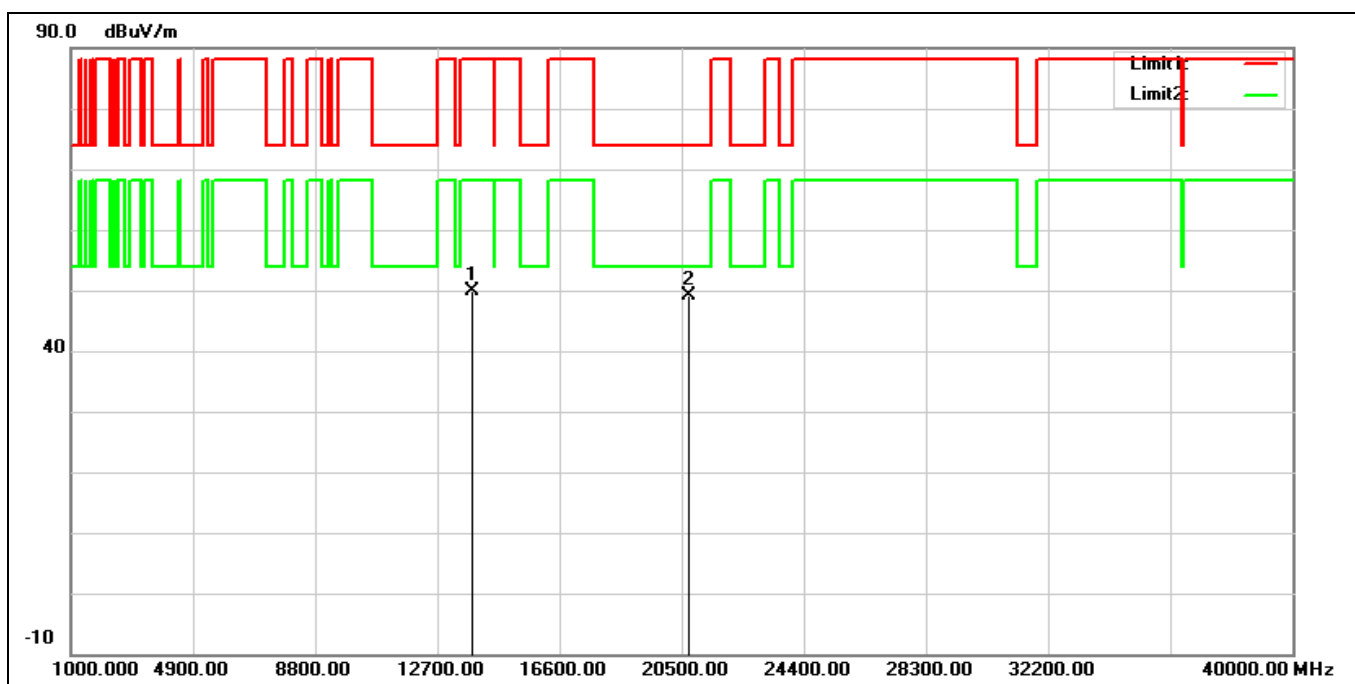

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13810.000	33.56	16.38	49.94	88.20	-38.26	peak
2*	20715.000	28.83	20.30	49.13	74.00	-24.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

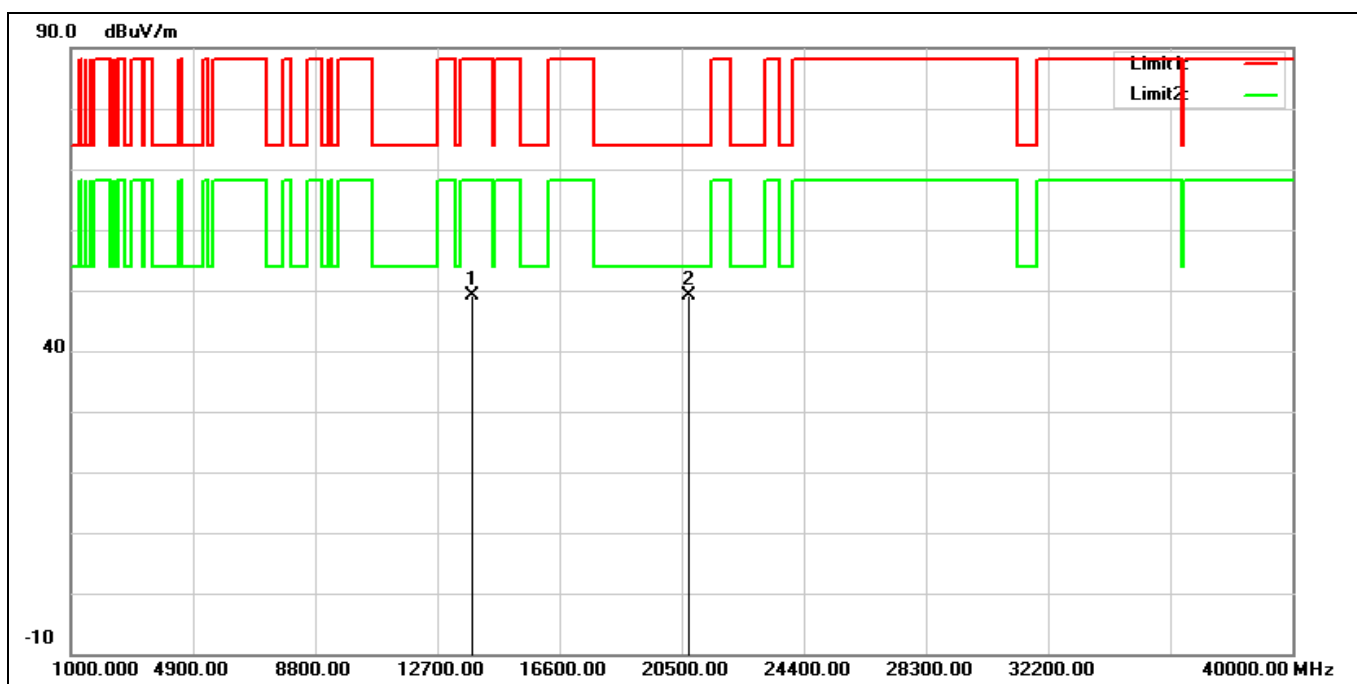


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13810.000	32.80	16.38	49.18	88.20	-39.02	peak
2*	20715.000	28.85	20.30	49.15	74.00	-24.85	peak

Band Edge


Peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5955 MHz		
Remark:			

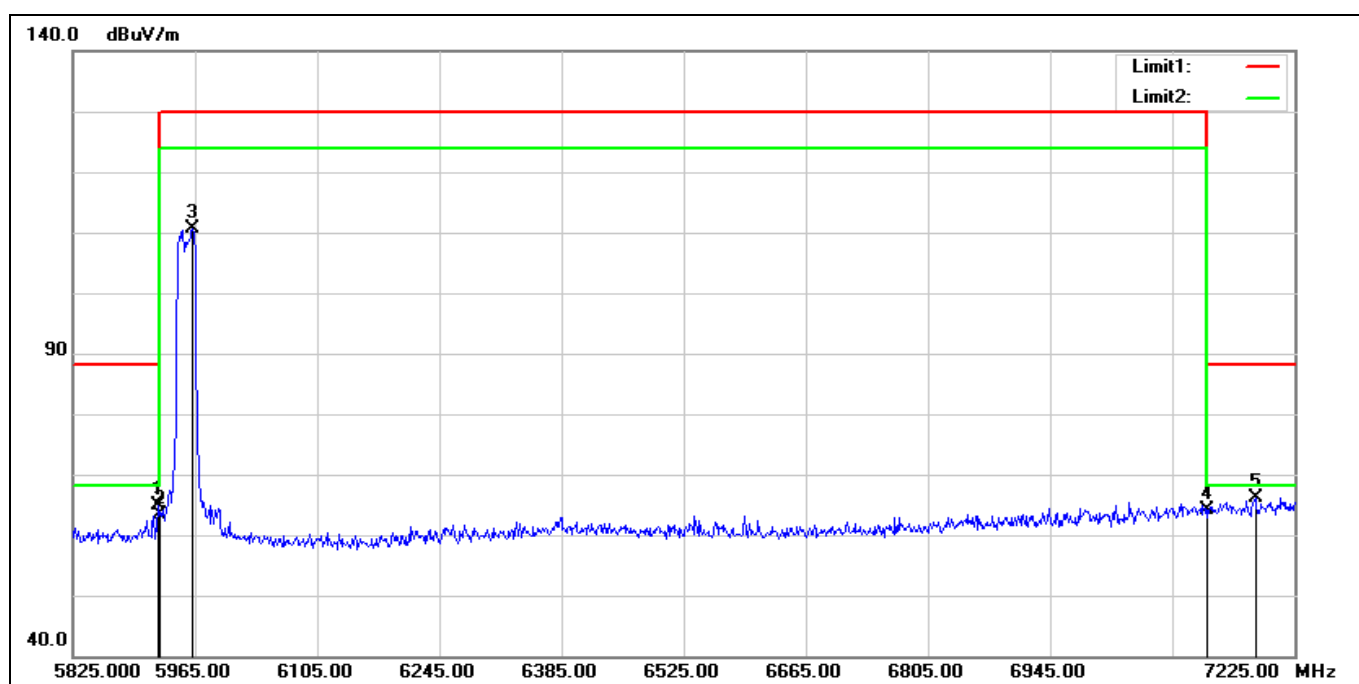


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5923.000	62.64	2.23	64.87	88.20	-23.33	peak
2	5925.000	61.10	2.23	63.33	88.20	-24.87	peak
3*	5962.200	108.45	2.08	110.53	130.00	-19.47	peak
4	7125.000	57.52	6.69	64.21	88.20	-23.99	peak
5	7180.200	59.25	6.92	66.17	88.20	-22.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5955 MHz		
Remark:			

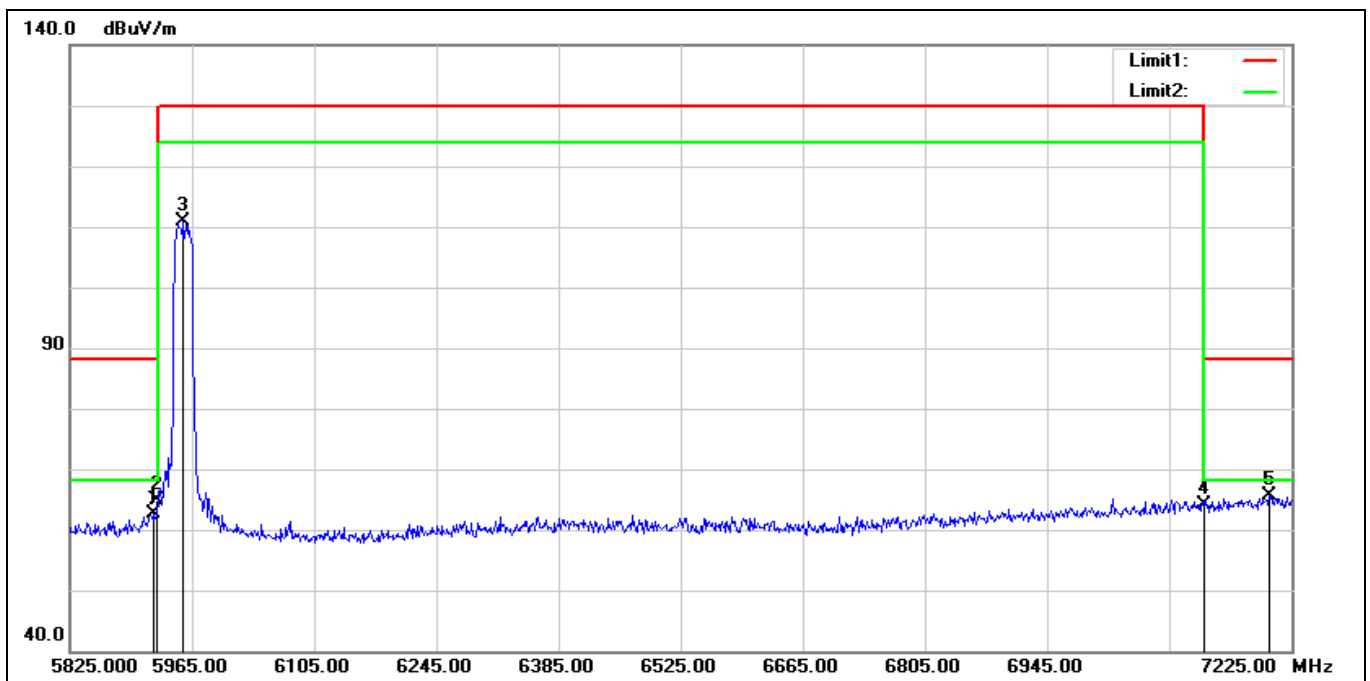


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.600	60.50	2.24	62.74	88.20	-25.46	peak
2	5925.000	62.75	2.23	64.98	88.20	-23.22	peak
3*	5955.200	108.70	2.08	110.78	130.00	-19.22	peak
4	7125.000	57.33	6.69	64.02	88.20	-24.18	peak
5	7199.800	58.63	7.03	65.66	88.20	-22.54	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

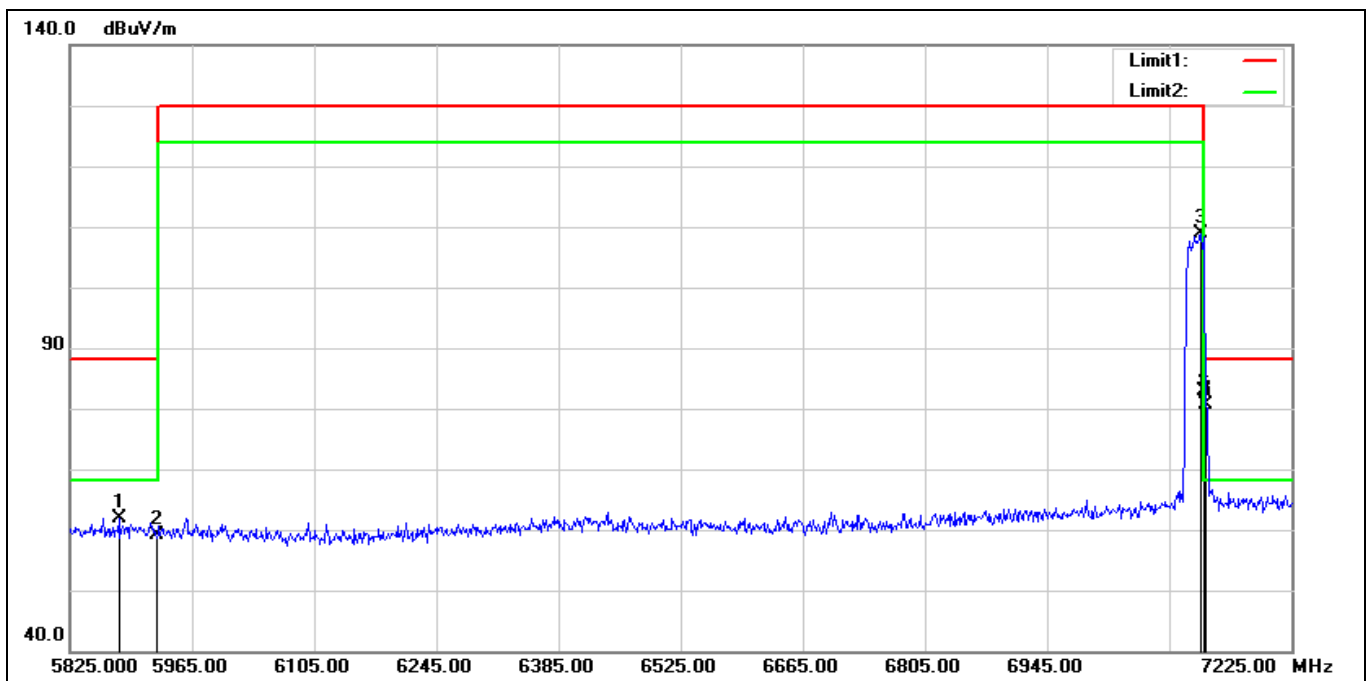


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5881.000	59.57	2.34	61.91	88.20	-26.29	peak
2	5925.000	56.84	2.23	59.07	88.20	-29.13	peak
3	7121.400	102.14	6.68	108.82	130.00	-21.18	peak
4*	7125.000	76.28	6.69	82.97	88.20	-5.23	peak
5	7127.000	73.88	6.69	80.57	88.20	-7.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

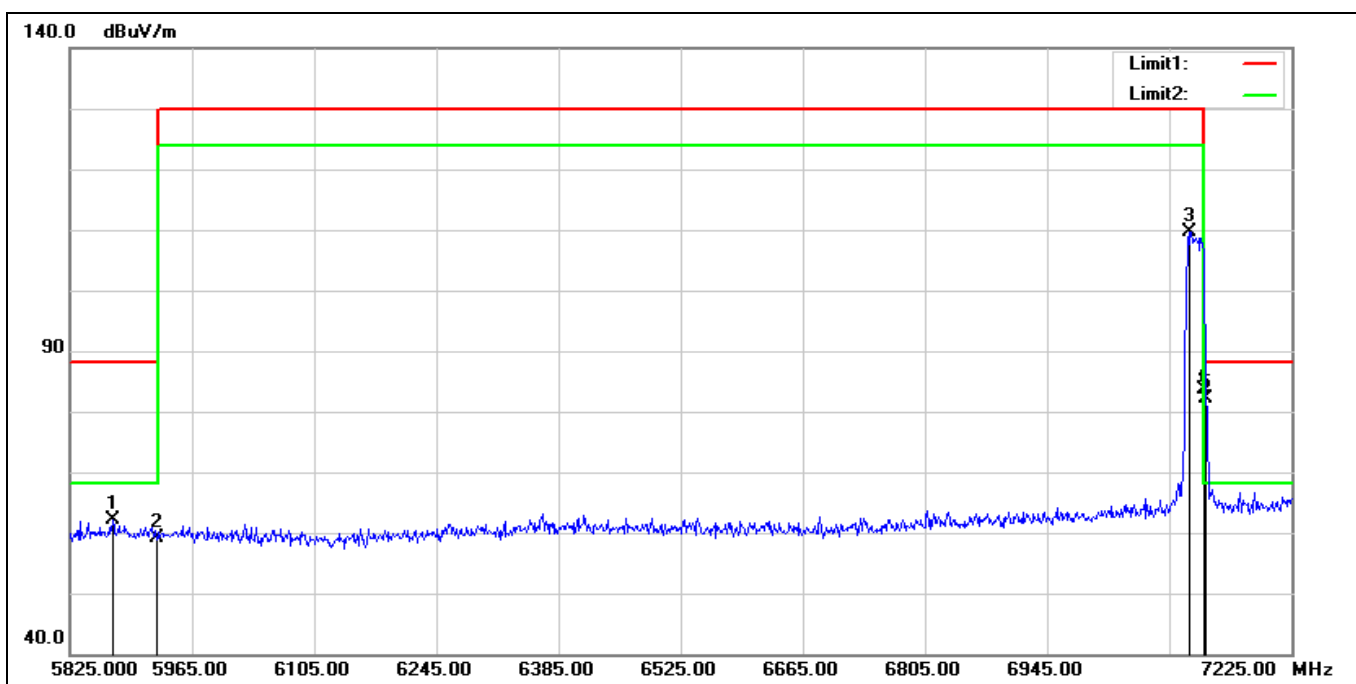


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5874.000	59.81	2.34	62.15	88.20	-26.05	peak
2	5925.000	56.80	2.23	59.03	88.20	-29.17	peak
3	7107.400	102.94	6.63	109.57	130.00	-20.43	peak
4*	7125.000	76.97	6.69	83.66	88.20	-4.54	peak
5	7127.000	75.45	6.69	82.14	88.20	-6.06	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

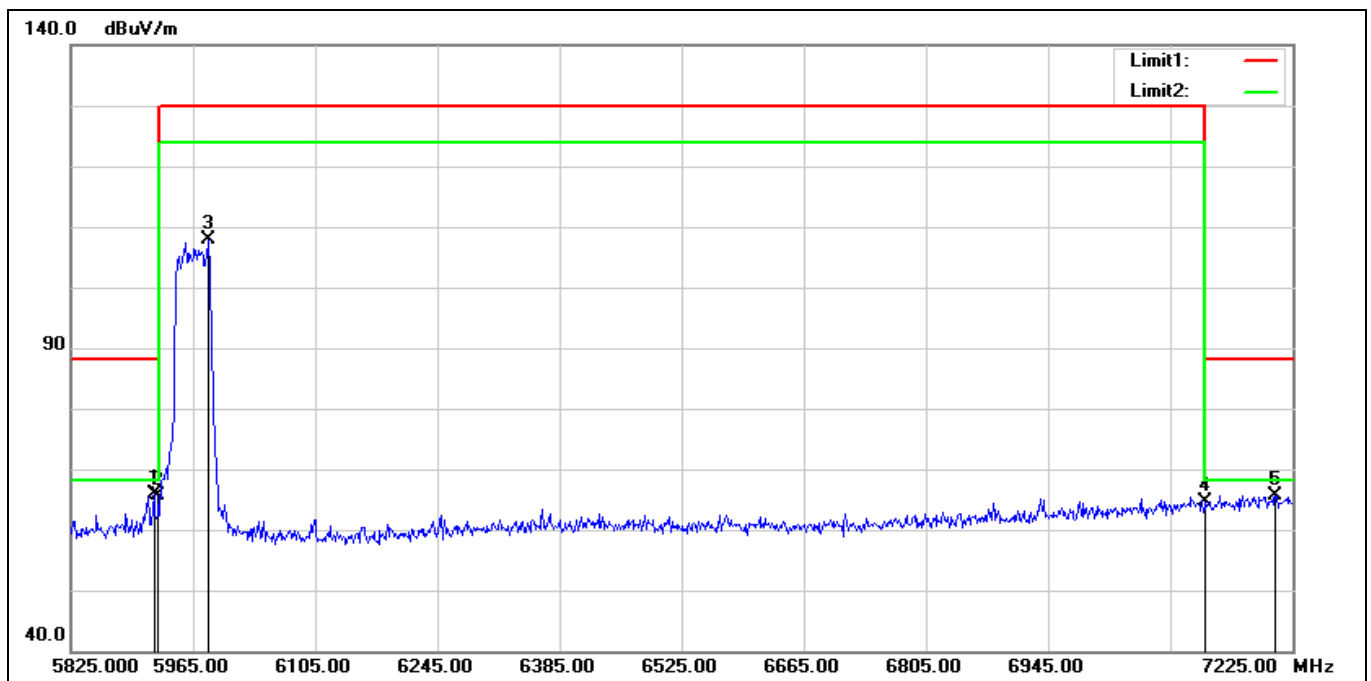


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5920.200	63.72	2.25	65.97	88.20	-22.23	peak
2	5925.000	63.49	2.23	65.72	88.20	-22.48	peak
3*	5983.200	105.70	2.13	107.83	130.00	-22.17	peak
4	7125.000	57.84	6.69	64.53	88.20	-23.67	peak
5	7205.400	58.71	7.04	65.75	88.20	-22.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

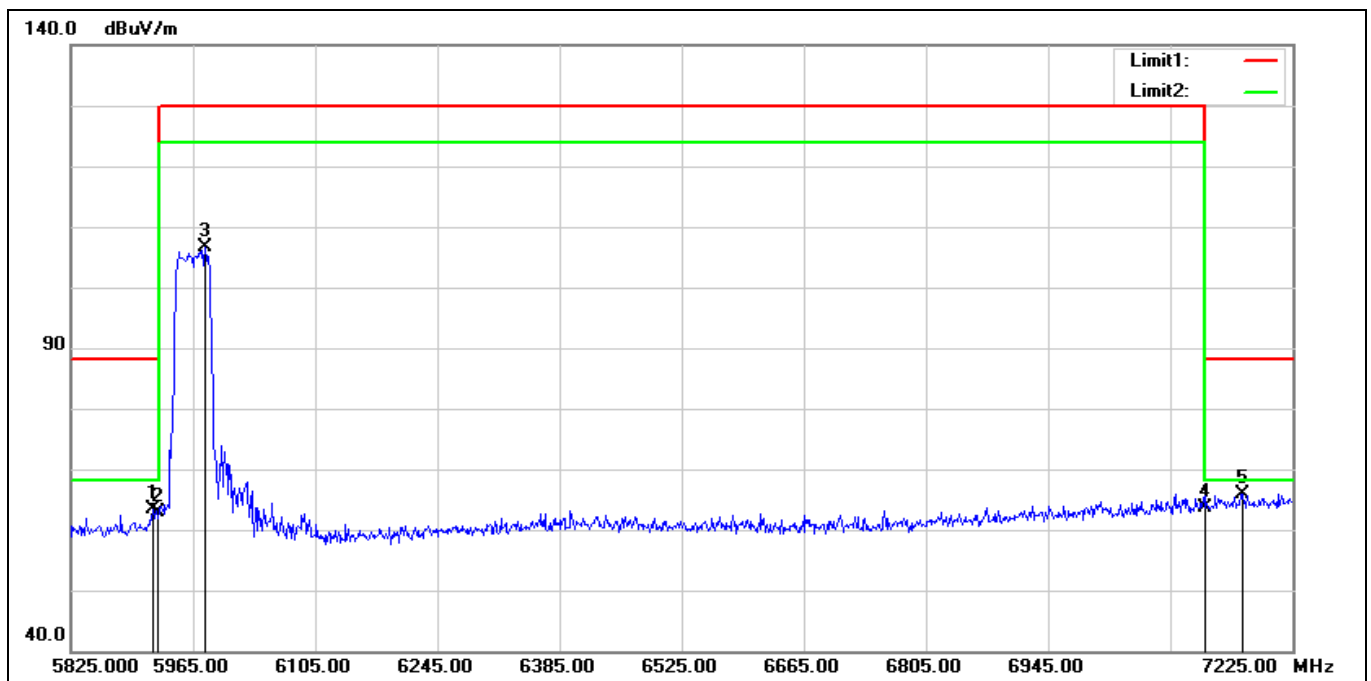


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5918.800	61.03	2.26	63.29	88.20	-24.91	peak
2	5925.000	60.73	2.23	62.96	88.20	-25.24	peak
3	5979.000	104.52	2.11	106.63	130.00	-23.37	peak
4	7125.000	56.92	6.69	63.61	88.20	-24.59	peak
5*	7167.600	59.13	6.86	65.99	88.20	-22.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

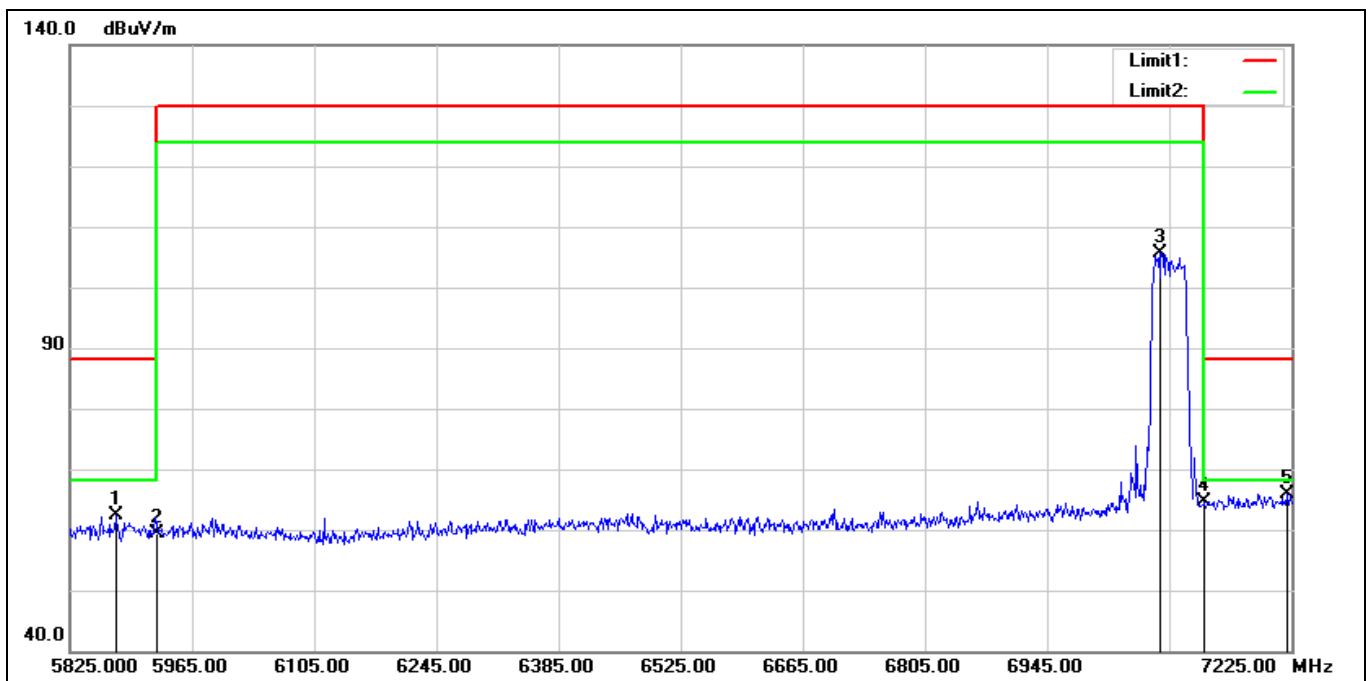


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5878.200	60.00	2.34	62.34	88.20	-25.86	peak
2	5925.000	57.16	2.23	59.39	88.20	-28.81	peak
3	7075.200	99.22	6.39	105.61	130.00	-24.39	peak
4	7125.000	57.93	6.69	64.62	88.20	-23.58	peak
5*	7219.400	58.83	7.08	65.91	88.20	-22.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

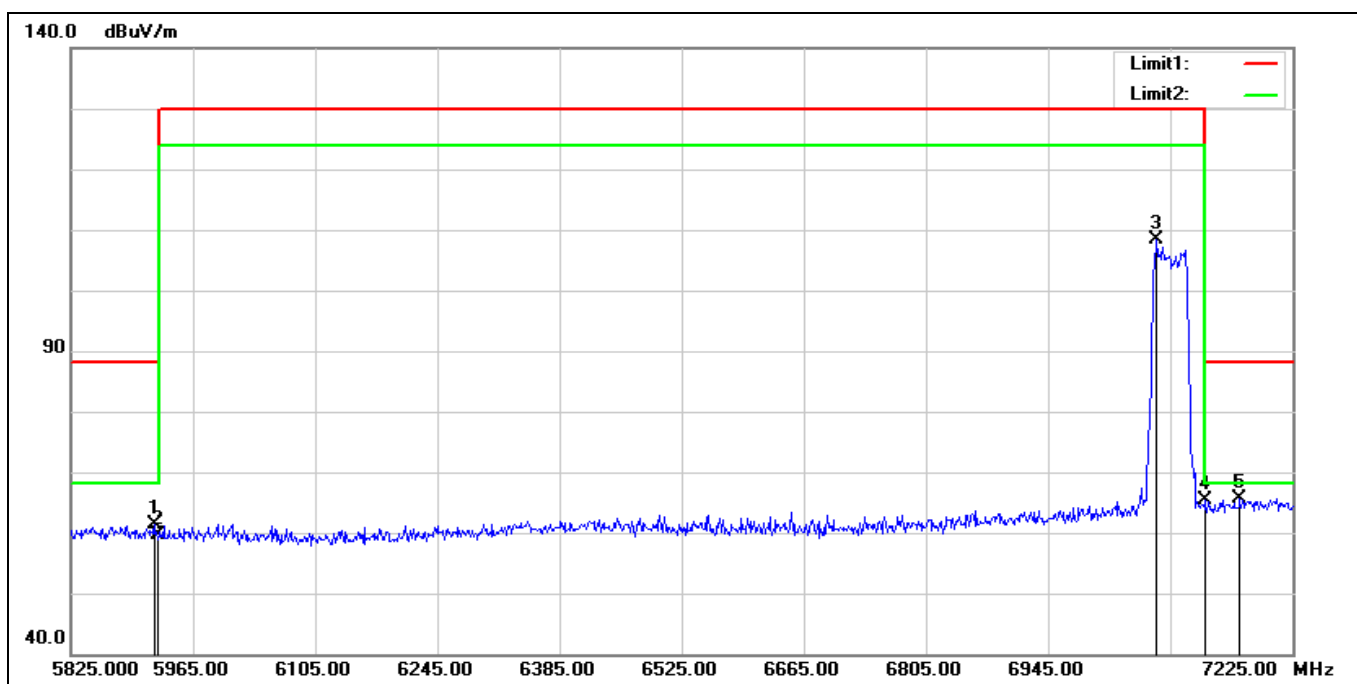


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5920.200	59.01	2.25	61.26	88.20	-26.94	peak
2	5925.000	57.34	2.23	59.57	88.20	-28.63	peak
3*	7069.600	101.97	6.34	108.31	130.00	-21.69	peak
4	7125.000	58.77	6.69	65.46	88.20	-22.74	peak
5	7164.800	58.86	6.85	65.71	88.20	-22.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

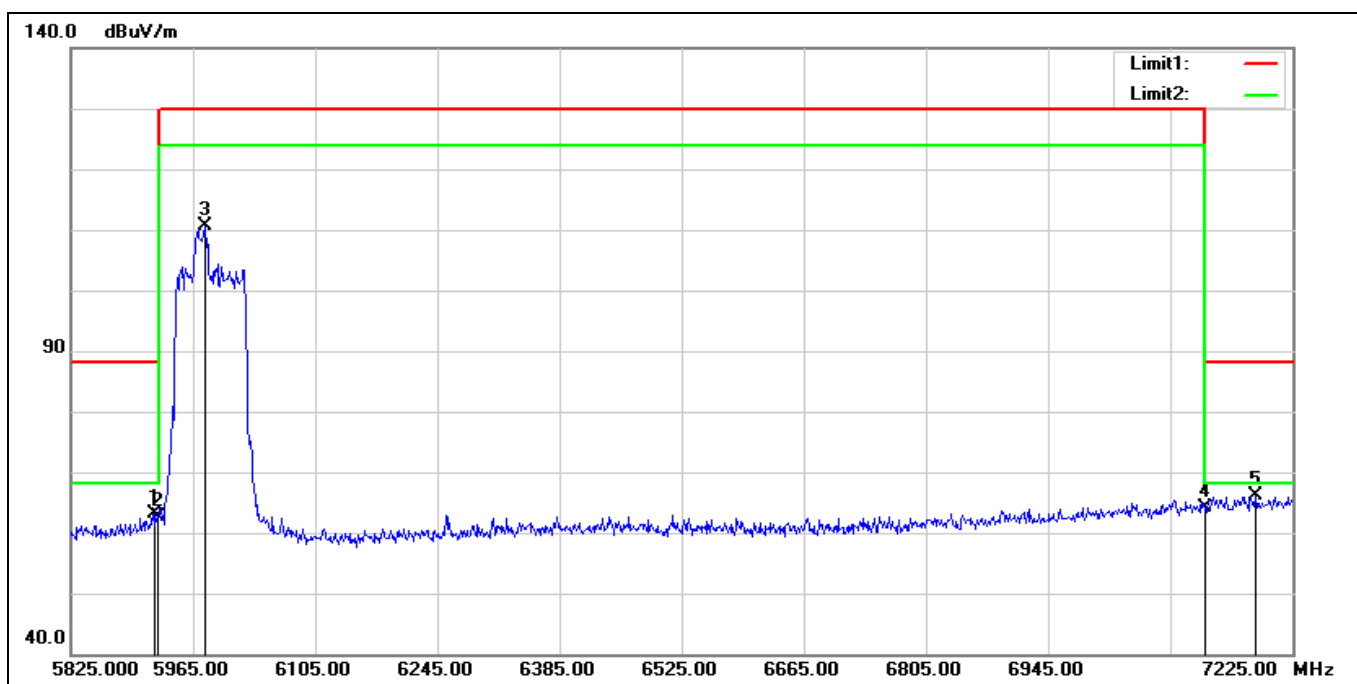


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.600	60.90	2.24	63.14	88.20	-25.06	peak
2	5925.000	60.46	2.23	62.69	88.20	-25.51	peak
3*	5979.000	108.40	2.11	110.51	130.00	-19.49	peak
4	7125.000	57.41	6.69	64.10	88.20	-24.10	peak
5	7183.000	59.23	6.93	66.16	88.20	-22.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

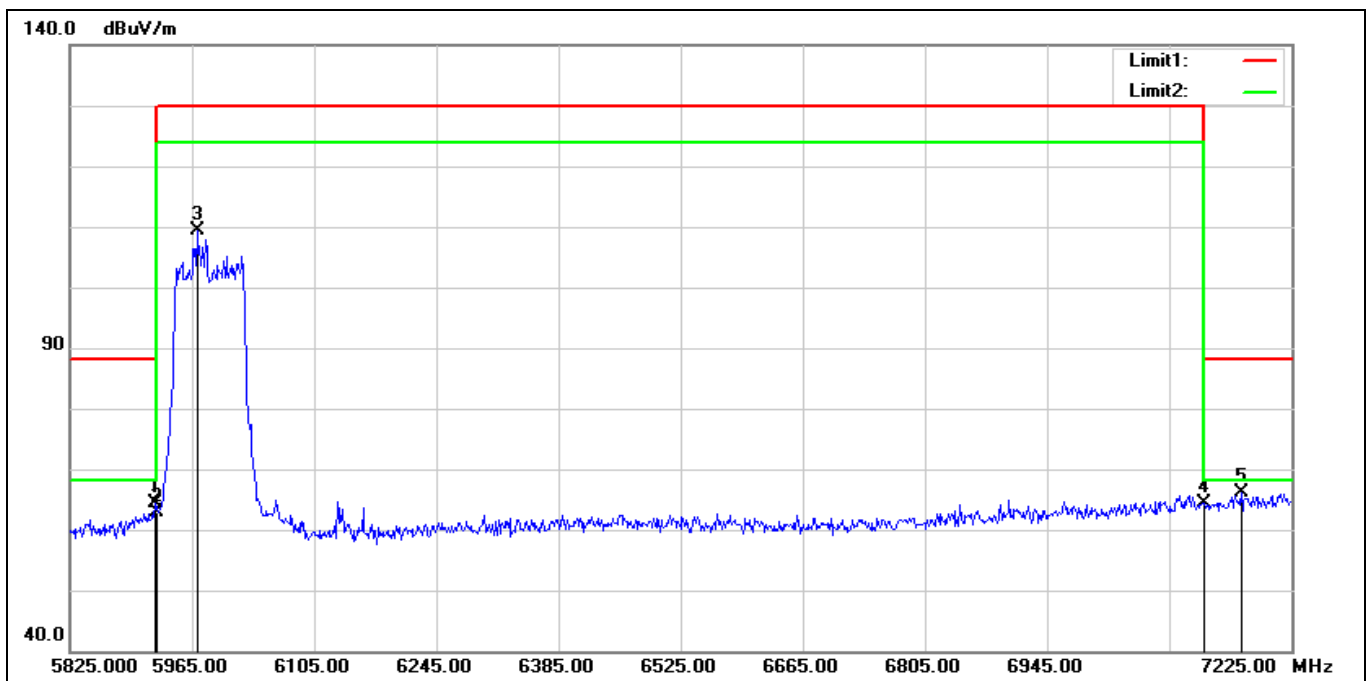


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5923.000	62.08	2.23	64.31	88.20	-23.89	peak
2	5925.000	60.67	2.23	62.90	88.20	-25.30	peak
3*	5970.600	107.30	2.10	109.40	130.00	-20.60	peak
4	7125.000	57.78	6.69	64.47	88.20	-23.73	peak
5	7167.600	59.29	6.86	66.15	88.20	-22.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

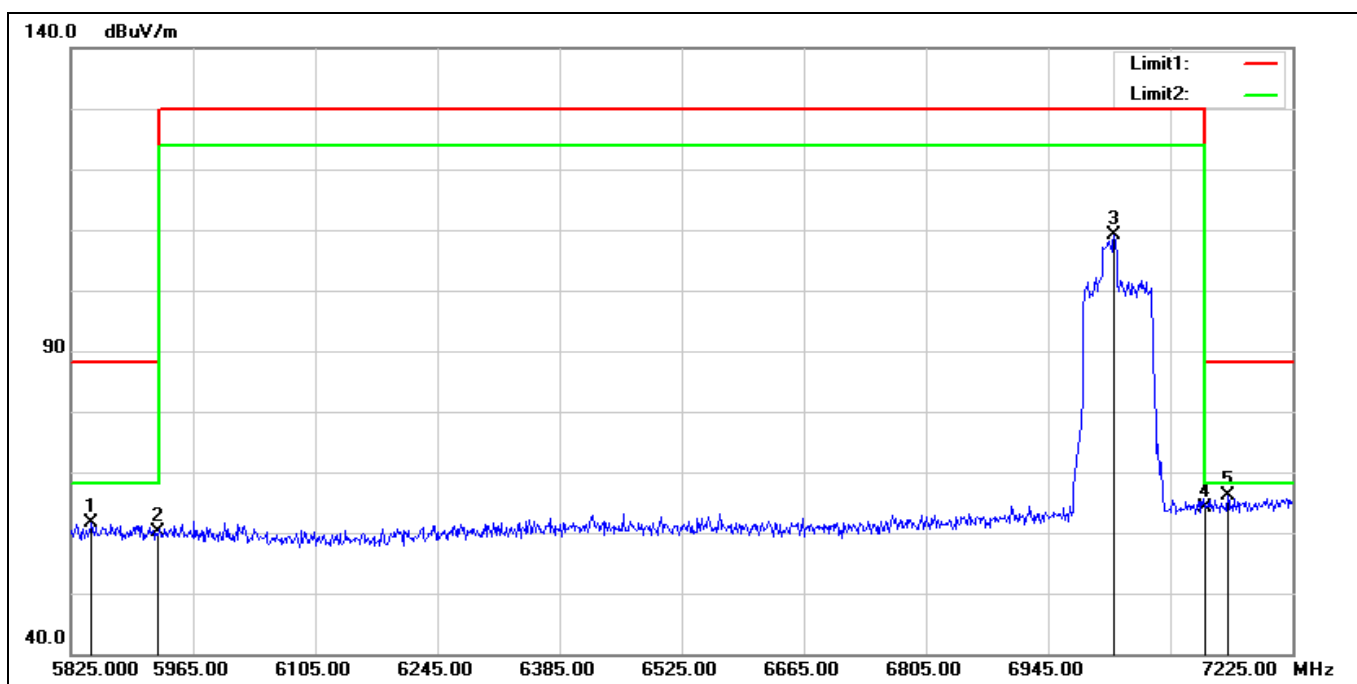


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5848.800	59.42	2.29	61.71	88.20	-26.49	peak
2	5925.000	57.80	2.23	60.03	88.20	-28.17	peak
3*	7020.600	103.26	5.95	109.21	130.00	-20.79	peak
4	7125.000	57.52	6.69	64.21	88.20	-23.99	peak
5	7150.800	59.32	6.77	66.09	88.20	-22.11	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT80 7025 MHz
Remark:

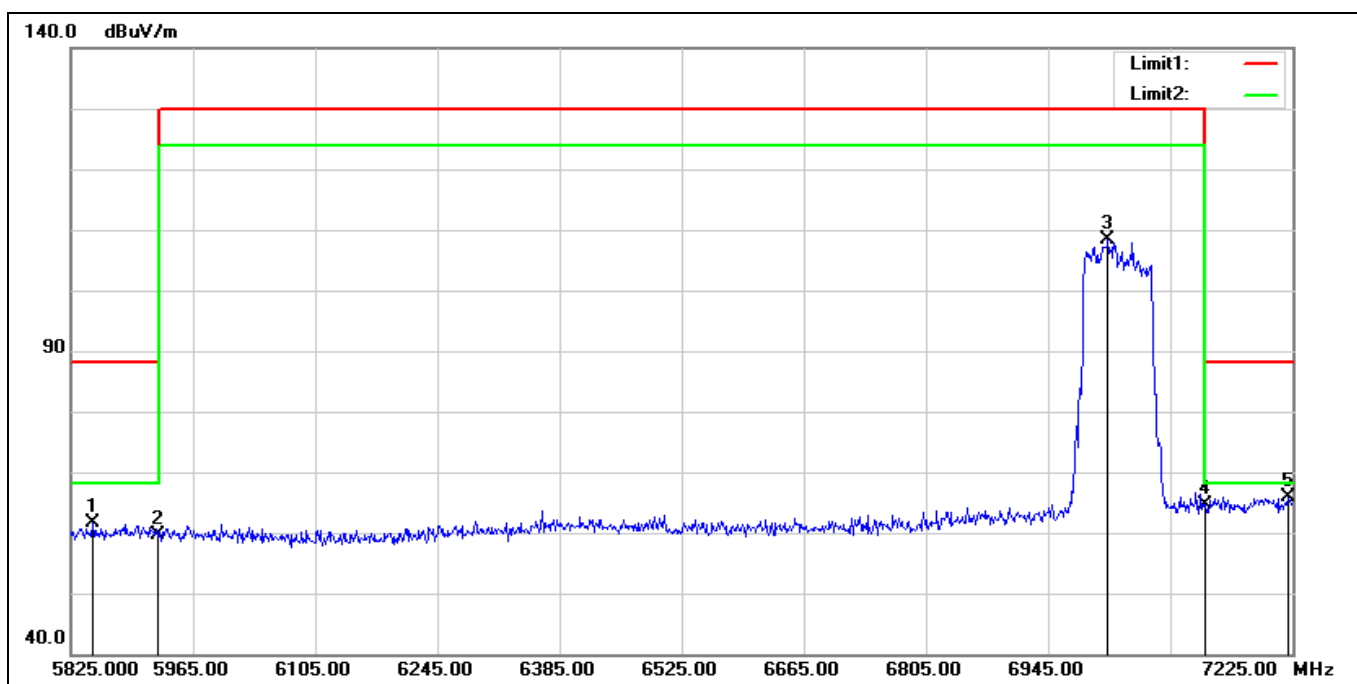


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.200	59.25	2.29	61.54	88.20	-26.66	peak
2	5925.000	57.35	2.23	59.58	88.20	-28.62	peak
3*	7013.600	102.44	5.90	108.34	130.00	-21.66	peak
4	7125.000	57.93	6.69	64.62	88.20	-23.58	peak
5	7219.400	58.81	7.08	65.89	88.20	-22.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

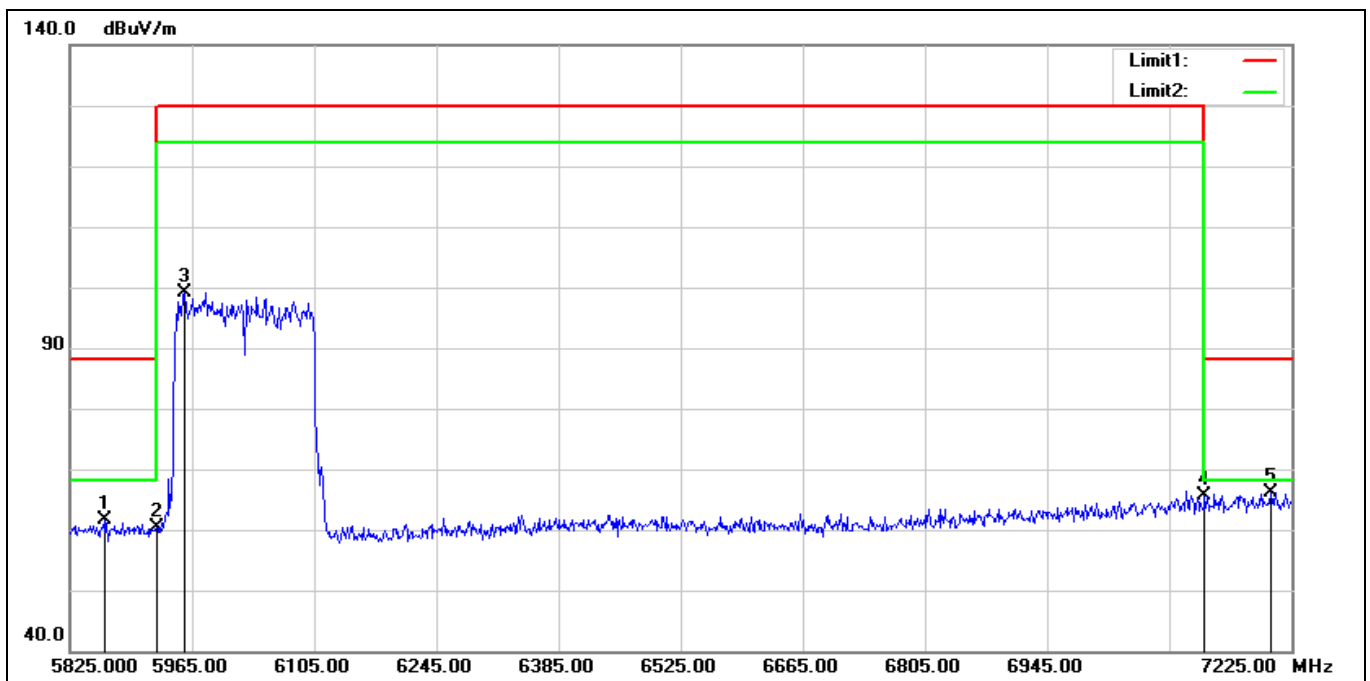


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.600	59.27	2.32	61.59	88.20	-26.61	peak
2	5925.000	58.04	2.23	60.27	88.20	-27.93	peak
3	5956.600	96.98	2.07	99.05	130.00	-30.95	peak
4	7125.000	58.89	6.69	65.58	88.20	-22.62	peak
5*	7201.200	59.16	7.03	66.19	88.20	-22.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

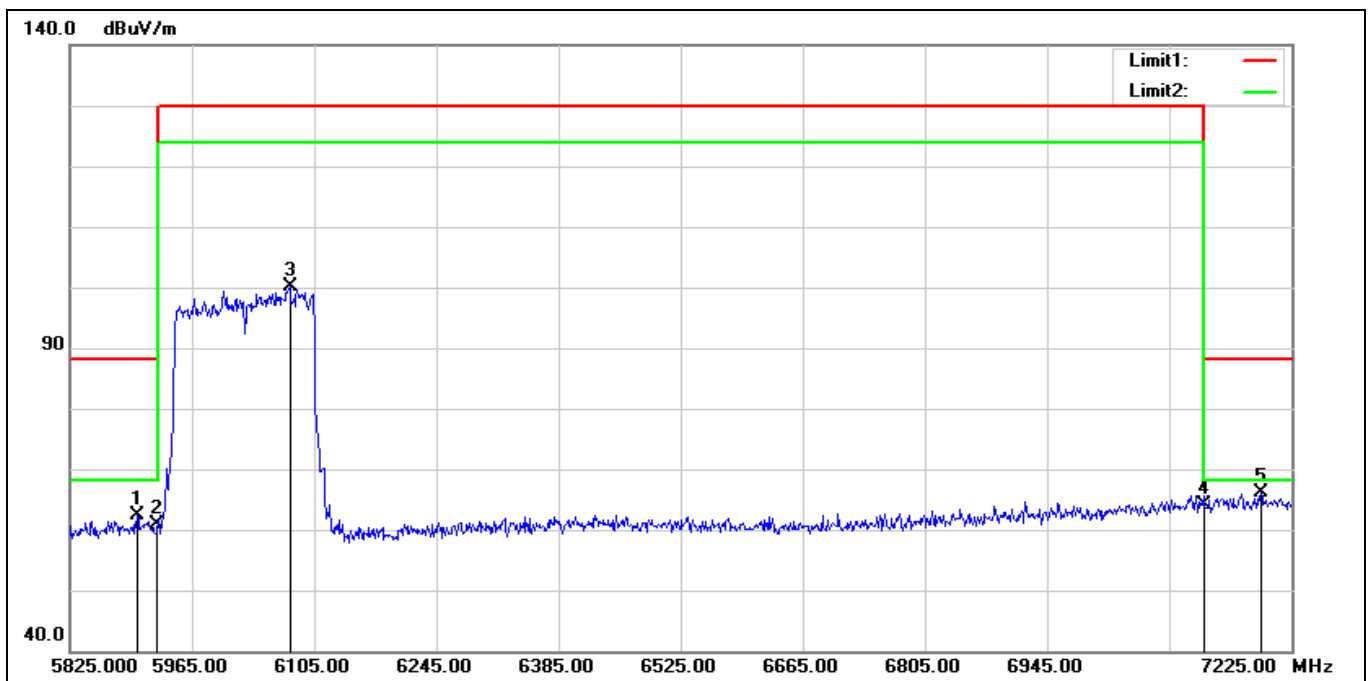


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5902.000	59.91	2.37	62.28	88.20	-25.92	peak
2	5925.000	58.62	2.23	60.85	88.20	-27.35	peak
3	6077.000	97.65	2.37	100.02	130.00	-29.98	peak
4	7125.000	57.36	6.69	64.05	88.20	-24.15	peak
5*	7190.000	59.17	6.98	66.15	88.20	-22.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

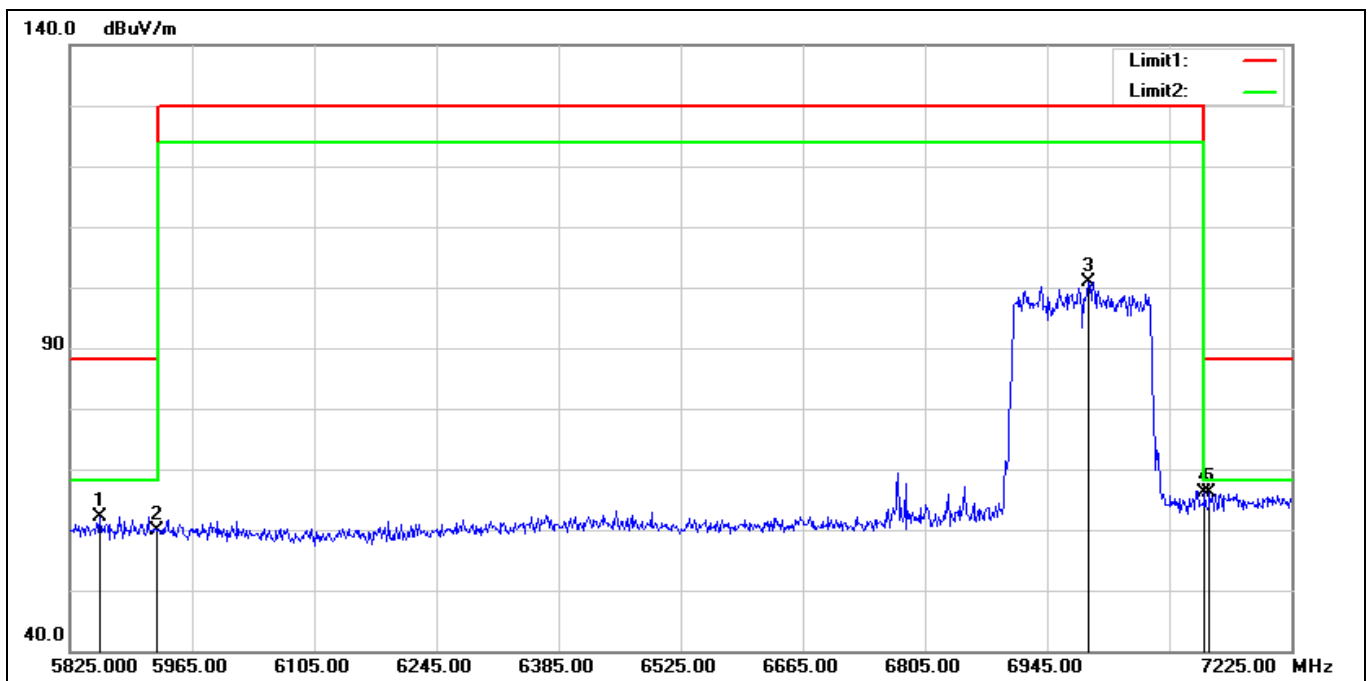


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5858.600	59.91	2.31	62.22	88.20	-25.98	peak
2	5925.000	57.77	2.23	60.00	88.20	-28.20	peak
3	6992.600	95.21	5.79	101.00	130.00	-29.00	peak
4*	7125.000	59.42	6.69	66.11	88.20	-22.09	peak
5	7131.200	59.37	6.71	66.08	88.20	-22.12	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

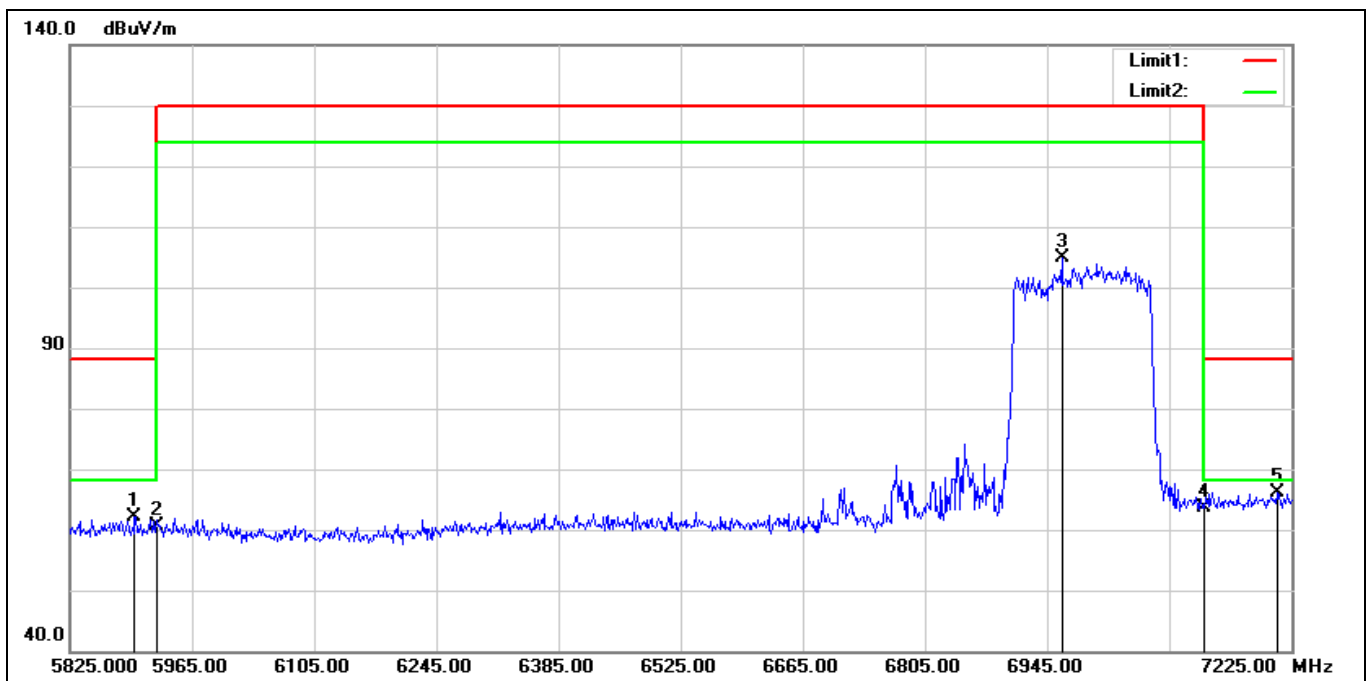


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5899.200	59.80	2.38	62.18	88.20	-26.02	peak
2	5925.000	58.30	2.23	60.53	88.20	-27.67	peak
3	6961.800	99.21	5.66	104.87	130.00	-25.13	peak
4	7125.000	56.82	6.69	63.51	88.20	-24.69	peak
5*	7208.200	59.15	7.05	66.20	88.20	-22.00	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

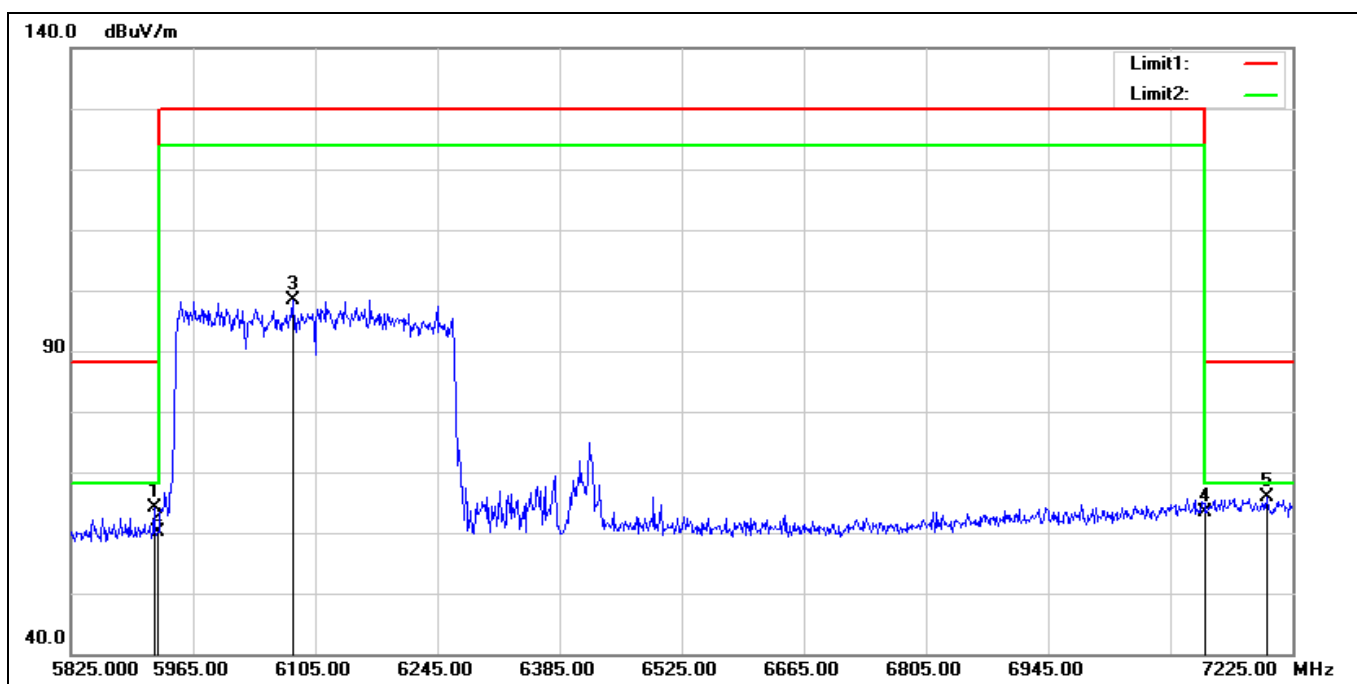


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5920.200	61.92	2.25	64.17	88.20	-24.03	peak
2	5925.000	57.90	2.23	60.13	88.20	-28.07	peak
3	6079.800	96.06	2.38	98.44	130.00	-31.56	peak
4	7125.000	56.73	6.69	63.42	88.20	-24.78	peak
5*	7195.600	58.86	7.00	65.86	88.20	-22.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

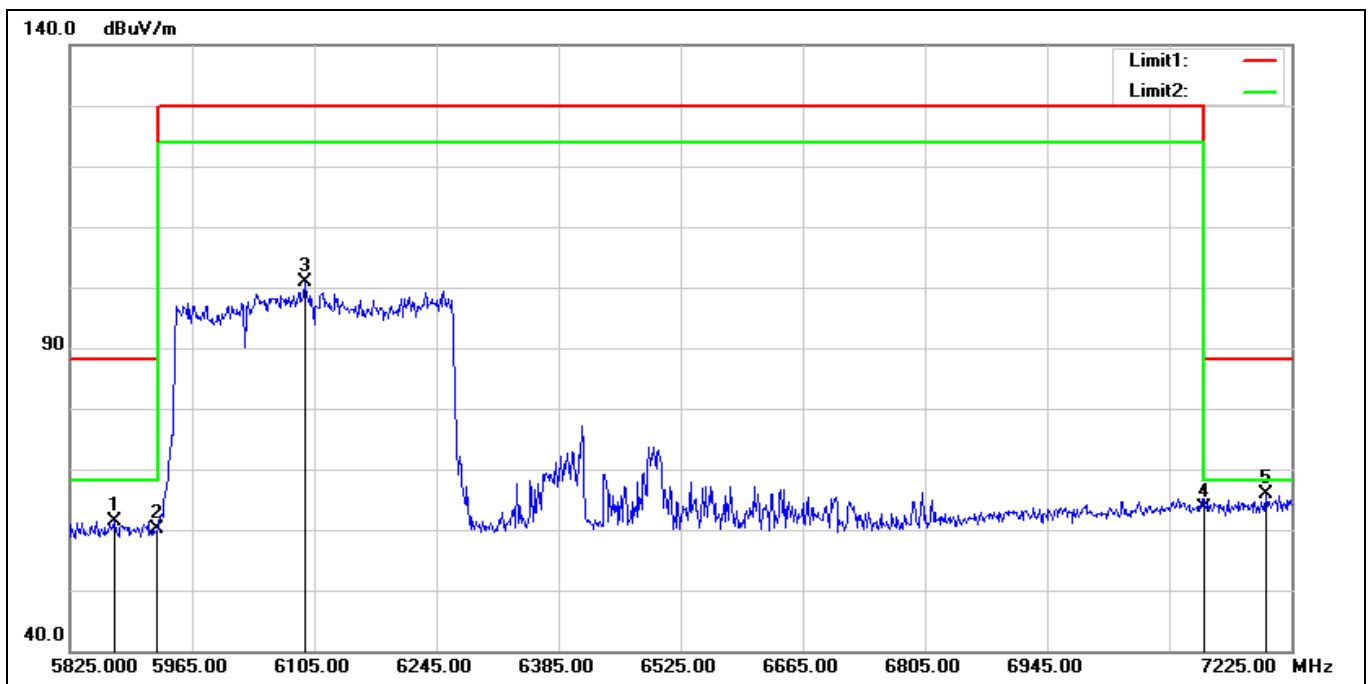


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5876.800	59.11	2.34	61.45	88.20	-26.75	peak
2	5925.000	57.86	2.23	60.09	88.20	-28.11	peak
3	6093.800	98.36	2.44	100.80	130.00	-29.20	peak
4	7125.000	56.97	6.69	63.66	88.20	-24.54	peak
5*	7195.600	58.83	7.00	65.83	88.20	-22.37	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

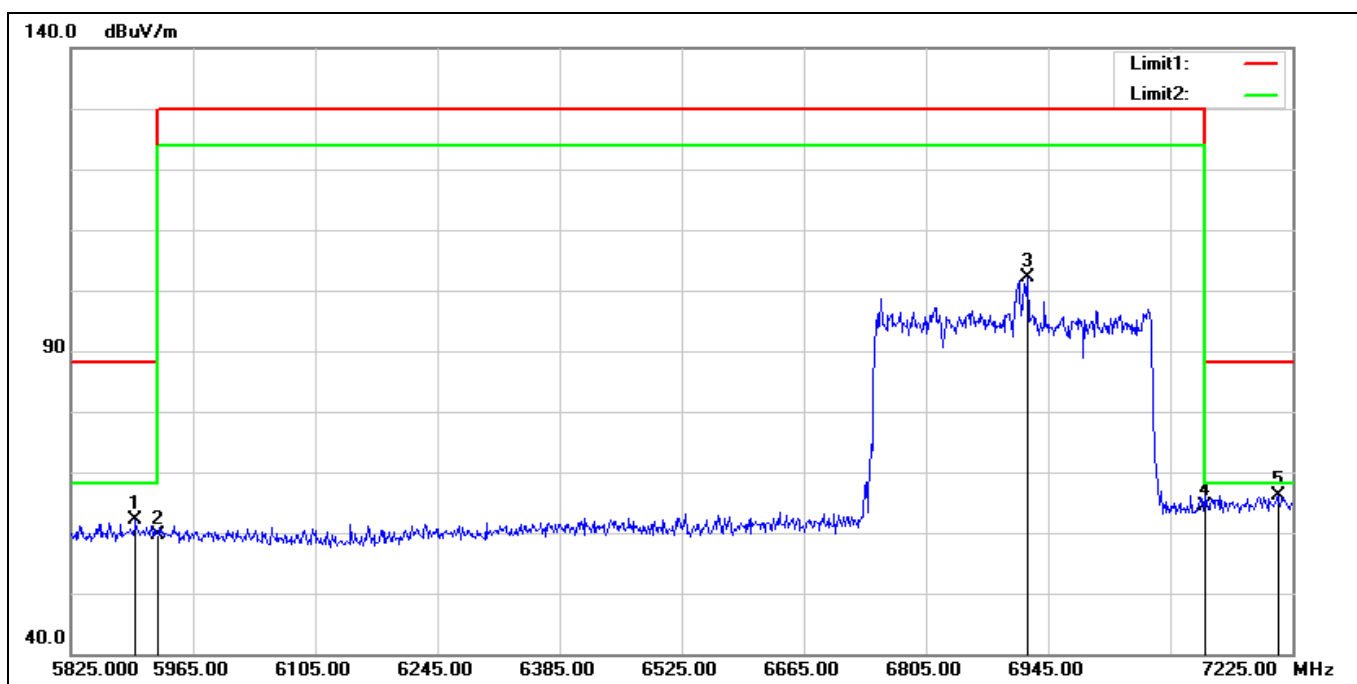

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5899.200	59.71	2.38	62.09	88.20	-26.11	peak
2	5925.000	57.42	2.23	59.65	88.20	-28.55	peak
3	6921.200	96.64	5.51	102.15	130.00	-27.85	peak
4	7125.000	57.59	6.69	64.28	88.20	-23.92	peak
5*	7208.200	59.07	7.05	66.12	88.20	-22.08	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

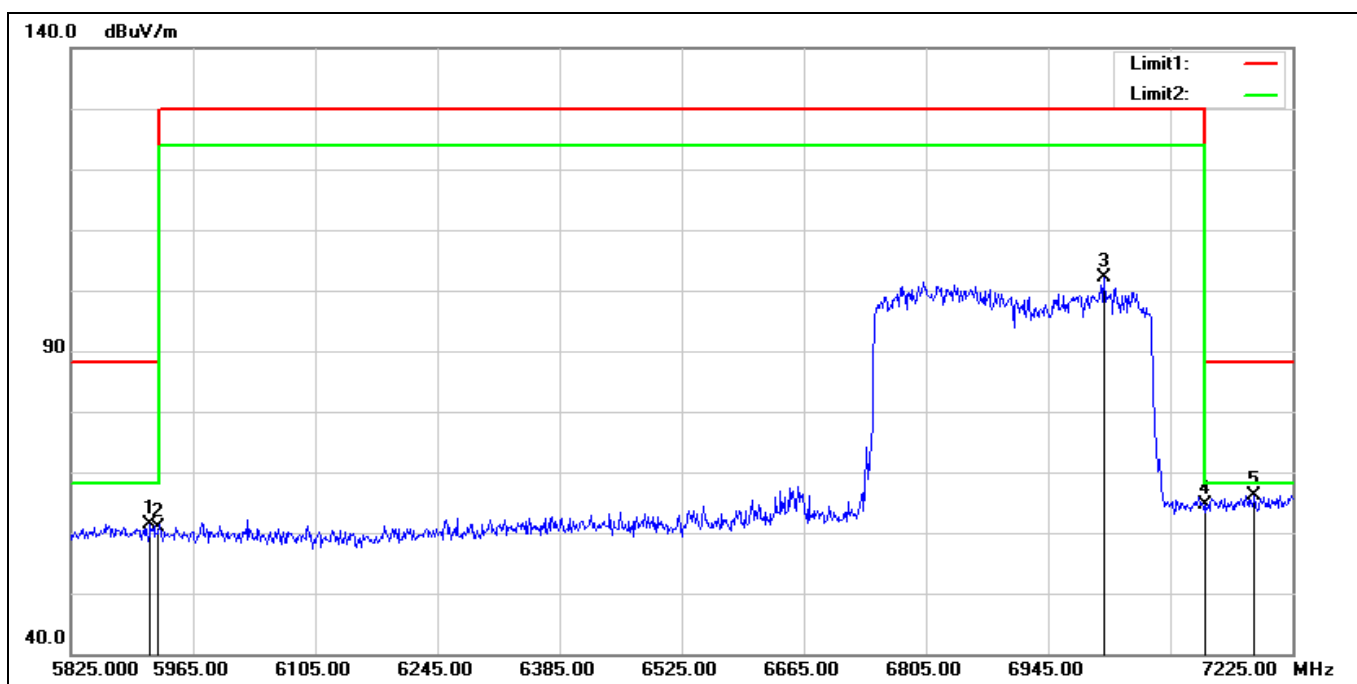

No.	Frequency (MHz)	Reading (dBUV)	Correction (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	5916.000	59.14	2.28	61.42	88.20	-26.78	peak
2	5925.000	58.61	2.23	60.84	88.20	-27.36	peak
3	7009.400	96.22	5.88	102.10	130.00	-27.90	peak
4	7125.000	57.94	6.69	64.63	88.20	-23.57	peak
5*	7181.600	59.24	6.93	66.17	88.20	-22.03	peak


Average

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 7115 MHz
Remark:

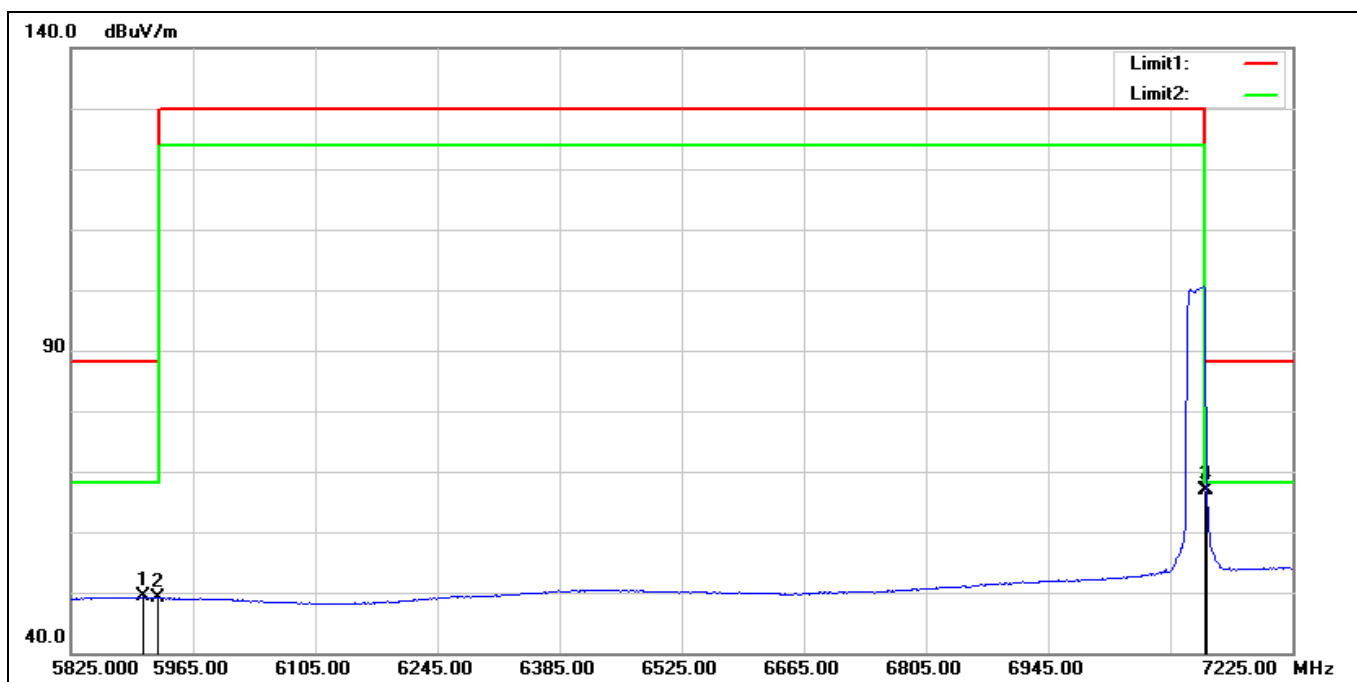

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5907.600	46.97	2.32	49.29	68.20	-18.91	AVG
2	5925.000	46.83	2.23	49.06	68.20	-19.14	AVG
3*	7125.000	60.23	6.69	66.92	68.20	-1.28	AVG
4	7127.000	60.12	6.69	66.81	68.20	-1.39	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

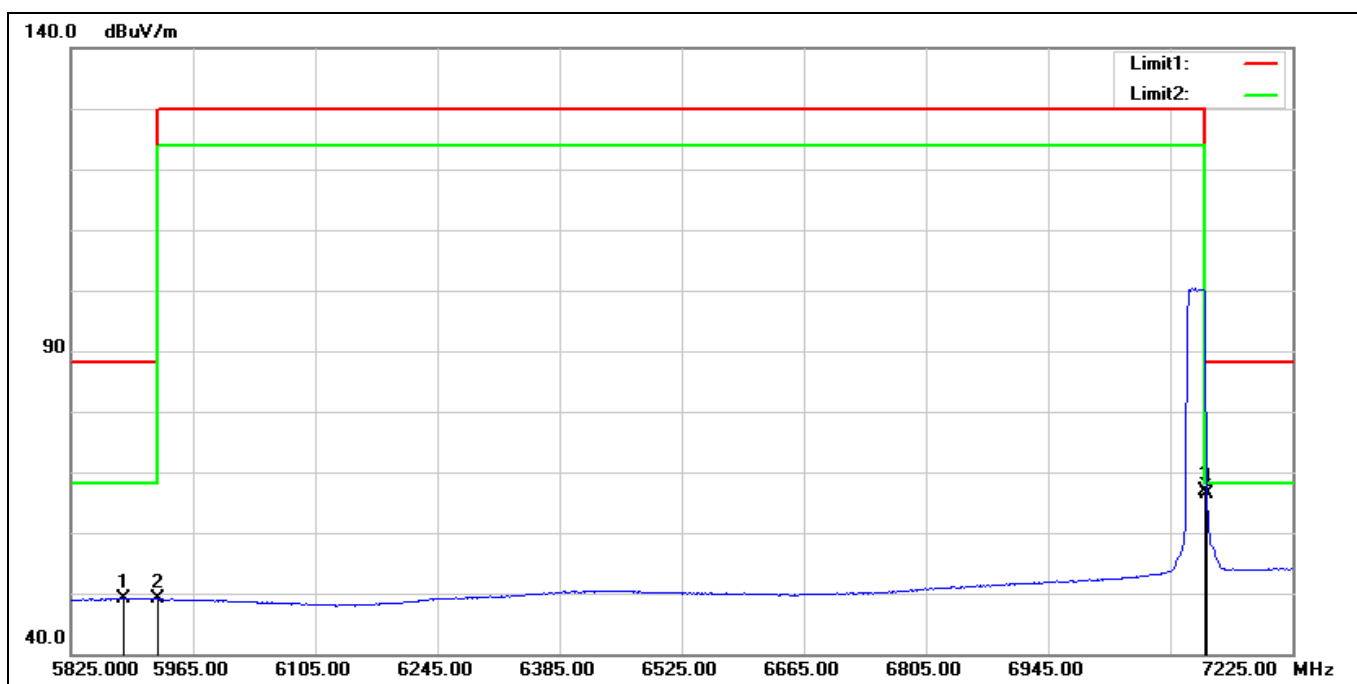

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5885.200	46.87	2.36	49.23	68.20	-18.97	AVG
2	5925.000	46.81	2.23	49.04	68.20	-19.16	AVG
3*	7125.000	60.14	6.69	66.83	68.20	-1.37	AVG
4	7127.000	59.69	6.69	66.38	68.20	-1.82	AVG

5.3. Conducted Test Results

5.3.1. Duty cycle

Duty cycle

1X1

Duty cycle						
Band	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ax_20	5955	5.472	5.592	97.85	0.09	0.18
802.11ax_40	5965	5.472	5.637	97.07	0.13	0.18
802.11ax_80	5985	5.472	5.607	97.59	0.11	0.18
802.11ax_160	6025	5.472	5.577	98.12	0.08	0.18
802.11be_20	5955	5.472	5.622	97.33	0.12	0.18
802.11be_40	5965	5.472	5.607	97.59	0.11	0.18
802.11be_80	5985	5.472	5.592	97.85	0.09	0.18
802.11be_160	6025	5.487	5.607	97.86	0.09	0.18
802.11be_320	6025	5.487	5.637	97.34	0.12	0.18

4X4

Duty cycle						
Band	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ax_20	5955	5.472	5.592	97.85	0.09	0.18
802.11ax_40	5965	5.472	5.637	97.07	0.13	0.18
802.11ax_80	5985	5.472	5.607	97.59	0.11	0.18
802.11ax_160	6025	5.472	5.577	98.12	0.08	0.18
802.11be_20	5955	5.472	5.622	97.33	0.12	0.18
802.11be_40	5965	5.472	5.607	97.59	0.11	0.18
802.11be_80	5985	5.472	5.592	97.85	0.09	0.18
802.11be_160	6025	5.487	5.607	97.86	0.09	0.18
802.11be_320	6025	5.487	5.637	97.34	0.12	0.18

Beamforming on

Duty cycle						
Band	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ax_20	5955	2.935	3.100	94.68	0.24	0.34
802.11ax_40	5965	3.645	3.760	96.94	0.13	0.27
802.11ax_80	5985	3.795	3.920	96.81	0.14	0.26
802.11ax_160	6025	3.825	4.640	82.44	0.84	0.26
802.11be_20	5955	2.935	3.150	93.17	0.31	0.34
802.11be_40	5965	3.645	3.810	95.67	0.19	0.27
802.11be_80	5985	3.805	3.930	96.82	0.14	0.26
802.11be_160	6025	3.135	3.950	79.37	1.00	0.32
802.11be_320	6025	1.615	2.470	65.38	1.85	0.62

■ Test Graphs

Reference Appendix B

5.3.2. Maximum Output Power Measurement

1X1

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE20	1	5955	12.71	3.49	0.09	16.29	0.043	30.00
	45	6175	11.40	4.81	0.09	16.30	0.043	30.00
	93	6415	10.32	5.92	0.09	16.33	0.043	30.00
	97	6435	10.15	6.00	0.09	16.24	0.042	30.00
	105	6475	9.57	6.22	0.09	15.88	0.039	30.00
	113	6515	9.60	6.41	0.09	16.10	0.041	30.00
	117	6535	9.58	6.46	0.09	16.13	0.041	30.00
	149	6695	9.87	6.23	0.09	16.19	0.042	30.00
	181	6855	9.74	6.64	0.09	16.47	0.044	30.00
	185	6875	9.59	6.57	0.09	16.25	0.042	30.00
	189	6895	9.72	6.49	0.09	16.30	0.043	30.00
	209	6995	9.32	6.89	0.09	16.30	0.043	30.00
	233	7115	9.14	6.90	0.09	16.13	0.041	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE40	3	5965	16.13	3.58	0.13	19.84	0.096	30.00
	43	6165	14.24	4.76	0.13	19.13	0.082	30.00
	91	6405	12.91	5.87	0.13	18.91	0.078	30.00
	99	6445	12.79	6.05	0.13	18.97	0.079	30.00
	107	6485	12.34	6.28	0.13	18.75	0.075	30.00
	115	6525	11.87	6.43	0.13	18.43	0.070	30.00
	123	6565	12.01	6.44	0.13	18.58	0.072	30.00
	147	6685	12.36	6.21	0.13	18.70	0.074	30.00
	179	6845	12.35	6.68	0.13	19.16	0.083	30.00
	187	6885	12.02	6.53	0.13	18.68	0.074	30.00
	195	6925	11.96	6.50	0.13	18.59	0.072	30.00
	211	7005	11.56	6.96	0.13	18.65	0.073	30.00
	227	7085	10.66	6.99	0.13	17.78	0.060	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE80	7	5985	18.46	3.77	0.11	22.34	0.171	30.00
	39	6145	17.62	4.66	0.11	22.39	0.173	30.00
	87	6385	15.21	5.80	0.11	21.12	0.129	30.00
	103	6465	15.09	6.16	0.11	21.36	0.137	30.00
	119	6545	14.47	6.48	0.11	21.06	0.128	30.00
	135	6625	14.01	6.23	0.11	20.35	0.108	30.00
	151	6705	13.82	6.25	0.11	20.18	0.104	30.00
	167	6785	13.51	6.69	0.11	20.31	0.107	30.00
	183	6865	13.23	6.61	0.11	19.95	0.099	30.00
	199	6945	13.35	6.52	0.11	19.98	0.100	30.00
	215	7025	13.23	7.10	0.11	20.44	0.111	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE160	15	6025	16.60	3.93	0.08	20.61	0.115	30.00
	47	6185	16.21	4.86	0.08	21.15	0.130	30.00
	79	6345	14.53	5.65	0.08	20.26	0.106	30.00
	111	6505	13.27	6.38	0.08	19.73	0.094	30.00
	143	6665	13.75	6.18	0.08	20.01	0.100	30.00
	175	6825	13.01	6.74	0.08	19.83	0.096	30.00
	207	6985	13.32	6.81	0.08	20.21	0.105	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT20	1	5955	12.69	3.49	0.12	16.30	0.043	30.00
	45	6175	11.98	4.81	0.12	16.91	0.049	30.00
	93	6415	11.08	5.92	0.12	17.12	0.051	30.00
	97	6435	10.17	6.00	0.12	16.29	0.043	30.00
	105	6475	9.99	6.22	0.12	16.33	0.043	30.00
	113	6515	9.98	6.41	0.12	16.51	0.045	30.00
	117	6535	10.34	6.46	0.12	16.92	0.049	30.00
	149	6695	10.12	6.23	0.12	16.47	0.044	30.00
	181	6855	9.96	6.64	0.12	16.72	0.047	30.00
	185	6875	10.08	6.57	0.12	16.77	0.047	30.00
	189	6895	9.96	6.49	0.12	16.57	0.045	30.00
	209	6995	9.67	6.89	0.12	16.68	0.047	30.00
	233	7115	9.81	6.90	0.12	16.83	0.048	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT40	3	5965	16.16	3.58	0.11	19.85	0.097	30.00
	43	6165	14.27	4.76	0.11	19.14	0.082	30.00
	91	6405	13.50	5.87	0.11	19.48	0.089	30.00
	99	6445	13.46	6.05	0.11	19.62	0.092	30.00
	107	6485	12.54	6.28	0.11	18.93	0.078	30.00
	115	6525	12.25	6.43	0.11	18.79	0.076	30.00
	123	6565	12.78	6.44	0.11	19.33	0.086	30.00
	147	6685	12.73	6.21	0.11	19.05	0.080	30.00
	179	6845	12.64	6.68	0.11	19.43	0.088	30.00
	187	6885	12.23	6.53	0.11	18.87	0.077	30.00
	195	6925	12.12	6.50	0.11	18.73	0.075	30.00
	211	7005	11.74	6.96	0.11	18.81	0.076	30.00
	227	7085	10.91	6.99	0.11	18.01	0.063	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT80	7	5985	18.52	3.77	0.09	22.38	0.173	30.00
	39	6145	17.64	4.66	0.09	22.39	0.173	30.00
	87	6385	15.34	5.80	0.09	21.23	0.133	30.00
	103	6465	15.13	6.16	0.09	21.38	0.137	30.00
	119	6545	14.51	6.48	0.09	21.08	0.128	30.00
	135	6625	14.17	6.23	0.09	20.49	0.112	30.00
	151	6705	13.91	6.25	0.09	20.25	0.106	30.00
	167	6785	13.56	6.69	0.09	20.34	0.108	30.00
	183	6865	13.30	6.61	0.09	20.00	0.100	30.00
	199	6945	13.38	6.52	0.09	19.99	0.100	30.00
	215	7025	13.29	7.10	0.09	20.48	0.112	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT160	15	6025	16.71	3.93	0.09	20.73	0.118	30.00
	47	6185	16.40	4.86	0.09	21.35	0.137	30.00
	79	6345	14.64	5.65	0.09	20.38	0.109	30.00
	111	6505	13.38	6.38	0.09	19.85	0.097	30.00
	143	6665	13.79	6.18	0.09	20.06	0.101	30.00
	175	6825	13.09	6.74	0.09	19.92	0.098	30.00
	207	6985	13.36	6.81	0.09	20.26	0.106	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT320	31	6105	18.31	4.49	0.12	22.92	0.196	30.00
	63	6265	16.13	5.13	0.12	21.38	0.137	30.00
	95	6425	15.60	5.96	0.12	21.68	0.147	30.00
	127	6585	14.92	6.36	0.12	21.40	0.138	30.00
	159	6745	13.89	6.39	0.12	20.40	0.110	30.00
	191	6905	13.82	6.48	0.12	20.42	0.110	30.00

4X4

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE20	1	5955	9.12	3.49	0.09	12.70	0.019	30.00
	45	6175	7.46	4.81	0.09	12.36	0.017	30.00
	93	6415	7.02	5.92	0.09	13.03	0.020	30.00
	97	6435	6.73	6.00	0.09	12.82	0.019	30.00
	105	6475	6.54	6.22	0.09	12.85	0.019	30.00
	113	6515	6.14	6.41	0.09	12.64	0.018	30.00
	117	6535	6.09	6.46	0.09	12.64	0.018	30.00
	149	6695	6.30	6.23	0.09	12.62	0.018	30.00
	181	6855	6.31	6.64	0.09	13.04	0.020	30.00
	185	6875	6.42	6.57	0.09	13.08	0.020	30.00
	189	6895	7.00	6.49	0.09	13.58	0.023	30.00
	209	6995	7.27	6.89	0.09	14.25	0.027	30.00
	233	7115	6.92	6.90	0.09	13.91	0.025	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE40	3	5965	12.20	3.58	0.13	15.91	0.039	30.00
	43	6165	10.88	4.76	0.13	15.76	0.038	30.00
	91	6405	9.77	5.87	0.13	15.77	0.038	30.00
	99	6445	9.99	6.05	0.13	16.17	0.041	30.00
	107	6485	9.27	6.28	0.13	15.68	0.037	30.00
	115	6525	9.60	6.43	0.13	16.17	0.041	30.00
	123	6565	9.36	6.44	0.13	15.93	0.039	30.00
	147	6685	9.73	6.21	0.13	16.07	0.040	30.00
	179	6845	9.42	6.68	0.13	16.23	0.042	30.00
	187	6885	9.76	6.53	0.13	16.42	0.044	30.00
	195	6925	9.56	6.50	0.13	16.19	0.042	30.00
	211	7005	9.26	6.96	0.13	16.35	0.043	30.00
	227	7085	9.72	6.99	0.13	16.83	0.048	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE80	7	5985	15.42	3.77	0.11	19.30	0.085	30.00
	39	6145	14.32	4.66	0.11	19.08	0.081	30.00
	87	6385	13.18	5.80	0.11	19.09	0.081	30.00
	103	6465	12.95	6.16	0.11	19.22	0.084	30.00
	119	6545	12.73	6.48	0.11	19.32	0.085	30.00
	135	6625	12.91	6.23	0.11	19.25	0.084	30.00
	151	6705	13.12	6.25	0.11	19.48	0.089	30.00
	167	6785	12.34	6.69	0.11	19.15	0.082	30.00
	183	6865	12.87	6.61	0.11	19.59	0.091	30.00
	199	6945	12.86	6.52	0.11	19.49	0.089	30.00
	215	7025	12.55	7.10	0.11	19.76	0.095	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE160	15	6025	17.80	3.93	0.08	21.81	0.152	30.00
	47	6185	16.04	4.86	0.08	20.98	0.125	30.00
	79	6345	15.47	5.65	0.08	21.20	0.132	30.00
	111	6505	15.71	6.38	0.08	22.17	0.165	30.00
	143	6665	15.79	6.18	0.08	22.04	0.160	30.00
	175	6825	15.02	6.74	0.08	21.84	0.153	30.00
	207	6985	15.19	6.81	0.08	22.08	0.161	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT20	1	5955	9.13	3.49	0.12	12.74	0.019	30.00
	45	6175	7.54	4.81	0.12	12.47	0.018	30.00
	93	6415	7.08	5.92	0.12	13.12	0.021	30.00
	97	6435	6.77	6.00	0.12	12.89	0.019	30.00
	105	6475	6.59	6.22	0.12	12.93	0.020	30.00
	113	6515	6.19	6.41	0.12	12.72	0.019	30.00
	117	6535	6.15	6.46	0.12	12.73	0.019	30.00
	149	6695	6.33	6.23	0.12	12.68	0.019	30.00
	181	6855	6.33	6.64	0.12	13.09	0.020	30.00
	185	6875	6.47	6.57	0.12	13.16	0.021	30.00
	189	6895	7.09	6.49	0.12	13.70	0.023	30.00
	209	6995	7.31	6.89	0.12	14.32	0.027	30.00
	233	7115	6.97	6.90	0.12	13.99	0.025	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT40	3	5965	12.49	3.58	0.11	16.18	0.042	30.00
	43	6165	11.02	4.76	0.11	15.89	0.039	30.00
	91	6405	9.98	5.87	0.11	15.96	0.039	30.00
	99	6445	10.14	6.05	0.11	16.30	0.043	30.00
	107	6485	9.44	6.28	0.11	15.83	0.038	30.00
	115	6525	9.70	6.43	0.11	16.24	0.042	30.00
	123	6565	9.46	6.44	0.11	16.01	0.040	30.00
	147	6685	9.83	6.21	0.11	16.15	0.041	30.00
	179	6845	9.50	6.68	0.11	16.28	0.043	30.00
	187	6885	9.85	6.53	0.11	16.49	0.045	30.00
	195	6925	9.63	6.50	0.11	16.24	0.042	30.00
	211	7005	9.38	6.96	0.11	16.45	0.044	30.00
	227	7085	9.76	6.99	0.11	16.86	0.049	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT80	7	5985	15.52	3.77	0.09	19.38	0.087	30.00
	39	6145	14.34	4.66	0.09	19.09	0.081	30.00
	87	6385	13.25	5.80	0.09	19.14	0.082	30.00
	103	6465	13.02	6.16	0.09	19.27	0.085	30.00
	119	6545	12.88	6.48	0.09	19.45	0.088	30.00
	135	6625	12.99	6.23	0.09	19.31	0.085	30.00
	151	6705	13.18	6.25	0.09	19.52	0.089	30.00
	167	6785	12.38	6.69	0.09	19.16	0.083	30.00
	183	6865	12.92	6.61	0.09	19.62	0.092	30.00
	199	6945	12.98	6.52	0.09	19.59	0.091	30.00
	215	7025	12.64	7.10	0.09	19.83	0.096	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT160	15	6025	17.98	3.93	0.09	22.00	0.159	30.00
	47	6185	16.07	4.86	0.09	21.02	0.127	30.00
	79	6345	15.50	5.65	0.09	21.24	0.133	30.00
	111	6505	15.75	6.38	0.09	22.22	0.167	30.00
	143	6665	15.83	6.18	0.09	22.09	0.162	30.00
	175	6825	15.07	6.74	0.09	21.90	0.155	30.00
	207	6985	15.27	6.81	0.09	22.17	0.165	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT320	31	6105	18.14	4.49	0.12	22.75	0.188	30.00
	63	6265	19.15	5.13	0.12	24.40	0.276	30.00
	95	6425	18.75	5.96	0.12	24.83	0.304	30.00
	127	6585	17.75	6.36	0.12	24.23	0.265	30.00
	159	6745	17.83	6.39	0.12	24.34	0.272	30.00
	191	6905	17.28	6.48	0.12	23.88	0.244	30.00

Beamforming on

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE20	1	5955	12.77	3.49	0.24	16.50	0.045	30.00
	45	6175	10.78	4.81	0.24	15.83	0.038	30.00
	93	6415	10.30	5.92	0.24	16.46	0.044	30.00
	97	6435	10.34	6.00	0.24	16.58	0.045	30.00
	105	6475	10.18	6.22	0.24	16.64	0.046	30.00
	113	6515	9.52	6.41	0.24	16.17	0.041	30.00
	117	6535	9.36	6.46	0.24	16.06	0.040	30.00
	149	6695	9.51	6.23	0.24	15.98	0.040	30.00
	181	6855	9.20	6.64	0.24	16.08	0.041	30.00
	185	6875	9.33	6.57	0.24	16.14	0.041	30.00
	189	6895	9.76	6.49	0.24	16.49	0.045	30.00
	209	6995	9.49	6.89	0.24	16.62	0.046	30.00
	233	7115	9.77	6.90	0.24	16.91	0.049	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE40	3	5965	15.40	3.58	0.13	19.11	0.081	30.00
	43	6165	14.35	4.76	0.13	19.24	0.084	30.00
	91	6405	12.21	5.87	0.13	18.21	0.066	30.00
	99	6445	12.06	6.05	0.13	18.24	0.067	30.00
	107	6485	12.30	6.28	0.13	18.71	0.074	30.00
	115	6525	11.57	6.43	0.13	18.13	0.065	30.00
	123	6565	11.40	6.44	0.13	17.97	0.063	30.00
	147	6685	11.50	6.21	0.13	17.84	0.061	30.00
	179	6845	10.89	6.68	0.13	17.70	0.059	30.00
	187	6885	10.41	6.53	0.13	17.07	0.051	30.00
	195	6925	10.50	6.50	0.13	17.13	0.052	30.00
	211	7005	10.86	6.96	0.13	17.95	0.062	30.00
	227	7085	10.46	6.99	0.13	17.58	0.057	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE80	7	5985	16.58	3.77	0.14	20.49	0.112	30.00
	39	6145	15.06	4.66	0.14	19.86	0.097	30.00
	87	6385	12.98	5.80	0.14	18.92	0.078	30.00
	103	6465	12.97	6.16	0.14	19.27	0.085	30.00
	119	6545	12.49	6.48	0.14	19.11	0.081	30.00
	135	6625	12.25	6.23	0.14	18.62	0.073	30.00
	151	6705	11.59	6.25	0.14	17.98	0.063	30.00
	167	6785	10.50	6.69	0.14	17.33	0.054	30.00
	183	6865	10.79	6.61	0.14	17.54	0.057	30.00
	199	6945	10.66	6.52	0.14	17.32	0.054	30.00
	215	7025	10.77	7.10	0.14	18.01	0.063	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11ax HE160	15	6025	16.24	3.93	0.84	21.01	0.126	30.00
	47	6185	16.52	4.86	0.84	22.22	0.167	30.00
	79	6345	14.95	5.65	0.84	21.44	0.139	30.00
	111	6505	15.88	6.38	0.84	23.10	0.204	30.00
	143	6665	15.48	6.18	0.84	22.49	0.178	30.00
	175	6825	14.68	6.74	0.84	22.26	0.168	30.00
	207	6985	15.77	6.81	0.84	23.42	0.220	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT20	1	5955	12.82	3.49	0.31	16.62	0.046	30.00
	45	6175	10.86	4.81	0.31	15.98	0.040	30.00
	93	6415	10.35	5.92	0.31	16.58	0.046	30.00
	97	6435	10.36	6.00	0.31	16.67	0.046	30.00
	105	6475	10.27	6.22	0.31	16.80	0.048	30.00
	113	6515	9.65	6.41	0.31	16.37	0.043	30.00
	117	6535	9.44	6.46	0.31	16.21	0.042	30.00
	149	6695	9.58	6.23	0.31	16.12	0.041	30.00
	181	6855	9.24	6.64	0.31	16.19	0.042	30.00
	185	6875	9.38	6.57	0.31	16.26	0.042	30.00
	189	6895	9.83	6.49	0.31	16.63	0.046	30.00
	209	6995	9.54	6.89	0.31	16.74	0.047	30.00
	233	7115	9.79	6.90	0.31	17.00	0.050	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT40	3	5965	15.46	3.58	0.19	19.23	0.084	30.00
	43	6165	14.39	4.76	0.19	19.34	0.086	30.00
	91	6405	12.25	5.87	0.19	18.31	0.068	30.00
	99	6445	12.10	6.05	0.19	18.34	0.068	30.00
	107	6485	12.37	6.28	0.19	18.84	0.077	30.00
	115	6525	11.61	6.43	0.19	18.23	0.067	30.00
	123	6565	11.53	6.44	0.19	18.15	0.065	30.00
	147	6685	11.52	6.21	0.19	17.92	0.062	30.00
	179	6845	10.94	6.68	0.19	17.80	0.060	30.00
	187	6885	10.55	6.53	0.19	17.27	0.053	30.00
	195	6925	10.79	6.50	0.19	17.48	0.056	30.00
	211	7005	10.92	6.96	0.19	18.07	0.064	30.00
	227	7085	10.60	6.99	0.19	17.78	0.060	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT80	7	5985	16.64	3.77	0.14	20.55	0.113	30.00
	39	6145	15.19	4.66	0.14	19.99	0.100	30.00
	87	6385	13.16	5.80	0.14	19.10	0.081	30.00
	103	6465	13.03	6.16	0.14	19.33	0.086	30.00
	119	6545	12.60	6.48	0.14	19.22	0.084	30.00
	135	6625	12.30	6.23	0.14	18.67	0.074	30.00
	151	6705	11.66	6.25	0.14	18.05	0.064	30.00
	167	6785	10.57	6.69	0.14	17.40	0.055	30.00
	183	6865	10.89	6.61	0.14	17.64	0.058	30.00
	199	6945	10.73	6.52	0.14	17.39	0.055	30.00
	215	7025	10.86	7.10	0.14	18.10	0.065	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT160	15	6025	16.37	3.93	1.00	21.30	0.135	30.00
	47	6185	16.57	4.86	1.00	22.43	0.175	30.00
	79	6345	15.01	5.65	1.00	21.66	0.146	30.00
	111	6505	15.98	6.38	1.00	23.36	0.217	30.00
	143	6665	15.53	6.18	1.00	22.71	0.186	30.00
	175	6825	14.88	6.74	1.00	22.62	0.183	30.00
	207	6985	15.84	6.81	1.00	23.65	0.232	30.00

Mode	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	EIRP(W)	Limit
11be_EHT320	31	6105	13.21	4.49	1.85	19.55	0.090	30.00
	63	6265	11.50	5.13	1.85	18.48	0.070	30.00
	95	6425	11.00	5.96	1.85	18.81	0.076	30.00
	127	6585	9.78	6.36	1.85	17.99	0.063	30.00
	159	6745	9.01	6.39	1.85	17.25	0.053	30.00
	191	6905	8.77	6.48	1.85	17.10	0.051	30.00

5.3.3. Emission Bandwidth Measurement

Reference Appendix A

5.3.4. Maximum Power Spectral Density Measurement

1X1

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT20	1	5955	H	-1.693	1.06	3.49	0.12	4.668	5.00	13.5
			V	-2.229						
	45	6175	H	-2.937	-0.10	4.81	0.12	4.831	5.00	14
			V	-3.288						
	93	6415	H	-3.945	-1.33	5.92	0.12	4.706	5.00	14.5
			V	-4.783						
	97	6435	H	-4.059	-1.33	6.00	0.12	4.792	5.00	14.5
			V	-4.637						
	105	6475	H	-4.583	-1.54	6.22	0.12	4.796	5.00	14
			V	-4.525						
	113	6515	H	-5.448	-1.63	6.41	0.12	4.900	5.00	14.5
			V	-3.959						
	117	6535	H	-5.438	-1.69	6.46	0.12	4.895	5.00	14.5
			V	-4.062						
	149	6695	H	-6.318	-1.65	6.23	0.12	4.702	5.00	15.5
			V	-3.461						
	181	6855	H	-6.378	-1.92	6.64	0.12	4.836	5.00	16.5
			V	-3.853						
	185	6875	H	-6.323	-1.90	6.57	0.12	4.788	5.00	17
			V	-3.849						
	189	6895	H	-6.348	-1.78	6.49	0.12	4.828	5.00	17
			V	-3.649						
	209	6995	H	-6.350	-2.10	6.89	0.12	4.907	5.00	15.5
			V	-4.152						
	233	7115	H	-6.384	-2.26	6.90	0.12	4.756	5.00	16
			V	-4.392						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT40	3	5965	H	-0.900	1.20	3.58	0.11	4.886	5.00	17
			V	-2.973						
	43	6165	H	-2.695	-0.16	4.76	0.11	4.708	5.00	17
			V	-3.709						
	91	6405	H	-4.508	-1.33	5.87	0.11	4.647	5.00	18
			V	-4.185						
	99	6445	H	-3.974	-1.17	6.05	0.11	4.986	5.00	18
			V	-4.406						
	107	6485	H	-4.449	-1.40	6.28	0.11	4.994	5.00	17.5
			V	-4.365						
	115	6525	H	-5.042	-1.55	6.43	0.11	4.994	5.00	17.5
			V	-4.120						
	123	6565	H	-5.395	-1.89	6.44	0.11	4.655	5.00	18
			V	-4.465						
	147	6685	H	-4.753	-1.53	6.21	0.11	4.790	5.00	18.5
			V	-4.337						
	179	6845	H	-5.593	-1.85	6.68	0.11	4.936	5.00	19
			V	-4.241						
	187	6885	H	-5.058	-1.68	6.53	0.11	4.960	5.00	19
			V	-4.352						
	195	6925	H	-5.294	-1.72	6.50	0.11	4.895	5.00	18.5
			V	-4.223						
	211	7005	H	-5.530	-2.34	6.96	0.11	4.728	5.00	18
			V	-5.181						
	227	7085	H	-5.336	-2.32	6.99	0.11	4.783	5.00	18
			V	-5.318						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT80	7	5985	H	-1.419	0.69	3.77	0.09	4.549	5.00	19.5
			V	-3.461						
	39	6145	H	-2.157	0.13	4.66	0.09	4.883	5.00	20
			V	-3.741						
	87	6385	H	-5.067	-2.02	5.80	0.09	3.868	5.00	20
			V	-4.998						
	103	6465	H	-5.030	-2.49	6.16	0.09	3.759	5.00	20
			V	-6.030						
	119	6545	H	-5.324	-1.78	6.48	0.09	4.788	5.00	20
			V	-4.318						
	135	6625	H	-6.767	-3.32	6.23	0.09	3.000	5.00	20
			V	-5.934						
	151	6705	H	-7.514	-3.60	6.25	0.09	2.743	5.00	20
			V	-5.857						
	167	6785	H	-7.540	-3.84	6.69	0.09	2.940	5.00	20
			V	-6.255						
	183	6865	H	-7.667	-4.24	6.61	0.09	2.462	5.00	20
			V	-6.867						
	199	6945	H	-7.365	-3.95	6.52	0.09	2.663	5.00	20
			V	-6.584						
	215	7025	H	-7.232	-4.01	7.10	0.09	3.183	5.00	20
			V	-6.813						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT160	15	6025	H	-6.684	-3.76	3.93	0.09	0.255	5.00	19
			V	-6.868						
	47	6185	H	-6.243	-3.69	4.86	0.09	1.256	5.00	20
			V	-7.218						
	79	6345	H	-8.822	-6.15	5.65	0.09	-0.417	5.00	20
			V	-9.537						
	111	6505	H	-10.693	-7.02	6.38	0.09	-0.547	5.00	19.5
			V	-9.450						
	143	6665	H	-10.532	-6.83	6.18	0.09	-0.563	5.00	20
			V	-9.243						
	175	6825	H	-11.329	-7.25	6.74	0.09	-0.419	5.00	20
			V	-9.399						
	207	6985	H	-10.030	-6.71	6.81	0.09	0.194	5.00	20
			V	-9.422						

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT320	31	6105	H	-7.582	-4.96	4.49	0.12	-0.346	5.00	20
			V	-8.387						
	63	6265	H	-8.706	-6.08	5.13	0.12	-0.834	5.00	20
			V	-9.520						
	95	6425	H	-10.451	-7.65	5.96	0.12	-1.575	5.00	20
			V	-10.890						
	127	6585	H	-10.874	-8.11	6.36	0.12	-1.631	5.00	20
			V	-11.384						
	159	6745	H	-12.181	-8.75	6.39	0.12	-2.235	5.00	20
			V	-11.368						
	191	6905	H	-12.703	-8.88	6.48	0.12	-2.284	5.00	20
			V	-11.213						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

4X4

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT20	1	5955	H	-0.269	1.17	3.49	0.12	4.776	5.00	6.5
			V	-4.341						
	45	6175	H	-1.030	-0.18	4.81	0.12	4.752	5.00	5.5
			V	-7.670						
	93	6415	H	-2.207	-1.06	5.92	0.12	4.976	5.00	7
			V	-7.421						
	97	6435	H	-2.540	-1.47	6.00	0.12	4.649	5.00	6.5
			V	-8.082						
	105	6475	H	-2.645	-1.69	6.22	0.12	4.655	5.00	6.5
			V	-8.713						
	113	6515	H	-2.674	-1.66	6.41	0.12	4.869	5.00	6
			V	-8.480						
	117	6535	H	-2.816	-1.85	6.46	0.12	4.731	5.00	6
			V	-8.848						
	149	6695	H	-2.612	-1.63	6.23	0.12	4.721	5.00	6.5
			V	-8.562						
	181	6855	H	-3.127	-1.99	6.64	0.12	4.775	5.00	6.5
			V	-8.345						
	185	6875	H	-3.377	-2.07	6.57	0.12	4.616	5.00	6.5
			V	-7.938						
	189	6895	H	-3.067	-1.62	6.49	0.12	4.995	5.00	7
			V	-7.079						
	209	6995	H	-3.517	-2.07	6.89	0.12	4.945	5.00	7.5
			V	-7.529						
	233	7115	H	-4.266	-2.47	6.90	0.12	4.549	5.00	8
			V	-7.176						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT40	3	5965	H	0.149	1.22	3.58	0.11	4.918	5.00	9
			V	-5.364						
	43	6165	H	-0.894	0.05	4.76	0.11	4.911	5.00	9
			V	-7.066						
	91	6405	H	-2.426	-1.35	5.87	0.11	4.627	5.00	9.5
			V	-7.950						
	99	6445	H	-2.284	-1.22	6.05	0.11	4.943	5.00	9.5
			V	-7.833						
	107	6485	H	-2.533	-1.51	6.28	0.11	4.885	5.00	9
			V	-8.267						
	115	6525	H	-2.864	-1.63	6.43	0.11	4.907	5.00	9.5
			V	-7.717						
	123	6565	H	-2.955	-1.62	6.44	0.11	4.923	5.00	9.5
			V	-7.411						
	147	6685	H	-2.916	-1.41	6.21	0.11	4.913	5.00	10
			V	-6.731						
	179	6845	H	-4.231	-2.03	6.68	0.11	4.754	5.00	10.5
			V	-6.043						
	187	6885	H	-3.778	-1.76	6.53	0.11	4.883	5.00	10.5
			V	-6.050						
	195	6925	H	-3.785	-1.84	6.50	0.11	4.774	5.00	10.5
			V	-6.253						
	211	7005	H	-4.266	-2.14	6.96	0.11	4.933	5.00	10.5
			V	-6.253						
	227	7085	H	-4.088	-2.24	6.99	0.11	4.857	5.00	11.5
			V	-6.843						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT80	7	5985	H	0.087	1.12	3.77	0.09	4.980	5.00	12
			V	-5.625						
	39	6145	H	-0.888	-0.03	4.66	0.09	4.716	5.00	12
			V	-7.520						
	87	6385	H	-1.804	-0.98	5.80	0.09	4.909	5.00	12.5
			V	-8.608						
	103	6465	H	-2.436	-1.43	6.16	0.09	4.820	5.00	12
			V	-8.277						
	119	6545	H	-2.869	-1.67	6.48	0.09	4.895	5.00	12
			V	-7.865						
	135	6625	H	-2.919	-1.63	6.23	0.09	4.686	5.00	12.5
			V	-7.550						
	151	6705	H	-2.847	-1.38	6.25	0.09	4.958	5.00	13
			V	-6.813						
	167	6785	H	-3.803	-2.02	6.69	0.09	4.762	5.00	13
			V	-6.741						
	183	6865	H	-3.639	-1.77	6.61	0.09	4.925	5.00	13.5
			V	-6.346						
	199	6945	H	-3.790	-1.83	6.52	0.09	4.779	5.00	14
			V	-6.231						
	215	7025	H	-4.295	-2.25	7.10	0.09	4.937	5.00	14
			V	-6.512						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT160	15	6025	H	-0.462	0.60	3.93	0.09	4.619	5.00	15
			V	-6.043						
	47	6185	H	-1.106	-0.33	4.86	0.09	4.618	5.00	15
			V	-8.195						
	79	6345	H	-1.869	-1.09	5.65	0.09	4.653	5.00	16
			V	-8.906						
	111	6505	H	-2.614	-1.51	6.38	0.09	4.959	5.00	16
			V	-8.005						
	143	6665	H	-2.719	-1.35	6.18	0.09	4.914	5.00	16.5
			V	-7.041						
	175	6825	H	-3.644	-1.88	6.74	0.09	4.947	5.00	17
			V	-6.648						
	207	6985	H	-4.055	-2.40	6.81	0.09	4.495	5.00	17
			V	-7.403						

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT320	31	6105	H	-0.801	0.30	4.49	0.12	4.905	5.00	17.5
			V	-6.220						
	63	6265	H	-1.191	-0.34	5.13	0.12	4.913	5.00	18
			V	-7.822						
	95	6425	H	-1.926	-1.09	5.96	0.12	4.992	5.00	18
			V	-8.643						
	127	6585	H	-2.631	-1.60	6.36	0.12	4.881	5.00	17.5
			V	-8.346						
	159	6745	H	-2.816	-1.56	6.39	0.12	4.950	5.00	18.5
			V	-7.561						
	191	6905	H	-4.056	-2.33	6.48	0.12	4.273	5.00	17.5
			V	-7.163						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Beamforming on

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT20	1	5955	H	-1.383	1.19	3.49	0.31	4.991	5.00	14
			V	-2.304						
	45	6175	H	-2.881	-0.54	4.81	0.31	4.576	5.00	14
			V	-4.352						
	93	6415	H	-3.802	-1.33	5.92	0.31	4.902	5.00	16
			V	-4.951						
	97	6435	H	-4.233	-1.35	6.00	0.31	4.958	5.00	16
			V	-4.496						
	105	6475	H	-4.412	-1.54	6.22	0.31	4.989	5.00	16
			V	-4.695						
	113	6515	H	-5.097	-2.06	6.41	0.31	4.662	5.00	16
			V	-5.039						
	117	6535	H	-5.636	-2.46	6.46	0.31	4.310	5.00	16
			V	-5.310						
	149	6695	H	-5.718	-2.16	6.23	0.31	4.377	5.00	17
			V	-4.690						
	181	6855	H	-5.891	-2.61	6.64	0.31	4.336	5.00	17
			V	-5.373						
	185	6875	H	-6.032	-2.64	6.57	0.31	4.236	5.00	17
			V	-5.307						
	189	6895	H	-5.596	-2.04	6.49	0.31	4.759	5.00	17
			V	-4.568						
	209	6995	H	-5.557	-2.28	6.89	0.31	4.922	5.00	17
			V	-5.035						
	233	7115	H	-6.551	-3.13	6.90	0.31	4.077	5.00	17
			V	-5.771						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT40	3	5965	H	-0.770	1.18	3.58	0.19	4.951	5.00	17
			V	-3.243						
	43	6165	H	-2.089	0.02	4.76	0.19	4.964	5.00	19
			V	-4.134						
	91	6405	H	-5.132	-2.33	5.87	0.19	3.732	5.00	20
			V	-5.554						
	99	6445	H	-5.045	-2.31	6.05	0.19	3.925	5.00	20
			V	-5.623						
	107	6485	H	-5.319	-2.12	6.28	0.19	4.351	5.00	20
			V	-4.948						
	115	6525	H	-5.514	-2.18	6.43	0.19	4.446	5.00	20
			V	-4.882						
	123	6565	H	-6.420	-3.00	6.44	0.19	3.624	5.00	20
			V	-5.643						
	147	6685	H	-7.412	-3.09	6.21	0.19	3.313	5.00	20
			V	-5.090						
	179	6845	H	-8.171	-3.85	6.68	0.19	3.019	5.00	20
			V	-5.851						
	187	6885	H	-7.870	-3.97	6.53	0.19	2.754	5.00	20
			V	-6.236						
	195	6925	H	-7.906	-3.98	6.50	0.19	2.711	5.00	20
			V	-6.232						
	211	7005	H	-7.729	-3.82	6.96	0.19	3.329	5.00	20
			V	-6.087						
	227	7085	H	-8.158	-4.35	6.99	0.19	2.826	5.00	20
			V	-6.689						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT80	7	5985	H	-3.424	-0.93	3.77	0.14	2.978	5.00	20
			V	-4.530						
	39	6145	H	-4.792	-2.36	4.66	0.14	2.438	5.00	20
			V	-6.042						
	87	6385	H	-6.891	-4.45	5.80	0.14	1.486	5.00	20
			V	-8.124						
	103	6465	H	-7.369	-4.49	6.16	0.14	1.811	5.00	20
			V	-7.634						
	119	6545	H	-7.853	-4.67	6.48	0.14	1.952	5.00	20
			V	-7.510						
	135	6625	H	-8.221	-5.14	6.23	0.14	1.232	5.00	20
			V	-8.076						
	151	6705	H	-9.197	-5.43	6.25	0.14	0.961	5.00	20
			V	-7.795						
	167	6785	H	-10.528	-7.08	6.69	0.14	-0.250	5.00	20
			V	-9.692						
	183	6865	H	-10.005	-6.64	6.61	0.14	0.111	5.00	20
			V	-9.320						
	199	6945	H	-10.105	-6.84	6.52	0.14	-0.182	5.00	20
			V	-9.613						
	215	7025	H	-10.465	-6.87	7.10	0.14	0.371	5.00	20
			V	-9.363						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT160	15	6025	H	-6.549	-3.99	3.93	1.00	0.937	5.00	20
			V	-7.510						
	47	6185	H	-6.652	-3.46	4.86	1.00	2.395	5.00	20
			V	-6.304						
	79	6345	H	-9.614	-5.46	5.65	1.00	1.187	5.00	20
			V	-7.568						
	111	6505	H	-9.204	-4.48	6.38	1.00	2.898	5.00	20
			V	-6.268						
	143	6665	H	-10.542	-4.67	6.18	1.00	2.503	5.00	20
			V	-5.975						
	175	6825	H	-11.004	-5.79	6.74	1.00	1.951	5.00	20
			V	-7.341						
	207	6985	H	-7.664	-4.03	6.81	1.00	3.774	5.00	20
			V	-6.503						

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Reading (dBm) H+V	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT320	31	6105	H	-11.976	-9.35	4.49	1.85	-3.012	5.00	20
			V	-12.787						
	63	6265	H	-13.322	-10.49	5.13	1.85	-3.513	5.00	20
			V	-13.693						
	95	6425	H	-15.586	-12.46	5.96	1.85	-4.648	5.00	20
			V	-15.353						
	127	6585	H	-16.589	-12.24	6.36	1.85	-4.030	5.00	20
			V	-14.229						
	159	6745	H	-18.165	-13.45	6.39	1.85	-5.207	5.00	20
			V	-15.235						
	191	6905	H	-19.165	-14.25	6.48	1.85	-5.924	5.00	20
			V	-15.946						

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

■ Test Graphs

Reference Appendix B

5.3.5. In-Band Emission (Mask) Measurement

Reference Appendix A

5.3.6. Contention Based Protocol Measurement

Contention Based Protocol							
Band	Bandwidth (MHz)	AWGN Freq. (MHz)	Number of Times	Number of Detection	AWGN Detection Probability (%)	Limit Probability (%)	Result
U-NII-5	20	6135	10	10	100	90	PASS
	320	5950	10	10	100	90	PASS
		6105	10	10	100	90	PASS
		6260	10	10	100	90	PASS
U-NII-6	20	6455	10	10	100	90	PASS
	320	6430	10	10	100	90	PASS
		6585	10	10	100	90	PASS
		6740	10	10	100	90	PASS
U-NII-7	20	6695	10	10	100	90	PASS
	320	6750	10	10	100	90	PASS
		6905	10	10	100	90	PASS
		7060	10	10	100	90	PASS
U-NII-8	20	7015	10	10	100	90	PASS
	320	6750	10	10	100	90	PASS
		6905	10	10	100	90	PASS
		7060	10	10	100	90	PASS

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

Contention Based Protocol Threshold Level Verify									
Band	Bandwidth (MHz)	Channel	Frequency (MHz)	Injected signal (AWGN)		Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Level	EUT Tx Status
				Freq. (MHz)	Power (dBm)				
U-NII-5	20	37	6135	6135	-59.3	2.70	-62.00	-62.00	OFF
					-72.3	2.70	-75.00	-62.00	Minimal
					-77.3	2.70	-80.00	-62.00	ON
	320	31	6105	5950	-59.3	2.70	-62.00	-62.00	OFF
					-75.3	2.70	-78.00	-62.00	Minimal
					-78.3	2.70	-81.00	-62.00	ON
				6105	-59.3	2.70	-62.00	-62.00	OFF
					-75.3	2.70	-78.00	-62.00	Minimal
					-77.3	2.70	-80.00	-62.00	ON
				6260	-59.3	2.70	-62.00	-62.00	OFF
					-69.3	2.70	-72.00	-62.00	Minimal
					-76.3	2.70	-79.00	-62.00	ON
U-NII-6	20	101	6455	6455	-59.7	2.30	-62.00	-62.00	OFF
					-74.7	2.30	-77.00	-62.00	Minimal
					-78.7	2.30	-81.00	-62.00	ON
	320	127	6585	6430	-59.7	2.30	-62.00	-62.00	OFF
					-79.7	2.30	-82.00	-62.00	Minimal
					-83.7	2.30	-86.00	-62.00	ON
				6585	-59.7	2.30	-62.00	-62.00	OFF
					-78.7	2.30	-81.00	-62.00	Minimal
					-80.7	2.30	-83.00	-62.00	ON
				6740	-59.7	2.30	-62.00	-62.00	OFF
					-76.7	2.30	-79.00	-62.00	Minimal
					-79.7	2.30	-82.00	-62.00	ON
U-NII-7	20	149	6695	6695	-58.7	3.30	-62.00	-62.00	OFF
					-73.7	3.30	-77.00	-62.00	Minimal
					-76.7	3.30	-80.00	-62.00	ON
	320	191	6905	6750	-58.7	3.30	-62.00	-62.00	OFF
					-79.7	3.30	-83.00	-62.00	Minimal
					-82.7	3.30	-86.00	-62.00	ON
				6905	-58.7	3.30	-62.00	-62.00	OFF
					-76.7	3.30	-80.00	-62.00	Minimal
					-80.7	3.30	-84.00	-62.00	ON
				7060	-58.7	3.30	-62.00	-62.00	OFF
					-77.7	3.30	-81.00	-62.00	Minimal
					-80.7	3.30	-84.00	-62.00	ON

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

Band	Bandwidth (MHz)	Channel	Frequency (MHz)	Injected signal (AWGN)		Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Level	EUT Tx Status
				Freq. (MHz)	Power (dBm)				
U-NII-8	20	213	7015	7015	-58.4	3.60	-62.00	-62.00	OFF
					-75.4	3.60	-79.00	-62.00	Minimal
					-79.4	3.60	-83.00	-62.00	ON
	320	191	6905	6750	-58.4	3.60	-62.00	-62.00	OFF
					-79.7	3.30	-83.00	-62.00	Minimal
					-82.7	3.30	-86.00	-62.00	ON
				6905	-58.4	3.60	-62.00	-62.00	OFF
					-76.7	3.30	-80.00	-62.00	Minimal
					-80.7	3.30	-84.00	-62.00	ON
				7060	-58.4	3.60	-62.00	-62.00	OFF
					-77.7	3.30	-81.00	-62.00	Minimal
					-80.7	3.30	-84.00	-62.00	ON

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

■ Test Graphs

Threshold level of AWGN interference Plot

Reference Appendix B

Contention Based Protocol Plot

Reference Appendix B

Contention Based Protocol Threshold Level Verify

Reference Appendix B

--- END---