

RF Test Report

Applicant : Plume Design, Inc.

Product Name : SuperPod with WiFi 7

Trade Name : Plume Design, Inc.

Model Number : PB1A

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Received Date : Sep. 27, 2024

Test Period : Oct. 14, 2024 ~ Dec. 26, 2024

Issued Date : Feb. 27, 2025

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range: 9 kHz to 325 GHz
Bade test site :
Test Firm Registration Number: 226252
Test Firm Designation Number: TW0010
Wugu test site :
Test Firm Registration Number: 191812
Test Firm Designation Number: TW0034

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised by
00	Feb. 27, 2025	Initial Issue	Rowan Hsieh

Verification of Compliance

Applicant : Plume Design, Inc.

Product Name : SuperPod with WiFi 7

Trade Name : Plume Design, Inc.

Model Number : PB1A

FCC ID : 2AG7G- PB1A

Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Measurement Uncertainty	6
1.4.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology.....	9
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step	12
3.3.	Configuration of Test System Details.....	13
3.4.	Test Instruments	15
4	Measurement Procedure.....	17
4.1.	AC Power Line Conducted Emission Measurement.....	17
4.2.	Radiated Emission Measurement.....	19
4.3.	Maximum Conducted Output Power Measurement.....	22
4.4.	6 dB RF Bandwidth Measurement.....	23
4.5.	Maximum Power Spectral Density Measurement.....	24
4.6.	Out of Band Conducted Emissions Measurement.....	25
4.7.	Antenna Measurement	26
5	Test Results	28
5.1.	Conducted Emission.....	28
5.2.	Radiated Emission Measurement.....	30
5.3.	Conducted Test Results.....	362

Appendix A. Test Data

Appendix B. Test Plots

Appendix C. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6 dB RF Bandwidth	PASS	-----
15.247(e)	Maximum Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.
Site Address: ☒ No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan (R.O.C.)
Site Address: ☐ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Measurement Uncertainty

Test Item	Frequency	Uncertainty				
		BD		WG		
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB		2.6 dB		
Conducted Output Power		1.1 dB		1.1 dB		
RF Bandwidth		4.5 %		4.5 %		
Power Spectral Density		1.1 dB		1.1 dB		
Duty Cycle		0.3 %		0.3 %		
Test Item	Frequency	Uncertainty				
		96601-BD	96603-BD	96602-WG	96603-WG	96604-WG
Radiated Emission	9 kHz ~ 30 MHz	1.8 dB	1.8 dB	1.9 dB	1.9 dB	1.9 dB
	30 MHz ~ 1000 MHz	4.7 dB	4.7 dB	4.7 dB	4.7 dB	4.5 dB
	1000 MHz ~ 18000 MHz	4.7 dB	4.8 dB	4.6 dB	4.7 dB	5.1 dB
	18000 MHz ~ 26500 MHz	4.0 dB	4.1 dB	3.9 dB	4.1 dB	4.3 dB
	26500 MHz ~ 40000 MHz	4.2 dB	4.2 dB	4.2 dB	4.2 dB	4.6 dB

1.4. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity(except Max. RF Output Power).

Applicant	Plume Design, Inc. 325 Lytton Ave., Palo Alto, CA 94301			
Product Name	SuperPod with WiFi 7			
Trade Name	Plume Design, Inc.			
Model Number	PB1A			
FCC ID	2AG7G- PB1A			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate (ns)
802.11b	2412 ~ 2462	DSSS	20 MHz	Up to 11 Mbps
802.11g	2412 ~ 2462	OFDM	20 MHz	Up to 54 Mbps
802.11n HT20	2412 ~ 2462	OFDM (64QAM)	20 MHz	Up to MSC 15
802.11n HT40	2422 ~ 2452	OFDM (64QAM)	40 MHz	Up to MSC 15
802.11ax HE20	2412 ~ 2462	OFDMA	20 MHz	Up to MSC 11
802.11ax HE40	2422 ~ 2452	OFDMA	40 MHz	Up to MSC 11
802.11be EHT20	2412 ~ 2462	OFDMA	20 MHz	Up to MSC 13
802.11be EHT40	2422 ~ 2452	OFDMA	40 MHz	Up to MSC 13
Antenna information	ANT	Type	Max. Gain (dBi)	
	ANT-0 (Ant 6)	PIFA Antenna	0.1	
	ANT-1 (Ant 7)	PIFA Antenna	-0.1	
Antenna Delivery	See section 3.1			
Operate Temp. Range	0 ~ +40 °C			
EUT Power Rating	100-240 V, 50-60 Hz, 0.8 A			

1X1

Frequency Band	Max. RF Output Power (W)
802.11b	0.302
802.11g	0.139
802.11n HT20	0.113
802.11n HT40	0.074
802.11ax HE20	0.112
802.11ax HE40	0.074
802.11be EHT20	0.117
802.11be EHT40	0.075

2X2

Frequency Band	Max. RF Output Power (W)
802.11b	0.569
802.11g	0.269
802.11n HT20	0.260
802.11n HT40	0.188
802.11ax HE20	0.267
802.11ax HE40	0.174
802.11be EHT20	0.272
802.11be EHT40	0.179

Beamforming on

Frequency Band	Max. RF Output Power (W)
802.11ax HE20	0.270
802.11ax HE40	0.074
802.11be EHT20	0.278
802.11be EHT40	0.076

BW 20M	CH	1	2	3	4	5	6	7	8	9	10	11	12	13
	Freq. (MHz)	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	---	---
BW 40M	CH	NA		3	4	5	6	7	8	9	10	11	NA	
	Freq. (MHz)			2422	2427	2432	2437	2442	2447	2452	---	---		

3 Test Methodology

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	Final-Test Mode
Transmit Mode	V
802.11b	V
802.11g	V
802.11n HT20	V
802.11n HT40	V
802.11ax HE20	
802.11ax HE40	
802.11be EHT20	V
802.11be EHT40	V

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

1X1: By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

2X2: By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Y axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note 1: Investigation has been done on all the possible configurations for searching the worst cases (2.4 GHz EHT Mode covers HE Mode). The table is a list of the test modes show in this test report.

Note 2: 802.11 ax only support full RU.

Note 3: This product supports normal mode and Beamforming on mode. According to power table, the normal mode is worst power. So, normal mode has to test and record results for Conducted.

1X1

Test Mode	ANT-0
802.11b	V
802.11g	V
802.11n HT20	V
802.11n HT40	V
802.11ax HE20	V
802.11ax HE40	V
802.11be EHT20	V
802.11be EHT40	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
802.11b	1TX	1	1, 6, 11
802.11g	1TX	6	1, 6, 11
802.11n HT20	1TX	6.5	1, 6, 11
802.11n HT40	1TX	13.5	3, 6, 9
802.11ax HE20	1TX	MCS0	1, 6, 11
802.11ax HE40	1TX	MCS0	3, 6, 9
802.11be EHT20	1TX	MCS0	1, 6, 11
802.11be EHT40	1TX	MCS0	3, 6, 9

2X2

Test Mode	ANT-0	ANT-1	ANT-0+1
802.11b	V	V	V
802.11g	V	V	V
802.11n HT20	V	V	V
802.11n HT40	V	V	V
802.11ax HE20	V	V	V
802.11ax HE40	V	V	V
802.11be EHT20	V	V	V
802.11be EHT40	V	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
802.11b	2TX (STBC)	1	1, 6, 11
802.11g	2TX (CDD)	6	1, 6, 11
802.11n HT20	2TX (CDD)	13	1, 6, 11
802.11n HT40	2TX (CDD)	27	3, 6, 9
802.11ax HE20	2TX (CDD)	MCS0	1, 6, 11
802.11ax HE40	2TX (CDD)	MCS0	3, 6, 9
802.11be EHT20	2TX (CDD)	MCS0	1, 6, 11
802.11be EHT40	2TX (CDD)	MCS0	3, 6, 9

Beamforming on

Test Mode	ANT-0	ANT-1	ANT-0+1
802.11ax HE20	V	V	V
802.11ax HE40	V	V	V
802.11be EHT20	V	V	V
802.11be EHT40	V	V	V


Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
802.11ax HE20	2TX (Beamforming on)	MCS0	1, 6, 11
802.11ax HE40	2TX (Beamforming on)	MCS0	3, 6, 9
802.11be EHT20	2TX (Beamforming on)	MCS0	1, 6, 11
802.11be EHT40	2TX (Beamforming on)	MCS0	3, 6, 9

3.2. EUT Test Step


1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

3.3. Configuration of Test System Details

Radiated Emission

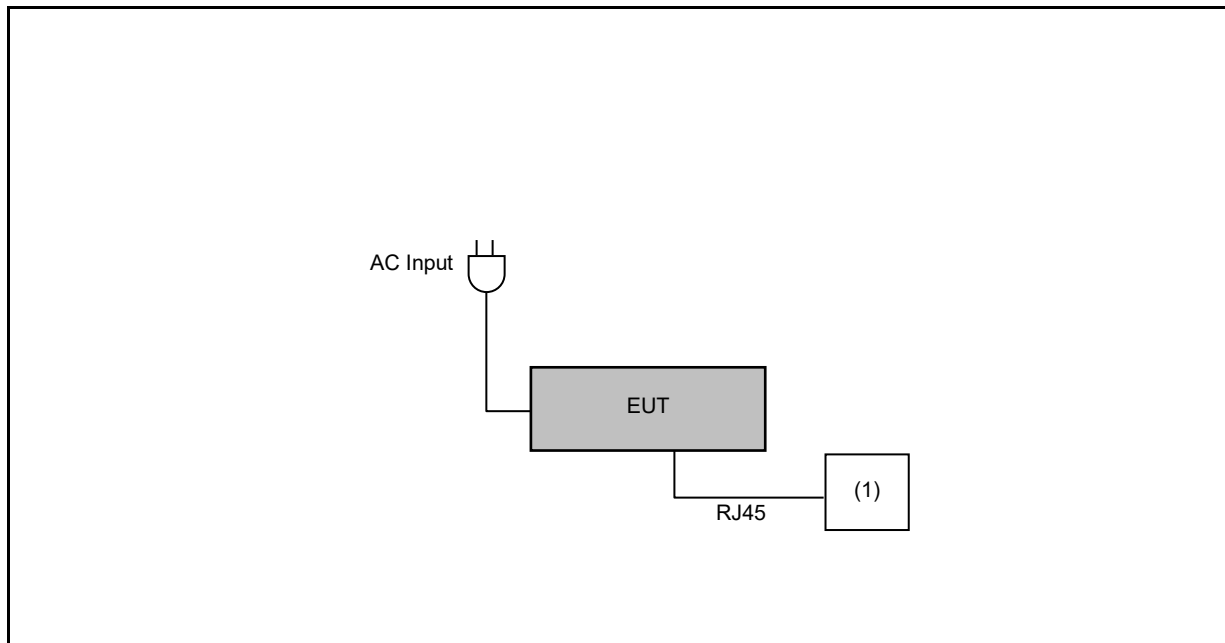

Conduction Emission

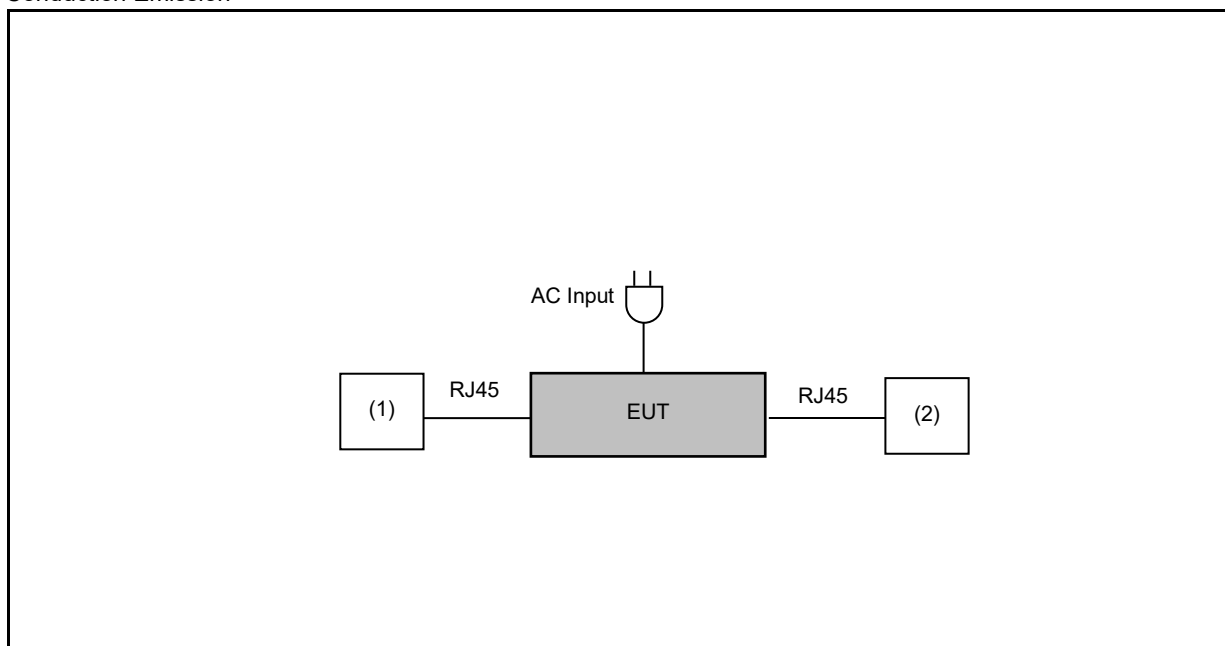

Devices Description					
Product		Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	ASUS	P1448U	---	---
(2)	Notebook	acer	N19C1	---	---

3.4. Test Instruments

For Conducted Emission

Test Period: Dec. 26, 2024 ~ Dec. 26, 2024

Testing Engineer: Jayson Hsieh

Test Site		Conduction01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Test Receiver	R&S	ESCI	100367	May 21, 2024	1 year
☒	LISN	R&S	ENV216	101040	Mar. 21, 2024	1 year
☒	RF Cable	Woken	00100D1380194M	TE-02-03	Jun. 05, 2024	1 year
☒	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

For Conducted

Test Period: Nov. 11, 2024 ~ Dec. 18, 2024

Testing Engineer: Brian Lin, Andy Lu

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Power Sensor	Anritsu	MA2411B	1126022	Aug. 29, 2024	1 year
☒	Power Meter	Anritsu	ML2495A	1135009	Aug. 29, 2024	1 year
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 15, 2024	1 year
☒	RF Switch Cable System	e-channel	ETF-1820	EC2300021	Jul. 19, 2024	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Oct. 14, 2024 ~ Dec. 18, 2024

Testing Engineer: Hung Chou, Eason Lee, Marc Yeh

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9020B	MY60112363	Jan. 10, 2024	1 year
☒	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 10, 2024	1 year
☒	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025 A1F	002	Jul. 31, 2024	1 year
☒	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Mar. 27, 2024	1 year
☒	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jun. 28, 2024	1 year
☒	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Aug. 30, 2024	1 year
☒	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Jul. 22, 2024	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A 100	J11006	Aug. 08, 2024	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A 900	J11004	Aug. 08, 2024	1 year
☒	Coaxial Cable	Titan	EMCCFD400-NM- NM-13000	210302	Aug. 08, 2024	1 year
☒	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

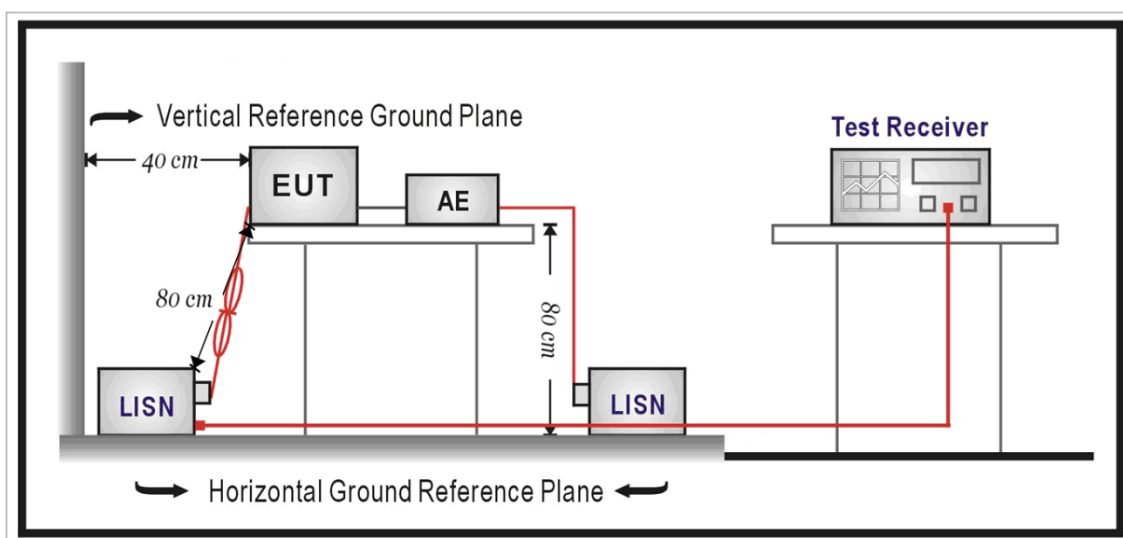

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with $50\ \Omega$ termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All $50\ \Omega$ ports of the LISN shall be resistively terminated into $50\ \Omega$ loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

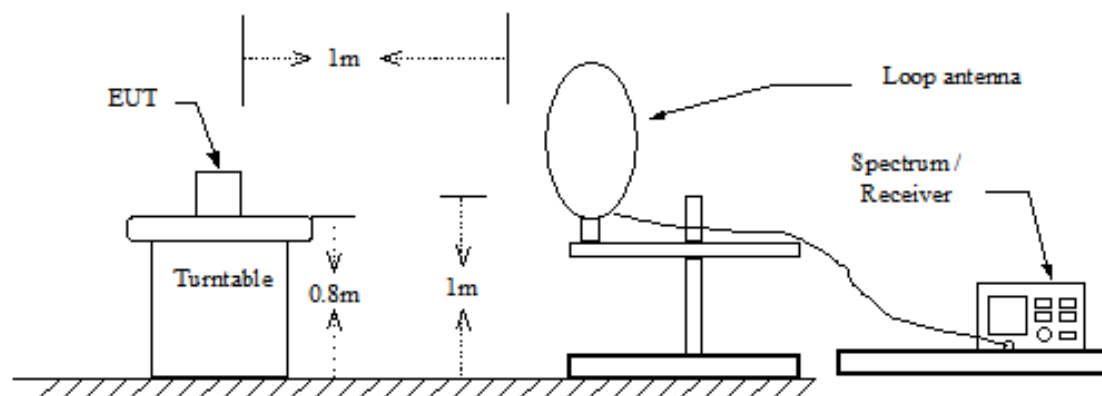

Below 1 GHz

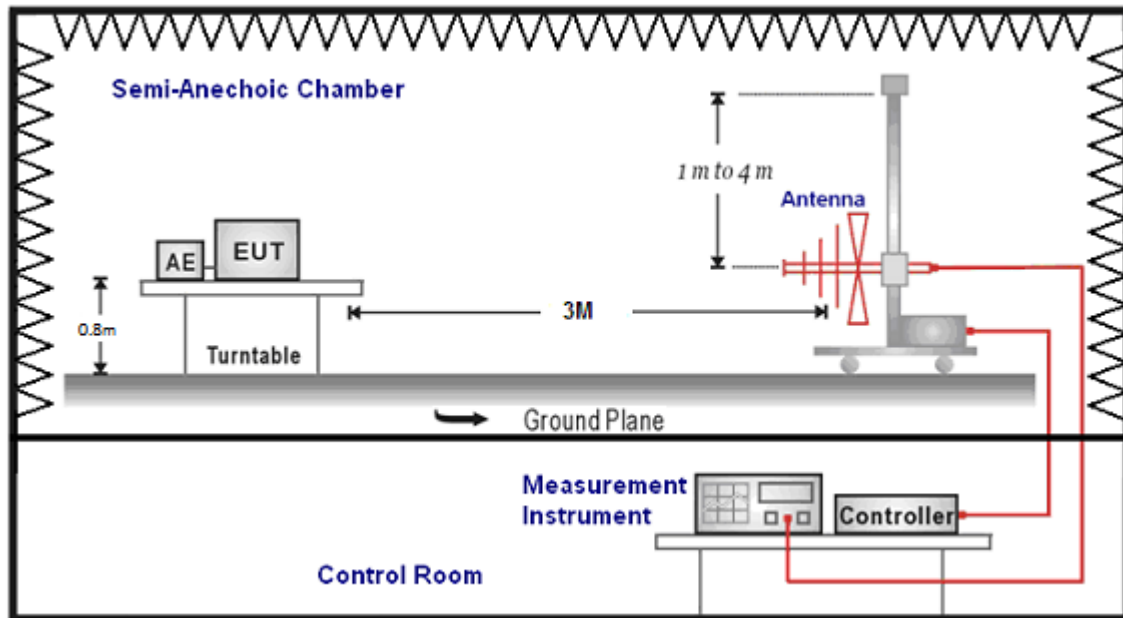

Above 1 GHz

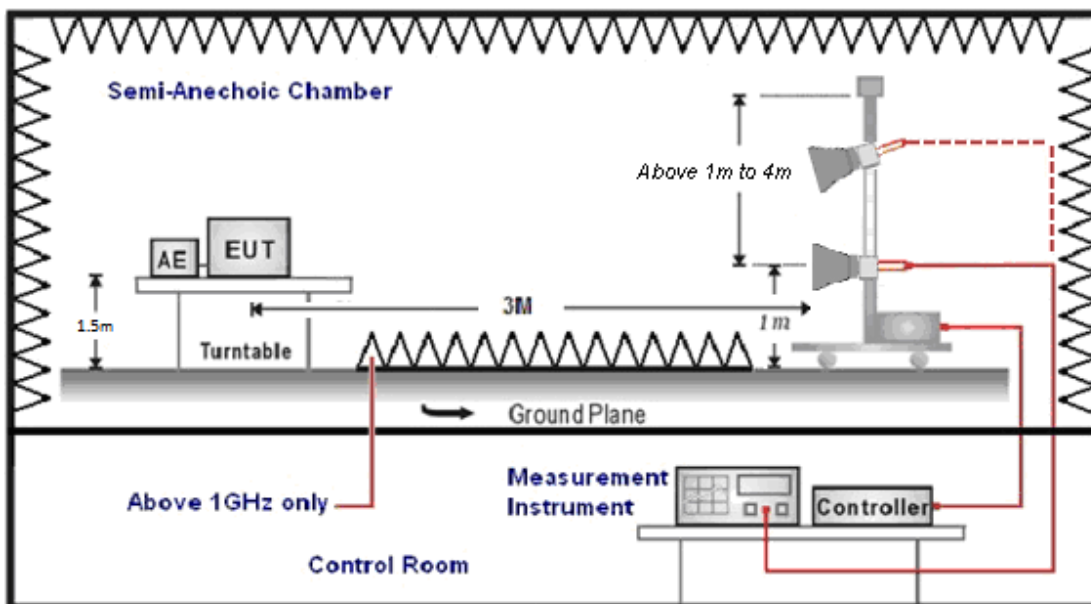

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 30 MHz the resolution bandwidth is set to 10 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements. The video bandwidth is 3 times of the resolution bandwidth.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / 1/T for average measurements when Duty cycle <0.98. A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.


4.3. Maximum Conducted Output Power Measurement

■ Limit

For systems using digital modulation in the 2400-2483.5 MHz, the limit for maximum output power is 30 dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Test Setup

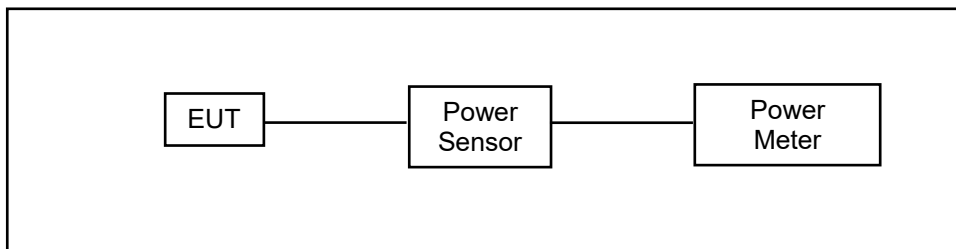

■ Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10:2013 section 11.9.2.3.2 Method AVGPM.


The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.

4.4. 6 dB RF Bandwidth Measurement

■ Limit

6 dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ Test Setup

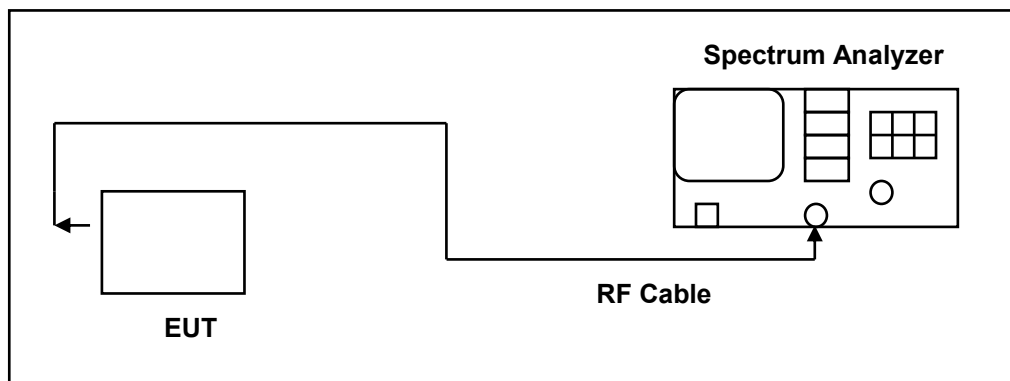

■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.8.2 option2 for compliance to FCC 47CFR 15.247 requirements.

6 dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.


The test was performed at 3 channels (Channel low, middle, high)

4.5. Maximum Power Spectral Density Measurement

■ Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Test Setup

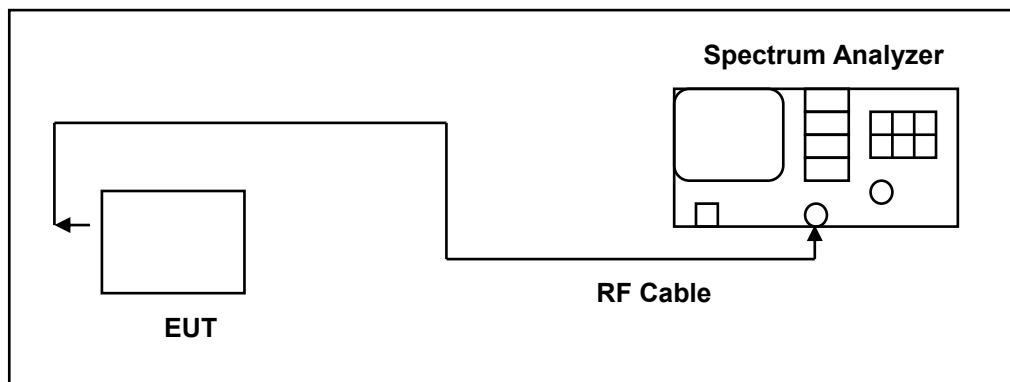

■ Test Procedure

The EUT tested to DTS test procedure of ANSI C63.10:2013 section 11.10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.6. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

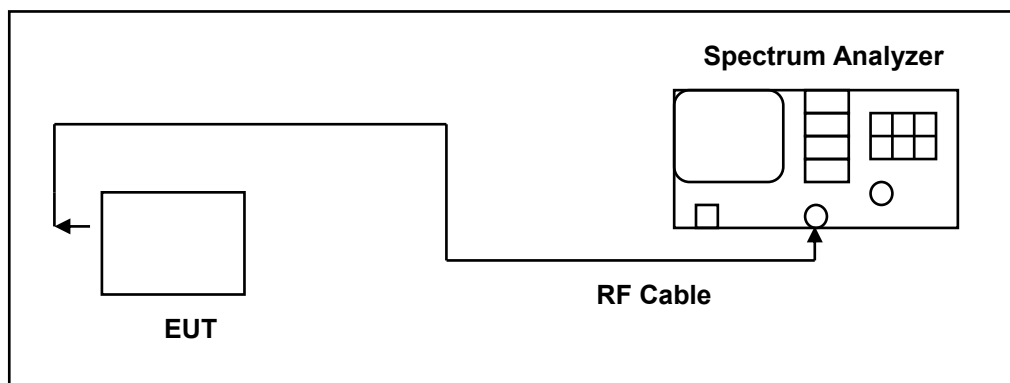

■ Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 30 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

4.7. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Description

See section 2 – antenna information.

■ Directional Gain Calculated

1X1									
-----	--	--	--	--	--	--	--	--	--

Test mode	Transmission Type	Antenna				Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
		Ant-0 (dBi)	Ant-1 (dBi)	Ant-2 (dBi)	Ant-3 (dBi)				
802.11b	Ant-0	0.10	-	-	-	0.10	0.10	0.00	0.00
802.11g	Ant-0	0.10	-	-	-	0.10	0.10	0.00	0.00
802.11n HT20 802.11n HT40 802.11ax HE20 802.11ax HE40 802.11be EHT20 802.11be EHT40	Ant-0	0.10	-	-	-	0.10	0.10	0.00	0.00

2X2

Test mode	Transmission Type	Antenna				Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
		Ant-0 (dBi)	Ant-1 (dBi)	Ant-2 (dBi)	Ant-3 (dBi)				
802.11b	STBC	0.10	-0.10	-	-	0.10	0.10	0.00	0.00
802.11g	CDD	0.10	-0.10	-	-	0.10	0.32	0.00	0.00
802.11n HT20 802.11n HT40 802.11ax HE20 802.11ax HE40 802.11be EHT20 802.11be EHT40	CDD	0.10	-0.10	-	-	0.10	0.32	0.00	0.00

Directional gain (Power) = GANT

Directional gain (PSD) = Array Gain

Beamforming on

Test mode	Transmission Type	Antenna				Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
		Ant-0 (dBi)	Ant-1 (dBi)	Ant-2 (dBi)	Ant-3 (dBi)				
802.11ax HE20 802.11ax HE40 802.11be EHT20 802.11be EHT40	Beamforming	0.10	-0.10	-	-	0.42	0.42	0.00	0.00


Directional gain (Power) = GANT + Array Gain

Directional gain (PSD) = GANT + Array Gain

5 Test Results

5.1. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit Mode		
Description:			

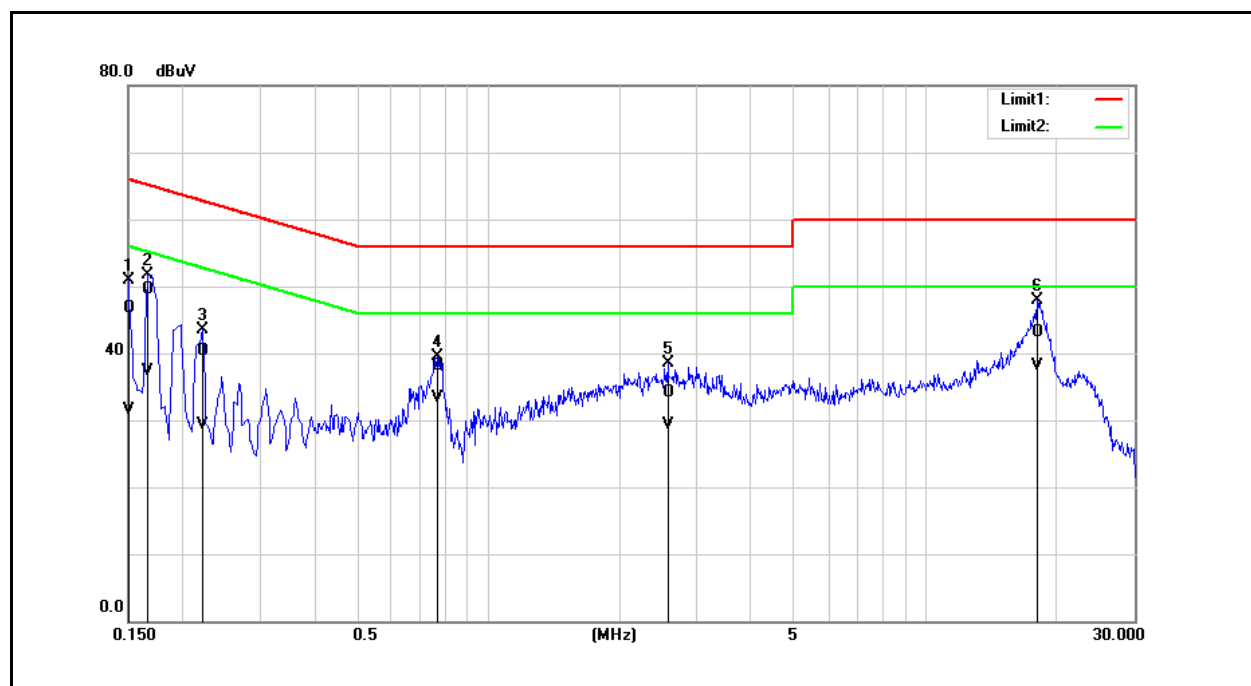


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	37.10	21.79	9.62	46.72	31.41	66.00	56.00	-19.28	-24.59	Pass
2	0.1660	39.97	27.65	9.63	49.60	37.28	65.16	55.16	-15.56	-17.88	Pass
3	0.2220	30.74	19.76	9.62	40.36	29.38	62.74	52.74	-22.38	-23.36	Pass
4	0.7660	28.54	23.65	9.66	38.20	33.31	56.00	46.00	-17.80	-12.69	Pass
5	2.5700	24.31	19.60	9.73	34.04	29.33	56.00	46.00	-21.96	-16.67	Pass
6	17.9540	33.06	28.04	10.00	43.06	38.04	60.00	50.00	-16.94	-11.96	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Transmit Mode		
Description:			

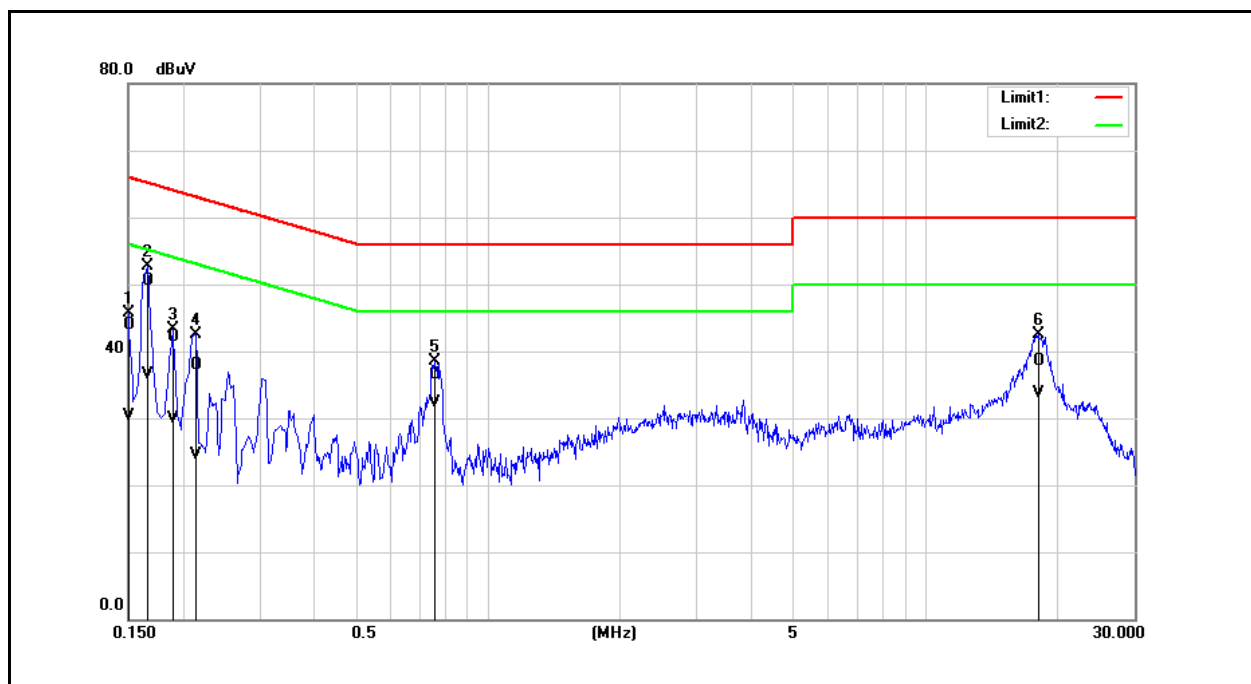

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	34.31	20.60	9.61	43.92	30.21	66.00	56.00	-22.08	-25.79	Pass
2	0.1660	40.98	26.95	9.62	50.60	36.57	65.16	55.16	-14.56	-18.59	Pass
3	0.1900	32.49	20.24	9.62	42.11	29.86	64.04	54.04	-21.93	-24.18	Pass
4	0.2140	28.24	14.89	9.62	37.86	24.51	63.05	53.05	-25.19	-28.54	Pass
5	0.7580	26.89	22.72	9.66	36.55	32.38	56.00	46.00	-19.45	-13.62	Pass
6	18.0940	28.45	23.55	10.09	38.54	33.64	60.00	50.00	-21.46	-16.36	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).


2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5.2. Radiated Emission Measurement

1X1


Below 1 GHz

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

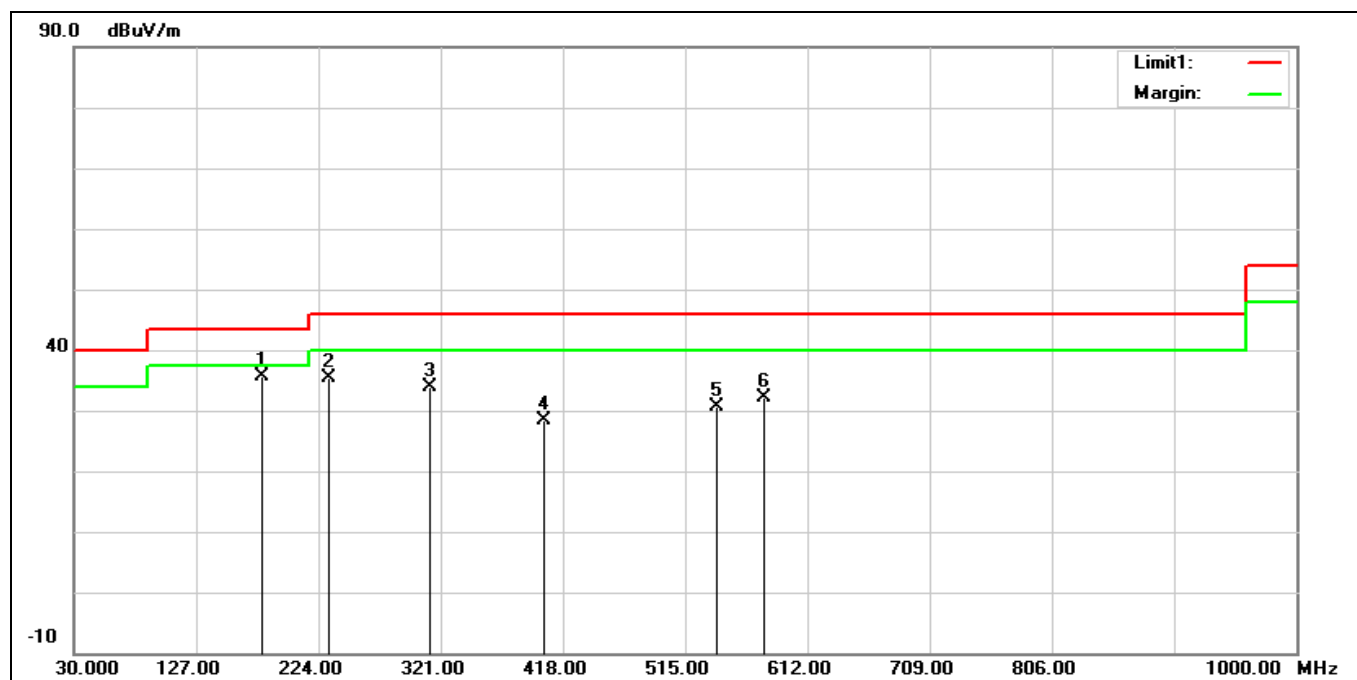

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	179.3800	43.43	-7.83	35.60	43.50	-7.90	QP
2	231.7600	43.50	-8.16	35.34	46.00	-10.66	QP
3	312.2700	39.17	-5.25	33.92	46.00	-12.08	QP
4	402.4800	31.92	-3.42	28.50	46.00	-17.50	QP
5	540.2200	31.89	-1.28	30.61	46.00	-15.39	QP
6	577.0800	32.46	-0.38	32.08	46.00	-13.92	QP

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

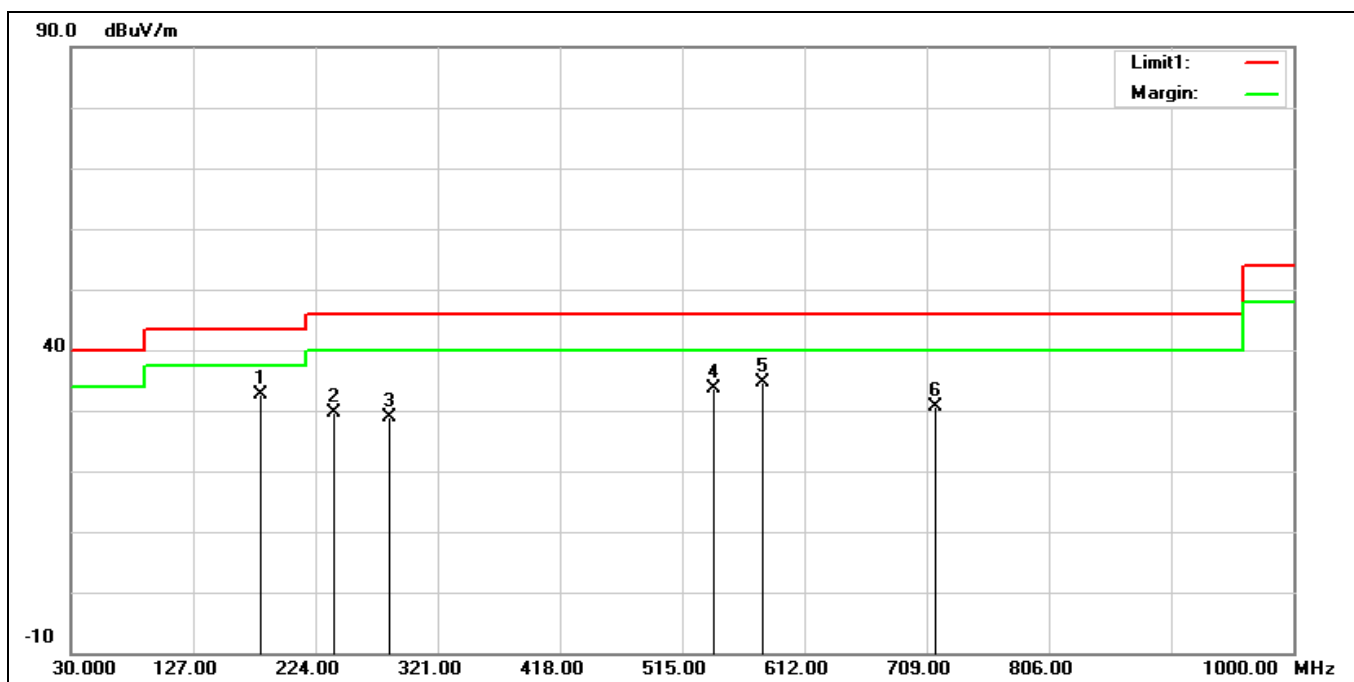


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	180.3500	40.56	-7.93	32.63	43.50	-10.87	QP
2	238.5500	37.35	-7.62	29.73	46.00	-16.27	QP
3	282.2000	34.73	-5.90	28.83	46.00	-17.17	QP
4	540.2200	34.97	-1.28	33.69	46.00	-12.31	QP
5	579.0200	34.95	-0.32	34.63	46.00	-11.37	QP
6	715.7900	28.42	2.23	30.65	46.00	-15.35	QP

Harmonic


Above 1 GHz

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2412 MHz		
Remark:			

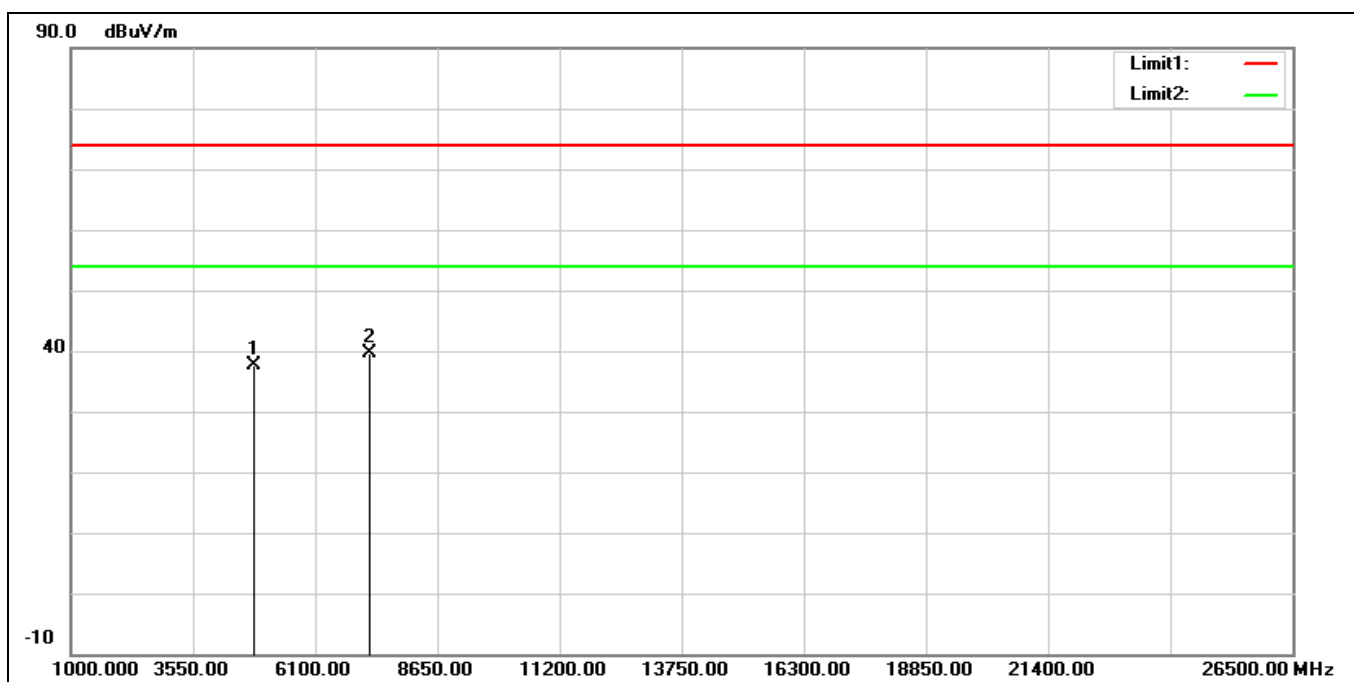


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.47	0.09	37.56	74.00	-36.44	peak
2*	7236.000	32.57	7.13	39.70	74.00	-34.30	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

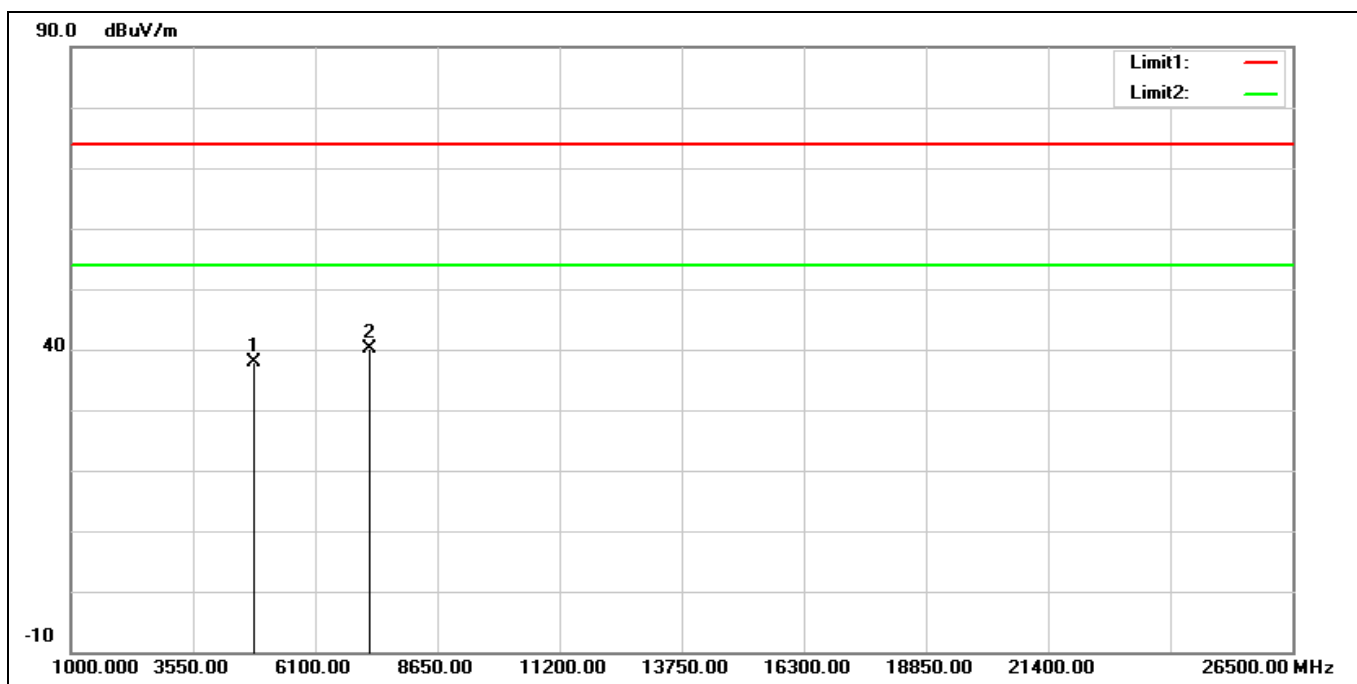


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.84	0.09	37.93	74.00	-36.07	peak
2*	7236.000	32.89	7.13	40.02	74.00	-33.98	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

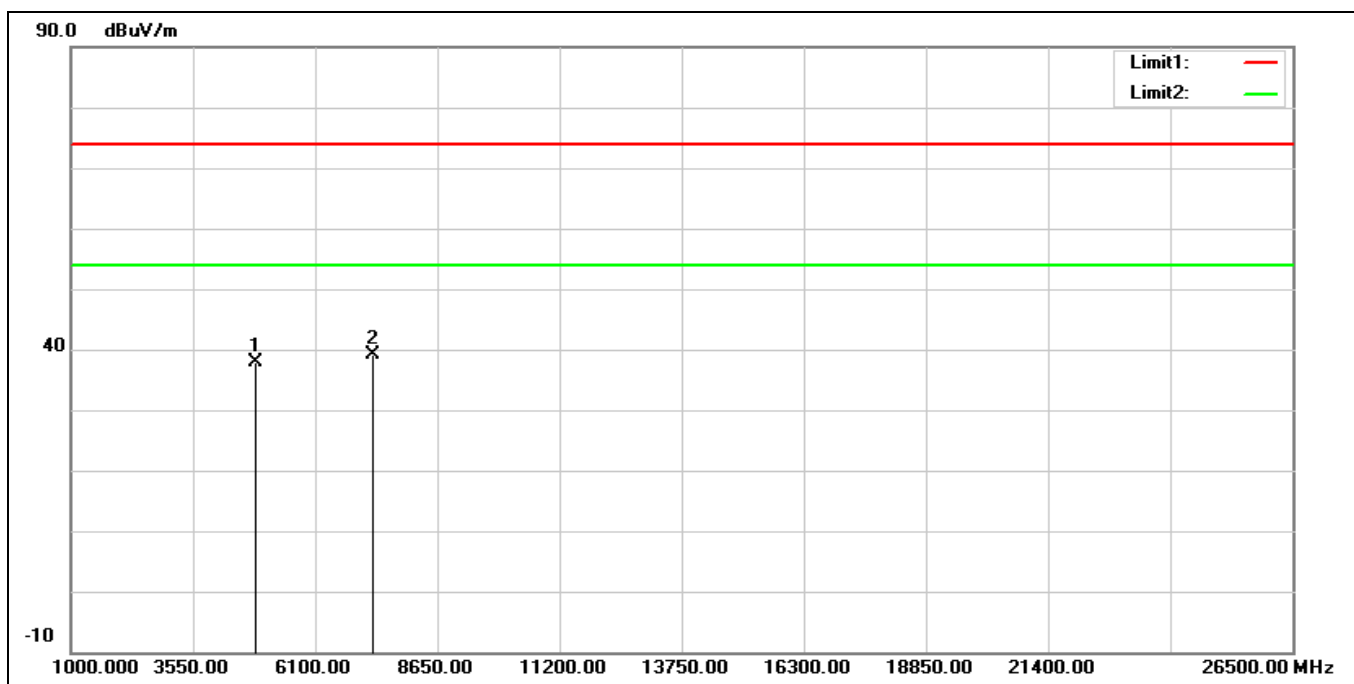


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.66	0.29	37.95	74.00	-36.05	peak
2*	7311.000	31.91	7.16	39.07	74.00	-34.93	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

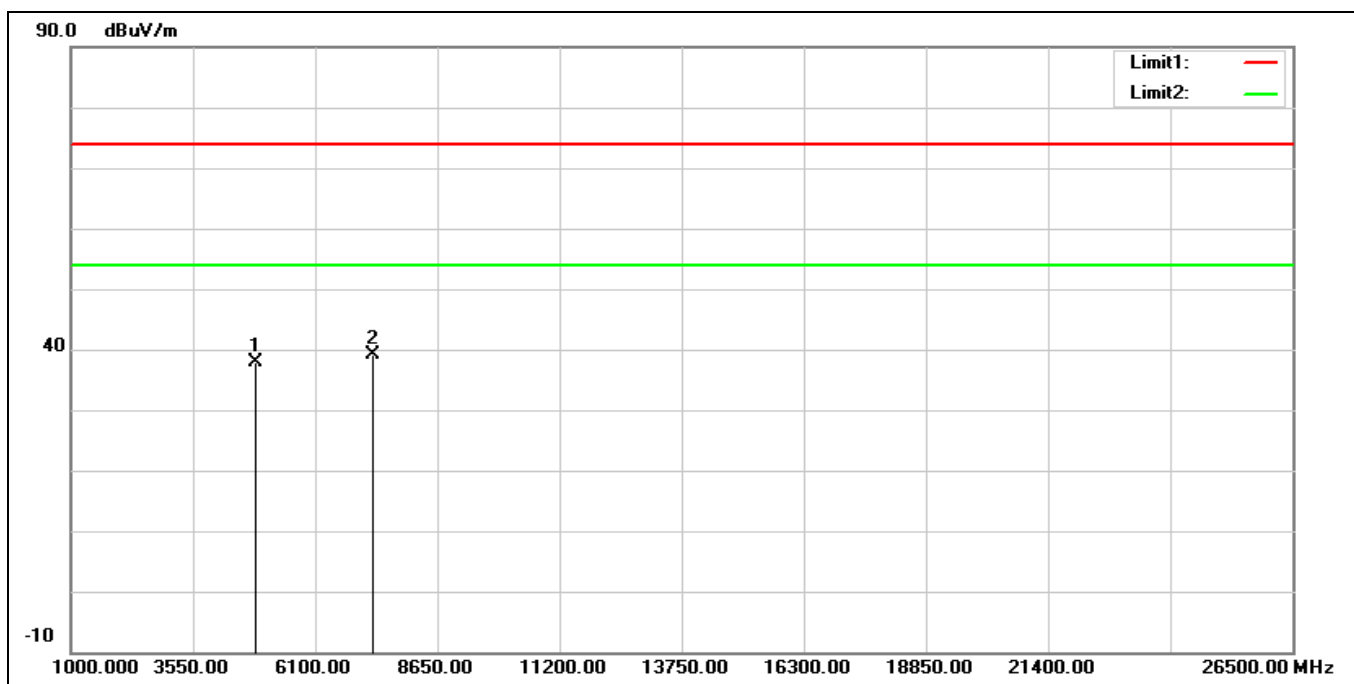


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.62	0.29	37.91	74.00	-36.09	peak
2*	7311.000	31.93	7.16	39.09	74.00	-34.91	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

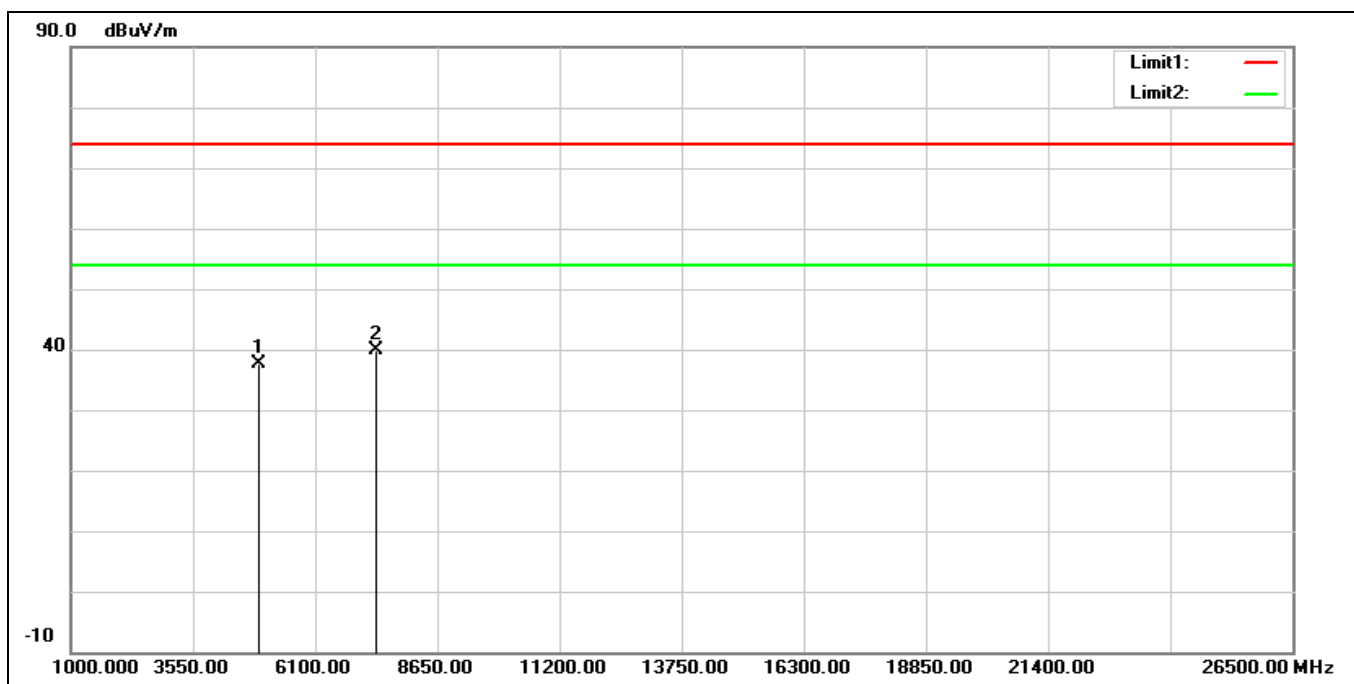


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.24	0.39	37.63	74.00	-36.37	peak
2*	7386.000	32.50	7.46	39.96	74.00	-34.04	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2462 MHz		
Remark:			

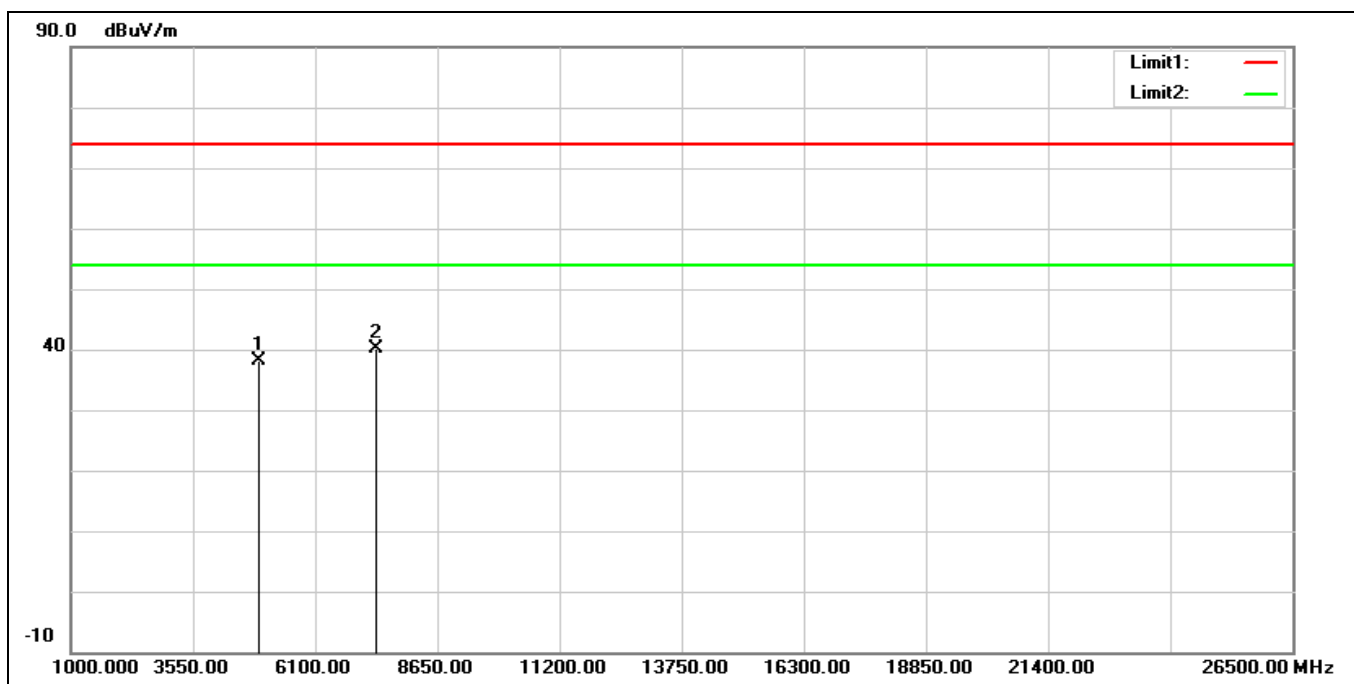


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.63	0.39	38.02	74.00	-35.98	peak
2*	7386.000	32.65	7.46	40.11	74.00	-33.89	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

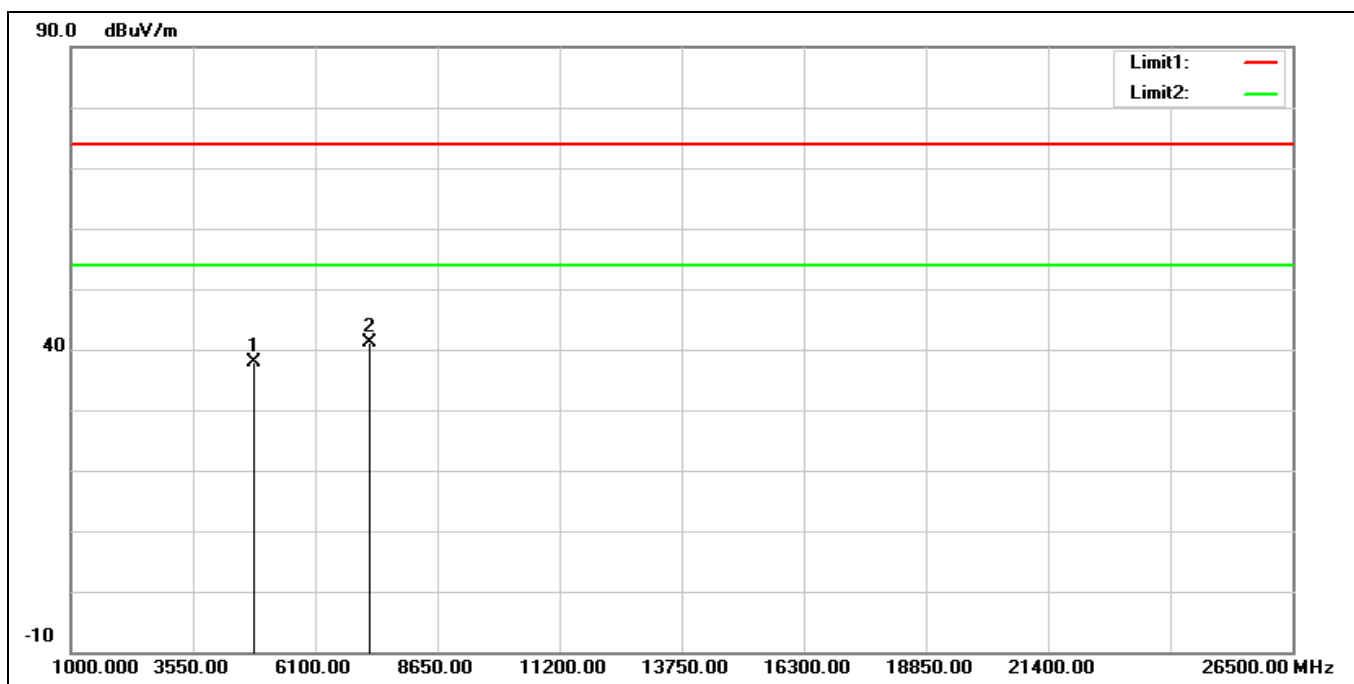


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.84	0.09	37.93	74.00	-36.07	peak
2*	7236.000	33.89	7.13	41.02	74.00	-32.98	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

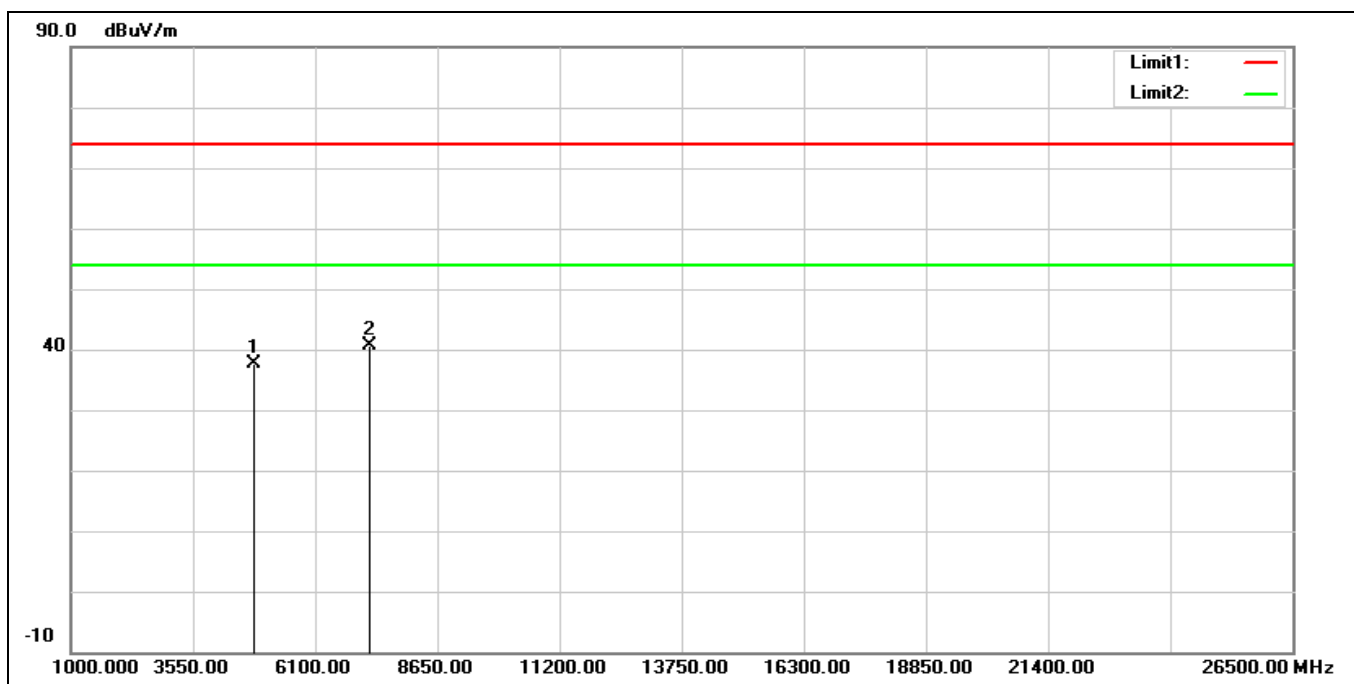


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.51	0.09	37.60	74.00	-36.40	peak
2*	7236.000	33.39	7.13	40.52	74.00	-33.48	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2437 MHz		
Remark:			

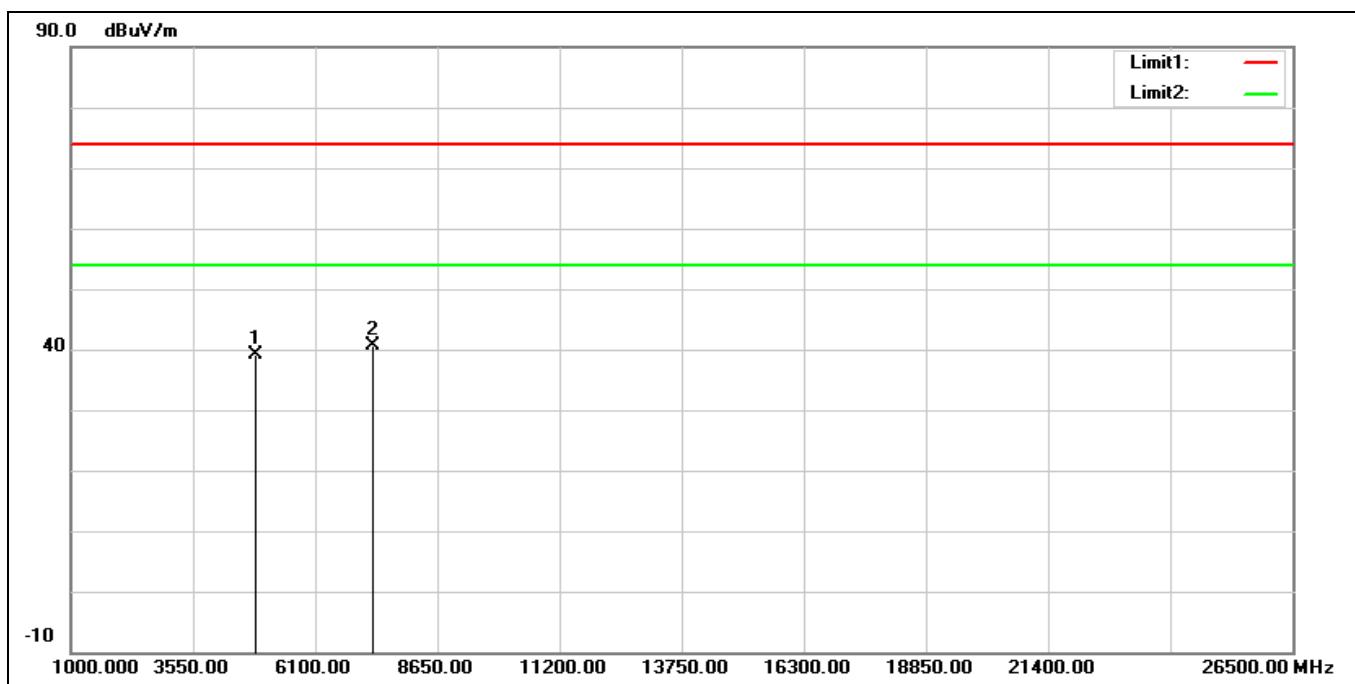


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.73	0.29	39.02	74.00	-34.98	peak
2*	7311.000	33.56	7.16	40.72	74.00	-33.28	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

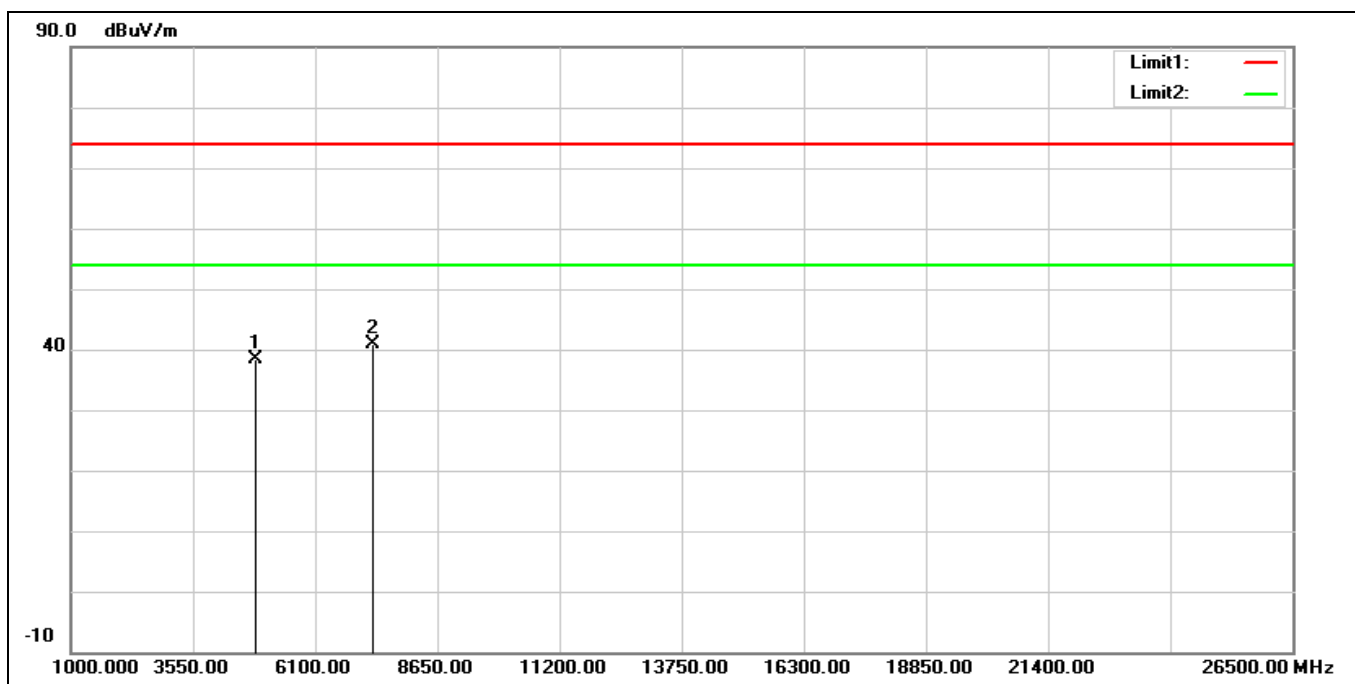


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.98	0.29	38.27	74.00	-35.73	peak
2*	7311.000	33.63	7.16	40.79	74.00	-33.21	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

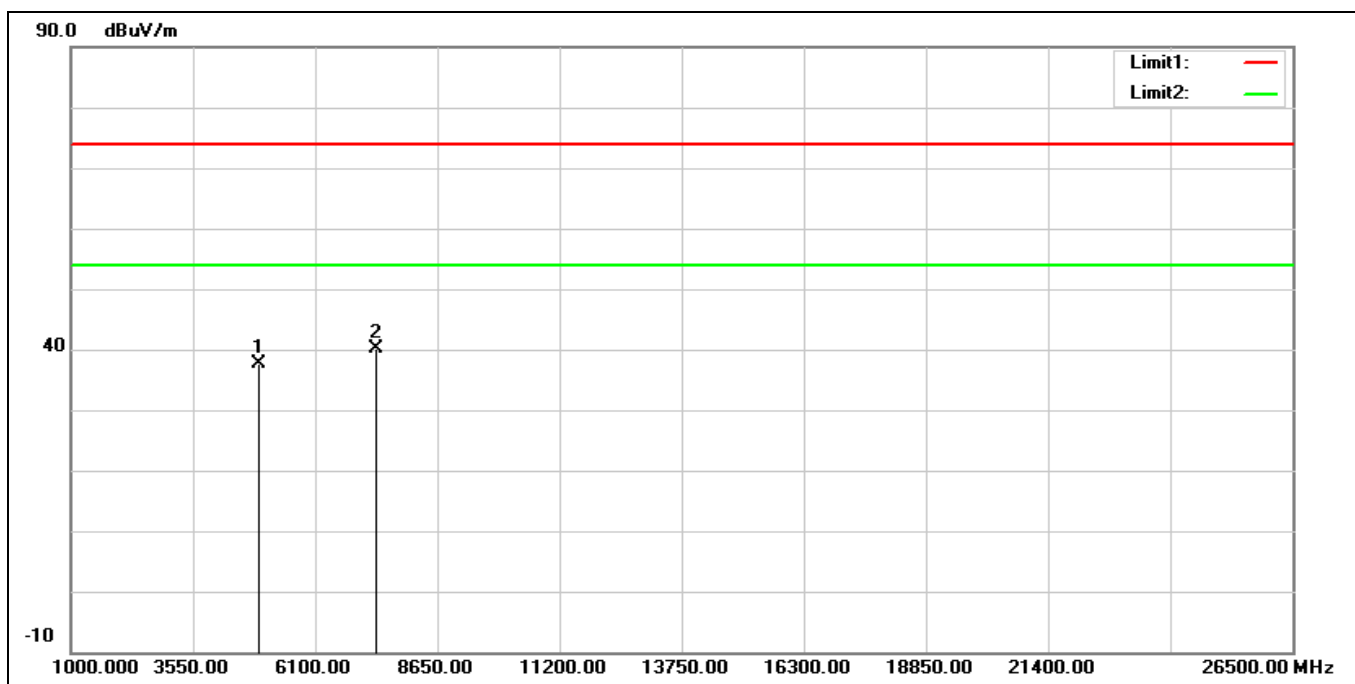


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.23	0.39	37.62	74.00	-36.38	peak
2*	7386.000	32.56	7.46	40.02	74.00	-33.98	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

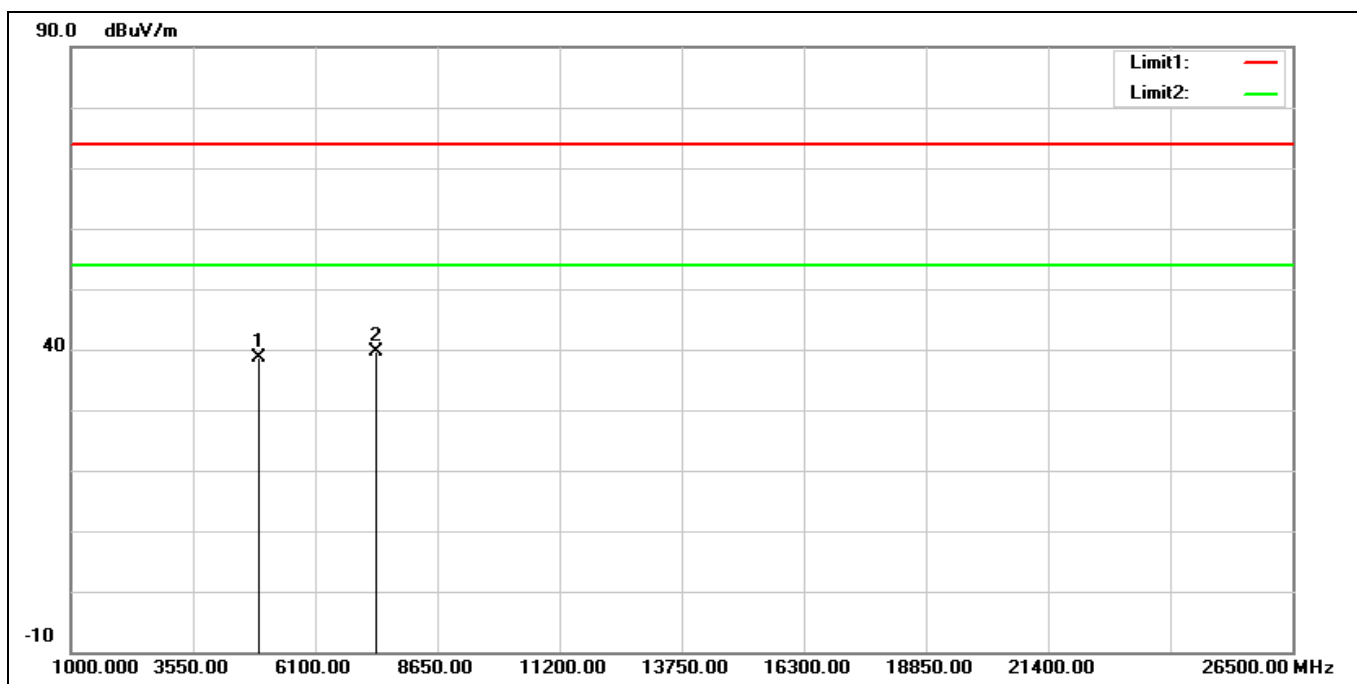


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.15	0.39	38.54	74.00	-35.46	peak
2*	7386.000	32.11	7.46	39.57	74.00	-34.43	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2412 MHz		
Remark:			

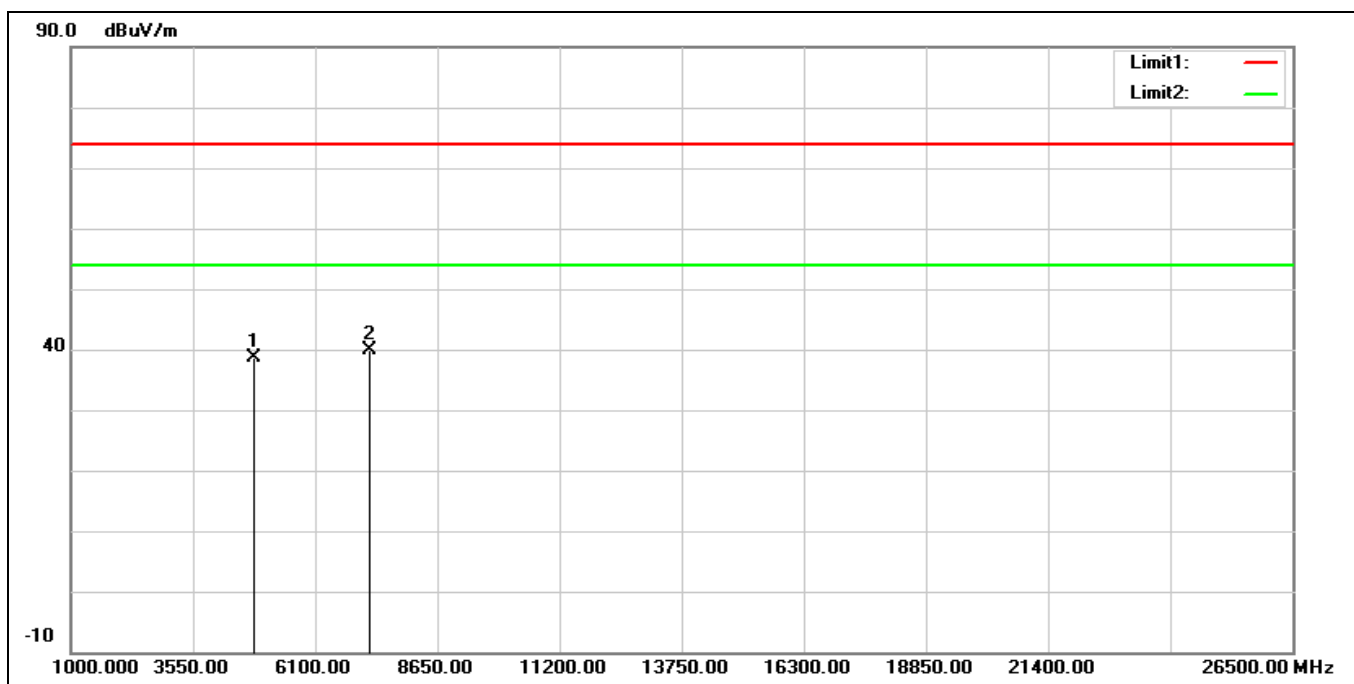


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.53	0.09	38.62	74.00	-35.38	peak
2*	7236.000	32.67	7.13	39.80	74.00	-34.20	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2412 MHz		
Remark:			

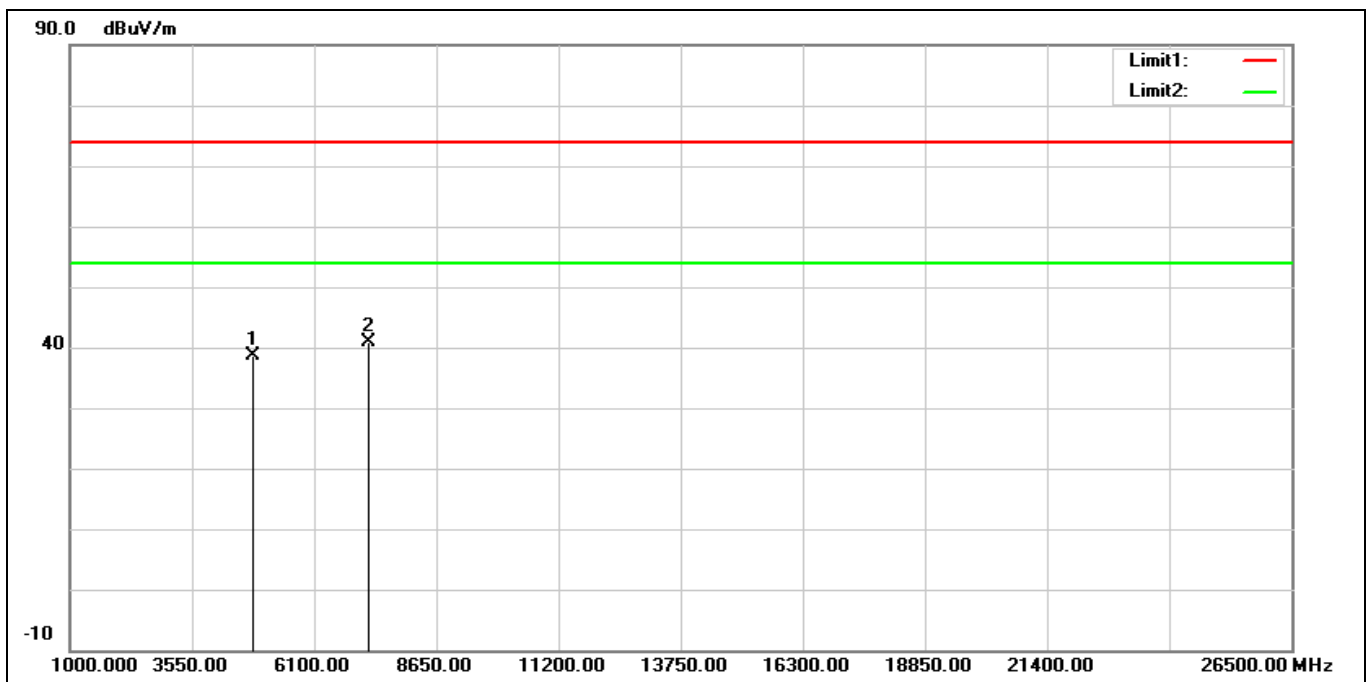


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.48	0.09	38.57	74.00	-35.43	peak
2*	7236.000	33.75	7.13	40.88	74.00	-33.12	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2437 MHz		
Remark:			

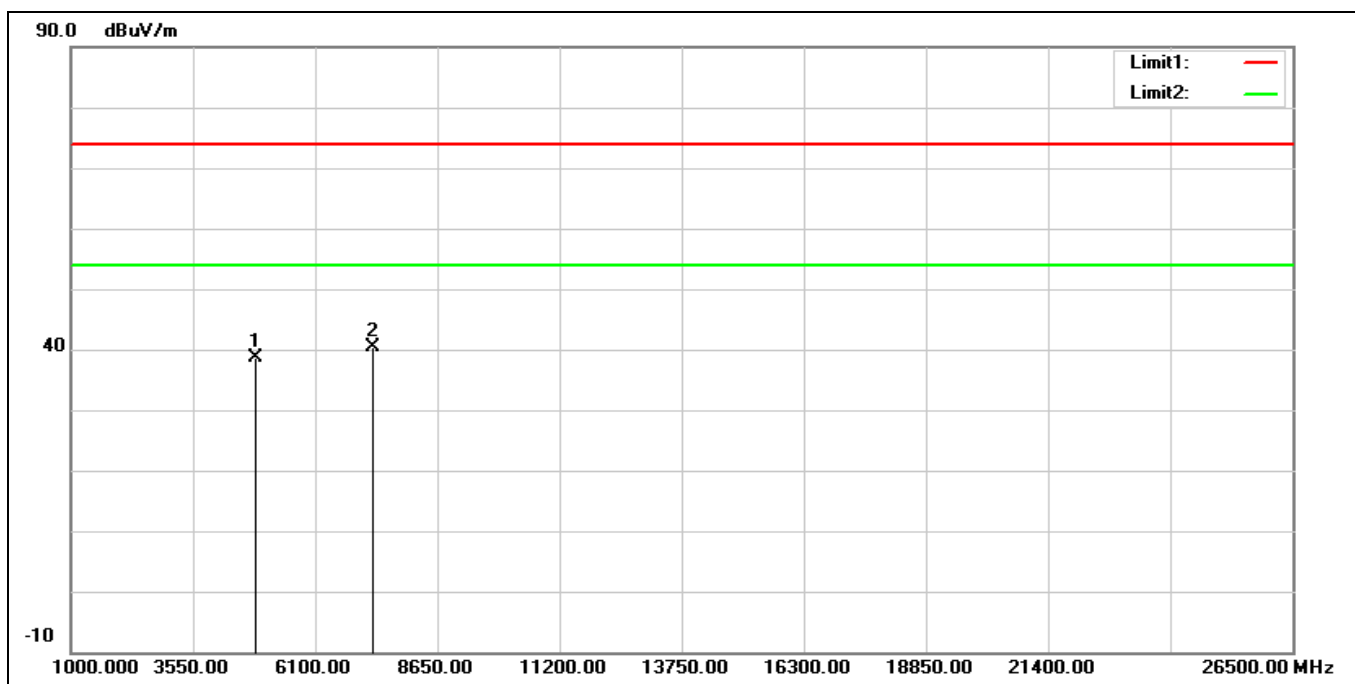


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.23	0.29	38.52	74.00	-35.48	peak
2*	7311.000	33.19	7.16	40.35	74.00	-33.65	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2437 MHz		
Remark:			

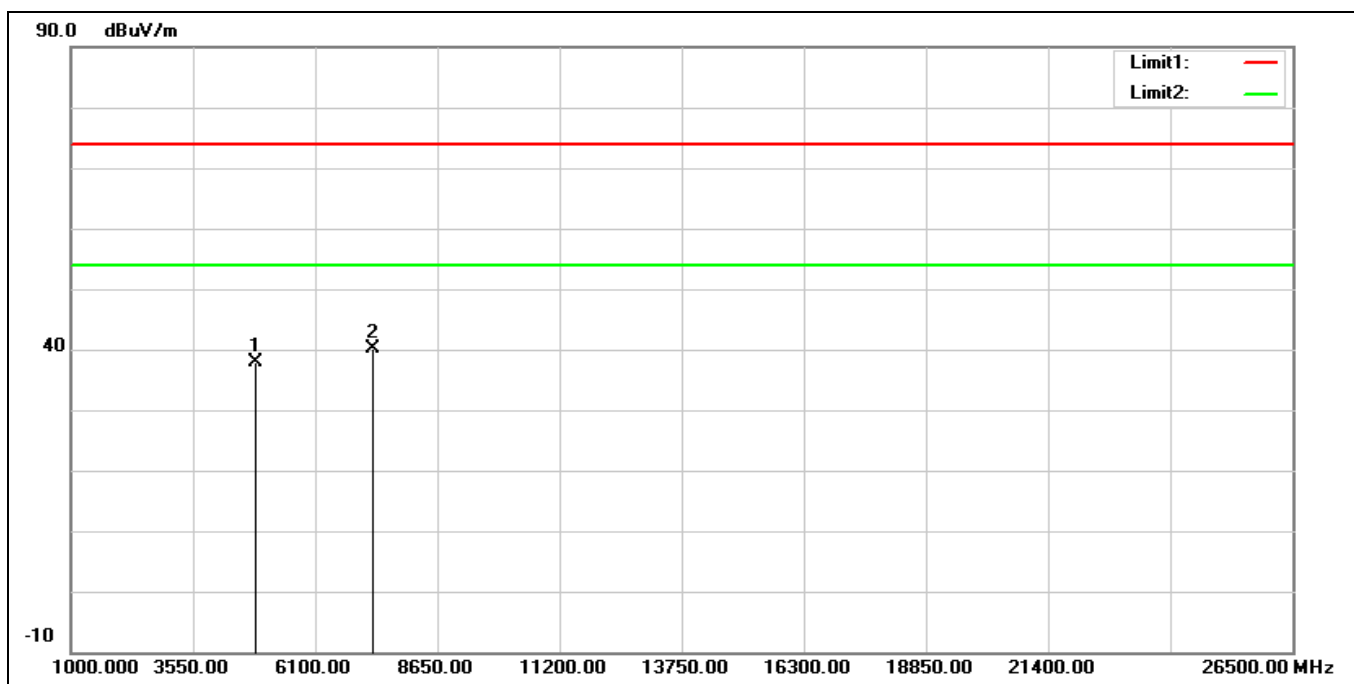


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.47	0.29	37.76	74.00	-36.24	peak
2*	7311.000	32.87	7.16	40.03	74.00	-33.97	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2457 MHz		
Remark:			

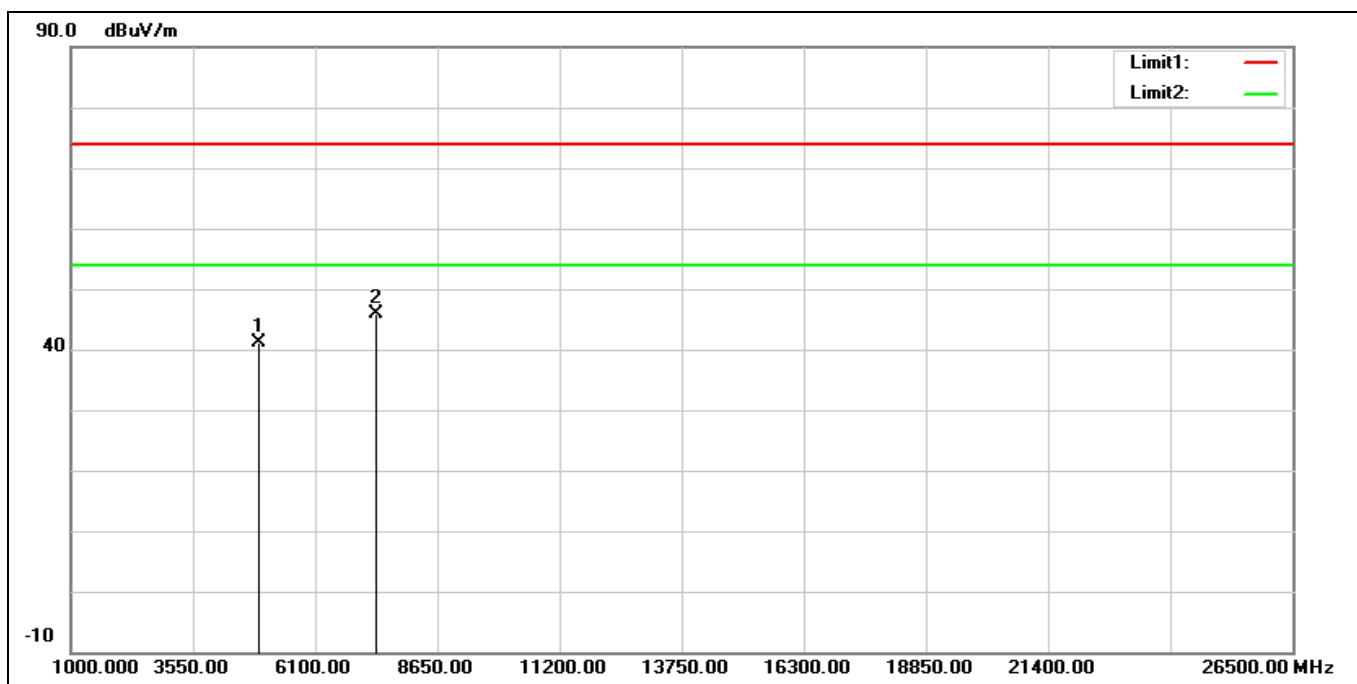


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4914.000	40.75	0.39	41.14	74.00	-32.86	peak
2*	7371.000	38.51	7.39	45.90	74.00	-28.10	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2457 MHz		
Remark:			

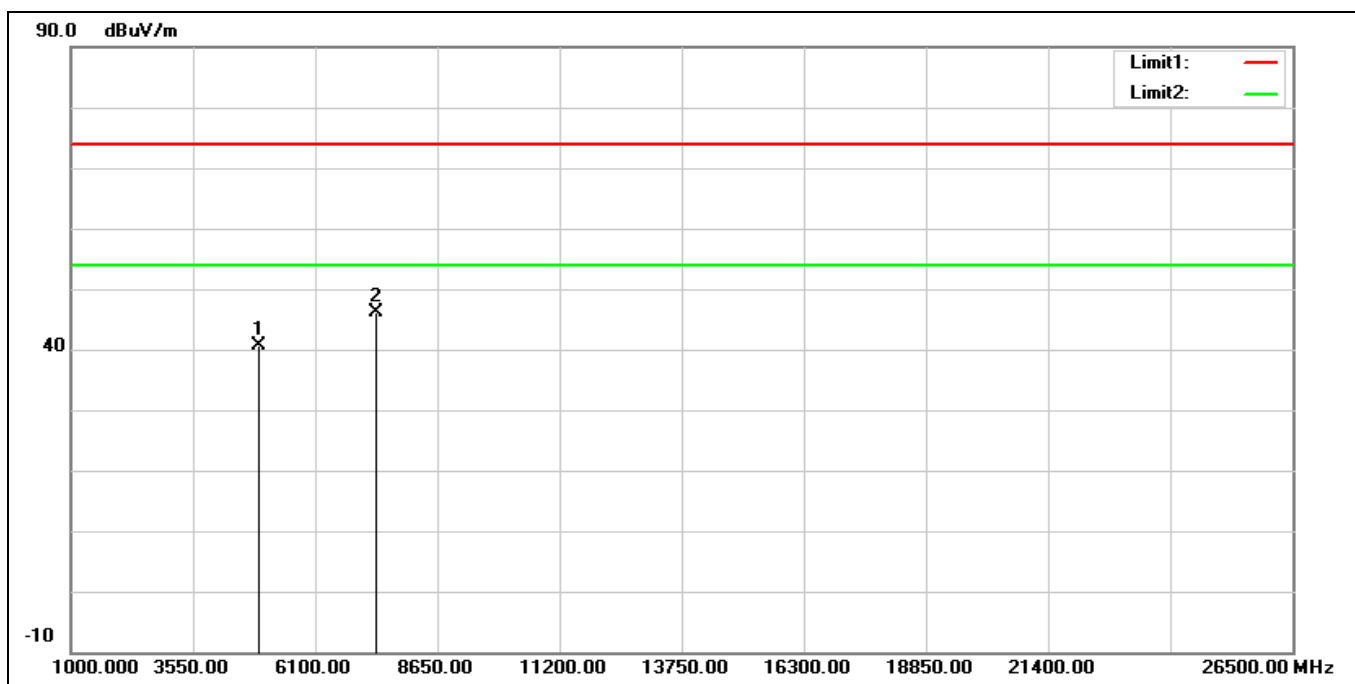


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4914.000	40.23	0.39	40.62	74.00	-33.38	peak
2*	7371.000	38.68	7.39	46.07	74.00	-27.93	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2462 MHz		
Remark:			

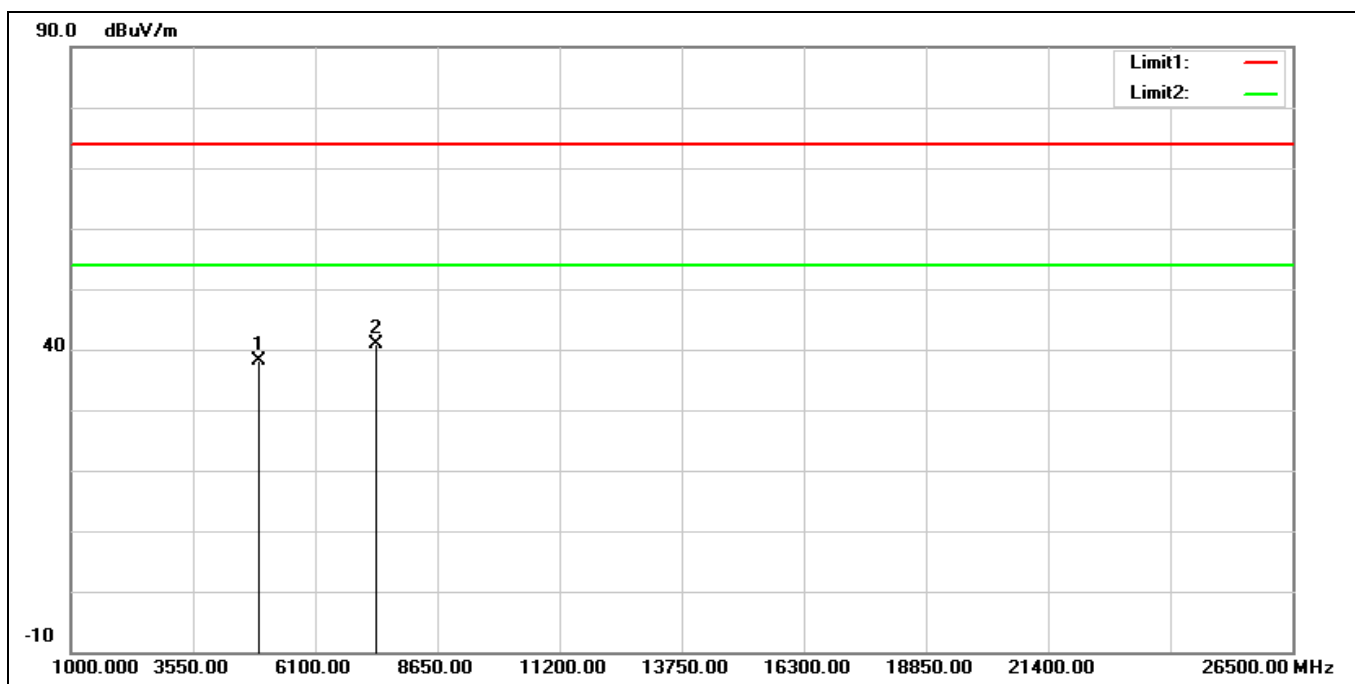


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.83	0.39	38.22	74.00	-35.78	peak
2*	7386.000	33.34	7.46	40.80	74.00	-33.20	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2462 MHz		
Remark:			

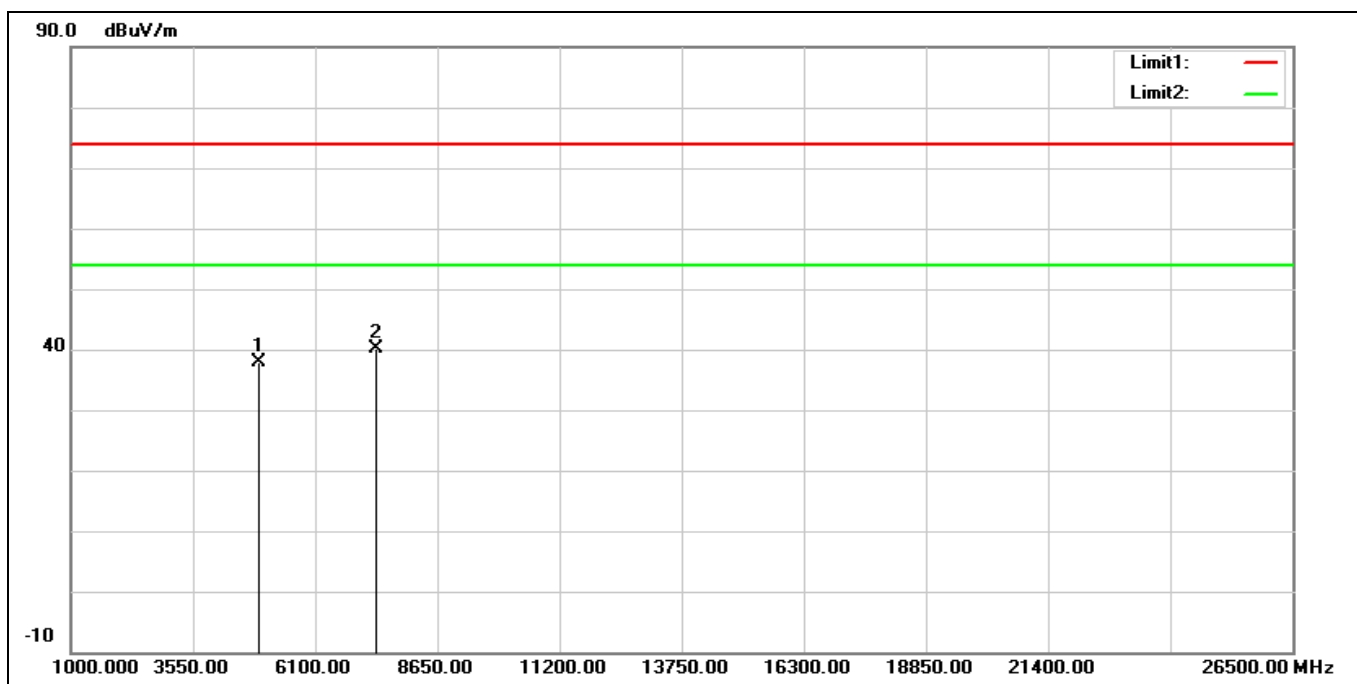


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.41	0.39	37.80	74.00	-36.20	peak
2*	7386.000	32.63	7.46	40.09	74.00	-33.91	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

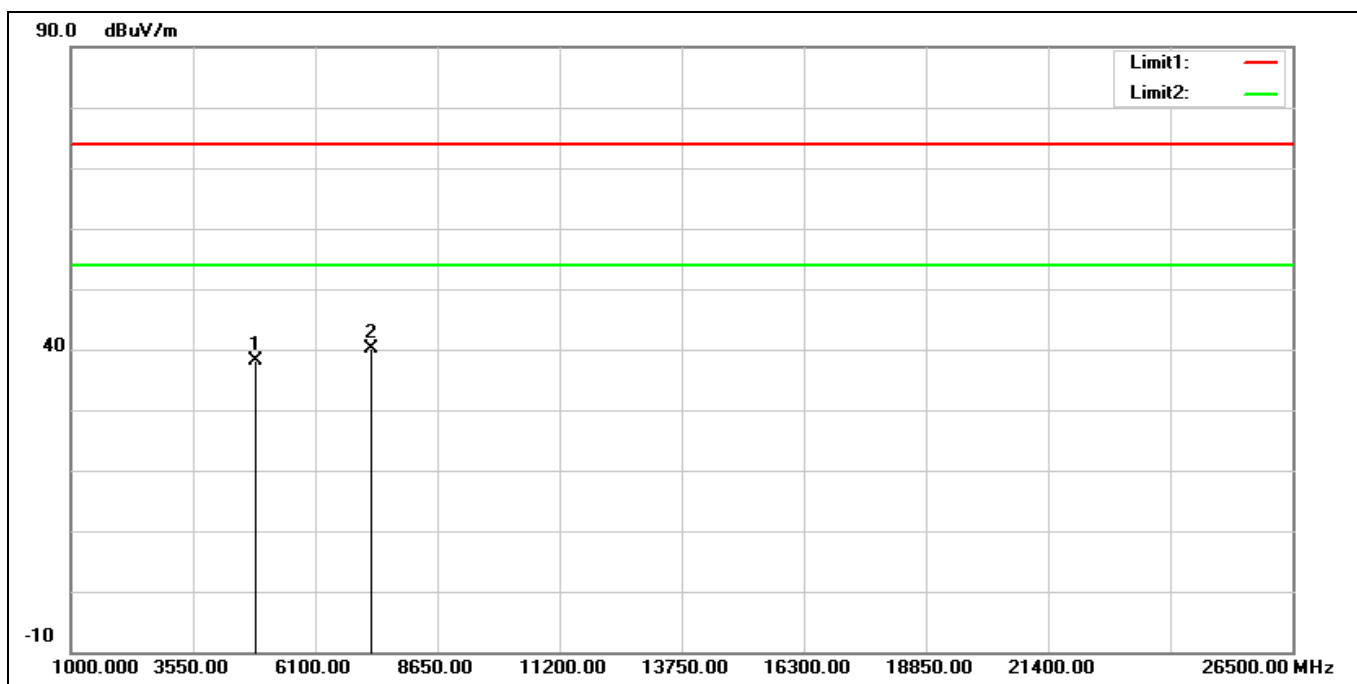


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	37.86	0.16	38.02	74.00	-35.98	peak
2*	7266.000	32.96	7.16	40.12	74.00	-33.88	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

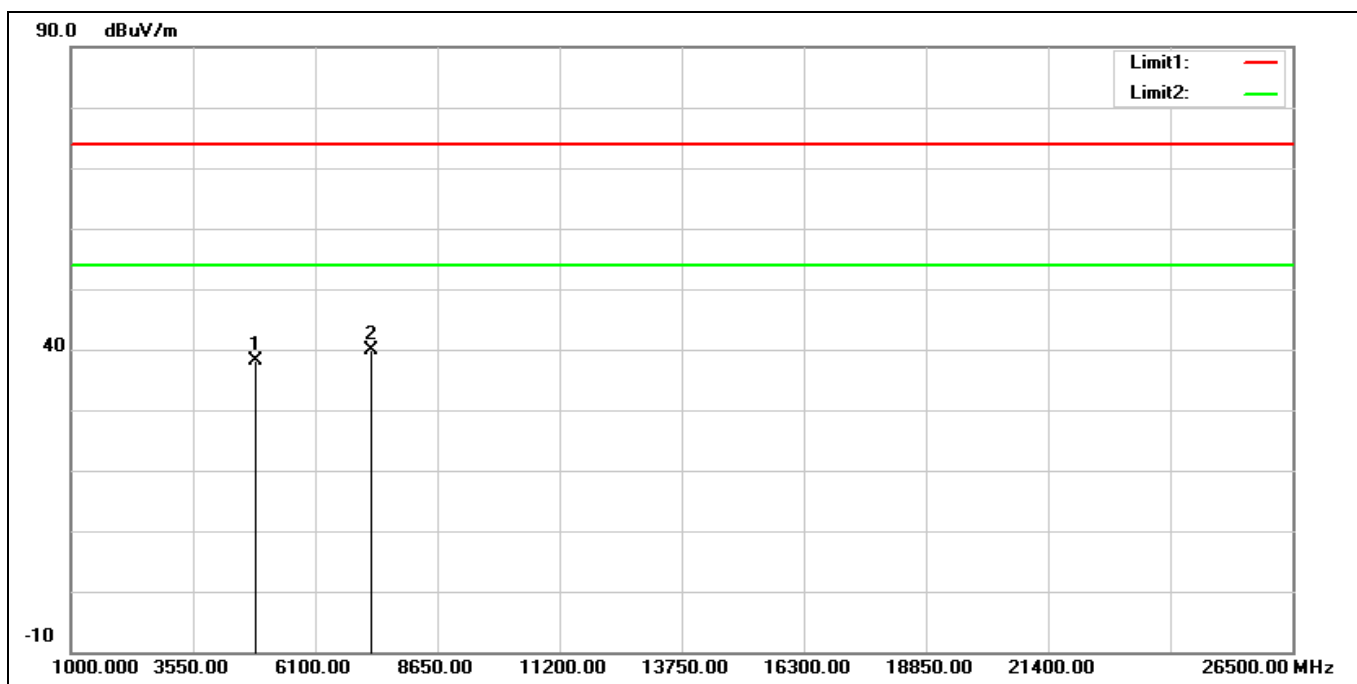


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	38.09	0.16	38.25	74.00	-35.75	peak
2*	7266.000	32.81	7.16	39.97	74.00	-34.03	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2437 MHz		
Remark:			

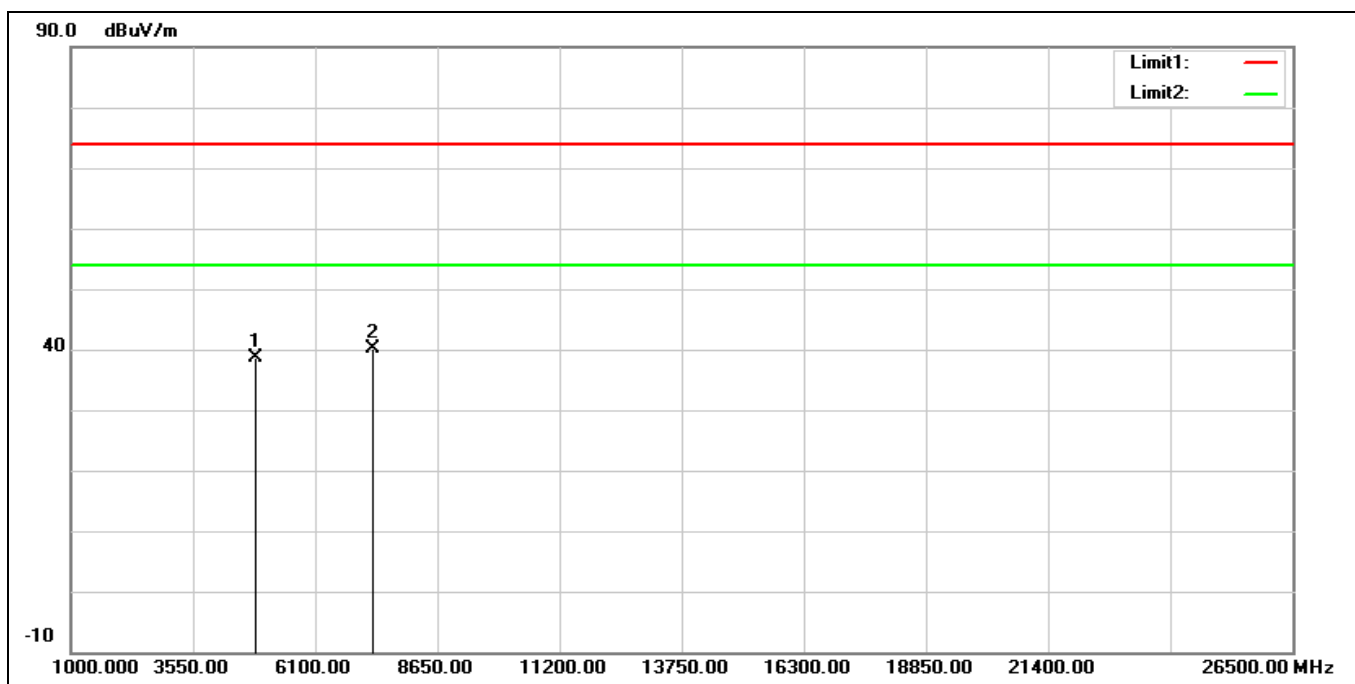


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.22	0.29	38.51	74.00	-35.49	peak
2*	7311.000	33.07	7.16	40.23	74.00	-33.77	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2437 MHz		
Remark:			

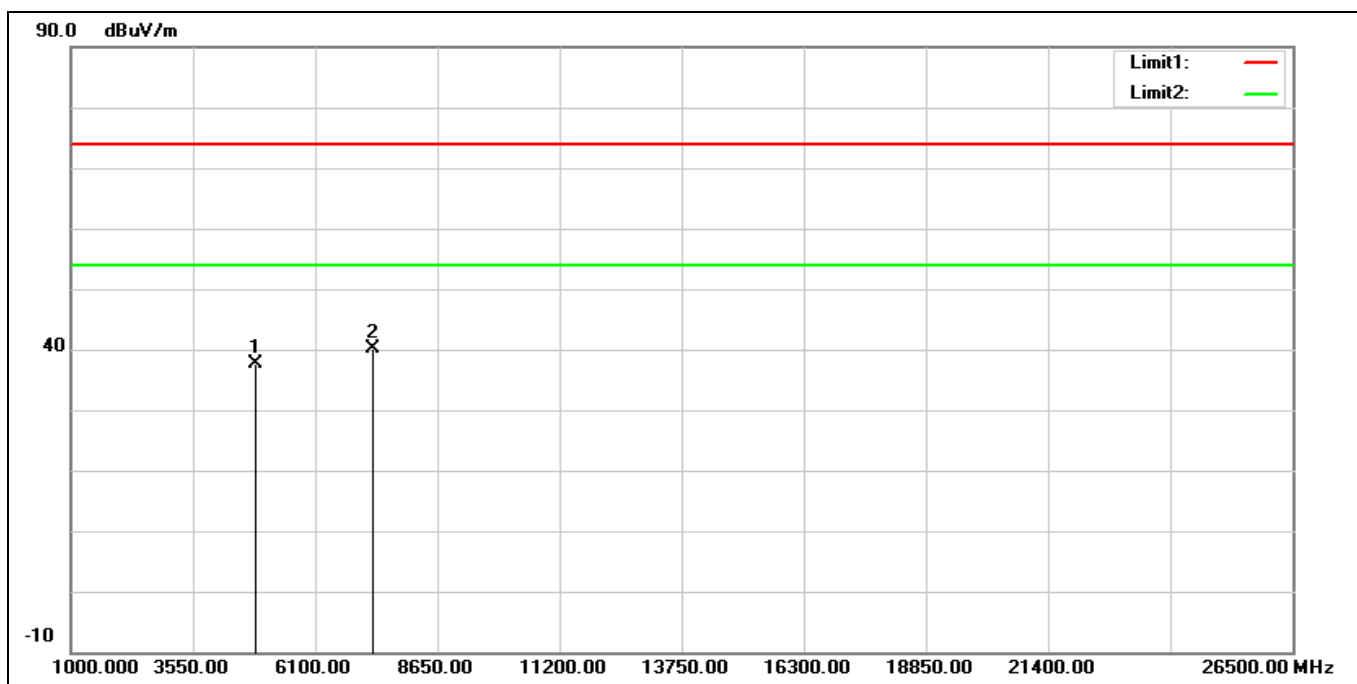


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.23	0.29	37.52	74.00	-36.48	peak
2*	7311.000	33.01	7.16	40.17	74.00	-33.83	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2452 MHz		
Remark:			

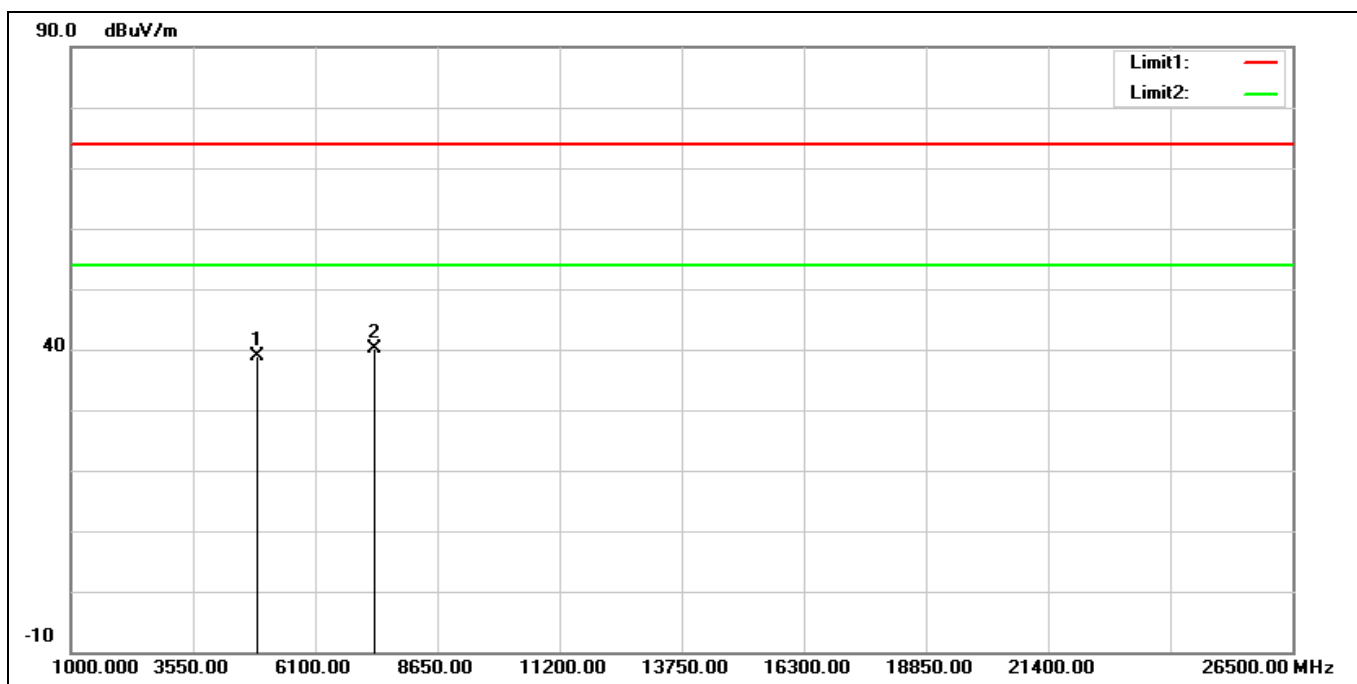


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	38.43	0.39	38.82	74.00	-35.18	peak
2*	7356.000	32.71	7.31	40.02	74.00	-33.98	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2452 MHz		
Remark:			

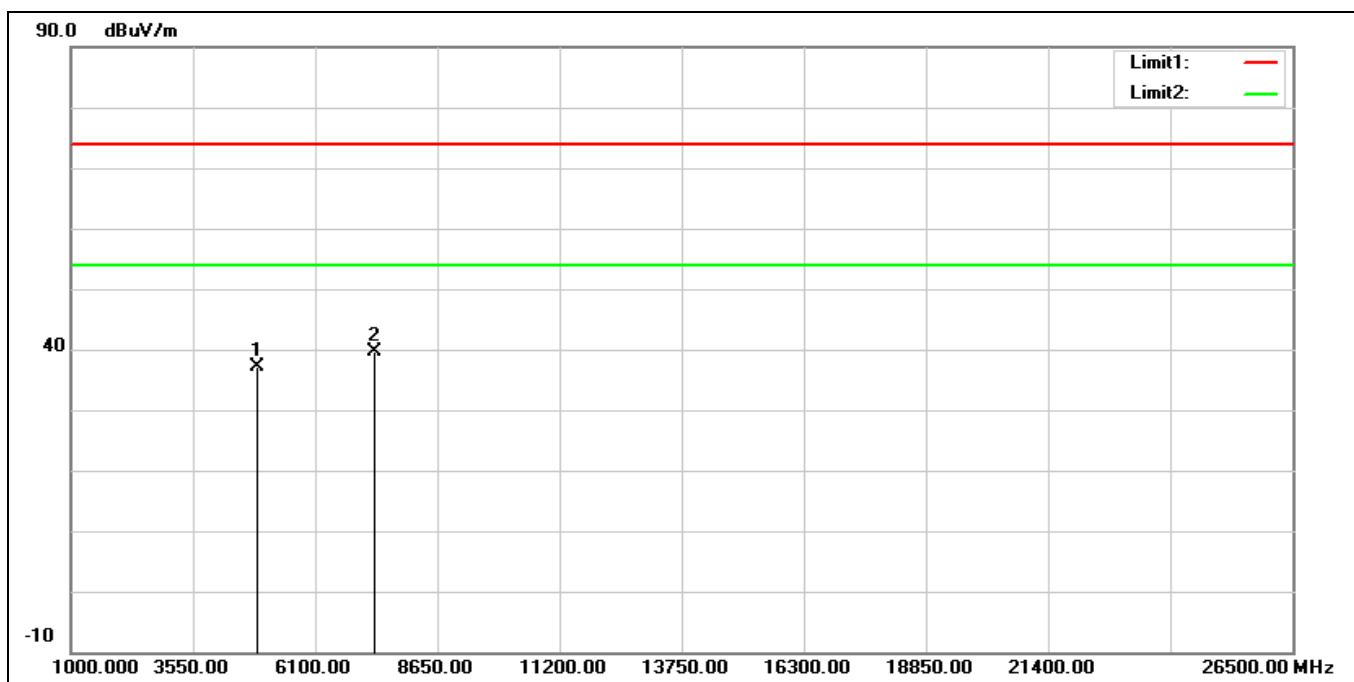


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	36.81	0.39	37.20	74.00	-36.80	peak
2*	7356.000	32.23	7.31	39.54	74.00	-34.46	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2412 MHz		
Remark:			

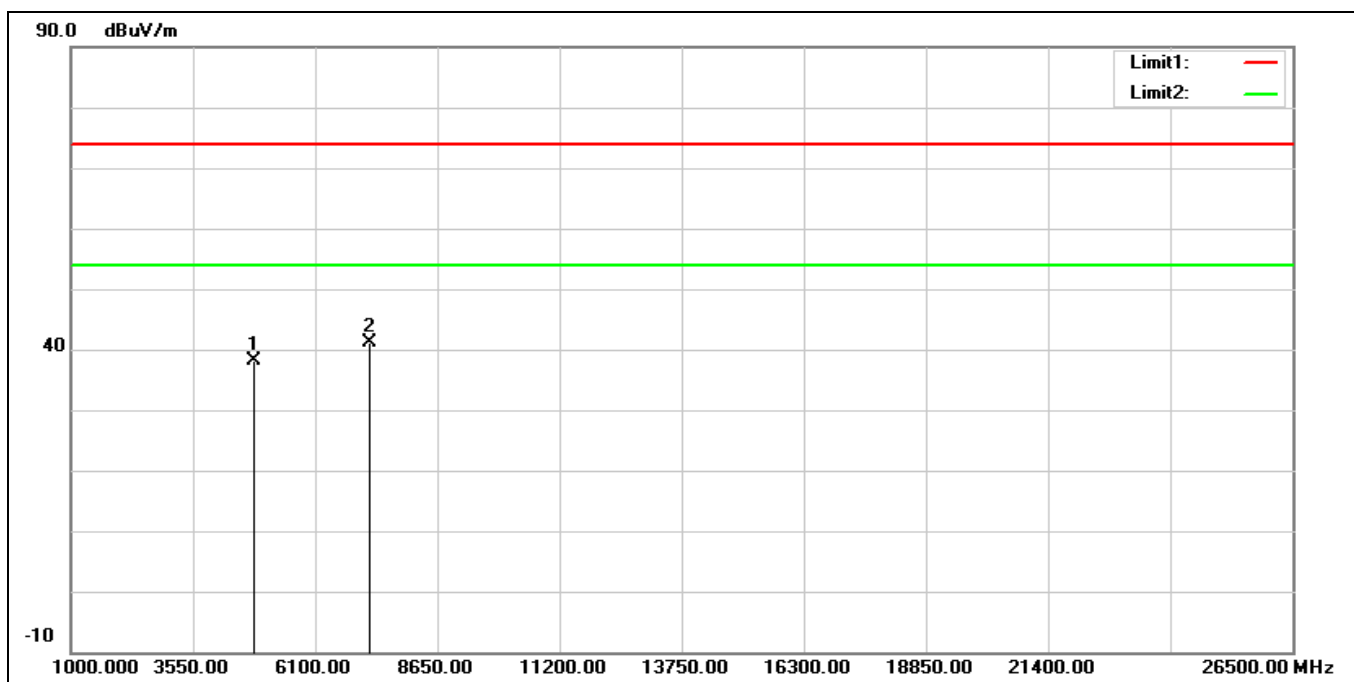


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.00	0.09	38.09	74.00	-35.91	peak
2*	7236.000	33.93	7.13	41.06	74.00	-32.94	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2412 MHz		
Remark:			

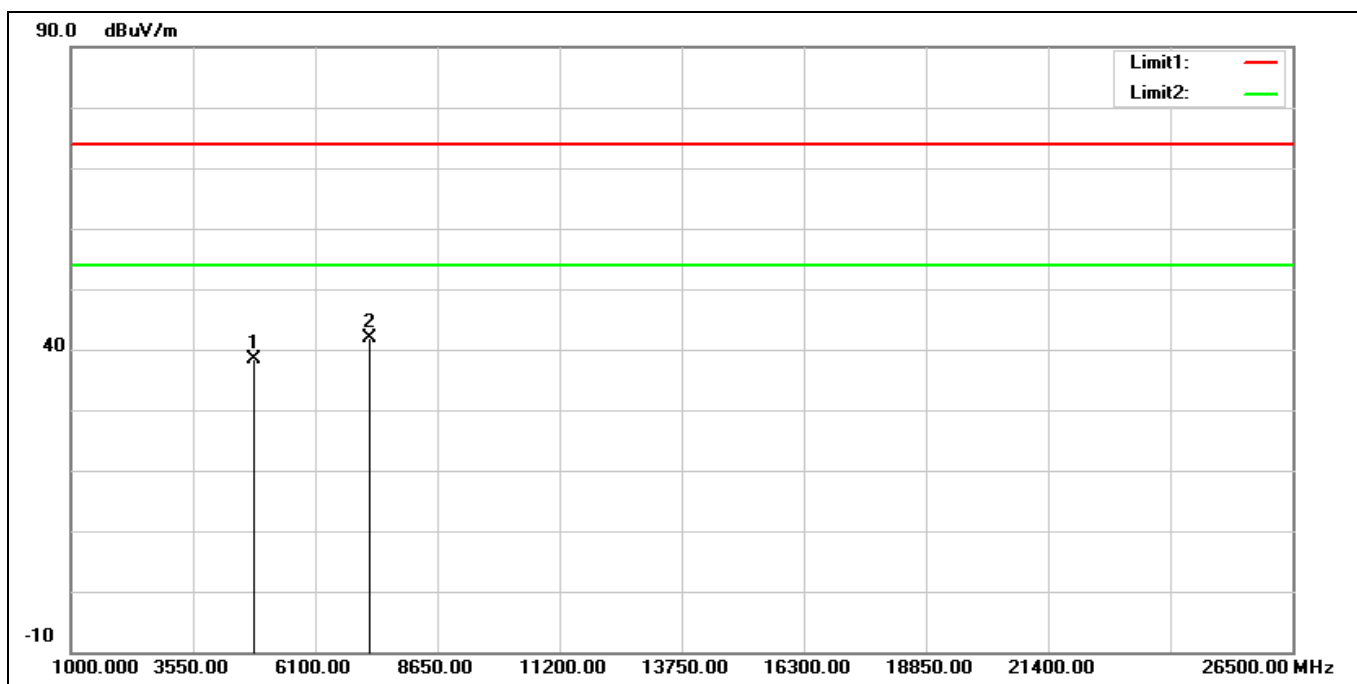


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.17	0.09	38.26	74.00	-35.74	peak
2*	7236.000	34.67	7.13	41.80	74.00	-32.20	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2437 MHz		
Remark:			

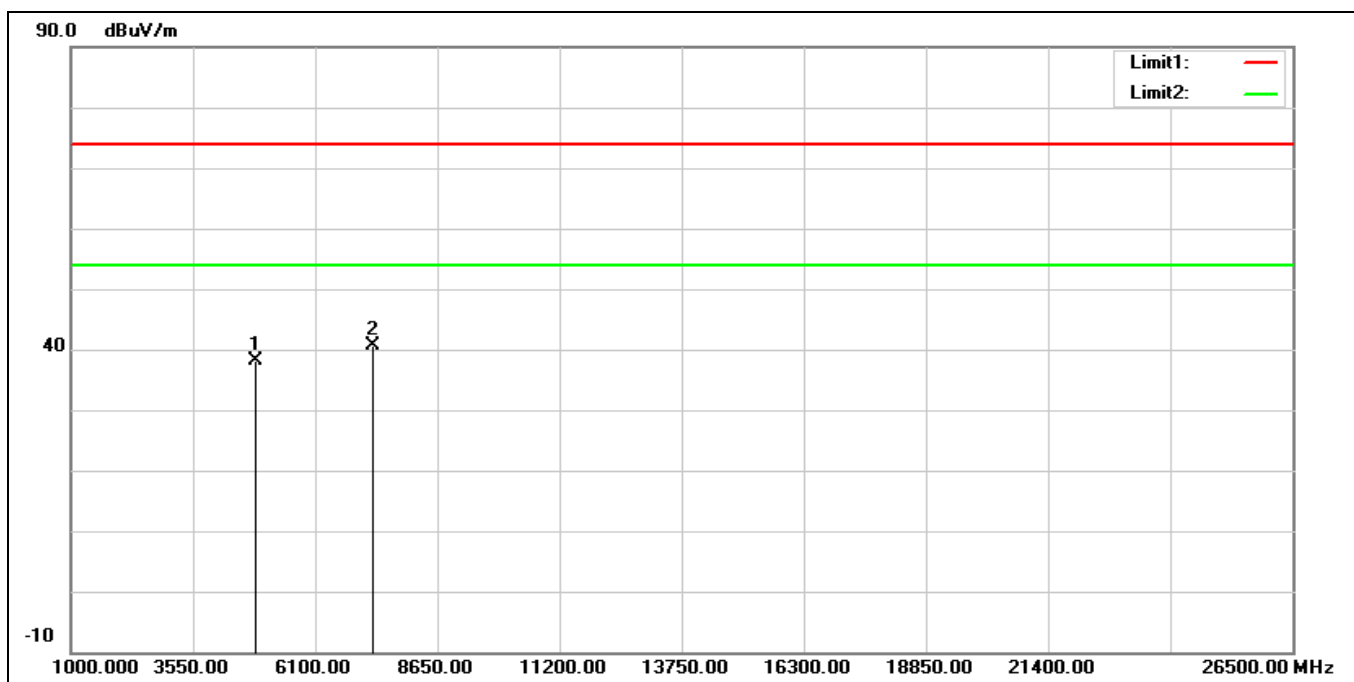


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.95	0.29	38.24	74.00	-35.76	peak
2*	7311.000	33.50	7.16	40.66	74.00	-33.34	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2437 MHz		
Remark:			

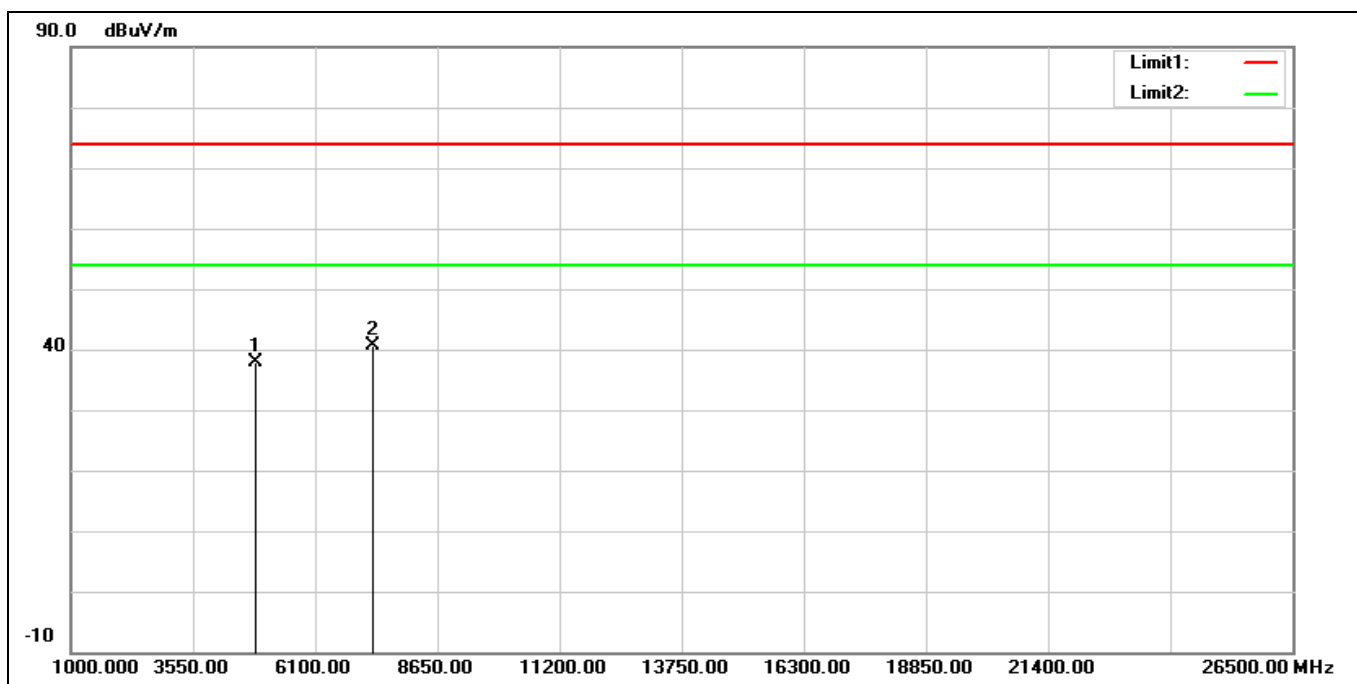


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.60	0.29	37.89	74.00	-36.11	peak
2*	7311.000	33.47	7.16	40.63	74.00	-33.37	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2457 MHz		
Remark:			

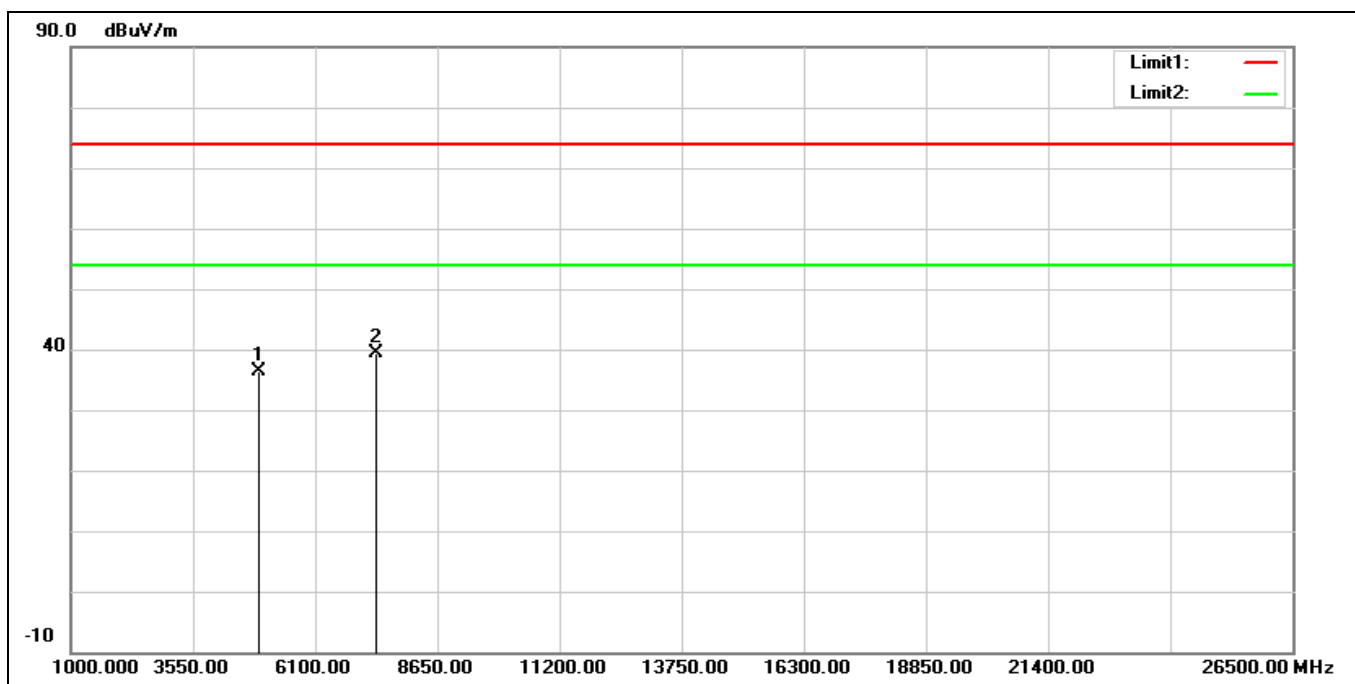


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4914.000	36.09	0.39	36.48	74.00	-37.52	peak
2*	7371.000	31.87	7.39	39.26	74.00	-34.74	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2457 MHz		
Remark:			

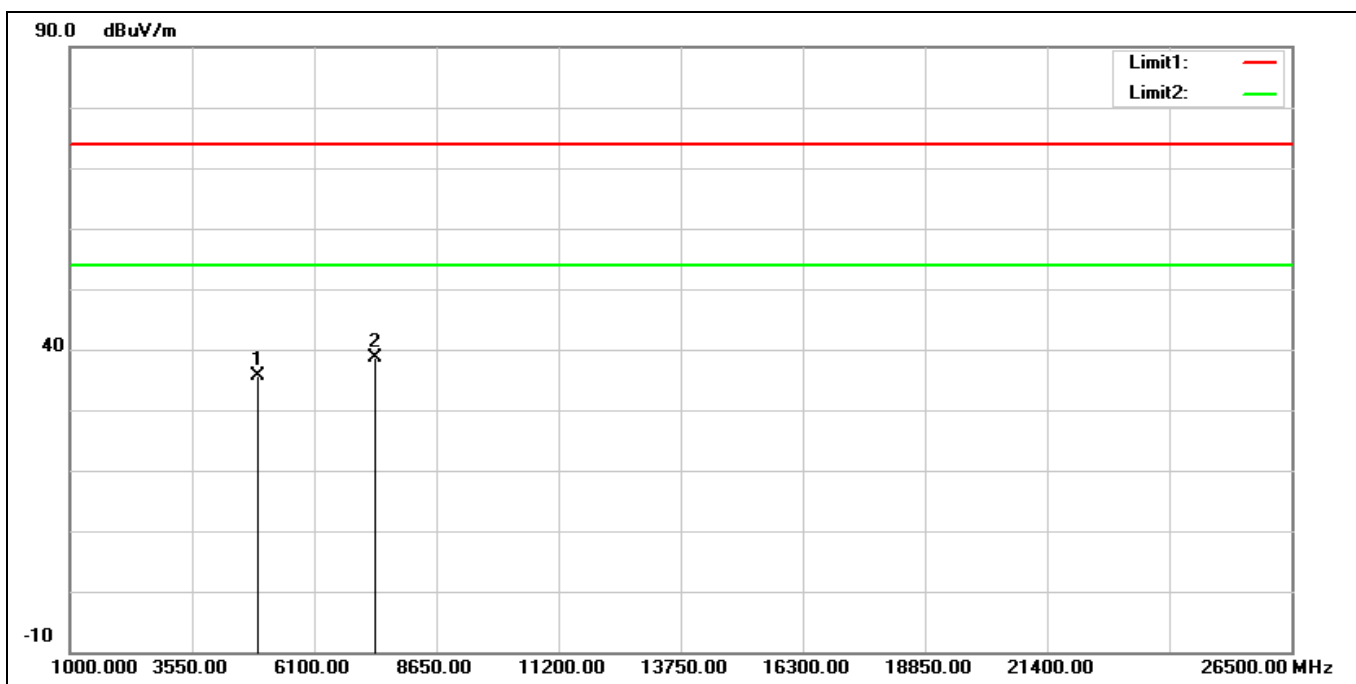


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4914.000	35.17	0.39	35.56	74.00	-38.44	peak
2*	7371.000	31.32	7.39	38.71	74.00	-35.29	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2462 MHz		
Remark:			

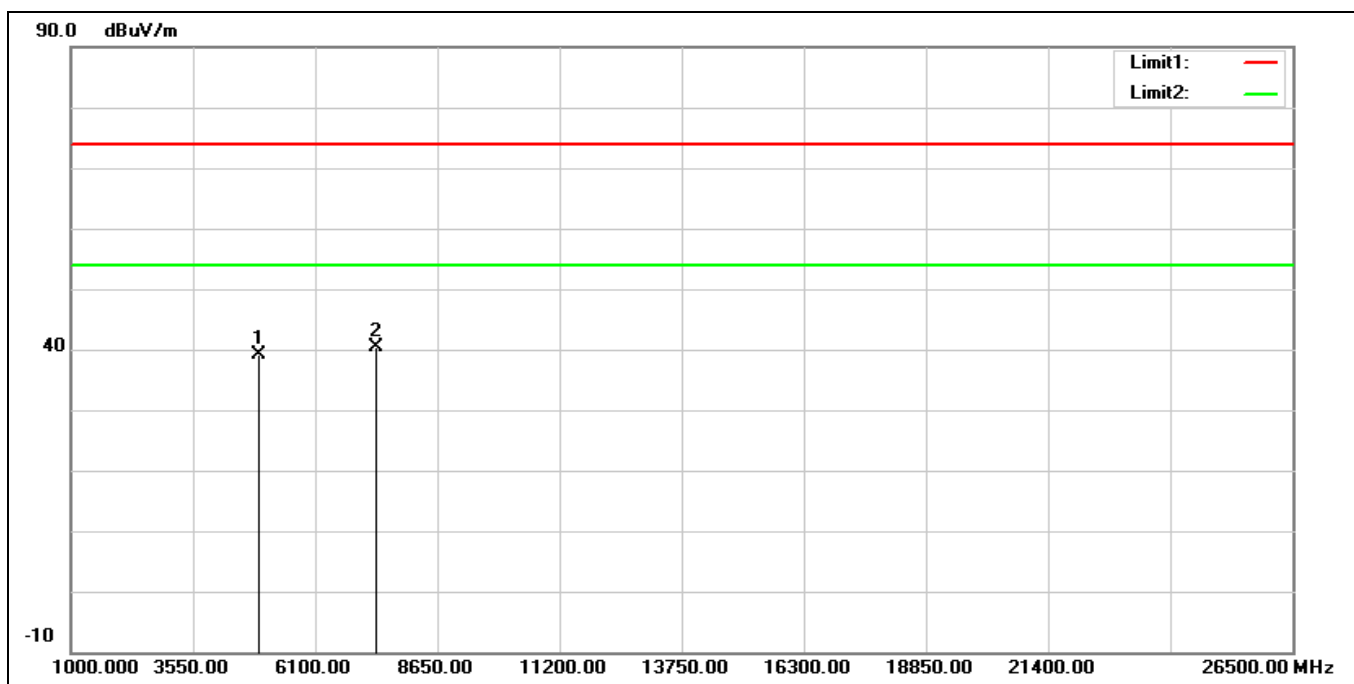


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.85	0.39	39.24	74.00	-34.76	peak
2*	7386.000	33.04	7.46	40.50	74.00	-33.50	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2462 MHz		
Remark:			

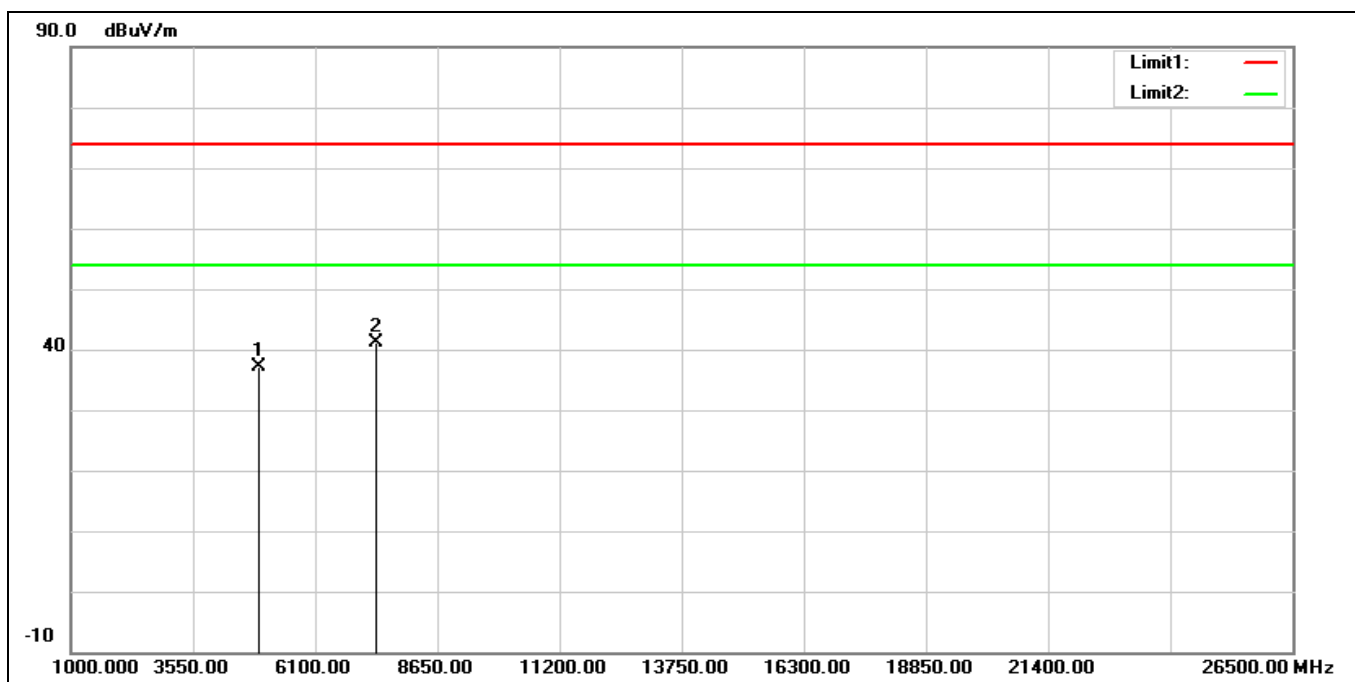


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.84	0.39	37.23	74.00	-36.77	peak
2*	7386.000	33.59	7.46	41.05	74.00	-32.95	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2422 MHz		
Remark:			

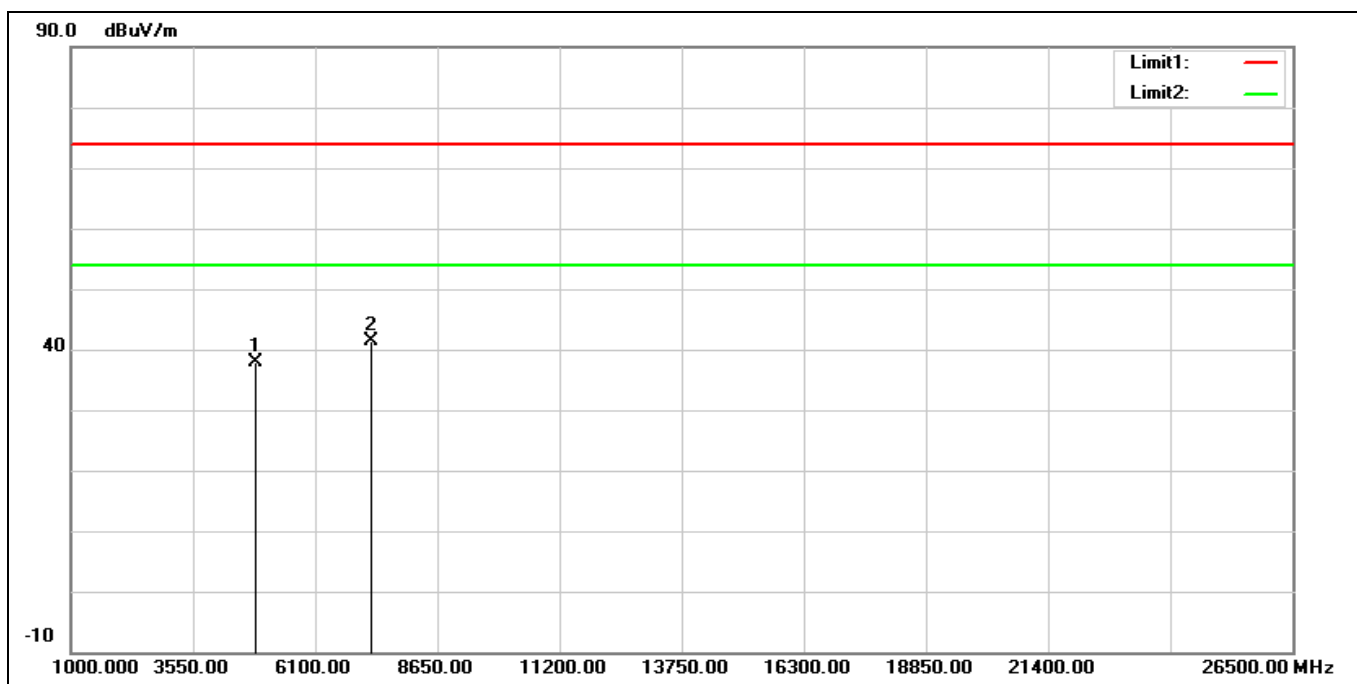


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	37.64	0.16	37.80	74.00	-36.20	peak
2*	7266.000	34.11	7.16	41.27	74.00	-32.73	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2422 MHz		
Remark:			

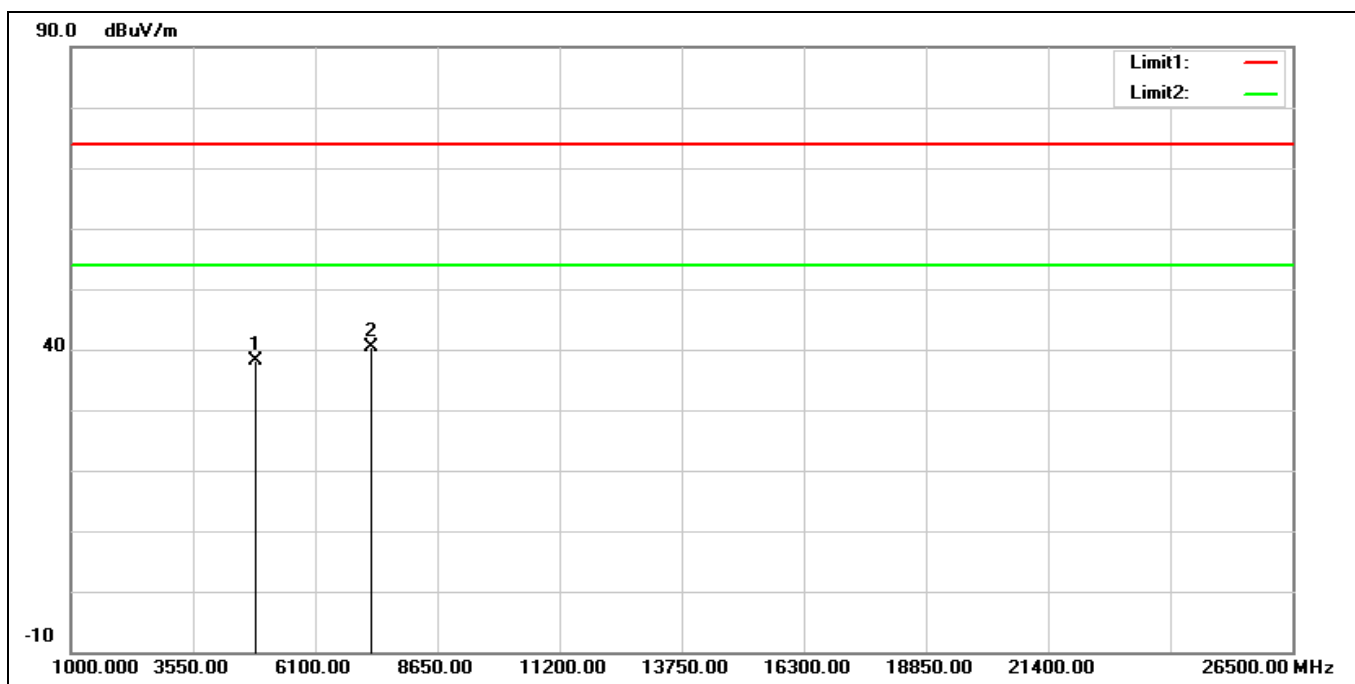


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	37.94	0.16	38.10	74.00	-35.90	peak
2*	7266.000	33.16	7.16	40.32	74.00	-33.68	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2437 MHz		
Remark:			

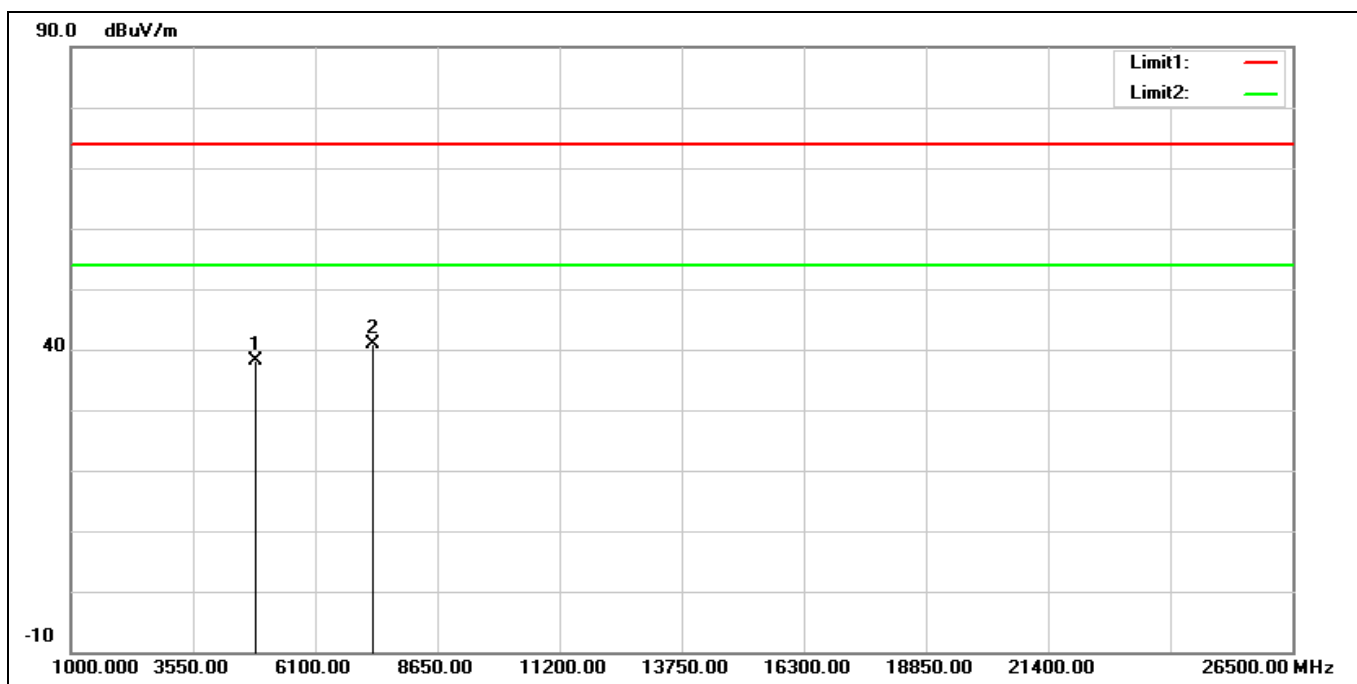


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.85	0.29	38.14	74.00	-35.86	peak
2*	7311.000	33.67	7.16	40.83	74.00	-33.17	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2437 MHz		
Remark:			

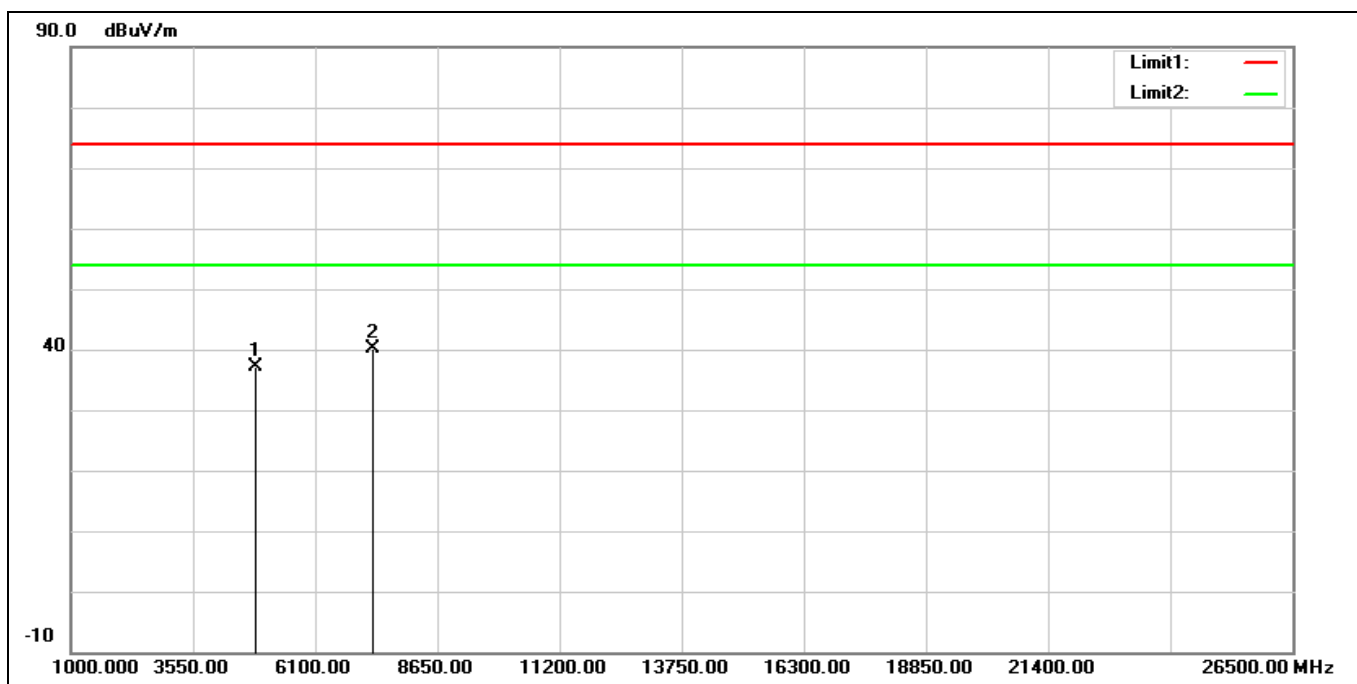


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.75	0.29	37.04	74.00	-36.96	peak
2*	7311.000	33.09	7.16	40.25	74.00	-33.75	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2452 MHz		
Remark:			

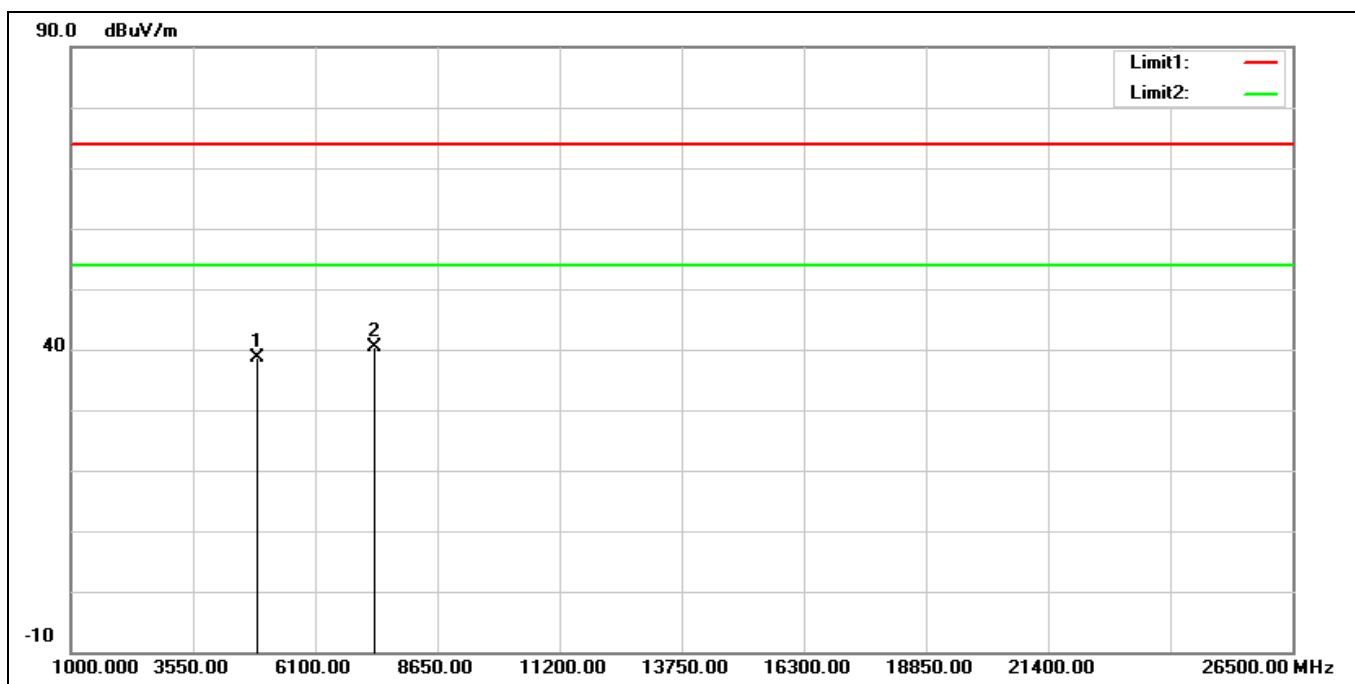

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	38.18	0.39	38.57	74.00	-35.43	peak
2*	7356.000	33.04	7.31	40.35	74.00	-33.65	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2452 MHz		
Remark:			

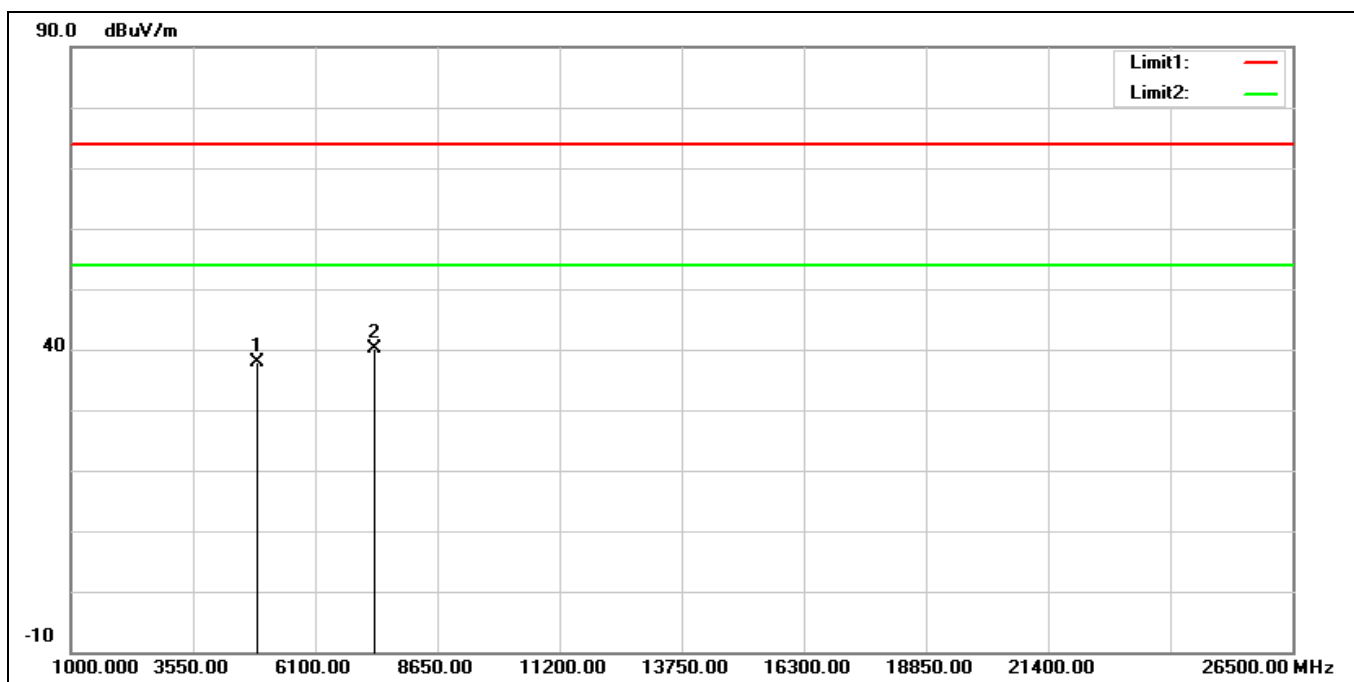


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.40	0.39	37.79	74.00	-36.21	peak
2*	7356.000	32.93	7.31	40.24	74.00	-33.76	peak

Band Edge


Peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2412 MHz		
Remark:			

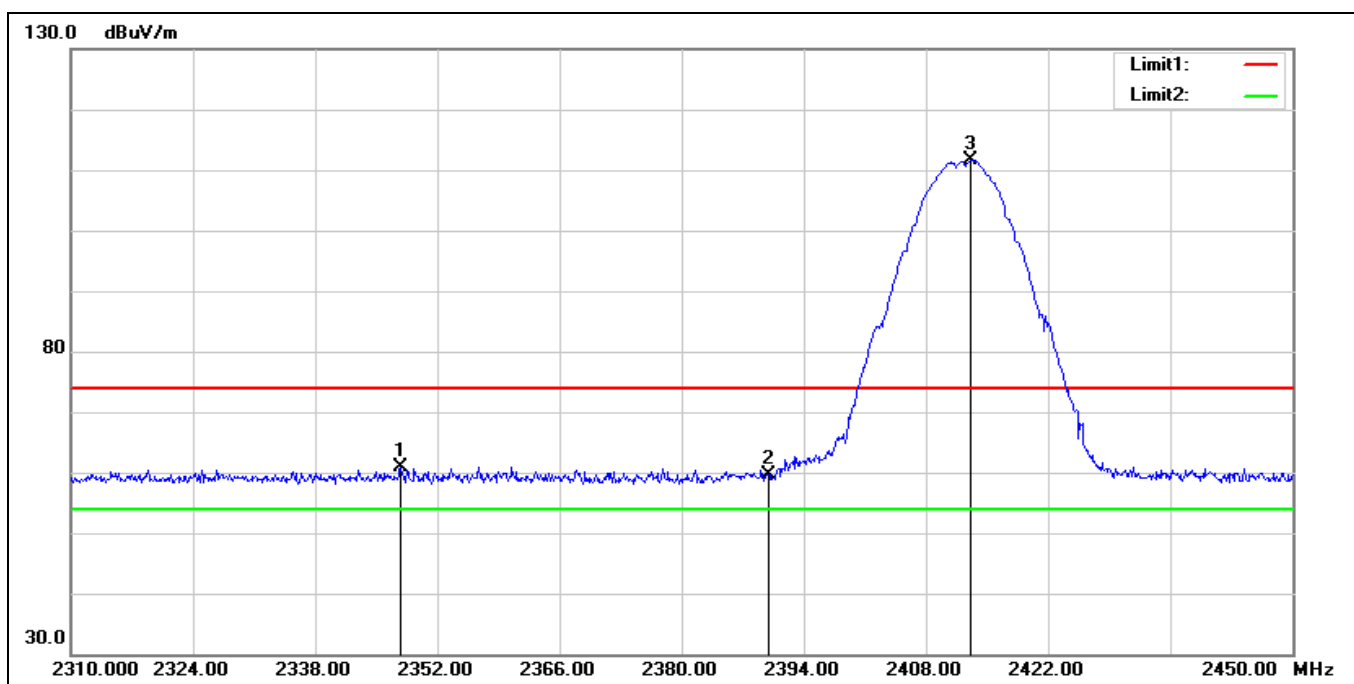


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2347.800	66.73	-5.91	60.82	74.00	-13.18	peak
2	2390.000	65.67	-6.09	59.58	74.00	-14.42	peak
3*	2413.180	117.79	-6.09	111.70	74.00	37.70	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

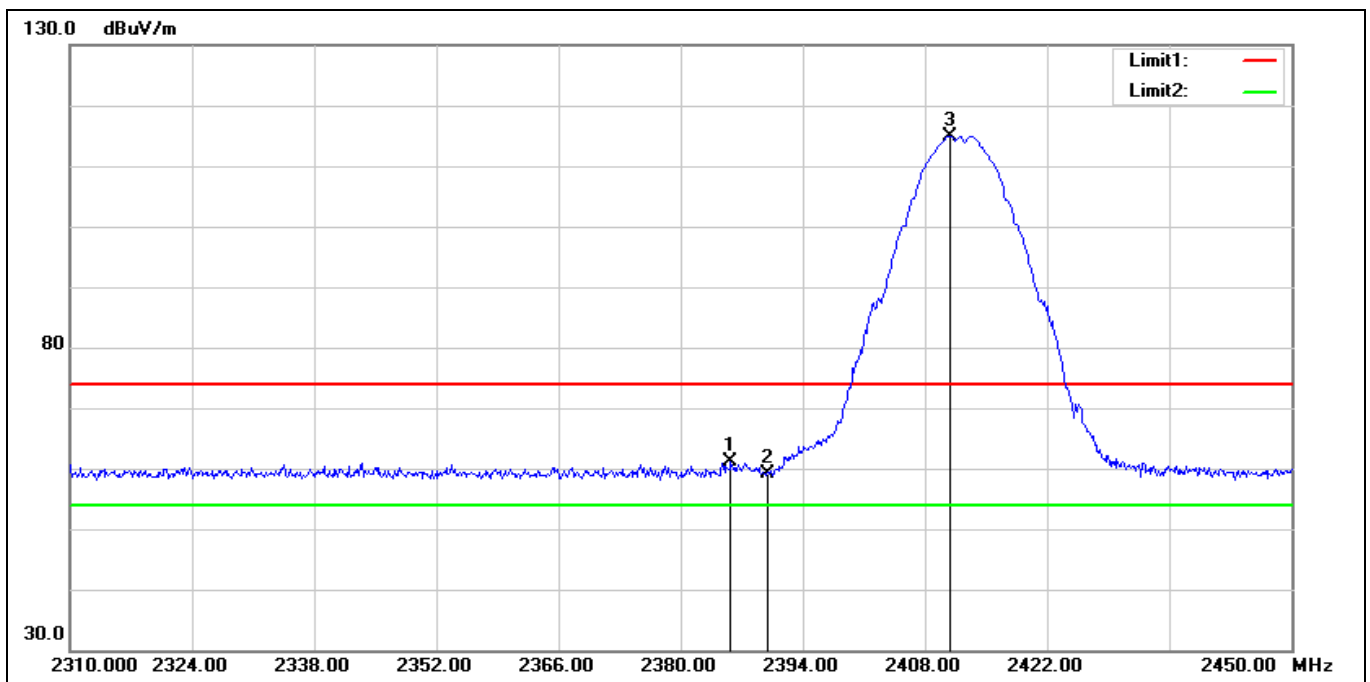


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.740	67.12	-6.07	61.05	74.00	-12.95	peak
2	2390.000	65.10	-6.09	59.01	74.00	-14.99	peak
3*	2410.940	121.09	-6.10	114.99	74.00	40.99	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

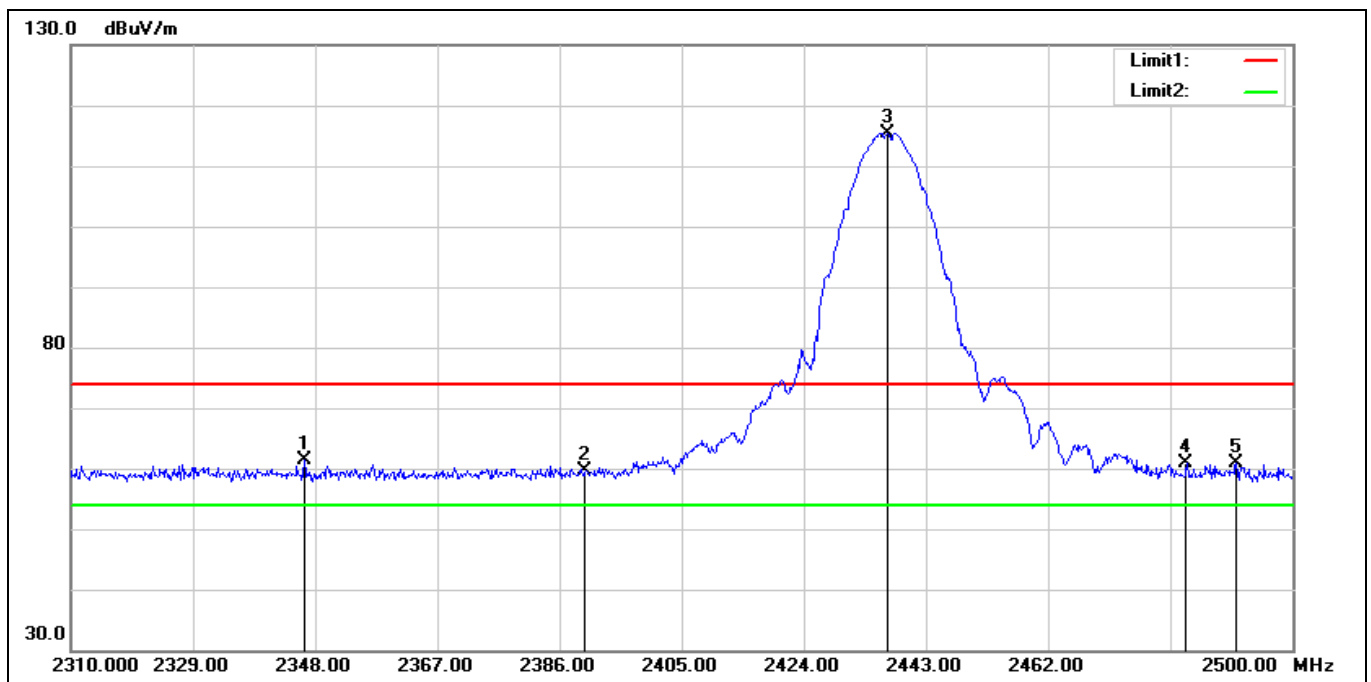


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2346.290	67.26	-5.91	61.35	74.00	-12.65	peak
2	2390.000	65.75	-6.09	59.66	74.00	-14.34	peak
3*	2436.920	121.43	-6.02	115.41	74.00	41.41	peak
4	2483.500	66.89	-6.13	60.76	74.00	-13.24	peak
5	2491.260	67.17	-6.17	61.00	74.00	-13.00	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

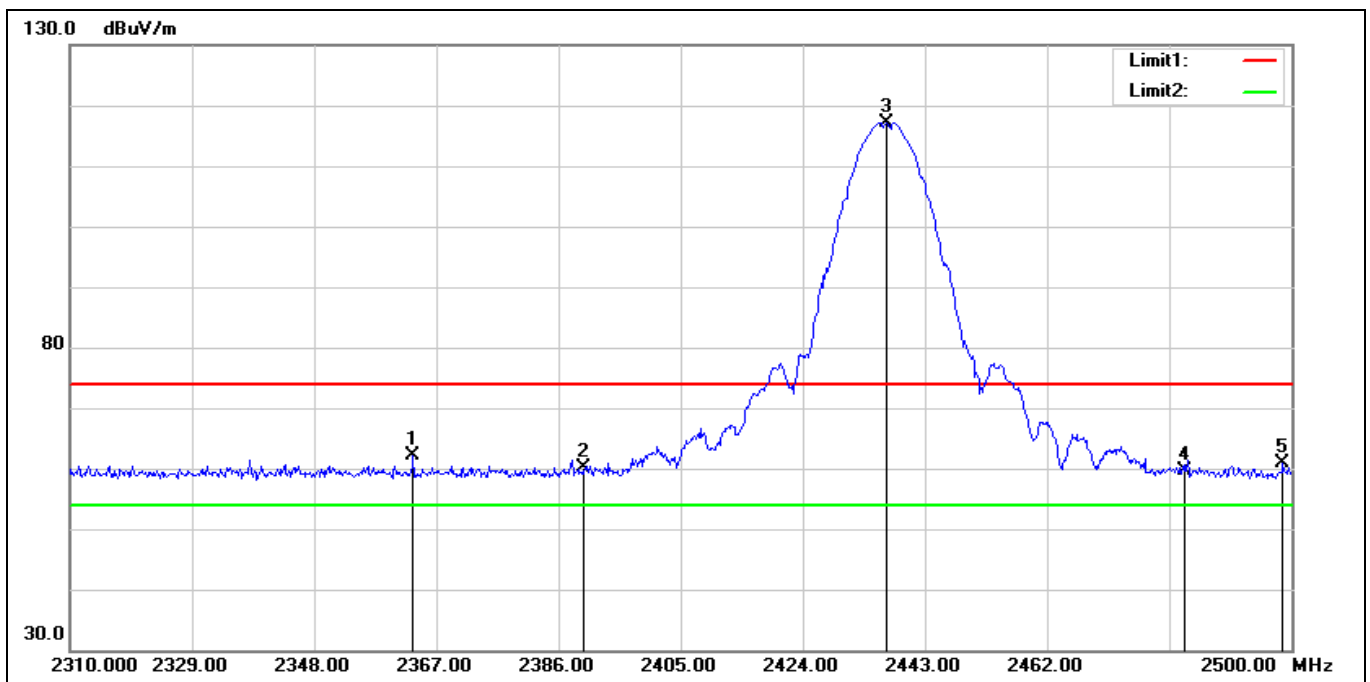


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2363.390	68.06	-5.97	62.09	74.00	-11.91	peak
2	2390.000	66.11	-6.09	60.02	74.00	-13.98	peak
3*	2437.110	123.22	-6.02	117.20	74.00	43.20	peak
4	2483.500	65.74	-6.13	59.61	74.00	-14.39	peak
5	2498.670	67.05	-6.20	60.85	74.00	-13.15	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

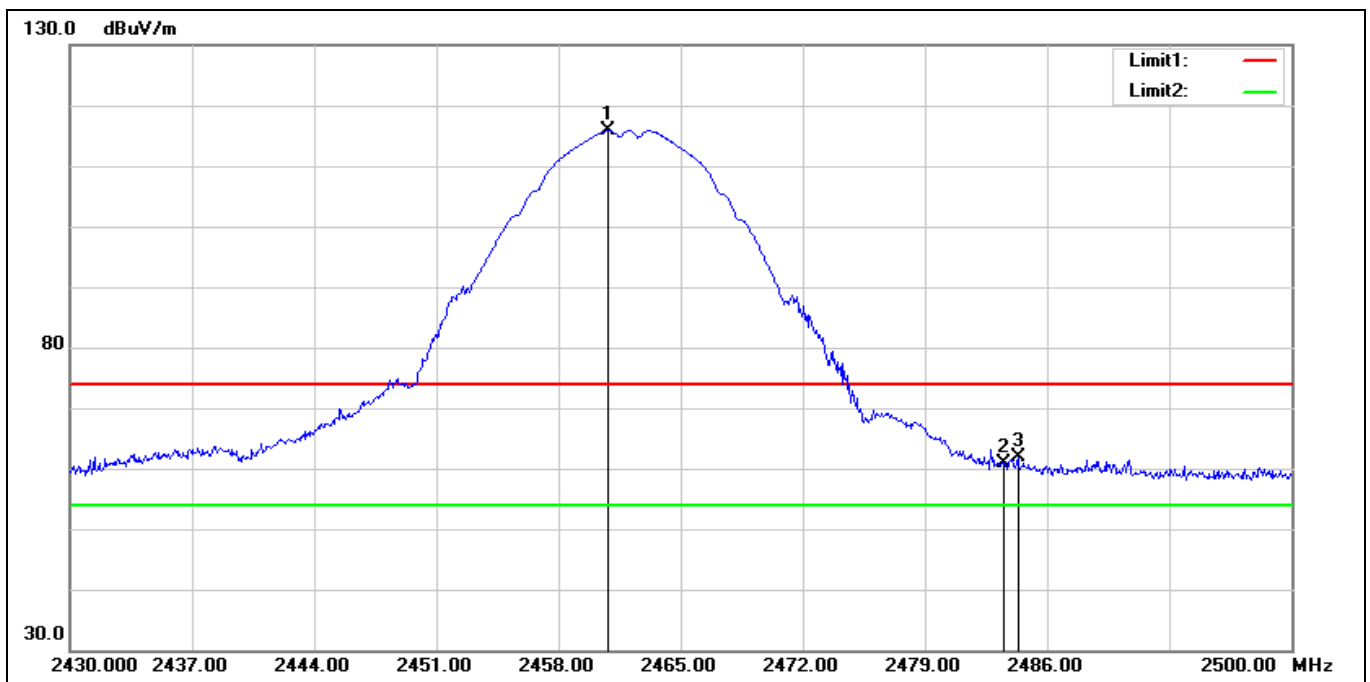


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2460.870	121.87	-6.03	115.84	74.00	41.84	peak
2	2483.500	66.89	-6.13	60.76	74.00	-13.24	peak
3	2484.320	68.10	-6.14	61.96	74.00	-12.04	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2462 MHz		
Remark:			

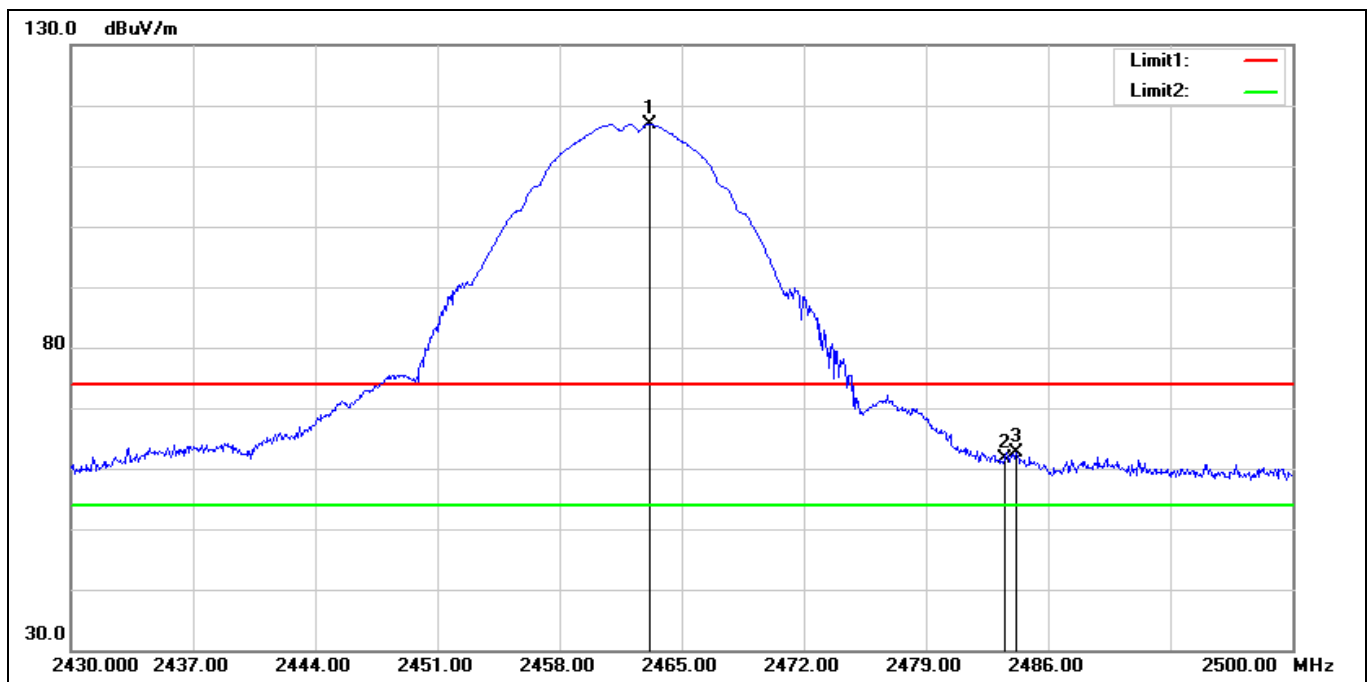


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2463.180	122.93	-6.04	116.89	74.00	42.89	peak
2	2483.500	67.77	-6.13	61.64	74.00	-12.36	peak
3	2484.180	68.80	-6.14	62.66	74.00	-11.34	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

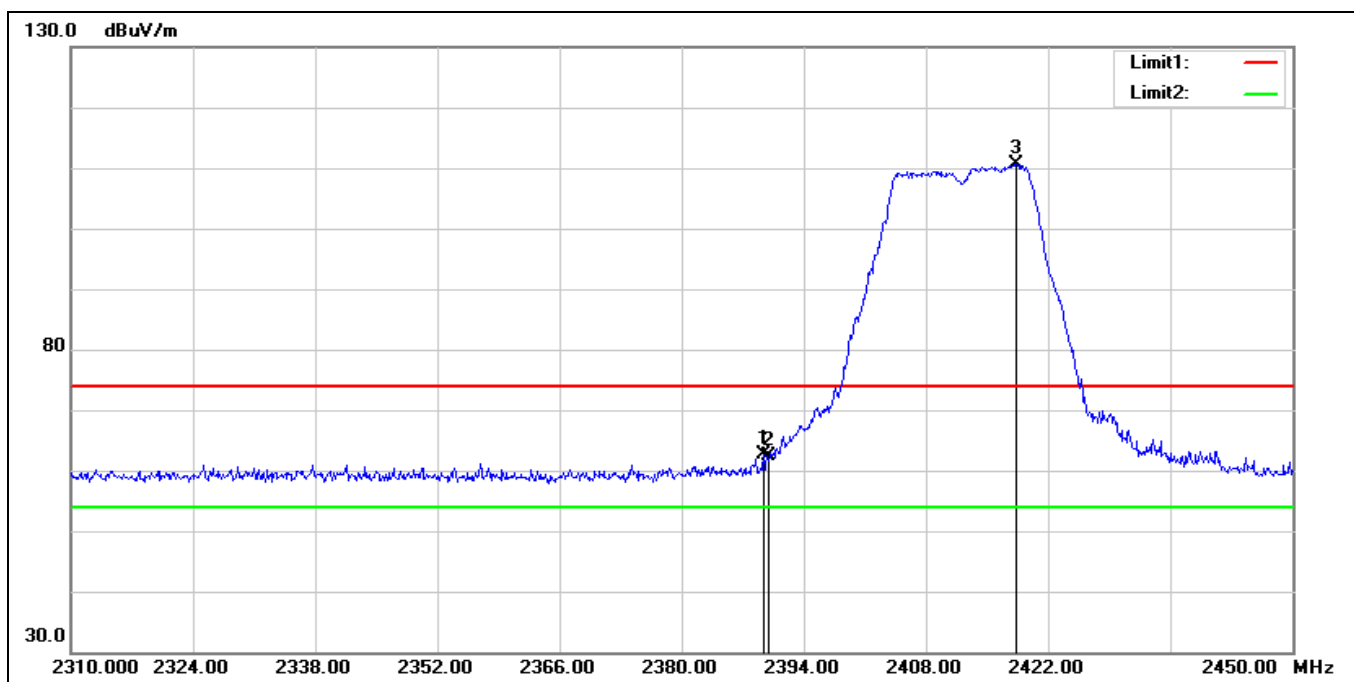


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	68.64	-6.09	62.55	74.00	-11.45	peak
2	2390.000	68.42	-6.09	62.33	74.00	-11.67	peak
3*	2418.360	116.76	-6.07	110.69	74.00	36.69	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

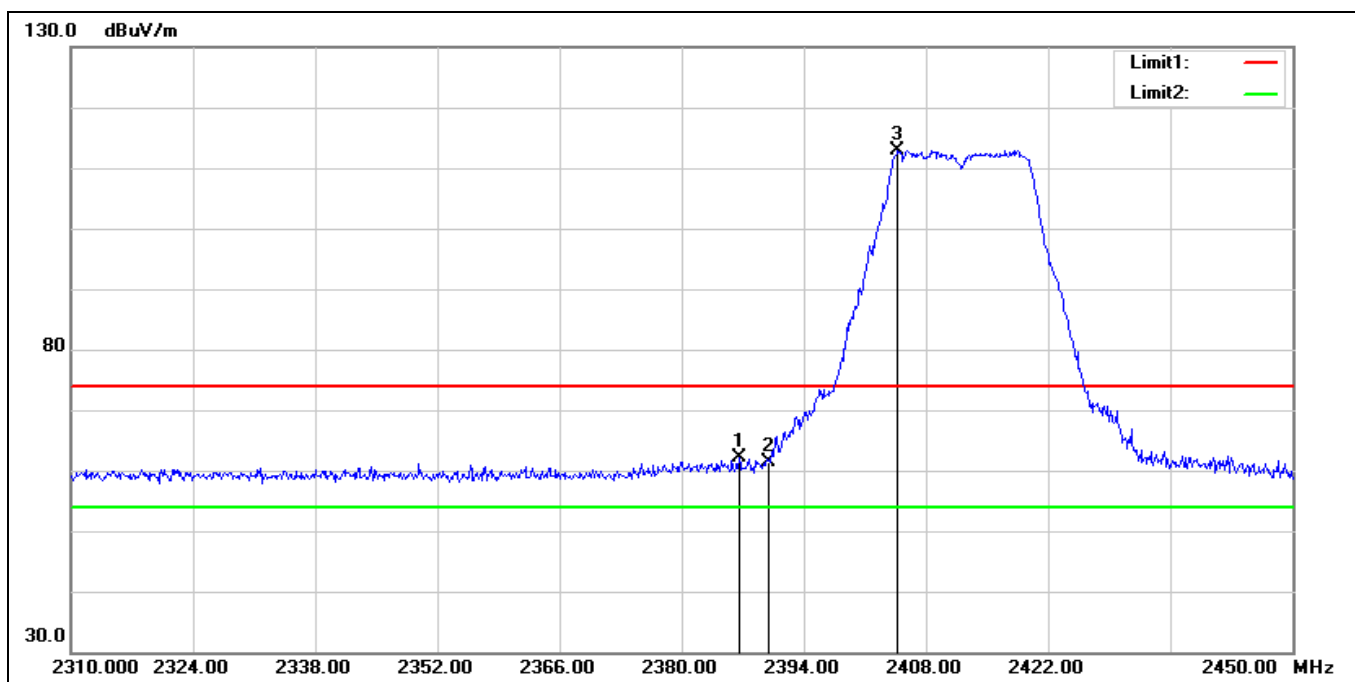


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.580	68.17	-6.08	62.09	74.00	-11.91	peak
2	2390.000	67.57	-6.09	61.48	74.00	-12.52	peak
3*	2404.780	119.09	-6.12	112.97	74.00	38.97	peak

Standard: Part 15C Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11g 2437 MHz
Remark:

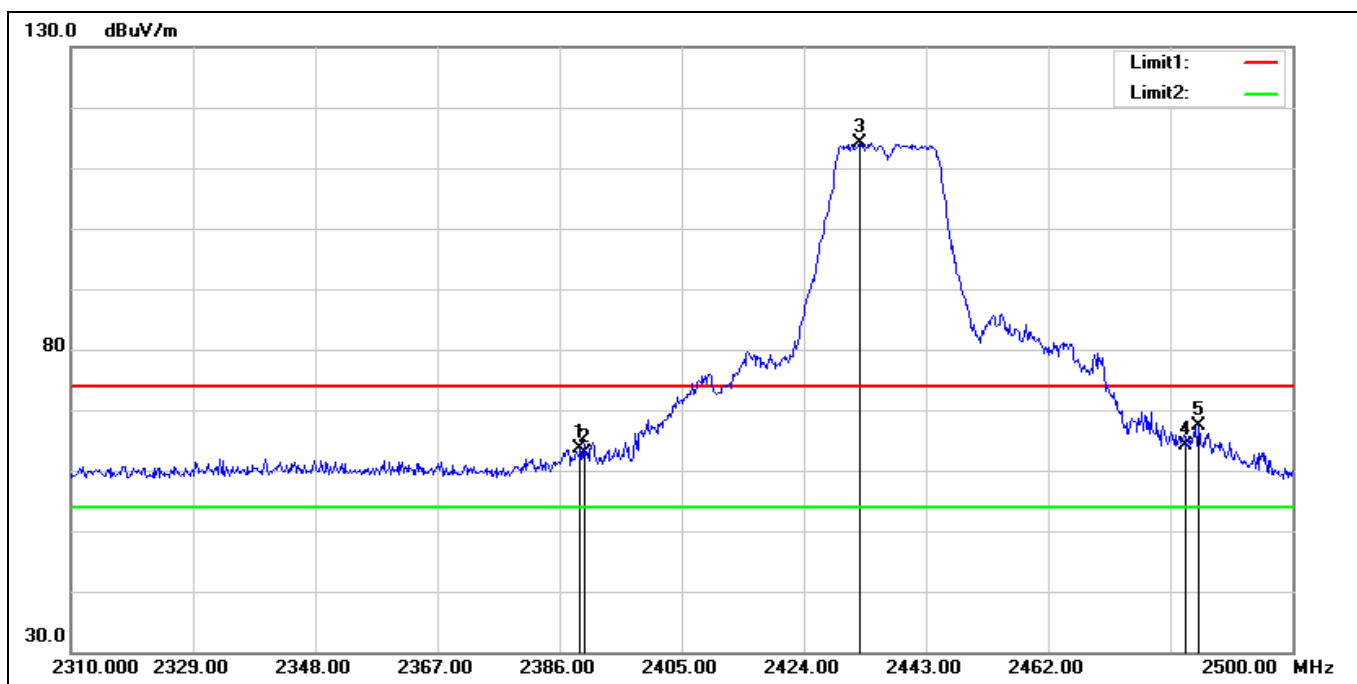


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	69.69	-6.09	63.60	74.00	-10.40	peak
2	2390.000	68.90	-6.09	62.81	74.00	-11.19	peak
3*	2432.740	120.25	-6.03	114.22	74.00	40.22	peak
4	2483.500	70.18	-6.13	64.05	74.00	-9.95	peak
5	2485.370	73.45	-6.13	67.32	74.00	-6.68	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

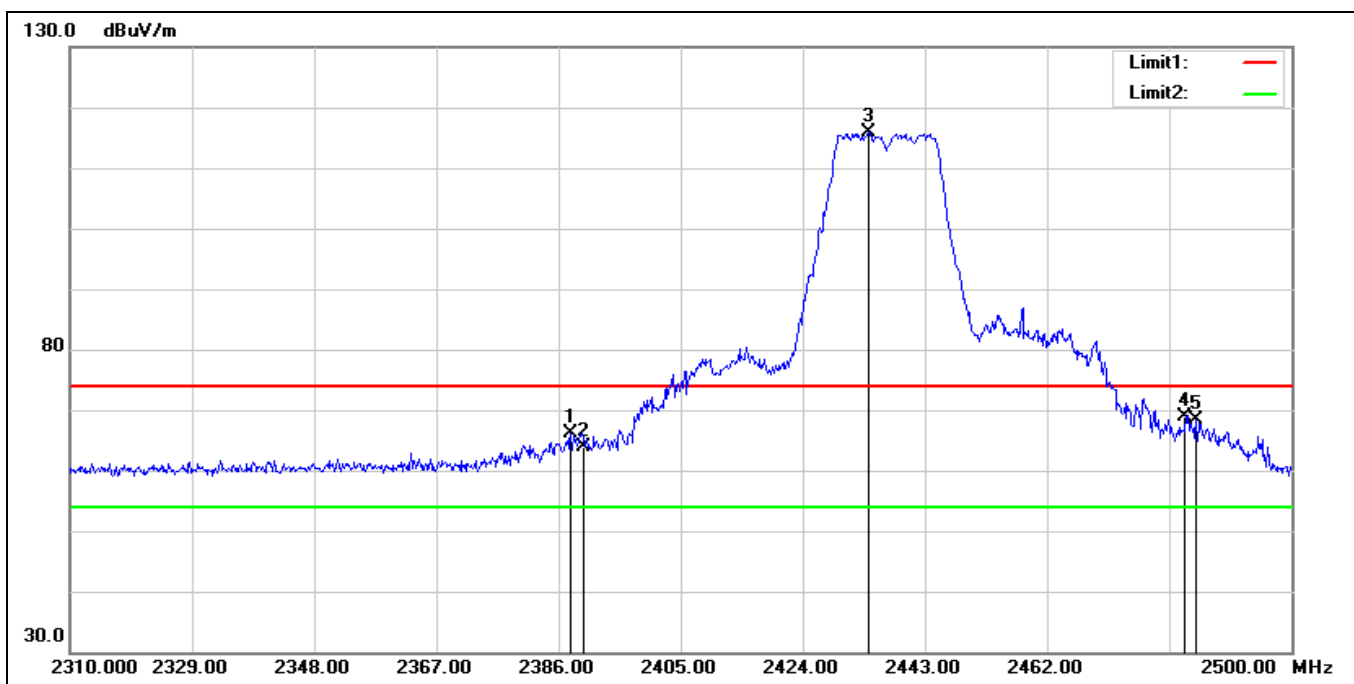


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.900	72.26	-6.08	66.18	74.00	-7.82	peak
2	2390.000	69.92	-6.09	63.83	74.00	-10.17	peak
3*	2434.260	121.82	-6.03	115.79	74.00	41.79	peak
4	2483.500	75.13	-6.13	69.00	74.00	-5.00	peak
5	2485.180	74.51	-6.14	68.37	74.00	-5.63	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

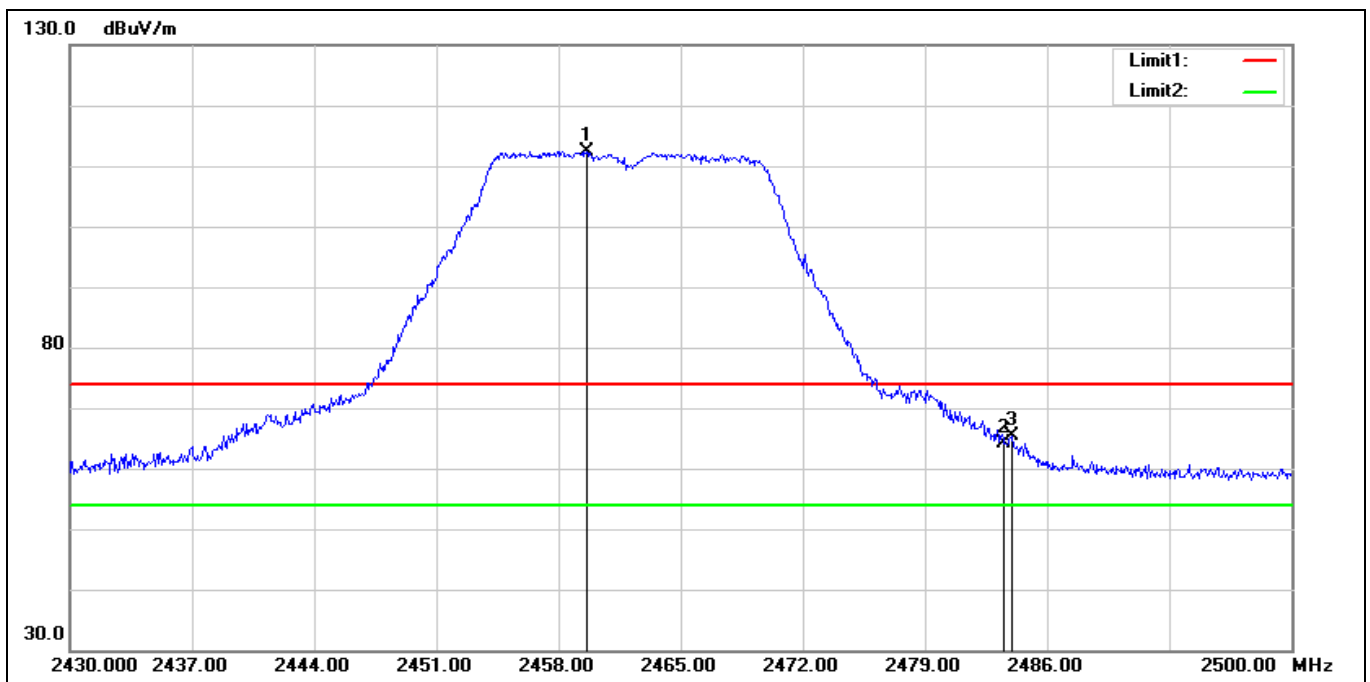


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2459.610	118.52	-6.02	112.50	74.00	38.50	peak
2	2483.500	70.34	-6.13	64.21	74.00	-9.79	peak
3	2483.970	71.47	-6.13	65.34	74.00	-8.66	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

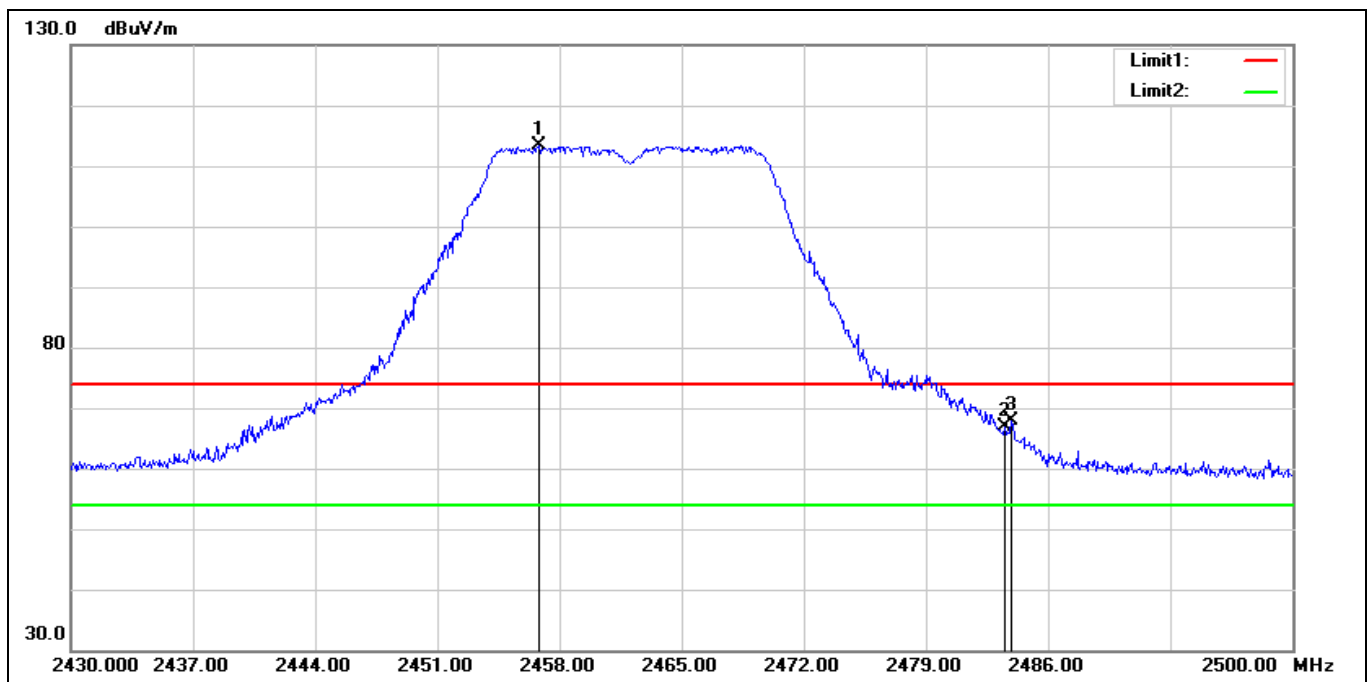


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2456.810	119.34	-6.00	113.34	74.00	39.34	peak
2	2483.500	72.93	-6.13	66.80	74.00	-7.20	peak
3	2483.900	74.11	-6.13	67.98	74.00	-6.02	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2412 MHz		
Remark:			

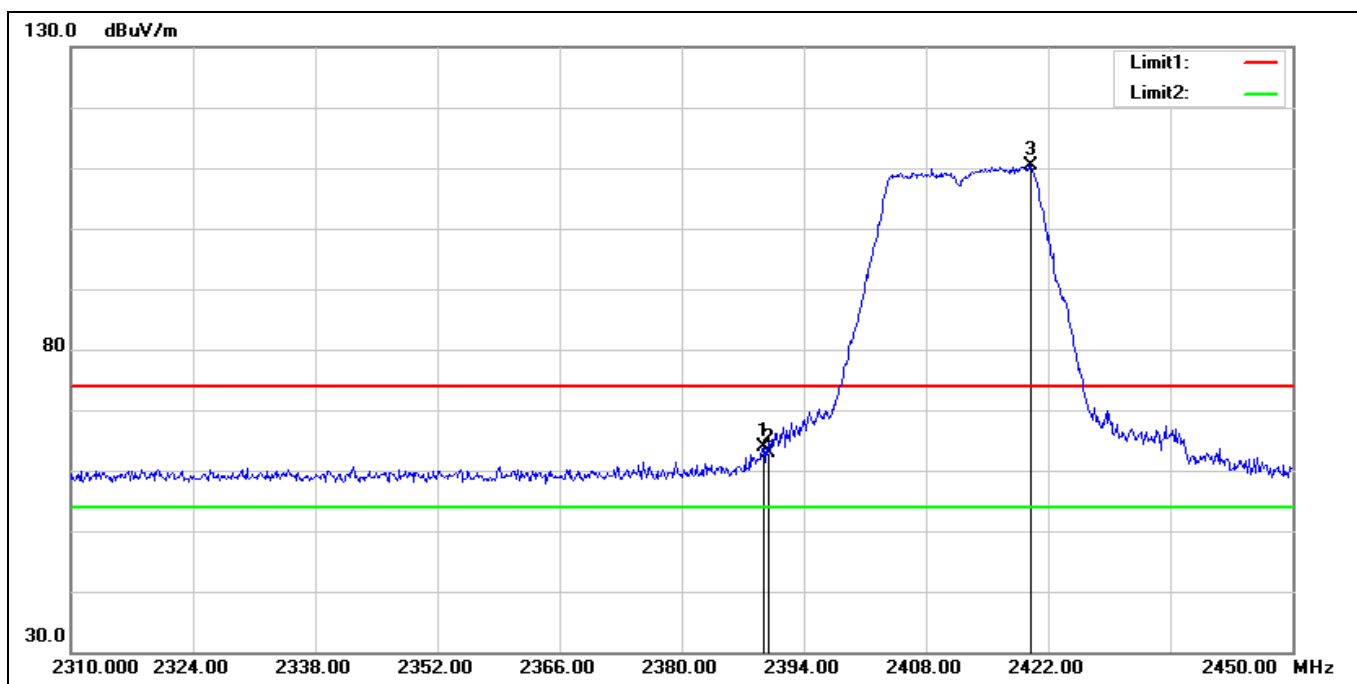


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	70.06	-6.09	63.97	74.00	-10.03	peak
2	2390.000	68.94	-6.09	62.85	74.00	-11.15	peak
3*	2420.040	116.41	-6.07	110.34	74.00	36.34	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2412 MHz		
Remark:			

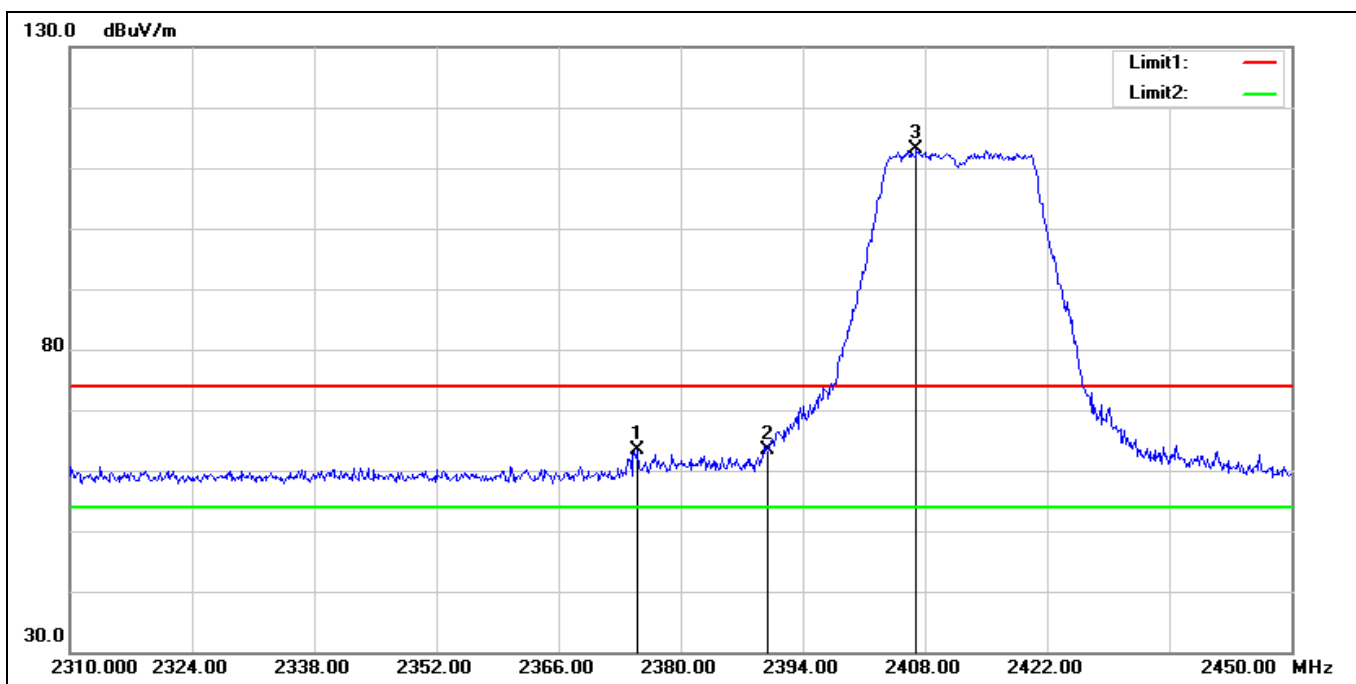


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.100	69.39	-6.02	63.37	74.00	-10.63	peak
2	2390.000	69.40	-6.09	63.31	74.00	-10.69	peak
3*	2407.020	119.35	-6.11	113.24	74.00	39.24	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2437 MHz		
Remark:			

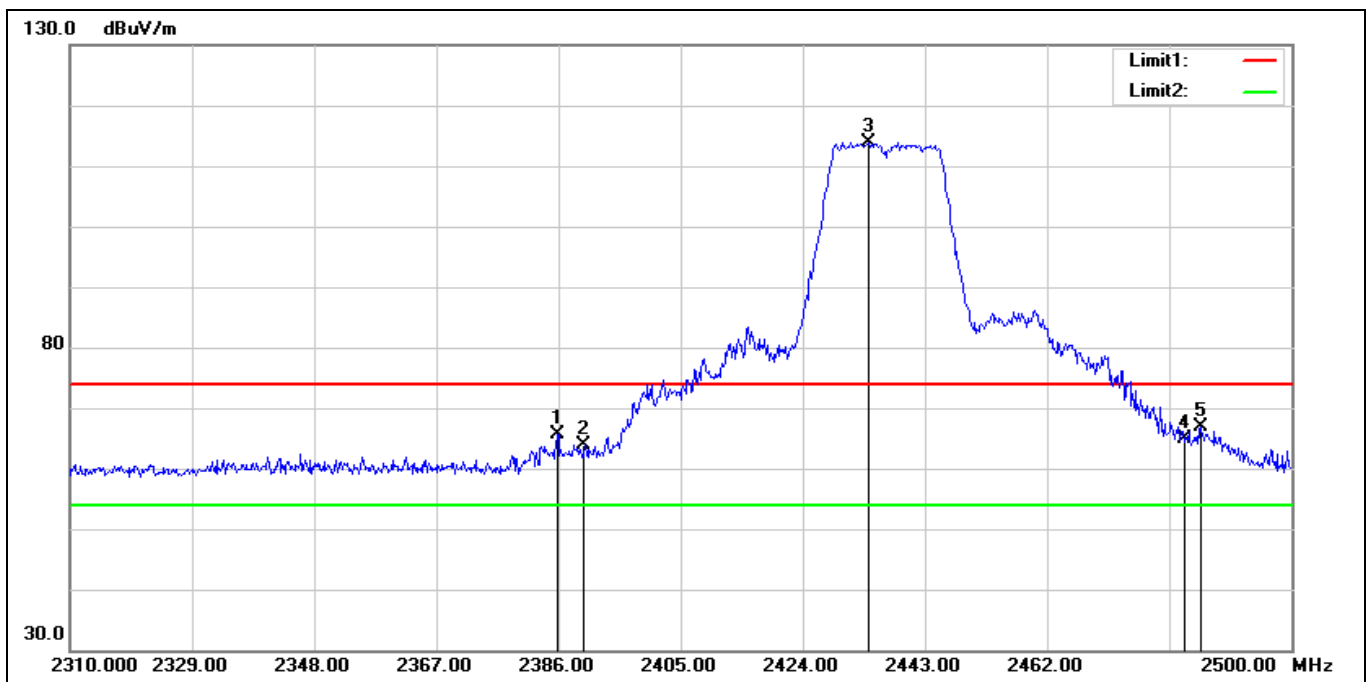


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.810	71.64	-6.07	65.57	74.00	-8.43	peak
2	2390.000	69.97	-6.09	63.88	74.00	-10.12	peak
3*	2434.260	120.02	-6.03	113.99	74.00	39.99	peak
4	2483.500	71.07	-6.13	64.94	74.00	-9.06	peak
5	2485.940	73.03	-6.14	66.89	74.00	-7.11	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2437 MHz		
Remark:			

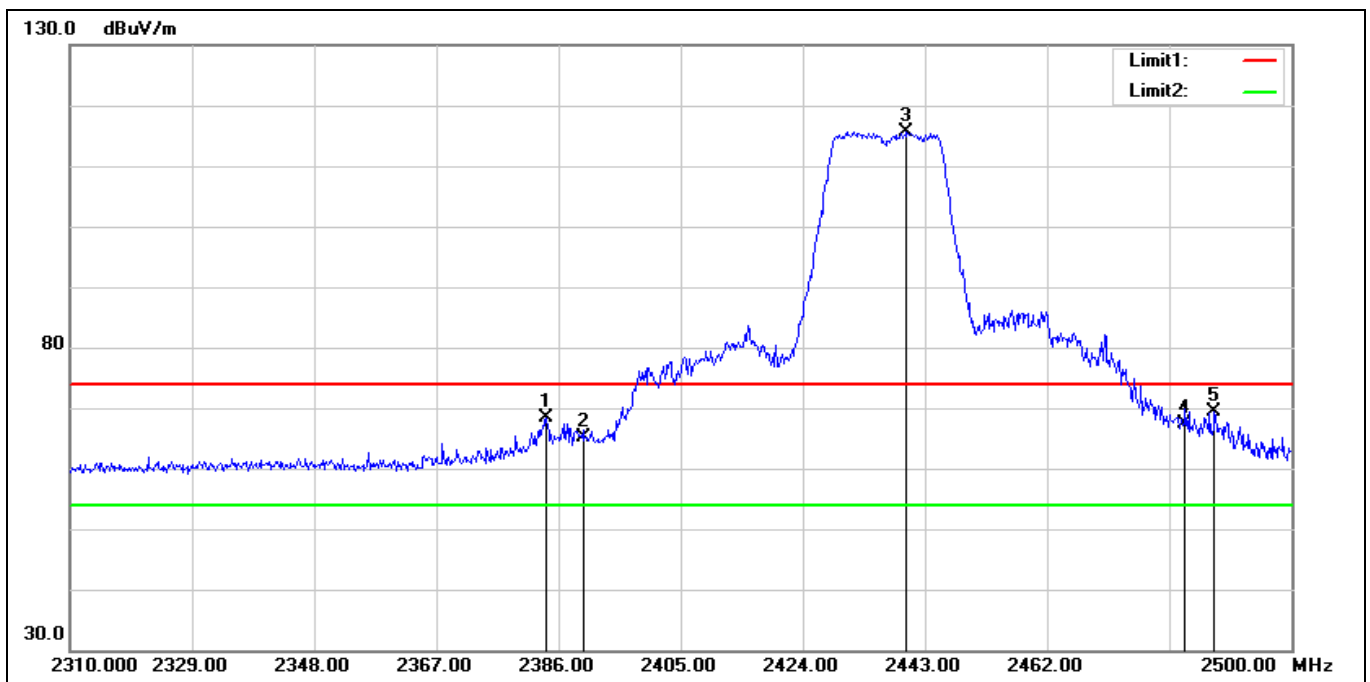


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.100	74.36	-6.06	68.30	74.00	-5.70	peak
2	2390.000	71.27	-6.09	65.18	74.00	-8.82	peak
3*	2440.150	121.57	-6.01	115.56	74.00	41.56	peak
4	2483.500	73.59	-6.13	67.46	74.00	-6.54	peak
5	2488.030	75.59	-6.15	69.44	74.00	-4.56	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2457 MHz		
Remark:			

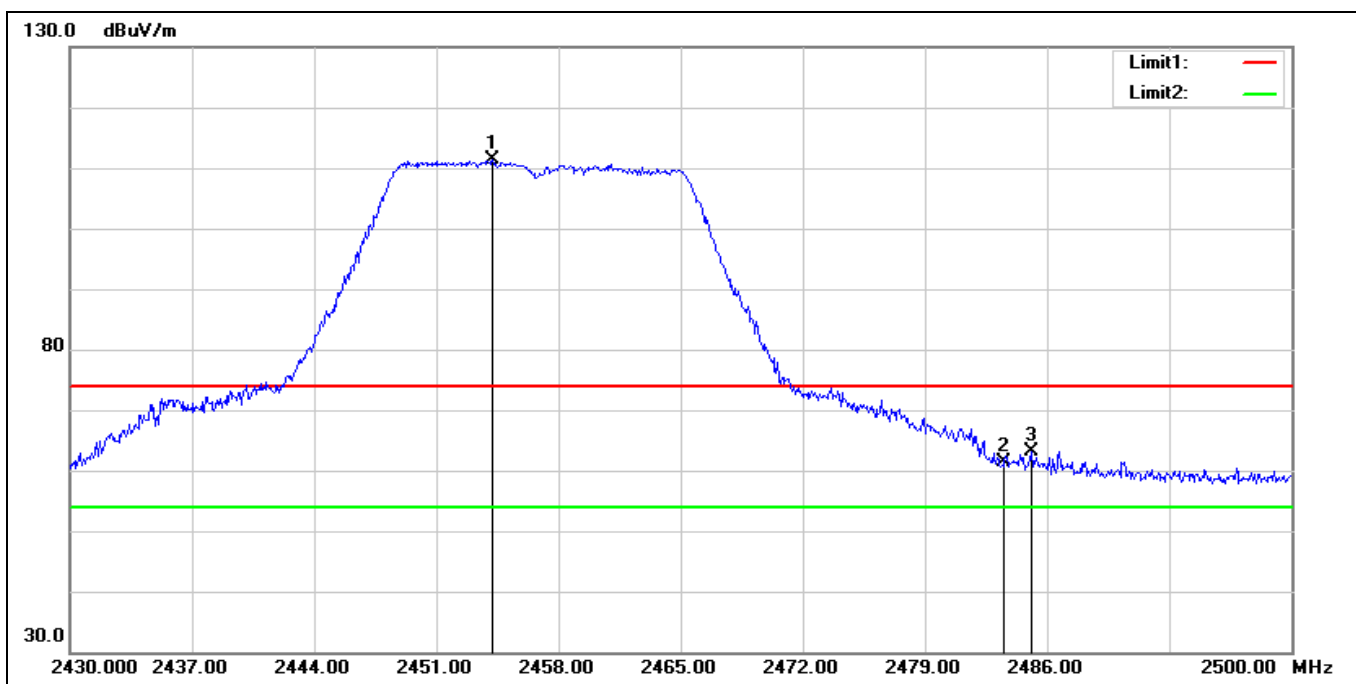


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2454.220	117.39	-6.00	111.39	74.00	37.39	peak
2	2483.500	67.42	-6.13	61.29	74.00	-12.71	peak
3	2485.090	69.36	-6.14	63.22	74.00	-10.78	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2457 MHz		
Remark:			

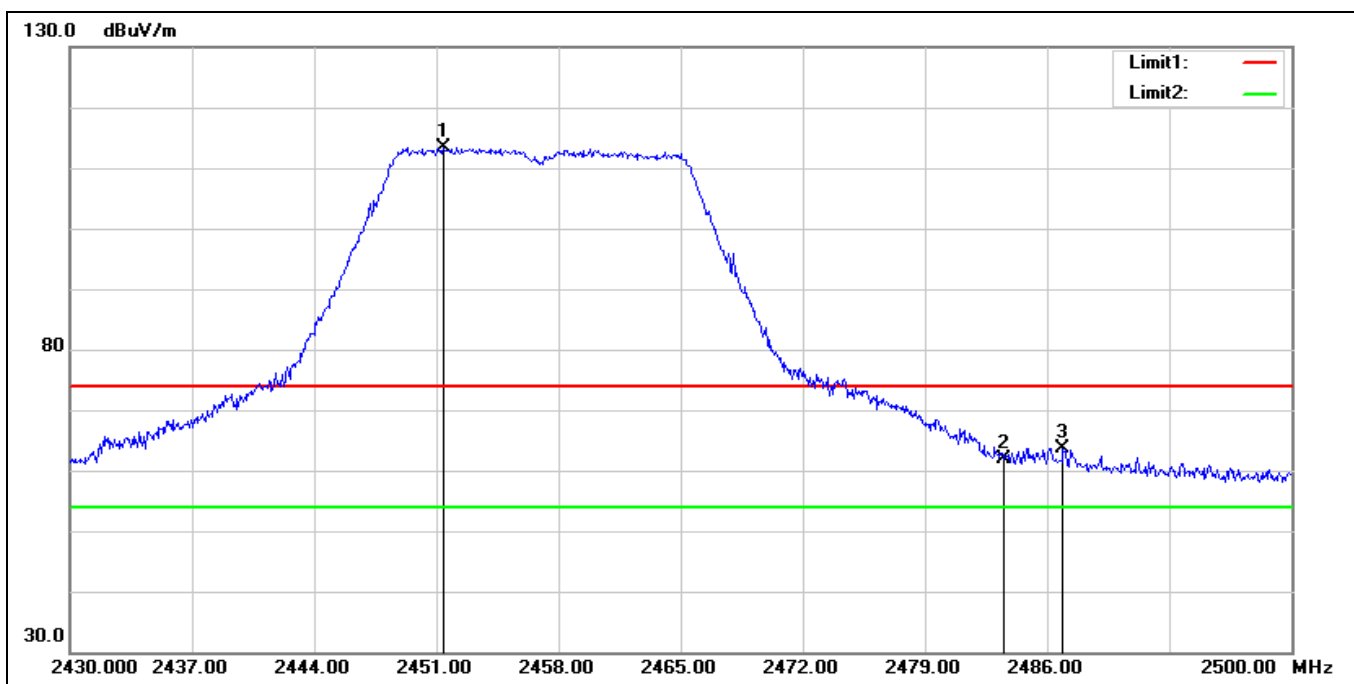


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2451.420	119.45	-5.98	113.47	74.00	39.47	peak
2	2483.500	67.95	-6.13	61.82	74.00	-12.18	peak
3	2486.910	69.85	-6.14	63.71	74.00	-10.29	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2462 MHz		
Remark:			

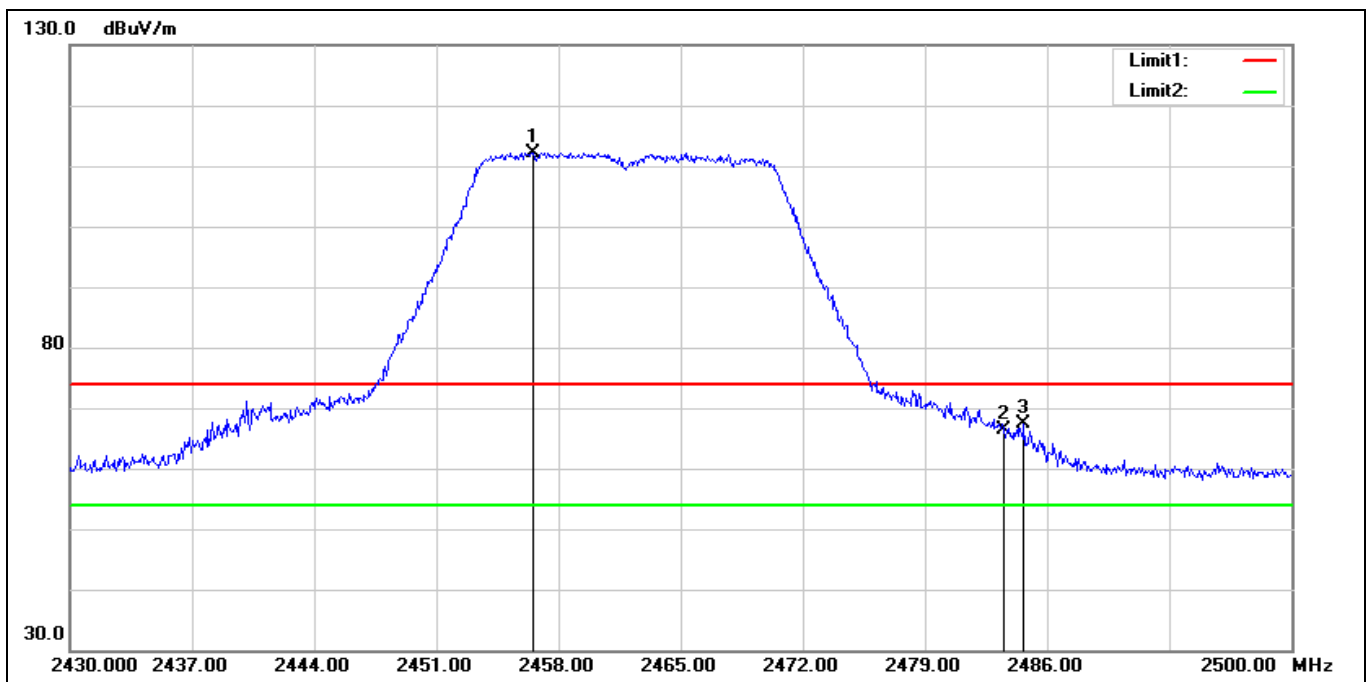


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2456.530	118.21	-6.00	112.21	74.00	38.21	peak
2	2483.500	72.46	-6.13	66.33	74.00	-7.67	peak
3	2484.670	73.49	-6.14	67.35	74.00	-6.65	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2462 MHz		
Remark:			

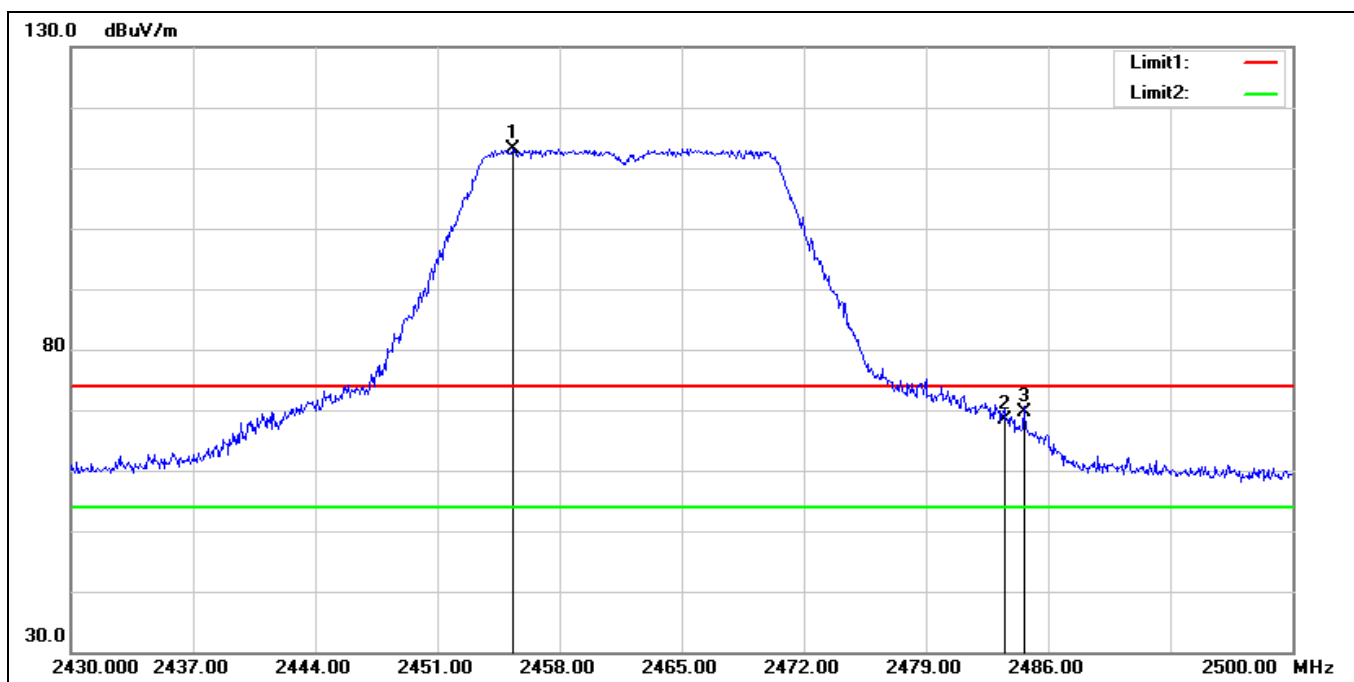


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2455.340	119.21	-6.00	113.21	74.00	39.21	peak
2	2483.500	74.48	-6.13	68.35	74.00	-5.65	peak
3	2484.670	75.80	-6.14	69.66	74.00	-4.34	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

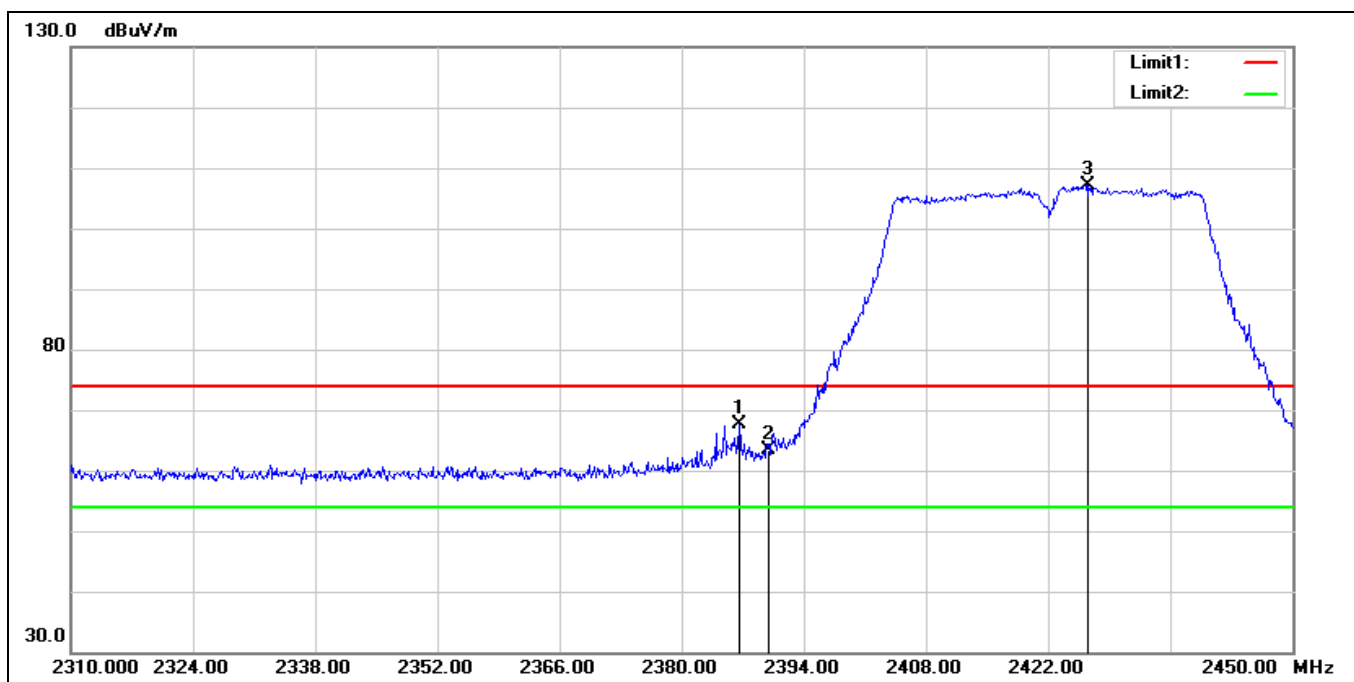


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.580	73.83	-6.08	67.75	74.00	-6.25	peak
2	2390.000	69.53	-6.09	63.44	74.00	-10.56	peak
3*	2426.620	113.23	-6.05	107.18	74.00	33.18	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

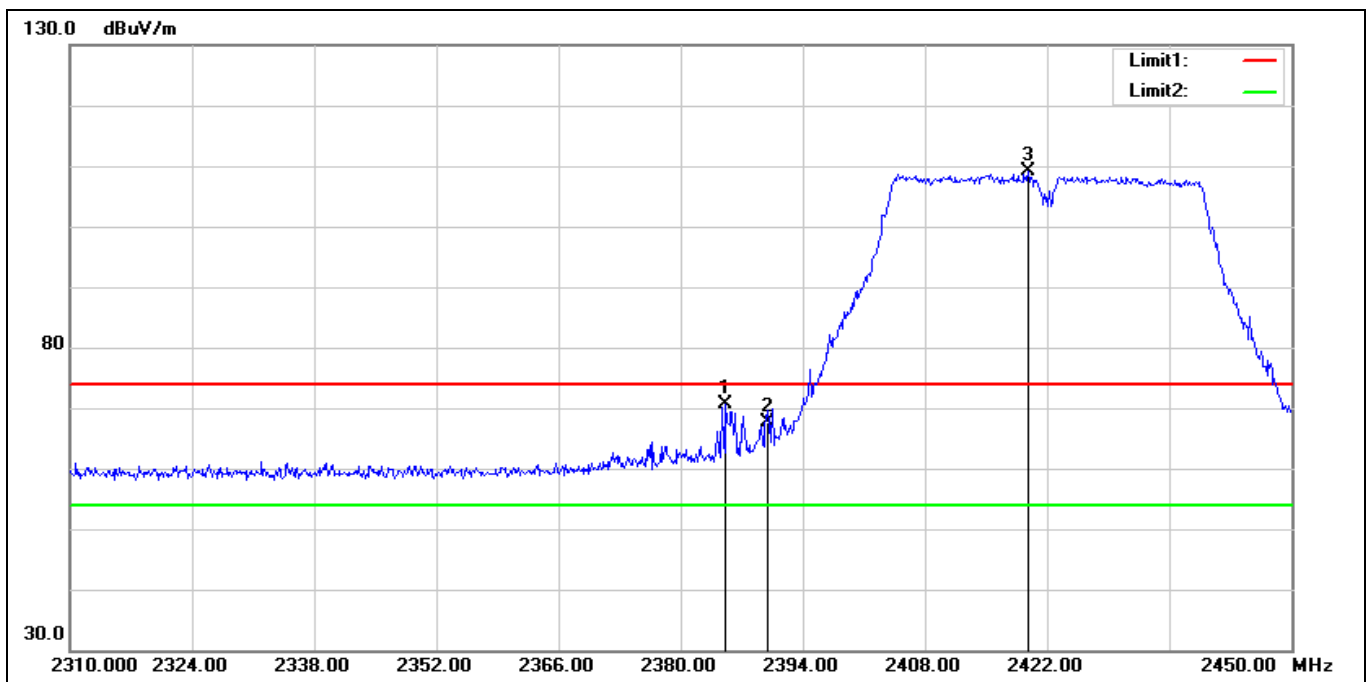


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.180	76.62	-6.07	70.55	74.00	-3.45	peak
2	2390.000	73.83	-6.09	67.74	74.00	-6.26	peak
3*	2419.760	115.30	-6.07	109.23	74.00	35.23	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2437 MHz		
Remark:			

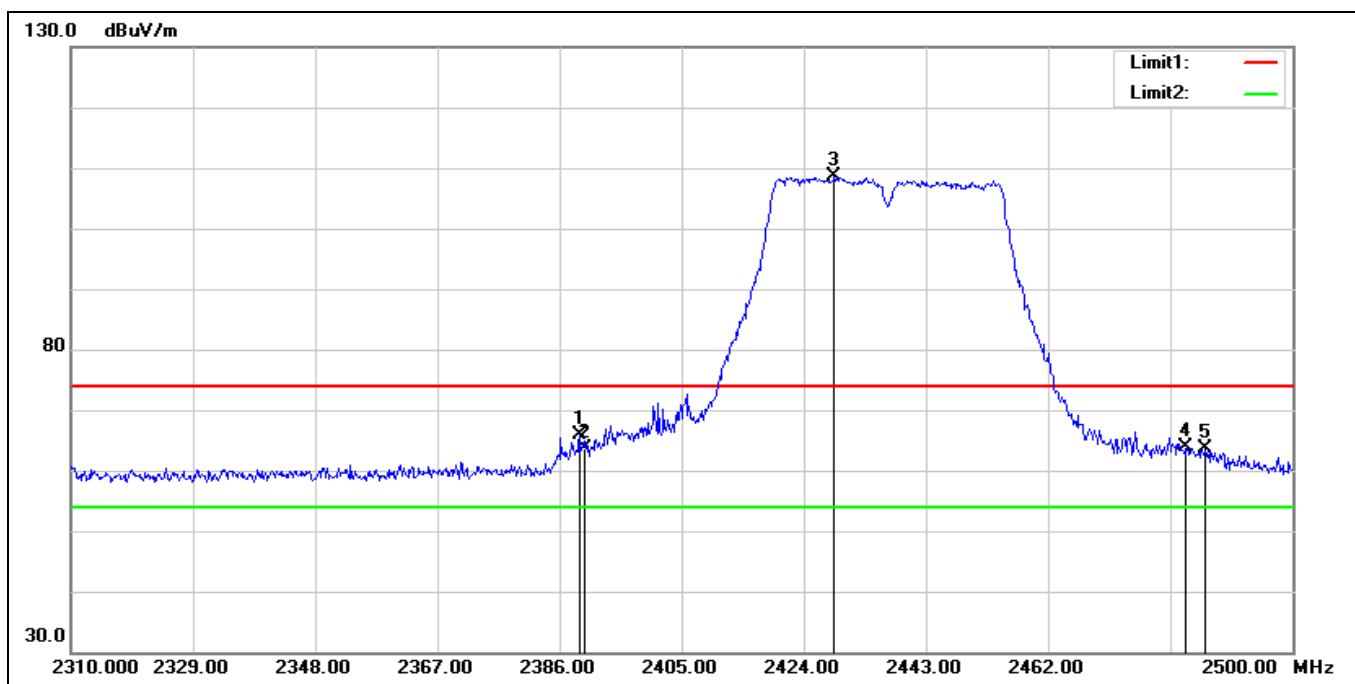


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.040	71.91	-6.08	65.83	74.00	-8.17	peak
2	2390.000	69.64	-6.09	63.55	74.00	-10.45	peak
3*	2428.750	114.61	-6.04	108.57	74.00	34.57	peak
4	2483.500	69.96	-6.13	63.83	74.00	-10.17	peak
5	2486.510	69.67	-6.14	63.53	74.00	-10.47	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2437 MHz		
Remark:			

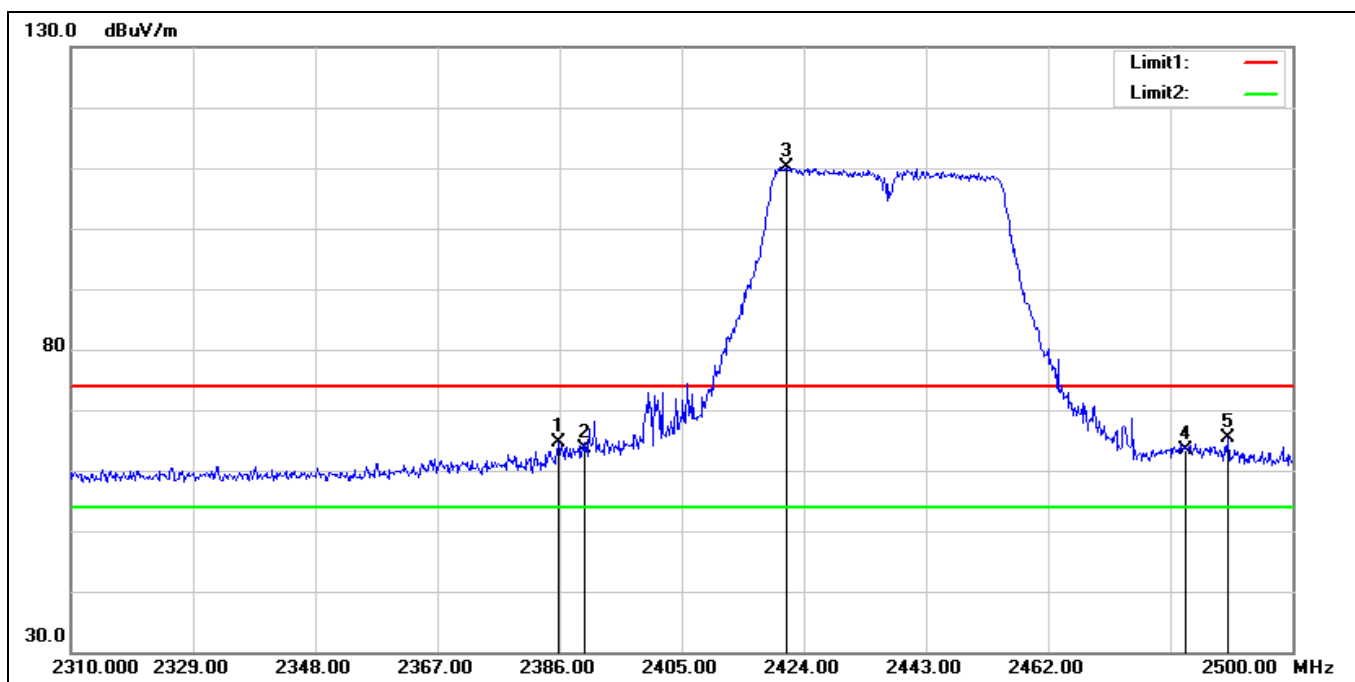


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.810	70.79	-6.07	64.72	74.00	-9.28	peak
2	2390.000	69.75	-6.09	63.66	74.00	-10.34	peak
3*	2421.340	116.28	-6.07	110.21	74.00	36.21	peak
4	2483.500	69.62	-6.13	63.49	74.00	-10.51	peak
5	2489.930	71.66	-6.16	65.50	74.00	-8.50	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2452 MHz		
Remark:			

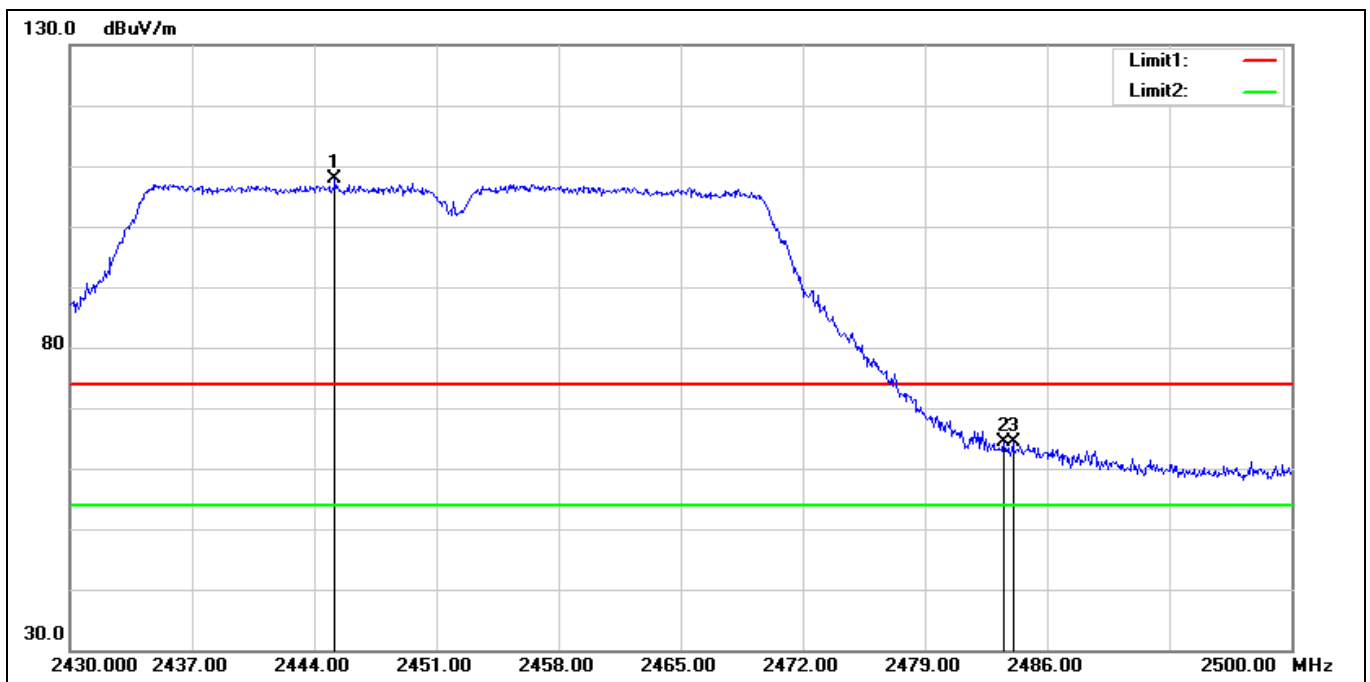


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2445.190	113.75	-5.99	107.76	74.00	33.76	peak
2	2483.500	70.55	-6.13	64.42	74.00	-9.58	peak
3	2484.040	70.52	-6.13	64.39	74.00	-9.61	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2452 MHz		
Remark:			

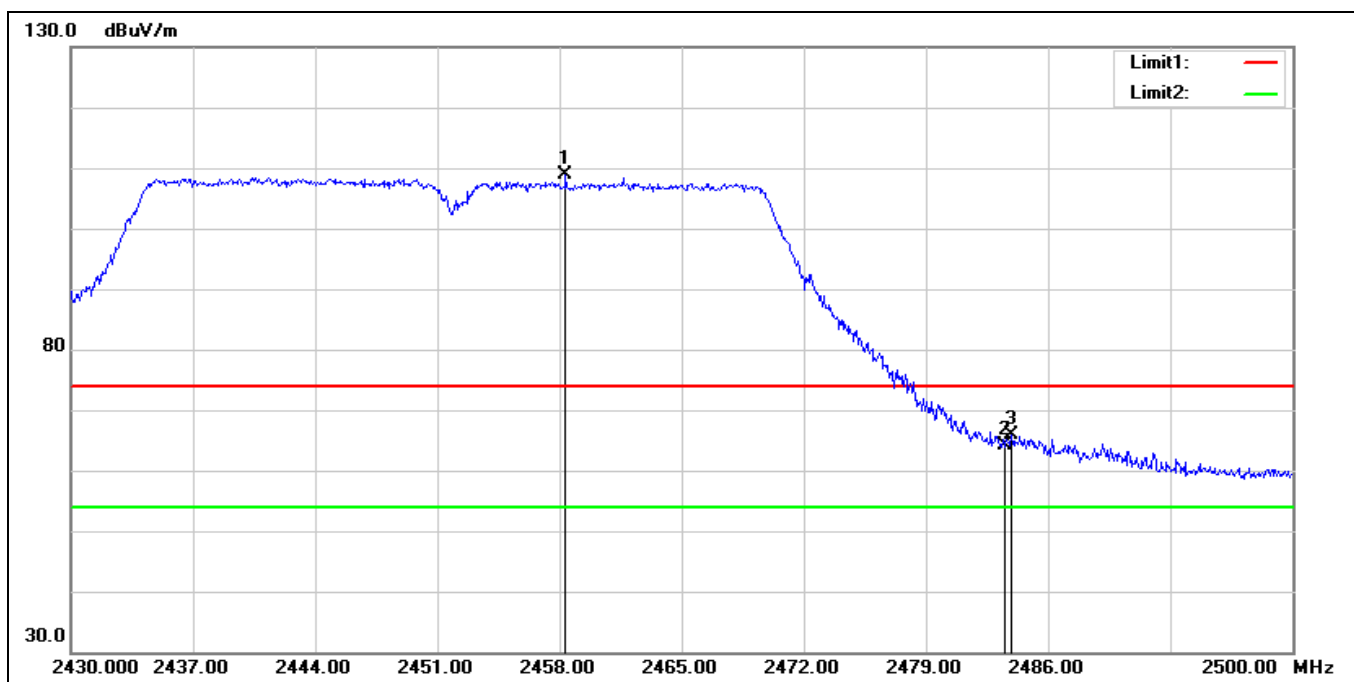


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2458.350	114.99	-6.01	108.98	74.00	34.98	peak
2	2483.500	70.33	-6.13	64.20	74.00	-9.80	peak
3	2483.900	71.91	-6.13	65.78	74.00	-8.22	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2412 MHz		
Remark:			

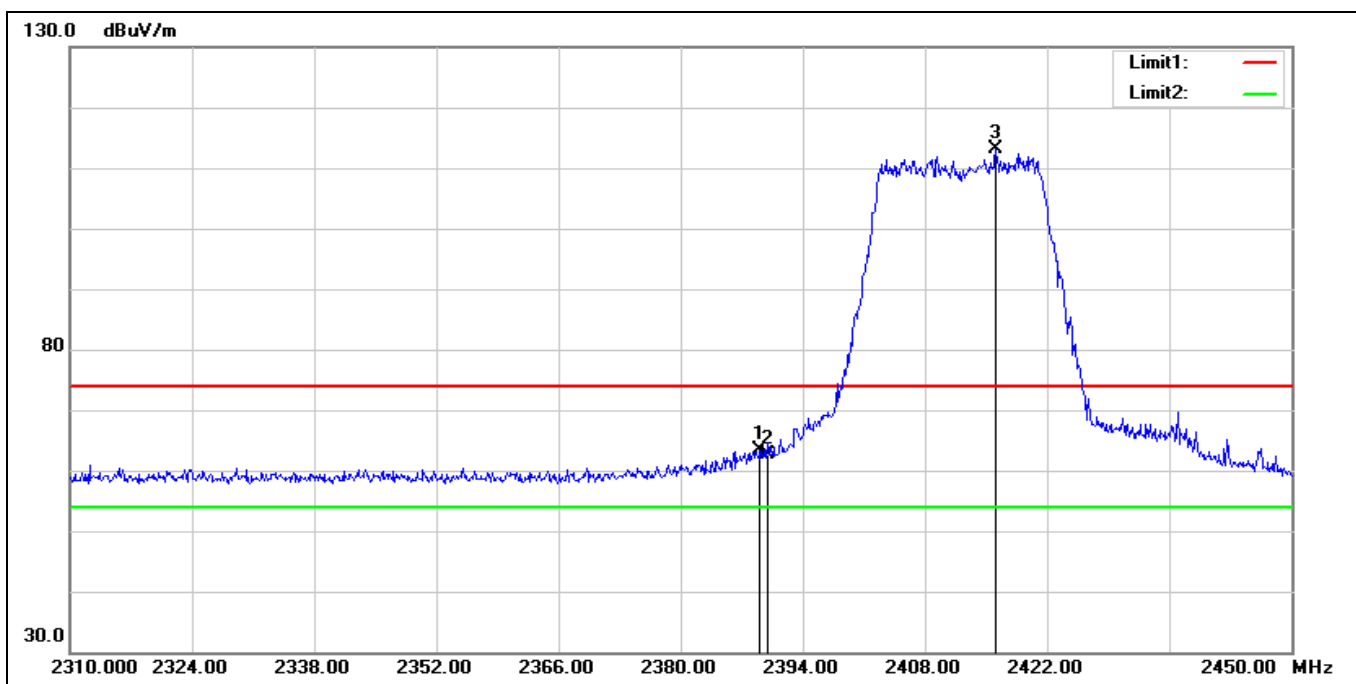


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.100	69.36	-6.08	63.28	74.00	-10.72	peak
2	2390.000	68.75	-6.09	62.66	74.00	-11.34	peak
3*	2416.120	119.25	-6.09	113.16	74.00	39.16	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2412 MHz		
Remark:			

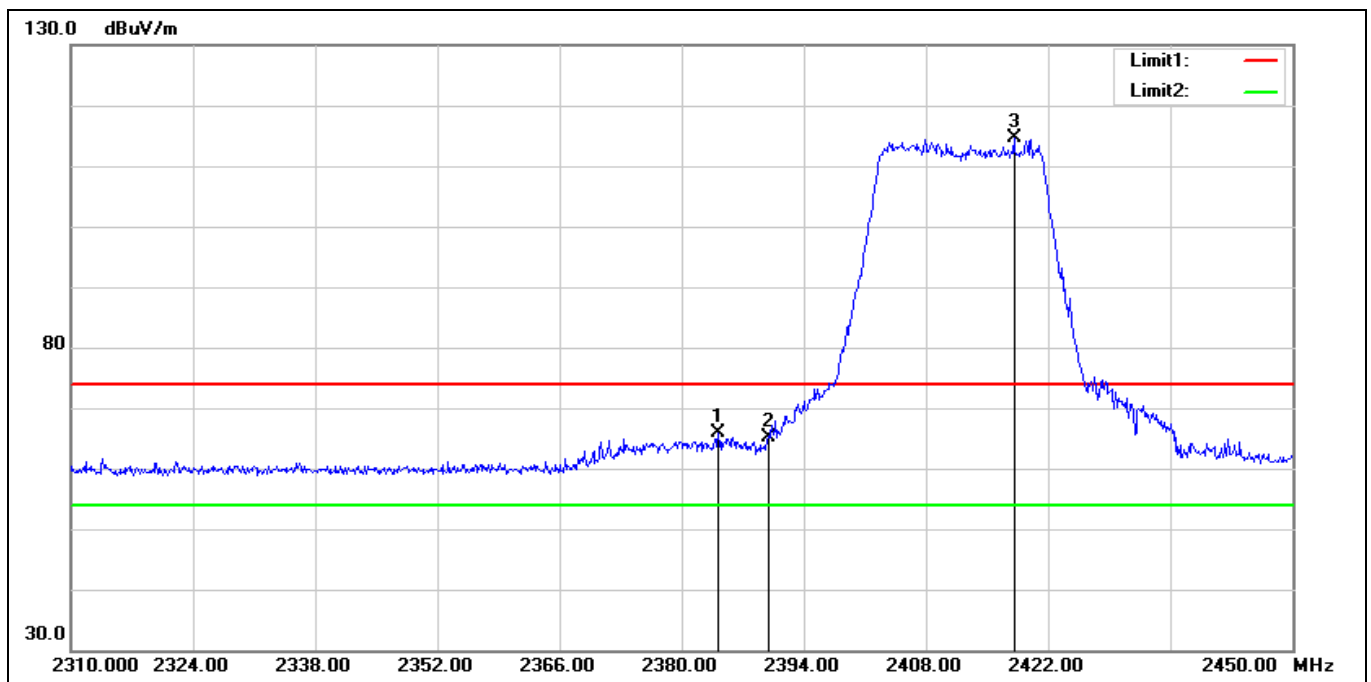


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.200	71.91	-6.07	65.84	74.00	-8.16	peak
2	2390.000	71.28	-6.09	65.19	74.00	-8.81	peak
3*	2418.080	120.69	-6.07	114.62	74.00	40.62	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2437 MHz		
Remark:			

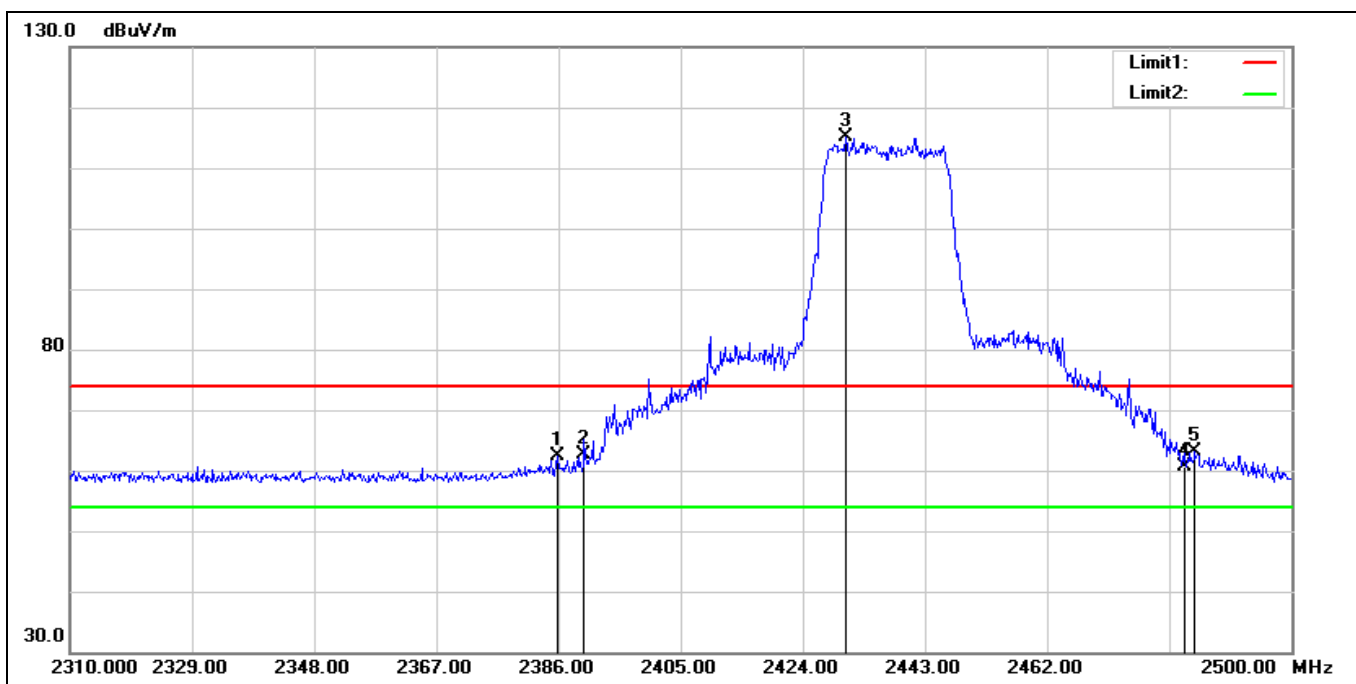


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.810	68.56	-6.07	62.49	74.00	-11.51	peak
2	2390.000	68.82	-6.09	62.73	74.00	-11.27	peak
3*	2430.650	121.10	-6.04	115.06	74.00	41.06	peak
4	2483.500	66.80	-6.13	60.67	74.00	-13.33	peak
5	2484.990	69.16	-6.14	63.02	74.00	-10.98	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2437 MHz		
Remark:			

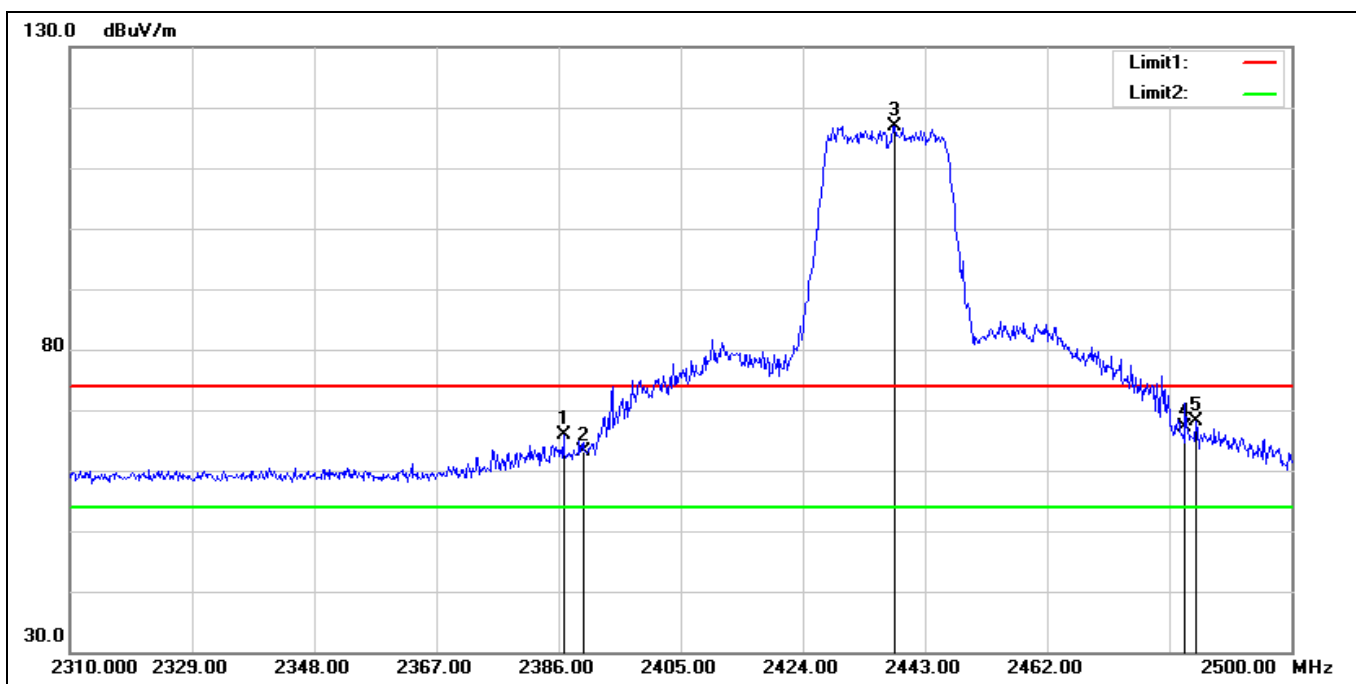


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.760	71.92	-6.08	65.84	74.00	-8.16	peak
2	2390.000	69.30	-6.09	63.21	74.00	-10.79	peak
3*	2438.250	122.87	-6.01	116.86	74.00	42.86	peak
4	2483.500	73.19	-6.13	67.06	74.00	-6.94	peak
5	2485.180	74.29	-6.14	68.15	74.00	-5.85	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2457 MHz		
Remark:			

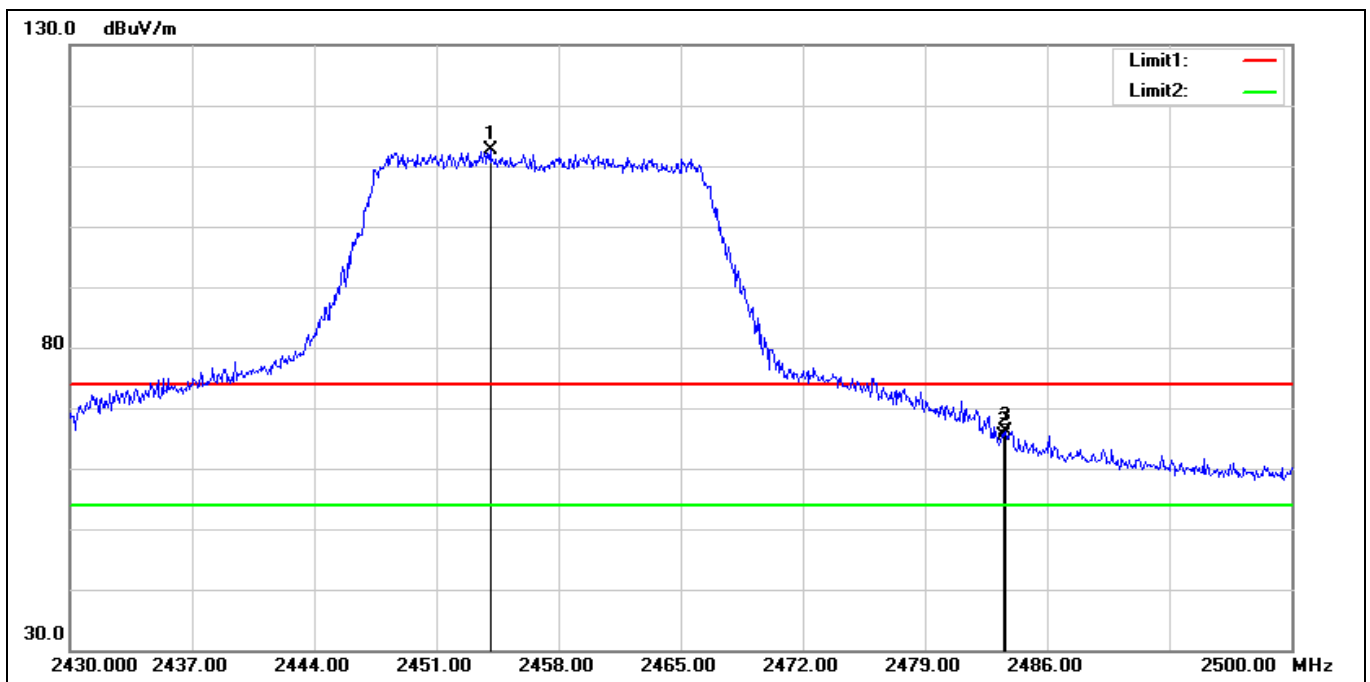


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2454.080	118.57	-5.99	112.58	74.00	38.58	peak
2	2483.500	71.46	-6.13	65.33	74.00	-8.67	peak
3	2483.620	72.29	-6.13	66.16	74.00	-7.84	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2457 MHz		
Remark:			

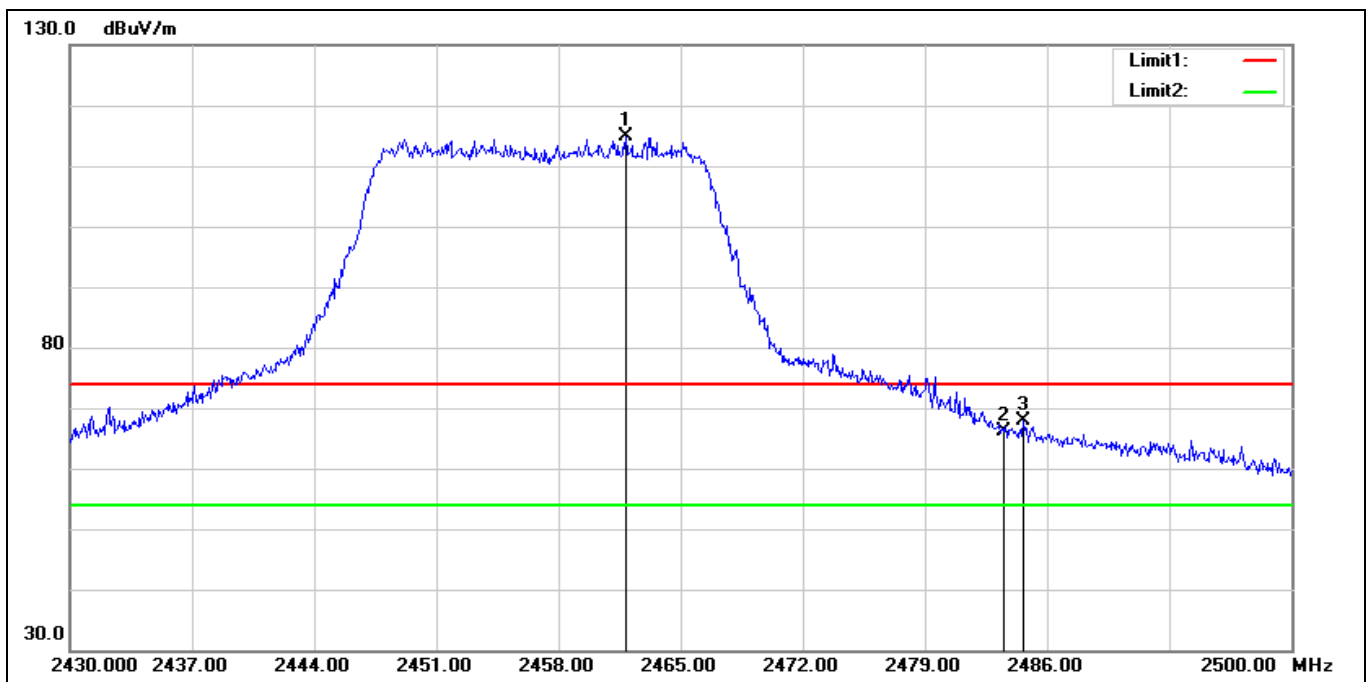


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2461.850	120.79	-6.03	114.76	74.00	40.76	peak
2	2483.500	72.29	-6.13	66.16	74.00	-7.84	peak
3	2484.670	74.07	-6.14	67.93	74.00	-6.07	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2462 MHz		
Remark:			

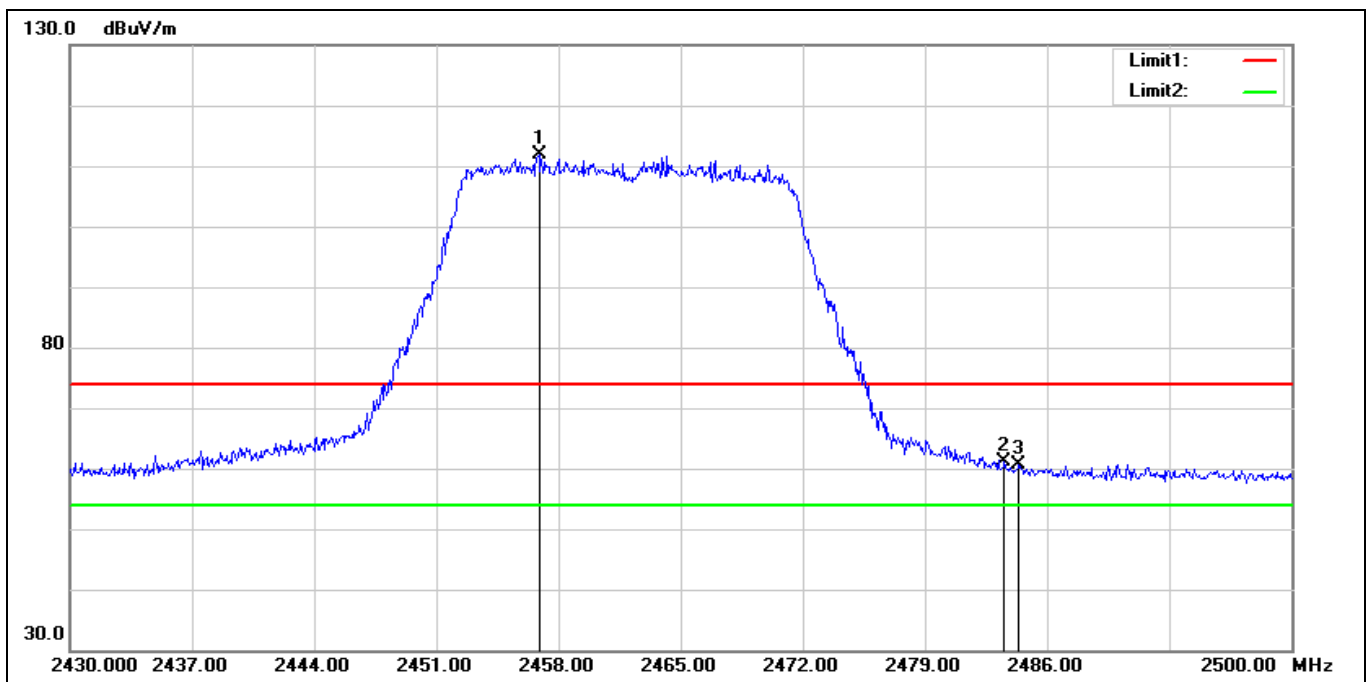


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2456.880	117.77	-6.00	111.77	74.00	37.77	peak
2	2483.500	67.14	-6.13	61.01	74.00	-12.99	peak
3	2484.390	66.81	-6.14	60.67	74.00	-13.33	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2462 MHz		
Remark:			

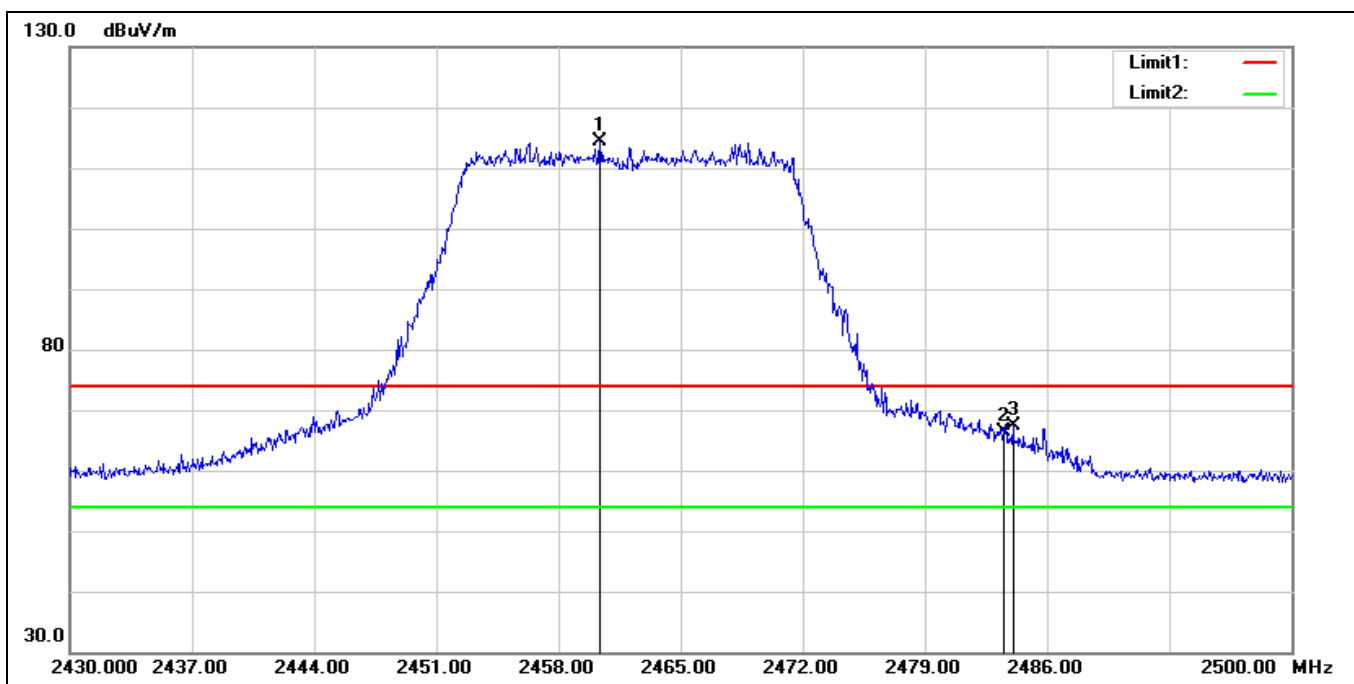


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2460.380	120.38	-6.02	114.36	74.00	40.36	peak
2	2483.500	72.40	-6.13	66.27	74.00	-7.73	peak
3	2484.040	73.61	-6.13	67.48	74.00	-6.52	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2422 MHz		
Remark:			

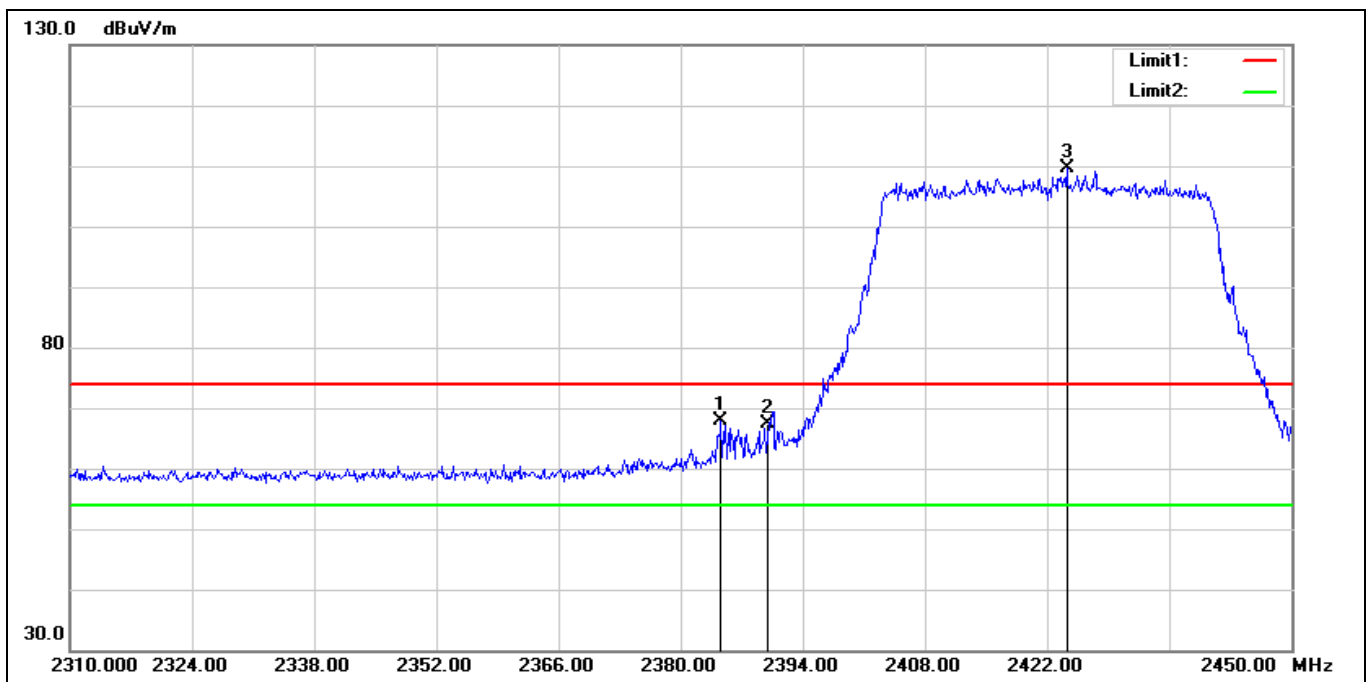


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.620	73.91	-6.07	67.84	74.00	-6.16	peak
2	2390.000	73.48	-6.09	67.39	74.00	-6.61	peak
3*	2424.240	115.58	-6.06	109.52	74.00	35.52	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2422 MHz		
Remark:			

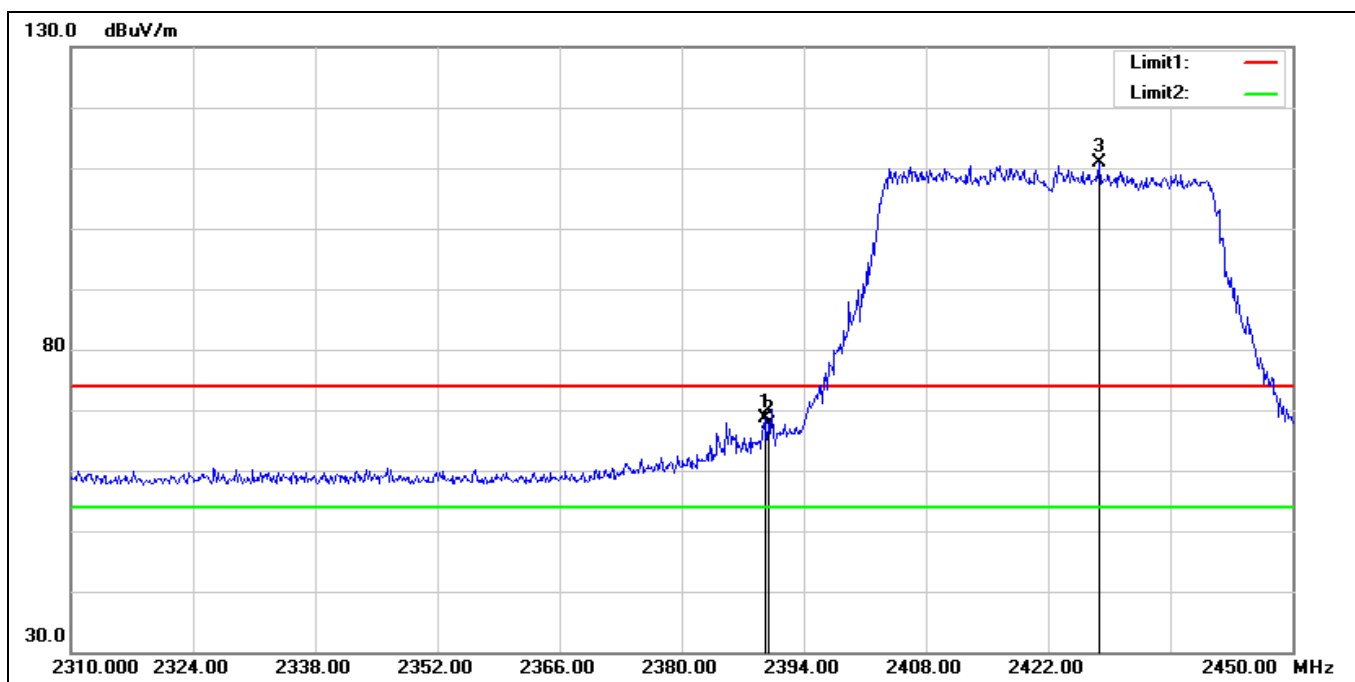


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	74.71	-6.09	68.62	74.00	-5.38	peak
2	2390.000	73.67	-6.09	67.58	74.00	-6.42	peak
3*	2427.880	116.87	-6.04	110.83	74.00	36.83	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2437 MHz		
Remark:			

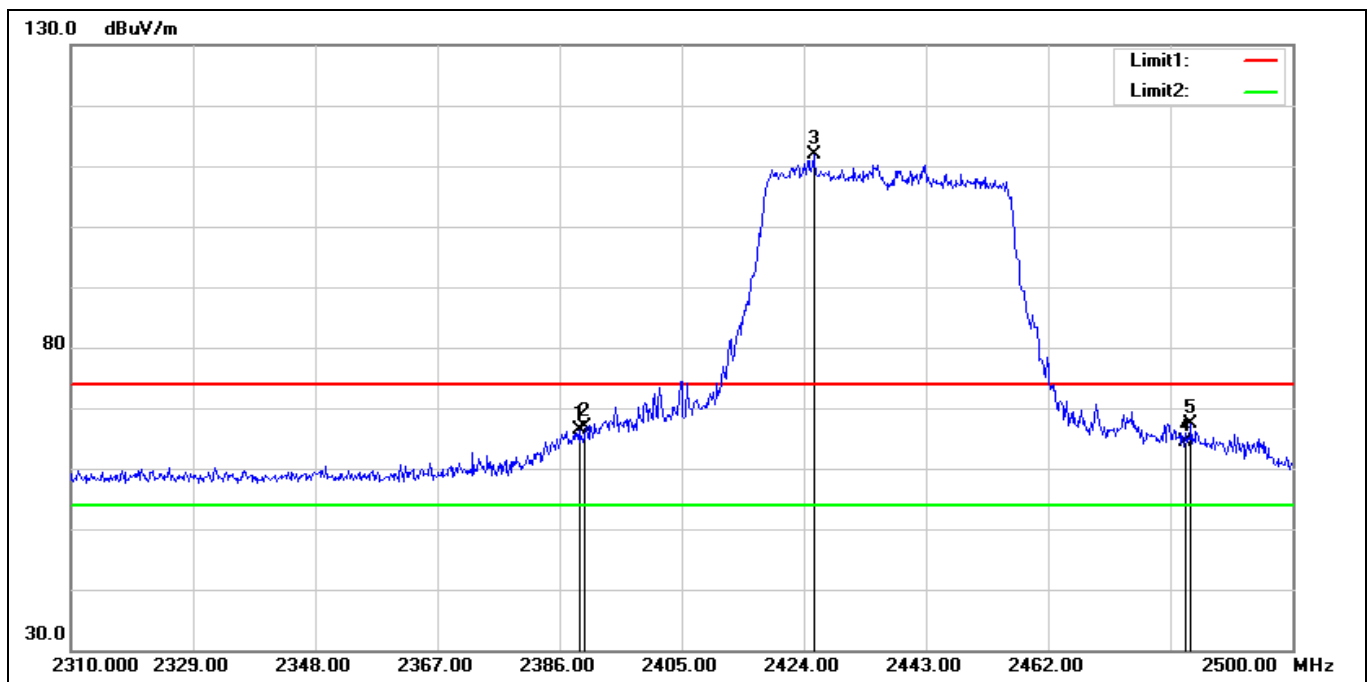


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.040	72.40	-6.08	66.32	74.00	-7.68	peak
2	2390.000	72.89	-6.09	66.80	74.00	-7.20	peak
3*	2425.520	117.95	-6.06	111.89	74.00	37.89	peak
4	2483.500	70.46	-6.13	64.33	74.00	-9.67	peak
5	2484.230	73.43	-6.14	67.29	74.00	-6.71	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2437 MHz		
Remark:			

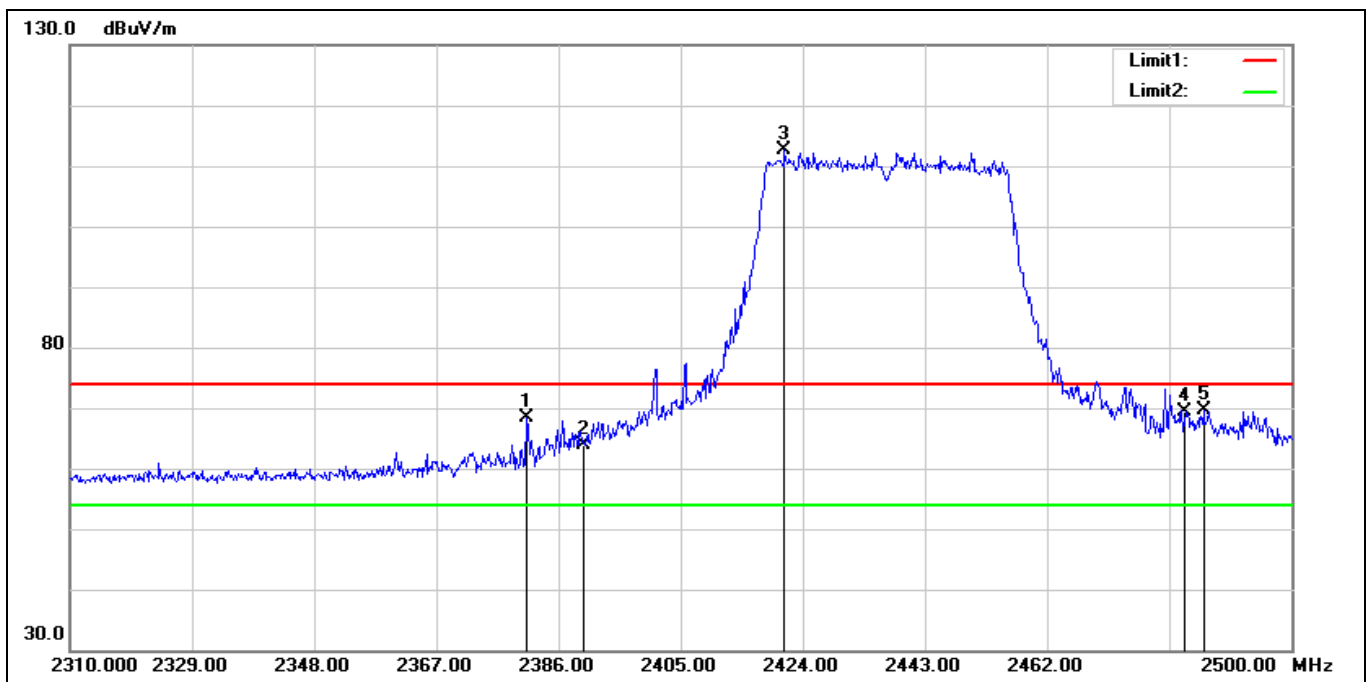


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.060	74.32	-6.05	68.27	74.00	-5.73	peak
2	2390.000	69.88	-6.09	63.79	74.00	-10.21	peak
3*	2421.150	118.79	-6.07	112.72	74.00	38.72	peak
4	2483.500	75.53	-6.13	69.40	74.00	-4.60	peak
5	2486.320	75.69	-6.14	69.55	74.00	-4.45	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2452 MHz		
Remark:			

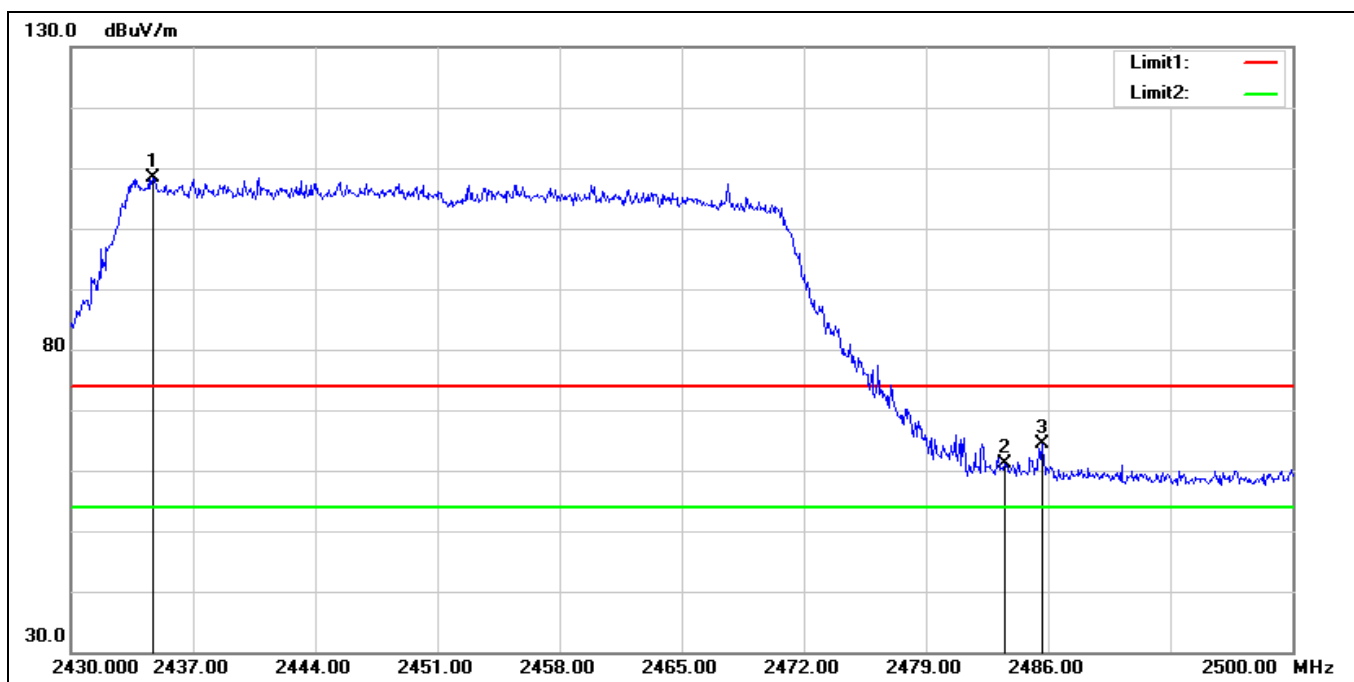

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2434.690	114.46	-6.03	108.43	74.00	34.43	peak
2	2483.500	67.37	-6.13	61.24	74.00	-12.76	peak
3	2485.650	70.51	-6.13	64.38	74.00	-9.62	peak


Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2452 MHz		
Remark:			

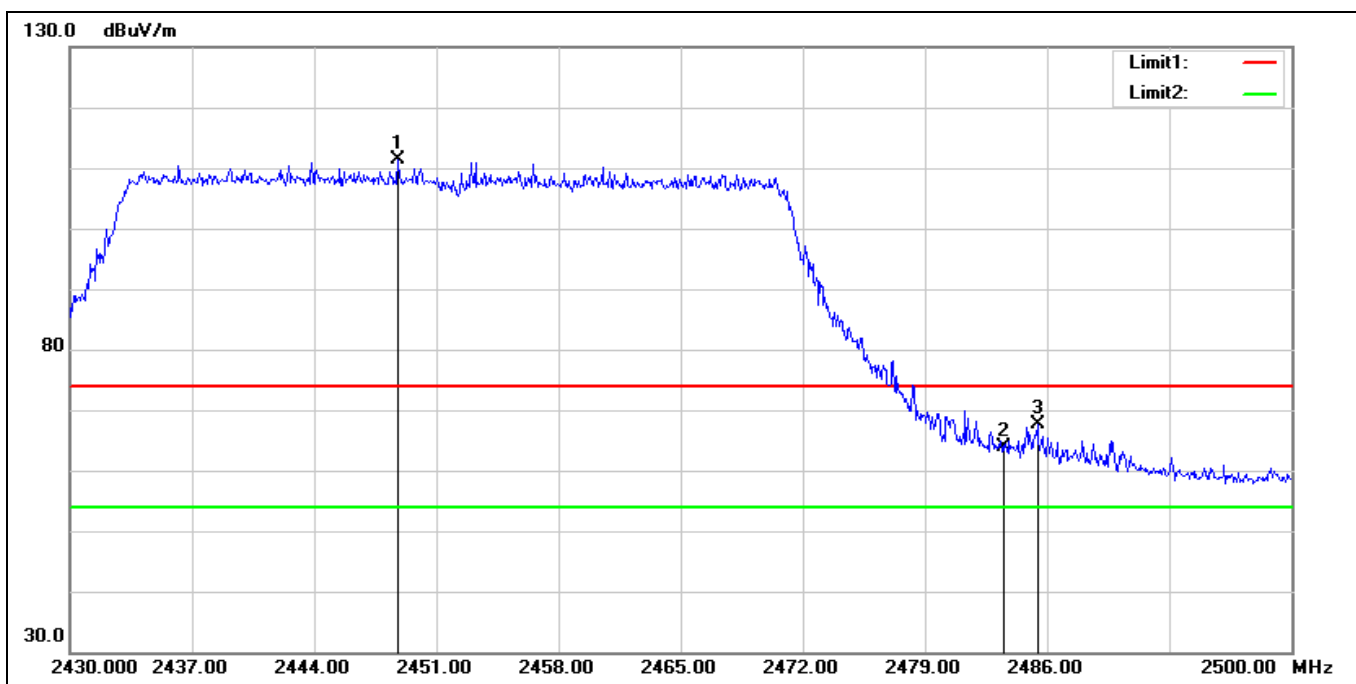

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2448.760	117.33	-5.97	111.36	74.00	37.36	peak
2	2483.500	70.03	-6.13	63.90	74.00	-10.10	peak
3	2485.440	73.70	-6.13	67.57	74.00	-6.43	peak


Average

Standard: Part 15C Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11b 2412 MHz
Remark:

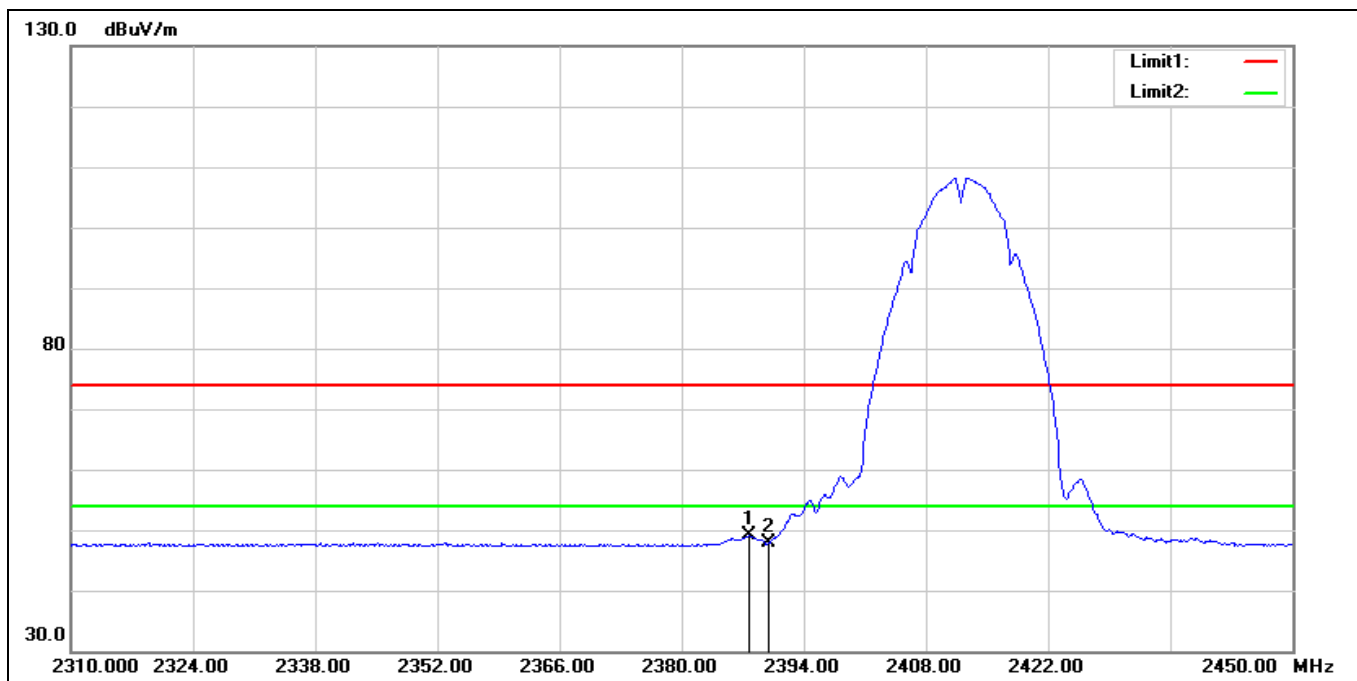


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2387.700	55.10	-6.08	49.02	54.00	-4.98	AVG
2	2390.000	53.92	-6.09	47.83	54.00	-6.17	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

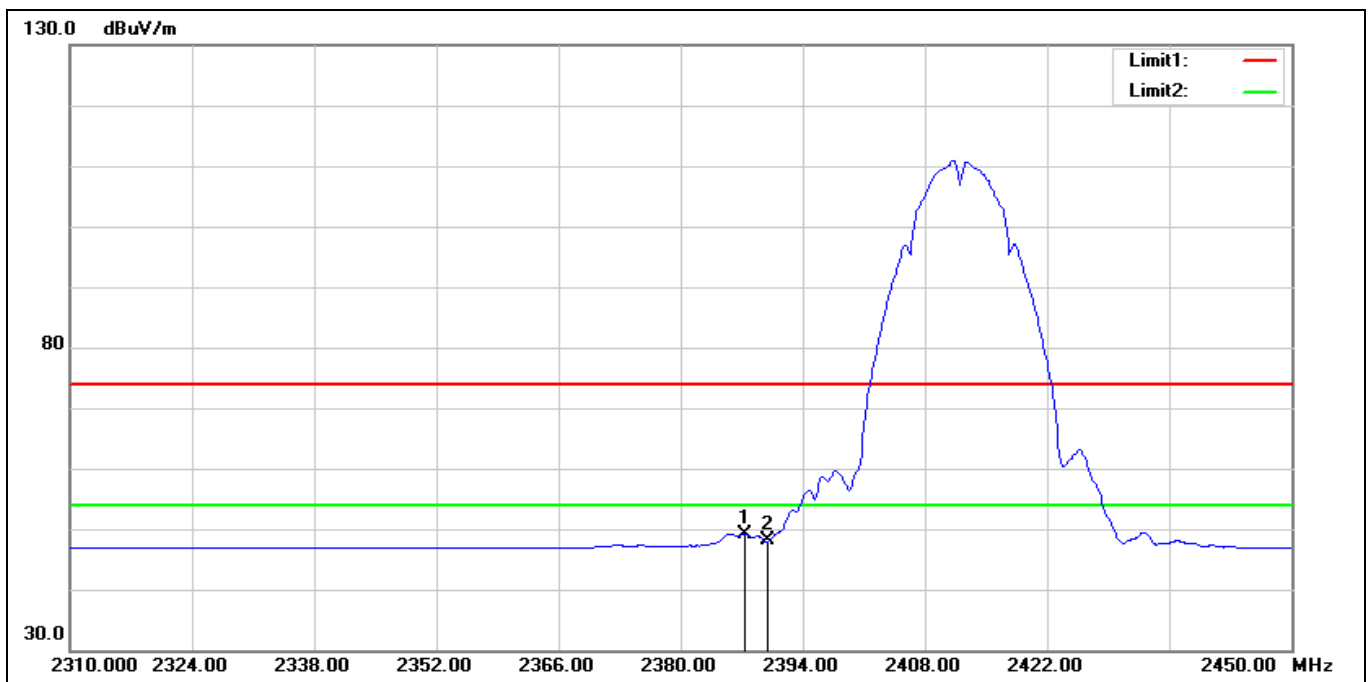


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2387.420	55.29	-6.07	49.22	54.00	-4.78	AVG
2	2390.000	54.11	-6.09	48.02	54.00	-5.98	AVG

Standard: Part 15C Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11b 2437 MHz
Remark:

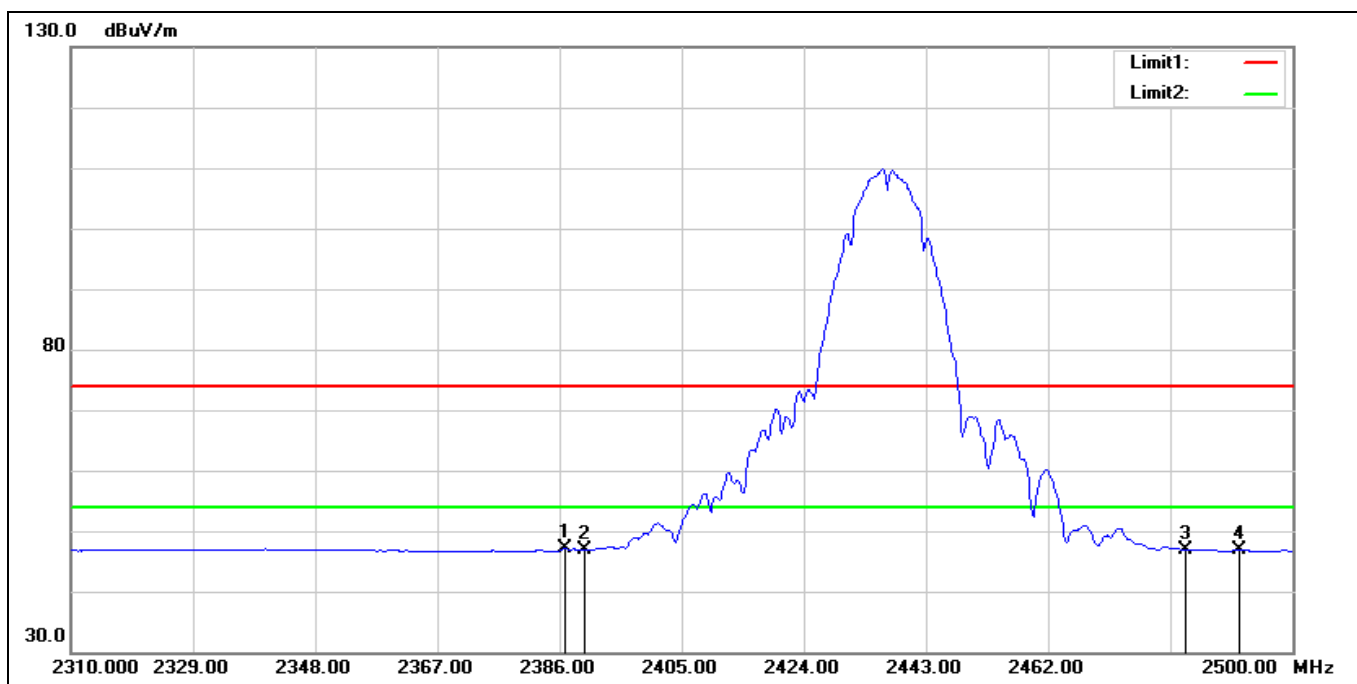


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2386.950	53.16	-6.08	47.08	54.00	-6.92	AVG
2	2390.000	53.05	-6.09	46.96	54.00	-7.04	AVG
3	2483.500	53.13	-6.13	47.00	54.00	-7.00	AVG
4	2491.640	53.05	-6.17	46.88	54.00	-7.12	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

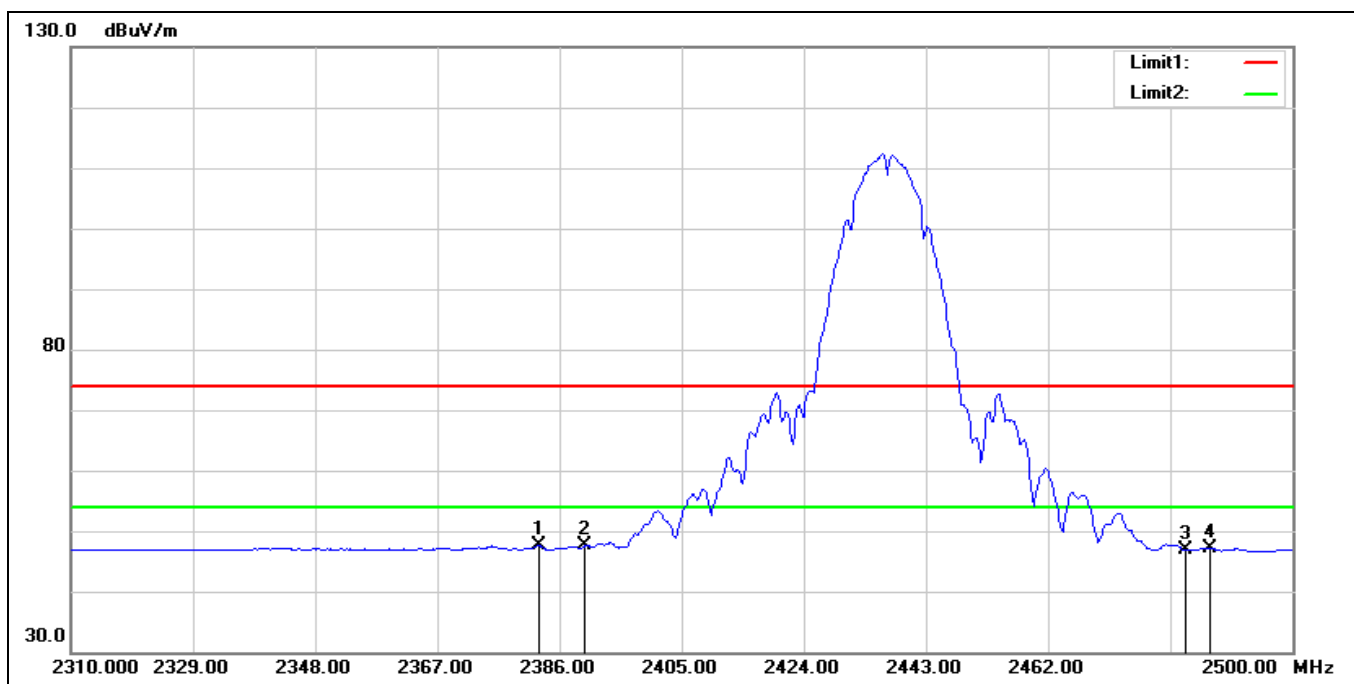


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2382.770	53.62	-6.06	47.56	54.00	-6.44	AVG
2	2390.000	53.65	-6.09	47.56	54.00	-6.44	AVG
3	2483.500	53.10	-6.13	46.97	54.00	-7.03	AVG
4	2487.270	53.37	-6.14	47.23	54.00	-6.77	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

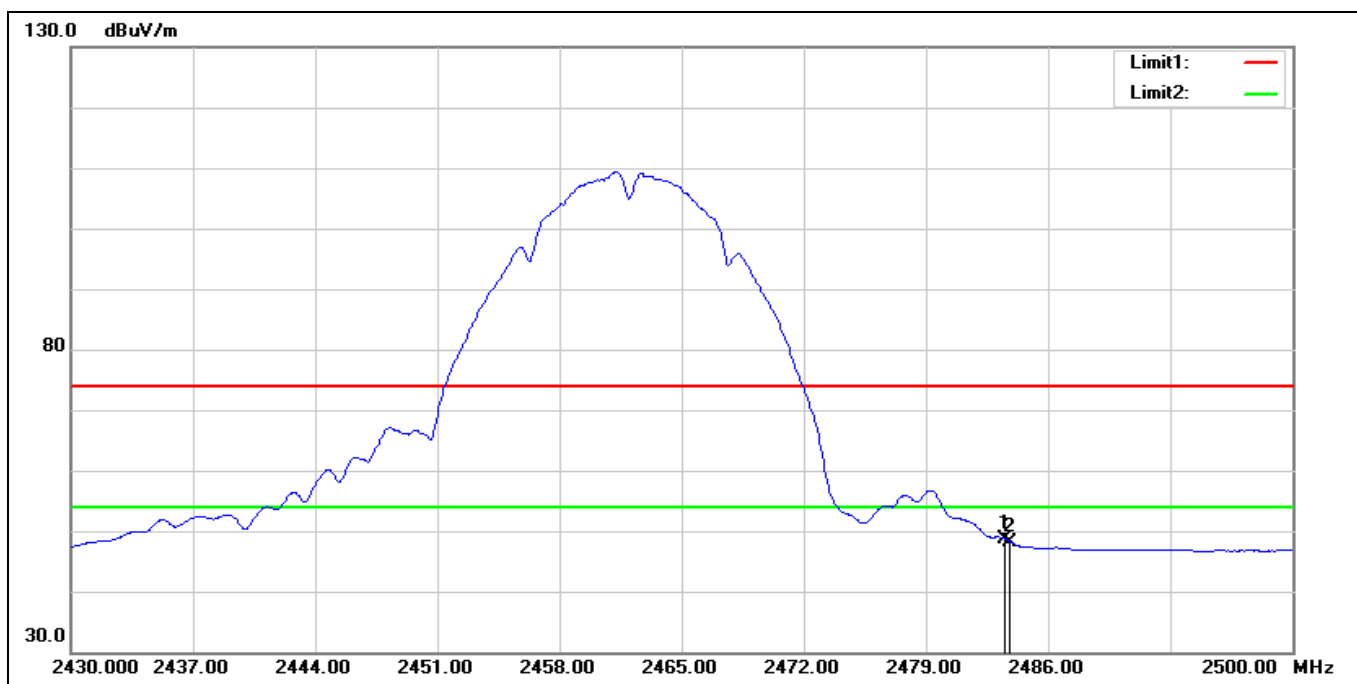


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	54.82	-6.13	48.69	54.00	-5.31	AVG
2	2483.830	54.37	-6.13	48.24	54.00	-5.76	AVG

Standard: Part 15C Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11b 2462 MHz
Remark:

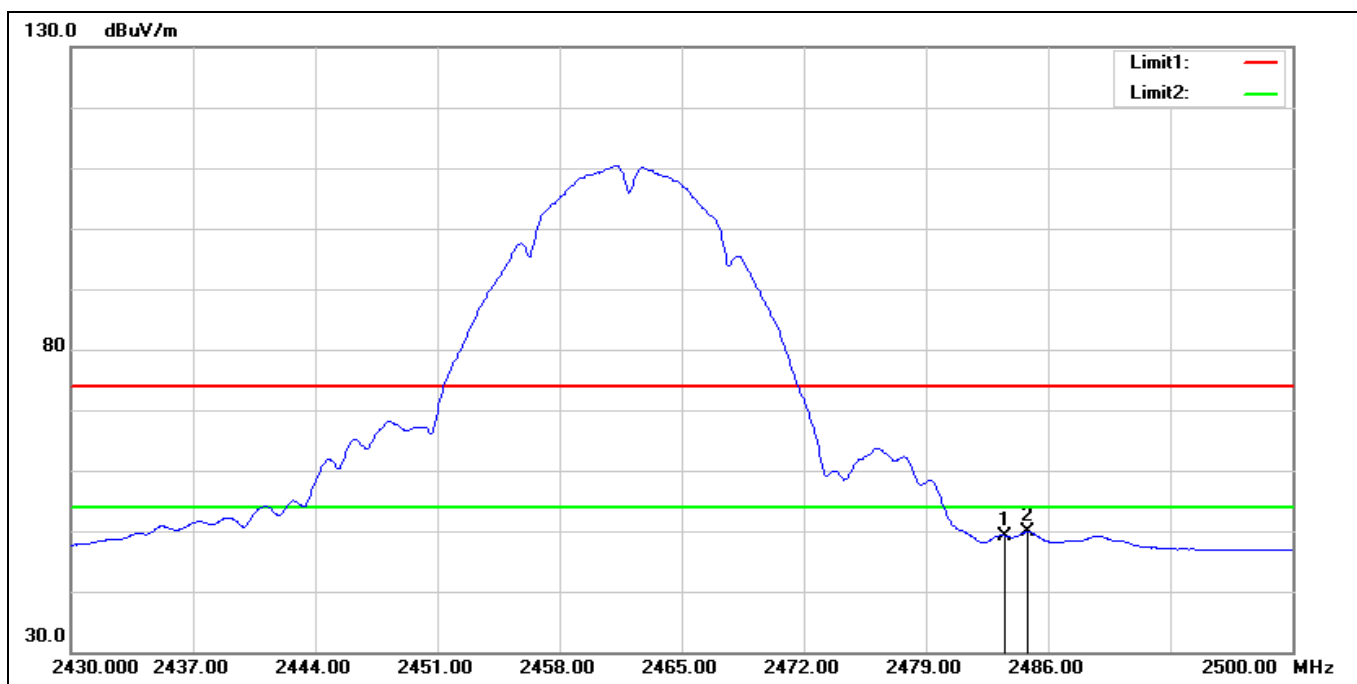


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.34	-6.13	49.21	54.00	-4.79	AVG
2*	2484.810	55.99	-6.14	49.85	54.00	-4.15	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

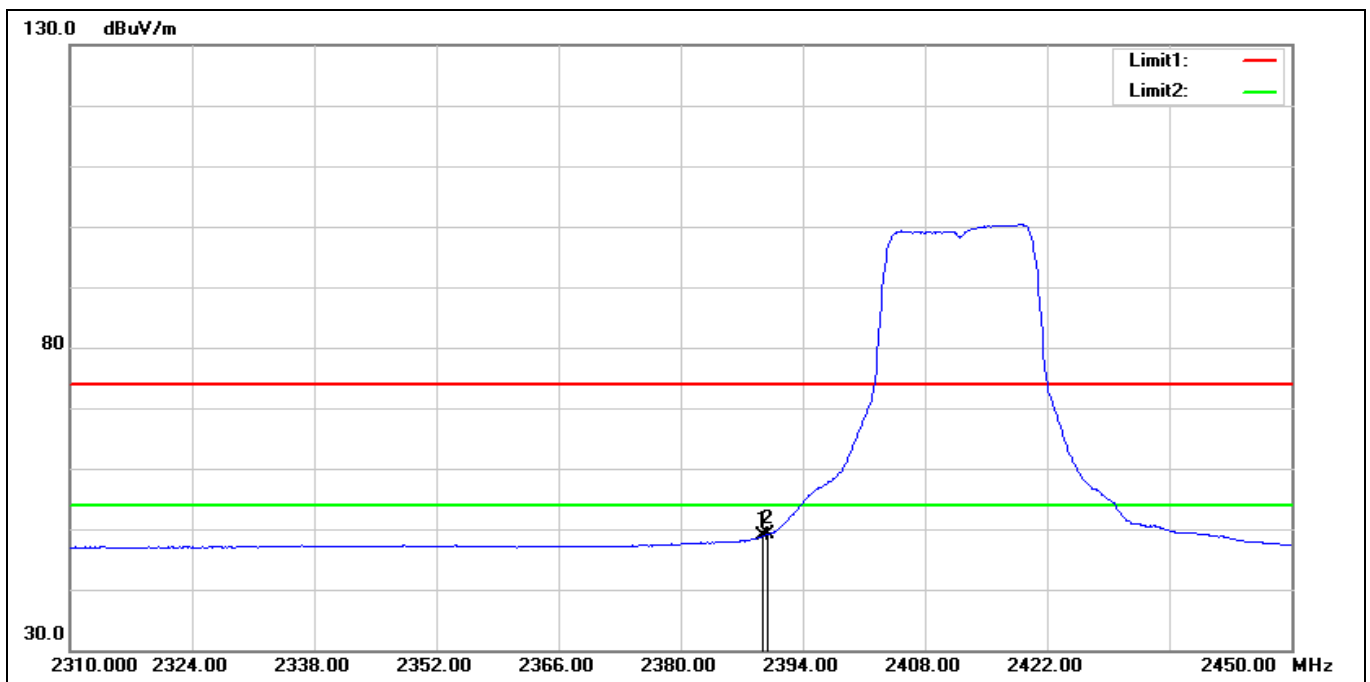


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	54.87	-6.09	48.78	54.00	-5.22	AVG
2*	2390.000	55.25	-6.09	49.16	54.00	-4.84	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

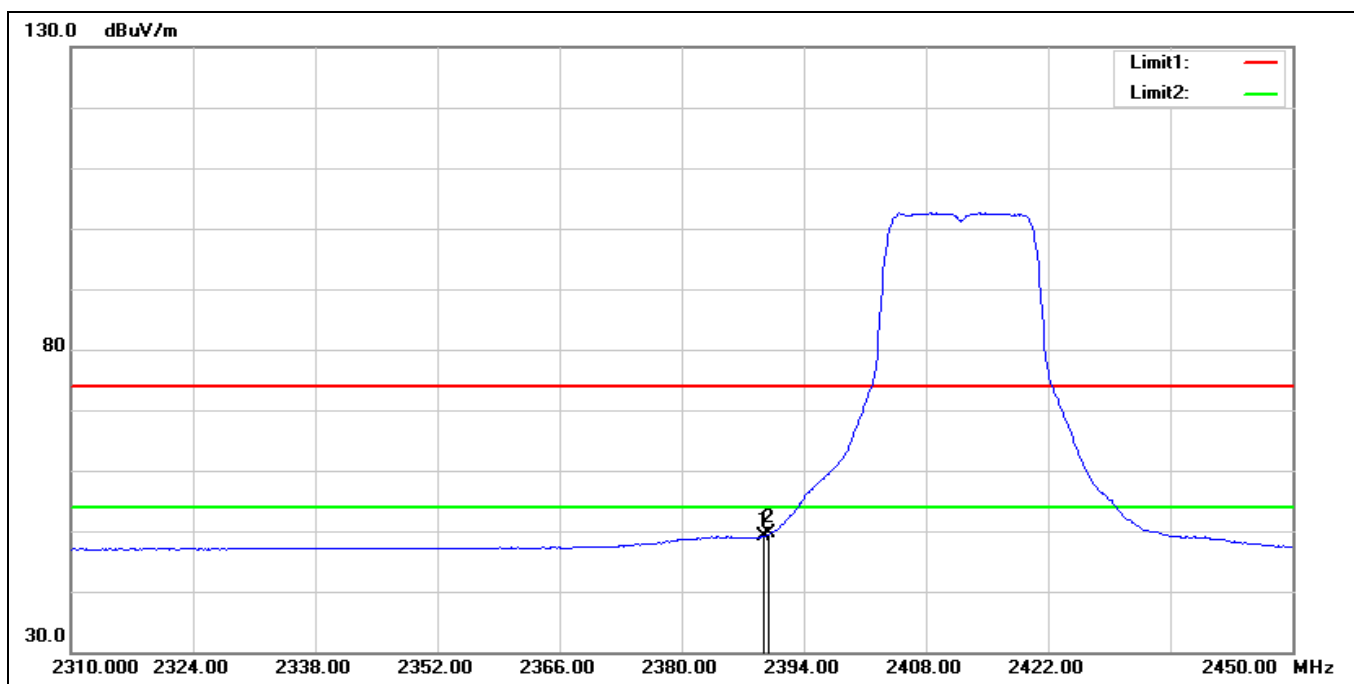


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	55.17	-6.09	49.08	54.00	-4.92	AVG
2*	2390.000	55.66	-6.09	49.57	54.00	-4.43	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2437 MHz		
Remark:			

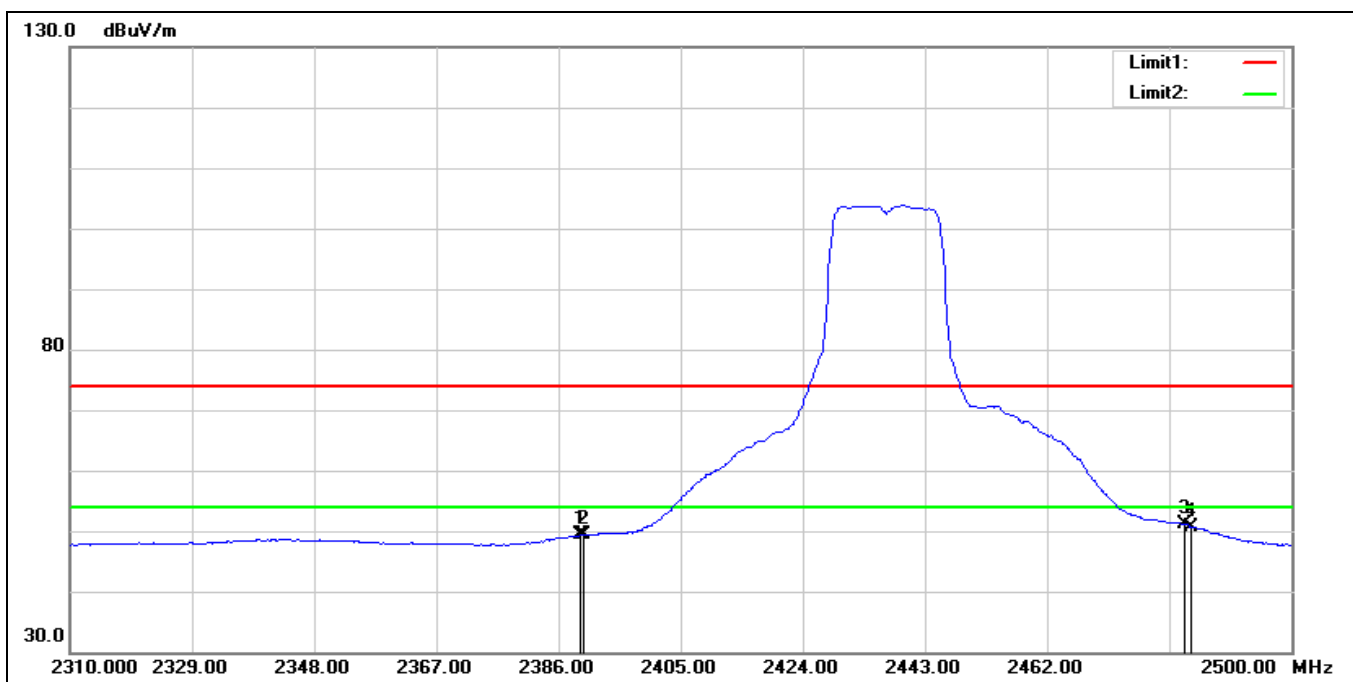


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	55.37	-6.09	49.28	54.00	-4.72	AVG
2	2390.000	55.53	-6.09	49.44	54.00	-4.56	AVG
3*	2483.500	57.17	-6.13	51.04	54.00	-2.96	AVG
4	2484.420	56.86	-6.14	50.72	54.00	-3.28	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

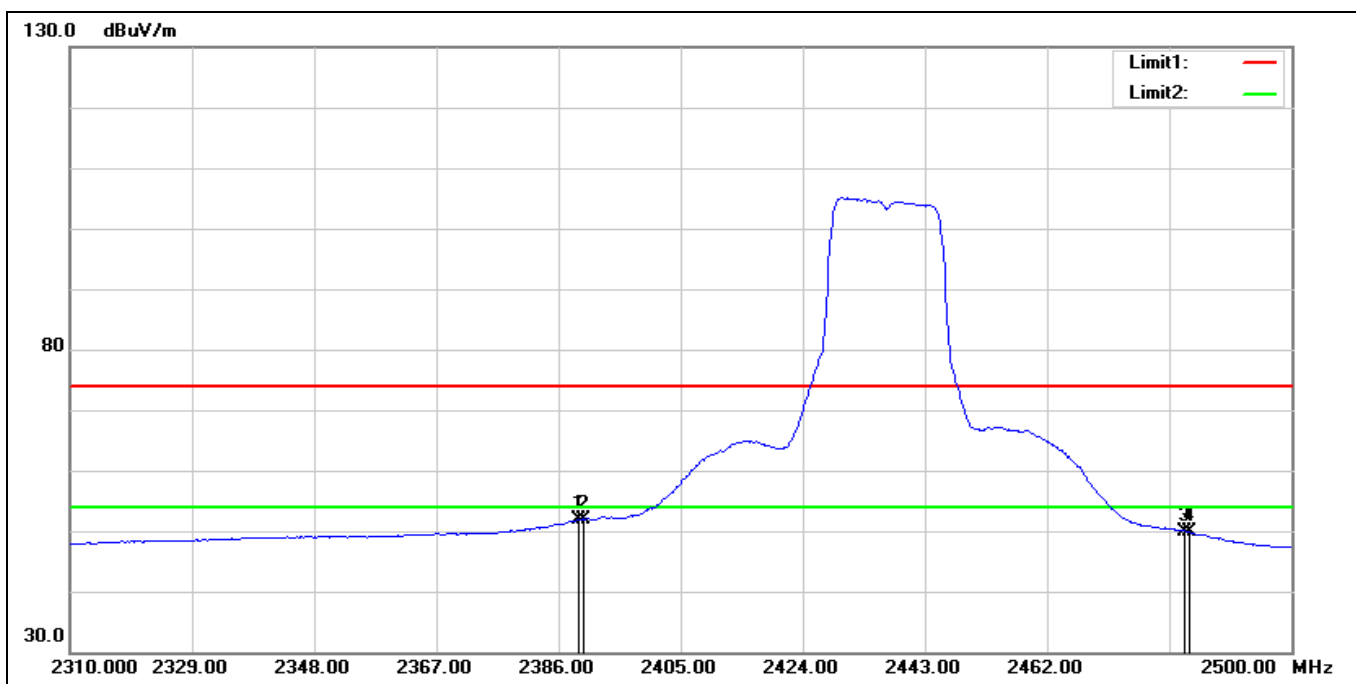


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.040	57.87	-6.08	51.79	54.00	-2.21	AVG
2*	2390.000	58.07	-6.09	51.98	54.00	-2.02	AVG
3	2483.500	56.10	-6.13	49.97	54.00	-4.03	AVG
4	2484.230	55.99	-6.14	49.85	54.00	-4.15	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

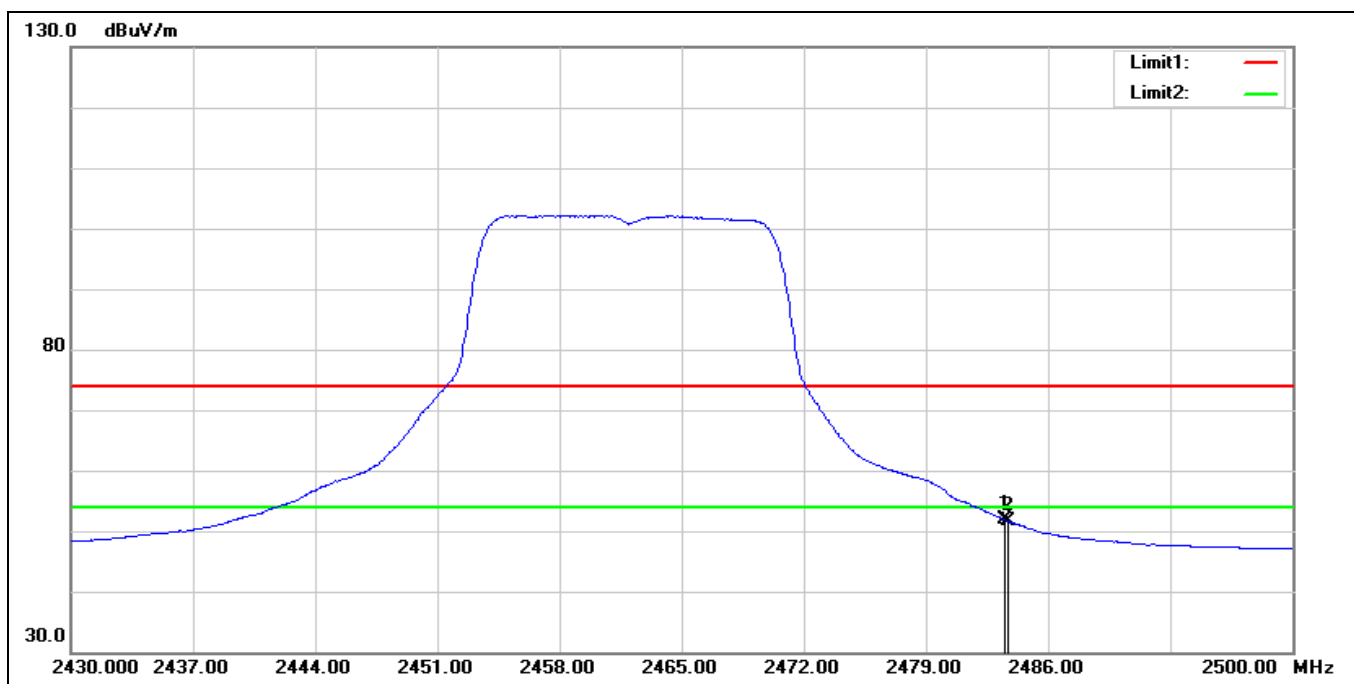


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	57.92	-6.13	51.79	54.00	-2.21	AVG
2	2483.690	57.74	-6.13	51.61	54.00	-2.39	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

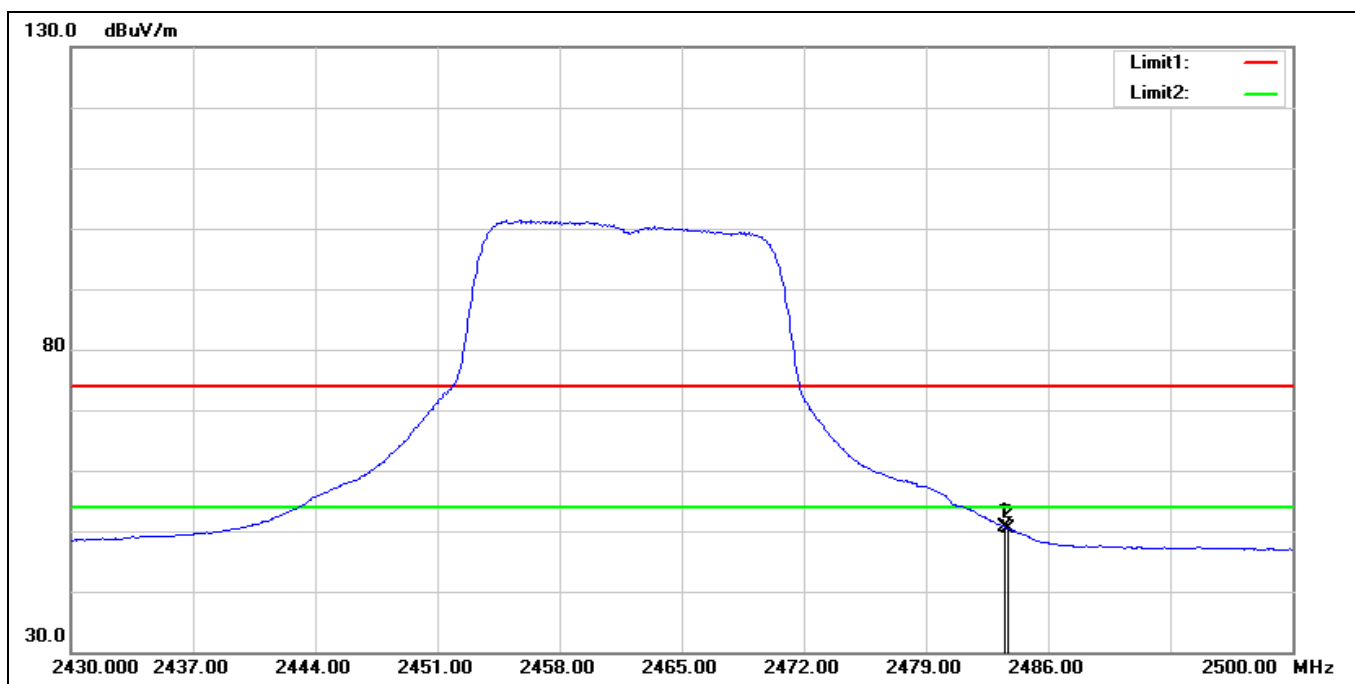


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	56.85	-6.13	50.72	54.00	-3.28	AVG
2	2483.690	56.62	-6.13	50.49	54.00	-3.51	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2412 MHz		
Remark:			

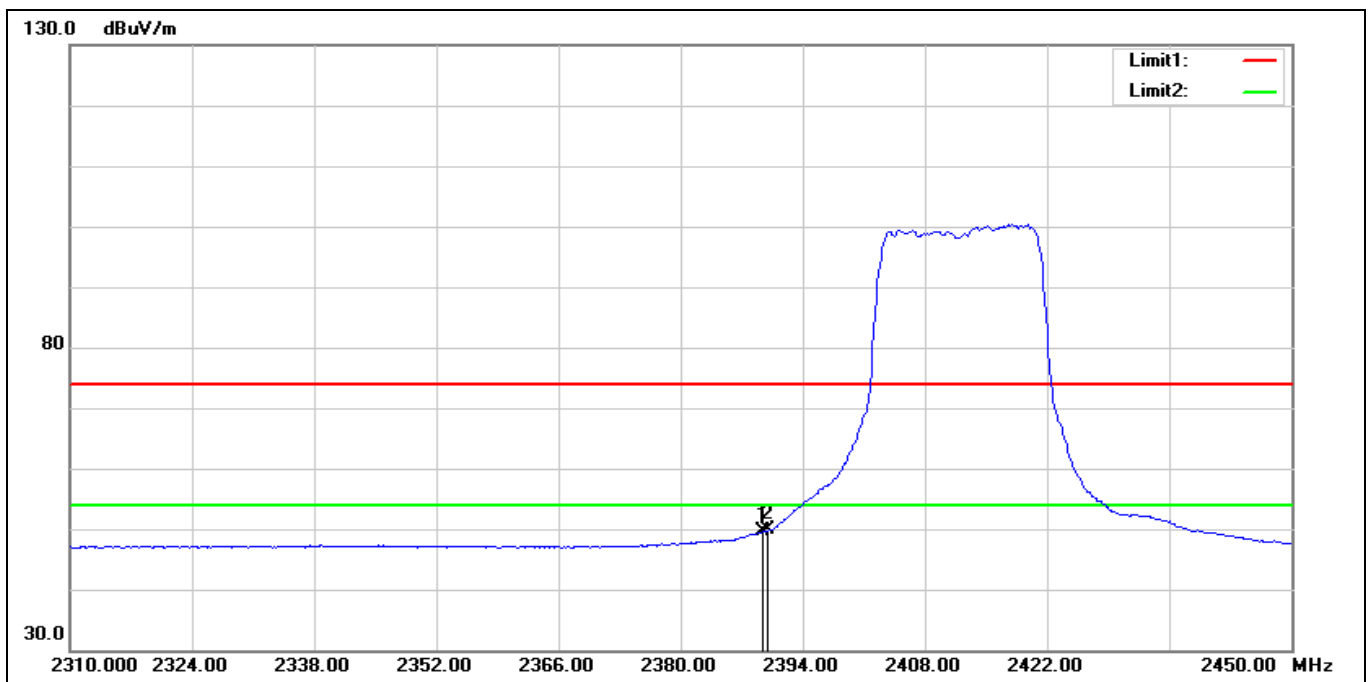


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	55.62	-6.09	49.53	54.00	-4.47	AVG
2*	2390.000	55.87	-6.09	49.78	54.00	-4.22	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2412 MHz		
Remark:			

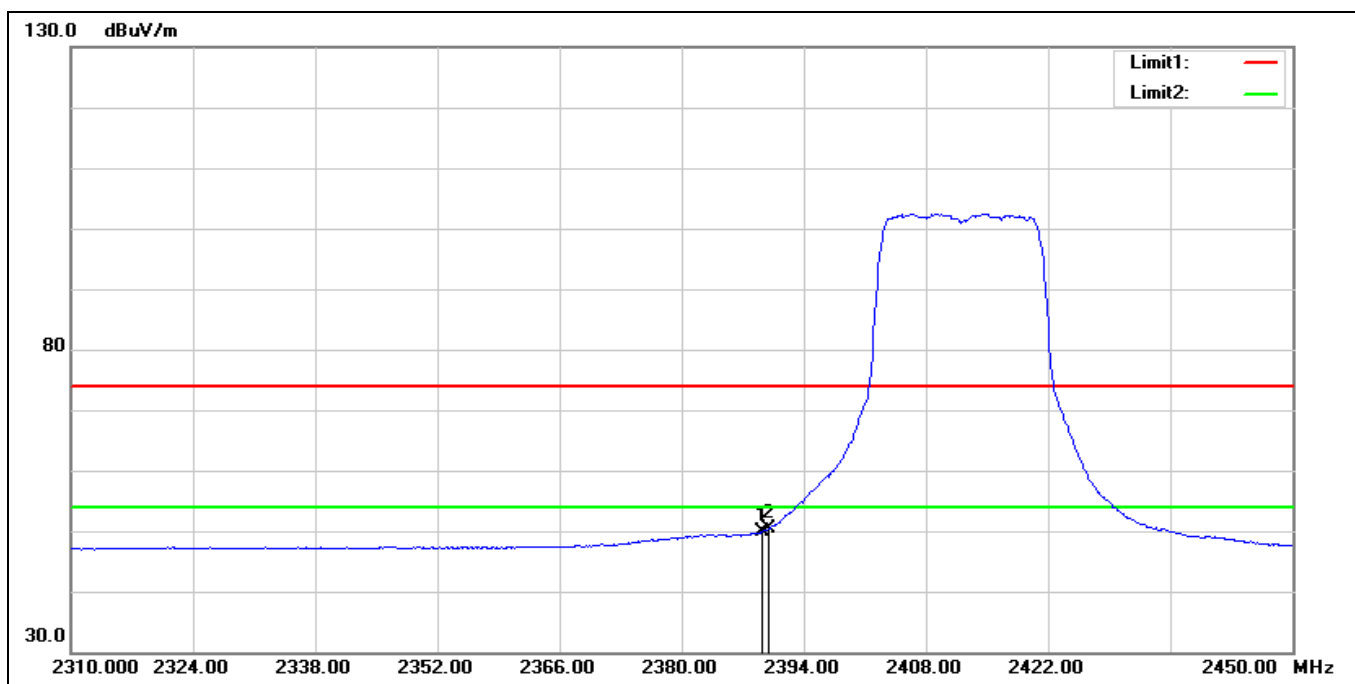


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	56.04	-6.09	49.95	54.00	-4.05	AVG
2*	2390.000	56.57	-6.09	50.48	54.00	-3.52	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2437 MHz		
Remark:			

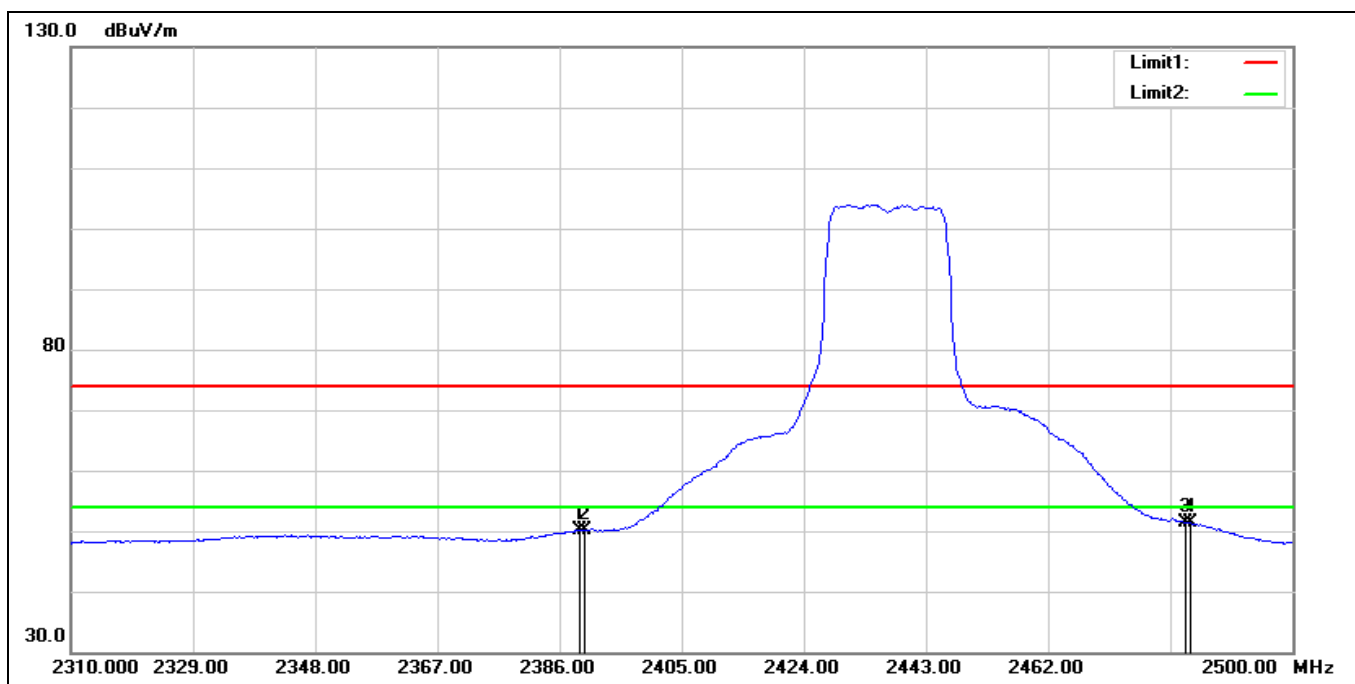


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.230	56.22	-6.09	50.13	54.00	-3.87	AVG
2	2390.000	56.18	-6.09	50.09	54.00	-3.91	AVG
3*	2483.500	57.56	-6.13	51.43	54.00	-2.57	AVG
4	2484.230	57.44	-6.14	51.30	54.00	-2.70	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2437 MHz		
Remark:			

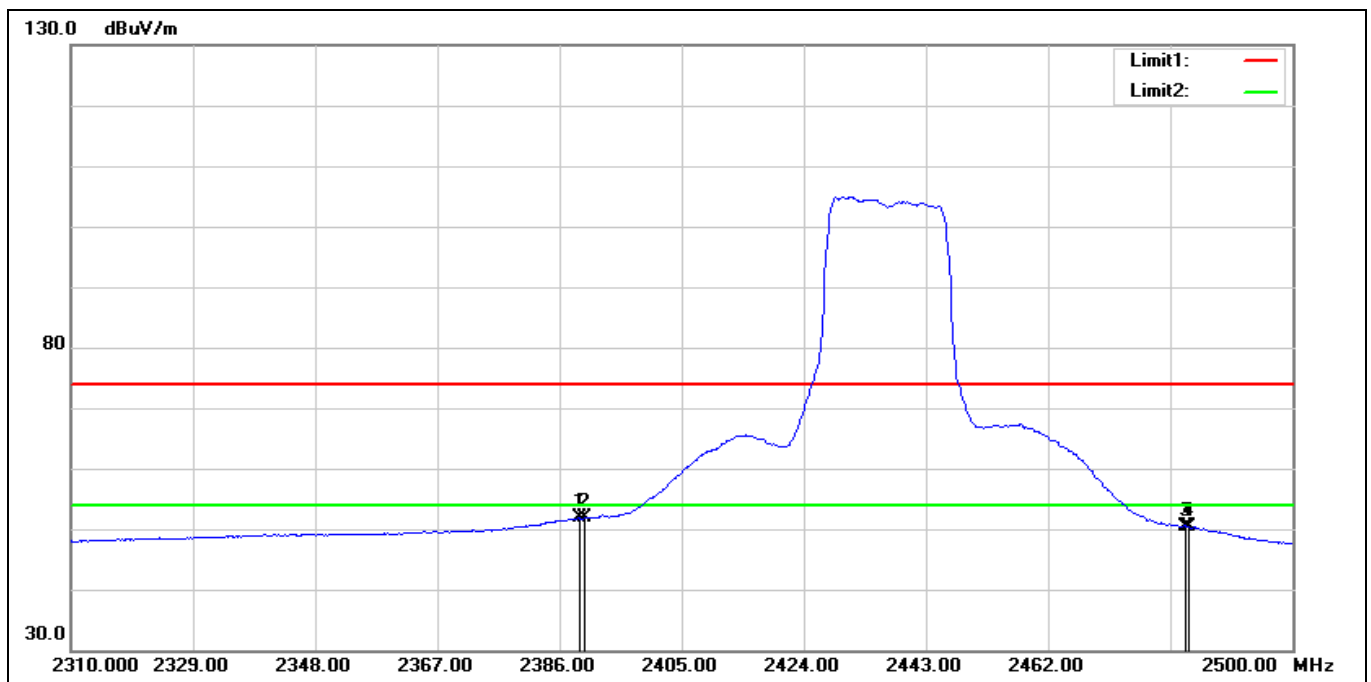


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.230	57.89	-6.09	51.80	54.00	-2.20	AVG
2	2390.000	57.89	-6.09	51.80	54.00	-2.20	AVG
3	2483.500	56.60	-6.13	50.47	54.00	-3.53	AVG
4	2483.850	56.42	-6.13	50.29	54.00	-3.71	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2457 MHz		
Remark:			

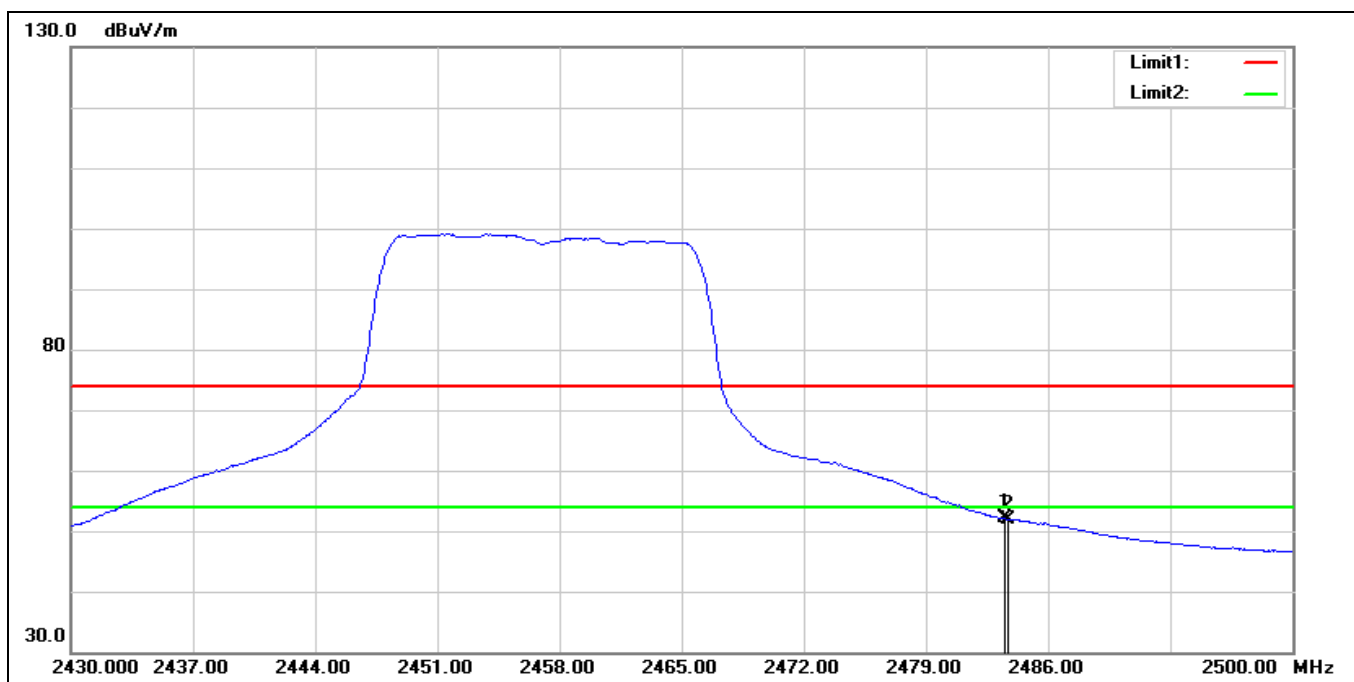


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	58.15	-6.13	52.02	54.00	-1.98	AVG
2	2483.690	58.12	-6.13	51.99	54.00	-2.01	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2457 MHz		
Remark:			

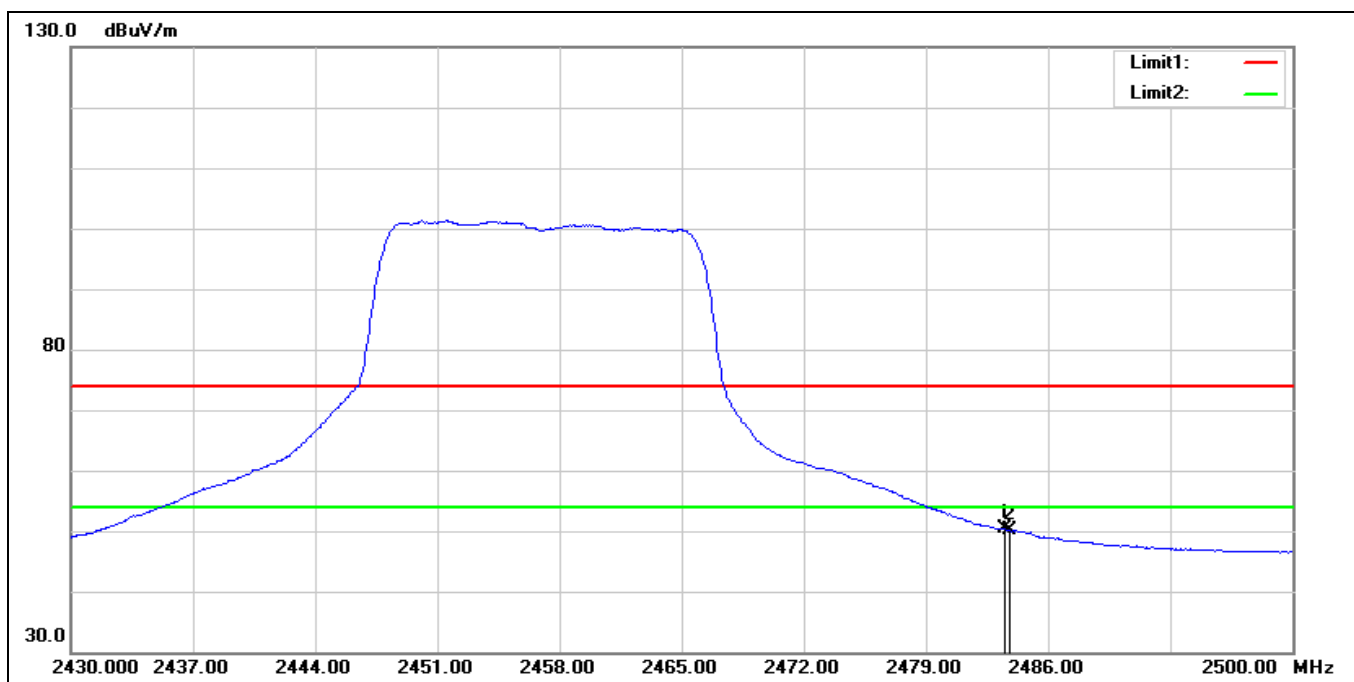


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	56.44	-6.13	50.31	54.00	-3.69	AVG
2	2483.760	56.27	-6.13	50.14	54.00	-3.86	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2462 MHz		
Remark:			

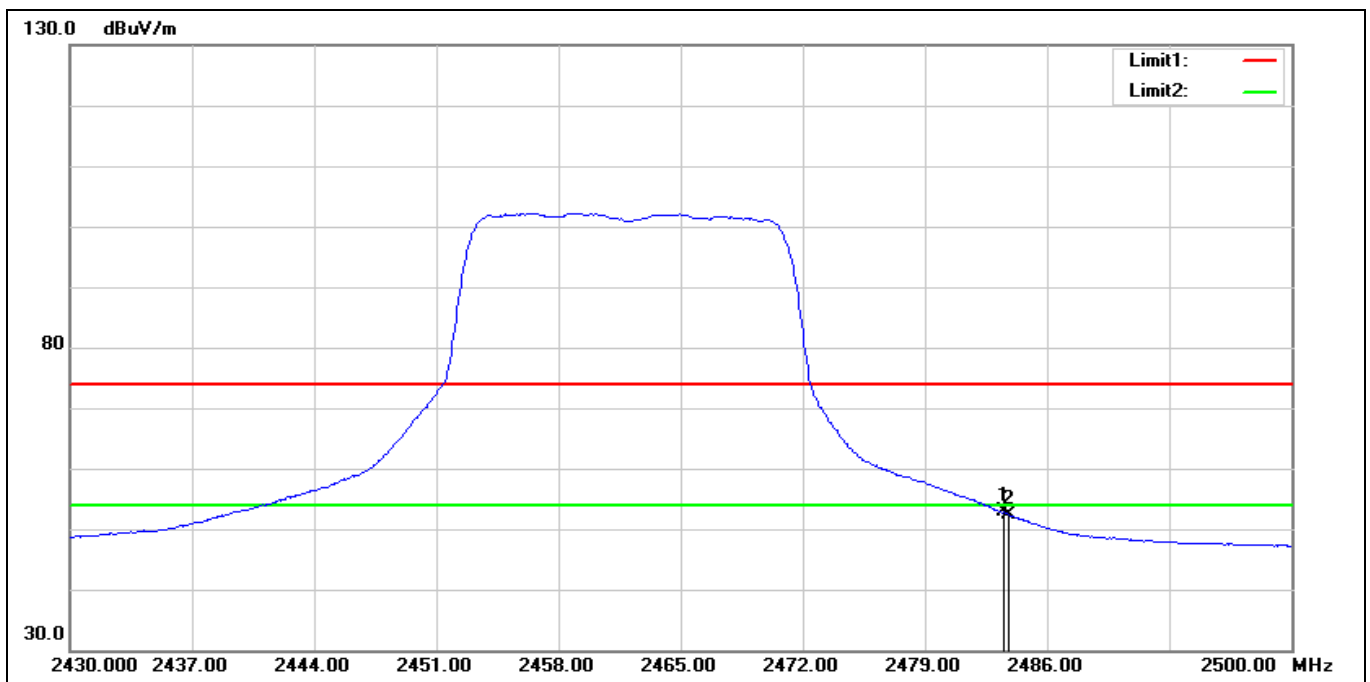

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	58.94	-6.13	52.81	54.00	-1.19	AVG
2	2483.830	58.49	-6.13	52.36	54.00	-1.64	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2462 MHz		
Remark:			

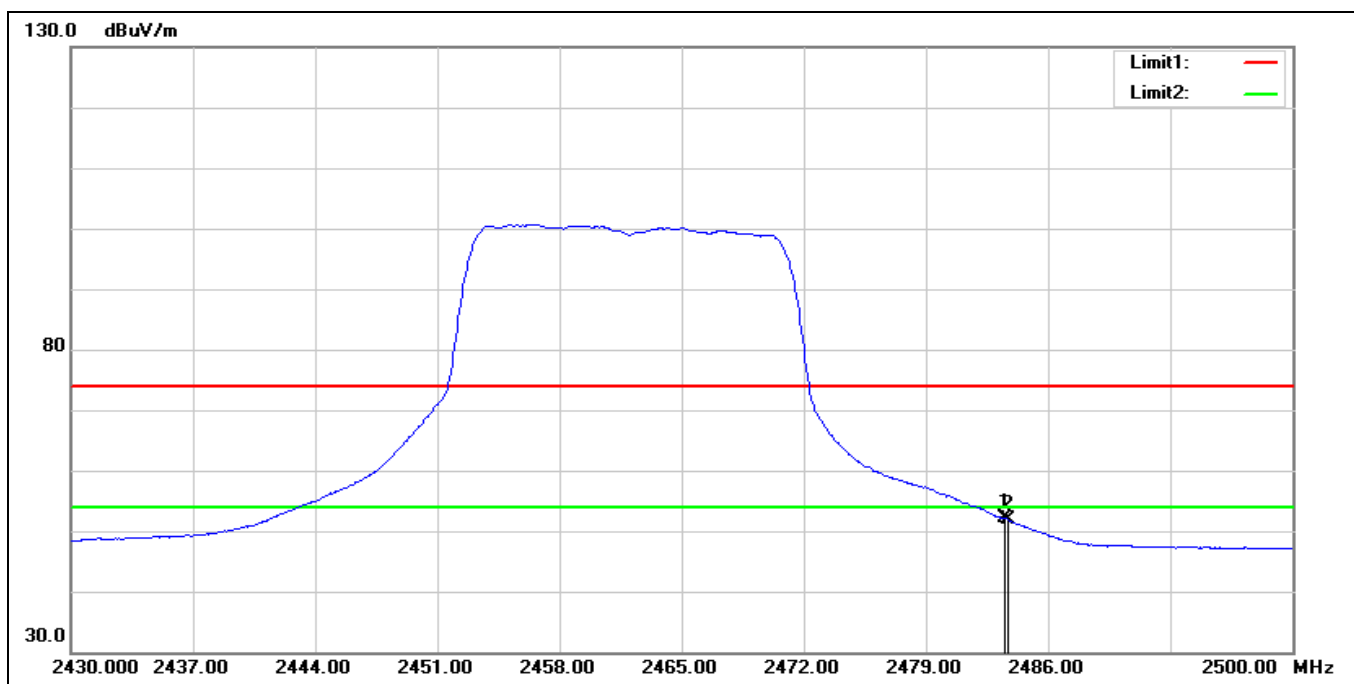

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	58.16	-6.13	52.03	54.00	-1.97	AVG
2	2483.690	57.97	-6.13	51.84	54.00	-2.16	AVG