

FCC 47 CFR PART 15 SUBPART C
CERTIFICATION TEST REPORT for BT(DSS)

For

V-media

MODEL No.: VBOX4+

FCC ID: 2AG8V-VBOX4

REPORT NO: ES160106049E2-1

ISSUE DATE: January 23, 2016

Prepared for

**2251723 ONTARIO INC O/A VMEDIA
5255 Yonge street, suite 1210, Toronto, ON M2N 6P4, Canada**

Prepared by

**EMTEK(SHENZHEN) CO., LTD.
Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282**

Table of Contents

| | | |
|-----|---|----|
| 1 | TEST RESULT CERTIFICATION | 3 |
| 2 | EUT TECHNICAL DESCRIPTION..... | 4 |
| 3 | SUMMARY OF TEST RESULT | 8 |
| 4 | TEST METHODOLOGY | 9 |
| 4.1 | GENERAL DESCRIPTION OF APPLIED STANDARDS..... | 9 |
| 4.2 | MEASUREMENT EQUIPMENT USED | 9 |
| 4.3 | DESCRIPTION OF TEST MODES..... | 10 |
| 5 | FACILITIES AND ACCREDITATIONS | 11 |
| 5.1 | FACILITIES | 11 |
| 5.2 | LABORATORY ACCREDITATIONS AND LISTINGS | 11 |
| 6 | TEST SYSTEM UNCERTAINTY | 12 |
| 7 | SETUP OF EQUIPMENT UNDER TEST | 13 |
| 7.1 | RADIO FREQUENCY TEST SETUP 1..... | 13 |
| 7.2 | RADIO FREQUENCY TEST SETUP 2..... | 13 |
| 7.3 | CONDUCTED EMISSION TEST SETUP | 14 |
| 7.4 | SUPPORT EQUIPMENT | 15 |
| 8 | FREQUENCY HOPPING SYSTEM REQUIREMENTS..... | 16 |
| 8.1 | STANDARD APPLICABLE | 16 |
| 8.2 | EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE | 16 |
| 8.3 | EQUAL HOPPING FREQUENCY USE..... | 17 |
| 8.4 | FREQUENCY HOPPING SYSTEM..... | 17 |
| 9 | TEST REQUIREMENTS..... | 18 |
| 9.1 | 20DB BANDWIDTH | 18 |
| 9.2 | CARRIER FREQUENCY SEPARATION..... | 24 |
| 9.3 | NUMBER OF HOPPING FREQUENCIES | 30 |
| 9.4 | AVERAGE TIME OF OCCUPANCY (DWELL TIME) | 32 |
| 9.5 | MAXIMUM PEAK CONDUCTED OUTPUT POWER | 35 |
| 9.6 | CONDUCTED SPURIOUS EMISSION | 41 |
| 9.7 | RADIATED SPURIOUS EMISSION..... | 48 |
| 9.8 | CONDUCTED EMISSION TEST..... | 61 |
| 9.9 | ANTENNA APPLICATION..... | 64 |

1 TEST RESULT CERTIFICATION

| | |
|----------------------|--|
| Applicant: | 2251723 Ontario Inc o/a Vmedia 5255 Yonge street, suite 1210, Toronto, ON M2N 6P4, Canada |
| Manufacturer: | Shenzhen Xiyun Technology Company Limited 12th floor, Yingfengnian Building, Xiangyin Road No.49, Nanlian, Longgang District, Shenzhen, China |
| Factory: | Huizhou Champion Asia Digital Technology Co, Ltd. SanDong Town Digital Industry Park No 25,Huizhou City, Guangdong Province, China |
| Product Description: | V-media |
| Model Number: | VBOX4+ |
| Trade Mark: | VMEDIA |
| File Number: | ES160106049E2-1 |
| Date of Test: | January 06, 2016 to January 23, 2016 |

Measurement Procedure Used:

| APPLICABLE STANDARDS | |
|------------------------------------|-------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 2 2015, Subpart J | |
| FCC 47 CFR Part 15 2015, Subpart C | PASS |

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 2015 and Part 15.247 2015

The test results of this report relate only to the tested sample identified in this report.


Date of Test : January 06, 2016 to January 23, 2016

Test by :


KingKong

KingKong /Tester

Prepared by :


Yaping Shen

Yaping Shen/Editor


Lisa Wang

Lisa Wang/Manager

2 EUT TECHNICAL DESCRIPTION

| Characteristics | Description |
|--------------------------------------|--|
| Device Type | Bluetooth V2.1+EDR with classic model |
| Data Rate | 1Mbps for BT v2.1BR GFSK modulation 2Mbps for BT v2.1EDR pi/4-DQPSK modulation 3Mbps for BT v2.1EDR 8DPSK modulation |
| Modulation: | GFSK modulation for BT v2.1BR(1Mbps) pi/4-DQPSK modulation for BT v2.1EDR(2Mbps) 8DPSK modulation for BT v2.1EDR (3Mbps) |
| Operating Frequency Range(s): | 2402-2480MHz |
| Number of Channels: | 79 channels for BT v2.1BR; 79 channels for BT v2.1EDR; |
| Transmit Power Max: | 0.362dBm |
| Antenna Type : | FPC Antenna |
| Antenna Gain: | 2.17dBi; |
| Power supply: | <input type="checkbox"/> DC supply: |
| | <input checked="" type="checkbox"/> Adapter supply: Model: SW15-120S100U INPUT: 100-240~50/60Hz 0.4A OUTPUT: 12V/1.0A |

Note: for more details, please refer to the User's manual of the EUT.

| Characteristics | Description |
|----------------------------------|---|
| Device Type | Bluetooth 4.0 with BLE model |
| Data Rate | 1Mbps; |
| Modulation | GFSK; |
| Operating Frequency Range | 2402-2480MHz |
| Number of Channels | 40 Channels |
| Transmit Power Max | 8.516 dBm for BT; |
| Antenna Type | FPC Antenna |
| Antenna Gain | 2.17dBi |
| Power supply | <input type="checkbox"/> DC supply: <input checked="" type="checkbox"/> Adapter supply: Model: SW15-120S100U INPUT: 100-240~50/60Hz 0.4A OUTPUT: 12V/1.0A |

Note: for more details, please refer to the User's manual of the EUT.

| Characteristics | Description |
|--|---|
| Device Type | Wifi 5G Device |
| IEEE 802.11 WLAN Mode Supported | 802.11a |
| Data Rate | 802.11 a: 6,9,12,18,24,36,48,54Mbps; |
| MIMO Mode | N/A |
| Modulation | OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a; |
| Operating Frequency Range | 5180-5240MHz for 802.11a 5745-5825 MHz for 802.11a |
| Number of Channels | 4 channels for 802.11a in the 5180-5240MHz band ; 5 channels for 802.11a in the 5745-5825MHz band ; |
| Transmit Power Max | 17.20 dBm for 802.11a; |
| Antenna Type | FPC Antenna |
| Smart system | <input checked="" type="checkbox"/> SISO for 802.11a <input type="checkbox"/> MIMO for 802.11n |
| Antenna Gain | 4.86dBi |
| Power supply | <input type="checkbox"/> DC supply: <input checked="" type="checkbox"/> Adapter supply: Model: SW15-120S100U INPUT: 100-240~50/60Hz 0.4A OUTPUT: 12V/1.0A |

Note: for more details, please refer to the User's manual of the EUT.

| Characteristics | Description |
|--|---|
| IEEE 802.11 WLAN Mode Supported | <input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input type="checkbox"/> 802.11n(40MHz channel bandwidth) |
| Data Rate | WIFI: 802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS7; |
| Modulation | WIFI: DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n; |
| Operating Frequency Range | WIFI:2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); |
| Number of Channels | WIFI: 11 channels for 802.11b/g; 11 channels for 802.11n(HT20); |
| Transmit Power Max | WIFI: 14.33 dBm for 802.11b; 15.97 dBm for 802.11g; 15.57 dBm for 802.11n(HT20); |
| Antenna Type /Gain | PFC antenna/2.17dBi |
| Power supply | <input type="checkbox"/> DC supply: <input checked="" type="checkbox"/> Adapter supply: Model: SW15-120S100U INPUT: 100-240~50/60Hz 0.4A OUTPUT: 12V/1.0A |
| Temperature Range | -20°C ~ +55°C |

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

| FCC Part Clause | Test Parameter | Verdict | Remark |
|---------------------|--|---------|--------|
| 15.247(a)(1) | 20 dB Bandwidth | PASS | |
| 15.247(a)(1) | Carrier Frequency Separation | PASS | |
| 15.247(a)(1) | Number of Hopping Frequencies | PASS | |
| 15.247(a)(1) | Average Time of Occupancy (Dwell Time) | PASS | |
| 15.247(b)(1) | Maximum Peak Conducted Output Power | PASS | |
| 15.247(c) | Conducted Spurious Emissions | PASS | |
| 15.247(d) 15.209 | Radiated Spurious Emissions | PASS | |
| 15.207 | Conducted Emission | PASS | |
| 15.247(b) | Antenna Application | PASS | |
| | NOTE1: N/A (Not Applicable) | | |

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AG8V-VBOX4 filing to comply with Section 15.247 of the FCC Part 15, Subpart C.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:
 FCC 47 CFR Part 2, Subpart J
 FCC 47 CFR Part 15, Subpart C
 DA 00-705

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | DUE CAL. |
|--------------------|-----------------|--------------|---------------|------------|------------|
| Test Receiver | Rohde & Schwarz | ESCS30 | 828985/018 | 05/16/2015 | 05/15/2016 |
| L.I.S.N. | Schwarzbeck | NNLK8129 | 8129203 | 05/16/2015 | 05/15/2016 |
| 50Ω Coaxial Switch | Anritsu | MP59B | M20531 | N/A | 05/15/2016 |
| Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 100006 | 05/16/2015 | 05/15/2016 |
| Voltage Probe | Rohde & Schwarz | TK9416 | N/A | 05/16/2015 | 05/15/2016 |
| I.S.N | Rohde & Schwarz | ENY22 | 1109.9508.02 | 05/16/2015 | 05/15/2016 |

4.2.2 Radiated Emission Test Equipment

| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | DUE CAL. |
|-------------------|-----------------|--------------|---------------|------------|------------|
| EMI Test Receiver | Rohde & Schwarz | ESU | 1302.6005.26 | 05/16/2015 | 05/15/2016 |
| Pre-Amplifier | HP | 8447D | 2944A07999 | 05/16/2015 | 05/15/2016 |
| Bilog Antenna | Schwarzbeck | VULB9163 | 142 | 05/16/2015 | 05/15/2016 |
| Loop Antenna | ARA | PLA-1030/B | 1029 | 05/16/2015 | 05/15/2016 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170399 | 05/16/2015 | 05/15/2016 |
| Horn Antenna | Schwarzbeck | BBHA 9120 | D143 | 05/16/2015 | 05/15/2016 |
| Cable | Schwarzbeck | AK9513 | ACRX1 | 05/16/2015 | 05/15/2016 |
| Cable | Rosenberger | N/A | FP2RX2 | 05/16/2015 | 05/15/2016 |
| Cable | Schwarzbeck | AK9513 | CRPX1 | 05/16/2015 | 05/15/2016 |
| Cable | Schwarzbeck | AK9513 | CRRX2 | 05/16/2015 | 05/15/2016 |

4.2.3 Radio Frequency Test Equipment

| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | DUE CAL. |
|-------------------|---------|--------------|---------------|------------|------------|
| Spectrum Analyzer | Agilent | E4407B | 88156318 | 05/16/2015 | 05/15/2016 |
| Signal Analyzer | Agilent | N9010A | My53470879 | 05/16/2015 | 05/15/2016 |
| Power meter | Anritsu | ML2495A | 0824006 | 05/16/2015 | 05/15/2016 |
| Power sensor | Anritsu | MA2411B | 0738172 | 05/16/2015 | 05/15/2016 |

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for Bluetooth V2.1 BR GFSK modulation; 2Mbps for Bluetooth V2.1 EDR pi/4-DQPSK modulation; 3Mbps for Bluetooth V2.1 EDR 8DPSK modulation) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth V2.1:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 0 | 2402 | 39 | 2441 | ... | ... |
| 1 | 2403 | 40 | 2442 | 76 | 2478 |
| 2 | 2404 | 41 | 2443 | 77 | 2479 |
| ... | ... | ... | ... | 78 | 2480 |

Note: $fc = 2402\text{MHz} + (k-1) \times 1\text{MHz}$ k=1 to 79

Test Frequency and channel for Bluetooth V2.1:

| Lowest Frequency | | Middle Frequency | | Highest Frequency | |
|------------------|-----------------|------------------|-----------------|-------------------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 0 | 2402 | 39 | 2441 | 78 | 2480 |

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2013.10.29
The certificate is valid until 2016.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

: Accredited by TUV Rheinland Shenzhen, 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

: Accredited by FCC, July 24, 2013
The Certificate Registration Number is 406365.

: Accredited by FCC, April 17, 2013
The Certificate Registration Number is 709623.

: Accredited by Industry Canada, November 29, 2012
The Certificate Registration Number is 4480A-2

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter | Uncertainty |
|--------------------------------|------------------------|
| Radio Frequency | $\pm 1 \times 10^{-5}$ |
| Maximum Peak Output Power Test | $\pm 1.0 \text{dB}$ |
| Conducted Emissions Test | $\pm 2.0 \text{dB}$ |
| Radiated Emission Test | $\pm 2.0 \text{dB}$ |
| Occupied Bandwidth Test | $\pm 1.0 \text{dB}$ |
| Band Edge Test | $\pm 3 \text{dB}$ |
| All emission, radiated | $\pm 3 \text{dB}$ |
| Antenna Port Emission | $\pm 3 \text{dB}$ |
| Temperature | ± 0.5 |
| Humidity | $\pm 3\%$ |

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth V2.1 component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz :

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz :

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz :

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

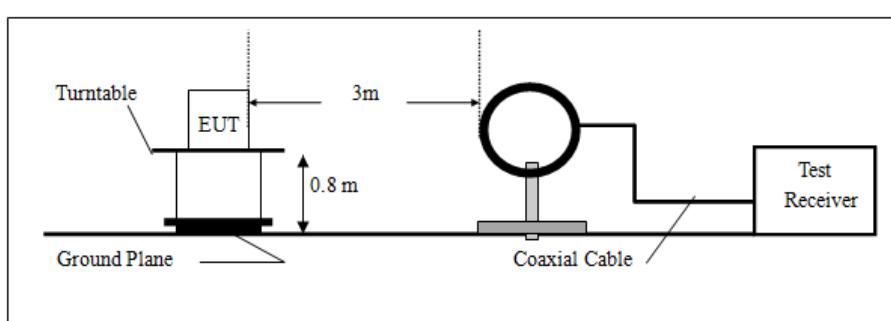

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

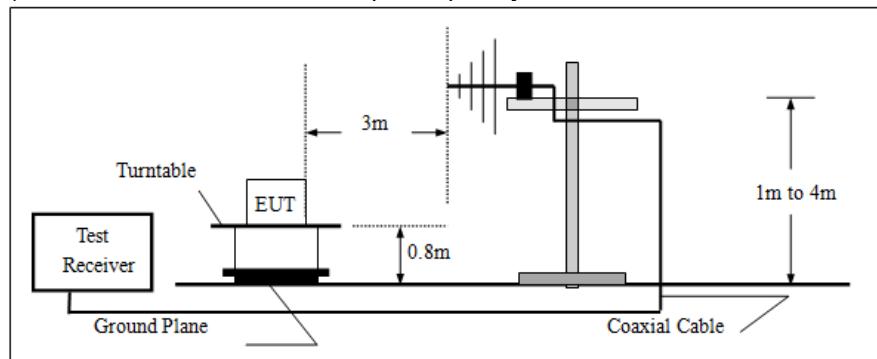

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

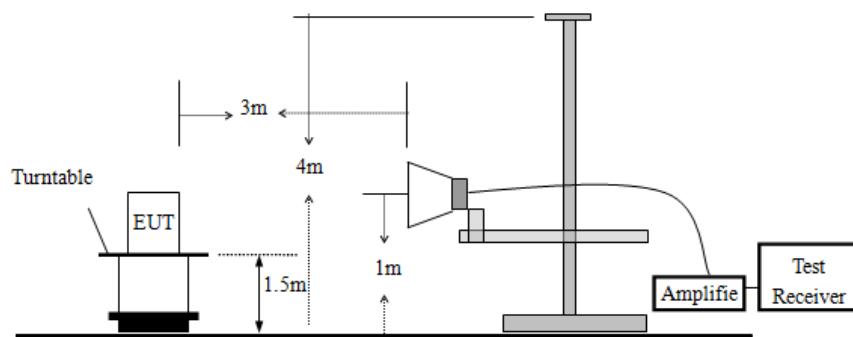


7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Game fitness board) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

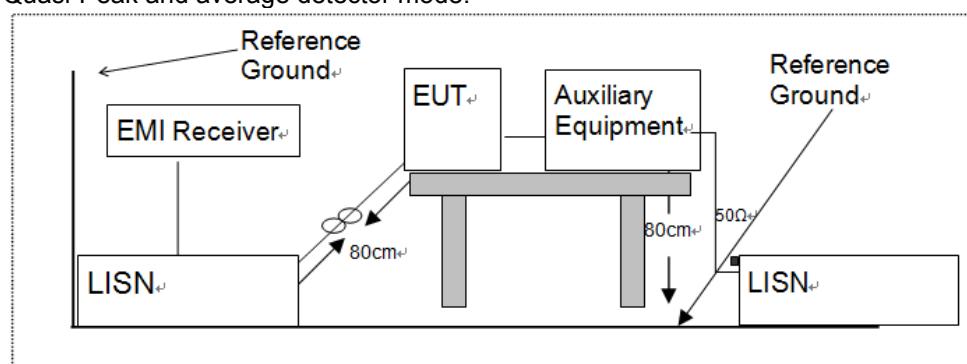

7.4 SUPPORT EQUIPMENT

| Item | Equipment | Mfr/Brand | Model/Type No. | Note |
|------|-----------|-----------|----------------|------|
| | | | | |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.


8.2 EUT Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divide into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: $2^9 - 1 = 524$ bits

Longest sequence of zeros: 8 (non-inverted signal)

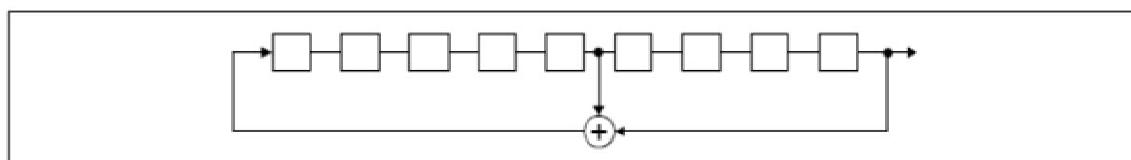

Linear Feedback Shift Register for Generation of the PRBS sequence

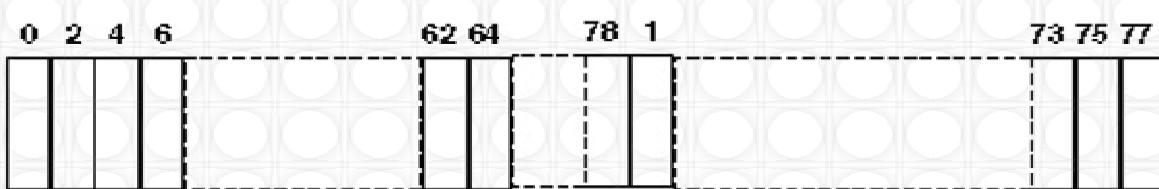

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode:

35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53

Each Frequency used equally on the average by each transmitter

8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH- enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

9 TEST REQUIREMENTS

9.1 20DB BANDWIDTH

9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and DA 00-705

9.1.2 Conformance Limit

No limit requirement.

9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.1.4 Test Procedure

The EUT was operating in Bluetooth V2.1 mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) =100 kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.


Measure and record the results in the test report.



Test Results



| | | | |
|--------------|------|------------|------------------|
| Temperature: | 24 | Test Date: | January 13, 2016 |
| Humidity: | 53 % | Test By: | KK |


| Modulation Mode | Channel Number | Channel Frequency (MHz) | 20dB Bandwidth (kHz) |
|-----------------|----------------|-------------------------|----------------------|
| GFSK | 00 | 2402 | 976.02 |
| | 39 | 2441 | 961.03 |
| | 78 | 2480 | 960.03 |
| pi/4-DQPSK | 00 | 2402 | 1349 |
| | 39 | 2441 | 1350 |
| | 78 | 2480 | 1350 |
| 8DPSK | 00 | 2402 | 1300 |
| | 39 | 2441 | 1308 |
| | 78 | 2480 | 1298 |

| | | | |
|--|---------------------|-----------------|--|
| Test Model | 20dB Bandwidth | | |
| | Bluetooth V2.1 | | |
| | Channel 0: 2402MHz | GFSK Modulation | |
|  | | | |
| Test Model | 20dB Bandwidth | | |
| | Bluetooth V2.1 | | |
| | Channel 39: 2441MHz | GFSK Modulation | |
|  | | | |
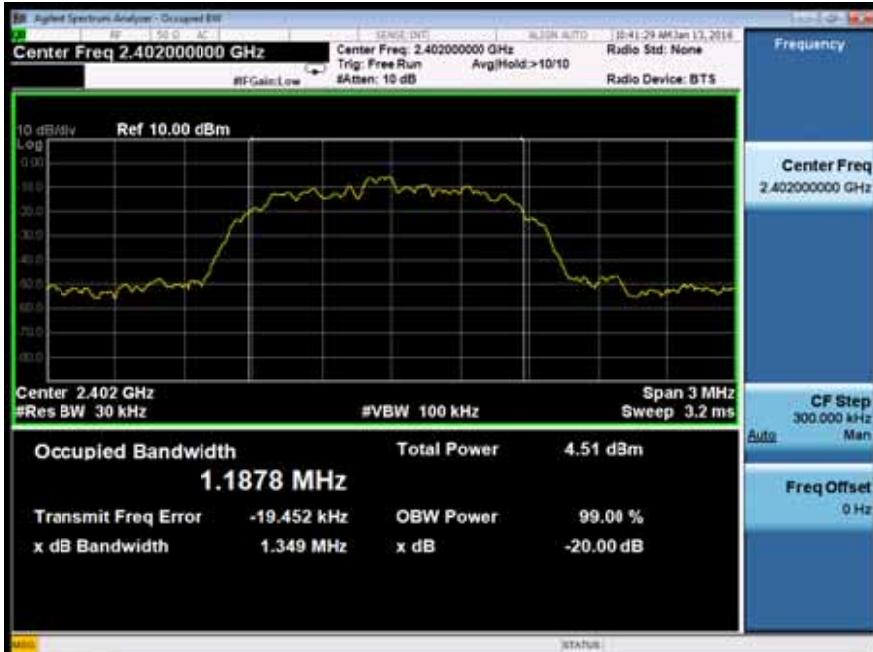
| | | | |
|--|---------------------|--|-----------------------|
| Test Model | 20dB Bandwidth | | |
| | Bluetooth V2.1 | | |
| | Channel 78: 2480MHz | | GFSK Modulation |
|  | | | |
| Test Model | 20dB Bandwidth | | |
| | Bluetooth V2.1 | | |
| | Channel 0: 2402MHz | | pi/4-DQPSK Modulation |
|  | | | |
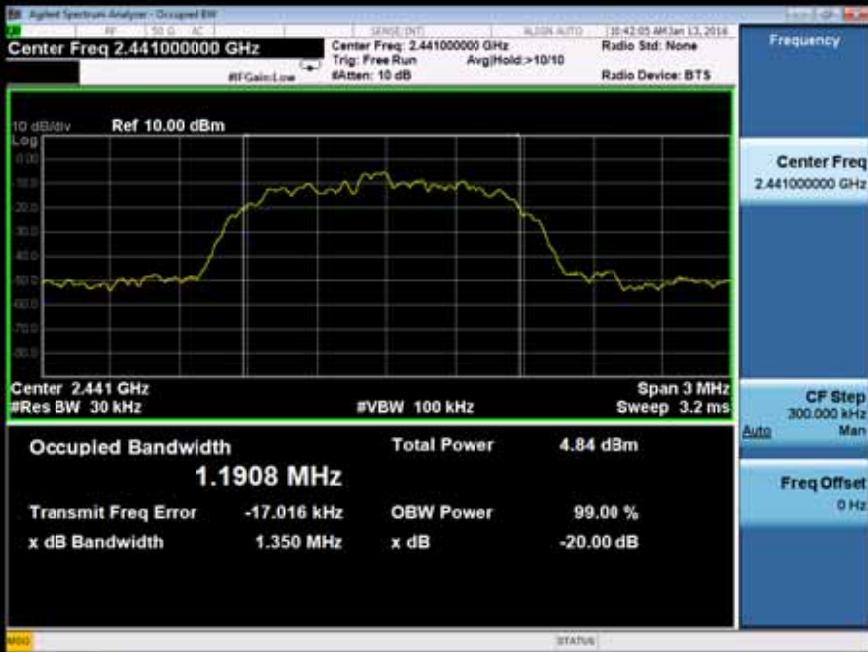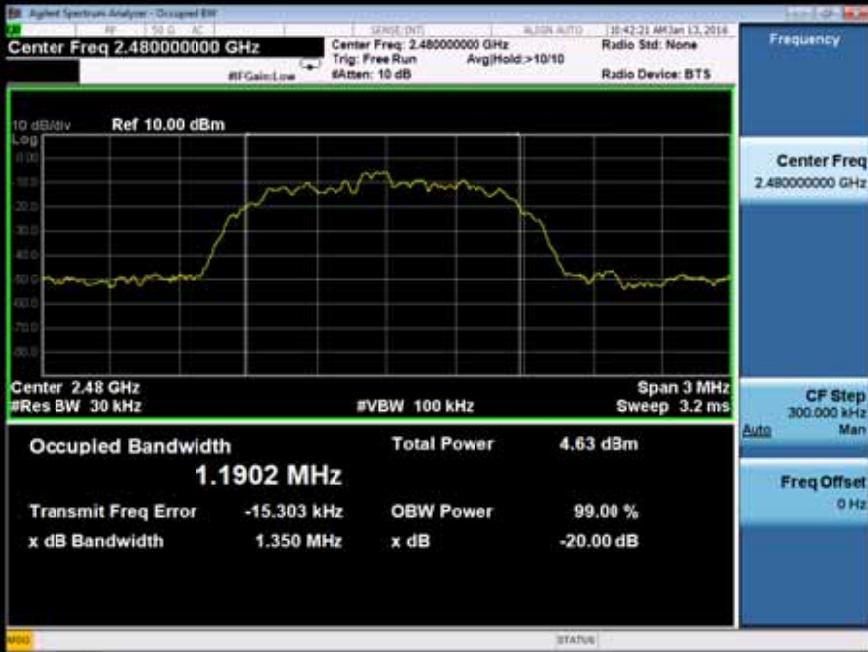
| | |
|--|---|
| Test Model | 20dB Bandwidth |
| | Bluetooth V2.1 |
| | Channel 39: 2441MHz pi/4-DQPSK Modulation |
|  <p>Agilent Spectrum Analyzer - (Digital ESR)</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref 10.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1908 MHz</p> <p>Transmit Freq Error -17.016 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.350 MHz x dB -20.00 dB</p> <p>CF Step 300.000 kHz Auto</p> <p>Freq Offset 0 Hz</p> | |
| Test Model | 20dB Bandwidth |
| | Bluetooth V2.1 |
| | Channel 78: 2480MHz pi/4-DQPSK Modulation |
|  <p>Agilent Spectrum Analyzer - (Digital ESR)</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref 10.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1902 MHz</p> <p>Transmit Freq Error -15.303 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.350 MHz x dB -20.00 dB</p> <p>CF Step 300.000 kHz Auto</p> <p>Freq Offset 0 Hz</p> | |
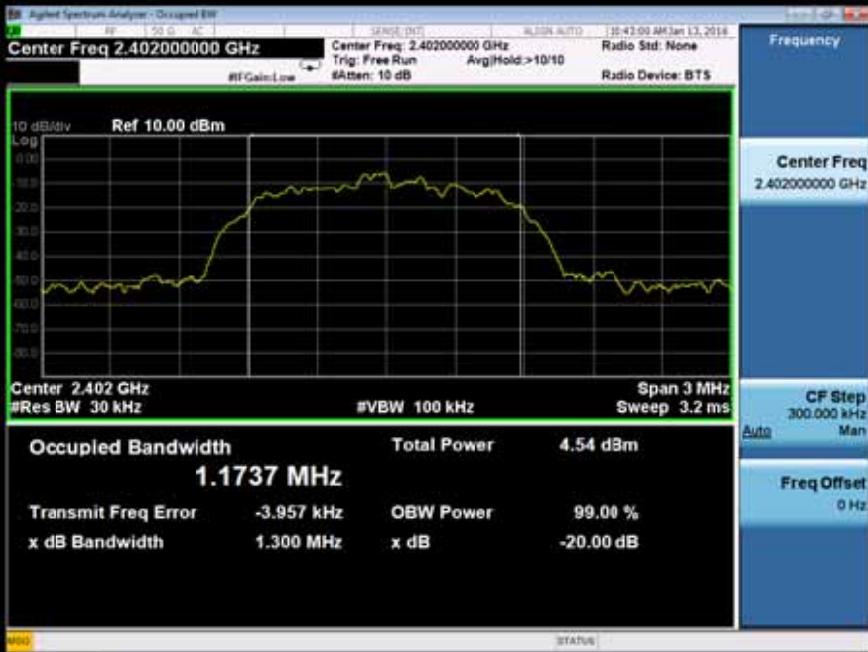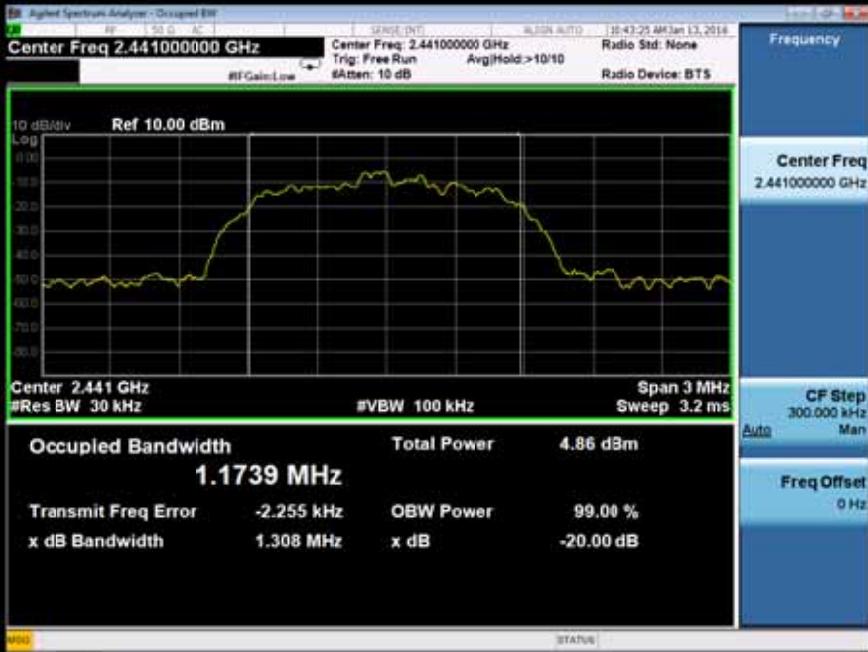
| | |
|--|---------------------|
| Test Model | 20dB Bandwidth |
| | Bluetooth V2.1 |
| | Channel 0: 2402MHz |
|  <p>Agilent Spectrum Analyzer - (Digital) E8</p> <p>Center Freq 2.402000000 GHz</p> <p>SENSE INT: WILSON AUTO 10:43:00 AM Jan 13, 2018</p> <p>Trig: FreeRun Avg/Hold >10/10</p> <p>Radio Std: None Radio Device: BTS</p> <p>#IFGain:Low #Atten: 10 dB</p> <p>Frequency: 2.402000000 GHz</p> <p>CF Step: 300.000 kHz Auto</p> <p>Freq Offset: 0 Hz</p> <p>10 dB/div Ref 10.00 dBm</p> <p>Log</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth: 1.1737 MHz</p> <p>Total Power: 4.54 dBm</p> <p>Transmit Freq Error: -3.957 kHz OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.300 MHz x dB: -20.00 dB</p> | |
| Test Model | 20dB Bandwidth |
| | Bluetooth V2.1 |
| | Channel 39: 2441MHz |
|  <p>Agilent Spectrum Analyzer - (Digital) E8</p> <p>Center Freq 2.441000000 GHz</p> <p>SENSE INT: WILSON AUTO 10:43:25 AM Jan 13, 2018</p> <p>Trig: FreeRun Avg/Hold >10/10</p> <p>Radio Std: None Radio Device: BTS</p> <p>#IFGain:Low #Atten: 10 dB</p> <p>Frequency: 2.441000000 GHz</p> <p>CF Step: 300.000 kHz Auto</p> <p>Freq Offset: 0 Hz</p> <p>10 dB/div Ref 10.00 dBm</p> <p>Log</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth: 1.1739 MHz</p> <p>Total Power: 4.86 dBm</p> <p>Transmit Freq Error: -2.255 kHz OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.308 MHz x dB: -20.00 dB</p> | |

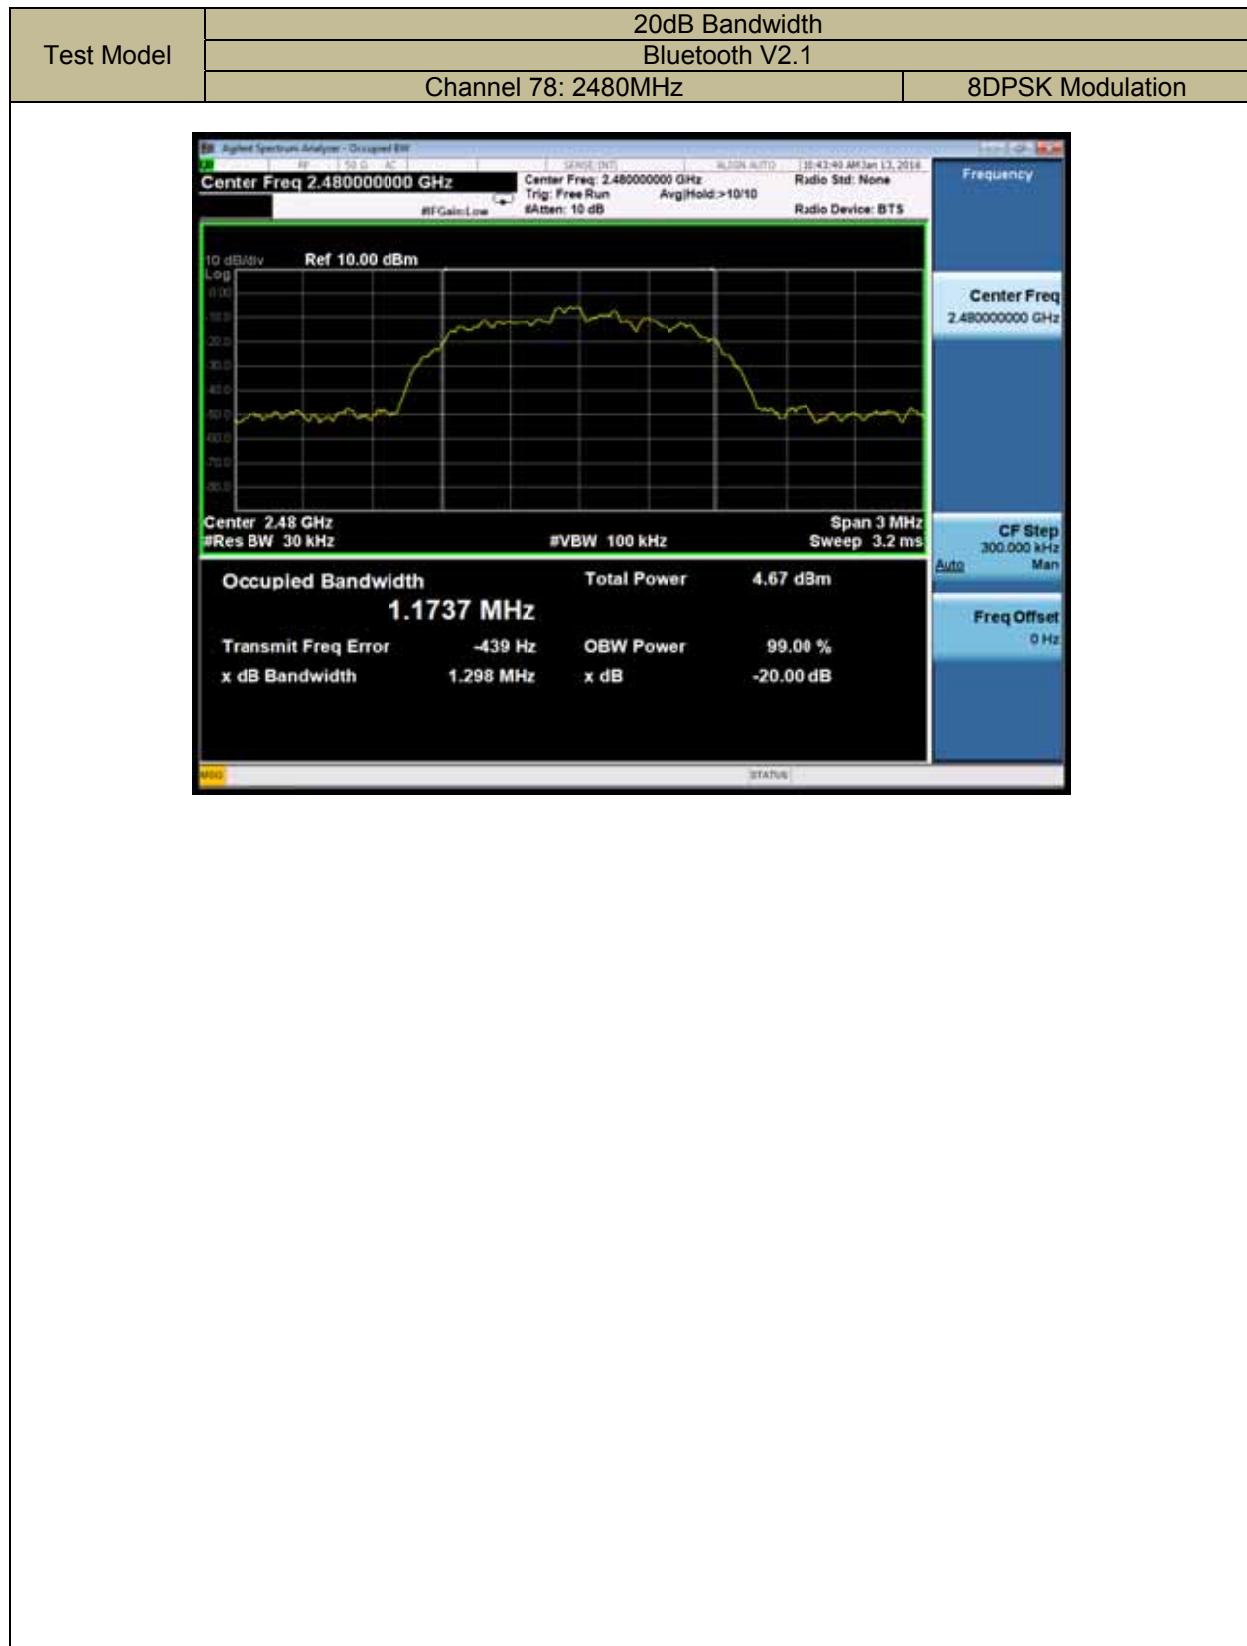

9.2 CARRIER FREQUENCY SEPARATION

9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and DA 00-705

9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.2.4 Test Procedure

■ According to FCC Part15.247(a)(1)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Set the RBW =100kHz. Set VBW =300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test Results


| | | | |
|--------------|------|------------|------------------|
| Temperature: | 24 | Test Date: | January 13, 2016 |
| Humidity: | 53 % | Test By: | KK |

| Modulation Mode | Channel Number | Channel Frequency (MHz) | Measurement Bandwidth (kHz) | Limit (kHz) | Verdict |
|-----------------|----------------|-------------------------|-----------------------------|-------------|---------|
| GFSK | 0 | 2402 | 1000 | >976.02 | PASS |
| | 39 | 2441 | 1000 | >961.03 | PASS |
| | 78 | 2480 | 1000 | >960.03 | PASS |
| pi/4-DQPSK | 0 | 2402 | 1000 | >899.33 | PASS |
| | 39 | 2441 | 1000 | >900.00 | PASS |
| | 78 | 2480 | 1000 | >900.00 | PASS |
| 8DPSK | 0 | 2402 | 1000 | >866.67 | PASS |
| | 39 | 2441 | 1000 | >872.00 | PASS |
| | 78 | 2480 | 1000 | >865.33 | PASS |

Note: Limit = 20dB bandwidth for GFSK modulation, Limit = 20dB bandwidth*2/3 for pi/4-DQPSK, 8DPSK modulation , if it is greater than 25kHz and the output power is less than 125mW (21dBm).
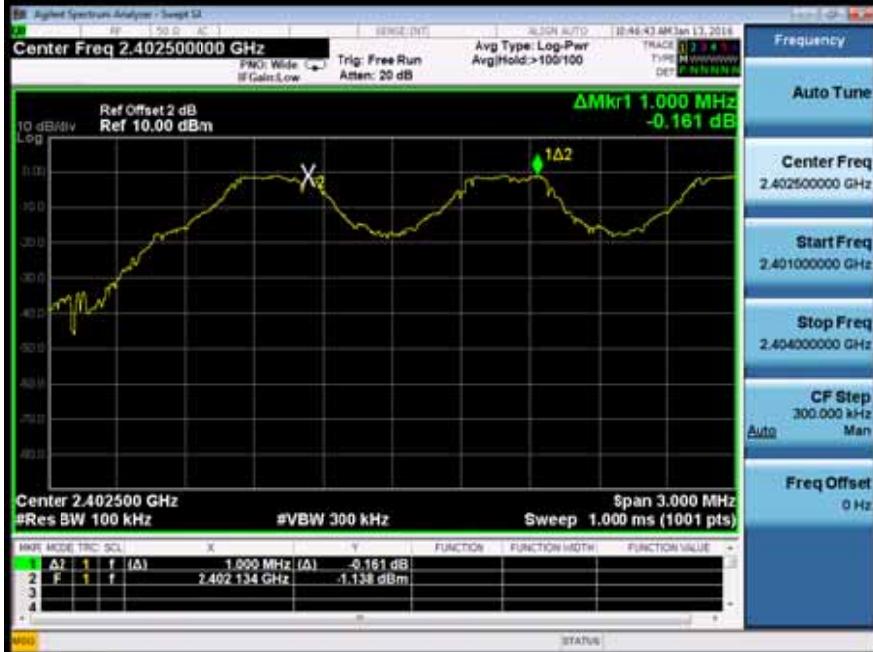
| Test Model | Carrier Frequency Separation | | | |
|--|------------------------------|--|-----------------|--|
| | Bluetooth V2.1 | | GFSK Modulation | |
| | Channel 0: 2402MHz | | | |
|  | | | | |
| Test Model | Carrier Frequency Separation | | | |
| | Bluetooth V2.1 | | GFSK Modulation | |
| | Channel 39: 2441MHz | | | |
|  | | | | |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------------------------------|---|-----------------------|---------------|------|------------|-----------|-----------|-----------|----------|---|---|---|---------------|---------------|------------|------------|---|--|--|--|--|--|---|---|--|--|--|--|--|--|
| Test Model | Carrier Frequency Separation | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Bluetooth V2.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Channel 78: 2480MHz | | GFSK Modulation | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  <table border="1"> <tr> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ1)</td> <td>-0.082 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.479 992 GHz</td> <td></td> <td>-0.655 dBm</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table> | | | Δ2 | 1 | f | (Δ) | 1.000 MHz | (Δ1) | -0.082 dB | 2 | F | 1 | f | 2.479 992 GHz | | -0.655 dBm | 3 | | | | | | | 4 | | | | | | | |
| Δ2 | 1 | f | (Δ) | 1.000 MHz | (Δ1) | -0.082 dB | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | f | 2.479 992 GHz | | -0.655 dBm | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test Model | Carrier Frequency Separation | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Bluetooth V2.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Channel 0: 2402MHz | | pi/4-DQPSK Modulation | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  <table border="1"> <tr> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ1)</td> <td>1.993 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.402 000 GHz</td> <td></td> <td>-6.459 dBm</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table> | | | | Δ2 | 1 | f | (Δ) | 1.000 MHz | (Δ1) | 1.993 dB | 2 | F | 1 | f | 2.402 000 GHz | | -6.459 dBm | 3 | | | | | | | 4 | | | | | | |
| Δ2 | 1 | f | (Δ) | 1.000 MHz | (Δ1) | 1.993 dB | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | f | 2.402 000 GHz | | -6.459 dBm | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
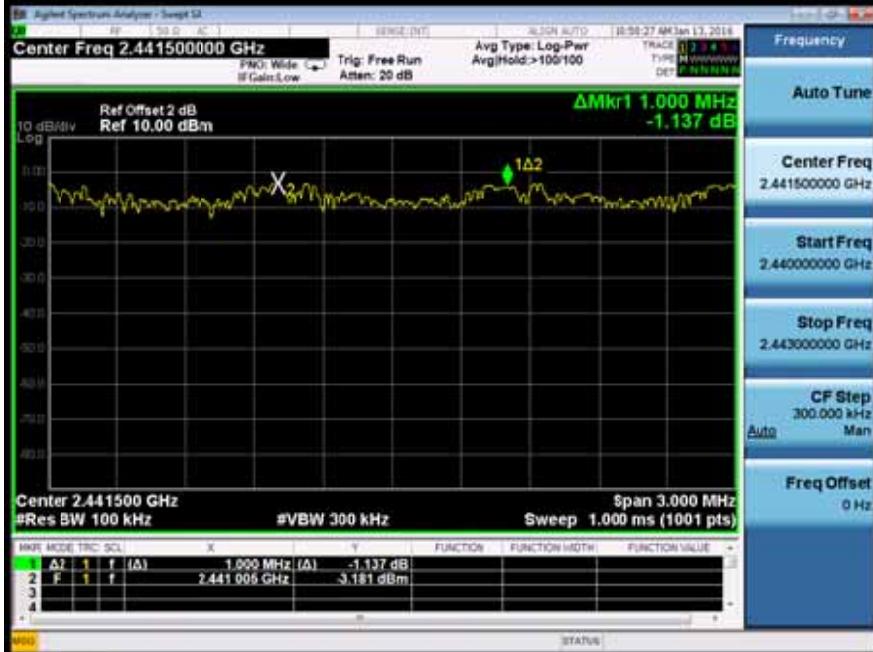
| | | | |
|--|------------------------------|--|-----------------------|
| Test Model | Carrier Frequency Separation | | |
| | Bluetooth V2.1 | | |
| | Channel 39: 2441MHz | | pi/4-DQPSK Modulation |
|  | | | |
| Test Model | Carrier Frequency Separation | | |
| | Bluetooth V2.1 | | |
| | Channel 78: 2480MHz | | pi/4-DQPSK Modulation |
|  | | | |

| | | | | | | | | | | | | | | | | | | | | | | | |
|--|------------------------------|------------------|---------------|---------------|---|-------|---------------|-----------|---|---|---|---|---------------|---|--|--|--|------------|---|--|--|--|--|
| Test Model | Carrier Frequency Separation | | | | | | | | | | | | | | | | | | | | | | |
| | Bluetooth V2.1 | | | | | | | | | | | | | | | | | | | | | | |
| | Channel 0: 2402MHz | 8DPSK Modulation | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <tr> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>1.000 MHz (Δ)</td> <td>-0.015 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.402 000 GHz</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>-6.265 dBm</td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> </tr> </table> | | | | ΔZ | 1 | f (Δ) | 1.000 MHz (Δ) | -0.015 dB | 2 | F | 1 | f | 2.402 000 GHz | 3 | | | | -6.265 dBm | 4 | | | | |
| ΔZ | 1 | f (Δ) | 1.000 MHz (Δ) | -0.015 dB | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | f | 2.402 000 GHz | | | | | | | | | | | | | | | | | | | |
| 3 | | | | -6.265 dBm | | | | | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | | | | | | | | |
| Test Model | Carrier Frequency Separation | | | | | | | | | | | | | | | | | | | | | | |
| | Bluetooth V2.1 | | | | | | | | | | | | | | | | | | | | | | |
| | Channel 39: 2441MHz | 8DPSK Modulation | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <tr> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>1.000 MHz (Δ)</td> <td>-3.282 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.441 005 GHz</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td>-3.243 dBm</td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> </tr> </table> | | | | ΔZ | 1 | f (Δ) | 1.000 MHz (Δ) | -3.282 dB | 2 | F | 1 | f | 2.441 005 GHz | 3 | | | | -3.243 dBm | 4 | | | | |
| ΔZ | 1 | f (Δ) | 1.000 MHz (Δ) | -3.282 dB | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | f | 2.441 005 GHz | | | | | | | | | | | | | | | | | | | |
| 3 | | | | -3.243 dBm | | | | | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | | | | | | | | |



9.3 NUMBER OF HOPPING FREQUENCIES

9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii)and DA 00-705

9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.3.4 Test Procedure

- According to FCC Part15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation (2390-2440MHz) and(2440-2490MHz)

RBW $\geq 1\%$ of the span

$$VBW \geq RBW$$

Sweep = auto

Detector function


Trace = max hold
Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show

an of the Hop

Tempera

Jan

| Hopping Channel Frequency Range | Quantity of Hopping Channel | Quantity of Hopping Channel limit |
|---------------------------------|-----------------------------|-----------------------------------|
| 2402-2480 | 79 | > 15 |
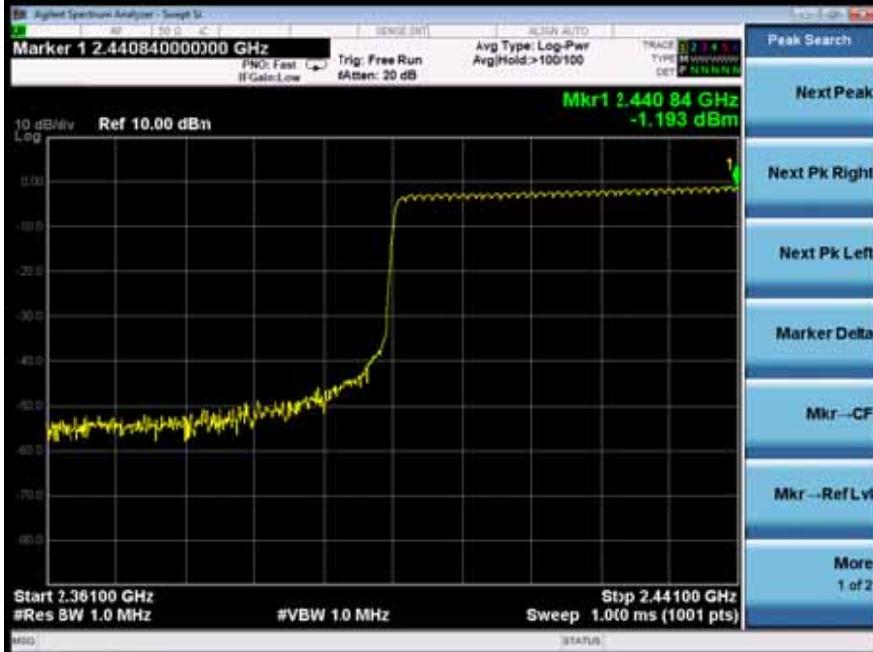
| | | |
|--|-------------------------------|--|
| Test Model | Number Of Hopping Frequencies | |
| | Bluetooth V2.1 | |
| | Span: 2390-2440MHz | |
|  <p>Marker 1 2.440840000000 GHz PNO: Fast I₁ I₂ I₃ I₄ I₅ I₆ I₇ I₈ I₉ I₁₀ I₁₁ I₁₂ I₁₃ I₁₄ I₁₅ I₁₆ I₁₇ I₁₈ I₁₉ I₂₀ I₂₁ I₂₂ I₂₃ I₂₄ I₂₅ I₂₆ I₂₇ I₂₈ I₂₉ I₃₀ I₃₁ I₃₂ I₃₃ I₃₄ I₃₅ I₃₆ I₃₇ I₃₈ I₃₉ I₄₀ I₄₁ I₄₂ I₄₃ I₄₄ I₄₅ I₄₆ I₄₇ I₄₈ I₄₉ I₅₀ I₅₁ I₅₂ I₅₃ I₅₄ I₅₅ I₅₆ I₅₇ I₅₈ I₅₉ I₆₀ I₆₁ I₆₂ I₆₃ I₆₄ I₆₅ I₆₆ I₆₇ I₆₈ I₆₉ I₇₀ I₇₁ I₇₂ I₇₃ I₇₄ I₇₅ I₇₆ I₇₇ I₇₈ I₇₉ I₈₀ I₈₁ I₈₂ I₈₃ I₈₄ I₈₅ I₈₆ I₈₇ I₈₈ I₈₉ I₉₀ I₉₁ I₉₂ I₉₃ I₉₄ I₉₅ I₉₆ I₉₇ I₉₈ I₉₉ I₁₀₀ I₁₀₁ I₁₀₂ I₁₀₃ I₁₀₄ I₁₀₅ I₁₀₆ I₁₀₇ I₁₀₈ I₁₀₉ I₁₁₀ I₁₁₁ I₁₁₂ I₁₁₃ I₁₁₄ I₁₁₅ I₁₁₆ I₁₁₇ I₁₁₈ I₁₁₉ I₁₂₀ I₁₂₁ I₁₂₂ I₁₂₃ I₁₂₄ I₁₂₅ I₁₂₆ I₁₂₇ I₁₂₈ I₁₂₉ I₁₃₀ I₁₃₁ I₁₃₂ I₁₃₃ I₁₃₄ I₁₃₅ I₁₃₆ I₁₃₇ I₁₃₈ I₁₃₉ I₁₄₀ I₁₄₁ I₁₄₂ I₁₄₃ I₁₄₄ I₁₄₅ I₁₄₆ I₁₄₇ I₁₄₈ I₁₄₉ I₁₅₀ I₁₅₁ I₁₅₂ I₁₅₃ I₁₅₄ I₁₅₅ I₁₅₆ I₁₅₇ I₁₅₈ I₁₅₉ I₁₆₀ I₁₆₁ I₁₆₂ I₁₆₃ I₁₆₄ I₁₆₅ I₁₆₆ I₁₆₇ I₁₆₈ I₁₆₉ I₁₇₀ I₁₇₁ I₁₇₂ I₁₇₃ I₁₇₄ I₁₇₅ I₁₇₆ I₁₇₇ I₁₇₈ I₁₇₉ I₁₈₀ I₁₈₁ I₁₈₂ I₁₈₃ I₁₈₄ I₁₈₅ I₁₈₆ I₁₈₇ I₁₈₈ I₁₈₉ I₁₉₀ I₁₉₁ I₁₉₂ I₁₉₃ I₁₉₄ I₁₉₅ I₁₉₆ I₁₉₇ I₁₉₈ I₁₉₉ I₂₀₀ I₂₀₁ I₂₀₂ I₂₀₃ I₂₀₄ I₂₀₅ I₂₀₆ I₂₀₇ I₂₀₈ I₂₀₉ I₂₁₀ I₂₁₁ I₂₁₂ I₂₁₃ I₂₁₄ I₂₁₅ I₂₁₆ I₂₁₇ I₂₁₈ I₂₁₉ I₂₂₀ I₂₂₁ I₂₂₂ I₂₂₃ I₂₂₄ I₂₂₅ I₂₂₆ I₂₂₇ I₂₂₈ I₂₂₉ I₂₃₀ I₂₃₁ I₂₃₂ I₂₃₃ I₂₃₄ I₂₃₅ I₂₃₆ I₂₃₇ I₂₃₈ I₂₃₉ I₂₄₀ I₂₄₁ I₂₄₂ I₂₄₃ I₂₄₄ I₂₄₅ I₂₄₆ I₂₄₇ I₂₄₈ I₂₄₉ I₂₅₀ I₂₅₁ I₂₅₂ I₂₅₃ I₂₅₄ I₂₅₅ I₂₅₆ I₂₅₇ I₂₅₈ I₂₅₉ I₂₆₀ I₂₆₁ I₂₆₂ I₂₆₃ I₂₆₄ I₂₆₅ I₂₆₆ I₂₆₇ I₂₆₈ I₂₆₉ I₂₇₀ I₂₇₁ I₂₇₂ I₂₇₃ I₂₇₄ I₂₇₅ I₂₇₆ I₂₇₇ I₂₇₈ I₂₇₉ I₂₈₀ I₂₈₁ I₂₈₂ I₂₈₃ I₂₈₄ I₂₈₅ I₂₈₆ I₂₈₇ I₂₈₈ I₂₈₉ I₂₉₀ I₂₉₁ I₂₉₂ I₂₉₃ I₂₉₄ I₂₉₅ I₂₉₆ I₂₉₇ I₂₉₈ I₂₉₉ I₃₀₀ I₃₀₁ I₃₀₂ I₃₀₃ I₃₀₄ I₃₀₅ I₃₀₆ I₃₀₇ I₃₀₈ I₃₀₉ I₃₁₀ I₃₁₁ I₃₁₂ I₃₁₃ I₃₁₄ I₃₁₅ I₃₁₆ I₃₁₇ I₃₁₈ I₃₁₉ I₃₂₀ I₃₂₁ I₃₂₂ I₃₂₃ I₃₂₄ I₃₂₅ I₃₂₆ I₃₂₇ I₃₂₈ I₃₂₉ I₃₃₀ I₃₃₁ I₃₃₂ I₃₃₃ I₃₃₄ I₃₃₅ I₃₃₆ I₃₃₇ I₃₃₈ I₃₃₉ I₃₄₀ I₃₄₁ I₃₄₂ I₃₄₃ I₃₄₄ I₃₄₅ I₃₄₆ I₃₄₇ I₃₄₈ I₃₄₉ I₃₅₀ I₃₅₁ I₃₅₂ I₃₅₃ I₃₅₄ I₃₅₅ I₃₅₆ I₃₅₇ I₃₅₈ I₃₅₉ I₃₆₀ I₃₆₁ I₃₆₂ I₃₆₃ I₃₆₄ I₃₆₅ I₃₆₆ I₃₆₇ I₃₆₈ I₃₆₉ I₃₇₀ I₃₇₁ I₃₇₂ I₃₇₃ I₃₇₄ I₃₇₅ I₃₇₆ I₃₇₇ I₃₇₈ I₃₇₉ I₃₈₀ I₃₈₁ I₃₈₂ I₃₈₃ I₃₈₄ I₃₈₅ I₃₈₆ I₃₈₇ I₃₈₈ I₃₈₉ I₃₉₀ I₃₉₁ I₃₉₂ I₃₉₃ I₃₉₄ I₃₉₅ I₃₉₆ I₃₉₇ I₃₉₈ I₃₉₉ I₄₀₀ I₄₀₁ I₄₀₂ I₄₀₃ I₄₀₄ I₄₀₅ I₄₀₆ I₄₀₇ I₄₀₈ I₄₀₉ I₄₁₀ I₄₁₁ I₄₁₂ I₄₁₃ I₄₁₄ I₄₁₅ I₄₁₆ I₄₁₇ I₄₁₈ I₄₁₉ I₄₂₀ I₄₂₁ I₄₂₂ I₄₂₃ I₄₂₄ I₄₂₅ I₄₂₆ I₄₂₇ I₄₂₈ I₄₂₉ I₄₃₀ I₄₃₁ I₄₃₂ I₄₃₃ I₄₃₄ I₄₃₅ I₄₃₆ I₄₃₇ I₄₃₈ I₄₃₉ I₄₄₀ I₄₄₁ I₄₄₂ I₄₄₃ I₄₄₄ I₄₄₅ I₄₄₆ I₄₄₇ I₄₄₈ I₄₄₉ I₄₅₀ I₄₅₁ I₄₅₂ I₄₅₃ I₄₅₄ I₄₅₅ I₄₅₆ I₄₅₇ I₄₅₈ I₄₅₉ I₄₆₀ I₄₆₁ I₄₆₂ I₄₆₃ I₄₆₄ I₄₆₅ I₄₆₆ I₄₆₇ I₄₆₈ I₄₆₉ I₄₇₀ I₄₇₁ I₄₇₂ I₄₇₃ I₄₇₄ I₄₇₅ I₄₇₆ I₄₇₇ I₄₇₈ I₄₇₉ I₄₈₀ I₄₈₁ I₄₈₂ I₄₈₃ I₄₈₄ I₄₈₅ I₄₈₆ I₄₈₇ I₄₈₈ I₄₈₉ I₄₉₀ I₄₉₁ I₄₉₂ I₄₉₃ I₄₉₄ I₄₉₅ I₄₉₆ I₄₉₇ I₄₉₈ I₄₉₉ I₅₀₀ I₅₀₁ I₅₀₂ I₅₀₃ I₅₀₄ I₅₀₅ I₅₀₆ I₅₀₇ I₅₀₈ I₅₀₉ I₅₁₀ I₅₁₁ I₅₁₂ I₅₁₃ I₅₁₄ I₅₁₅ I₅₁₆ I₅₁₇ I₅₁₈ I₅₁₉ I₅₂₀ I₅₂₁ I₅₂₂ I₅₂₃ I₅₂₄ I₅₂₅ I₅₂₆ I₅₂₇ I₅₂₈ I₅₂₉ I₅₃₀ I₅₃₁ I₅₃₂ I₅₃₃ I₅₃₄ I₅₃₅ I₅₃₆ I₅₃₇ I₅₃₈ I₅₃₉ I₅₄₀ I₅₄₁ I₅₄₂ I₅₄₃ I₅₄₄ I₅₄₅ I₅₄₆ I₅₄₇ I₅₄₈ I₅₄₉ I₅₅₀ I₅₅₁ I₅₅₂ I₅₅₃ I₅₅₄ I₅₅₅ I₅₅₆ I₅₅₇ I₅₅₈ I₅₅₉ I₅₆₀ I₅₆₁ I₅₆₂ I₅₆₃ I₅₆₄ I₅₆₅ I₅₆₆ I₅₆₇ I₅₆₈ I₅₆₉ I₅₇₀ I₅₇₁ I₅₇₂ I₅₇₃ I₅₇₄ I₅₇₅ I₅₇₆ I₅₇₇ I₅₇₈ I₅₇₉ I₅₈₀ I₅₈₁ I₅₈₂ I₅₈₃ I₅₈₄ I₅₈₅ I₅₈₆ I₅₈₇ I₅₈₈ I₅₈₉ I₅₉₀ I₅₉₁ I₅₉₂ I₅₉₃ I₅₉₄ I₅₉₅ I₅₉₆ I₅₉₇ I₅₉₈ I₅₉₉ I₆₀₀ I₆₀₁ I₆₀₂ I₆₀₃ I₆₀₄ I₆₀₅ I₆₀₆ I₆₀₇ I₆₀₈ I₆₀₉ I₆₁₀ I₆₁₁ I₆₁₂ I₆₁₃ I₆₁₄ I₆₁₅ I₆₁₆ I₆₁₇ I₆₁₈ I₆₁₉ I₆₂₀ I₆₂₁ I₆₂₂ I₆₂₃ I₆₂₄ I₆₂₅ I₆₂₆ I₆₂₇ I₆₂₈ I₆₂₉ I₆₃₀ I₆₃₁ I₆₃₂ I₆₃₃ I₆₃₄ I₆₃₅ I₆₃₆ I₆₃₇ I₆₃₈ I₆₃₉ I₆₄₀ I₆₄₁ I₆₄₂ I₆₄₃ I₆₄₄ I₆₄₅ I₆₄₆ I₆₄₇ I₆₄₈ I₆₄₉ I₆₅₀ I₆₅₁ I₆₅₂ I₆₅₃ I₆₅₄ I₆₅₅ I₆₅₆ I₆₅₇ I₆₅₈ I₆₅₉ I₆₆₀ I₆₆₁ I₆₆₂ I₆₆₃ I₆₆₄ I₆₆₅ I₆₆₆ I₆₆₇ I₆₆₈ I₆₆₉ I₆₇₀ I₆₇₁ I₆₇₂ I₆₇₃ I₆₇₄ I₆₇₅ I₆₇₆ I₆₇₇ I₆₇₈ I₆₇₉ I₆₈₀ I₆₈₁ I₆₈₂ I₆₈₃ I₆₈₄ I₆₈₅ I₆₈₆ I₆₈₇ I₆₈₈ I₆₈₉ I₆₉₀ I₆₉₁ I₆₉₂ I₆₉₃ I₆₉₄ I₆₉₅ I₆₉₆ I₆₉₇ I₆₉₈ I₆₉₉ I₇₀₀ I₇₀₁ I₇₀₂ I₇₀₃ I₇₀₄ I₇₀₅ I₇₀₆ I₇₀₇ I₇₀₈ I₇₀₉ I₇₁₀ I₇₁₁ I₇₁₂ I₇₁₃ I₇₁₄ I₇₁₅ I₇₁₆ I₇₁₇ I₇₁₈ I₇₁₉ I₇₂₀ I₇₂₁ I₇₂₂ I₇₂₃ I₇₂₄ I₇₂₅ I₇₂₆ I₇₂₇ I₇₂₈ I₇₂₉ I₇₃₀ I₇₃₁ I₇₃₂ I₇₃₃ I₇₃₄ I₇₃₅ I₇₃₆ I₇₃₇ I₇₃₈ I₇₃₉ I₇₄₀ I₇₄₁ I₇₄₂ I₇₄₃ I₇₄₄ I₇₄₅ I₇₄₆ I₇₄₇ I₇₄₈ I₇₄₉ I₇₅₀ I₇₅₁ I₇₅₂ I₇₅₃ I₇₅₄ I₇₅₅ I₇₅₆ I₇₅₇ I₇₅₈ I₇₅₉ I₇₆₀ I₇₆₁ I₇₆₂ I₇₆₃ I₇₆₄ I₇₆₅ I₇₆₆ I₇₆₇ I₇₆₈ I₇₆₉ I₇₇₀ I₇₇₁ I₇₇₂ I₇₇₃ I₇₇₄ I₇₇₅ I₇₇₆ I₇₇₇ I₇₇₈ I₇₇₉ I₇₈₀ I₇₈₁ I₇₈₂ I₇₈₃ I₇₈₄ I₇₈₅ I₇₈₆ I₇₈₇ I₇₈₈ I₇₈₉ I₇₉₀ I₇₉₁ I₇₉₂ I₇₉₃ I₇₉₄ I₇₉₅ I₇₉₆ I₇₉₇ I₇₉₈ I₇₉₉ I₈₀₀ I₈₀₁ I₈₀₂ I₈₀₃ I₈₀₄ I₈₀₅ I₈₀₆ I₈₀₇ I₈₀₈ I₈₀₉ I₈₁₀ I₈₁₁ I₈₁₂ I₈₁₃ I₈₁₄ I₈₁₅ I₈₁₆ I₈₁₇ I₈₁₈ I₈₁₉ I₈₂₀ I₈₂₁ I₈₂₂ I₈₂₃ I₈₂₄ I₈₂₅ I₈₂₆ I₈₂₇ I₈₂₈ I₈₂₉ I₈₃₀ I₈₃₁ I₈₃₂ I₈₃₃ I₈₃₄ I₈₃₅ I₈₃₆ I₈₃₇ I₈₃₈ I₈₃₉ I₈₄₀ I₈₄₁ I₈₄₂ I₈₄₃ I₈₄₄ I₈₄₅ I₈₄₆ I₈₄₇ I₈₄₈ I₈₄₉ I₈₅₀ I₈₅₁ I₈₅₂ I₈₅₃ I₈₅₄ I₈₅₅ I₈₅₆ I₈₅₇ I₈₅₈ I₈₅₉ I₈₆₀ I₈₆₁ I₈₆₂ I₈₆₃ I₈₆₄ I₈₆₅ I₈₆₆ I₈₆₇ I₈₆₈ I₈₆₉ I₈₇₀ I₈₇₁ I₈₇₂ I₈₇₃ I₈₇₄ I₈₇₅ I₈₇₆ I₈₇₇ I₈₇₈ I₈₇₉ I₈₈₀ I₈₈₁ I₈₈₂ I₈₈₃ I₈₈₄ I₈₈₅ I₈₈₆ I₈₈₇ I₈₈₈ I₈₈₉ I₈₉₀ I₈₉₁ I₈₉₂ I₈₉₃ I₈₉₄ I₈₉₅ I₈₉₆ I₈₉₇ I₈₉₈ I₈₉₉ I₉₀₀ I₉₀₁ I₉₀₂ I₉₀₃ I₉₀₄ I₉₀₅ I₉₀₆ I₉₀₇ I₉₀₈ I₉₀₉ I₉₁₀ I₉₁₁ I₉₁₂ I₉₁₃ I₉₁₄ I₉₁₅ I₉₁₆ I₉₁₇ I₉₁₈ I₉₁₉ I₉₂₀ I₉₂₁ I₉₂₂ I₉₂₃ I₉₂₄ I₉₂₅ I₉₂₆ I₉₂₇ I₉₂₈ I₉₂₉ I₉₃₀ I₉₃₁ I₉₃₂ I₉₃₃ I₉₃₄ I₉₃₅ I₉₃₆ I₉₃₇ I₉₃₈ I₉₃₉ I₉₄₀ I₉₄₁ I₉₄₂ I₉₄₃ I₉₄₄ I₉₄₅ I₉₄₆ I₉₄₇ I₉₄₈ I₉₄₉ I₉₅₀ I₉₅₁ I₉₅₂ I₉₅₃ I₉₅₄ I₉₅₅ I₉₅₆ I₉₅₇ I₉₅₈ I₉₅₉ I₉₆₀ I₉₆₁ I₉₆₂ I₉₆₃ I₉₆₄ I₉₆₅ I₉₆₆ I₉₆₇ I₉₆₈ I₉₆₉ I₉₇₀ I₉₇₁ I₉₇₂ I₉₇₃ I₉₇₄ I₉₇₅ I₉₇₆ I₉₇₇ I₉₇₈ I₉₇₉ I₉₈₀ I₉₈₁ I₉₈₂ I₉₈₃ I₉₈₄ I₉₈₅ I₉₈₆ I₉₈₇ I₉₈₈ I₉₈₉ I₉₉₀ I₉₉₁ I₉₉₂ I₉₉₃ I₉₉₄ I₉₉₅ I₉₉₆ I₉₉₇ I₉₉₈ I₉₉₉ I₁₀₀₀ I₁₀₀₁ I₁₀₀₂ I₁₀₀₃ I₁₀₀₄ I₁₀₀₅ I₁₀₀₆ I₁₀₀₇ I₁₀₀₈ I₁₀₀₉ I₁₀₁₀ I₁₀₁₁ I₁₀₁₂ I₁₀₁₃ I₁₀₁₄ I₁₀₁₅ I₁₀₁₆ I₁₀₁₇ I₁₀₁₈ I₁₀₁₉ I₁₀₂₀ I₁₀₂₁ I₁₀₂₂ I₁₀₂₃ I₁₀₂₄ I₁₀₂₅ I₁₀₂₆ I₁₀₂₇ I₁₀₂₈ I₁₀₂₉ I₁₀₃₀ I₁₀₃₁ I₁₀₃₂ I₁₀₃₃ I₁₀₃₄ I₁₀₃₅ I₁₀₃₆ I₁₀₃₇ I₁₀₃₈ I₁₀₃₉ I₁₀₄₀ I₁₀₄₁ I₁₀₄₂ I₁₀₄₃ I₁₀₄₄ I₁₀₄₅ I₁₀₄₆ I₁₀₄₇ I₁₀₄₈ I₁₀₄₉ I₁₀₅₀ I₁₀₅₁ I₁₀₅₂ I₁₀₅₃ I₁₀₅₄ I₁₀₅₅ I₁₀₅₆ I₁₀₅₇ I₁₀₅₈ I₁₀₅₉ I₁₀₆₀ I₁₀₆₁ I₁₀₆₂ I₁₀₆₃ I₁₀₆₄ I₁₀₆₅ I₁₀₆₆ I₁₀₆₇ I₁₀₆₈ I₁₀₆₉ I₁₀₇₀ I₁₀₇₁</p> | | |

9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

9.4.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and DA 00-705

9.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

9.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.4.4 Test Procedure

- According to FCC Part15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW \geq RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value

varies with different modes of operation (e.g., data rate, modulation format, etc.),

repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section.


9.4.5 Test Results

| | | | |
|--------------|------|------------|------------------|
| Temperature: | 24 | Test Date: | January 13, 2016 |
| Humidity: | 53 % | Test By: | KK |

| Modulation Mode | Channel Number | Packet type | Pluse width (ms) | Number per channel in 31.6s | dwell time (ms) | Limit (ms) | Verdict |
|-----------------|----------------|-------------|------------------|-----------------------------|-----------------|------------|---------|
| GFSK | 0 | DH1 | 0.396 | 320.10 | 126.72 | <400 | PASS |
| | 0 | DH3 | 1.645 | 160.00 | 263.20 | <400 | PASS |
| | 0 | DH5 | 2.900 | 106.67 | 309.34 | <400 | PASS |

Note:

| | | | |
|------------|--|------|-----|
| Test Model | Average Time Of Occupancy (Dwell Time) | | |
| | Bluetooth V2.1 | | |
| | CH 0: 2402MHz | GFSK | DH1 |
| | | | |
| Test Model | Average Time Of Occupancy (Dwell Time) | | |
| | Bluetooth V2.1 | | |
| | CH 0: 2402MHz | GFSK | DH3 |
| | | | |

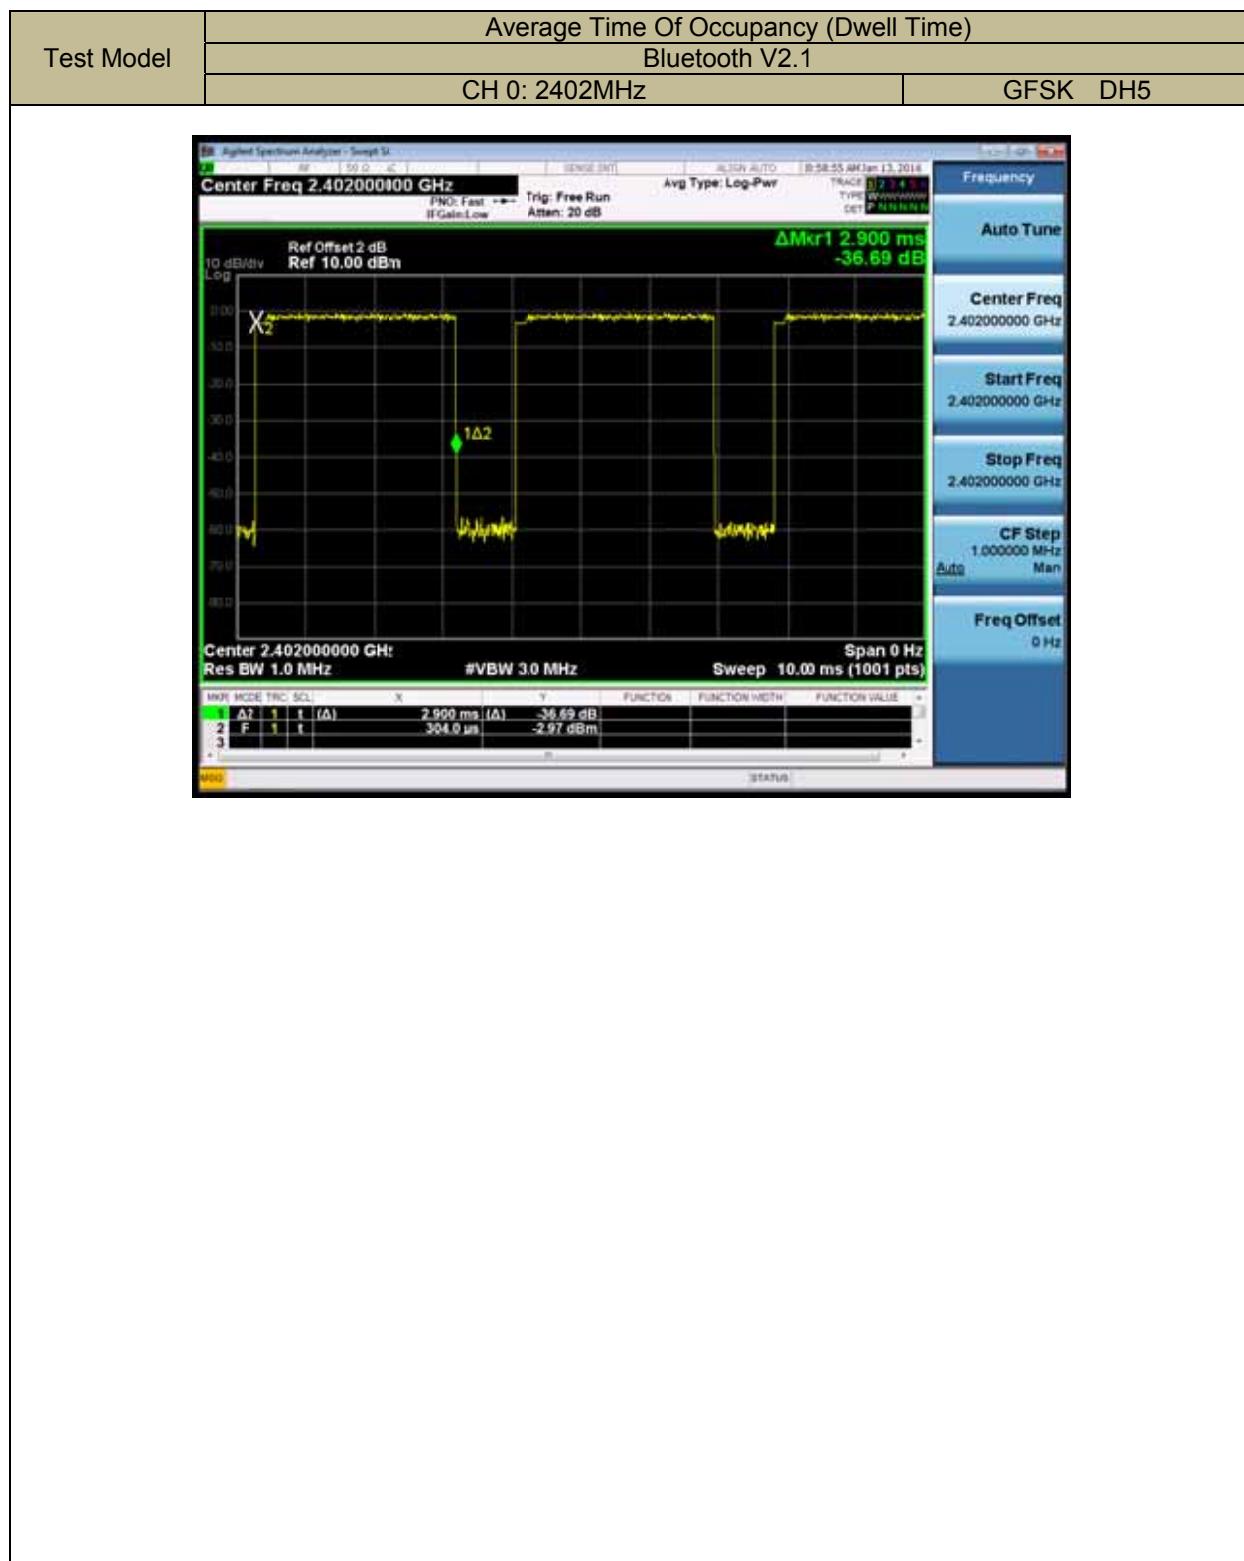

9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and DA 00-705

9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.5.4 Test Procedure

- According to FCC Part15.247(b)(1)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW \geq RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

Test Results


| | | | |
|--------------|------|------------|------------------|
| Temperature: | 24 | Test Date: | January 13, 2016 |
| Humidity: | 53 % | Test By: | KK |


| Operation Mode | Channel Number | Channel Frequency (MHz) | Measurement Level (dBm) | Limit (dBm) | Verdict |
|----------------|----------------|-------------------------|-------------------------|-------------|---------|
| GFSK | 0 | 2402 | -0.624 | 30 | PASS |
| | 39 | 2441 | -0.295 | 30 | PASS |
| | 78 | 2480 | -0.233 | 30 | PASS |
| pi/4-DQPSK | 0 | 2402 | -0.461 | 21 | PASS |
| | 39 | 2441 | -0.198 | 21 | PASS |
| | 78 | 2480 | -0.133 | 21 | PASS |
| 8DPSK | 0 | 2402 | -0.007 | 21 | PASS |
| | 39 | 2441 | 0.308 | 21 | PASS |
| | 78 | 2480 | 0.362 | 21 | PASS |
| Note: N/A | | | | | |

| | | | |
|--|-------------------------------------|--|------|
| Test Model | Maximum Peak Conducted Output Power | | |
| | Bluetooth V2.1 | | |
| | Channel 0: 2402MHz | | GFSK |
|  | | | |
| Test Model | Maximum Peak Conducted Output Power | | |
| | Bluetooth V2.1 | | |
| | Channel 39: 2441MHz | | GFSK |
|  | | | |

| | | | |
|--|-------------------------------------|------------|------|
| Test Model | Maximum Peak Conducted Output Power | | |
| | Bluetooth V2.1 | | |
| | Channel 78: 2480MHz | | GFSK |
|  | | | |
| Test Model | Maximum Peak Conducted Output Power | | |
| | Bluetooth V2.1 | | |
| | Channel 0: 2402MHz | pi/4-DQPSK | |
|  | | | |

| | | | |
|--|-------------------------------------|--|------------|
| Test Model | Maximum Peak Conducted Output Power | | |
| | Bluetooth V2.1 | | |
| | Channel 39: 2441MHz | | pi/4-DQPSK |
|  | | | |
| Test Model | Maximum Peak Conducted Output Power | | |
| | Bluetooth V2.1 | | |
| | Channel 78: 2480MHz | | pi/4-DQPSK |
|  | | | |
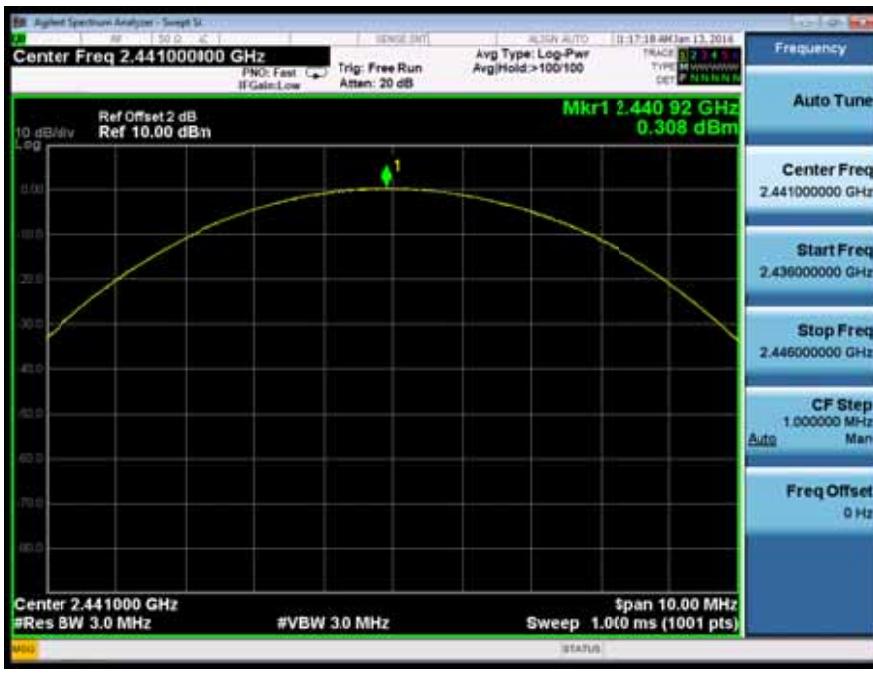
| | | | |
|---|-------------------------------------|--|-------|
| Test Model | Maximum Peak Conducted Output Power | | |
| | Bluetooth V2.1 | | |
| | Channel 0: 2402MHz | | 8DPSK |
|  <p>Center Freq 2.402000000 GHz Ref Offset 2 dB Ref 10.00 dBm Mkr1 2.401 90 GHz -0.007 dBm</p> <p>10 dB/div Log</p> <p>Center 2.402000 GHz #Res BW 3.0 MHz #VBW 3.0 MHz Sweep 1.00 ms (1001 pts)</p> <p>Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.397000000 GHz Stop Freq 2.407000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz</p> | | | |
| Test Model | Maximum Peak Conducted Output Power | | |
| | Bluetooth V2.1 | | |
| | Channel 39: 2441MHz | | 8DPSK |
|  <p>Center Freq 2.441000000 GHz Ref Offset 2 dB Ref 10.00 dBm Mkr1 2.440 92 GHz 0.308 dBm</p> <p>10 dB/div Log</p> <p>Center 2.441000 GHz #Res BW 3.0 MHz #VBW 3.0 MHz Sweep 1.00 ms (1001 pts)</p> <p>Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.436000000 GHz Stop Freq 2.446000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz</p> | | | |

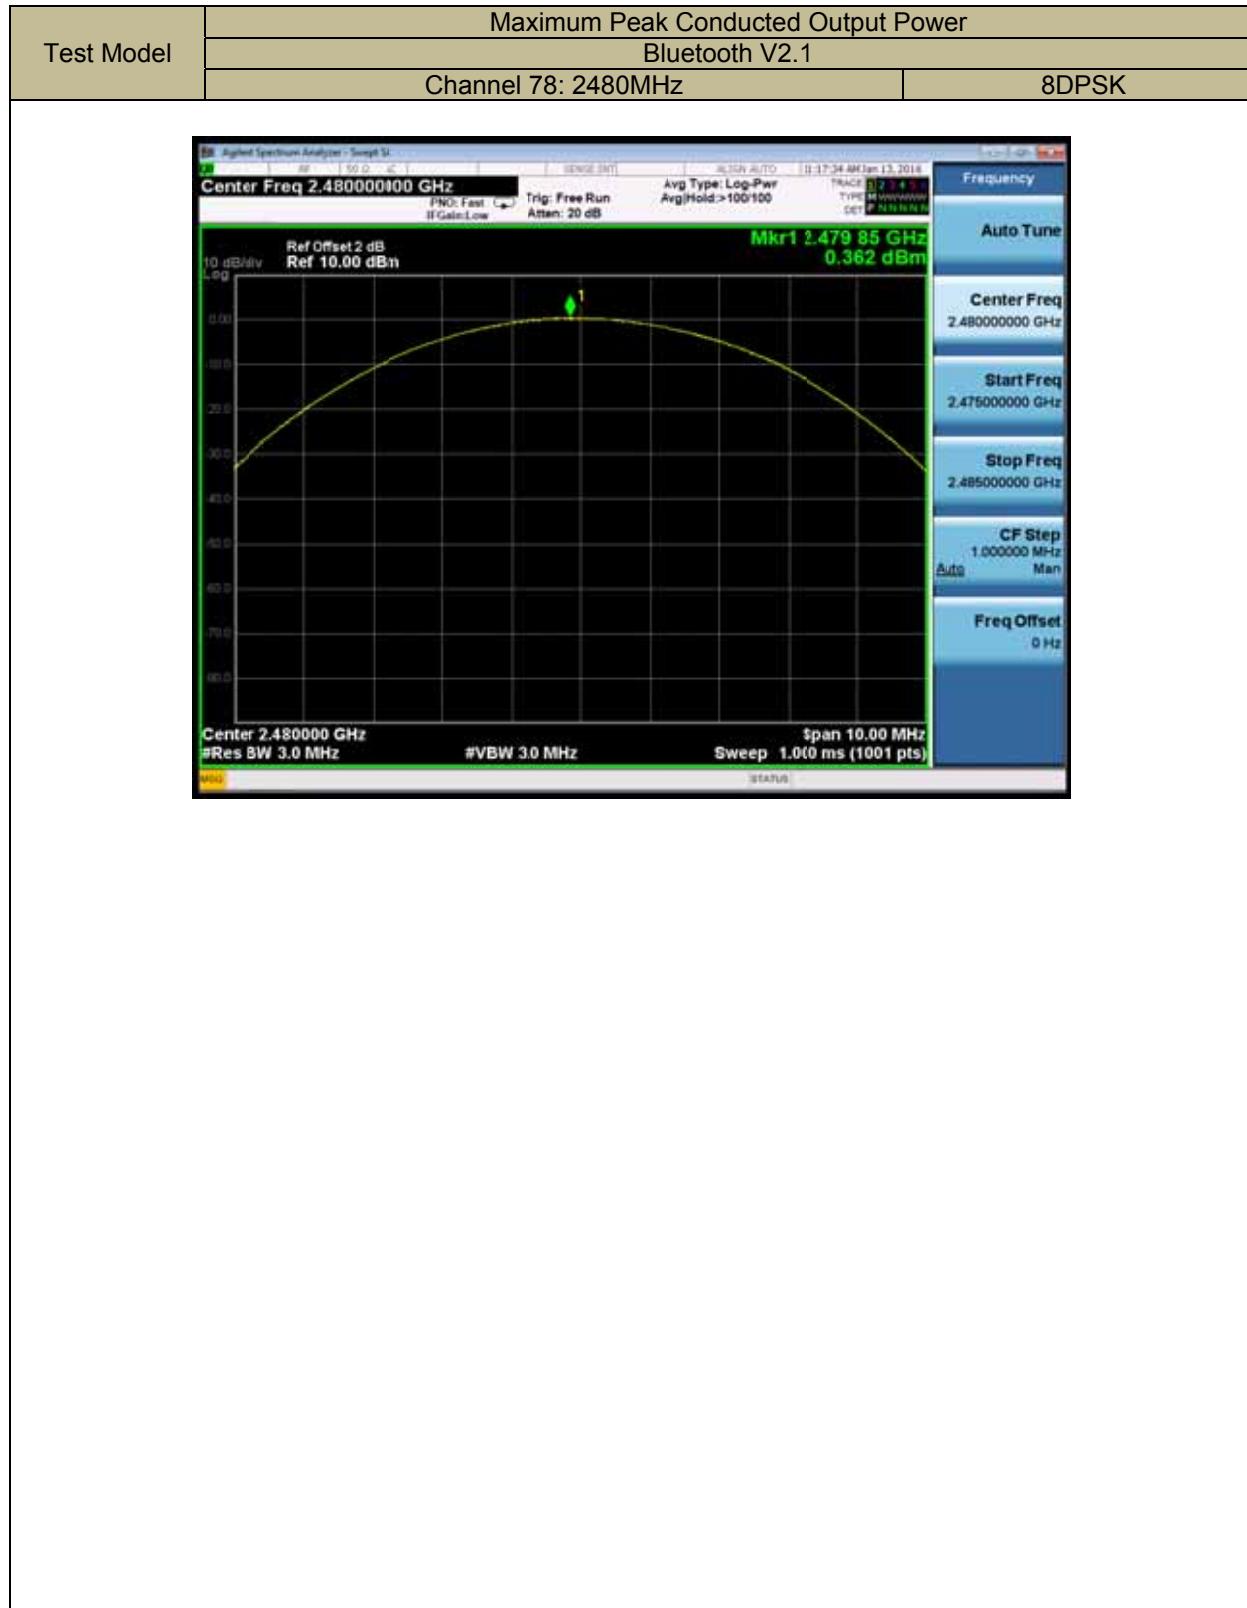

9.6 CONDUCTED SUPRIOUS EMISSION

9.6.1 Applicable Standard

According to FCC Part 15.247(d) and DA 00-705

9.6.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW \geq 3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conducted level.

Note that the channel found to contain the maximum conducted level can be used to establish the reference level.

■ Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW \geq 1% of the span=100kHz Set VBW \geq RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

■ Conducted Spurious RF Conducted Emission

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW \geq RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

9.6.5 Test Results


Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

| | | |
|------------|-----------------------------------|------|
| Test Model | Maximum Conduced Level RBW=100kHz | |
| | Bluetooth V2.1 | |
| | Channel 0: 2402MHz | GFSK |




| | | |
|------------|--|------|
| Test Model | Conducted Spurious RF Conducted Emission | |
| | Bluetooth V2.1 | |
| | Channel 0: 2402MHz | GFSK |

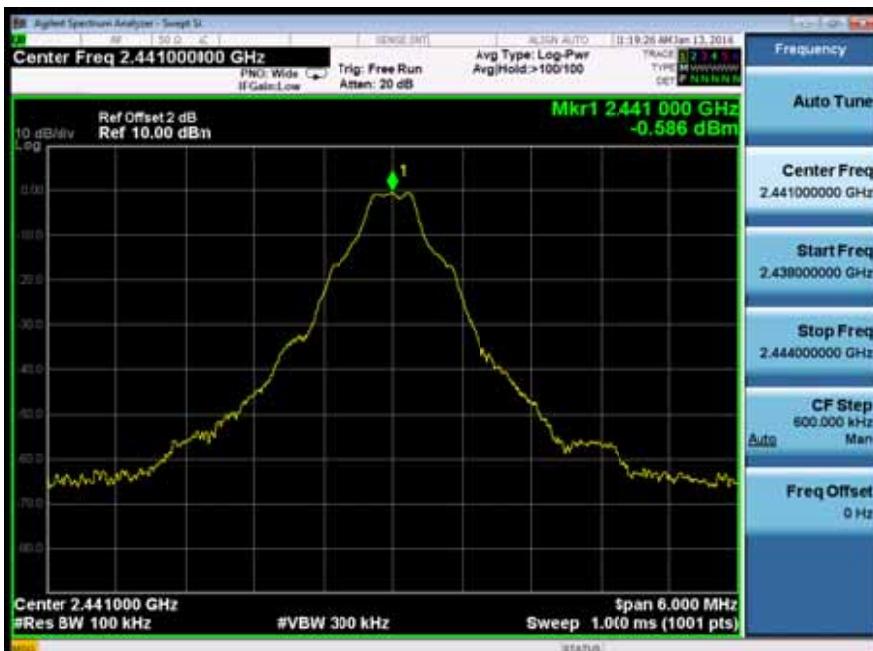


| | | | |
|--|------------------------------------|--|------|
| Test Model | Band-edge Conducted Emissions | | |
| | Bluetooth V2.1 | | |
| | Channel 0: 2402MHz | | GFSK |
|  | | | |
| Test Model | Maximum Conducted Level RBW=100kHz | | |
| | Bluetooth V2.1 | | |
| | Channel 39: 2441MHz | | GFSK |
|  | | | |

| | | | |
|--|--|--|------|
| Test Model | Conducted Spurious RF Conducted Emission | | |
| | Bluetooth V2.1 | | |
| | Channel 39: 2441MHz | | GFSK |
|  | | | |
| Test Model | Maximum Conducted Level RBW=100kHz | | |
| | Bluetooth V2.1 | | |
| | Channel 78: 2480MHz | | GFSK |
|  | | | |

| | | | |
|--|--|--|------|
| Test Model | Conducted Spurious RF Conducted Emission | | |
| | Bluetooth V2.1 | | |
| | Channel 78: 2480MHz | | GFSK |
|  | | | |
| Test Model | Band-edge Conducted Emissions | | |
| | Bluetooth V2.1 | | |
| | Channel 78: 2480MHz | | GFSK |
|  | | | |
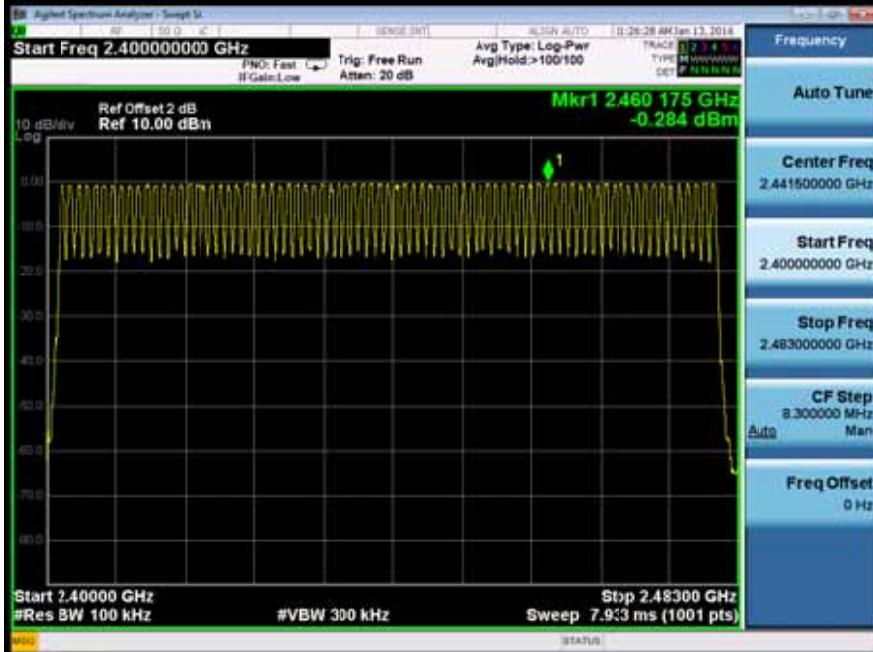
| | | | | | |
|---|------------------------------------|--|------|--|--|
| Test Model | Maximum Conducted Level RBW=100kHz | | | | |
| | Bluetooth V2.1 | | | | |
| | Hopping Mode | | GFSK | | |
|  | | | | | |
| <p>Conducted Spurious RF Conducted Emission</p> <p>Bluetooth V2.1</p> <p>Hopping Mode</p> <p>GFSK</p> | | | | | |
|  | | | | | |

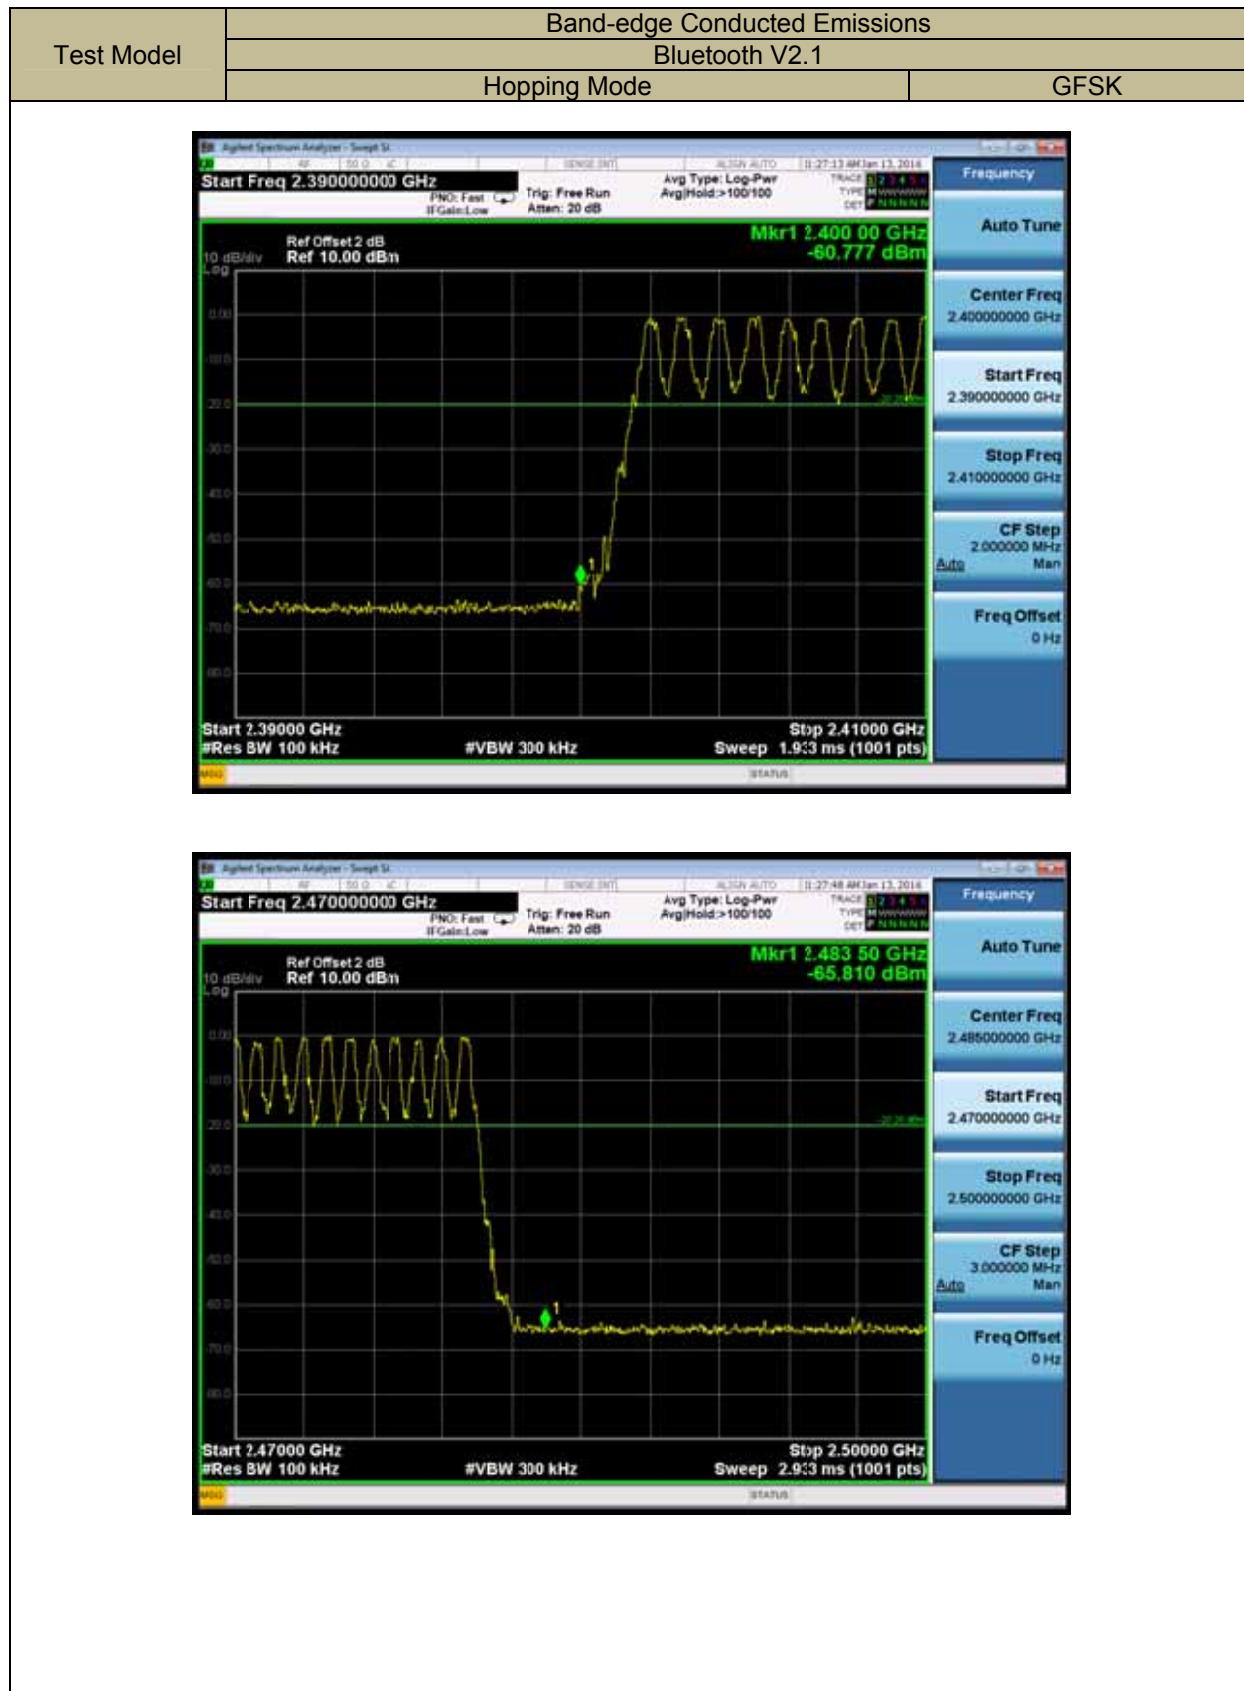

9.7 RADIATED SPURIOUS EMISSION

9.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and DA 00-705

9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 10.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (2) |
| 13.36-13.41 | | | |

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

| Restricted Frequency(MHz) | Field Strength (μ V/m) | Field Strength ($\text{dB}\mu$ V/m) | Measurement Distance |
|---------------------------|-----------------------------|--------------------------------------|----------------------|
| 0.009-0.490 | 2400/F(KHz) | 20 log (μ V/m) | 300 |
| 0.490-1.705 | 2400/F(KHz) | 20 log (μ V/m) | 30 |
| 1.705-30 | 30 | 29.5 | 30 |
| 30-88 | 100 | 40 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz(1GHz to 25GHz), 100 kHz for $f < 1$ GHz(30MHz to 1GHz)

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

9.7.5 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

| | | | |
|--------------|---------|------------|------------------|
| Temperature: | 24 | Test Date: | January 13, 2016 |
| Humidity: | 53 % | Test By: | KK |
| Test mode: | TX Mode | | |

| Freq. (MHz) | Ant.Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Over(dB) | |
|----------------|-----------------|---------------------------|----|------------------|----|----------|----|
| | | PK | AV | PK | AV | PK | AV |
| -- | -- | -- | -- | -- | -- | -- | -- |

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance/ test distance})(\text{ dB})$;

Limit line=Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

| | | | |
|--------------|------|------------|--------------------|
| Temperature: | 24 | Test Date: | January 13, 2016 |
| Humidity: | 53 % | Test By: | KK |
| Test mode: | GFSK | Frequency: | Channel 0: 2402MHz |

| Freq. (MHz) | Ant.Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Over(dB) | |
|----------------|-----------------|---------------------------|------|------------------|-------|----------|-------|
| | | PK | AV | PK | AV | PK | AV |
| 4927 | V | 44.10 | 29.6 | 74.00 | 54.00 | -29.90 | -24.4 |
| 10282 | V | 49.10 | 34.1 | 74.00 | 54.00 | -24.90 | -19.9 |
| 13240 | V | 50.42 | 35.7 | 74.00 | 54.00 | -23.58 | -18.3 |
| 14328 | H | 52.99 | 37.8 | 74.00 | 54.00 | -21.01 | -16.2 |
| 15569 | H | 53.24 | 38.6 | 74.00 | 54.00 | -20.76 | -15.4 |
| 17626 | H | 54.18 | 39.6 | 74.00 | 54.00 | -19.82 | -14.4 |

Temperature: 24 Test Date: January 13, 2016
 Humidity: 53 % Test By: KK
 Test mode: GFSK Frequency: Channel 39: 2441MHz

| Freq. (MHz) | Ant.Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Over(dB) | |
|----------------|-----------------|------------------------|------|------------------|-------|----------|-------|
| | | PK | AV | PK | AV | PK | AV |
| 8446 | V | 48.65 | 33.4 | 74.00 | 54.00 | -25.35 | -20.6 |
| 9687 | V | 50.51 | 35.2 | 74.00 | 54.00 | -23.49 | -18.8 |
| 10860 | V | 51.89 | 36.4 | 74.00 | 54.00 | -22.11 | -17.6 |
| 13478 | H | 52.45 | 37.8 | 74.00 | 54.00 | -21.55 | -16.2 |
| 15399 | H | 53.20 | 38.4 | 74.00 | 54.00 | -20.80 | -15.6 |
| 17694 | H | 55.16 | 40.9 | 74.00 | 54.00 | -18.84 | -13.1 |

Temperature: 24 Test Date: January 13, 2016
 Humidity: 53 % Test By: KK
 Test mode: GFSK Frequency: Channel 78: 2480MHz

| Freq. (MHz) | Ant.Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Over(dB) | |
|----------------|-----------------|---------------------------|------|------------------|-------|----------|-------|
| | | PK | AV | PK | AV | PK | AV |
| 2734 | V | 45.76 | 30.1 | 74.00 | 54.00 | -28.24 | -23.9 |
| 6933 | V | 47.04 | 32.5 | 74.00 | 54.00 | -26.96 | -21.5 |
| 10401 | V | 49.86 | 34.6 | 74.00 | 54.00 | -24.14 | -19.4 |
| 12713 | H | 52.55 | 37.8 | 74.00 | 54.00 | -21.45 | -16.2 |
| 14277 | H | 52.97 | 37.6 | 74.00 | 54.00 | -21.03 | -16.4 |
| 17694 | H | 54.81 | 39.8 | 74.00 | 54.00 | -19.19 | -14.2 |

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

| | |
|-----------------|-------------------------------|
| Temperature: 24 | Test Date: January 13, 2016 |
| Humidity: 53 % | Test By: KK |
| Test mode: GFSK | Frequency: Channel 0: 2402MHz |

| Frequency (MHz) | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | Over(dB) | AV(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | Over(dB) |
|-----------------|--------------|-----------------------|-------------------|----------|-----------------------|-------------------|----------|
| 2484.226 | H | 47.99 | 74 | -26.01 | 33.10 | 54 | -20.90 |
| 2485.249 | V | 47.98 | 74 | -26.02 | 32.80 | 54 | -21.20 |

| | |
|-----------------|--------------------------------|
| Temperature: 24 | Test Date: January 13, 2016 |
| Humidity: 53 % | Test By: KK |
| Test mode: GFSK | Frequency: Channel 78: 2480MHz |

| Frequency (MHz) | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | Over(dB) | AV(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | Over(dB) |
|-----------------|--------------|-----------------------|-------------------|----------|-----------------------|-------------------|----------|
| 2386.48 | H | 47.48 | 74 | -26.52 | 32.90 | 54 | -21.10 |
| 2386.08 | V | 47.42 | 74 | -26.58 | 32.50 | 54 | -21.50 |


| | |
|-----------------|-----------------------------|
| Temperature: 24 | Test Date: January 13, 2016 |
| Humidity: 53 % | Test By: KK |
| Test mode: GFSK | Frequency: Hopping |


| Frequency (MHz) | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | Over(dB) | AV(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | Over(dB) |
|-----------------|--------------|-----------------------|-------------------|----------|-----------------------|-------------------|----------|
| 2383.15 | H | 44.59 | 74 | -29.41 | 29.40 | 54 | -24.6 |
| 2400.00 | H | 40.44 | 74 | -33.56 | 25.30 | 54 | -28.7 |
| 2483.50 | H | 35.84 | 74 | -38.16 | 20.90 | 54 | -33.1 |
| 2371.18 | V | 40.76 | 74 | -33.24 | 25.60 | 54 | -28.4 |
| 2400.00 | V | 46.97 | 74 | -27.03 | 31.70 | 54 | -22.3 |
| 2483.50 | V | 38.72 | 74 | -35.28 | 23.90 | 54 | -30.1 |


Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown “--” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

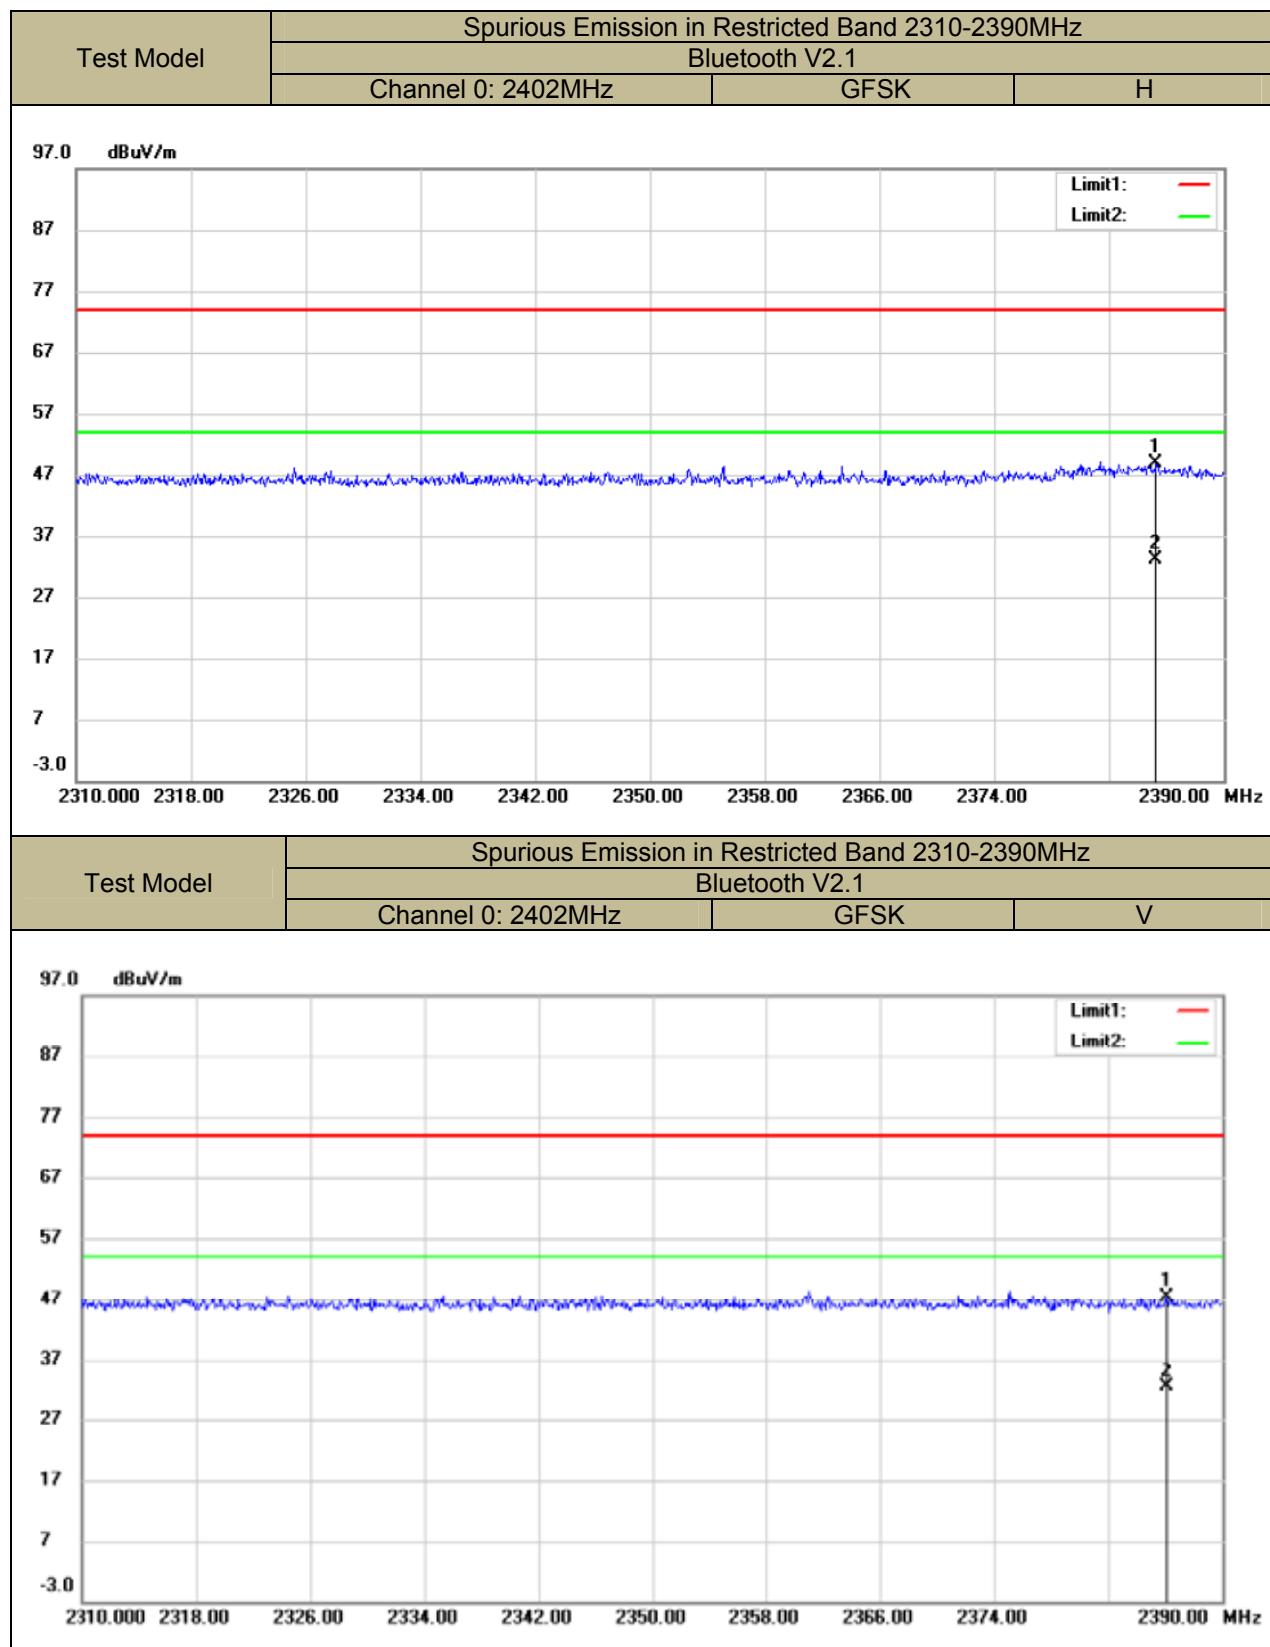


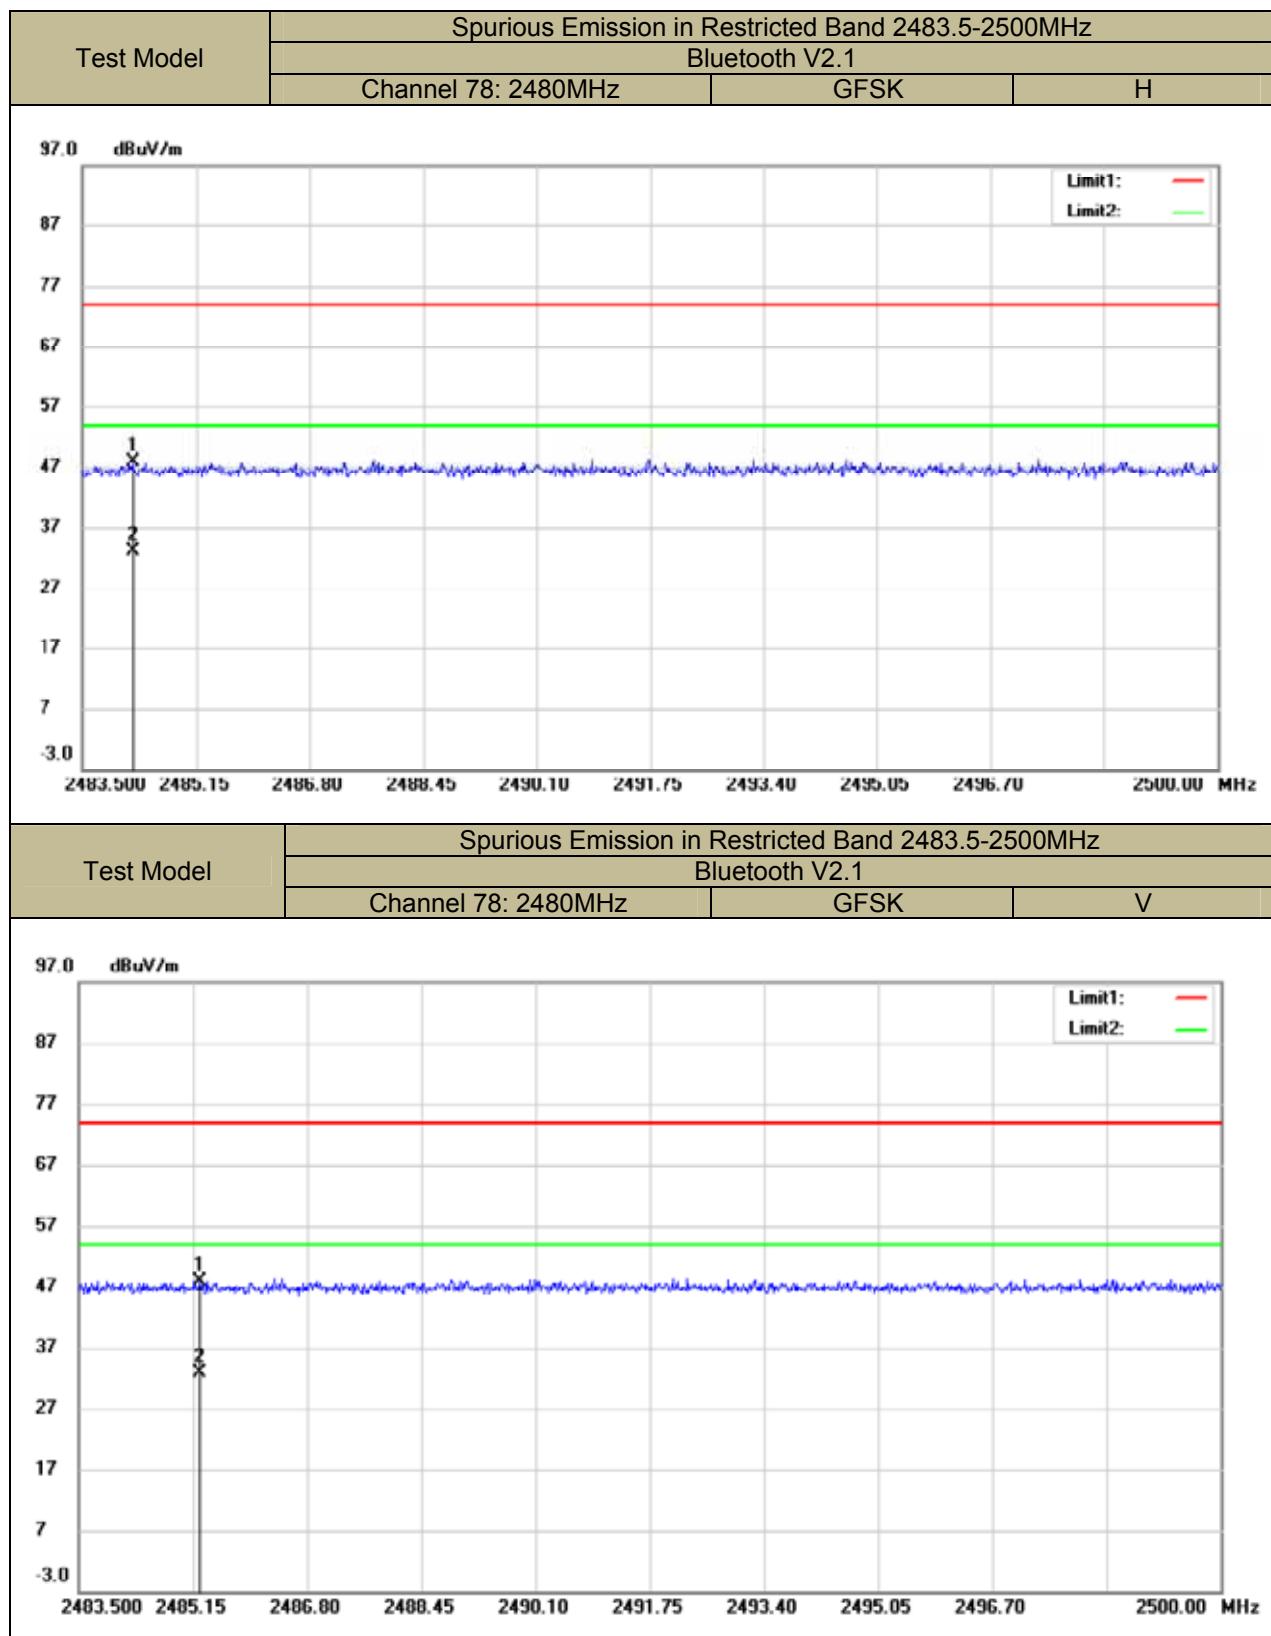

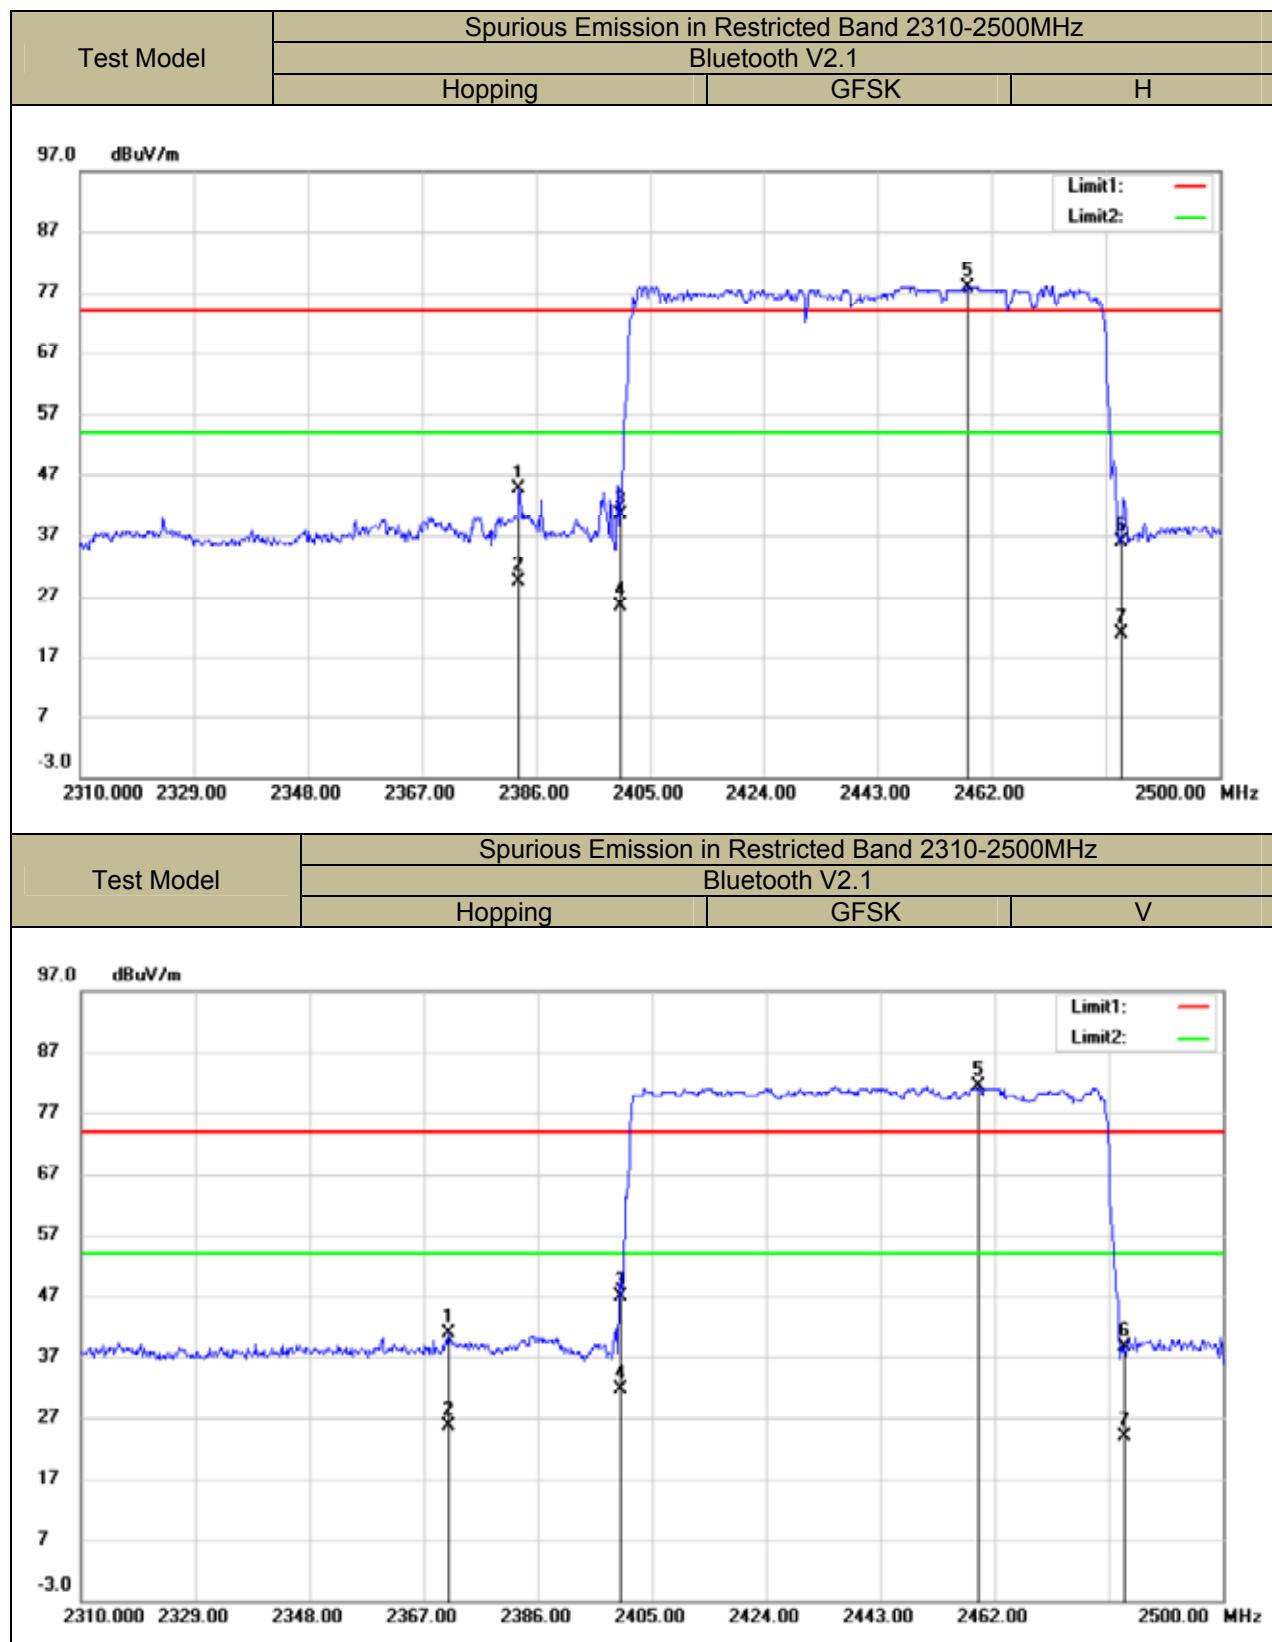

■ Spurious Emission below 1GHz (30MHz to 1GHz)


Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode and the 120V &240V voltage have been tested, and the worst result recorded was report as below:

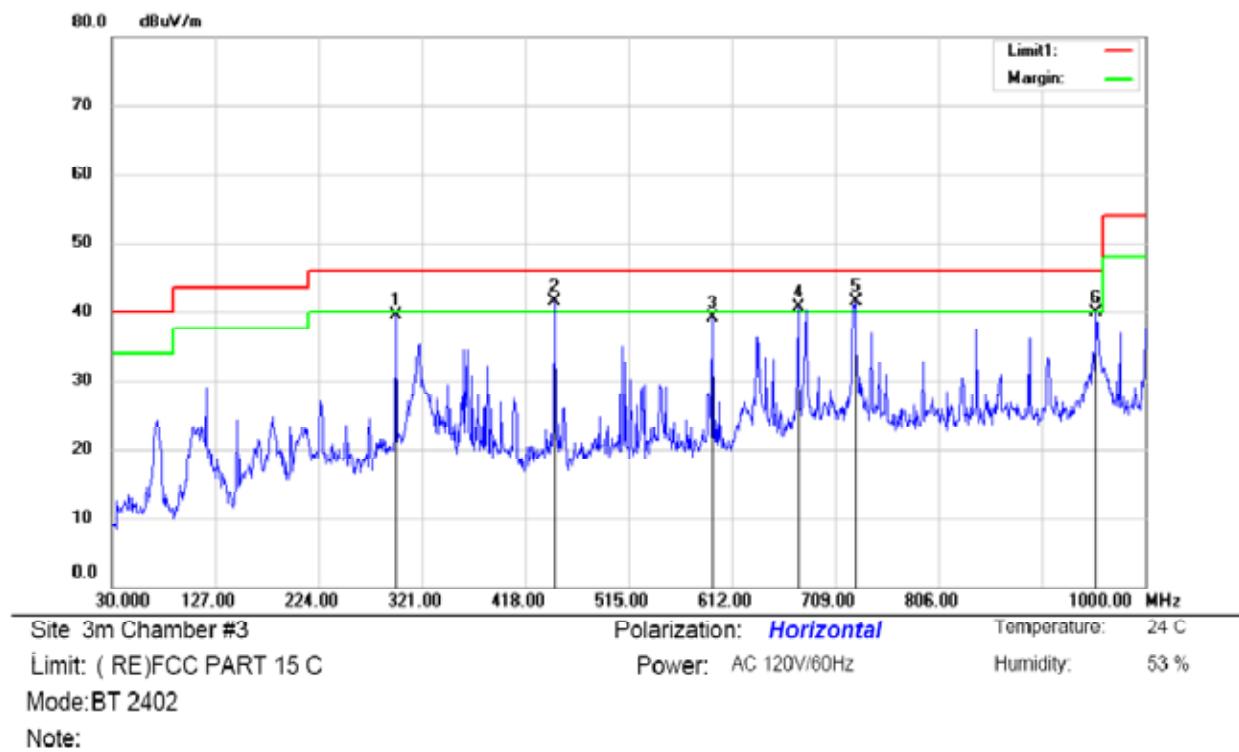

| No. Mk. | Freq. MHz | Reading Level | Correct Factor | Measure- ment | Limit | Over | Antenna Height | Table Degree | Comment |
|---------|--------------|------------------|-------------------|------------------|--------|-------|-------------------|-----------------|---------|
| | | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | cm | |
| 1 | 296.7500 | 51.31 | -11.73 | 39.58 | 46.00 | -6.42 | QP | | |
| 2 | 445.1600 | 50.25 | -8.71 | 41.54 | 46.00 | -4.46 | QP | | |
| 3 | 594.5400 | 45.00 | -5.95 | 39.05 | 46.00 | -6.95 | QP | | |
| 4 | 674.0800 | 45.46 | -4.67 | 40.79 | 46.00 | -5.21 | QP | | |
| 5 | 728.4000 | 45.34 | -3.83 | 41.51 | 46.00 | -4.49 | QP | | |
| 6 | 954.4100 | 40.69 | -0.74 | 39.95 | 46.00 | -6.05 | QP | | |


*:Maximum data x:Over limit !:over margin

Operator: CSL

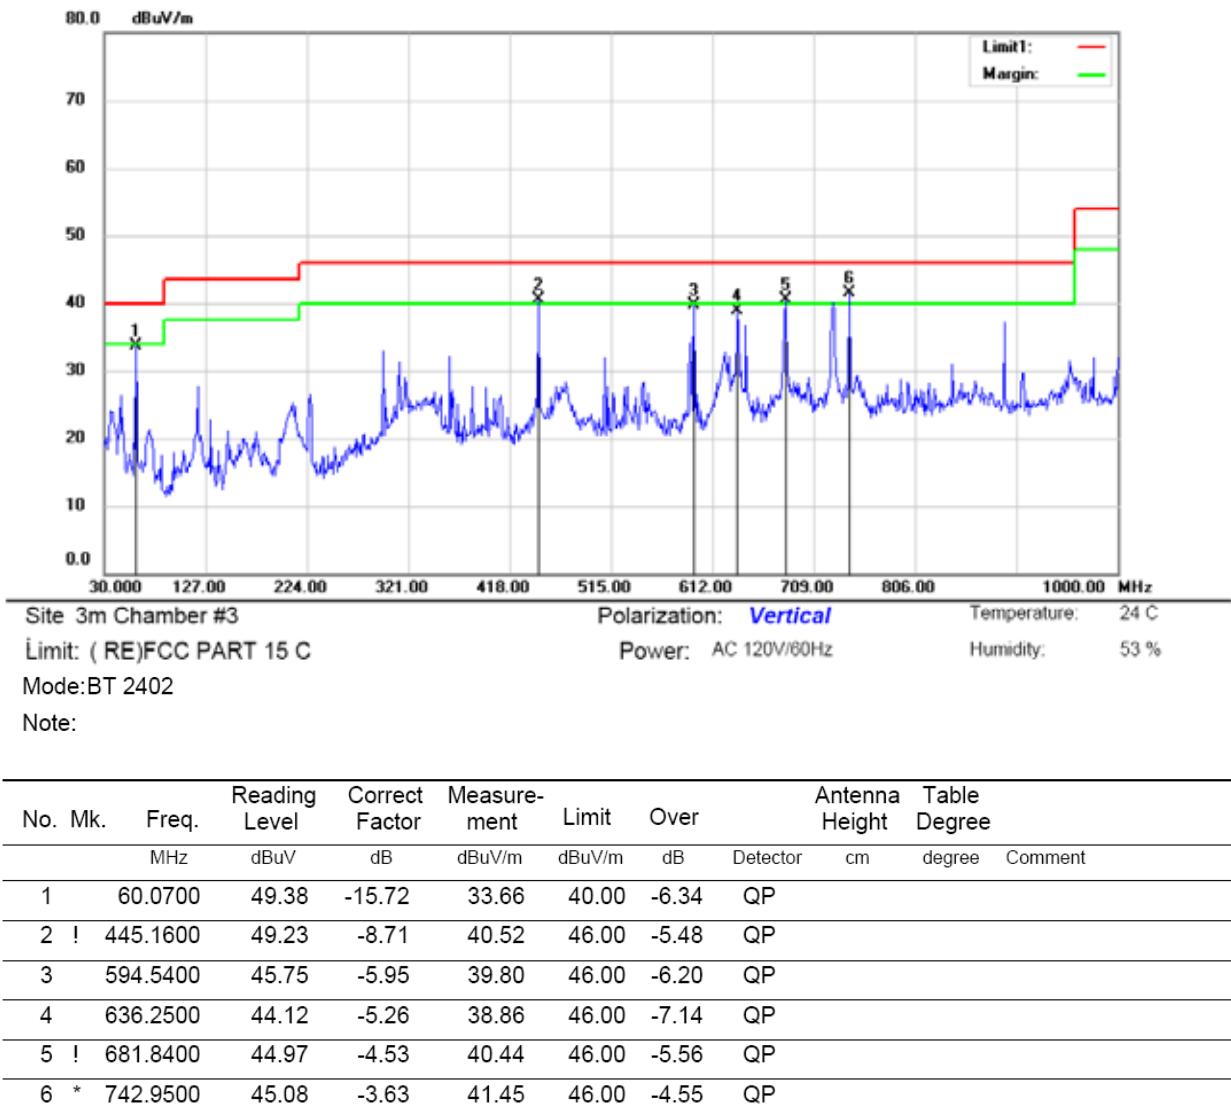


*:Maximum data x:Over limit !:over margin

Operator: CSL

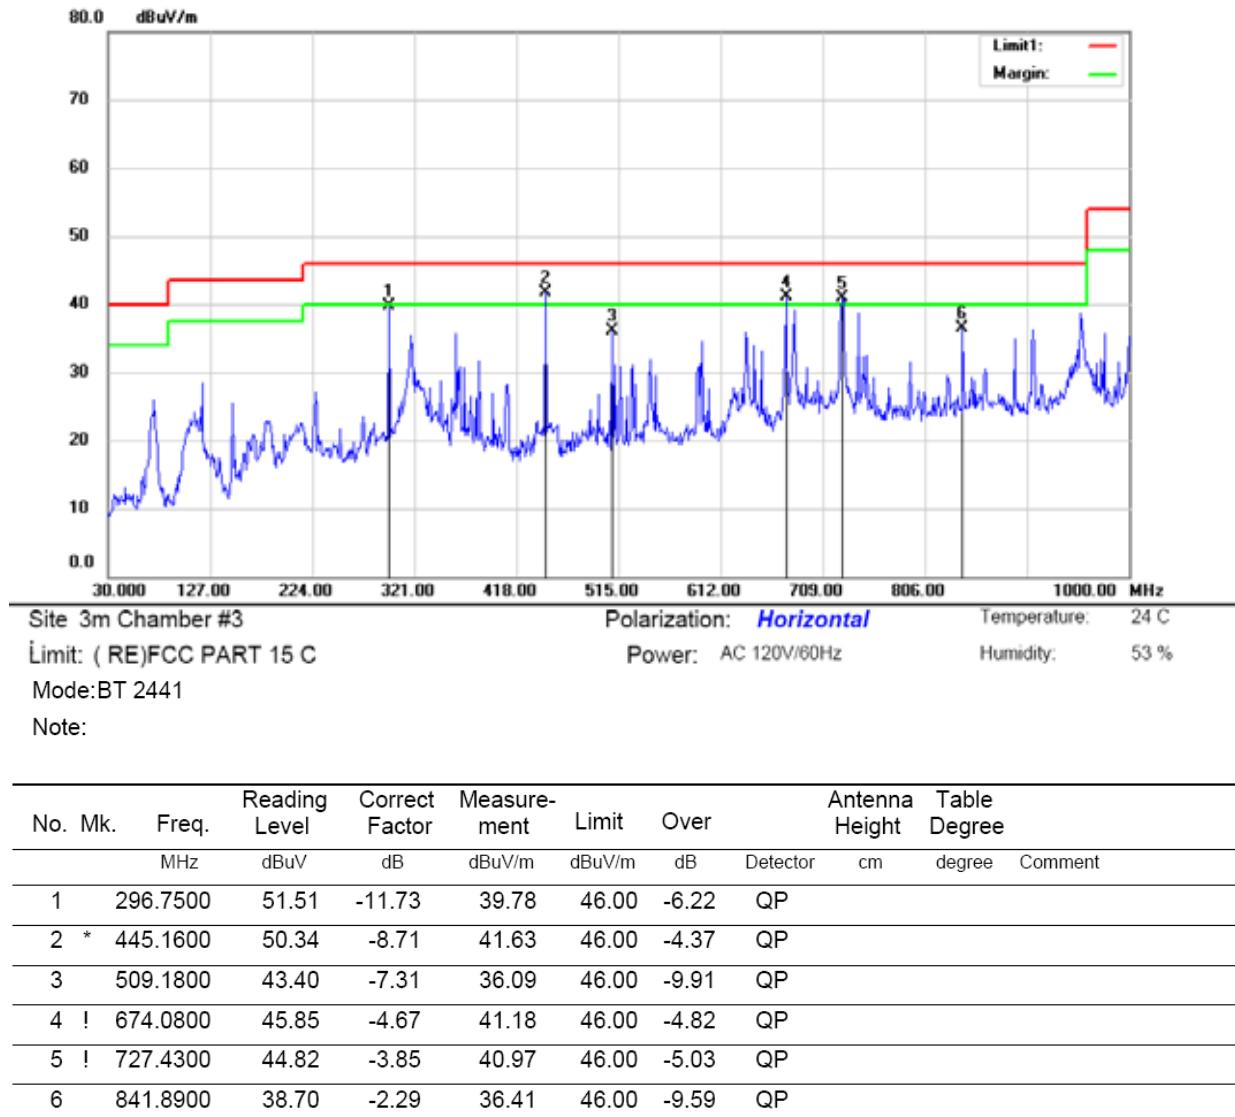


*:Maximum data x:Over limit !:over margin

Operator: CSL

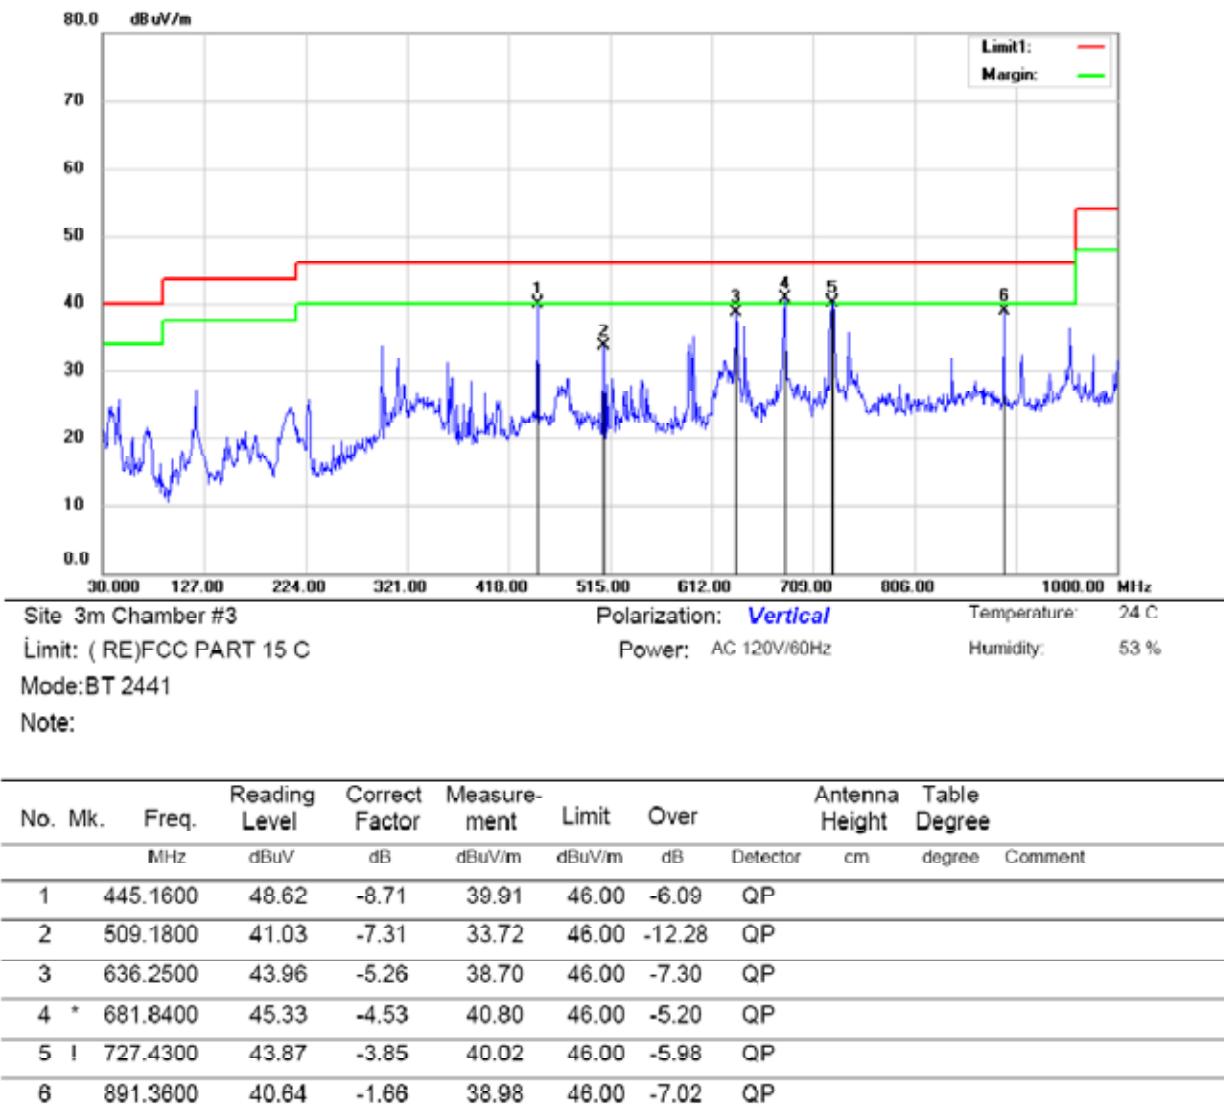


*:Maximum data x:Over limit !:over margin

Operator: CSL

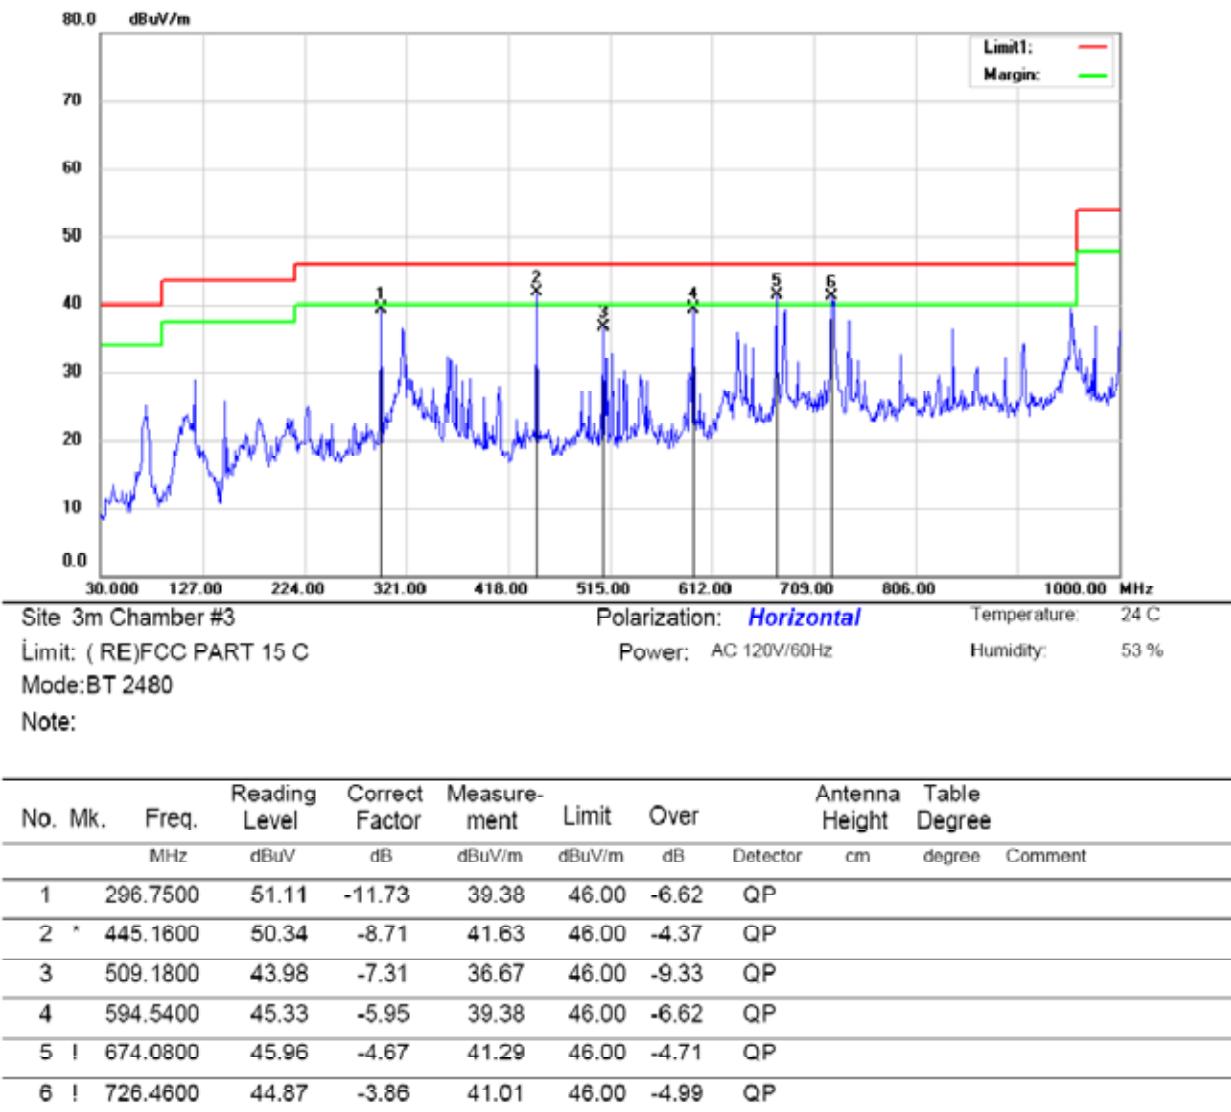

*:Maximum data x:Over limit !:over margin

Operator: CSL

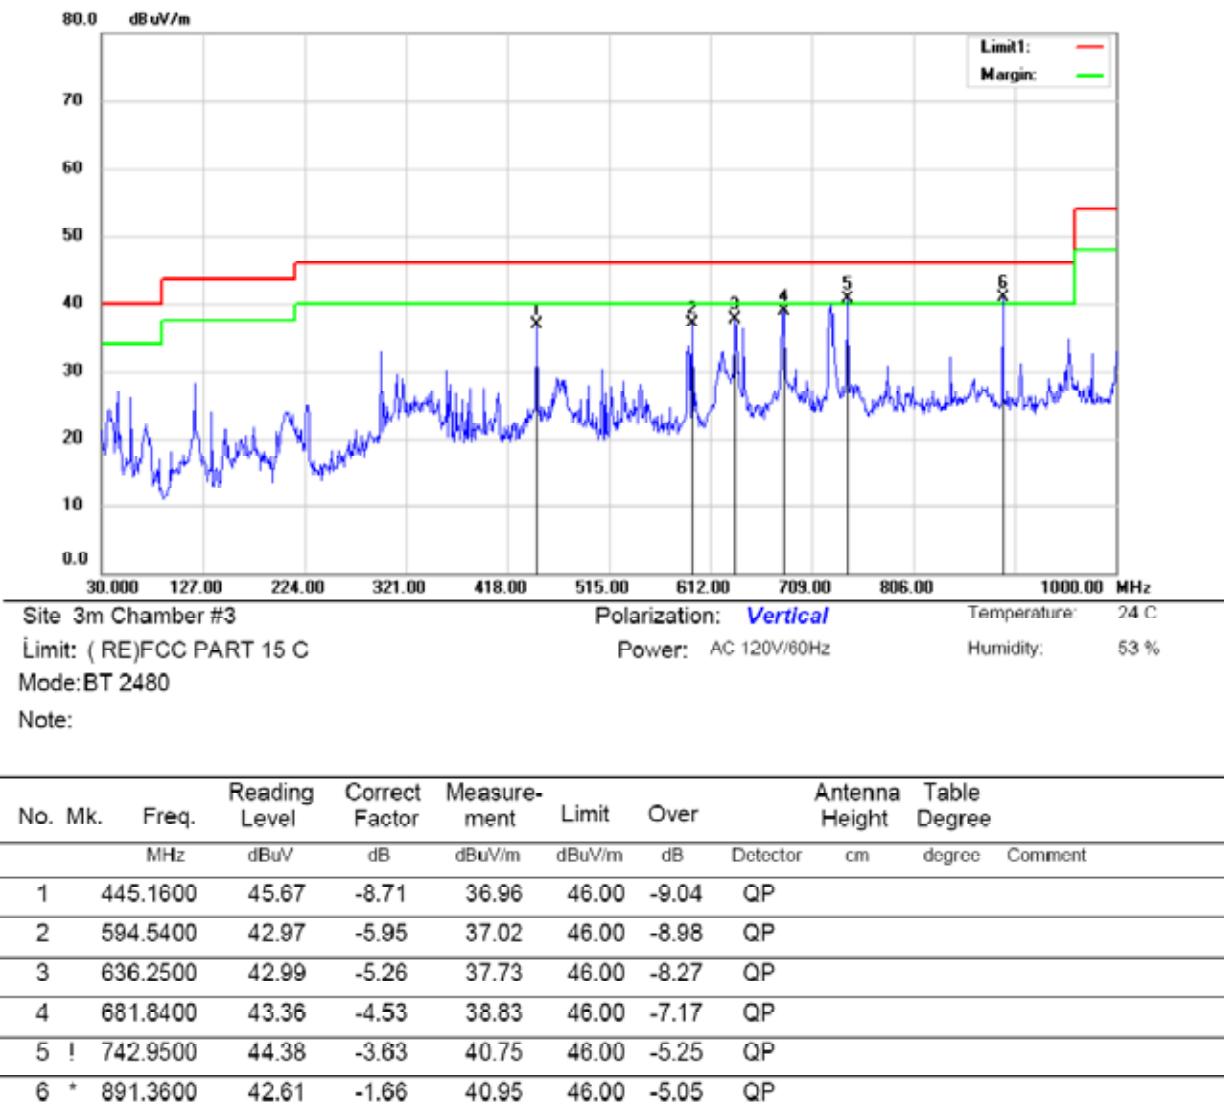

*:Maximum data x:Over limit !:over margin

Operator: CSL

9.8 CONDUCTED EMISSION TEST

9.8.1 Applicable Standard

According to FCC Part 15.207(a)

9.8.2 Conformance Limit

| Conducted Emission Limit | | |
|--------------------------|------------|---------|
| Frequency(MHz) | Quasi-peak | Average |
| 0.15-0.5 | 66-56 | 56-46 |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

9.8.3 Test Configuration


Test according to clause 7.3 conducted emission test setup

9.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

9.8.5 Test Results


The 120V & 240V voltage have been tested, and the worst result recorded was report as below:

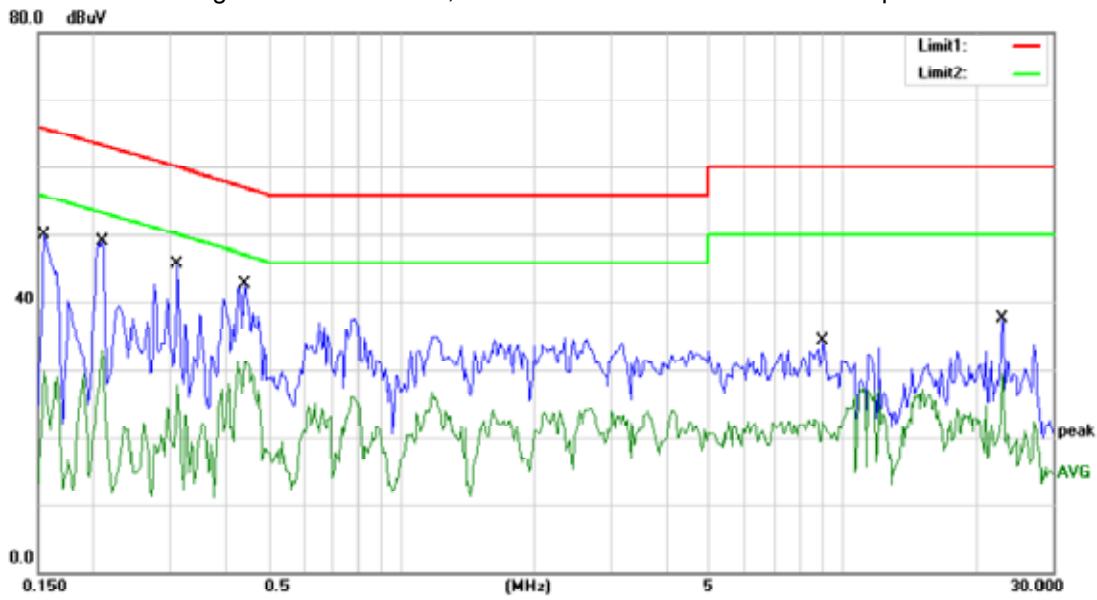

Site Conduction #1 Phase: **L1** Temperature: 26
 Limit: (CE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 60 %
 Mode: WIFI+BT ON
 Note:

| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Over | Detector | Comment |
|-----|-----|---------|---------|---------|----------|-------|--------|----------|---------|
| | | | Level | Factor | ment | | | | |
| | | MHz | dBuV | dB | dBuV | dBuV | dB | | |
| 1 | | 0.1550 | 49.86 | 0.00 | 49.86 | 65.73 | -15.87 | QP | |
| 2 | | 0.1550 | 28.41 | 0.00 | 28.41 | 55.73 | -27.32 | AVG | |
| 3 | | 0.2100 | 48.93 | 0.00 | 48.93 | 63.21 | -14.28 | QP | |
| 4 | | 0.2100 | 30.74 | 0.00 | 30.74 | 53.21 | -22.47 | AVG | |
| 5 | * | 0.3100 | 45.74 | 0.00 | 45.74 | 59.97 | -14.23 | QP | |
| 6 | | 0.3100 | 27.70 | 0.00 | 27.70 | 49.97 | -22.27 | AVG | |
| 7 | | 0.4400 | 42.66 | 0.00 | 42.66 | 57.06 | -14.40 | QP | |
| 8 | | 0.4400 | 31.00 | 0.00 | 31.00 | 47.06 | -16.06 | AVG | |
| 9 | | 9.0113 | 34.28 | 0.00 | 34.28 | 60.00 | -25.72 | QP | |
| 10 | | 9.0113 | 21.88 | 0.00 | 21.88 | 50.00 | -28.12 | AVG | |
| 11 | | 23.1250 | 37.46 | 0.00 | 37.46 | 60.00 | -22.54 | QP | |
| 12 | | 23.1250 | 28.61 | 0.00 | 28.61 | 50.00 | -21.39 | AVG | |

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: KK

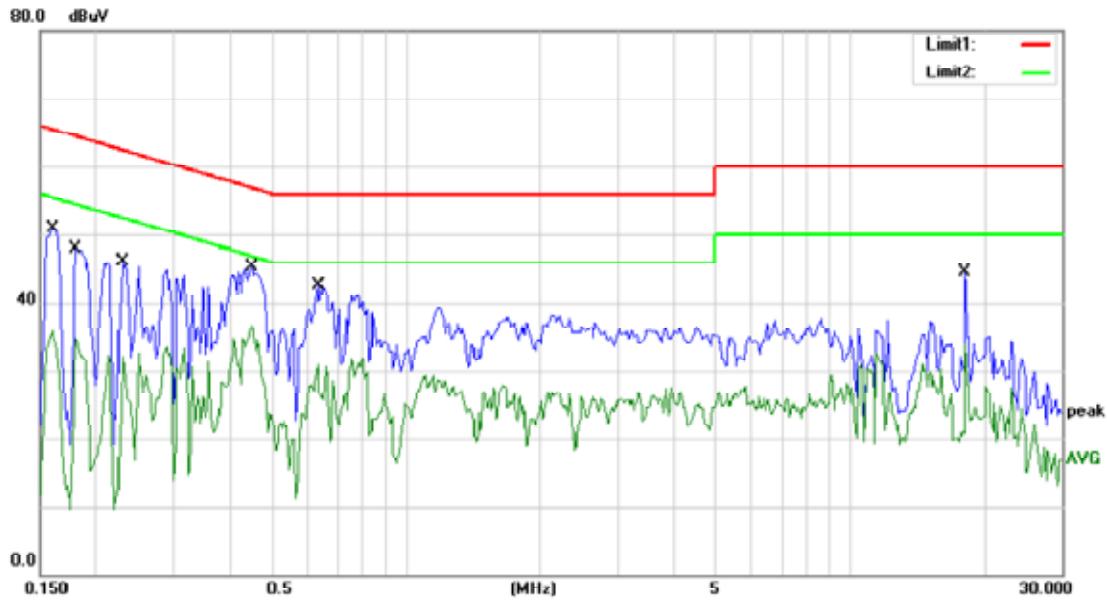

Site Conduction #1

Limit: (CE)FCC PART 15 C

Mode: WIFI+BT ON

Note:

Phase: **N**

Power: AC 120V/60Hz

Temperature: 20

Humidity: 60 %

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | | 0.1600 | 50.84 | 0.00 | 50.84 | 65.46 | -14.62 | QP | |
| 2 | | 0.1600 | 35.24 | 0.00 | 35.24 | 55.46 | -20.22 | AVG | |
| 3 | | 0.1800 | 47.94 | 0.00 | 47.94 | 64.49 | -16.55 | QP | |
| 4 | | 0.1800 | 33.58 | 0.00 | 33.58 | 54.49 | -20.91 | AVG | |
| 5 | | 0.2303 | 46.20 | 0.00 | 46.20 | 62.44 | -16.24 | QP | |
| 6 | | 0.2303 | 32.15 | 0.00 | 32.15 | 52.44 | -20.29 | AVG | |
| 7 | * | 0.4500 | 45.25 | 0.00 | 45.25 | 56.88 | -11.63 | QP | |
| 8 | | 0.4500 | 34.59 | 0.00 | 34.59 | 46.88 | -12.29 | AVG | |
| 9 | | 0.6350 | 42.49 | 0.00 | 42.49 | 56.00 | -13.51 | QP | |
| 10 | | 0.6350 | 29.77 | 0.00 | 29.77 | 46.00 | -16.23 | AVG | |
| 11 | | 18.1750 | 44.41 | 0.00 | 44.41 | 60.00 | -15.59 | QP | |
| 12 | | 18.1750 | 33.95 | 0.00 | 33.95 | 50.00 | -16.05 | AVG | |

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: KK

9.9 ANTENNA APPLICATION

9.9.1 Antenna Requirement

| Standard | Requirement |
|---------------------|--|
| FCC CRF Part 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.9.2 Result

The EUT has 1 antenna: a FPC Antenna for BT3.0 with classic model, the gain is 2.17 dBi;
The EUT has 1 antenna: a FPC Antenna for BT4.0 with BLE model, the gain is 2.17 dBi;

The EUT has 1 antenna: a FPC Antenna for wifi 2.4G, the gain is 2.17 dBi;

The EUT has 1 antenna: a FPC Antenna for wifi 5.8G, the gain is 4.86 dBi;

Note:

- Antenna use a permanently attached antenna which is not replaceable.
- Not using a standard antenna jack or electrical connector for antenna replacement
- The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.