FCC Test Report

Report No.: AGC00127160301FE03

FCC ID 2AG94F-6688

APPLICATION PURPOSE Original Equipment

PRODUCT DESIGNATION Bluetooth Module

BRAND NAME : XINZHONGXIN

MODEL NAME : F-6688,F-6288

CLIENT SHENZHEN SHI XINZHONGXIN TECHNOLOGY CO.,LTD.

DATE OF ISSUE Apr.05,2016

STANDARD(S)

FCC Part 15 Rules **TEST PROCEDURE(S)**

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 2 of 44

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.05,2016	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. SYSTEM TEST CONFIGURATION	7
5.1. CONFIGURATION OF EUT SYSTEM	7
5.2. EQUIPMENT USED IN EUT SYSTEM	7
5.3. SUMMARY OF TEST RESULTS	7
6. TEST FACILITY	8
7 TEST METHODOLOGY	8
8. ALL TEST EQUIPMENT LIST	8
9. RADIATED EMISSION	10
9.1TEST LIMIT	10
9.2. MEASUREMENT PROCEDURE	11
9.3. TEST SETUP	13
9.4. TEST RESULT	15
10. BAND EDGE EMISSION	28
10.1. MEASUREMENT PROCEDURE	28
10.2 TEST SETUP	28
10.3 RADIATED TEST RESULT	29
11. 20DB BANDWIDTH	33
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SET-UP	33
11.3. LIMITS AND MEASUREMENT RESULTS	33
12. FCC LINE CONDUCTED EMISSION TEST	40
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	40
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	41
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	42
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF EUT	44

Page 4 of 44

1. VERIFICATION OF CONFORMITY

SHENZHEN SHI XINZHONGXIN TECHNOLOGY CO.,LTD.		
Block A3, Dong Huan Industrial Zone, Nanpu Road, Shajin Street, Baoan District, Shenzhen, China		
SHENZHEN SHI XINZHONGXIN TECHNOLOGY CO.,LTD.		
Block A3, Dong Huan Industrial Zone, Nanpu Road, Shajin Street, Baoan District, Shenzhen, China		
Bluetooth Module		
XINZHONGXIN		
F-6688		
F-6288		
All the same except for the model name		
Mar.27,2016 to Mar.28,2016		
None		
Normal		
AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By	hime though	
	Time Huang(Huang Nanhui)	Apr.05,2016
Reviewed By	Forest ce	
	Forrest Lei(Lei Yonggang)	Apr.05,2016
Approved By	gelja zborg	
	Solger Zhang(Zhang Hongyi) Authorized Officer	Apr.05,2016

Page 5 of 44

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz		
RF Output Power	1.8dBm(Max)		
Bluetooth Version	V2.1+EDR		
Modulation	GFSK, π /4-DQPSK, 8DPSK		
Number of channels	79		
Hardware Version	V1.0		
Software Version	V1.0		
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)		
Antenna Gain	0dBi		
Power Supply	DC3.3V		

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
2400~2483.5MHZ	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

Report No.: AGC05695160302FE03 Page 6 of 44

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 % \circ

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π /4-DQPSK
5	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link
Note: All the test mas	los have been avaluated, only the result of the worst age, was recorded in the

Note: All the test modes have been evaluated, only the result of the worst case was recorded in the report, if no other cases.

Page 7 of 44

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	quipment Model No. ID or Specification		Remark
1	Bluetooth speaker	N/A	H3W	EUT
2	Control box	N/A	N/A	A.E
3	PC	SONY	E1412AYCW	A.E
4	Temporary Antenna Connector	T10	N/A	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.215	BANDWITH	Compliant

Note: N/A means not applicable.

Page 8 of 44

6. TEST FACILITY

Site Dongguan Precise Testing Service Co., Ltd.	
Location Building D,Baoding Technology Park,Guangming Road2,Dongcheng District Dongguan, Guangdong, China,	
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013.

7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013,

8. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016	
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016	
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016	
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016	
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A	
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016	
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016	
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016	
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016	

Page 9 of 44

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site										
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration					
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016					
Horn Antenna (1G-18GHz)	Horn Antenna SCHWARZBECK		9120D-1246	July 11, 2015	July 10, 2016					
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016					
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016					
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016					
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016					
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A					
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016					
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016					
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016					

Page 10 of 44

9. RADIATED EMISSION

9.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics		
	(millivolts/meter)	(microvolts/meter)		
900-928MHz	50	500		
2400-2483.5MHz	50	500		
5725-5875MHz	50	500		
24.0-24.25GHz	250	2500		

Standard FCC 15.209

Frequency	Distance	Field Strengths Limit					
(MHz)	Meters	μ V/m	dB(μV)/m				
0.009 ~ 0.490	300	2400/F(kHz)					
0.490 ~ 1.705	30	24000/F(kHz)					
1.705 ~ 30	30	30					
30 ~ 88	3	100	40.0				
88 ~ 216	3	150	43.5				
216 ~ 960	3	200	46.0				
960 ~ 1000	3	500	54.0				
Above 1000	3	Other:74.0 dB(µV)/m (Peal	k) 54.0 dB(μV)/m (Average)				

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Report No.: AGC05695160302FE03 Page 11 of 44

9.2. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC05695160302FE03 Page 12 of 44

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				
Start ~Stop Frequency	1GHz~26.5GHz				
Clark Ctop i requestoy	1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average				

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Page 13 of 44

9.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

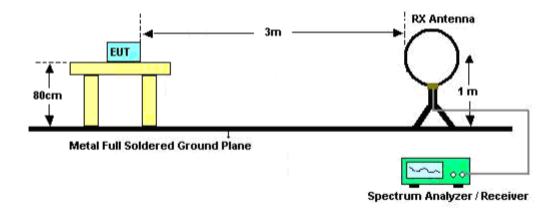


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

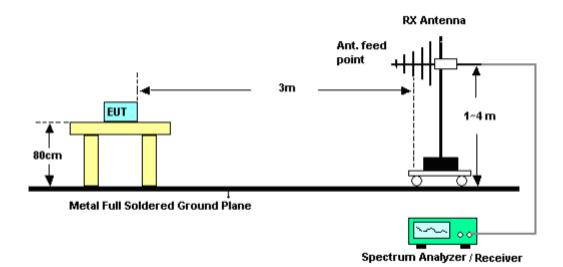

Page 14 of 44

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

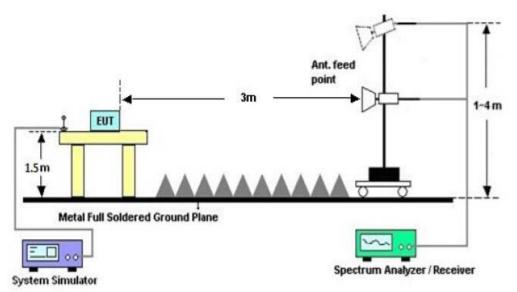

Page 15 of 44

9.4. TEST RESULT

(Worst modulation: GFSK)


RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

Radiated Emission Measurement

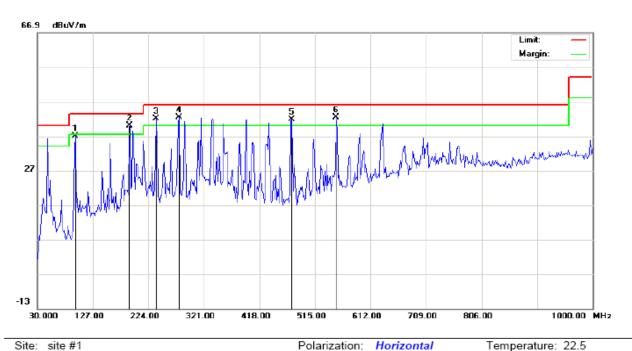

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Module

M/N: F-6688

Mode: Low Channel TX


Power:	Humidity:	55.4 %
Distance:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		96.2831	30.16	6.77	36.93	43.50	-6.57	peak			
2	*	191.6665	28.46	11.61	40.07	43.50	-3.43	peak			
3	ļ	236.9333	33.80	8.23	42.03	46.00	-3.97	peak			
4	ļ	277.3500	30.79	11.55	42.34	46.00	-3.66	peak			
5	İ	474.5833	20.97	20.86	41.83	46.00	-4.17	peak	·	·	
6	į	552.1833	19.91	22.53	42.44	46.00	-3.56	peak			

Page 16 of 44

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

Radiated Emission Measurement

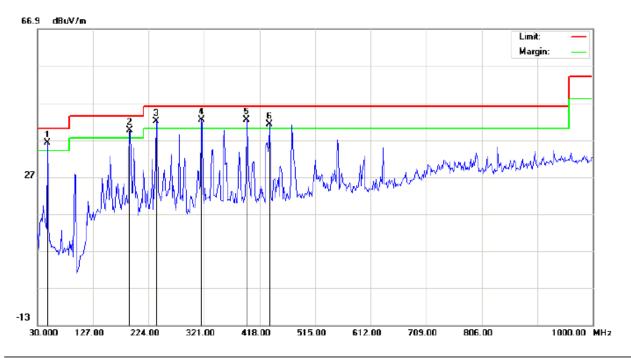

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Module

M/N: F-6688

Mode: Low Channel TX

Note:

Polarization: Vertical
Power:

Distance:

Temperature: 22.5

Humidity: 55.4 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	ļ	47.7832	27.72	8.39	36.11	40.00	-3.89	peak			
2	İ	191.6665	28.59	11.11	39.70	43.50	-3.80	peak			
3	į	236.9333	29.35	12.62	41.97	46.00	-4.03	peak			
4	ļ	316.1499	25.95	16.49	42.44	46.00	-3.56	peak			
5	*	395.3666	23.45	19.04	42.49	46.00	-3.51	peak			
6	į	435.7832	21.01	20.16	41.17	46.00	-4.83	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 17 of 44

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL Radiated Emission Measurement

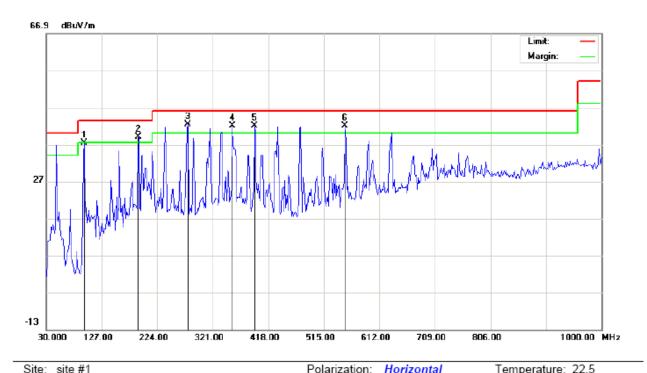

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth Module

M/N: F-6688

Mode: Middle Channel TX

Note:

FUIAITZALIUIT.	Horizontai	remperati	II e. 22.5
Power:		Humidity:	55.4 %
Distance:			


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		96.2831	30.66	6.77	37.43	43.50	-6.07	peak			
2	İ	191.6665	27.46	11.61	39.07	43.50	-4.43	peak			
3	*	277.3500	30.79	11.55	42.34	46.00	-3.66	peak			
4	į	354.9499	23.31	18.77	42.08	46.00	-3.92	peak			
5	İ	393.7500	23.02	19.03	42.05	46.00	-3.95	peak			
6	İ	552.1833	19.41	22.53	41.94	46.00	-4.06	peak			

Humidity: 55.4 %

Page 18 of 44

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

Radiated Emission Measurement

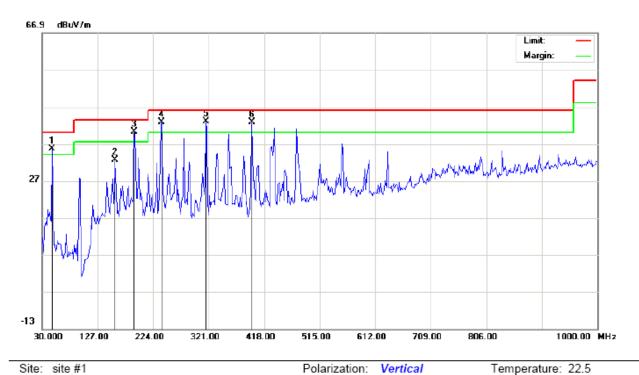

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Module

M/N: F-6688

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	İ	47.7832	27.22	8.39	35.61	40.00	-4.39	peak			
2		157.7167	17.27	15.32	32.59	43.50	-10.91	peak			
3	į	191.6665	29.09	11.11	40.20	43.50	-3.30	peak			
4	İ	238.5500	29.99	12.78	42.77	46.00	-3.23	peak			
5	*	316.1499	26.45	16.49	42.94	46.00	-3.06	peak	·		
6	į	396.9832	23.69	19.05	42.74	46.00	-3.26	peak			

Power:

Distance:

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 19 of 44

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

Radiated Emission Measurement

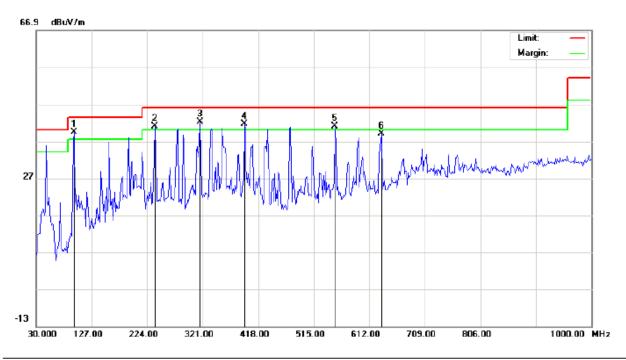

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Module

M/N: F-6688

Mode: High Channel TX

Note:

Polarization:	Horizontal	Temperatu	re: 22.5
Power:		Humidity:	55.4 %


Distance:

No.		Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	İ	96.2831	32.66	6.77	39.43	43.50	-4.07	peak			
2	į	236.9333	32.80	8.23	41.03	46.00	-4.97	peak			
3	*	316.1499	25.73	16.49	42.22	46.00	-3.78	peak			
4	į	393.7500	22.52	19.03	41.55	46.00	-4.45	peak			
5	į	552.1833	18.41	22.53	40.94	46.00	-5.06	peak			
6		633.0167	15.23	23.81	39.04	46.00	-6.96	peak			

Page 20 of 44

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

Radiated Emission Measurement

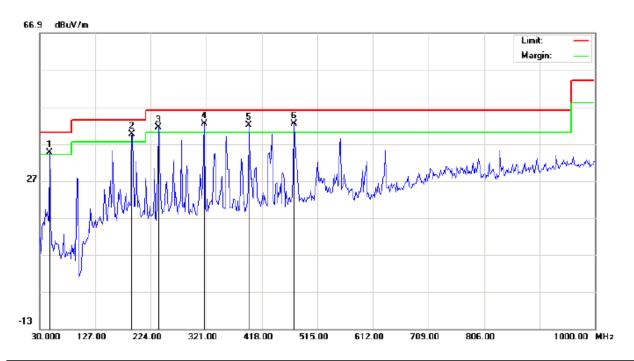

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Bluetooth Module

M/N: F-6688

Mode: High Channel TX

Note:

Polarization:	verticai	remperatu	ire: 22.5
Power:		Humidity:	55.4 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	İ	47.7832	26.22	8.39	34.61	40.00	-5.39	peak			
2	ļ	191.6665	28.59	11.11	39.70	43.50	-3.80	peak			
3	ļ	236.9333	28.85	12.62	41.47	46.00	-4.53	peak			
4	İ	317.7667	25.77	16.59	42.36	46.00	-3.64	peak			
5	į	395.3666	22.95	19.04	41.99	46.00	-4.01	peak			
6	*	474.5833	21.60	20.86	42.46	46.00	-3.54	peak		·	

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 21 of 44

RADIATED EMISSION ABOVE 1GHZ

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL Radiated Emission Measurement

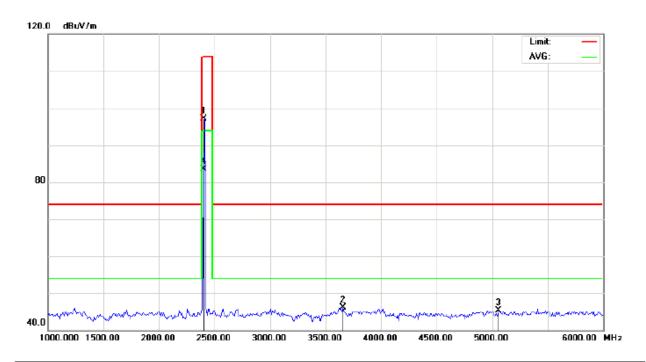

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Module Distance: 3m

M/N: F-6688

Mode: Low Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	106.71	-9.68	97.03	114.00	-16.97	peak			
2		3658.333	53.00	-6.91	46.09	74.00	-27.91	peak			
3		5058.333	47.09	-1.80	45.29	74.00	-28.71	peak			
4	*	2402.000	93.16	-9.68	83.48	94.00	-10.52	AVG	100	192	

Page 22 of 44

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

Radiated Emission Measurement

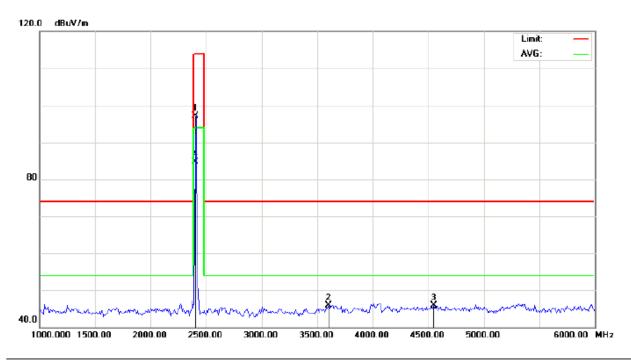

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Module Distance: 3m

M/N: F-6688

Mode: Low Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2402.000	106.74	-9.68	97.06	114.00	-16.94	peak			
2		3600.000	53.21	-7.27	45.94	74.00	-28.06	peak			
3		4550.000	48.94	-2.98	45.96	74.00	-28.04	peak			
4	*	2402.000	94.36	-9.68	84.68	94.00	-9.32	AVG	100	109	

Page 23 of 44

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

Radiated Emission Measurement

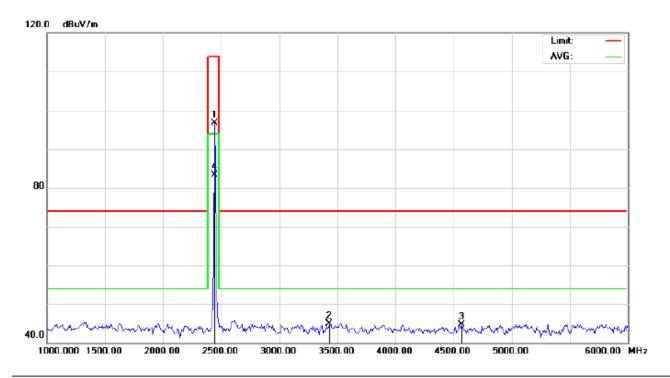

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Module Distance: 3m

M/N: F-6688


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	106.28	-9.63	96.65	114.00	-17.35	peak			
2		3433.333	52.91	-7.95	44.96	74.00	-29.04	peak			
3		4566.667	47.54	-2.94	44.60	74.00	-29.40	peak			
4	*	2441.000	92.92	-9.63	83.29	94.00	-10.71	AVG	100	195	

Page 24 of 44

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL Radiated Emission Measurement

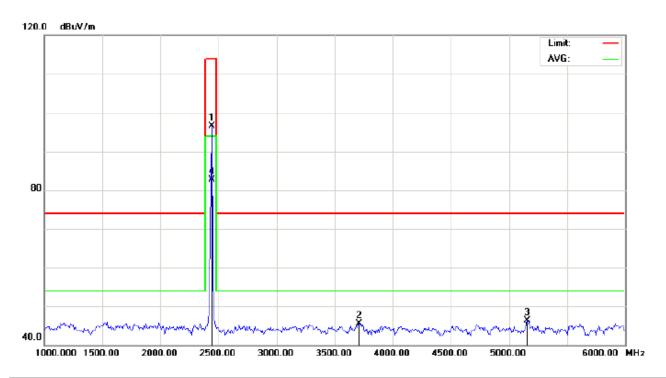

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Module Distance: 3m

M/N: F-6688


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	106.20	-9.63	96.57	114.00	-17.43	peak			
2		3708.333	52.17	-6.61	45.56	74.00	-28.44	peak			
3		5158.333	48.04	-1.80	46.24	74.00	-27.76	peak			
4	*	2441.000	92.29	-9.63	82.66	94.00	-11.34	AVG	100	111	

Page 25 of 44

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL Radiated Emission Measurement

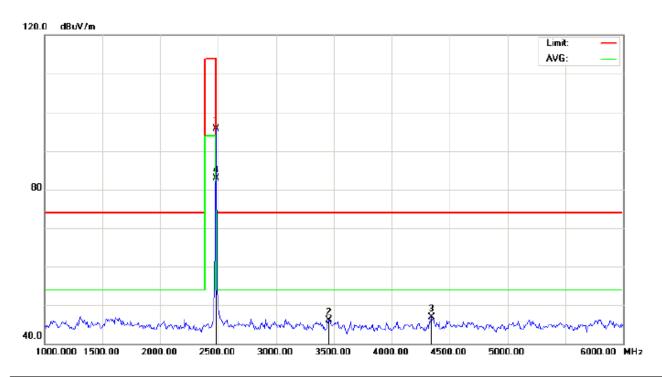

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Module Distance: 3m

M/N: F-6688


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2480.000	105.36	-9.59	95.77	114.00	-18.23	peak			
2		3458.333	54.02	-7.93	46.09	74.00	-27.91	peak			
3		4341.667	50.59	-3.65	46.94	74.00	-27.06	peak			
4	*	2480.000	92.55	-9.59	82.96	94.00	-11.04	AVG	100	195	

Page 26 of 44

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL Radiated Emission Measurement

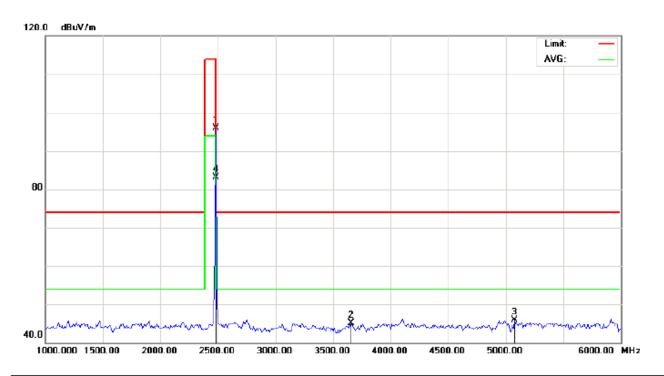

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT: Bluetooth Module Distance: 3m

M/N: F-6688

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	105.41	-9.59	95.82	114.00	-18.18	peak			
2		3658.333	52.10	-6.91	45.19	74.00	-28.81	peak			
3		5075.000	47.62	-1.80	45.82	74.00	-28.18	peak			
4	*	2480.000	92.76	-9.59	83.17	94.00	-10.83	AVG	100	113	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Report No.: AGC05695160302FE03 Page 27 of 44

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	106.71	-9.68	97.03	114.00	-16.97	Horizontal
2402	106.74	-9.68	97.06	114.00	-16.94	Vertical
2441	106.28	-9.63	96.65	114.00	-17.35	Horizontal
2441	106.20	-9.63	96.57	114.00	-17.43	Vertical
2480	105.36	-9.59	95.77	114.00	-18.23	Horizontal
2480	105.41	-9.59	95.82	114.00	-18.18	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	93.16	-9.68	83.48	94.00	-10.52	Horizontal
2402	94.36	-9.68	84.68	94.00	-9.32	Vertical
2441	92.92	-9.63	83.29	94.00	-10.71	Horizontal
2441	92.29	-9.63	82.66	94.00	-11.34	Vertical
2480	92.55	-9.59	82.96	94.00	-11.04	Horizontal
2480	92.76	-9.59	83.17	94.00	-10.83	Vertical

Page 28 of 44

10. BAND EDGE EMISSION

10.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO

(b) AVERAGE: RBW=1.5MHz; VBW=1/on time(1KHz) / Sweep=AUTO

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

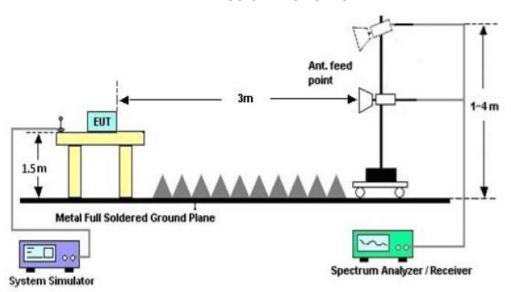


Page 29 of 44

10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

Radiated Emission Measurement

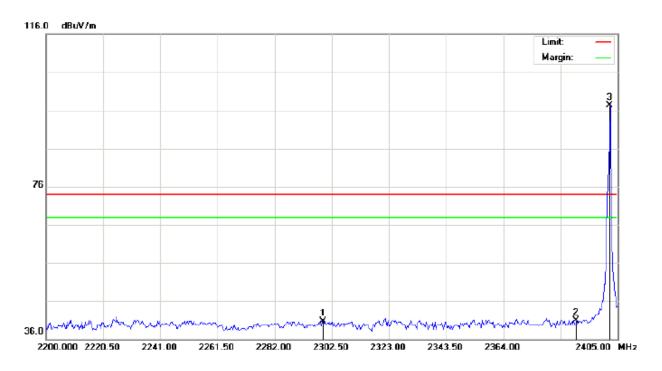

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Module

Distance:

LOT. Didetootii Module

M/N: F-6688


Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2299.425	30.56	10.21	40.77	74.00	-33.23	peak			
2		2390.000	30.62	10.31	40.93	74.00	-33.07	peak			
3	*	2402.000	86.91	10.32	97.23	74.00	23.23	peak			

Page 30 of 44

TEST PLOT OF BAND EDGE FOR LOW CHANNEL - Vertical

Radiated Emission Measurement

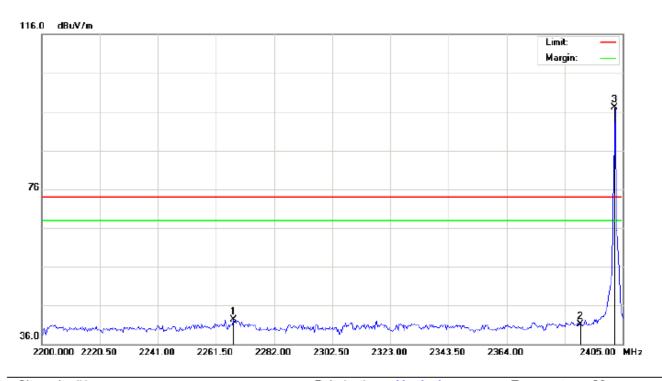

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Bluetooth Module Distance:

M/N: F-6688


Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		2267.650	32.17	10.17	42.34	74.00	-31.66	peak			
2		2390.000	30.85	10.31	41.16	74.00	-32.84	peak			
3	*	2402.000	86.76	10.32	97.08	74.00	23.08	peak			

Page 31 of 44

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

Radiated Emission Measurement

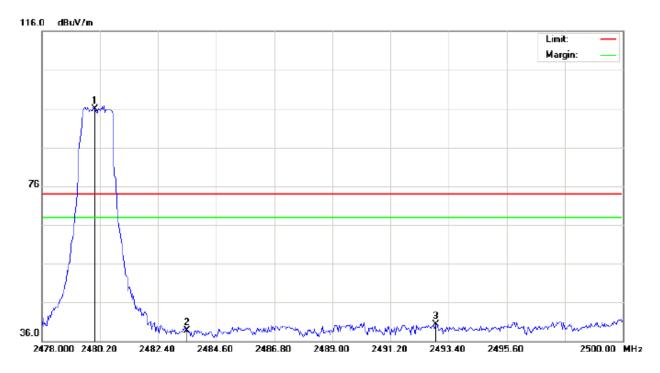

Polarization: Horizontal Temperature: 26 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power:

EUT: Bluetooth Module

Distance:

Humidity: 60 %

M/N: F-6688

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	85.46	10.41	95.87	74.00	21.87	peak			
2		2483.500	28.25	10.41	38.66	74.00	-35.34	peak			
3		2492.923	29.84	10.42	40.26	74.00	-33.74	peak			

Page 32 of 44

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

Radiated Emission Measurement



Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

Distance:

EUT: Bluetooth Module

M/N: F-6688

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1	*	2480.000	85.35	10.41	95.76	74.00	21.76	peak			
2		2483.500	30.37	10.41	40.78	74.00	-33.22	peak			
3		2492.300	30.62	10.42	41.04	74.00	-32.96	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 33 of 44


11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

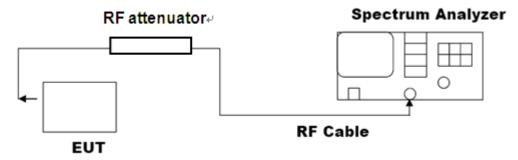


Note: The EUT has been used temporary antenna connector for testing.

11.3. LIMITS AND MEASUREMENT RESULTS


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT						
Applicable Limite	Measurement Result					
Applicable Limits	Plicable Limits Test Data (Criteria			
	Low Channel	1.164	PASS			
N/A	Middle Channel	1.162	PASS			
	High Channel	1.157	PASS			

Page 34 of 44

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

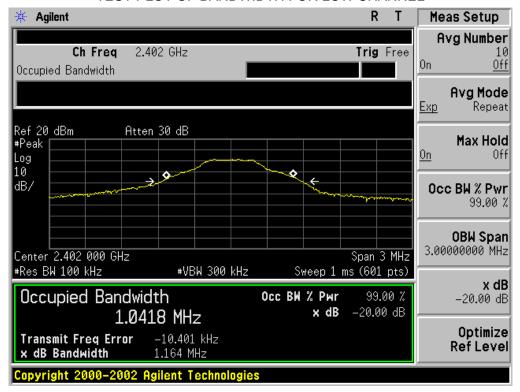


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

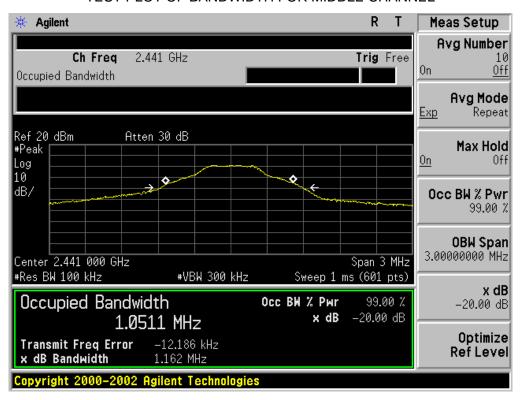

Page 35 of 44


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

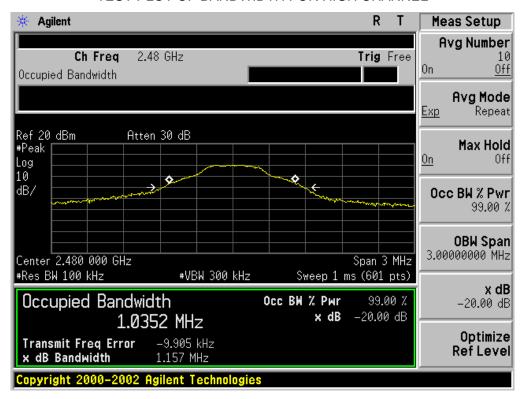

Page 36 of 44


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT						
Applicable Limite	Measurement Result					
Applicable Limits	Test Da	ta (MHz)	Criteria			
	Low Channel	1.374	PASS			
N/A	Middle Channel	1.381	PASS			
	High Channel	1.361	PASS			

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

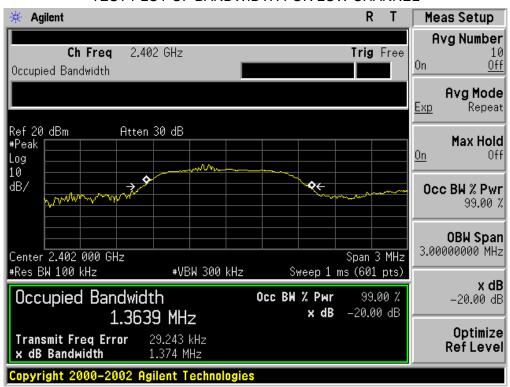


Page 37 of 44

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

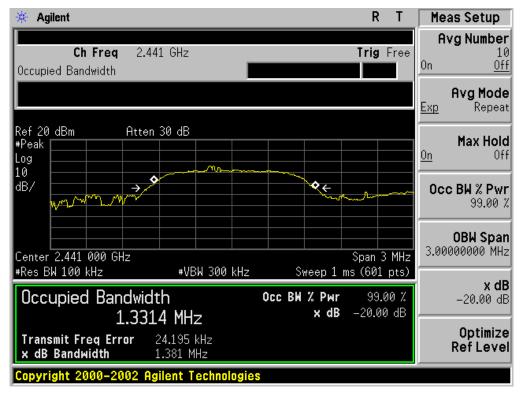


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

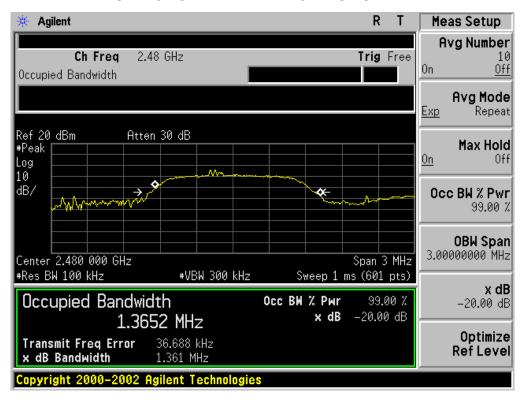

Page 38 of 44


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT						
Applicable Limite	Measurement Result					
Applicable Limits	Test Da	ita (MHz)	Criteria			
	Low Channel	1.389	PASS			
N/A	Middle Channel	1.386	PASS			
	High Channel	1.379	PASS			

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

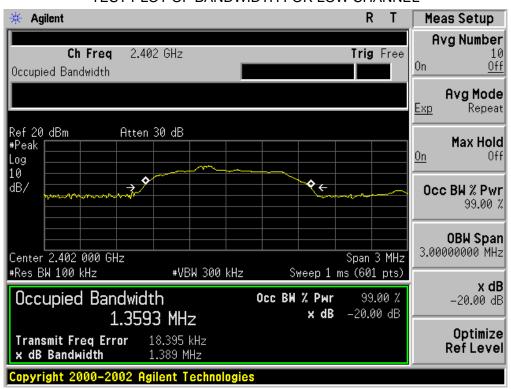


Page 39 of 44

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

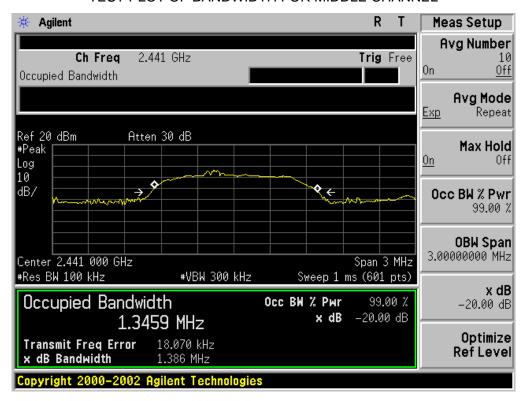

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

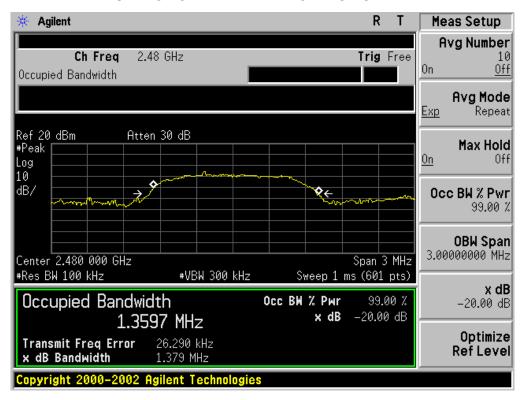

Page 40 of 44

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

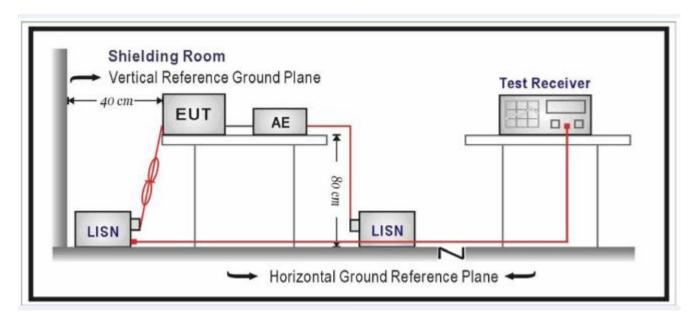

Page 41 of 44

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC or by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Page 42 of 44


12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST


Note: Owing to the sample was powered by DC source, so the item is not applicable.

Page 43 of 44

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP

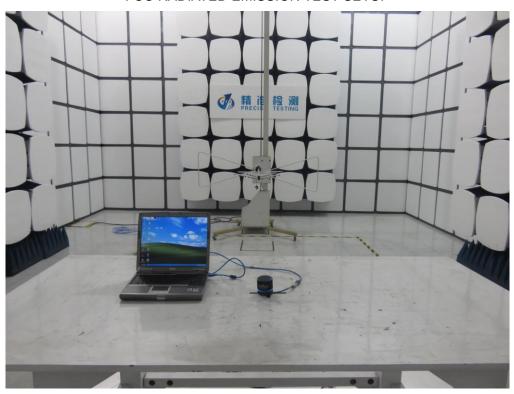


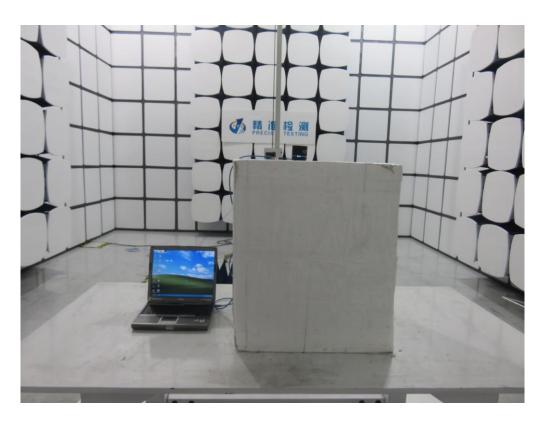


Page 44 of 44

APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT

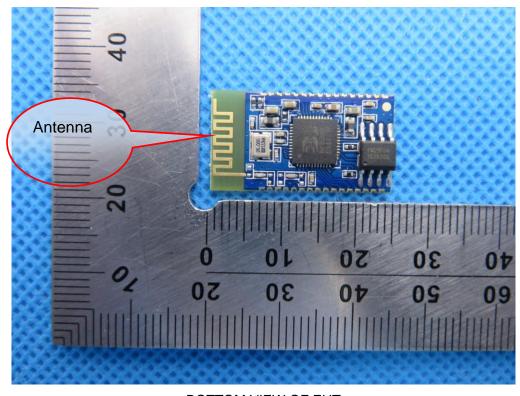

BOTTOM VIEW OF EUT

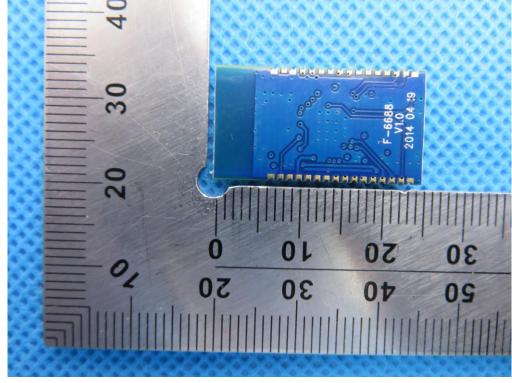

----END OF REPORT----