

# TEST REPORT

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 443-390, Korea  
TEL: 82 70 5008 1021  
FAX: 82 505 299 8311

Report No.: KCTL15-FR0058

Page ( 1 ) / ( 49 ) Pages

**KCTL**  
<http://www.kctl.co.kr>

**1. Applicant**

Name: EKOMOS CO.,LTD

Address: #418,Bi Center,55 Hanyangdaehak-ro,Sangnok-gu,Ansan-si  
Kyeonggi-do, 426-791, Korea

**2. Sample Description:**

FCC ID: 2AGAG-ECO-O2

Type of equipment: BT LIGHT SPEAKER

Basic Model: ECO-O2

**3. Date of Test:** October 07 ~ October 14, 2015**4. Test method used:** FCC Part 15 Subpart C 15.247**5. Test Results**

Test Item: Refer to page 7


Result: Refer to page 8 ~ page 48

Measurement Uncertainty: Refer to page 7

This result shown in this report refer only to the sample(s) tested unless otherwise stated.

Affirmation


Tested by



PARK, JIN OK

Name: PARK, JIN OK

Technical Manager



SON, MIN GI

Name: SON, MIN GI

2015. 10. 29

**KCTL Inc.** Testing Laboratory

## [ Contents ]

<b>1. Client information .....</b>	<b>3</b>
<b>2. Laboratory information.....</b>	<b>4</b>
<b>3. Description of E.U.T.....</b>	<b>5</b>
3.1 Basic description .....	5
3.2 General description.....	5
3.3 Test frequency.....	6
3.4 Test Voltage .....	6
<b>4. Summary of test results.....</b>	<b>7</b>
4.1 Standards & results .....	7
4.2 Uncertainty .....	7
<b>5. Test results.....</b>	<b>8</b>
5.1 Antenna Requirement .....	8
5.2 Maximum Peak Output Power.....	9
5.3 Carrier Frequency Separation.....	14
5.4 20 dB Channel Bandwidth.....	19
5.5 Number of Hopping Channels .....	24
5.6 Time of Occupancy(Dwell Time) .....	28
5.7 Spurious Emission, Band edge and Restricted bands .....	33
5.8 Conducted Emission .....	47
<b>6. Test equipment used for test .....</b>	<b>49</b>

## 1. Client information

**Applicant:** EKOMOS CO.,LTD  
**Address:** #418,Bi Center,55 Hanyangdaehak-ro,Sangnok-gu,Ansan-si  
Kyeonggi-do, 426-791, Korea  
**Telephone number:** +82-31-400-3936  
**Facsimile number:** +82-303-3443-8390  
**Contact person:** Cha Soon Heng / cha1400@hotmail.com

**Manufacturer:** EKOMOS CO.,LTD  
**Address:** #418,Bi Center,55 Hanyangdaehak-ro,Sangnok-gu,Ansan-si  
Kyeonggi-do, 426-791, Korea

## 2. Laboratory information

### Address

#### **KCTL Ltd.**

65 Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea  
Telephone Number: 82-70-5008-1016 Facsimile Number: 82-505-299-8311

### Certificate

KOLAS No: 231


FCC Site Designation No: KR0040

FCC Site Registration No: 687132

VCCI Site Registration No: R-3327, G-198, C-3706, T-1849

IC Site Registration No.:8035A-2

### SITE MAP

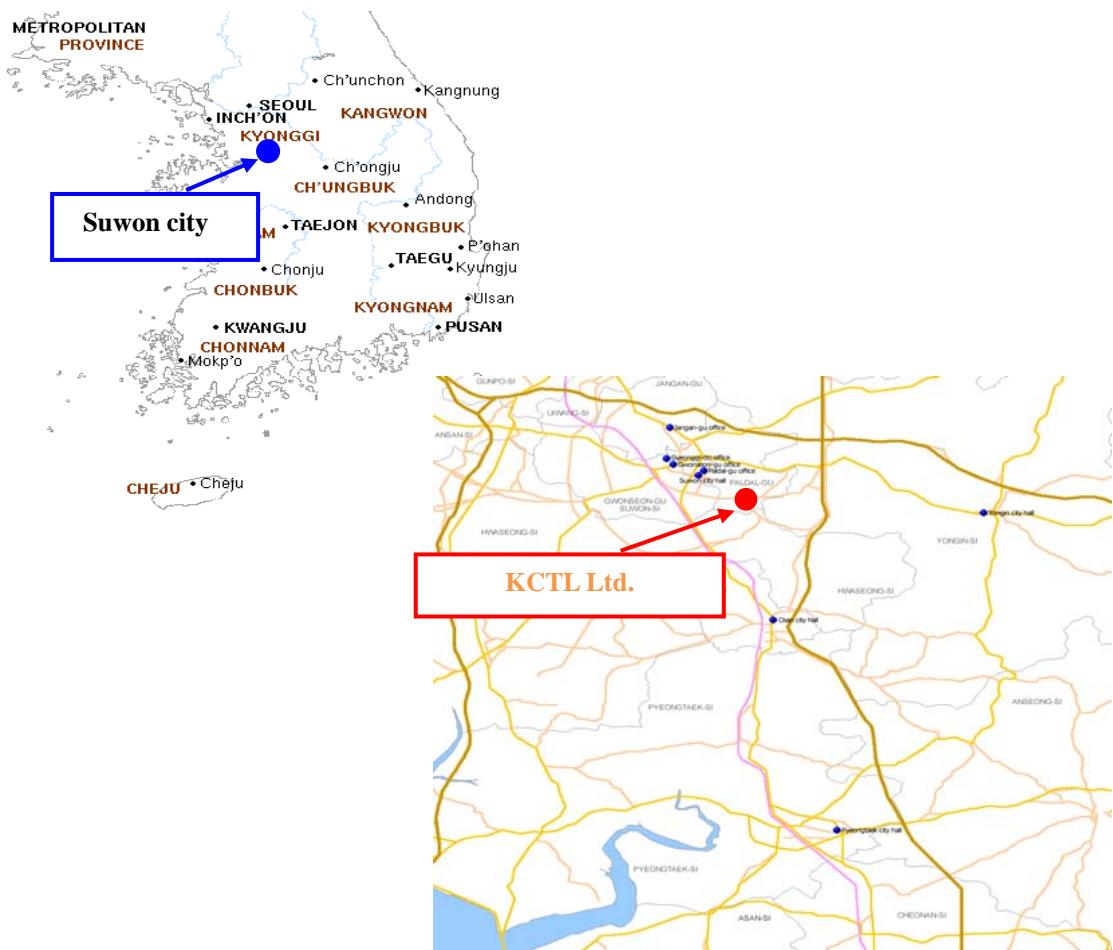

### 3. Description of E.U.T.

#### 3.1 Basic description

Applicant:	EKOMOS CO.,LTD
Address of Applicant	#418,Bi Center,55 Hanyangdaehak-ro,Sangnok-gu,Ansan-si Kyeonggi-do, 426-791, Korea
Manufacturer	EKOMOS CO.,LTD
Address of Manufacturer	#418,Bi Center,55 Hanyangdaehak-ro,Sangnok-gu,Ansan-si Kyeonggi-do, 426-791, Korea
Type of equipment	BT LIGHT SPEAKER
Basic Model	ECO-O2
Serial number	N/A

#### 3.2 General description

Frequency Range	2 402 MHz ~ 2 480 MHz
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channels	79 ch
Type of Antenna	SMD Type Antenna
Antenna Gain	0.8 dBi
Transmit Power	1.85 dBm
Power supply	DC 7.4 V
Product SW/HW version	1.0
Radio SW/HW version	1.0
Test SW Version	CSR Bluesuite 2.6.0
RF power setting in TEST SW	255 50

Note : The above EUT information was declared by the manufacturer.

### 3.3 Test frequency

	Frequency
Low frequency	2 402 MHz
Middle frequency	2 441 MHz
High frequency	2 480 MHz

### 3.4 Test Voltage

Mode	Voltage
Norminal voltage	DC 7.4 V

#### ※ 15.247 Requirements for Bluetooth transmitter

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
  - 1) This system is hopping pseudo-randomly.
  - 2) Each frequency is used equally on the average by each transmitter.
  - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
  - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

## 4. Summary of test results

### 4.1 Standards & results

FCC Rule	IC Rule	Parameter	Report Section	Test Result
15.203, 15.247(b)(4)	-	Antenna Requirement	5.1	C
15.247(b)(1), (4)	RSS-247, 5.4 (2)	Maximum Peak Output Power	5.2	C
15.247(a)(1)	RSS-247, 5.1 (2)	Carrier Frequency Separation	5.3	C
15.247(a)(1)	RSS-247, 5.1 (1)	20dB Channel Bandwidth	5.4	C
-	RSS-GEN, 6.6	Occupied Bandwidth	5.4	C
15.247(a)(iii) 15.247(b)(1)	RSS-247, 5.1	Number of Hopping Channel	5.5	C
15.247(a) (iii)	RSS-247, 5.1 (4)	Time of Occupancy(Dwell Time)	5.6	C
15.247(d), 15.205(a), 15.209(a)	RSS-247, 5.5 RSS-GEN, 8.9, 10	Spurious Emission, BandEdge, Restricted Band	5.7	C
15.207(a)	RSS-GEN, 8.8V	Conducted Emissions	-	N/A <sub>1)</sub>

Note: C=complies

NC= Not complies

NT=Not tested

NA=Not Applicable

N/A<sub>1)</sub> : This test is not applicable because the EUT falls into the automotive device and it's not to be connected to the public utility(AC) power line.

\* The method of measurement used to test this DSS device is FCC Public Notice DA 00-705

\* The general test methods used to test on this device are ANSI C63.10:2013

### 4.2 Uncertainty

Measurement Item	Expanded Uncertainty $U = KU_c (K = 2)$	
Conducted RF power	1.30 dB	
Conducted Spurious Emissions	1.52 dB	
Radiated Spurious Emissions	30 MHz ~ 300 MHz:	+ 4.94 dB, - 5.06 dB
		+ 4.93 dB, - 5.05 dB
Conducted Emissions	300 MHz ~ 1 000 MHz:	+ 4.97 dB, - 5.08 dB
		+ 4.84 dB, - 4.96 dB
Conducted Emissions	1 GHz ~ 25 GHz:	+ 6.03 dB, - 6.05 dB
	9 kHz ~ 150 kHz:	3.75 dB
	150 kHz ~ 30 MHz:	3.36 dB

## 5. Test results

### 5.1 Antenna Requirement

#### 5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 5.1.2 Result

-Complied

The transmitter has a SMD Type Antenna. The transmitter has a Internal Antenna which is attached on PCB board permanently.

## 5.2 Maximum Peak Output Power

### 5.2.1 Regulation

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.2.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface or Bluetooth tester and make sure the spectrum analyzer is operated in its linear range.
4. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  $RBW > \text{the } 20 \text{ dB bandwidth of the emission being measured } VBW \geq RBW$   
Sweep = auto Detector function = peak Trace = max hold
5. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
6. Repeat above procedures until all frequencies measured were complete.

### 5.2.3 Test Result

- Complied

\* GFSK

Channel	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Average Power (dBm)
Low	2 402	1.81	30.00	28.19	0.32
Middle	2 441	1.84	30.00	28.16	-0.34
High	2 480	1.56	30.00	28.44	-0.34

\* 8DPSK

Channel	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dB)	Average Power (dBm)
Low	2 402	1.82	20.97	19.15	-2.64
Middle	2 441	1.85	20.97	19.12	-3.20
High	2 480	1.58	20.97	19.39	-3.29

NOTE:


1. Since the directional gain of the SMD Type antenna declared by the manufacturer ( $G_{ANT} = 0.8 \text{ dBi}$ ) does not exceed 6.0 dBi, there was no need to reduce the output power.
2. We took the insertion loss of the cable loss into consideration within the measuring instrument.

## 5.2.4 Test Plot


Figure 1. Plot of the Maximum Peak Output Power (Conducted)

\* GFSK


Lowest Channel( 2.402 MHz)

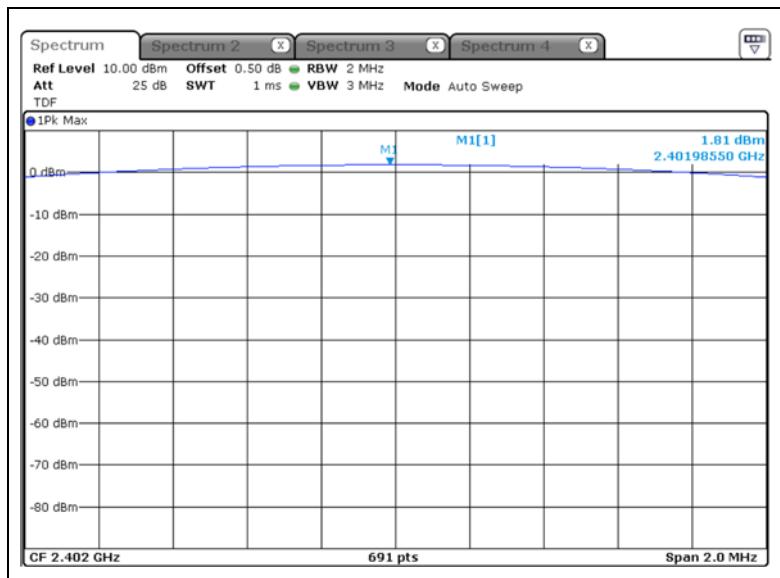

Middle Channel (2.441 MHz)

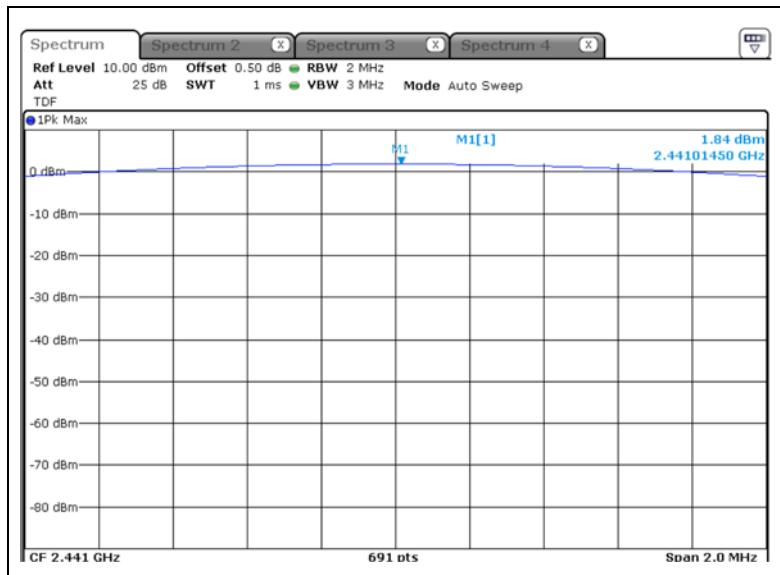


Highest Channel ( 2.480 MHz)

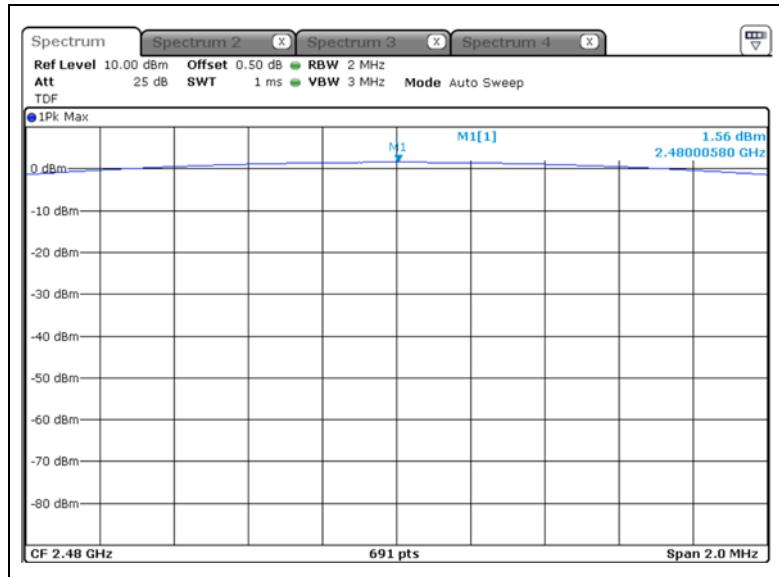


\* 8DPSK


Lowest Channel( 2.402 MHz)

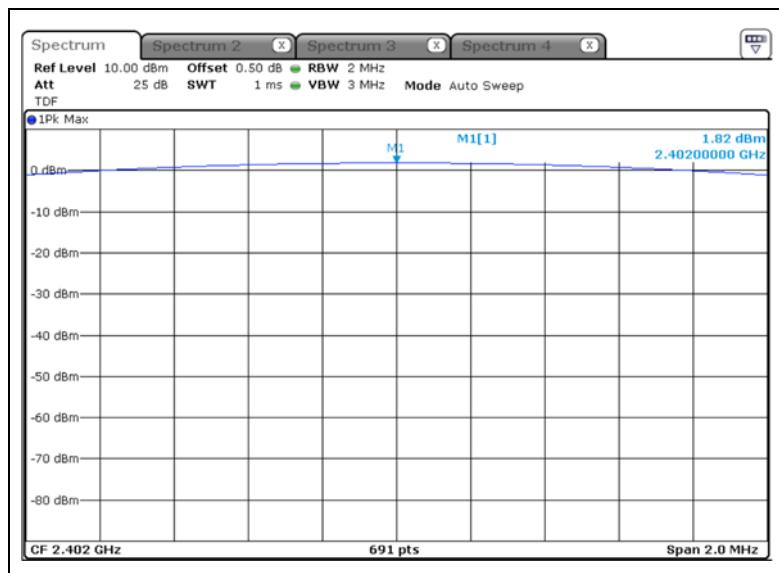

### Middle Channel (2 441 MHz)

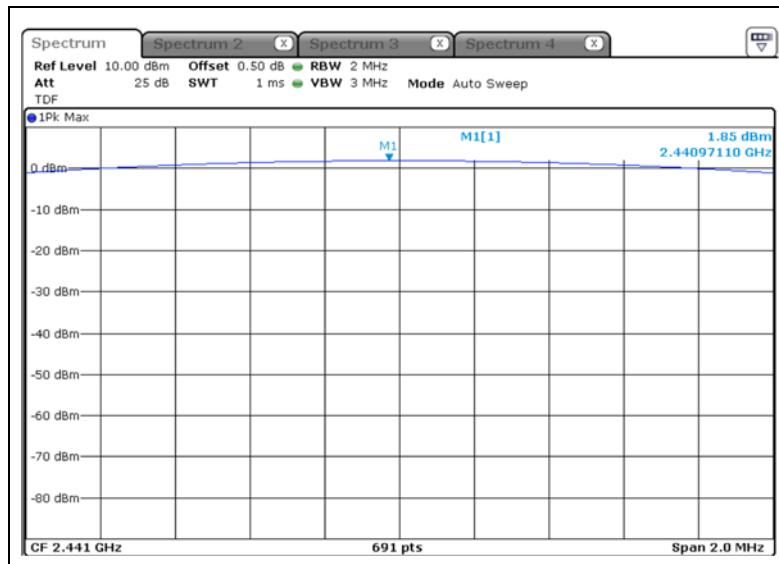

### Highest Channel (2 480 MHz)

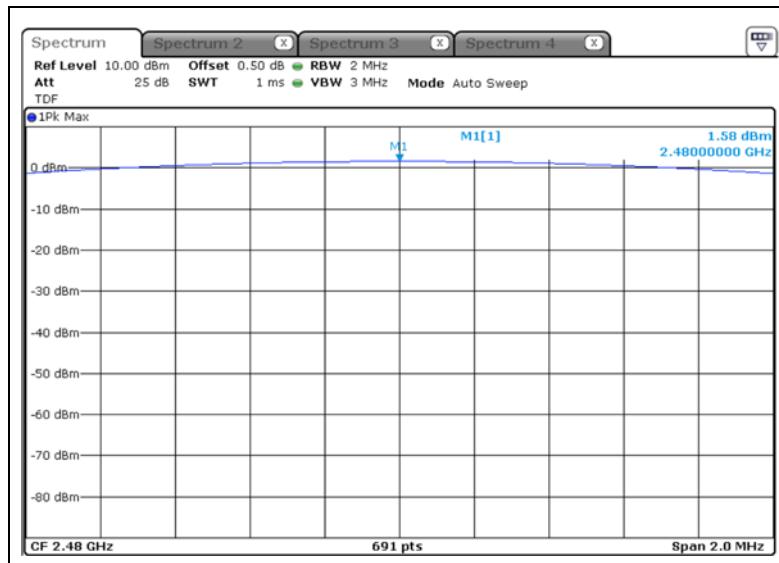

## 5.3 Carrier Frequency Separation

### 5.3.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.  
Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 5.3.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface or Bluetooth tester.
4. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span Video (or Average) Bandwidth (VBW)  $\geq$  RBW Sweep = auto Detector function = peak Trace = max hold
5. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
6. Repeat above procedures until all frequencies measured were complete.

### 5.3.3 Test Result

- Complied

#### \* GFSK

Frequency (MHz)	Operating Mode	Carrier frequency separation (MHz)	Limit
2 402	Hopping	0.999	≥25 kHz or two-thirds of the 20 dB bandwidth
2 441	Hopping	1.007	≥25 kHz or two-thirds of the 20 dB bandwidth
2 480	Hopping	0.990	≥25 kHz or two-thirds of the 20 dB bandwidth

#### \* 8DPSK

Frequency (MHz)	Operating Mode	Carrier frequency separation (MHz)	Limit
2 402	Hopping	0.994	≥25 kHz or two-thirds of the 20 dB bandwidth
2 441	Hopping	0.999	≥25 kHz or two-thirds of the 20 dB bandwidth
2 480	Hopping	0.999	≥25 kHz or two-thirds of the 20 dB bandwidth


NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

### 5.3.4 Test Plot


Figure 2. Plot of the Carrier Frequency Separation (Conducted)

\* GFSK


Lowest Channel (2 402 MHz)

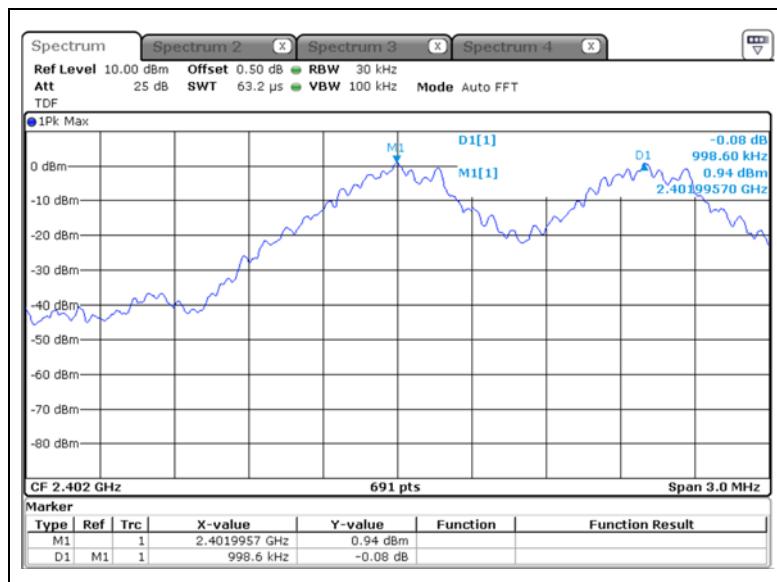

Middle Channel (2 441 MHz)

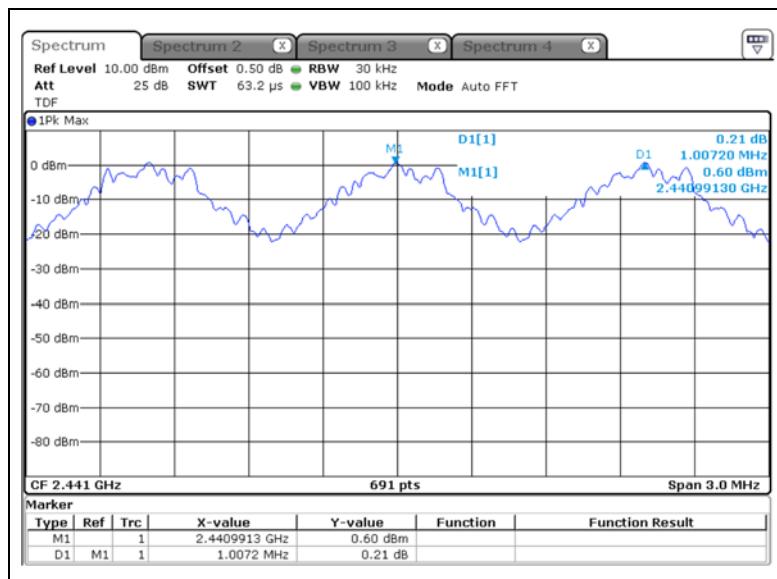


### Highest Channel (2 480 MHz)

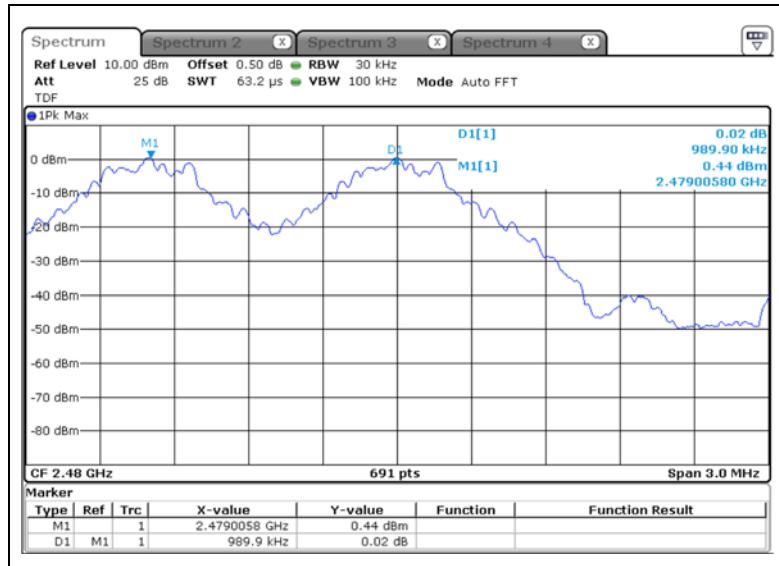


### \* 8DPSK


### Lowest Channel (2 402 MHz)

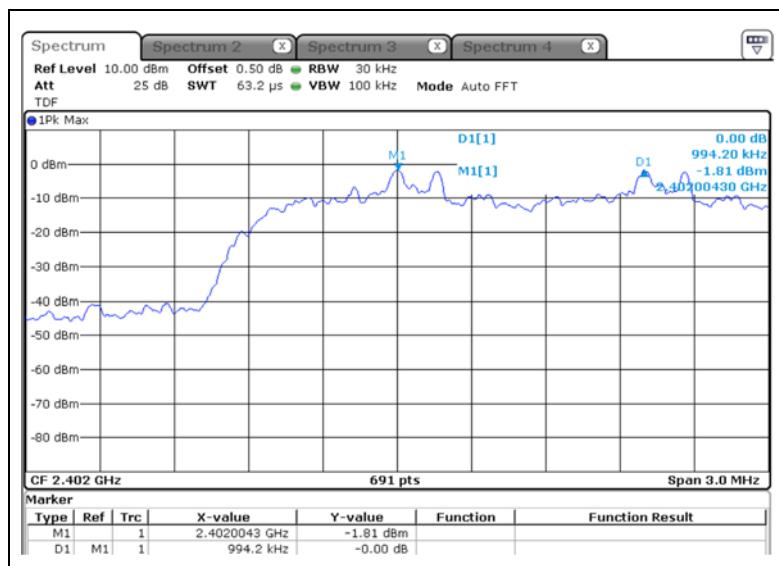

### Middle Channel (2.441 MHz)

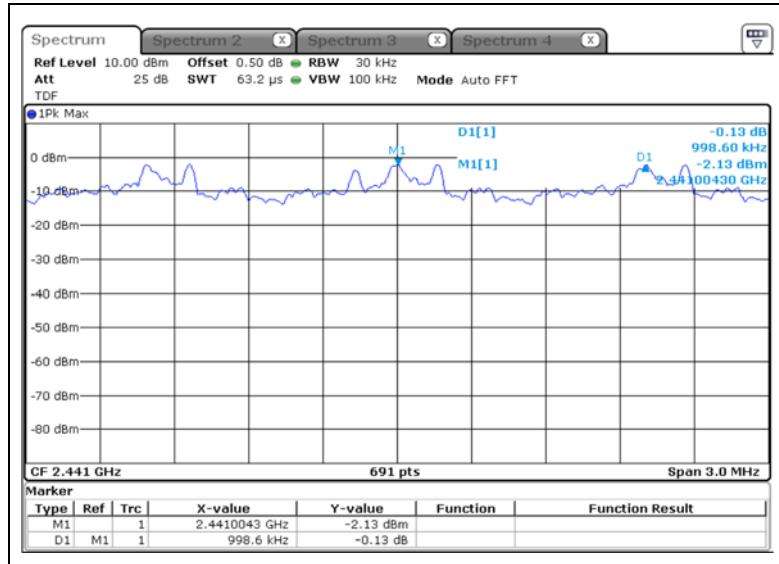

### Highest Channel (2.480 MHz)

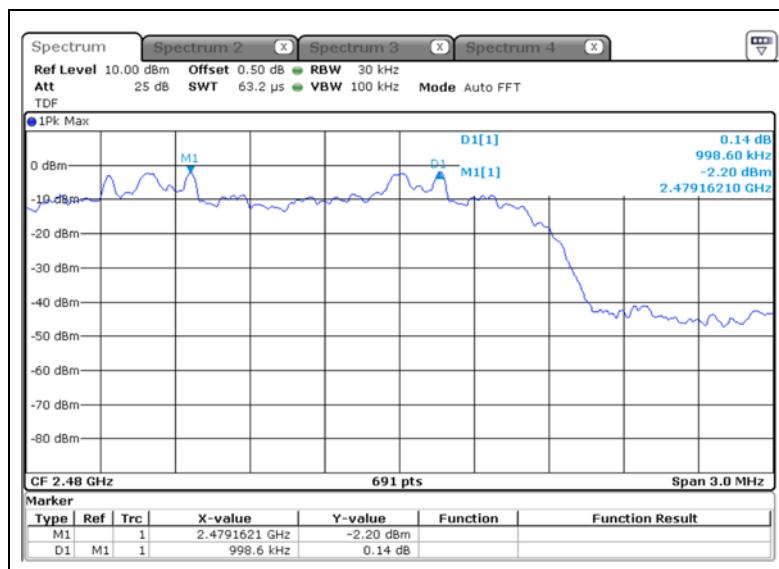

## 5.4 20 dB Channel Bandwidth

### 5.4.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

### 5.4.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface or Bluetooth tester and make sure the spectrum analyzer is operated in its linear range.
4. Set the spectrum analyzer as follows: Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel RBW  $\geq$  1% of the 20 dB bandwidth VBW  $\geq$  RBW Sweep = auto Detector function = peak Trace = max hold
5. Set a reference level on it equal to the highest peak value.
6. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
7. Repeat above procedures until all frequencies measured were complete..

### 5.4.3 Test Result

- Complied

Mode	Channel	20 dB Channel Bandwidth(MHz)
GFSK	Low	0.821
	Middle	0.821
	High	0.829
8DPSK	Low	1.285
	Middle	1.272
	High	1.272


NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

#### 5.4.4 Test Plot


Figure 3. Plot of the 20 dB Channel Bandwidth / Occupied Bandwidth (Conducted)

**\* GFSK (20 dB Channel Bandwidth)**


Lowest Channel( 2 402 MHz)

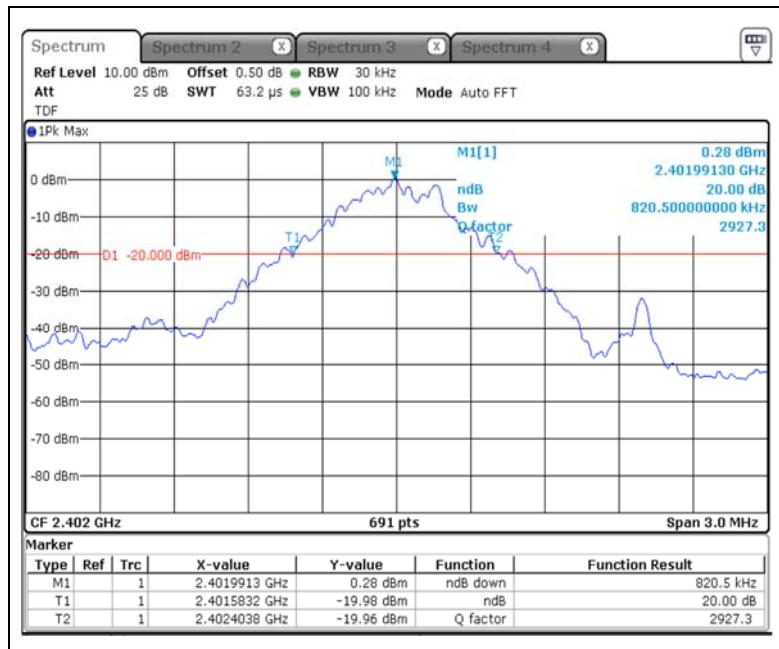

Middle Channel (2 441 MHz)

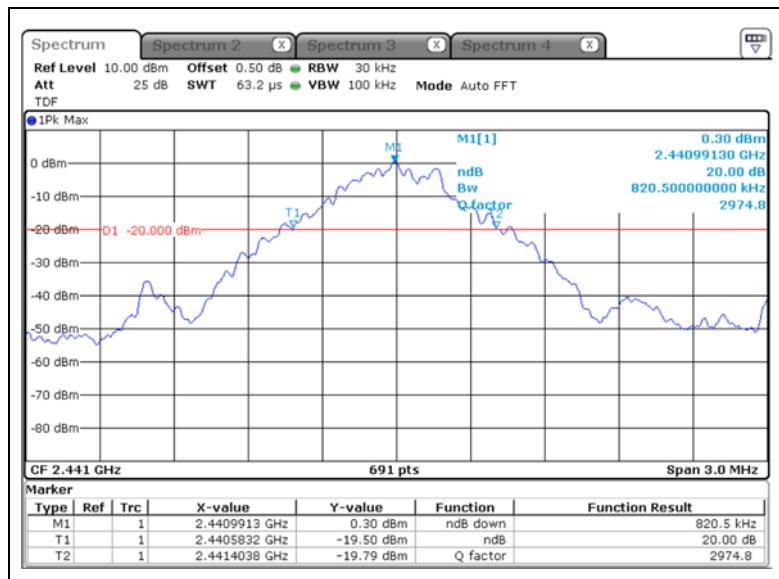


### Highest Channel ( 2 480 MHz)

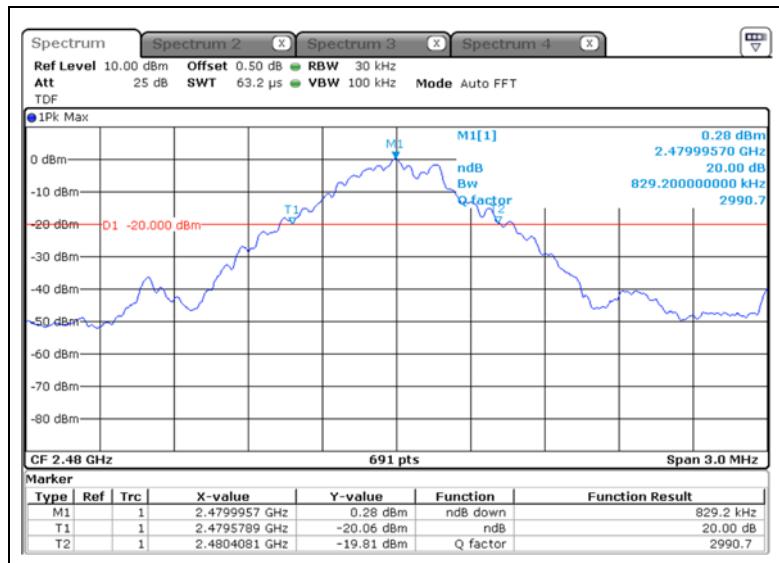


### \* 8DPSK (20 dB Channel Bandwidth)


### Lowest Channel( 2 402 MHz)

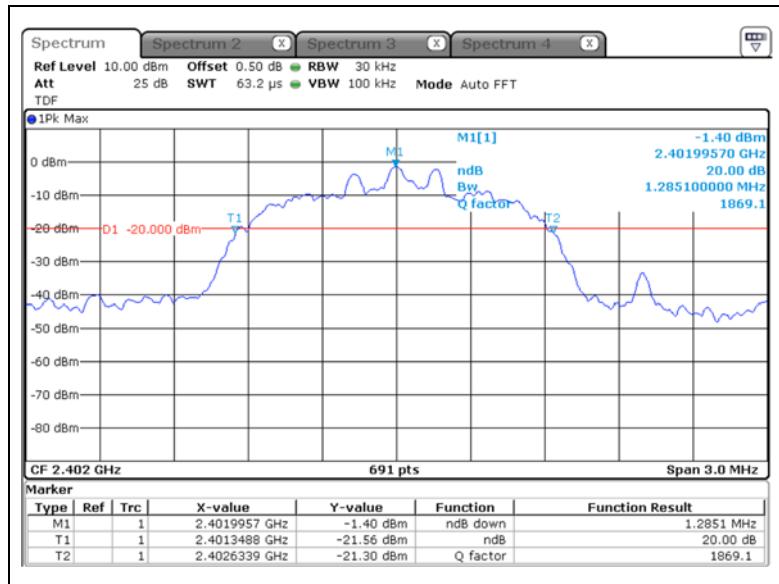

### Middle Channel (2 441 MHz)

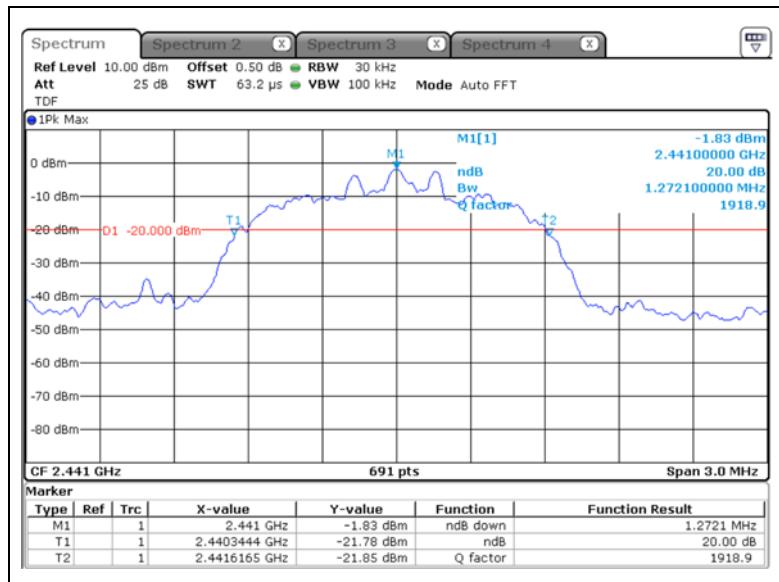

### Highest Channel (2 480 MHz)

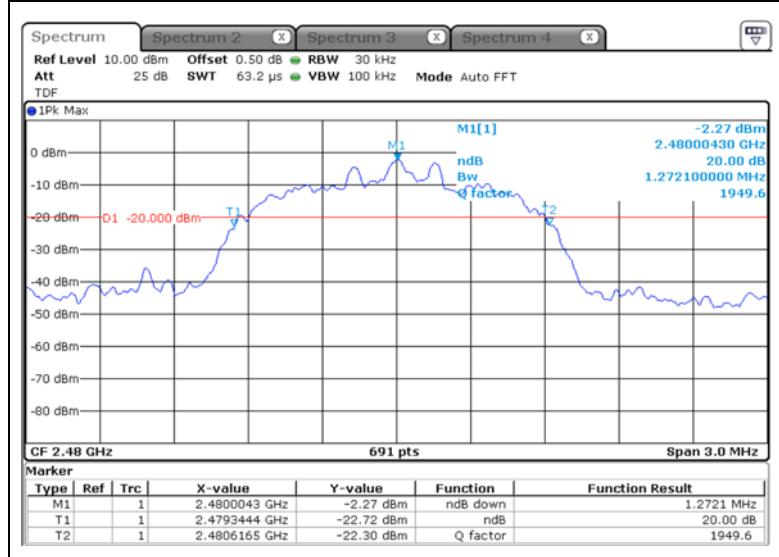

## 5.5 Number of Hopping Channels

### 5.5.1 Regulation

According to §15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 5.5.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set the hopping function enabled by controlling it via UART interface or Bluetooth tester.
4. Set the spectrum analyzer as follows: Span = the frequency band of operation RBW  $\geq 1\%$  of the span VBW  $\geq$  RBW Sweep = auto Detector function = peak Trace = max hold
5. Record the number of hopping channels.

### 5.5.3 Test Result

- Complied

Mode	Frequency	Number of hopping channel	Limit
GFSK	2 402 – 2 480 MHz	79	≥15
8DPSK	2 402 – 2 480 MHz	79	≥15



NOTE:

1. We took the insertion loss of the cable loss into consideration within the measuring instrument.
2. Measurement is made with EUT operating in hopping mode between 79 channels providing a worse case scenario as compared to AFH mode hopping between 20 channels.



## 5.5.4 Test Plot

Figure 4. Plot of the Number of Hopping Channels (Conducted)

\* GFSK

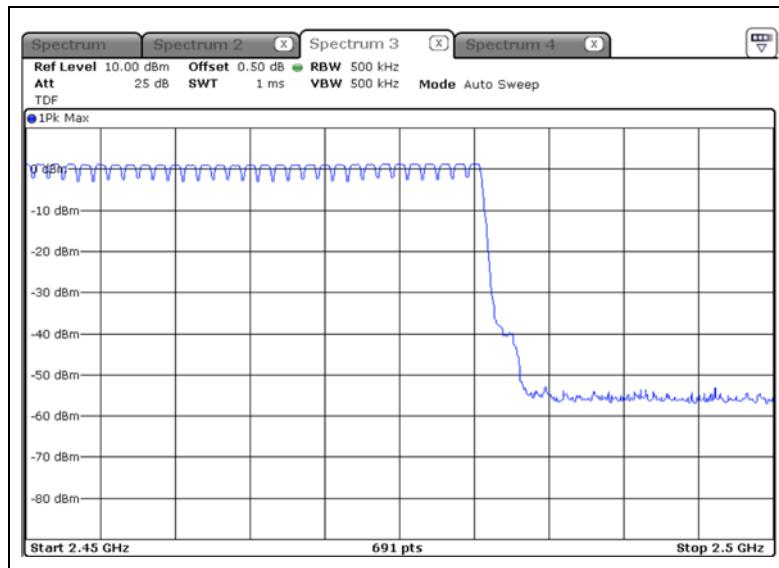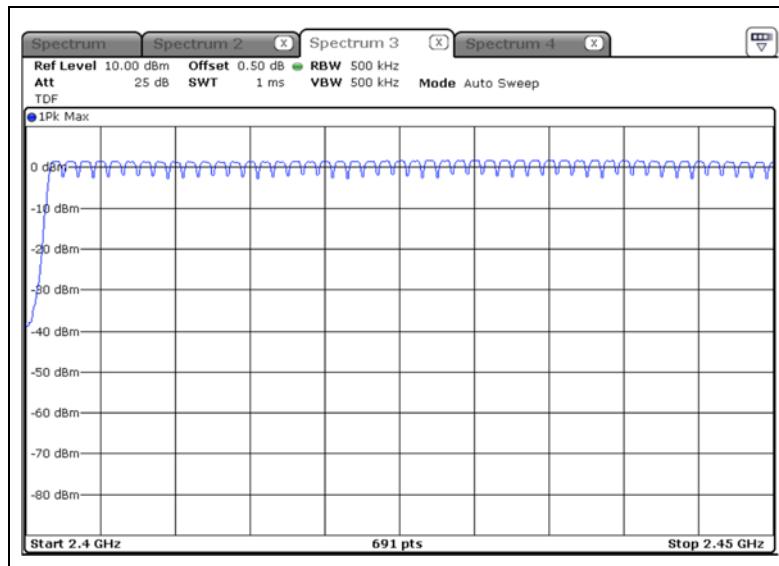

**\* 8DPSK**

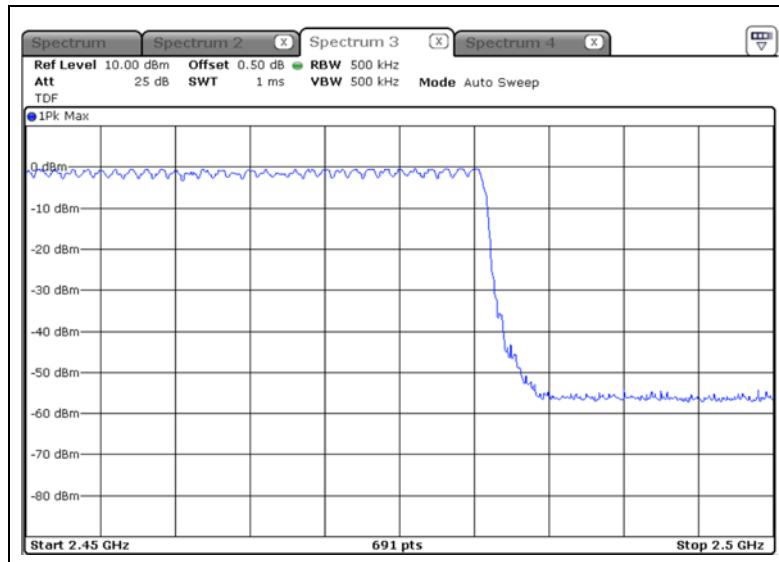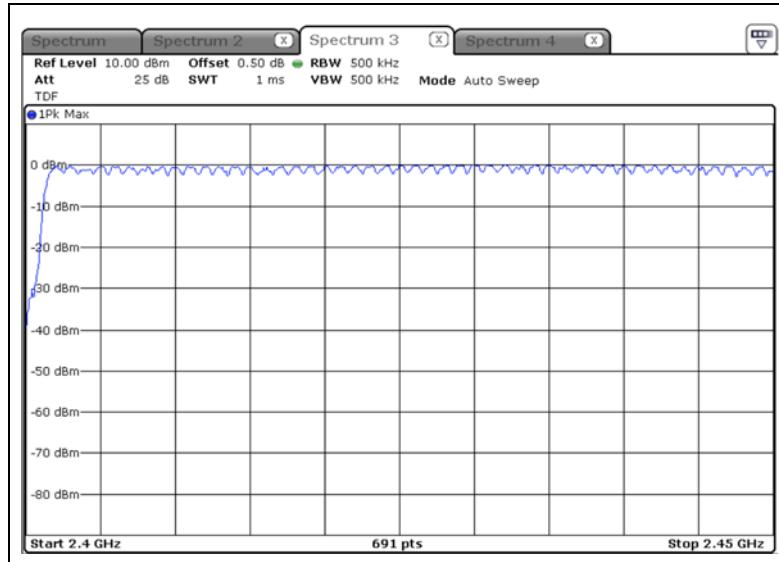

## 5.6 Time of Occupancy(Dwell Time)

### 5.6.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 5.6.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface or Bluetooth tester.
4. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel RBW = 1 MHz VBW  $\geq$  RBW Sweep = as necessary to capture the entire dwell time per hopping channel Detector function = peak Trace = max hold
5. Measure the dwell time using the marker-delta function.
6. Repeat above procedures until all frequencies measured were complete.
7. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

### 5.6.3 Test Result

#### - Complied

Hopping mode	Modulation	Packet Type	Reading[ms]	Hopping rate [hop/s]	Number of Channels	Actual[s]	Limit[s]
Non-AFH	GFSK	DH1	0.394	266.667	79	0.042	0.40
		DH3	1.644	266.667	79	0.175	0.40
		DH5	2.891	266.667	79	0.308	0.40
	8DPSK	3-DH1	0.407	266.667	79	0.043	0.40
		3-DH3	1.660	266.667	79	0.177	0.40
		3-DH5	2.912	266.667	79	0.311	0.40
AFH	GFSK	DH1	0.394	133.333	20	0.021	0.40
		DH3	1.644	133.333	20	0.088	0.40
		DH5	2.891	133.333	20	0.154	0.40
	8DPSK	3-DH1	0.407	133.333	20	0.022	0.40
		3-DH3	1.644	133.333	20	0.088	0.40
		3-DH5	2.916	133.333	20	0.156	0.40

#### NOTE 1. Non AFH

Actual = Reading × (Hopping rate / Number of channels) × Test period

Hopping rate = 1 600/time slot

Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds]

#### 2. AFH

Actual = Reading × (Hopping rate / Number of channels) × Test period

Hopping rate = 800/time slot


Test period = 0.4 [seconds / channel] × 20 [channel] = 8 [seconds]

## 5.6.4 Test Plot


Figure 5. Plot of the Time of Occupancy (Conducted)

\* GFSK


DH1 ( 2.441 MHz)

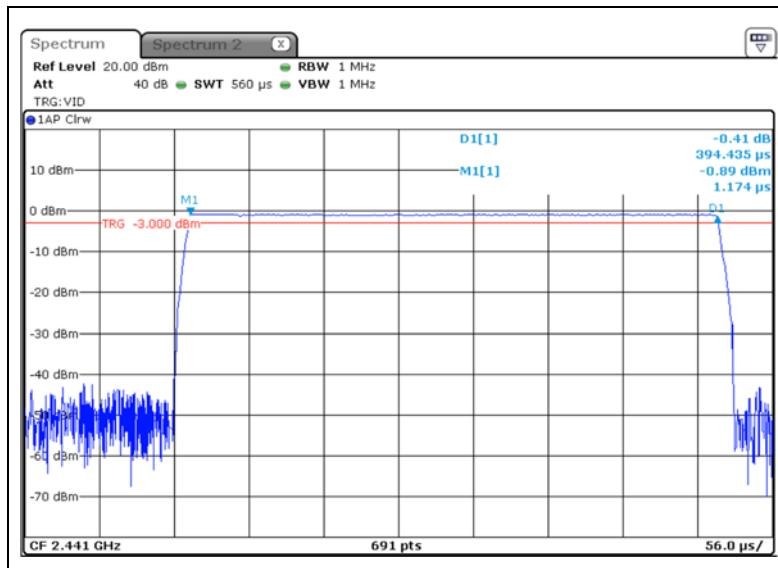

DH3 ( 2.441 MHz)

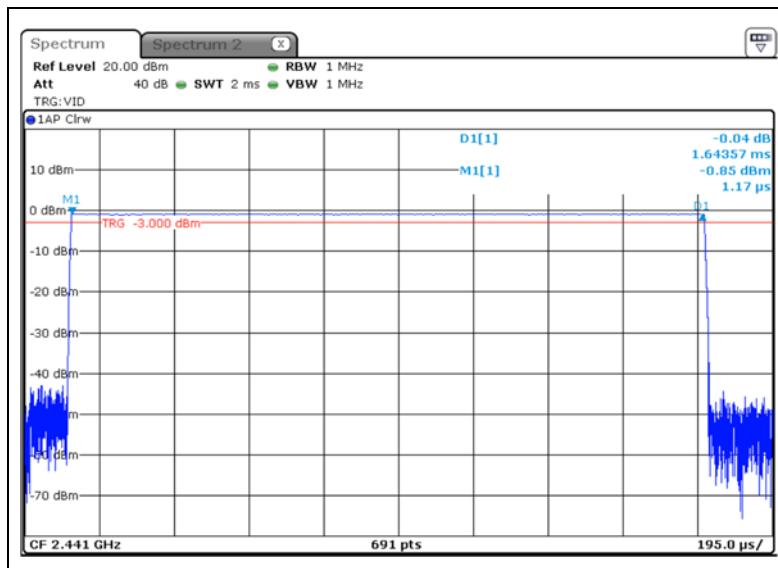


DH5 ( 2.441 MHz)

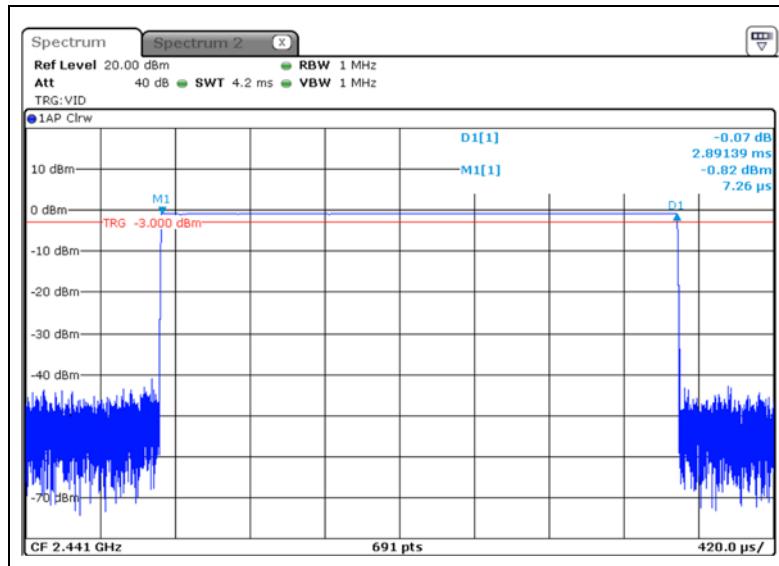


\* 8DPSK


3-DH1 ( 2.441 MHz)

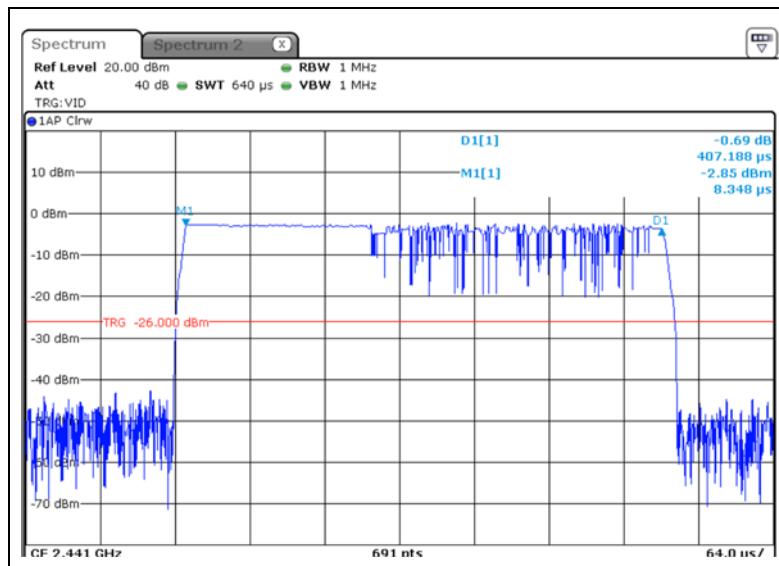

3-DH3 ( 2 441 MHz)

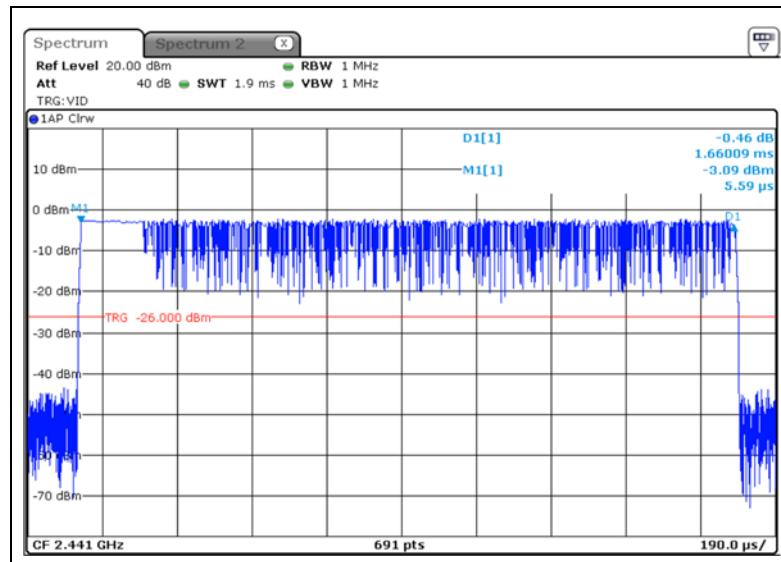

3-DH5 ( 2 441 MHz)

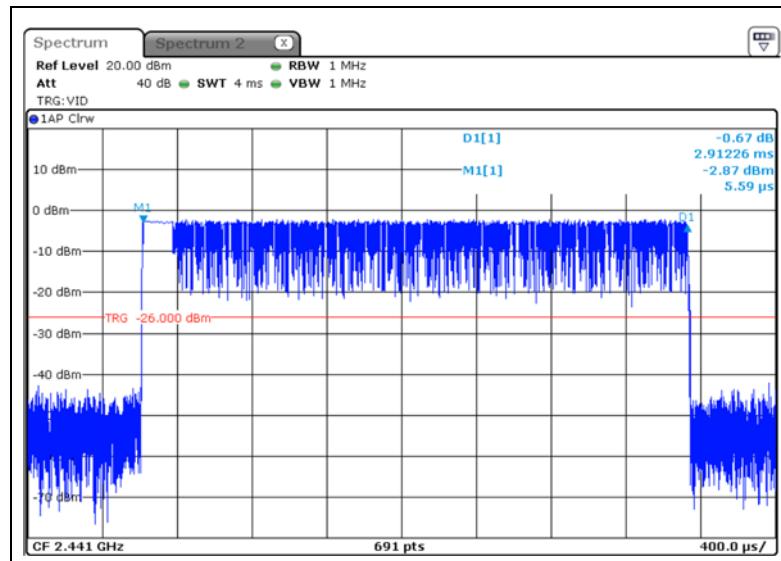

## 5.7 Spurious Emission, Band edge and Restricted bands

### 5.7.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ( $\mu$ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6
13.36 - 13.41			

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

## 5.7.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

### 1) Band-edge Compliance of RF Conducted Emissions

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation  
 RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

## 2) Spurious RF Conducted Emissions:

### 1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.  
Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

a 4  $\times$  4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.

### 3. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

## 3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.
2. The EUT was placed on the top of the 0.8-meter height, 1  $\times$  1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, and from 30 to 1000 MHz using the TRILOG broadband antenna, and from 1000 MHz to 26500 MHz using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4  $\times$  4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

### Note

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

### 5.7.3 Test Result

#### - Complied

1. Band edge compliance of RF Conducted Emissions was shown in figure 6& 7.
2. Measured value of the Field strength of spurious Emissions (Radiated)
3. It tested x,y and z – 3 axis each, mentioned only worst case data at this report.

#### \* Below 1 GHz data (Worst-case: 8DPSK)

##### 8DPSK\_Middle Channel (2 441 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol.	Reading [dB(µV)]	Factor [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
<b>Quasi-Peak DATA. Emissions below 30 MHz</b>							
0.52	120	H	61.2	-13.5	47.7	53.6	5.9
1.05	120	H	55.6	-13.5	42.1	49.0	6.9
Above 2.00	<b>Not Detected</b>	-	-	-	-	-	-
<b>Quasi-Peak DATA. Emissions below 1 GHz</b>							
44.91	120	V	41.7	-16.5	25.2	40.0	14.8
146.16	120	H	48.6	-21.6	27.0	43.5	16.5
245.34	120	H	57.4	-16.6	40.8	46.0	5.2
319.91	120	H	49.9	-14.5	35.4	46.0	10.6
796.54	120	V	29.7	-5.4	24.3	46.0	21.7
905.43	120	V	20.0	-2.8	17.2	46.0	28.8
Above 800.00	<b>Not Detected</b>	-	-	-	-	-	-

**\* Above 1 GHz data**
**GFSK\_Low channel (2 402 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol.	Reading [dB(µV)]	Factor [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>							
1 738.75	1 000	V	61.2	-13.8	47.4	74.0	26.6
1 602.00	1 000	H	58.4	-15.0	43.4	74.0	30.6
1 194.75	1 000	V	58.3	-16.7	41.6	74.0	32.4
*2 375.75	1 000	V	50.6	-10.6	40.0	74.0	34.0
4 803.75	1 000	V	55.5	-5.3	50.2	74.0	23.8
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-
<b>Average DATA. Emissions above 1 GHz</b>							
1 738.75	1 000	V	37.6	-13.8	23.8	54.0	30.2
1 602.00	1 000	H	54.9	-15.0	39.9	54.0	14.1
1 194.75	1 000	V	42.4	-16.7	25.7	54.0	28.3
*2 375.75	1 000	V	39.1	-10.6	28.5	54.0	25.5
4 803.75	1 000	V	52.4	-5.3	47.1	54.0	6.9
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-

\* This Asterisk means restricted band.

**GFSK\_Middle channel (2 441 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol.	Reading [dB(µV)]	Factor [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>							
1 198.00	1 000	V	59.1	-16.7	42.4	74.0	31.6
1 626.25	1 000	H	58.1	-14.8	43.3	74.0	30.7
1 722.00	1 000	V	60.0	-13.9	46.1	74.0	27.9
4 880.63	1 000	V	55.8	-4.4	51.4	74	22.6
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-
<b>Average DATA. Emissions above 1 GHz</b>							
1 198.00	1 000	V	44.7	-16.7	28.0	54.0	26.0
1 626.25	1 000	H	55.6	-14.8	40.8	54.0	13.2
1 722.00	1 000	V	38.5	-13.9	24.6	54.0	29.4
4 880.63	1 000	V	51.2	-4.4	46.8	54	7.2
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-

**GFSK\_High channel (2 480 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol.	Reading [dB(µV)]	Factor [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>							
1 198.00	1 000	H	59.7	-16.7	43.0	74.0	31.0
1 652.75	1 000	H	57.9	-14.6	43.3	74.0	30.7
*2 391.50	1 000	V	53.7	-10.6	43.1	74.0	30.9
2 487.50	1 000	H	52.0	-10.4	41.6	74.0	32.4
4 803.45	1 000	V	55.5	-5.3	50.2	74.0	23.8
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-
<b>Average DATA. Emissions above 1 GHz</b>							
1 198.00	1 000	H	41.7	-16.7	25.0	54.0	29.0
1 652.75	1 000	H	53.5	-14.6	38.9	54.0	15.1
*2 391.50	1 000	V	37.5	-10.6	26.9	54.0	27.1
2 487.50	1 000	H	38.9	-10.4	28.5	54.0	25.5
4 803.45	1 000	V	50.2	-5.3	44.9	54.0	9.1
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-

\* This Asterisk means restricted band.

**8DPSK\_Low channel (2 402 MHz)**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol.	Reading [dB(µV)]	Factor [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>							
1 195.75	1 000	V	62.3	-16.7	45.6	74.0	28.4
1 601.75	1 000	H	58.4	-15	43.4	74.0	30.6
*2 389.75	1 000	V	50.8	-10.6	40.2	74.0	33.8
4 880.63	1 000	V	55.5	-5.3	50.2	74.0	23.8
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-
<b>Average DATA. Emissions above 1 GHz</b>							
1 195.75	1 000	V	43.7	-16.7	27.0	54.0	27.0
1 601.75	1 000	H	55.4	-15.0	40.4	54.0	13.6
*2 389.75	1 000	V	53.3	-10.6	42.7	54.0	11.3
4 880.63	1 000	V	50.2	-5.3	44.9	54.0	9.1
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-

\* This Asterisk means restricted band.

### 8DPSK \_Middle channel (2 441 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol.	Reading [dB(µV)]	Factor [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>							
1 198.00	1 000	V	58.7	-16.7	42.0	74.0	32.0
1 626.75	1 000	H	57.1	-14.8	42.3	74.0	31.7
1 949.00	1 000	V	53.7	-12.2	41.5	74.0	32.5
4 880.63	1 000	H	55.1	-4.4	50.7	74.0	23.3
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-
<b>Average DATA. Emissions above 1 GHz</b>							
1 198.00	1 000	V	45.5	-16.7	28.8	54.0	25.2
1 626.75	1 000	H	54.0	-14.8	39.2	54.0	14.8
1 949.00	1 000	V	36.9	-12.2	24.7	54.0	29.3
4 880.63	1 000	H	50.3	-4.4	45.9	54.0	8.1
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-

### 8DPSK \_High channel (2 480 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol.	Reading [dB(µV)]	Factor [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
<b>Peak DATA. Emissions above 1 GHz</b>							
1 198.00	1 000	H	59.7	-16.7	43.0	74.0	31.0
1 652.75	1 000	H	57.9	-14.6	43.3	74.0	30.7
2 391.50	1 000	V	53.7	-10.6	43.1	74.0	30.9
*2 487.50	1 000	H	52	-10.4	41.6	74.0	32.4
4 959.38	1 000	H	53.9	-3.6	50.3	74.0	23.7
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-
<b>Average DATA. Emissions above 1 GHz</b>							
1 198.00	1 000	H	44.5	-16.7	27.8	54.0	26.2
1 652.75	1 000	H	57.8	-14.6	43.2	54.0	10.8
2 391.50	1 000	V	37.7	-10.6	27.1	54.0	26.9
*2 487.50	1 000	H	38.7	-10.4	28.3	54.0	25.7
4 959.38	1 000	H	39.1	-3.6	35.5	54.0	18.5
Above 5 000.00	<b>Not Detected</b>	-	-	-	-	-	-


\* This Asterisk means restricted band.

## 5.7.4 Test Plot


Figure 6. Plot of the Band Edge (Conducted)

### \* GFSK (Without hopping)

Lowest Channel( 2 402 MHz)

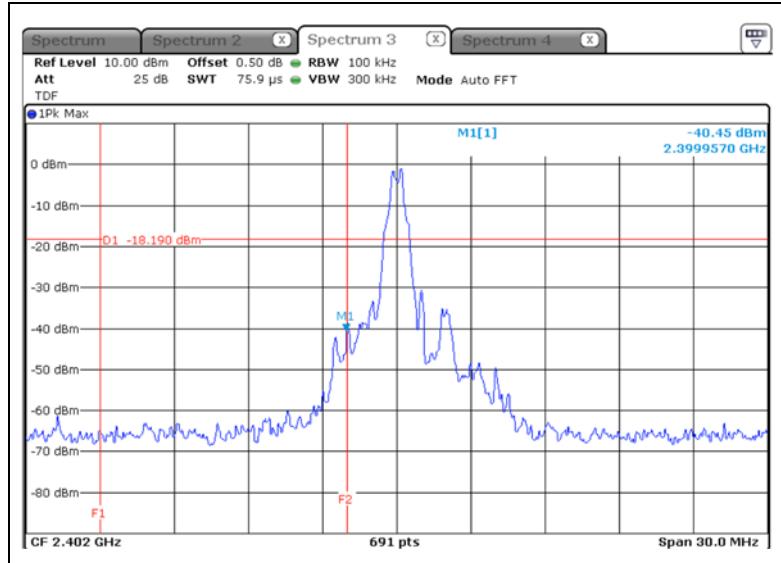


Highest Channel (2 480 MHz)

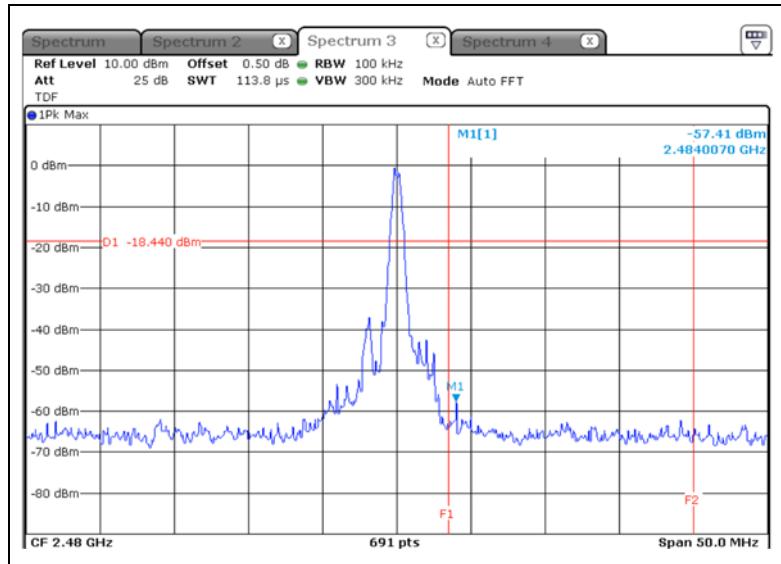


\* Re result of 2 483.5 MHz

**\* GFSK (With hopping)**

Lowest Channel( 2 402 MHz)

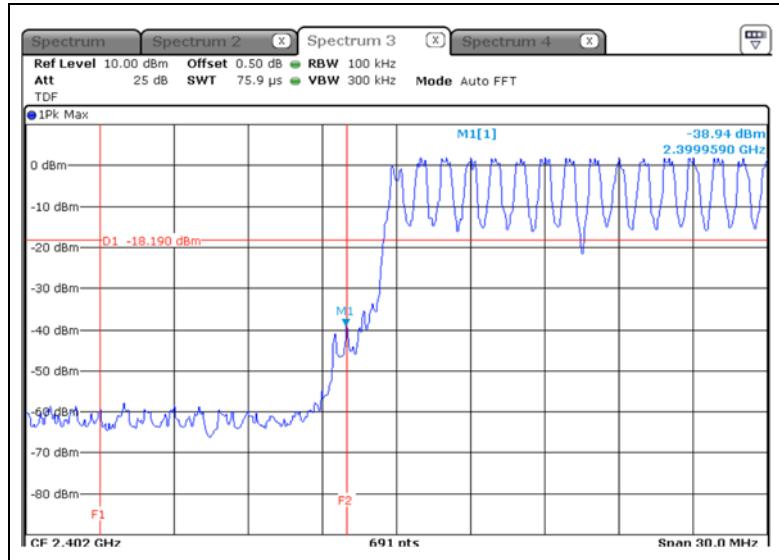


Highest Channel (2 480 MHz)

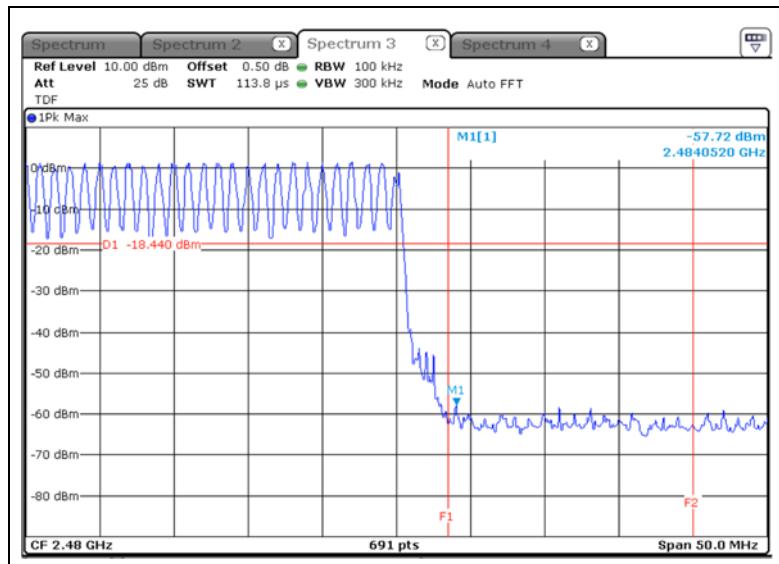


\* Result of 2 483.5 MHz

**\* 8DPSK (Without hopping)**

Lowest Channel( 2 402 MHz)

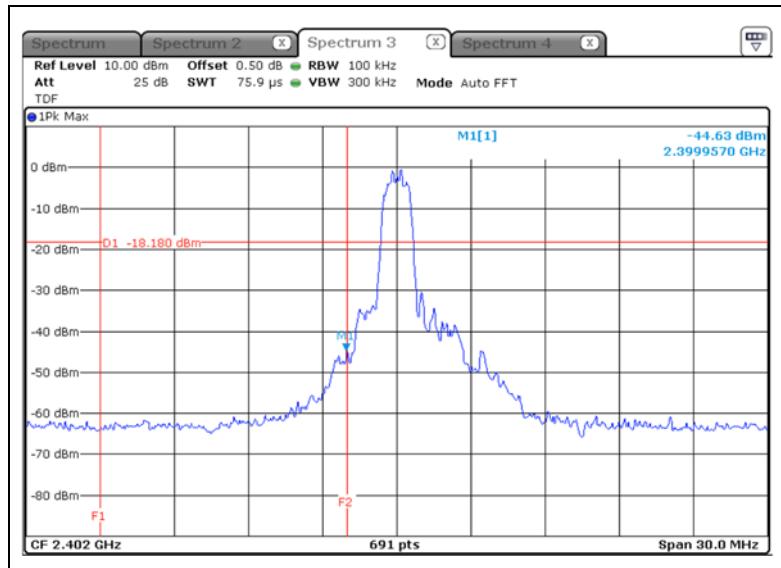


Highest Channel (2 480 MHz)

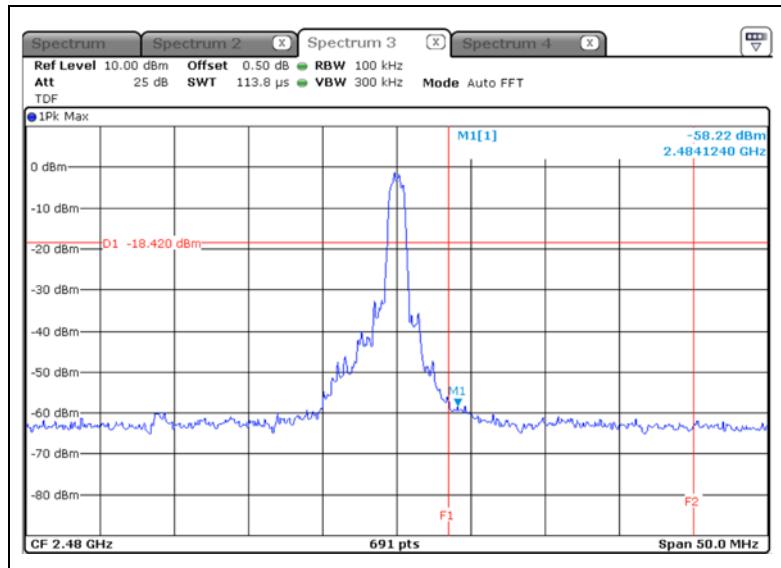


\* Result of 2 483.5 MHz

**\* 8DPSK (With hopping)**

Lowest Channel( 2 402 MHz)

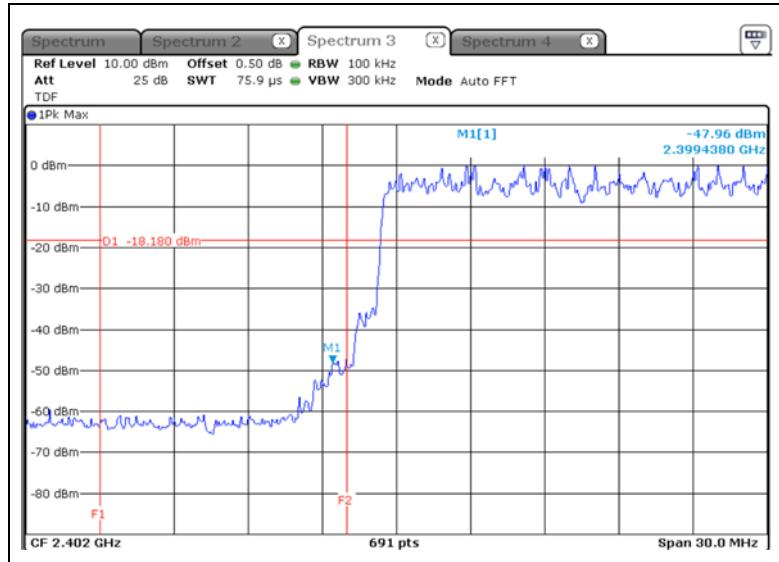

Highest Channel (2 480 MHz)

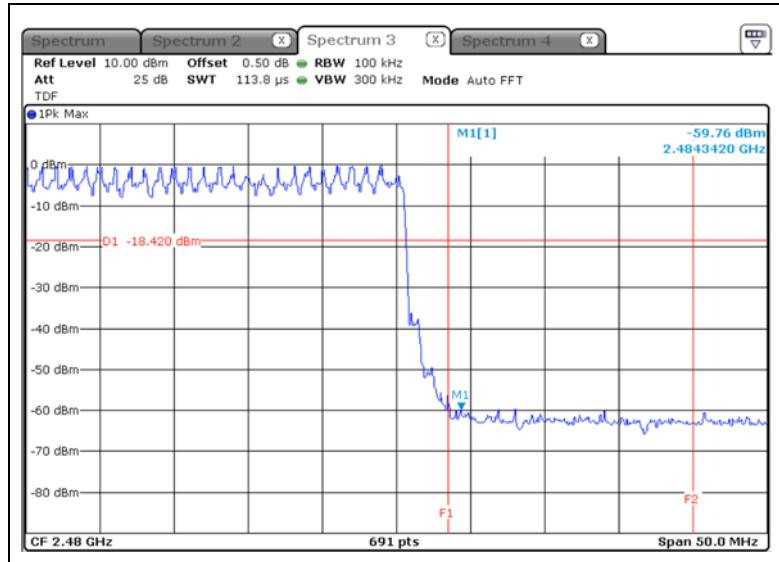


\* Result of 2.483.5 MHz


Figure 7. Plot of the Spurious RF conducted emissions

**\* GFSK**


Lowest Channel ( 2 402 MHz)

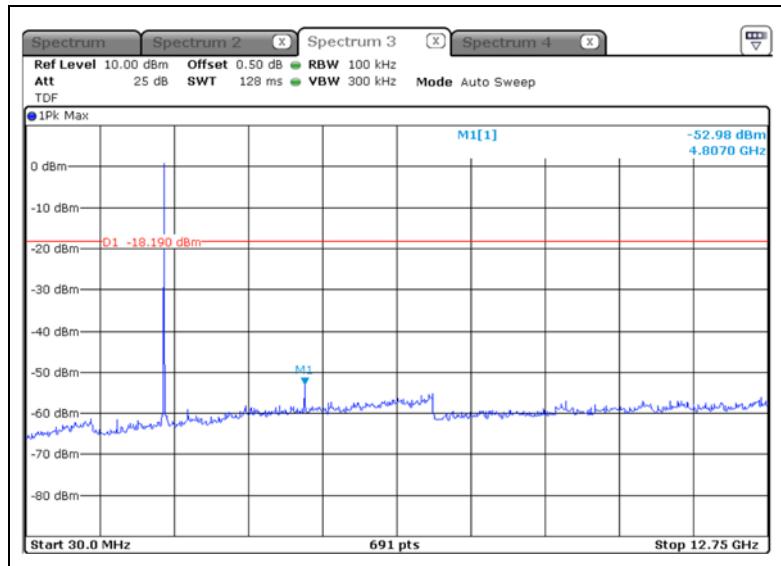

Middle Channel (2 441 MHz)

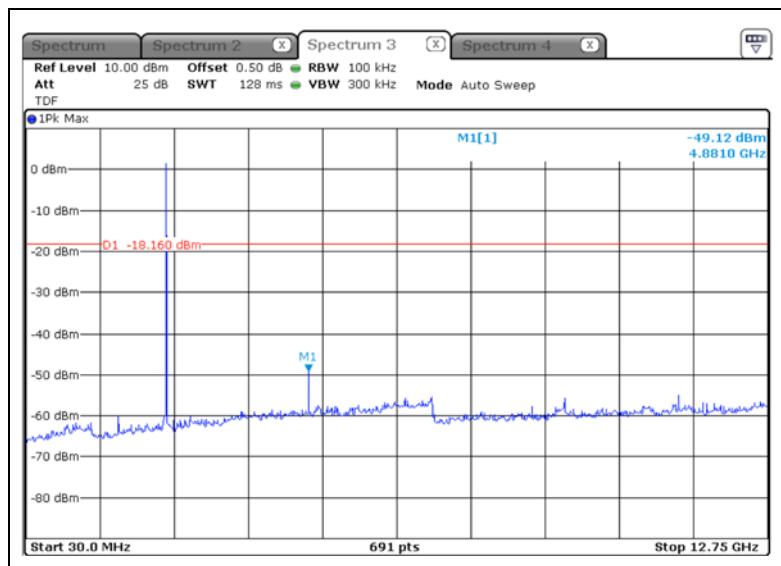


Highest Channel ( 2 480 MHz)

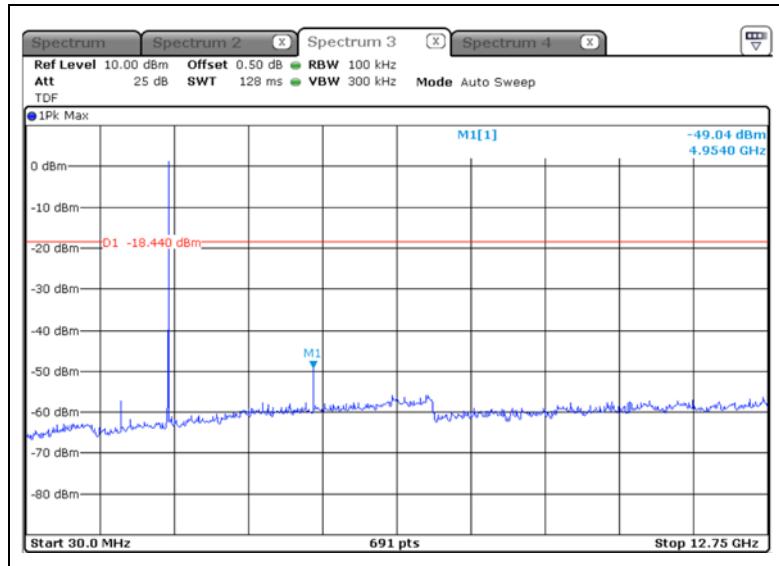


\* 8DPSK


Lowest Channel ( 2 402 MHz)

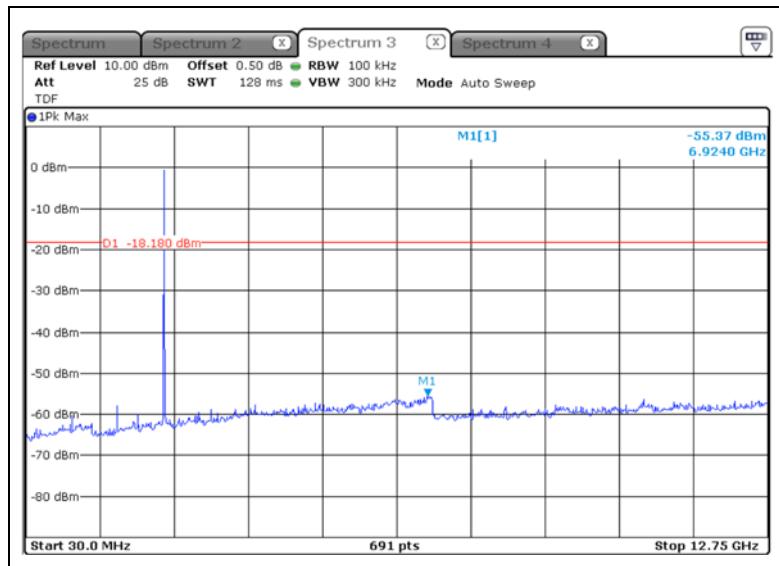

### Middle Channel (2 441 MHz)

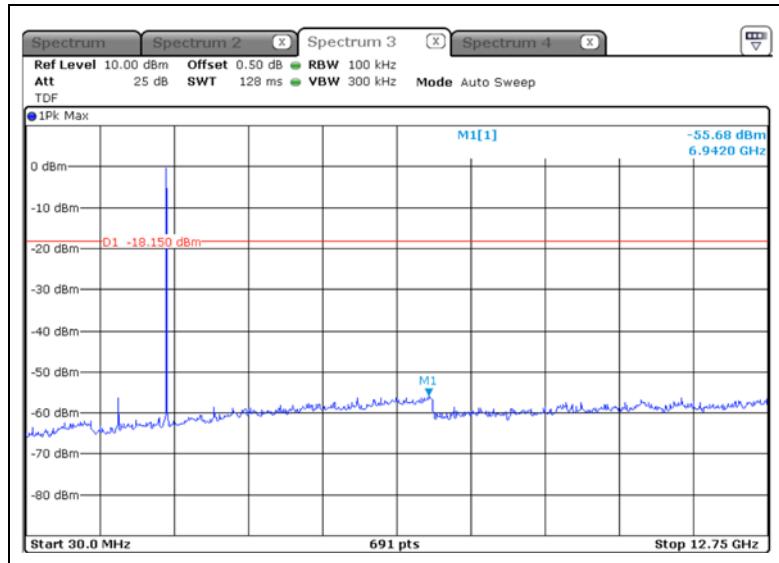

### Highest Channel (2 480 MHz)

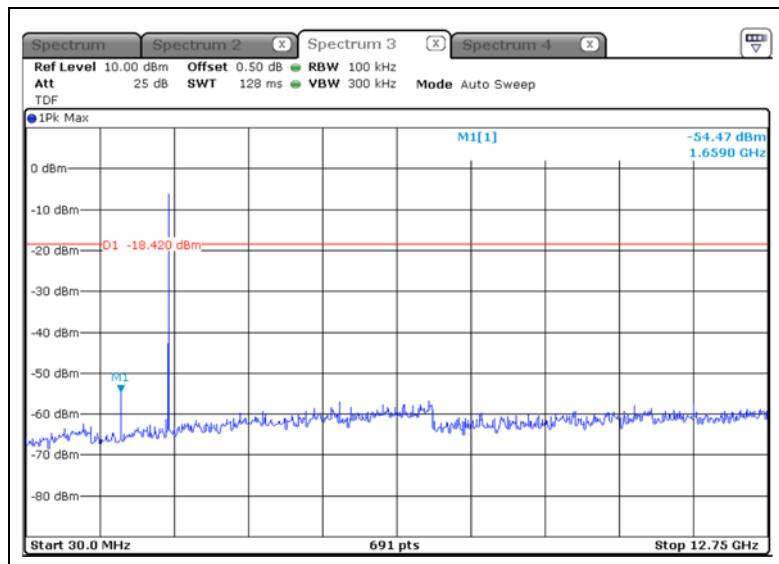

## 5.8 Conducted Emission

### 5.8.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

### 5.8.2 Measurement Procedure


- 1) The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
- 2) Each current-carrying conductor of the EUT power cord was individually connected through a 50 $\Omega$ /50 $\mu$ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
- 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
- 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
- 5) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

### 5.8.3 Test Result

- Complied

Figure 4. plot of Conducted Emission

\*Conducted worst-case data : 8DPSK\_Middle Channel (2 441 MHz)

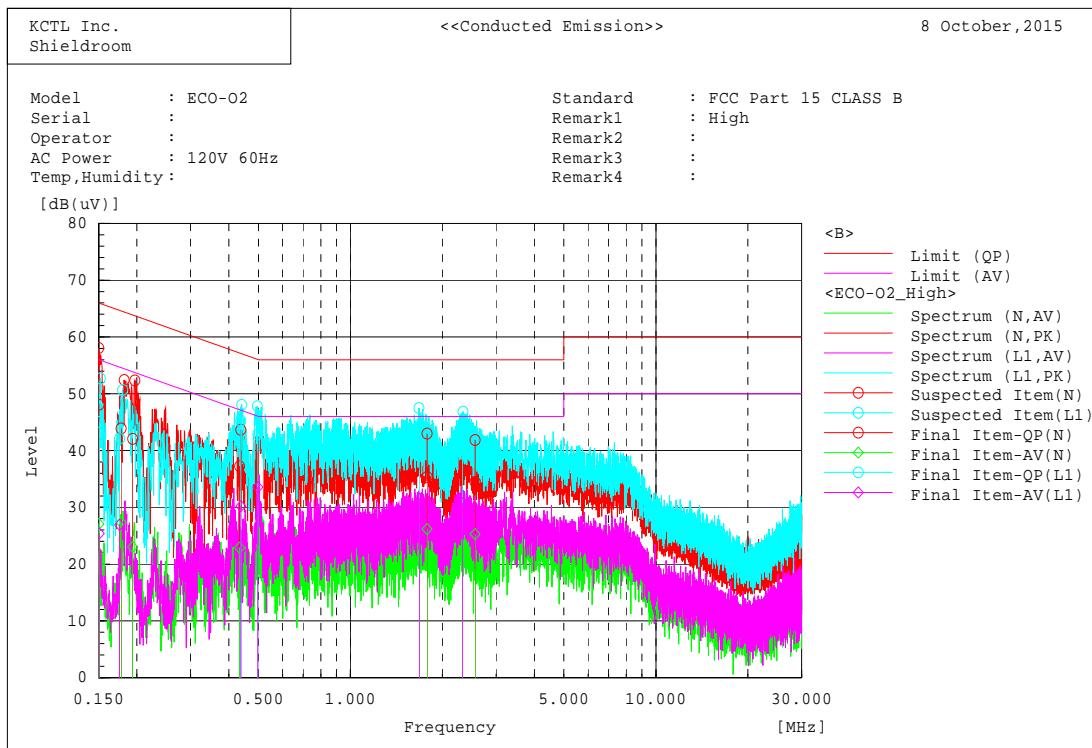

#### Final Result

##### --- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f.	Result QP [dB]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15022	38.2	17.2	9.9	48.1	27.1	66.0	56.0	17.9	28.9
2	0.17744	33.8	17.3	10.1	43.9	27.4	64.6	54.6	20.7	27.2
3	0.1936	32.0	12.9	10.1	42.1	23.0	63.9	53.9	21.8	30.9
4	0.43361	27.0	12.7	10.2	37.2	22.9	57.2	47.2	20.0	24.3
5	1.78254	25.2	16.1	10.1	35.3	26.2	56.0	46.0	20.7	19.8
6	2.55997	24.5	15.3	10.0	34.5	25.3	56.0	46.0	21.5	20.7

##### --- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f.	Result QP [dB]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15047	35.3	15.7	9.7	45.0	25.4	66.0	56.0	21.0	30.6
2	0.17561	32.3	17.1	9.8	42.1	26.9	64.7	54.7	22.6	27.8
3	0.43774	35.3	20.3	9.9	45.2	30.2	57.1	47.1	11.9	16.9
4	0.49793	33.0	23.7	9.9	42.9	33.6	56.0	46.0	13.1	12.4
5	1.68048	30.7	21.9	9.7	40.4	31.6	56.0	46.0	15.6	14.4
6	2.33238	29.8	21.0	9.7	39.5	30.7	56.0	46.0	16.5	15.3

## 6. Test equipment used for test

	Description	Manufacturer	Model No.	Serial No.	Next Cal Date.
■	Spectrum Analyzer	R&S	FSV30	100807	16.09.02
■	Spectrum Analyzer	R&S	FSV40	100989	16.01.26
■	Signal Generator	R&S	SMR40	100007	16.06.15
■	Wideband Power Sensor	R&S	NRP-Z81	100677	16.01.26
■	DC Power Supply	AGILENT	E3632A	MY40004399	16.01.06
■	Loop Antenna	R&S	HFH2-Z2	861971/003	17.03.03
■	Bi-Log Antenna	SCHWARZBECK	VULB9163	552	16.06.14
■	Horn Antenna	ETS.lindgren	3116	00086635	16.04.29
■	Horn Antenna	SCHWARZBECK	3117	155787	16.02.05
■	Preamplifier	AGILENT	3008A02343	8449B	16.09.02
■	Amplifier	SONOMA INSTRUMENT	310	186280	16.09.01
■	Double Ridged Horn Antenna	ETS-LINDGREN	3117-PA	-	16.02.26
■	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-233	16.04.13
■	Broadband preamplifier	SCHWARZBECK	BBV9721	2	16.05.19
■	Emi Test Receiver	R&S	ESR	101078	16.02.16
■	Attenuator	R&S	DNF Dämpfungsglied 10 dB in N-50 Ohm	0001	16.06.15
■	Attenuator	AGILENT	8491A	MY52460424	16.07.13
■	Antenna Mast	Innco Systems	MA4000-EP	-	-
■	Turn Table	Innco Systems	DT2000	-	-
■	Highpass Filter	Wainwright Instruments GmbH	WHKX1.0/ 1.5S-10SS	14	16.02.02
■	TWO-LINE V-Network	R&S	ENV216	101358	16.09.03
■	Test Receiver	R&S	ESCI	100001	16.08.04